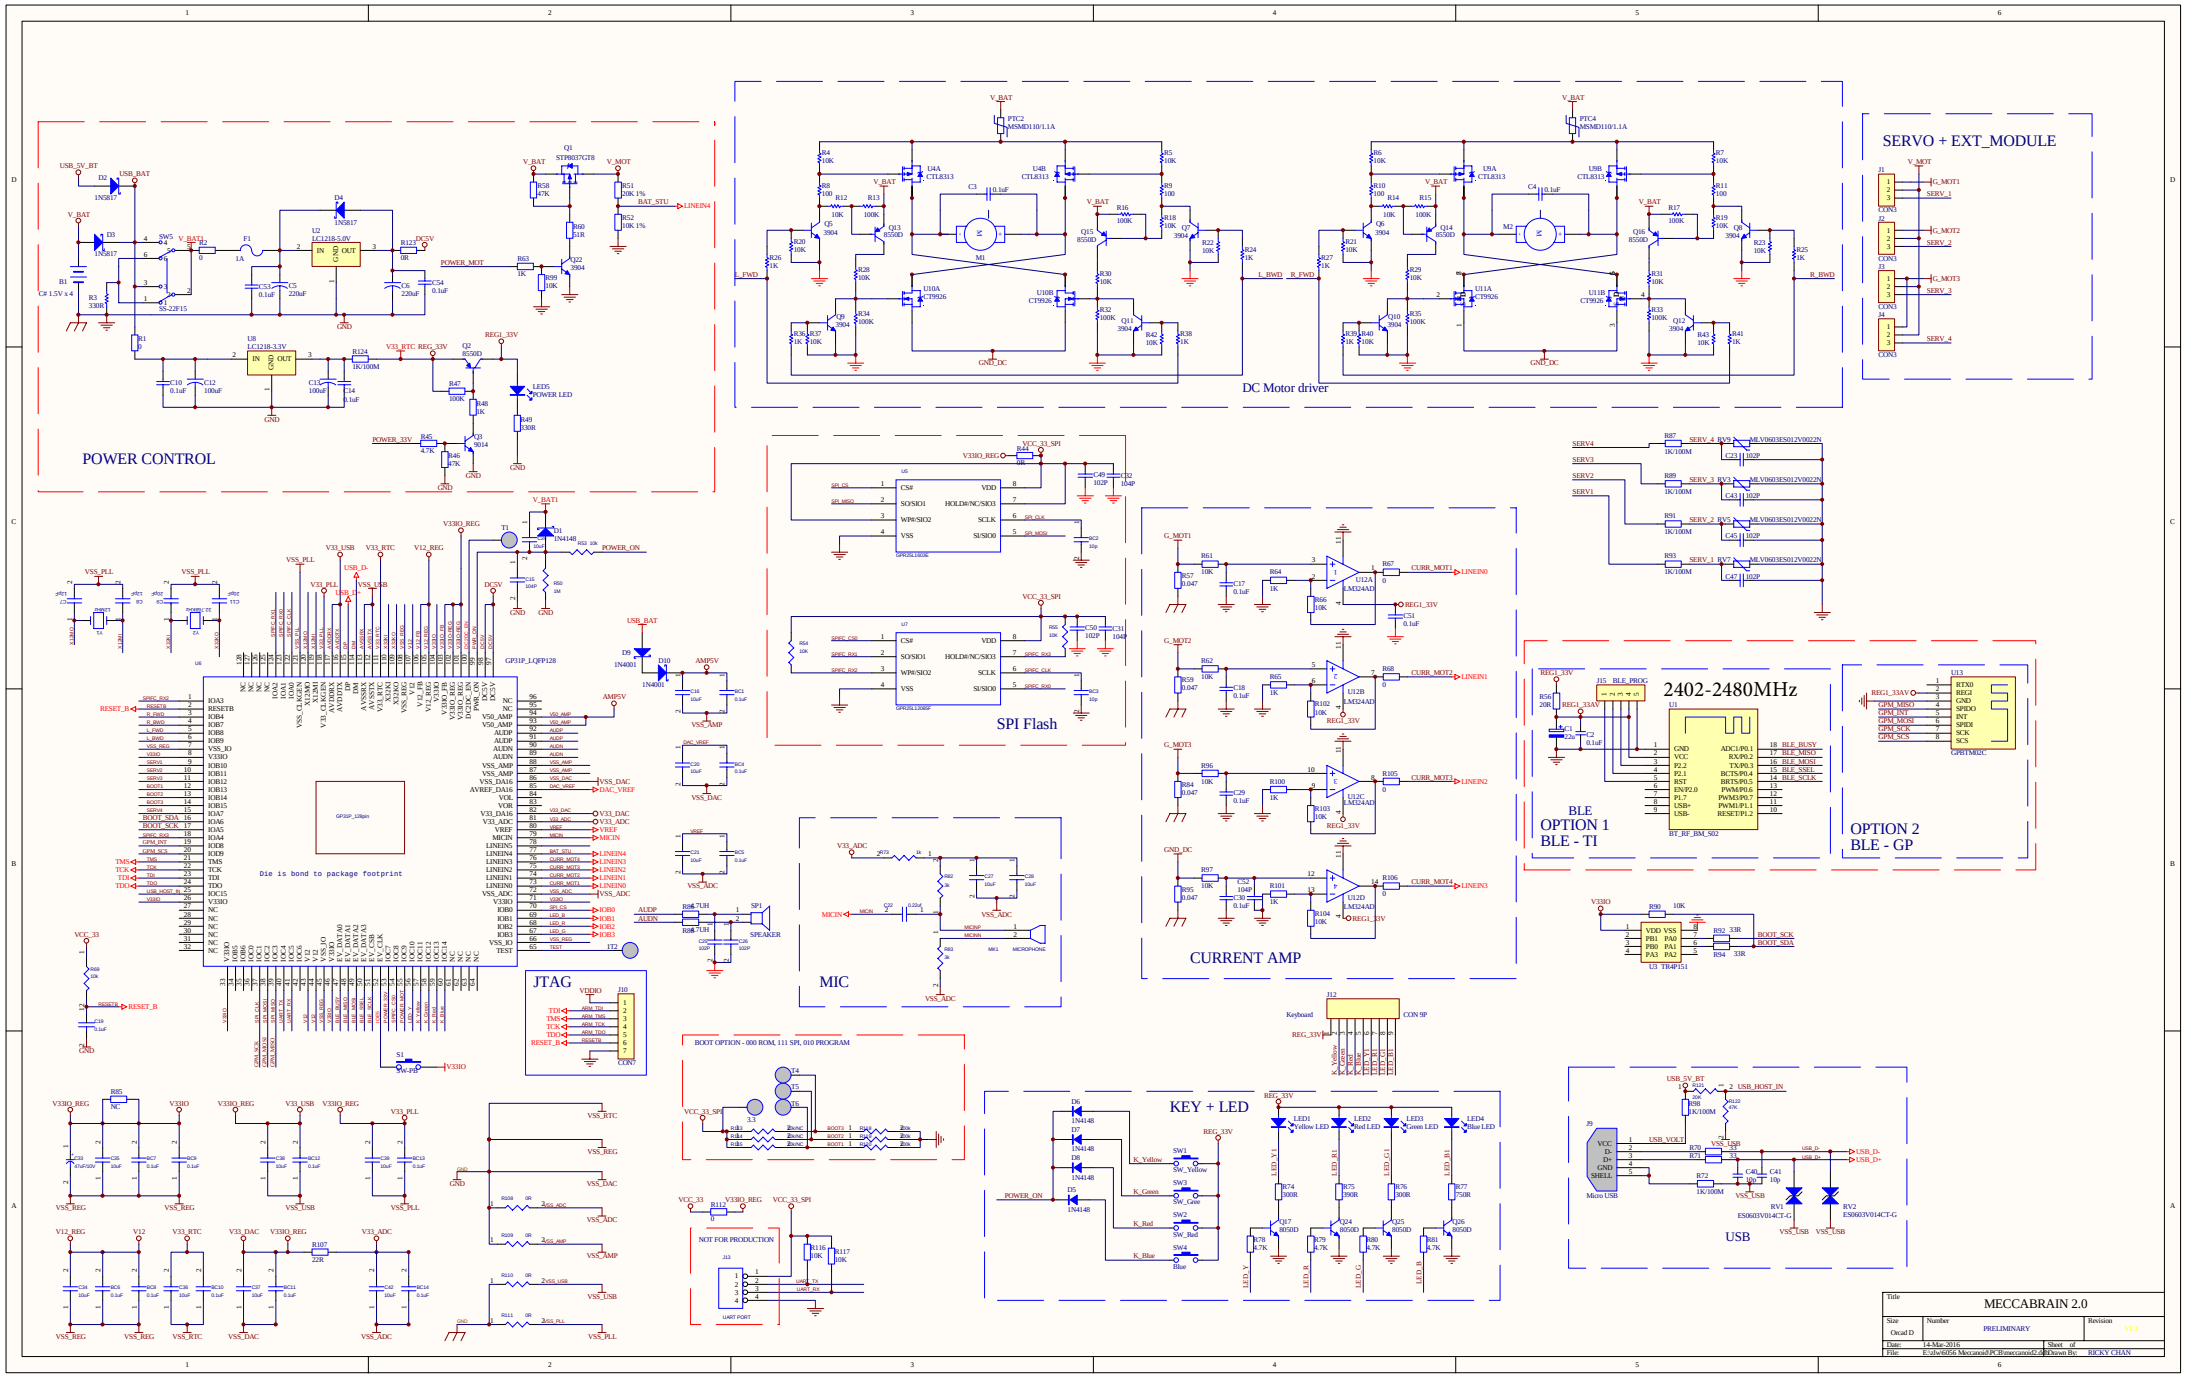
POWER CONTROL
DC Motor driver
SERVO + EXT_MODULE
SPI Flash
CURRENT AMP
MIC
JTAG
BLE OPTION 1 BLE - TI
2402-2480MHz
OPTION 2 BLE - GP
KEY + LED
USB
BOOT OPTION - 000 ROM, 111 SPI, 010 PROGRAM
NOT FOR PRODUCTION
Die is bond to package footprint
MECCABRAIN 2.0
PRELIMINARY
V1.3
14-Mar-2016
RICKY CHAN

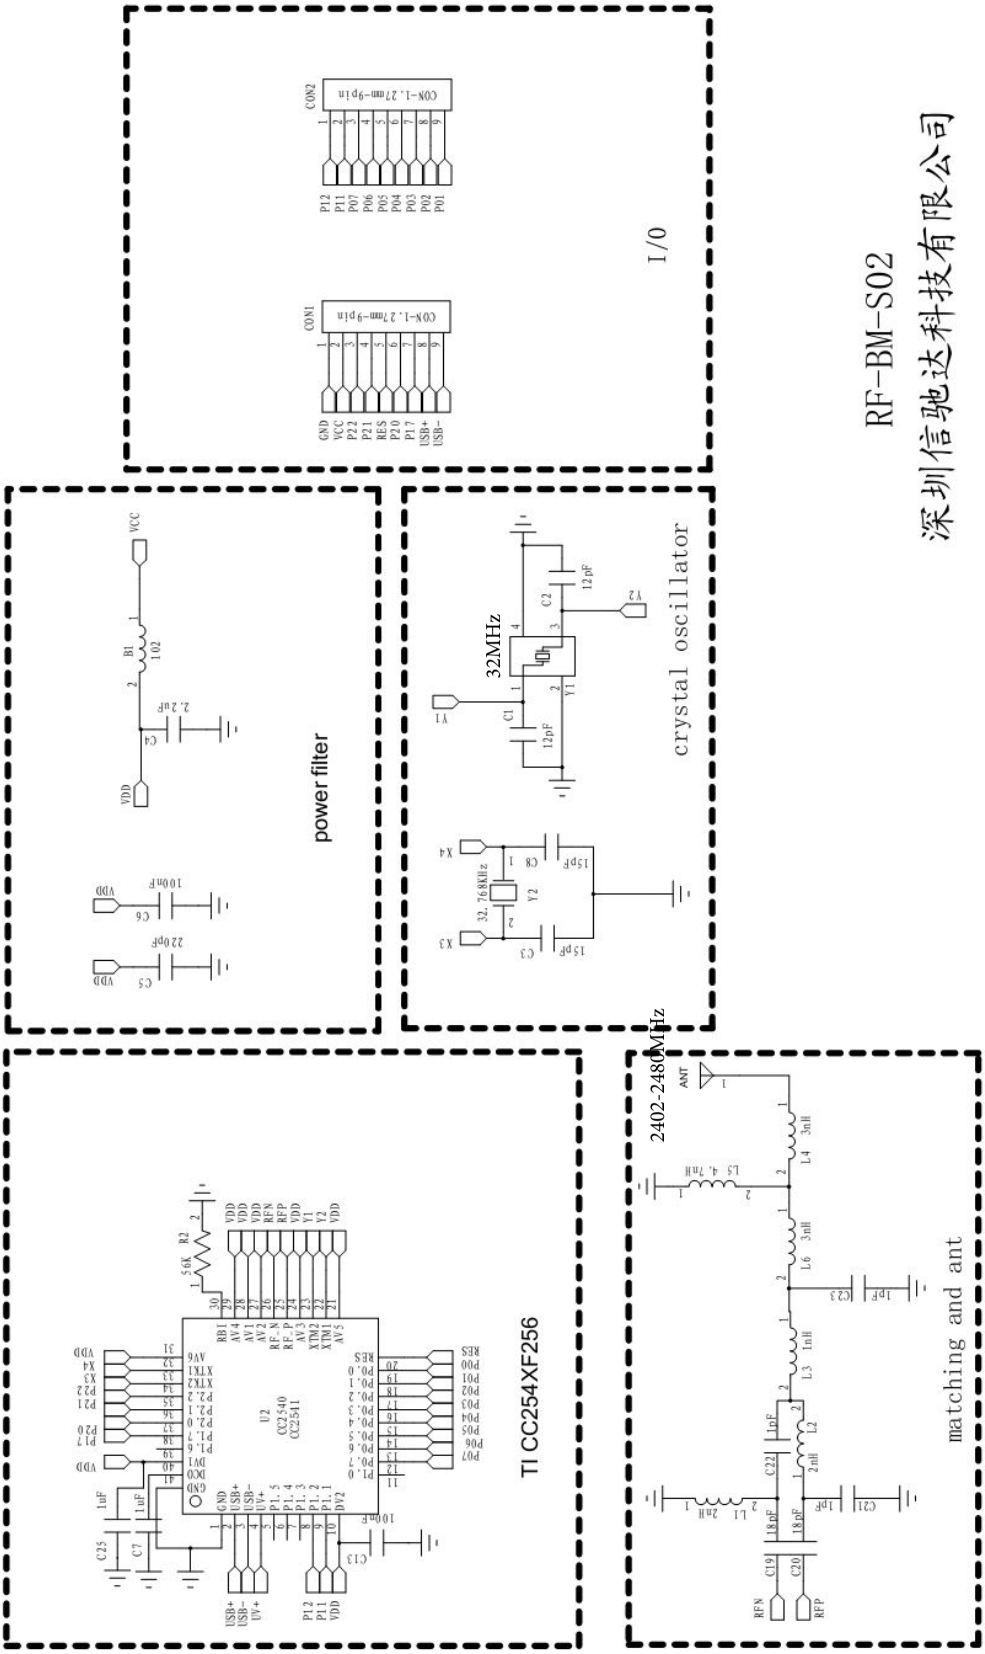
I/O
CON1
CON2
RF-BM-S02
深圳信驰达科技有限公司
power filter
crystal oscillator
32MHz
TI CC254XF256
matching and ant
2402-2480MHz

BM-S02A 原理图