



**FCC Part 15, Subpart C, Section 15.231
Industry Canada, RSS-210 and RSS-GEN
Test Report**

On

**315 MHz Keyfob Transmitter
FCC ID: PQTDORM08
IC: 10735A-DORM08**

Customer Name: Dorman Products, Inc.

Customer P.O.: PCN4125

Date of Report: October 22, 2014

Test Report No.: R-2194P

Test Start Date: August 7, 2014

Test Finish Date: October 15, 2014

Test Technician: D. Fiore

Approved By: Dean Landers

Report Prepared By: C. Reitz

Our letters, procedures and reports are for the exclusive use of the customer to whom they are addressed and their communication or the use of the name of Retlif Testing Laboratories must receive our prior written approval. Our letters, procedures and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The letters, procedures and reports and the name of Retlif Testing Laboratories or insignia are not to be used under any circumstances in advertising to the general public. This test report shall not be reproduced, except in full, without the written approval of Retlif Testing Laboratories.

Technical Information

Report Number: R-2194P

Customer: Dorman Products, Inc.

Address: 3400 East Walnut Street
Colmar, PA 18915

Manufacturer: SRM Technologies Pvt Ltd.

Manufacturer Address: Lords Block-II, 1st Floor
Plot Nos 1&2(NP), Northern Extension Area
Thiru.Vi.Ka, Industrial Estate, Ekkatuthangal
Guindy, Chennai – 600 032 India

Test Sample: 315 MHz Keyfob Transmitter

Model Numbers: 13733, 13734

FCC ID: PQTDORM08

IC: 10735A-DORM08

Type: Security / Remote Control Transmitter

Power Requirements: 3 VDC Derived from a CR2032 Battery

Frequency of Operation: 315 MHz

Equipment Class: DSC

Equipment Use: Portable < 2.5 cm

Test Specification:

FCC Rules and Regulations Part 15, Subpart C, Section 15.231
Radio Standards Specification, RSS-210, Issue 8, June, 2010

Test Procedure:

ANSI C63.4:2003
RSS-GEN, Issue 3, December 2010

Test Facility:

Retlif Testing Laboratories
3131 Detwiler Road
Harleysville, PA 19438



Retlif Testing Laboratories

Report No. R-2194P

Tests Performed

The test methods performed on the 315 MHz Keyfob Transmitter are shown below:

FCC Part 15, Subpart C	Industry Canada RSS-210	Industry Canada RSS-GEN	Test Method
15.231(b)	A1.1.2(1)	N/A	Field Strength of Emissions
15.231(b)(2)	A1.1.2(2)	4.5	Duty Cycle Determination
15.231(b)(3)	A1.1.2(3)	N/A	Field Strength of Spurious Emissions
15.231(c)	A1.1.3	N/A	Bandwidth of Emission

General Test Requirements

1. The measurement procedures of ANSI C63.4:2003 were utilized as specified in FCC Part 15, Subpart C, Section 15.31(a)(3) and IC RSS-GEN Section 4.1.
2. All radiated emissions measurements were performed on an Open Area Test Site (OATS), listed with the FCC and IC, in accordance with FCC Section 15.31(d) and IC Section 4.2.
3. The level of the fundamental field strength was recorded with a new battery installed in the EUT, in accordance with FCC Section 15.231(e) and IC Section 4.3(e).
4. All measurements were performed at the specified 3 meter test distance as required by FCC Section 15.31(f) and IC Section 7.25.
5. The EUT was rotated throughout 360 degrees for all radiated emissions measurements as specified in FCC Section 15.31(f)(5) and IC Section 4.3(h).
6. All readily accessible EUT controls were adjusted in such a manner as to maximize the level of emissions in accordance with FCC Section 15.31(g) and IC Section 4.3(h).
7. Appropriate accessories were attached to all EUT ports during the performance of radiated emissions measurements as required by FCC Section 15.31(i) and IC Section 4.3(d).
8. The EUT operated at a discrete frequency of 315 MHz.
9. The frequency spectrum was investigated from the lowest frequency generated in the device up to the 10th harmonic of the highest fundamental frequency in accordance with FCC Section 15.33(a)(1) and IC Section 4.9.
10. All measurements were taken with a peak detector function as specified in FCC Section 15.35(a) and IC Section 4.4. The duty cycle, calculated in accordance with FCC Section 15.35(c) and IC Section 4.5, was applied to the peak readings in order to obtain the average value of emissions. The peak value of emissions was verified to meet the 20 dB requirement of FCC Section 15.35(b) and IC Section 7.2.1.




Retlif Testing Laboratories

Report No. R-2194P

Certification and Signatures

We certify that this report is a true representation of the results obtained from the tests of the equipment stated. We further certify that the measurements shown in this report were made in accordance with the procedures indicated and vouch for the qualifications of all Retlif Testing Laboratories personnel taking them.



Dean Landers
EMC Test Engineer
NVLAP Approved Signatory



Richard C. Gaynor
Laboratory Manager
iNARTE Certified Engineer EMC-000214-NE
NVLAP Approved Signatory

Non-Warranty Provision

The testing services have been performed, findings obtained and reports prepared in accordance with generally accepted laboratory principles and practices. This warranty is in lieu of all others, either expressed or implied.

Non-Endorsement

This test report contains only findings and results arrived at after employing the specific test procedures and standards listed herein. It is not intended to constitute a recommendation, endorsement or certification of the product or material tested. This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



Retlif Testing Laboratories

Report No. R-2194P

Requirements and Test Results

Requirement:

FCC Section 15.231(a) - Periodic operation in the band 40.66 - 40.7 MHz and above 70 MHz

The provisions of this Section are restricted to periodic operation within the band 40.66-40.7 MHz and above 70 MHz. Except as shown in Paragraph (e) of this Section, the intentional radiator is restricted to the transmissions of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal.

IC RSS-210, A1.1 - Momentarily Operated Devices

The frequency bands and field strength limits in Tables 4 and 5 are only for the transmission of a control signal such as that used with alarm systems, door openers, remote switches, etc. Radio control of toys or model aircrafts, and continuous transmissions such as voice or video are not permitted except as provided in A1.1.5. Data is permitted to be sent with a control signal.

- **Results:**
The device was operated at a frequency of 315 MHz and is for the transmission of a control signal used for remote keyless vehicle entry.

Requirement:

FCC Sections 15.231(a)(1)-(5)

Periodic operation in the band 40.66 - 40.7 MHz and above 70 MHz

The following conditions were met in order to comply with the provisions for momentary operation:

IC RSS-210, A1.1.1(a)-(d) - Types of Momentary Signals

The following conditions were met in order to comply with the provisions for momentary operation:

FCC 15.231(a)(1): A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

IC A1.1.1(a): A manually operated transmitter shall employ a push-to-operate switch and be under manual control at all transmission times. When released, the transmitter shall cease transmission (holdover time of up to 5 seconds of operation).

- **Results:**
The device is a manually operated, push to operate transmitter under manual control. The device ceased transmission within 5 seconds of deactivation.



Retlif Testing Laboratories

Report No. R-2194P

Requirements and Test Results (con't)

FCC 15.231(a)(2): A transmitter activated automatically shall cease transmission within 5 seconds after activation.

IC A1.1.1(b): A transmitter activated automatically shall cease transmission with 5 seconds after activation, (i.e. maximum 5 seconds of operation).

- Results:
Transmission is not automatically activated.

FCC 15.231(a)(3): Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

IC A1.1.1(c): Periodic transmissions at regular predetermined intervals are not permitted, except as provided in A1.1.5. However, polling or supervision transmissions, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed 2 seconds per hour for each transmitter.

- Results:
The transmitter does not perform periodic transmissions.

FCC 15.231(a)(4): Intentional radiators which are employed for radio control purposes during emergencies involving fire, security and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

IC A1.1.1(d): Intentional radiators employed for radio control purposes during emergencies involving fire, security of goods (e.g. burglar alarms), and safety-of-life, when activated to signal an alarm, may operate during the interval of the alarm condition.

- Results:
This device is not employed for radio control purposes during emergencies involving fire, security and safety for life.

FCC 15.231(a)(5): Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

- Results:
The device is not employed for security systems.



Retlif Testing Laboratories

Report No. R-2194P

Requirements and Test Results (con't)

Requirement:

FCC Section 15.231(b) - Field Strength of Emissions

In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the limits specified in Table 1.

IC RSS-210, A1.1.2(1) - Field Strengths and Frequency Bands

The field strength of emissions from momentarily operated intentional radiators shall not exceed the limits specified in Table 1:

Table 1 - Test Limits, Field Strength of Emissions

Fundamental Frequency (MHz)	Field Strength of Fundamental microvolts/meter @ 3 meters (watts, e.i.r.p.) Quasi Peak or Average	Field Strength of Spurious Emissions microvolts/meter @ 3 meters Quasi Peak or Average
260 to 470	3,750 to 12,500**	375 to 1,250**

**Linear Interpolations

For 260-470 MHz: FS (microvolts/m) = $(41.67 \times F) - 7,083$

The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

The Fundamental and Harmonic Emissions limits for a device operating at 315 MHz are listed in Table 2.

Table 2 - Fundamental and Harmonic Limits

Frequency of Operation (MHz)	Fundamental (µV/m)		Harmonics (µV/m)	
	Average	Peak	Average	Peak
315	6042	60416	605	6042

- Results:

The Fundamental and Harmonics field strengths did not exceed the limits specified in Table 2 at a test distance of 3 meters, taken with an Average Detector. See Table 3 for the Fundamental and Harmonic emissions test results.

Table 3 - Fundamental and Harmonics Test Results

Fundamental Frequency (MHz)	Maximum Fundamental (µV/m)	Maximum Harmonics (µV/m)
315	11040.7	1199.50



Retlif Testing Laboratories

Report No. R-2194P

Requirements and Test Results (con't)

Requirement:

FCC Section 15.231(b)(2) - Duty Cycle Determination-Pulsed Operation

Intentional radiators operating under the provisions of the Section shall demonstrate compliance with the limits on the field strength emissions, as shown in Table 1, based on the average value of the measured emissions. As an alternative, compliance with the limits in the Table 1 may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in Section 15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of Section 15.205 shall be demonstrated using the measurement instrumentation specified in that Section.

IC RSS-GEN, Paragraph 4.5, Pulsed Operation

When the field strength (or envelope power) is not constant or when it is in pulses, and an average detector is specified to be used, the value of field strength or power shall be determined by averaging over one complete pulse train, including blanking intervals within the pulse train, as long as the pulse train does not exceed 0.1 seconds. In cases where the pulse train exceeds 0.1 seconds, the average value (of field strength or output power) shall be determined during a 0.1 second interval during which the field strength or power is at its maximum value.

The unit's RF output was directly coupled to the input of the spectrum analyzer. The analyzer was set for a frequency span of 0 Hz. The sweep time was then adjusted in order to display one full pulse train. The transmitter on time was then summed and compared to the time for one full cycle in order to obtain the duty cycle. (See plots for additional information).

- Model 13733 Results:
The emissions did not exceed the limits specified in Table 1. See below for the exact method of calculating the average field strength.

Transmitter On Time = 42 milliseconds (maximum per cycle)
Transmitter Cycle Time = 100 milliseconds (100 ms maximum)
Transmitter Duty Cycle = 42 %

CALCULATION

82 pulses of 512 μ sec = 41.98 milliseconds
Duty Cycle (41.984/100) = 41.9 %
Correction Factor = 20 log (0.4198) = -7.54 dB



Retlif Testing Laboratories

Report No. R-2194P

Duty Cycle Determination-Pulsed Operation (con't)

- Model 13734 Results:
The emissions did not exceed the limits specified in Table 1. See below for the exact method of calculating the average field strength.

$$\begin{aligned}\text{Transmitter On Time} &= \underline{59.42} \text{ milliseconds (maximum per cycle)} \\ \text{Transmitter Cycle Time} &= \underline{100} \text{ milliseconds (100 ms maximum)} \\ \text{Transmitter Duty Cycle} &= \underline{59} \text{ \%}\end{aligned}$$

CALCULATION

$$\begin{aligned}172 \text{ pulses of } 276 \mu\text{sec and } 20 \text{ pulses of } 556 \mu\text{sec} &= \underline{59.42} \text{ milliseconds} \\ \text{Duty Cycle } (59.42/100) &= \underline{59.4} \text{ \%} \\ \text{Correction Factor} = 20 \log (0.5942) &= \underline{-4.52} \text{ dB}\end{aligned}$$

Requirement:

FCC Section 15.231(b)(3) - Field Strength of Spurious Emissions

The limits on the field strength of the spurious emissions specified in Table 1 are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in Table 1 or to the general limits shown in Section 15.209, whichever limit permits a higher field strength.

IC RSS-210, A1.1.2(3) - Field Strength of Unwanted Emissions

The limits on the field strength of unwanted emissions in Table 4 of RSS-210 are based on the fundamental frequency of the intentional radiator. Unwanted emissions shall be attenuated to the limits shown in Table 2 of RSS-210 or to the limits shown in Table 4 of RSS-210, whichever is less stringent.

- Results:
No spurious emissions were observed within 20 dB of the specified limit.



Retlif Testing Laboratories

Report No. R-2194P

Requirements and Test Results (con't)

Requirement:

FCC Section 15.231(c) - Bandwidth of Emissions

The bandwidth of the emissions shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

IC RSS-210, A1.1.3 - Bandwidth of Momentary Signals

For the purpose of Section A1.1, the 99% bandwidth shall be no wider than 0.25% of the center frequency for devices operating between 70-900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

- Model 13733 Results:
The 20 dB bandwidth was measured and found to be 61.0 kHz.
- Model 13734 Results:
The 20 dB bandwidth was measured and found to be 54.33 kHz.



Retlif Testing Laboratories

Report No. R-2194P

General Requirements FCC and IC

Spectrum Analyzer Desensitization Considerations

Due to the nature of the emissions being measured, care was taken to ensure that the resolution bandwidth of the spectrum analyzer was adequate to provide accurate measurements. The following formula was utilized:

$$\text{minimum bandwidth} = 1/\{\text{minimum pulse width (in seconds)} \times 1.5\} = \text{Hz}$$

Setting pulse desensitization equal to zero and utilizing the minimum observed pulse width of 276 μs yields a minimum required bandwidth of 2415.46 Hz. FCC specified bandwidths of 100 kHz and 1 MHz were utilized below and above 1 GHz, respectively.



Retlif Testing Laboratories

Report No. R-2194P

Equipment Lists

FCC Section 15.231(b) - Field Strength of Emissions IC RSS-210, A1.1.2(1) - Field Strength and Frequency Bands

August 7, 2014

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
8018	EMCO	DOUBLE RIDGED GUIDE	1 GHZ - 18 GHZ	3115	11/6/2013	5/31/2015
8300	RETLIF	TEST SITE ATTENUATION	3/10 Meter OATS	RPA	8/28/2013	8/31/2014
8300C	UNKNOWN	3/10 METER CABLE	3/10 METER	3 METER CABLE	9/4/2013	9/30/2014
8317	AGILENT / HP	PRE-AMPLIFIER	1-26.5 GHz, 30 dB	8449B	6/12/2014	6/30/2015
8411	SONOMA INSTRUMENT	PRE-AMPLIFIER	9 kHz - 1 GHz	310N	9/4/2013	9/30/2014
8433	ETS LINDGREN	BICONILOG	20 - 6000 MHz	3142D	3/10/2014	9/30/2015
R650	AGILENT / HP	SPECTRUM ANALYZER	100 Hz - 26.5 GHz	E7405A	3/27/2014	3/31/2015

October 15, 2014

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
713D	MICRO-COAX 50U50U	CABLE ASSEMBLY	3 FT.	UFB311A1-0360-	9/30/2014	9/30/2015
8017	EMCO	DOUBLE RIDGE GUIDE	1 - 18 GHz	3115	8/21/2014	2/29/2016
8071	AGILENT / HP	SPECTRUM ANALYZER	100Hz-2.5 GHz/2-22GH	8566B	8/6/2014	8/31/2015
8072	AGILENT / HP DISPLAY	SPECTRUM ANALYZER		85662A	8/6/2014	8/31/2015
8300	RETLIF	TEST SITE ATTENUATION	3/10 Meter OATS	RPA	8/7/2014	8/31/2015
8300C	UNKNOWN	3/10 METER CABLE	3/10 METER	3 METER CABLE	9/4/2013	10/30/2014
8317	AGILENT / HP	PRE-AMPLIFIER	1-26.5 GHz, 30 dB	8449B	6/12/2014	6/30/2015
8411	SONOMA INSTRUMENT	PRE-AMPLIFIER	9 kHz - 1 GHz	310N	9/30/2014	9/30/2015
8433	ETS LINDGREN	BICONILOG	20 - 6000 MHz	3142D	3/10/2014	9/30/2015

FCC Section 15.231(b)(2) - Duty Cycle Determination - Pulsed Operation IC RSS-210, A1.1.2(2), RSS-GEN, 4.5 - Pulsed Operation

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
R650	AGILENT / HP	SPECTRUM ANALYZER	100 Hz - 26.5 GHz	E7405A	3/27/2014	3/31/2015

FCC Section 15.231(b)(3) - Field Strength of Spurious Emissions IC RSS-210, A1.1.2(3) - Field Strength of Unwanted Emissions

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
8080	ROHDE & SCHWARZ	EMI TEST RECEIVER	20-1300 MHz	354-3000.56ESVP	12/16/2013	12/31/2014
8300	RETLIF	TEST SITE ATTENUATION	3/10 Meter OATS	RPA	8/28/2013	8/31/2014
8300C	UNKNOWN	3/10 METER CABLE	3/10 METER	3 METER CABLE	9/4/2013	9/30/2014
8411	SONOMA INSTRUMENT	PRE-AMPLIFIER	9 kHz - 1 GHz	310N	9/4/2013	9/30/2014
8433	ETS LINDGREN	BICONILOG	20 - 6000 MHz	3142D	3/10/2014	9/30/2015
R650	AGILENT / HP	SPECTRUM ANALYZER	100 Hz - 26.5 GHz	E7405A	3/27/2014	3/31/2015

FCC Section 15.231(c) - Bandwidth of Emission IC RSS-210, A1.1.3 - Bandwidth of Momentary Signals

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
R650	AGILENT / HP	SPECTRUM ANALYZER	100 Hz - 26.5 GHz	E7405A	3/27/2014	3/31/2015



Retlif Testing Laboratories

Report No. R-2194P

**FCC Section 15.231(b) - Field Strength of Emissions
IC RSS-210, A1.1.2(1) - Field Strength and Frequency Bands**

Model: 13733

Test Data



Retlif Testing Laboratories

Report No. R-2194P

Test Method:	FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)						
	IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands						
Customer:	Dorman Products				Job No.:	R-2194P	
Test Sample:	315 MHz Remote Keyless Transmitter						
Model No.:	13733						
Operating Mode:	Continuously transmitting a RF signal at 315 MHz						
Technician:	D.Fiore				Date:	08/07/2014	
Notes:	Detector: Peak, Unless otherwise specified				Test Distance: 3 Meters		
Test Freq.	Antenna Pol./Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Peak Limit
MHz	(V/H)/Meters	X / Y / Z	dBμV	dB	dBμV/m	uV/m	uV/m
315.00	V / 1.50	X	61.09	15.85	76.94	7030.72	60416
315.00	V / 1.72	Y	64.17	15.85	80.02	10023.05	
315.00	V / 1.00	Z	65.01	15.85	80.86	11040.79	
315.00	H / 2.00	X	57.44	15.85	73.29	4618.49	
315.00	H / 2.17	Y	60.44	15.85	76.29	6523.79	
315.00	H / 1.50	Z	49.10	15.85	64.95	1768.07	60416
630.00	V / 1.30	X	28.69	24.67	53.36	465.59	6042
630.00	V / 3.21	Y	20.49	24.67	45.16	181.13	
630.00	V / 2.62	Z	24.76	24.67	49.53	296.14	
630.00	H / 1.20	X	24.83	24.67	49.50	298.54	
630.00	H / 1.26	Y	28.87	24.67	53.54	475.33	
630.00	H / 1.00	Z	31.59	24.67	56.26	650.13	6042
945.00	V / 1.00	X	28.98	29.20	58.18	810.96	6042
945.00	V / 1.00	Y	29.07	29.20	58.27	819.41	
945.00	V / 1.44	Z	26.81	29.20	56.01	631.68	
945.00	H / 2.57	X	26.99	29.20	56.19	644.91	
945.00	H / 1.50	Y	32.38	29.20	61.58	1199.50	
945.00	H / 1.37	Z	31.46	29.20	60.66	1078.95	6042
1260.00	V / 1.00	X	65.08	-6.94	58.14	807.23	6042
1260.00	V / 1.18	Y	59.18	-6.94	52.24	409.26	
1260.00	V / 1.00	Z	57.04	-6.94	50.10	319.89	
1260.00	H / 1.28	X	55.49	-6.94	48.55	267.61	
1260.00	H / 1.30	Y	65.29	-6.94	58.35	826.99	
1260.00	H / 1.24	Z	65.71	-6.94	58.77	867.96	6042
1575.00	V / 1.58	X	54.37	-4.98	49.39	294.78	5000
1575.00	V / 1.50	Y	48.50	-4.98	43.52	149.97	
1575.00	V / 2.53	Z	48.65	-4.98	43.67	152.58	
1575.00	H / 1.00	X	47.02	-4.98	42.04	126.47	
1575.00	H / 1.00	Y	54.46	-4.98	49.48	297.85	
1575.00	H / 1.00	Z	52.38	-4.98	47.40	234.42	5000



Retlif Testing Laboratories

Report No. R-2194P

Test Method:	FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)						
	IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands						
Customer:	Dorman Products				Job No.:	R-2194P	
Test Sample:	315 MHz Remote Keyless Transmitter						
Model No.:	13733						
Operating Mode:	Continuously transmitting a RF signal at 315 MHz						
Technician:	D.Fiore				Date:	08/07/2014	
Notes:	Detector: Peak, unless otherwise specified				Test Distance: 3 Meters		
Test Freq.	Antenna Pol./Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Peak Limit
MHz	(V/H)-Meters	X / Y / Z	dBµV	dB	dBµV/m	uV/m	uV/m
1890.00	V / 1.00	X	55.80	-0.6	55.20	575.43	6042
1890.00	V / 1.32	Y	47.79	-0.6	47.19	228.82	
1890.00	V / 1.21	Z	48.80	-0.6	48.20	257.04	
1890.00	H / 2.00	X	50.25	-0.6	49.65	303.73	
1890.00	H / 1.19	Y	57.56	-0.6	56.96	704.69	
1890.00	H / 1.30	Z	49.20	-0.6	48.60	269.15	6042
2205.00	V / 1.00	X	50.53	-1.72	48.81	275.74	5000
2205.00	V / 1.00	Y	52.92	-1.72	51.20	363.07	
2205.00	V / 1.00	Z	49.89	-1.72	48.17	256.15	
2205.00	H / 1.00	X	53.08	-1.72	51.36	369.82	
2205.00	H / 1.00	Y	52.08	-1.72	50.36	329.60	
2205.00	H / 1.00	Z	52.12	-1.72	50.40	331.13	5000
*2520.00	V / 1.00	X	48.40	-0.74	47.66	241.55	6042
*2520.00	V / 1.00	Y	48.40	-0.74	47.66	241.55	
*2520.00	V / 1.00	Z	48.40	-0.74	47.66	241.55	
*2520.00	H / 1.00	X	48.40	-0.74	47.66	241.55	
*2520.00	H / 1.00	Y	48.40	-0.74	47.66	241.55	
*2520.00	H / 1.00	Z	48.40	-0.74	47.66	241.55	6042
*2835.00	V / 1.00	X	45.18	0.24	45.42	186.64	5000
*2835.00	V / 1.00	Y	45.18	0.24	45.42	186.64	
*2835.00	V / 1.00	Z	45.18	0.24	45.42	186.64	
*2835.00	H / 1.00	X	45.18	0.24	45.42	186.64	
*2835.00	H / 1.00	Y	45.18	0.24	45.42	186.64	
*2835.00	H / 1.00	Z	45.18	0.24	45.42	186.64	5000
*3150.00	V / 1.00	X	47.26	2.16	49.42	295.80	6042
*3150.00	V / 1.00	Y	47.26	2.16	49.42	295.80	
*3150.00	V / 1.00	Z	47.26	2.16	49.42	295.80	
*3150.00	H / 1.00	X	47.26	2.16	49.42	295.80	
*3150.00	H / 1.00	Y	47.26	2.16	49.42	295.80	
*3150.00	H / 1.00	Z	47.26	2.16	49.42	295.80	6042
	The frequency range was scanned from 30 MHz to 3.2 GHz. All emissions not recorded were more than 20 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.						
	*Noise floor measurements, minimum sensitivity of measurement system.						



Retlif Testing Laboratories

Report No. R-2194P

Test Method:	FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)						
	IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands						
Customer:	Dorman Products				Job No.:	R-2194P	
Test Sample:	315 MHz Remote Keyless Transmitter						
Model No.:	13733						
Operating Mode:	Continuously transmitting a RF signal at 315 MHz						
Technician:	D.Fiore				Date:	08/07/2014	
Notes:	Average values calculated from Peak readings Duty Cycle: 42 % Correction: -7.54 dB						
Test Freq.	Antenna Pol./Height	EUT Orientation	Peak Reading	Duty Cycle Correction	Corrected Reading	Converted Reading	Avg. Limit
MHz	(V/H)-Meters	X / Y / Z	dBµV/m	dB	dBµV/m	uV/m	uV/m
315.00	V / 1.50	X	76.94	-7.54	69.40	2951.21	6042
315.00	V / 1.72	Y	80.02	-7.54	72.48	4207.27	
315.00	V / 1.00	Z	80.86	-7.54	73.32	4634.47	
315.00	H / 2.00	X	73.29	-7.54	65.75	1938.65	
315.00	H / 2.17	Y	76.29	-7.54	68.75	2738.42	
315.00	H / 1.50	Z	64.95	-7.54	57.41	742.16	6042
630.00	V / 1.30	X	53.36	-7.54	45.82	195.43	605
630.00	V / 3.21	Y	45.16	-7.54	37.62	76.03	
630.00	V / 2.62	Z	49.53	-7.54	41.99	125.75	
630.00	H / 1.20	X	49.50	-7.54	38.36	82.79	
630.00	H / 1.26	Y	53.54	-7.54	46.00	199.52	
630.00	H / 1.00	Z	56.26	-7.54	48.72	272.90	605
945.00	V / 1.00	X	58.18	-7.54	50.64	340.40	605
945.00	V / 1.00	Y	58.27	-7.54	50.73	343.95	
945.00	V / 1.44	Z	56.01	-7.54	48.47	265.15	
945.00	H / 2.57	X	56.19	-7.54	48.65	270.70	
945.00	H / 1.50	Y	61.58	-7.54	54.04	503.50	
945.00	H / 1.37	Z	60.66	-7.54	53.12	452.90	605
1260.00	V / 1.00	X	58.14	-7.54	50.60	338.84	605
1260.00	V / 1.18	Y	52.24	-7.54	47.70	171.79	
1260.00	V / 1.00	Z	50.10	-7.54	42.56	134.28	
1260.00	H / 1.28	X	48.55	-7.54	41.01	112.33	
1260.00	H / 1.30	Y	58.35	-7.54	50.81	347.13	
1260.00	H / 1.24	Z	58.77	-7.54	51.23	364.33	605
1575.00	V / 1.58	X	49.39	-7.54	41.85	123.73	500
1575.00	V / 1.50	Y	43.52	-7.54	35.98	62.95	
1575.00	V / 2.53	Z	43.67	-7.54	36.13	64.05	
1575.00	H / 1.00	X	42.04	-7.54	34.50	53.09	
1575.00	H / 1.00	Y	49.48	-7.54	41.94	125.02	
1575.00	H / 1.00	Z	47.40	-7.54	39.86	98.40	500
	The frequency range was scanned from 30 MHz to 3.2 GHz. All emissions not recorded were more than 20 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.						
	*Noise floor measurements, minimum sensitivity of measurement system.						



Retlif Testing Laboratories

Report No. R-2194P

Test Method:		FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)					
		IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands					
Customer:		Dorman Products			Job No.:		R-2194P
Test Sample:		315 MHz Remote Keyless Transmitter					
Model No.:		13733					
Operating Mode:		Continuously transmitting a RF signal at 315 MHz					
Technician:		D.Fiore			Date:		08/07/2014
Notes:		Average values calculated from Peak readings Duty Cycle: 42 % Correction: -7.54 dB					
Test Freq.	Antenna Pol./Height	EUT Orientation	Peak Reading	Duty Cycle Correction	Corrected Reading	Converted Reading	Avg. Limit
MHz	(V/H)-Meters	X / Y / Z	dBµV/m	dB	dBµV/m	µV/m	µV/m
1890.00	V / 1.00	X	55.20	-7.54	47.66	241.55	605
1890.00	V / 1.32	Y	47.19	-7.54	39.65	96.05	
1890.00	V / 1.21	Z	48.20	-7.54	40.66	107.89	
1890.00	H / 2.00	X	49.65	-7.54	42.11	127.50	
1890.00	H / 1.19	Y	56.96	-7.54	49.42	295.80	
1890.00	H / 1.30	Z	48.60	-7.54	41.06	112.98	605
2205.00	V / 1.00	X	48.81	-7.54	40.87	110.54	500
2205.00	V / 1.00	Y	51.20	-7.54	43.66	152.41	
2205.00	V / 1.00	Z	48.17	-7.54	40.63	107.52	
2205.00	H / 1.00	X	51.36	-7.54	43.82	155.24	
2205.00	H / 1.00	Y	50.36	-7.54	42.82	138.36	
2205.00	H / 1.00	Z	50.40	-7.54	42.86	139.00	500
*2520.00	V / 1.00	X	47.66	-7.54	40.12	101.39	605
*2520.00	V / 1.00	Y	47.66	-7.54	40.12	101.39	
*2520.00	V / 1.00	Z	47.66	-7.54	40.12	101.39	
*2520.00	H / 1.00	X	47.66	-7.54	40.12	101.39	
*2520.00	H / 1.00	Y	47.66	-7.54	40.12	101.39	
*2520.00	H / 1.00	Z	47.66	-7.54	40.12	101.39	605
*2835.00	V / 1.00	X	45.42	-7.54	37.88	78.34	500
*2835.00	V / 1.00	Y	45.42	-7.54	37.88	78.34	
*2835.00	V / 1.00	Z	45.42	-7.54	37.88	78.34	
*2835.00	H / 1.00	X	45.42	-7.54	37.88	78.34	
*2835.00	H / 1.00	Y	45.42	-7.54	37.88	78.34	
*2835.00	H / 1.00	Z	45.42	-7.54	37.88	78.34	500
*3150.00	V / 1.00	X	49.42	-7.54	41.88	124.17	605
*3150.00	V / 1.00	Y	49.42	-7.54	41.88	124.17	
*3150.00	V / 1.00	Z	49.42	-7.54	41.88	124.17	
*3150.00	H / 1.00	X	49.42	-7.54	41.88	124.17	
*3150.00	H / 1.00	Y	49.42	-7.54	41.88	124.17	
*3150.00	H / 1.00	Z	49.42	-7.54	41.88	124.17	605



Retlif Testing Laboratories

Report No. R-2194P

**FCC Section 15.231(b) - Field Strength of Emissions
IC RSS-210, A1.1.2(1) - Field Strength and Frequency Bands**

Model: 13734

Test Data



Retlif Testing Laboratories

Report No. R-2194P

Test Method:		FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)					
		IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands					
Customer:		Dorman Products			Job No.:	R-2194P	
Test Sample:		315 MHz Remote Keyless Transmitter					
Model No.:		13734					
Operating Mode:		Continuously transmitting a RF signal at 315 MHz					
Technician:		D.Fiore			Date:	10/15/2014	
Notes:		Detector: Peak, Unless otherwise specified				Test Distance: 3 Meters	
Test Freq.	Antenna Pol./Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Peak Limit
MHz	(V/H)/Meters	X / Y / Z	dBµV	dB	dBµV/m	uV/m	uV/m
315.00	V / 1.00	X	54.50	15.85	70.35	3292.30	60416
315.00	V / 1.00	Y	57.20	15.85	73.05	4492.62	
315.00	V / 1.00	Z	46.30	15.85	62.15	1280.86	
315.00	H / 1.50	X	59.70	15.85	75.55	5991.00	
315.00	H / 2.68	Y	59.90	15.85	75.75	6130.56	
315.00	H / 1.00	Z	63.10	15.85	78.95	8861.35	60416
630.00	V / 1.00	X	22.60	24.67	47.27	230.94	6042
630.00	V / 1.00	Y	17.70	24.67	42.37	131.37	
630.00	V / 3.00	Z	15.90	24.67	40.57	106.78	
630.00	H / 1.30	X	20.60	24.67	45.27	183.44	
630.00	H / 1.66	Y	24.10	24.67	48.77	274.47	
630.00	H / 1.41	Z	22.30	24.67	46.97	223.10	6042
945.00	V / 1.27	X	25.70	29.20	54.90	555.90	6042
945.00	V / 1.17	Y	19.30	29.20	48.50	266.07	
945.00	V / 2.81	Z	20.90	29.20	50.10	319.89	
945.00	H / 1.50	X	23.25	29.20	52.45	419.28	
945.00	H / 1.00	Y	29.90	29.20	59.10	901.57	
945.00	H / 1.00	Z	27.90	29.20	57.10	716.14	6042
1260.00	V / 1.00	X	60.10	-6.94	53.16	454.99	6042
1260.00	V / 1.00	Y	54.10	-6.94	47.16	228.03	
1260.00	V / 1.87	Z	49.50	-6.94	42.56	134.28	
1260.00	H / 1.48	X	48.50	-6.94	41.56	119.67	
1260.00	H / 1.31	Y	61.70	-6.94	54.76	547.02	
1260.00	H / 1.30	Z	52.40	-6.94	45.46	187.50	6042
1575.00	V / 1.15	X	62.01	-4.98	57.03	710.40	5000
1575.00	V / 1.20	Y	47.60	-4.98	42.62	135.21	
1575.00	V / 1.00	Z	46.80	-4.98	41.82	123.31	
1575.00	H / 1.37	X	51.70	-4.98	46.72	216.78	
1575.00	H / 1.00	Y	50.30	-4.98	45.32	184.50	
1575.00	H / 1.04	Z	48.60	-4.98	43.62	151.71	5000



Retlif Testing Laboratories

Report No. R-2194P

Test Method:	FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)						
	IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands						
Customer:	Dorman Products				Job No.:	R-2194P	
Test Sample:	315 MHz Remote Keyless Transmitter						
Model No.:	13734						
Operating Mode:	Continuously transmitting a RF signal at 315 MHz						
Technician:	D.Fiore				Date:	10/15/2014	
Notes:	Detector: Peak, unless otherwise specified				Test Distance: 3 Meters		
Test Freq.	Antenna Pol./Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Peak Limit
MHz	(V/H)-Meters	X / Y / Z	dBµV	dB	dBµV/m	uV/m	uV/m
1890.00	V / 1.27	X	55.20	-0.6	54.60	537.03	6042
1890.00	V / 1.00	Y	48.90	-0.6	48.30	260.01	
1890.00	V / 1.62	Z	48.70	-0.6	48.10	254.10	
1890.00	H / 1.20	X	50.40	-0.6	49.80	309.03	
1890.00	H / 1.00	Y	48.70	-0.6	48.10	254.10	
1890.00	H / 1.00	Z	45.30	-0.6	44.70	171.79	6042
2205.00	V / 1.77	X	54.02	-1.72	52.30	412.10	5000
2205.00	V / 1.00	Y	46.70	-1.72	44.98	177.42	
2205.00	V / 1.00	Z	49.78	-1.72	48.06	252.93	
2205.00	H / 1.00	X	53.60	-1.72	51.88	392.64	
2205.00	H / 1.00	Y	49.60	-1.72	47.88	247.74	
2205.00	H / 1.05	Z	46.10	-1.72	44.38	165.58	5000
*2520.00	V /	X	45.80	-0.74	45.06	179.06	6042
*2520.00	V /	Y	45.80	-0.74	45.06	179.06	
*2520.00	V /	Z	45.80	-0.74	45.06	179.06	
*2520.00	H /	X	45.80	-0.74	45.06	179.06	
*2520.00	H /	Y	45.80	-0.74	45.06	179.06	
*2520.00	H /	Z	45.80	-0.74	45.06	179.06	6042
*2835.00	V / 1.00	X	46.70	0.24	46.94	222.33	5000
*2835.00	V / 1.00	Y	46.70	0.24	46.94	222.33	
*2835.00	V / 1.00	Z	46.70	0.24	46.94	222.33	
*2835.00	H / 1.00	X	46.70	0.24	46.94	222.33	
*2835.00	H / 1.00	Y	46.70	0.24	46.94	222.33	
*2835.00	H / 1.00	Z	46.70	0.24	46.94	222.33	5000
*3150.00	V /	X	45.50	2.16	47.66	241.55	6042
*3150.00	V /	Y	45.50	2.16	47.66	241.55	
*3150.00	V /	Z	45.50	2.16	47.66	241.55	
*3150.00	H /	X	45.50	2.16	47.66	241.55	
*3150.00	H /	Y	45.50	2.16	47.66	241.55	
*3150.00	H /	Z	45.50	2.16	47.66	241.55	6042
	The frequency range was scanned from 30 MHz to 3.2 GHz. All emissions not recorded were more than 20 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.						
	*Noise floor measurements, minimum sensitivity of measurement system.						



Retlif Testing Laboratories

Report No. R-2194P

Test Method:	FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)						
	IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands						
Customer:	Dorman Products				Job No.:	R-2194P	
Test Sample:	315 MHz Remote Keyless Transmitter						
Model No.:	13734						
Operating Mode:	Continuously transmitting a RF signal at 315 MHz						
Technician:	D.Fiore				Date:	10/15/2014	
Notes:	Average values calculated from Peak readings				Duty Cycle:	59.4 %	Correction: -4.52 dB
Test Freq.	Antenna Pol./Height	EUT Orientation	Peak Reading	Duty Cycle Correction	Corrected Reading	Converted Reading	Avg. Limit
MHz	(V/H)-Meters	X / Y / Z	dBµV/m	dB	dBµV/m	uV/m	uV/m
315.00	V / 1.00	X	70.35	-4.52	65.83	1956.59	6042
315.00	V / 1.00	Y	73.05	-4.52	68.53	2669.93	
315.00	V / 1.00	Z	62.15	-4.52	57.63	761.20	
315.00	H / 1.50	X	75.55	-4.52	71.03	3560.40	
315.00	H / 2.68	Y	75.75	-4.52	71.23	3643.34	
315.00	H / 1.00	Z	78.95	-4.52	74.43	5266.23	6042
630.00	V / 1.00	X	47.27	-4.52	42.75	137.25	605
630.00	V / 1.00	Y	42.37	-4.52	37.85	78.07	
630.00	V / 3.00	Z	40.57	-4.52	36.05	63.46	
630.00	H / 1.30	X	45.27	-4.52	40.75	109.02	
630.00	H / 1.66	Y	48.77	-4.52	44.25	163.12	
630.00	H / 1.41	Z	46.97	-4.52	42.45	132.59	605
945.00	V / 1.27	X	54.90	-4.52	50.38	330.37	605
945.00	V / 1.17	Y	48.50	-4.52	43.98	158.12	
945.00	V / 2.81	Z	50.10	-4.52	45.58	190.11	
945.00	H / 1.50	X	52.45	-4.52	47.93	249.17	
945.00	H / 1.00	Y	59.10	-4.52	54.58	535.80	
945.00	H / 1.00	Z	57.10	-4.52	52.58	425.60	605
1260.00	V / 1.00	X	53.16	-4.52	48.64	270.39	605
1260.00	V / 1.00	Y	47.16	-4.52	42.64	135.51	
1260.00	V / 1.87	Z	42.56	-4.52	38.04	79.80	
1260.00	H / 1.48	X	41.56	-4.52	37.04	71.12	
1260.00	H / 1.31	Y	54.76	-4.52	50.18	322.85	
1260.00	H / 1.30	Z	45.46	-4.52	40.94	111.43	605
1575.00	V / 1.15	X	57.03	-4.52	52.51	422.18	500
1575.00	V / 1.00	Y	42.62	-4.52	38.10	80.35	
1575.00	V / 1.00	Z	41.82	-4.52	37.30	73.28	
1575.00	H / 1.37	X	46.72	-4.52	42.20	128.82	
1575.00	H / 1.00	Y	45.32	-4.52	40.80	109.65	
1575.00	H / 1.04	Z	43.62	-4.52	39.10	90.16	500
	The frequency range was scanned from 30 MHz to 3.2 GHz. All emissions not recorded were more than 20dB below the specified limit. Emissions from the EUT exceed specified limits shown with **.						
	*Noise floor measurements, minimum sensitivity of measurement system.						



Retlif Testing Laboratories

Report No. R-2194P

Test Method:		FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)					
		IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands					
Customer:		Dorman Products			Job No.:		R-2194P-1
Test Sample:		315 MHz Remote Keyless Transmitter					
Model No.:		13734					
Operating Mode:		Continuously transmitting a RF signal at 315 MHz					
Technician:		D.Fiore			Date:		10/15/2014
Notes:		Average values calculated from Peak readings		Duty Cycle: 59.4 %		Correction: -4.52 dB	
Test Freq.	Antenna Pol./Height	EUT Orientation	Peak Reading	Duty Cycle Correction	Corrected Reading	Converted Reading	Avg. Limit
MHz	(V/H)-Meters	X / Y / Z	dBµV/m	dB	dBµV/m	uV/m	uV/m
1890.00	V / 1.27	X	54.60	-4.52	50.08	319.15	605
1890.00	V / 1.00	Y	48.30	-4.52	43.78	154.53	
1890.00	V / 1.62	Z	48.10	-4.52	43.58	151.00	
1890.00	H / 1.20	X	49.80	-4.52	45.28	183.65	
1890.00	H / 1.00	Y	48.10	-4.52	43.58	151.00	
1890.00	H / 1.00	Z	44.70	-4.52	40.18	102.09	605
2205.00	V / 1.77	X	52.30	-4.52	47.78	244.91	500
2205.00	V / 1.00	Y	44.98	-4.52	40.46	105.44	
2205.00	V / 1.00	Z	48.06	-4.52	43.54	150.31	
2205.00	H / 1.00	X	51.88	-4.52	47.36	233.34	
2205.00	H / 1.00	Y	47.88	-4.52	43.36	147.23	
2205.00	H / 1.05	Z	44.38	-4.52	39.86	98.40	500
*2520.00	V / 1.00	X	45.06	-4.52	40.54	106.41	605
*2520.00	V / 1.00	Y	45.06	-4.52	40.54	106.41	
*2520.00	V / 1.00	Z	45.06	-4.52	40.54	106.41	
*2520.00	H / 1.00	X	45.06	-4.52	40.54	106.41	
*2520.00	H / 1.00	Y	45.06	-4.52	40.54	106.41	
*2520.00	H / 1.00	Z	45.06	-4.52	40.54	106.41	605
*2835.00	V / 1.00	X	46.94	-4.52	42.42	132.13	500
*2835.00	V / 1.00	Y	46.94	-4.52	42.42	132.13	
*2835.00	V / 1.00	Z	46.94	-4.52	42.42	132.13	
*2835.00	H / 1.00	X	46.94	-4.52	42.42	132.13	
*2835.00	H / 1.00	Y	46.94	-4.52	42.42	132.13	
*2835.00	H / 1.00	Z	46.94	-4.52	42.42	132.13	500
*3150.00	V / 1.00	X	47.66	-4.52	43.14	143.55	605
*3150.00	V / 1.00	Y	47.66	-4.52	43.14	143.55	
*3150.00	V / 1.00	Z	47.66	-4.52	43.14	143.55	
*3150.00	H / 1.00	X	47.66	-4.52	43.14	143.55	
*3150.00	H / 1.00	Y	47.66	-4.52	43.14	143.55	
*3150.00	H / 1.00	Z	47.66	-4.52	43.14	143.55	605



Retlif Testing Laboratories

Report No. R-2194P

**FCC Section 15.231(b)(2) - Duty Cycle Determination - Pulsed Operation
IC RSS-210, A1.1.2(2), RSS-GEN, 4.5 - Pulsed Operation**

Model: 13733

Test Data



Retlif Testing Laboratories

Report No. R-2194P

Mkr1 Δ 45 ms


-0.062 dB

Ref 0 dBm

Atten 10 dB

Peak
Log
10
dB/

W1 S2
S3 FS
AA

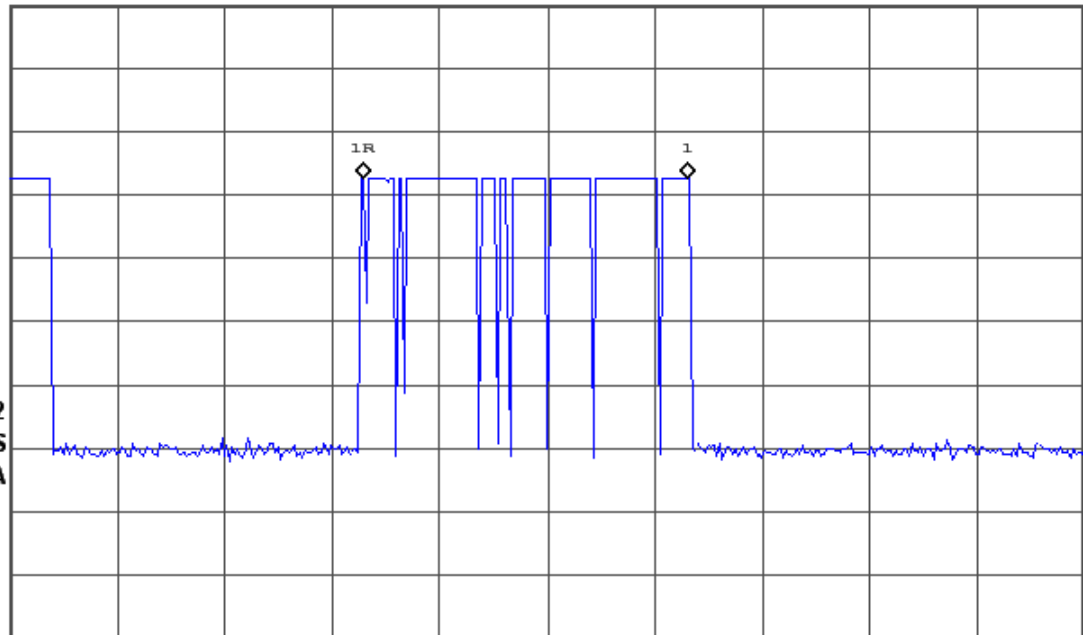

Center 315 MHz

Res BW 120 kHz

VBW 300 kHz

Span 0 Hz
Sweep 150 ms (401 pts)


Test Method: FCC Part 15.231(b), Duty Cycle Determination

Notes: Measurement of cycle time = 45.0 ms



Retlif Testing Laboratories

Report No. R-2194P

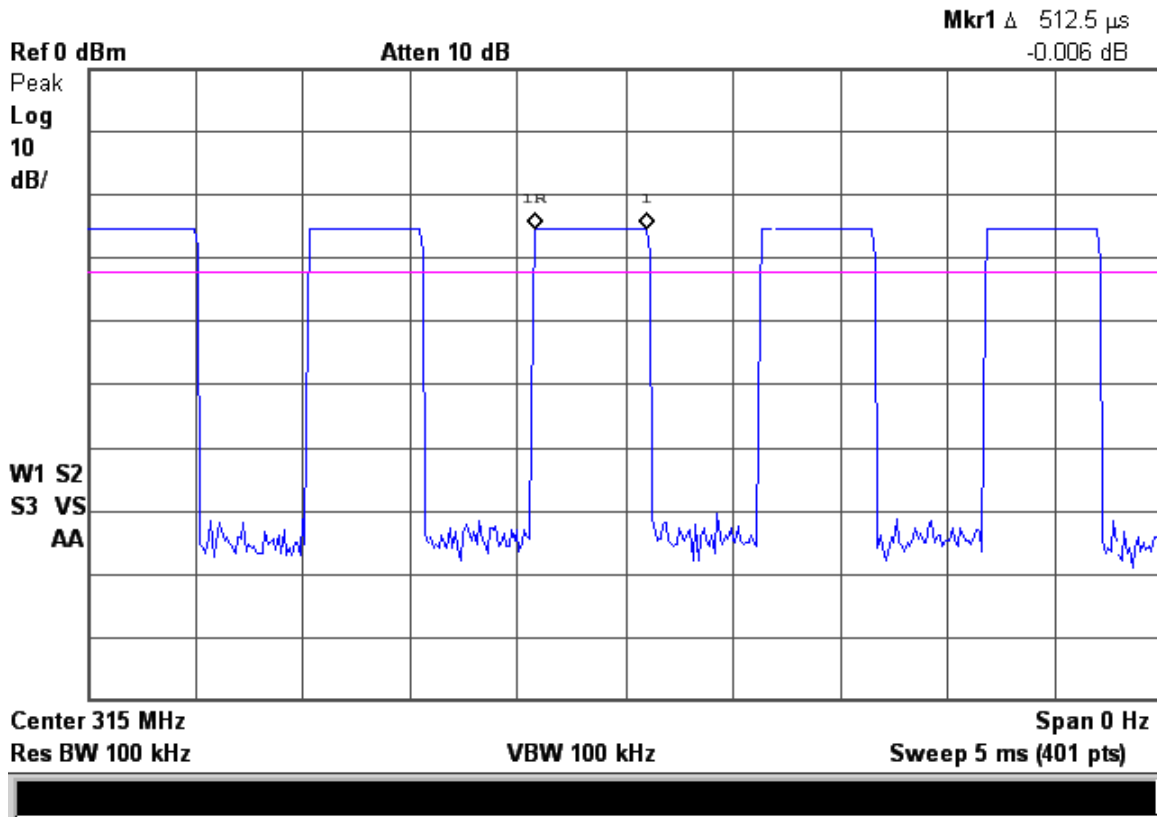

Test Method: FCC Part 15.231(b), Duty Cycle Determination IC RSS-210 A1.1.2(2) Pulsed Operation

Notes: Pulse width 1 = 512.5 μ s; 82 Pulses



Retlif Testing Laboratories

Report No. R-2194P

**FCC Section 15.231(b)(2) - Duty Cycle Determination - Pulsed Operation
IC RSS-210, A1.1.2(2), RSS-GEN, 4.5 - Pulsed Operation**


Model: 13734

Test Data



Retlif Testing Laboratories

Report No. R-2194P

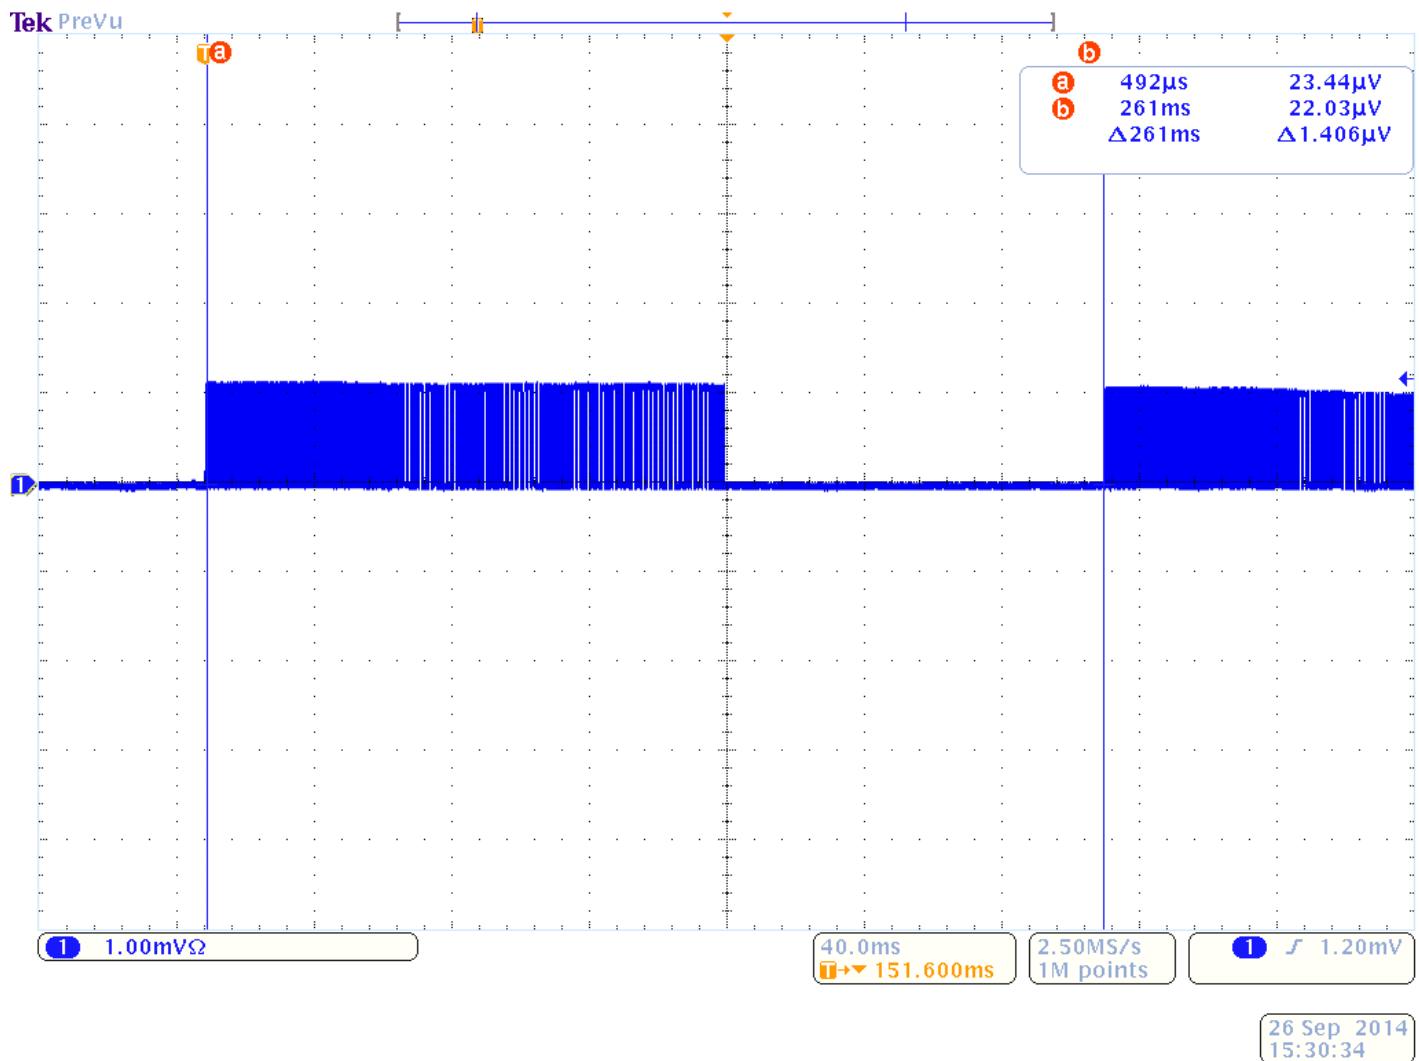


Test Method: FCC Part 15.231(b), Duty Cycle Determination

Notes: Measurement of cycle time = 261 mS




Retlif Testing Laboratories

Report No. R-2194P

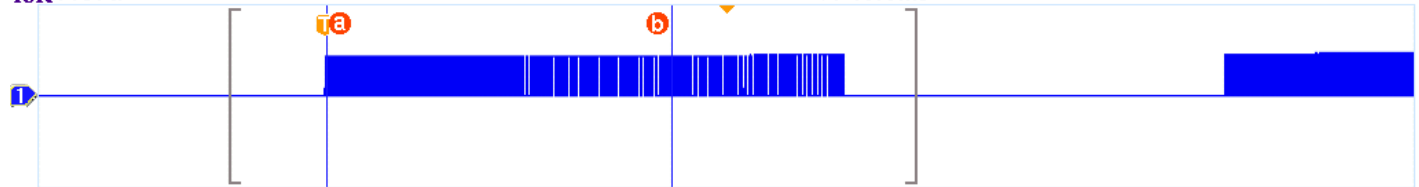

Zoom Factor: 2 X

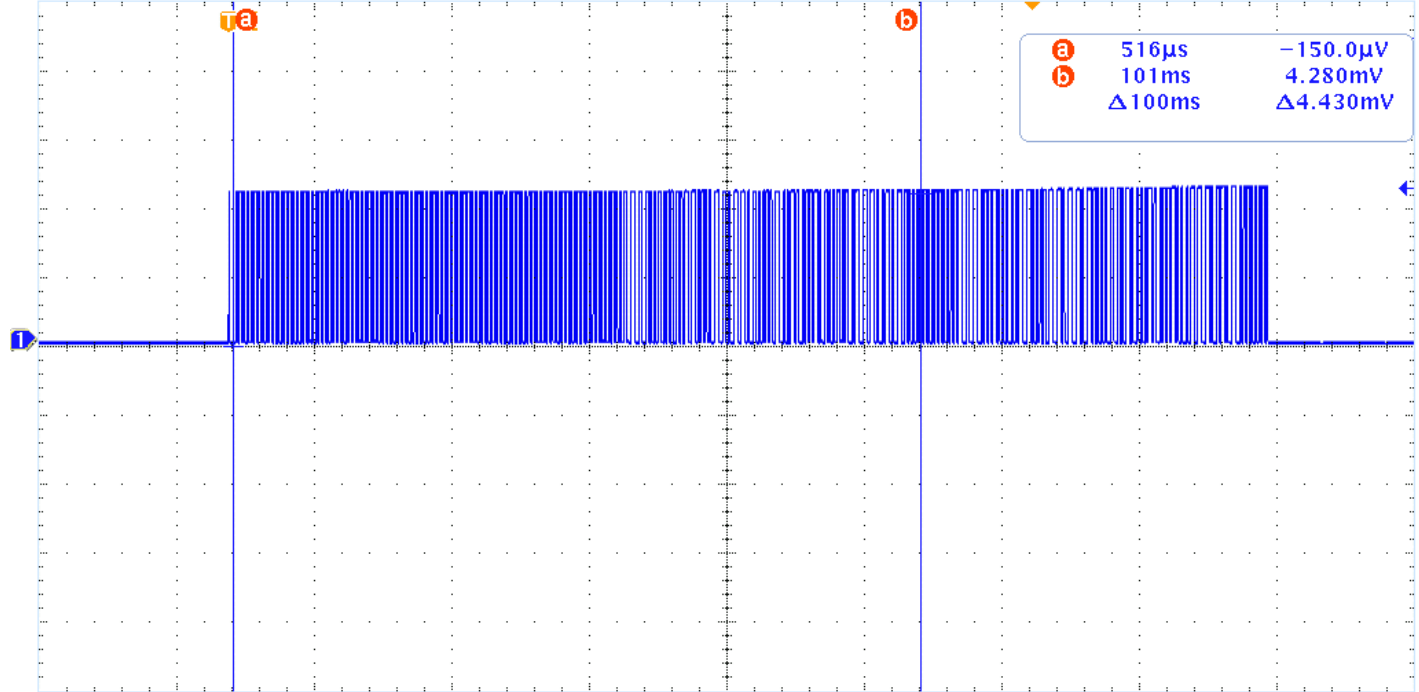

a	516μs	-150.0μV
b	101ms	4.280mV
	Δ100ms	Δ4.430mV

1 2.00mVΩ

1 Freq 1.012kHz

1 RMS 2.621mV

Z 20.0ms

116.784ms


250kS/s

100k points

1 4.40mV

30 Sep 2014
16:34:34**Test Method: FCC Part 15.231(b), Duty Cycle Determination****Notes:** Measurement cycle time used for calculation = 100 mS**Retlif Testing Laboratories**

Report No. R-2194P

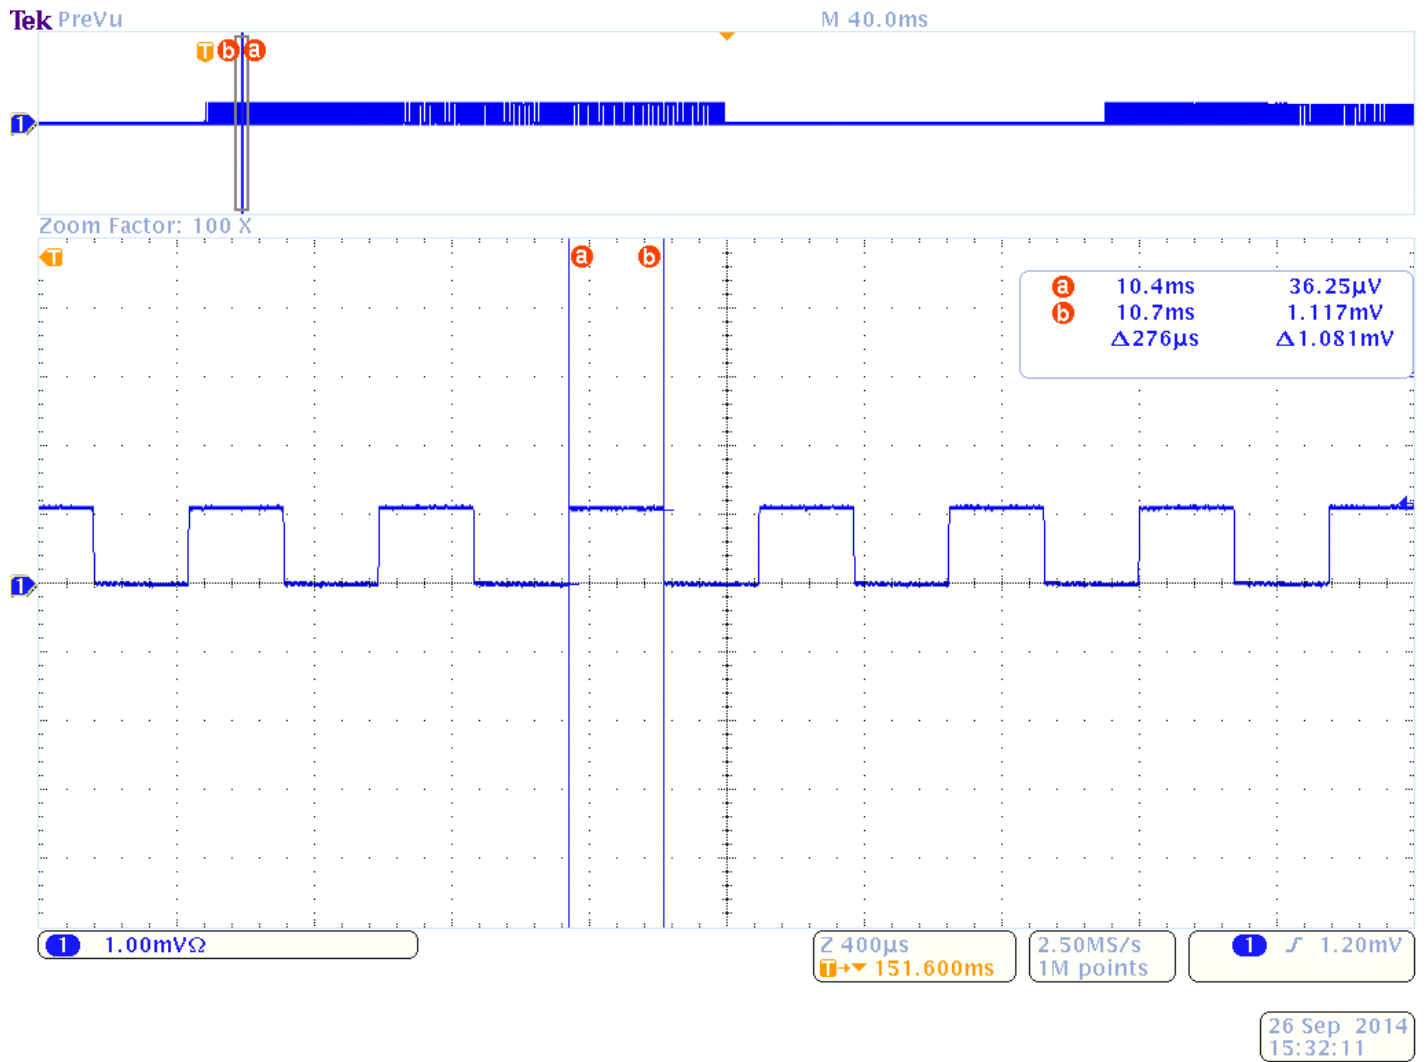


Test Method: FCC Part 15.231(b), Duty Cycle Determination IC RSS-210 A1.1.2(2) Pulsed Operation

Notes: Pulse width 1 = 0.276 mS, 175 pulses



Retlif Testing Laboratories

Report No. R-2194P

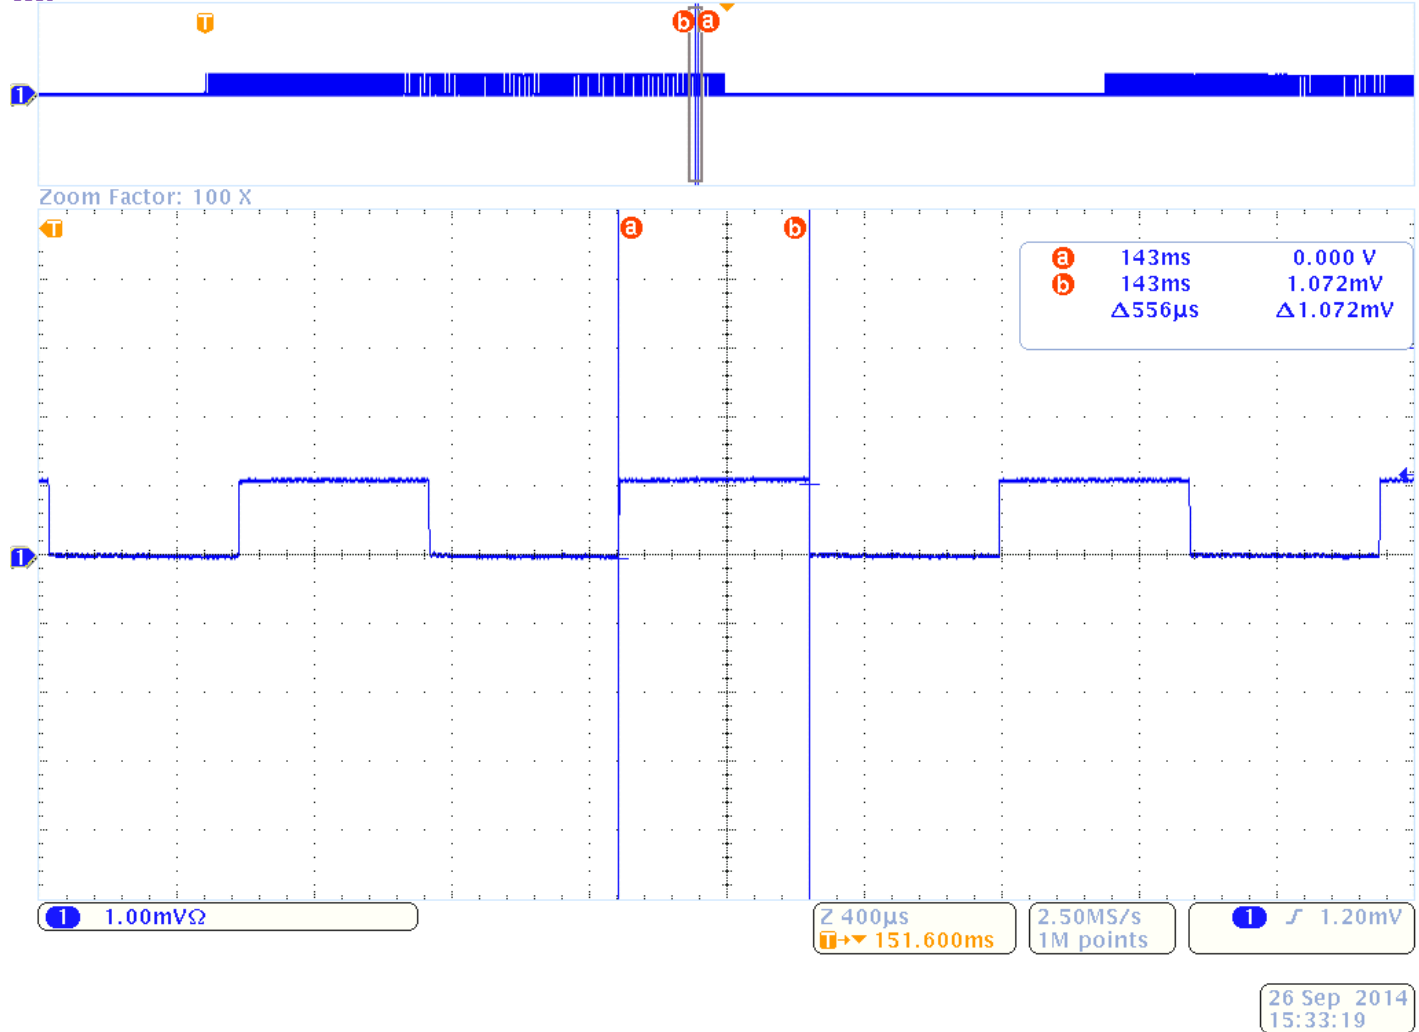

Test Method: FCC Part 15.231(b), Duty Cycle Determination IC RSS-210 A1.1.2(2) Pulsed Operation

Notes: Pulse width 2 = 0.556mS, 20 pulses



Retlif Testing Laboratories

Report No. R-2194P

Pulse Train = $T = 261 \text{ mS}$
Averaging Interval = $A1 = \text{lesser of } T \text{ and } 100 \text{ mS}$
Number of different Pulse Widths = $N = 2$
Pulse Width 1 = 0.276 mS
Pulse Width N = 0.556 mS
Number of PW1 pulses = $\#P1 = 175$
Number of PWN pulses = $\#PN = 20$
 $Ton = (PW1 * \#P1) + (PWN * \#PN) = 48.3 + 11.12 = 59.42 \text{ Ms}$
Duty Cycle = $Ton / A1 = 0.5942$



Retlif Testing Laboratories

Report No. R-2194P

**FCC Section 15.231(b)(3) - Field Strength of Spurious Emissions
IC RSS-210, A1.1.2(3) - Field Strength of Unwanted Emissions**

Models: 13733 and 13734

Test Data



Retlif Testing Laboratories

Report No. R-2194P

Test Method:		FCC Part 15 Subpart C, Field Strength of Spurious Emissions, Section 15.231(b).					
		IC RSS-210, A1.1.2 (3) Field Strength of Unwanted Emissions					
Customer:		Dorman Products			Job No.:	R-2194P	
Test Sample:		315 MHz Remote Keyless Transmitter					
Model No.:		13733 and 13734					
Operating Mode:		Continuously transmitting a RF signal at 315.00 MHz					
Technician:		D.Fiore			Date:	08/08/2014	
Notes: Test Distance: 3 Meters Detector: Quasi-Peak from 30 MHz to 1 GHz, Average above 1 GHz							
Transmit Frequency	Test Frequency	Antenna/ EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Limit At 300 Meters
MHz	MHz	Polarization/	dBuV	dB	dBuV/m	uV/m	uV/m
315.00	0.009	-	-	-	-	-	2400/F(kHz)
315.00	0.490	-	-	-	-	-	2400/F(kHz)
Transmit Frequency	Test Frequency	Antenna/ EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Limit At 30 Meters
MHz	MHz	Polarization/ Axis	dBuV	dB	dBuV/m	uV/m	uV/m
315.00	0.490	-	-	-	-	-	24000/F(kHz)
	1.705	-	-	-	-	-	24000/F(kHz)
	1.705	-	-	-	-	-	30.00
		-	-	-	-	-	
315.00	30.00	-	-	-	-	-	30.00
Transmit Frequency	Test Frequency	Antenna/ EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Limit At 3 Meters
MHz	MHz	Polarization/	dBuV	dB	dBuV/m	uV/m	uV/m
315.00	30.00	-	-	-	-	-	100.00
		-	-	-	-	-	
	*35.00	H/1.00	2.9	18.56	21.46	11.83	
		-	-	-	-	-	
	88.00	-	-	-	-	-	100.00
	88.00	-	-	-	-	-	150.00
		-	-	-	-	-	
	*110.00	H/1.00	8.9	8.92	17.82	7.78	
	*195.00	H/1.00	6.3	12.14	18.44	8.36	
	*205.00	H/1.00	5.2	12.25	17.45	7.46	
		-	-	-	-	-	
	216.00	-	-	-	-	-	150.00
	216.00	-	-	-	-	-	200.00
		-	-	-	-	-	
	*600.00	H/1.00	8.5	23.69	32.19	40.69	
	*995.00	H/1.00	6.0	30.37	36.37	65.84	
		-	-	-	-	-	
	960.00	-	-	-	-	-	200.00
	960.00	-	-	-	-	-	500.00
		-	-	-	-	-	
315.00	3200.00	-	-	-	-	-	500.00
The frequency range was scanned from 9 kHz to 3.2 GHz.							
The emissions observed from the EUT do not exceed the specified limits.							
Emissions not recorded were more than 20dB under the specified limit.							
*Noise Floor Measurements (minimum sensitivity of the receiver system).							



Retlif Testing Laboratories

Report No. R-2194P

**FCC Section 15.231(c) - Bandwidth of Emission
IC RSS-210, A1.1.3 - Bandwidth of Momentary Signals**


Model: 13733

Test Data



Retlif Testing Laboratories

Report No. R-2194P

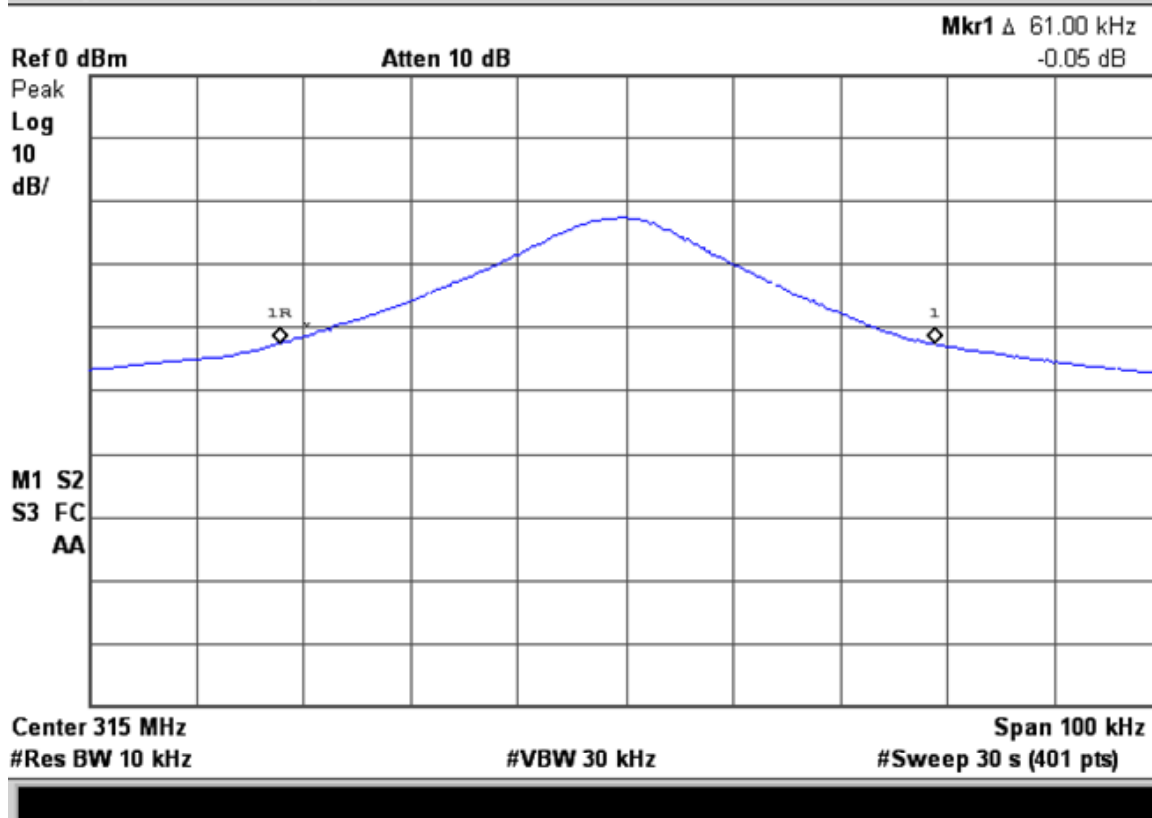

Retlif Testing Laboratories

Report No. R-2194P

**FCC Section 15.231(c) - Bandwidth of Emission
IC RSS-210, A1.1.3 - Bandwidth of Momentary Signals**


Model: 13734

Test Data



Retlif Testing Laboratories

Report No. R-2194P

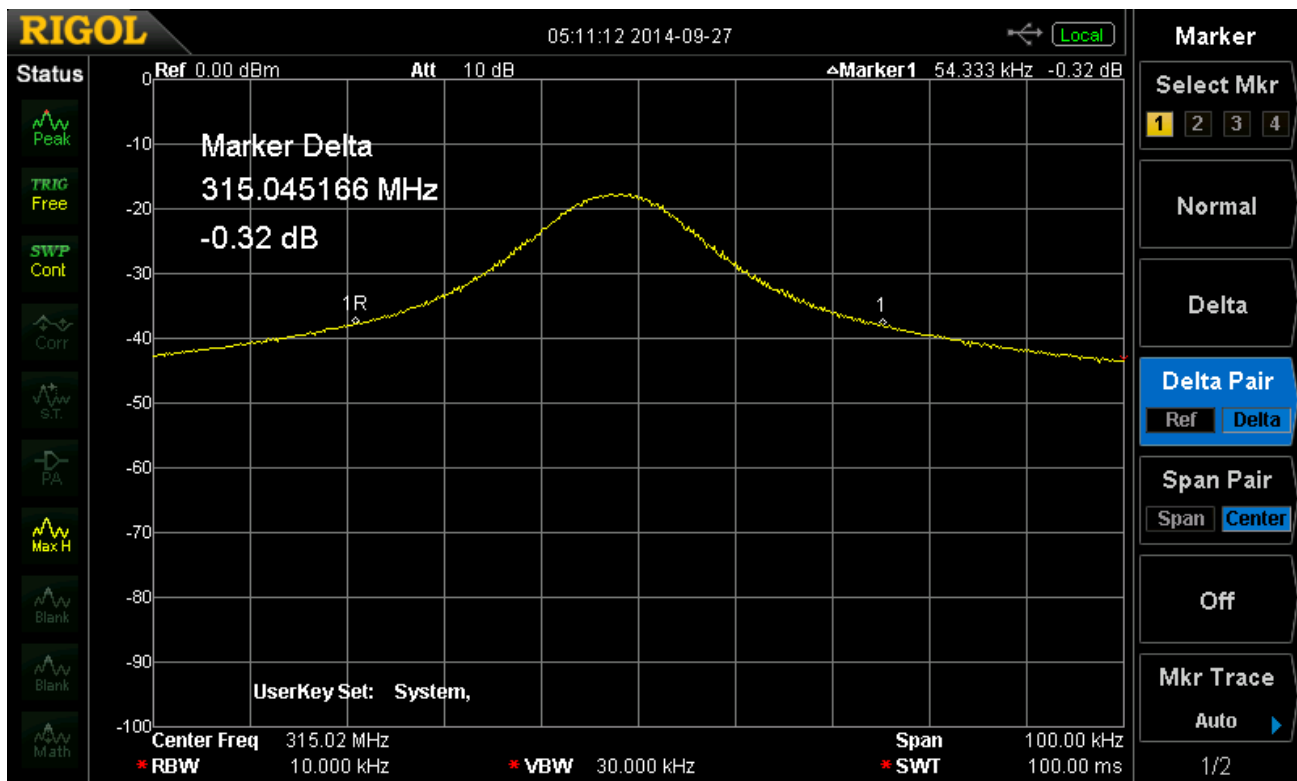

Retlif Testing Laboratories

Report No. R-2194P