



FCC Part 15, Subpart C, Section 15.231  
Industry Canada, RSS-210 and RSS-GEN  
Test Report

On

433 MHz Keyfob Transmitter  
FCC ID: PQTDORM37  
IC: 10735A-DORM37

**Customer Name:** Dorman Products, Inc.

**Customer P.O.:** 4200005858

**Date of Report:** April 16, 2018

**Test Report No.:** R-2721P

**Test Start Date:** June 30, 2017

**Test Finish Date:** July 19, 2017

**Test Technician:** D. Fiore, M. Nowak

**Approved By:** C. T. Reitz

**Report Prepared By:** P. Reed

Our letters, procedures and reports are for the exclusive use of the customer to whom they are addressed and their communication or the use of the name of Retlif Testing Laboratories must receive our prior written approval. Our letters, procedures and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The letters, procedures and reports and the name of Retlif Testing Laboratories or insignia are not to be used under any circumstances in advertising to the general public. This test report shall not be reproduced, except in full, without the written approval of Retlif Testing Laboratories.

## Technical Information

**Report Number:** R-2721P

**Customer:** Dorman Products, Inc.

**Address:** 3400 East Walnut Street  
Colmar, PA 18915

**Manufacturer:** Dorman Products, Inc.

**Manufacturer Address:** 3400 East Walnut Street  
Colmar, PA 18915

**Test Sample:** 433 MHz Keyfob Transmitter

**Model Numbers:** 99123, 99392, 99393, 99394

**FCC ID:** PQTDORM37

**IC:** 10735A-DORM37

**Type:** Security / Remote Control Transmitter

**Power Requirements:** 3 VDC Derived from a CR2032 Battery

**Frequency of Operation:** 433 MHz

**Equipment Class:** DSC

**Equipment Use:** Portable < 2.5 cm

### Test Specification:

FCC Rules and Regulations Part 15, Subpart C, Section 15.231  
Radio Standards Specification, RSS-210, Issue 9, August, 2016

### Test Procedure:

ANSI C63.10:2013  
RSS-GEN, Issue 4, November 2014

### Test Site:

ANSI C63.4:2014

### Test Facility:

Retlif Testing Laboratories  
3131 Detwiler Road  
Harleysville, PA 19438

FCC Accreditation Designation Number: US5342



**Retlif Testing Laboratories**

Report No. R-2721P

### **Tests Performed**

The test methods performed on the 433 MHz Keyfob Transmitter are shown below:

| <b>FCC<br/>Part 15, Subpart C</b> | <b>Industry Canada<br/>RSS-210</b> | <b>Industry Canada<br/>RSS-GEN</b> | <b>Test Method</b>                   |
|-----------------------------------|------------------------------------|------------------------------------|--------------------------------------|
| 15.231(b)                         | A1.1.2(1)                          | N/A                                | Field Strength of Emissions          |
| 15.231(b)(2)                      | A1.1.2(2)                          | 4.5                                | Duty Cycle Determination             |
| 15.231(b)(3)                      | A1.1.2(3)                          | N/A                                | Field Strength of Spurious Emissions |
| 15.231(c)                         | A1.1.3                             | N/A                                | Bandwidth of Emission                |

### **General Test Requirements**

1. The measurement procedures of ANSI C63.10:2013 were utilized as specified in FCC Part 15, Subpart C, Section 15.31(a)(3) and IC RSS-GEN Section 4.1.
2. All radiated emissions measurements were performed on an Open Area Test Site (OATS), listed with the FCC and IC, in accordance with FCC Section 15.31(d) and IC Section 4.2.
3. The level of the fundamental field strength was recorded with a new battery installed in the EUT, in accordance with FCC Section 15.231(c) and IC Section 4.3(c).
4. All measurements were performed at the specified 3 meter test distance as required by FCC Section 15.31(f) and IC Section 7.25.
5. The EUT was rotated throughout 360 degrees for all radiated emissions measurements as specified in FCC Section 15.31(f)(5) and IC Section 4.3(h).
6. All readily accessible EUT controls were adjusted in such a manner as to maximize the level of emissions in accordance with FCC Section 15.31(g) and IC Section 4.3(h).
7. Appropriate accessories were attached to all EUT ports during the performance of radiated emissions measurements as required by FCC Section 15.31(i) and IC Section 4.3(d).
8. The EUT operated at a discrete frequency of 433 MHz.
9. The frequency spectrum was investigated from the lowest frequency generated in the device up to the 10<sup>th</sup> harmonic of the highest fundamental frequency in accordance with FCC Section 15.33(a)(1) and IC Section 4.9.
10. All measurements were taken with a peak detector function as specified in FCC Section 15.35(a) and IC Section 4.4. The duty cycle, calculated in accordance with FCC Section 15.35(c) and IC Section 4.5, was applied to the peak readings in order to obtain the average value of emissions. The peak value of emissions was verified to meet the 20 dB requirement of FCC Section 15.35(b) and IC Section 7.2.1.



**Retlif Testing Laboratories**

Report No. R-2721P

## Certification and Signatures

We certify that this report is a true representation of the results obtained from the tests of the equipment stated. We further certify that the measurements shown in this report were made in accordance with the procedures indicated and vouch for the qualifications of all Retlif Testing Laboratories personnel taking them.



---

David M. Rybicki  
EMC Test Engineer  
NVLAP Approved Signatory



---

Colleen T. Reitz  
Laboratory Supervisor  
NVLAP Approved Signatory

### Non-Warranty Provision

The testing services have been performed, findings obtained and reports prepared in accordance with generally accepted laboratory principles and practices. This warranty is in lieu of all others, either expressed or implied.

### Non-Endorsement

This test report contains only findings and results arrived at after employing the specific test procedures and standards listed herein. It is not intended to constitute a recommendation, endorsement or certification of the product or material tested. This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



**Retlif Testing Laboratories**

Report No. R-2721P

## **Requirements and Test Results**

### **Requirement:**

#### **FCC Section 15.231(a) – Periodic operation in the band 40.66 – 40.7 MHz and above 70 MHz**

The provisions of this Section are restricted to periodic operation within the band 40.66-40.7 MHz and above 70 MHz. Except as shown in Paragraph (c) of this Section, the intentional radiator is restricted to the transmissions of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal.

#### **IC RSS-210, A1.1 – Momentarily Operated Devices**

The frequency bands and field strength limits in Tables 4 and 5 are only for the transmission of a control signal such as that used with alarm systems, door openers, remote switches, etc. Radio control of toys or model aircrafts, and continuous transmissions such as voice or video are not permitted except as provided in A1.1.5. Data is permitted to be sent with a control signal.

- Results:  
The device was operated at a frequency of 433 MHz and is for the transmission of a control signal used for remote keyless vehicle entry.

### **Requirement:**

#### **FCC Sections 15.231(a)(1)-(5)**

#### **Periodic operation in the band 40.66 – 40.7 MHz and above 70 MHz**

The following conditions were met in order to comply with the provisions for momentary operation:

#### **IC RSS-210, A1.1.1(a)-(d) – Types of Momentary Signals**

The following conditions were met in order to comply with the provisions for momentary operation:

FCC 15.231(a)(1): A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

IC A1.1.1(a): A manually operated transmitter shall employ a push-to-operate switch and be under manual control at all transmission times. When released, the transmitter shall cease transmission (holdover time of up to 5 seconds of operation).

- Results:  
The device is a manually operated, push to operate transmitter under manual control. The device ceased transmission within 5 seconds of deactivation. This was verified by a spectrum analyzer and manual deactivation of the transmitter in accordance with C63.10, 2013, Paragraph 7.4.



**Retlif Testing Laboratories**

Report No. R-2721P

## Requirements and Test Results (con't)

FCC 15.231(a)(2): A transmitter activated automatically shall cease transmission within 5 seconds after activation.

IC A1.1.1(b): A transmitter activated automatically shall cease transmission with 5 seconds after activation, (i.e. maximum 5 seconds of operation).

- Results:  
Transmission is not automatically activated.

FCC 15.231(a)(3): Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

IC A1.1.1(c): Periodic transmissions at regular predetermined intervals are not permitted, except as provided in A1.1.5. However, polling or supervision transmissions, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed 2 seconds per hour for each transmitter.

- Results:  
The transmitter does not perform periodic transmissions.

FCC 15.231(a)(4): Intentional radiators which are employed for radio control purposes during emergencies involving fire, security and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

IC A1.1.1(d): Intentional radiators employed for radio control purposes during emergencies involving fire, security of goods (e.g. burglar alarms), and safety-of-life, when activated to signal an alarm, may operate during the interval of the alarm condition.

- Results:  
This device is not employed for radio control purposes during emergencies involving fire, security and safety for life.

FCC 15.231(a)(5): Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

- Results:  
The device is not employed for security systems.



**Retlif Testing Laboratories**

Report No. R-2721P

## Requirements and Test Results (con't)

### Requirement:

#### FCC Section 15.231(b) – Field Strength of Emissions

In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the limits specified in Table 1.

#### IC RSS-210, A1.1.2(1) – Field Strengths and Frequency Bands

The field strength of emissions from momentarily operated intentional radiators shall not exceed the limits specified in Table 1:

Table 1 – Test Limits, Field Strength of Emissions

| Fundamental Frequency (MHz) | Field Strength of Fundamental microvolts/meter @ 3 meters (watts, e.i.r.p.) Quasi Peak or Average | Field Strength of Spurious Emissions microvolts/meter @ 3 meters Quasi Peak or Average |
|-----------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| 260 to 470                  | 3,750 to 12,500**                                                                                 | 375 to 1,250**                                                                         |

\*\*Linear Interpolations

For 260-470 MHz: FS (microvolts/m) =  $(41.67 \times F) - 7,083$

The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

The Fundamental and Harmonic Emissions limits for a device operating at 433 MHz are listed in Table 2.

Table 2 – Fundamental and Harmonic Limits

| Frequency of Operation (MHz) | Fundamental (µV/m) |           | Harmonics (µV/m) |          |
|------------------------------|--------------------|-----------|------------------|----------|
|                              | Average            | Peak      | Average          | Peak     |
| 433                          | 10,958.3           | 109,583.7 | 1,095.8          | 10,958.3 |

- Results:

The Fundamental and Harmonics field strengths did not exceed the limits specified in Table 2 at a test distance of 3 meters, taken with an Average Detector. See Table 3 for the Fundamental and Harmonic emissions test results.

Table 3 – Fundamental and Harmonics Test Results

| Fundamental Frequency (MHz) | Maximum Fundamental (µV/m) | Maximum Harmonics (µV/m) |
|-----------------------------|----------------------------|--------------------------|
| 433                         | 11,816.80                  | 590.88                   |



Retlif Testing Laboratories

Report No. R-2721P

## Requirements and Test Results (con't)

### Requirement:

#### FCC Section 15.231(b)(2) – Duty Cycle Determination-Pulsed Operation

Intentional radiators operating under the provisions of the Section shall demonstrate compliance with the limits on the field strength emissions, as shown in Table 1, based on the average value of the measured emissions. As an alternative, compliance with the limits in the Table 1 may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in Section 15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of Section 15.205 shall be demonstrated using the measurement instrumentation specified in that Section.

#### IC RSS-GEN, Paragraph 4.5, Pulsed Operation

When the field strength (or envelope power) is not constant or when it is in pulses, and an average detector is specified to be used, the value of field strength or power shall be determined by averaging over one complete pulse train, including blanking intervals within the pulse train, as long as the pulse train does not exceed 0.1 seconds. In cases where the pulse train exceeds 0.1 seconds, the average value (of field strength or output power) shall be determined during a 0.1 second interval during which the field strength or power is at its maximum value.

The unit's RF output was directly coupled to the input of the spectrum analyzer. The analyzer was set for a frequency span of 0 Hz. The sweep time was then adjusted in order to display one full pulse train. The transmitter on time was then summed and compared to the time for one full cycle in order to obtain the duty cycle. (See plots for additional information).

The emissions did not exceed the limits specified in Table 1. See below for the exact method of calculating the average field strength.

Transmitter On Time = 19.895 milliseconds (maximum per cycle)  
Transmitter Cycle Time = 47 milliseconds (100 ms maximum)  
Transmitter Duty Cycle = 42.32 %

#### CALCULATION

1 pulse of 0.585 msec = 0.585 milliseconds  
Duty Cycle (19.89/47) = 42.32 %  
Correction Factor = 20 log (0.4232) = -7.47 dB  
22 Pulses of 0.375 msec = 8.25  
67 Pulses of 0.165 msec = 11.06  
Total = -19.895



**Retlif Testing Laboratories**

Report No. R-2721P

## Requirements and Test Results (con't)

### Requirement:

#### **FCC Section 15.231(b)(3) – Field Strength of Spurious Emissions**

The limits on the field strength of the spurious emissions specified in Table 1 are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in Table 1 or to the general limits shown in Section 15.209, whichever limit permits a higher field strength.

#### **IC RSS-210, A1.1.2(3) – Field Strength of Unwanted Emissions**

The limits on the field strength of unwanted emissions in Table 4 of RSS-210 are based on the fundamental frequency of the intentional radiator. Unwanted emissions shall be attenuated to the limits shown in Table 2 of RSS-210 or to the limits shown in Table 4 of RSS-210, whichever is less stringent.

- Results:  
No spurious emissions were observed within 20 dB of the specified limit.

### Requirement:

#### **FCC Section 15.231(c) – Bandwidth of Emissions**

The bandwidth of the emissions shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

#### **IC RSS-210, A1.1.3 – Bandwidth of Momentary Signals**

For the purpose of Section A1.1, the 99% bandwidth shall be no wider than 0.25% of the center frequency for devices operating between 70-900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

- Results:  
The 20 dB bandwidth was measured and found to be 52.25 kHz.



**Retlif Testing Laboratories**

Report No. R-2721P

## **General Requirements FCC and IC**

### **Spectrum Analyzer Desensitization Considerations**

Due to the nature of the emissions being measured, care was taken to ensure that the resolution bandwidth of the spectrum analyzer was adequate to provide accurate measurements. The following formula was utilized:

$$\text{minimum bandwidth} = 1/\{\text{minimum pulse width (in seconds)} \times 1.5\} = \text{Hz}$$

Setting pulse desensitization equal to zero and utilizing the minimum observed pulse width of 0.165 ms yields a minimum required bandwidth of 4040.4 Hz. FCC specified bandwidths of 100 kHz and 1 MHz were utilized below and above 1 GHz, respectively.

### **Open Area Test Site**

For testing radiated measurements from 1 GHz to 40 GHz, a test site must satisfy either option in Section 5.5 of ANSI C63.4:2014.

**First Option:** Section 5.5.1 a) 1) of ANSI C63.4:2014, requires compliance with the site validation criterion called out in CISPR 16-1-4: 2010-04, which is the site validation by means of SVSWR measurements.

**Second Option:** Section 5.5.1 a) 2) of ANSI C63.4:2014, alternative site validation without SVSWR measurements – test site shall have a minimum area of the ground plane covered with RF absorbing material as specified in this clause and as shown in Figure 6 of ANSI C63.4:2014.

The Open Area Test Site used within this test program utilized the second option, with the RF Absorber placed directly on the ground plane. The RF Absorber had a maximum thickness of 30 cm and a minimum rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.



**Retlif Testing Laboratories**

Report No. R-2721P

## Equipment Lists

### FCC Section 15.231(b) - Field Strength of Emissions IC RSS-210, A1.1.2(1) - Field Strength and Frequency Bands

| EN    | Manufacturer      | Description                      | Range               | Model No.       | Cal Date   | Due Date   |
|-------|-------------------|----------------------------------|---------------------|-----------------|------------|------------|
| 8016  | ETS / EMCO        | ANTENNA, LOG PERIODIC            | 200 MHz - 1 GHz     | 3146            | 7/18/2016  | 1/31/2018  |
| 8017  | ETS / EMCO        | ANTENNA, DOUBLE RIDGED GUIDE     | 1 - 18 GHz          | 3115            | 3/10/2016  | 9/30/2017  |
| 8080  | ROHDE & SCHWARZ   | RECEIVER, EMI                    | 20 - 1300 MHz       | 354-3000.56ESVP | 8/26/2016  | 8/31/2017  |
| 8300  | RETLIF            | OPEN AREA TEST SITE, ATTENUATION | 3/10 Meter OATS     | RPA             | 8/7/2014   | 8/31/2017  |
| 8300C | UNKNOWN           | CABLE, COAXIAL                   | 3/10 METER          | 3 METER CABLE   | 10/25/2016 | 10/31/2017 |
| 8317  | AGILENT / HP      | PRE-AMPLIFIER                    | 1 - 26.5 GHz, 30 dB | 8449B           | 5/18/2017  | 5/31/2018  |
| 8411  | SONOMA INSTRUMENT | PRE-AMPLIFIER                    | 9 KHz - 1 GHz       | 310N            | 9/19/2016  | 9/30/2017  |
| 8644A | AGILENT / HP      | ANALYZER, SPECTRUM               | 100 Hz - 22.5 GHz   | 8566B           | 7/21/2016  | 7/31/2017  |
| 8644B | AGILENT / HP      | ANALYZER, RF PRESELECTOR         | 20 Hz - 2 GHz       | 85685A          | 7/21/2016  | 7/31/2017  |
| 8644C | AGILENT / HP      | ANALYZER, QUASI-PEAK ADAPTOR     | 100 Hz - 22 GHz     | 85650A          | 7/21/2016  | 7/31/2017  |
| 8687  | RETLIF            | CABLE, COAXIAL                   | 10 kHz - 18 GHz     | 10' TYPE N      | 6/21/2017  | 6/30/2018  |
| 8726  | RETLIF            | CABLE, COAXIAL                   | 10 kHz - 18 GHz     | 3' TYPE N       | 5/15/2017  | 5/31/2018  |
| R687  | AGILENT / HP      | ANALYZER, SPECTRUM               | 100 Hz - 26.5 GHz   | E7405A;B        | 2/10/2017  | 2/28/2018  |

### FCC Section 15.231(b)(2) - Duty Cycle Determination - Pulsed Operation IC RSS-210, A1.1.2(2), RSS-GEN, 4.5 - Pulsed Operation

| EN    | Manufacturer | Description            | Range             | Model No. | Cal Date                | Due Date  |
|-------|--------------|------------------------|-------------------|-----------|-------------------------|-----------|
| 8410A | ETS / EMCO   | Field Probe, 6 cm Loop | 790 MHz           | 7405-901  | No Calibration Required |           |
| R687  | AGILENT / HP | ANALYZER, SPECTRUM     | 100 Hz - 26.5 GHz | E7405A;B  | 2/10/2017               | 2/28/2018 |

### FCC Section 15.231(b)(3) - Field Strength of Spurious Emissions IC RSS-210, A1.1.2(3) - Field Strength of Unwanted Emissions

| EN    | Manufacturer      | Description                      | Range             | Model No.       | Cal Date   | Due Date   |
|-------|-------------------|----------------------------------|-------------------|-----------------|------------|------------|
| 8016  | ETS / EMCO        | ANTENNA, LOG PERIODIC            | 200 MHz - 1 GHz   | 3146            | 7/18/2016  | 1/31/2018  |
| 8019  | ETS / EMCO        | ANTENNA, BICONICAL               | 20 - 200 MHz      | 3104            | 2/1/2017   | 8/31/2018  |
| 8080  | ROHDE & SCHWARZ   | RECEIVER, EMI                    | 20 - 1300 MHz     | 354-3000.56ESVP | 8/26/2016  | 8/31/2017  |
| 8300  | RETLIF            | OPEN AREA TEST SITE, ATTENUATION | 3/10 Meter OATS   | RPA             | 8/7/2014   | 8/31/2017  |
| 8300C | UNKNOWN           | CABLE, COAXIAL                   | 3/10 METER        | 3 METER CABLE   | 10/25/2016 | 10/31/2017 |
| 8411  | SONOMA INSTRUMENT | PRE-AMPLIFIER                    | 9 KHz - 1 GHz     | 310N            | 9/19/2016  | 9/30/2017  |
| 8644A | AGILENT / HP      | ANALYZER, SPECTRUM               | 100 Hz - 22.5 GHz | 8566B           | 7/21/2016  | 7/31/2017  |
| 8644B | AGILENT / HP      | ANALYZER, RF PRESELECTOR         | 20 Hz - 2 GHz     | 85685A          | 7/21/2016  | 7/31/2017  |
| 8644C | AGILENT / HP      | ANALYZER, QUASI-PEAK ADAPTOR     | 100 Hz - 22 GHz   | 85650A          | 7/21/2016  | 7/31/2017  |



**Retlif Testing Laboratories**

Report No. R-2721P

**FCC Section 15.231(c) - Bandwidth of Emission  
IC RSS-210, A1.1.3 - Bandwidth of Momentary Signals**

| EN    | Manufacturer | Description            | Range             | Model No. | Cal Date                | Due Date  |
|-------|--------------|------------------------|-------------------|-----------|-------------------------|-----------|
| 8410A | ETS / EMCO   | Field Probe, 6 cm Loop | 790 MHz           | 7405-901  | No Calibration Required |           |
| R687  | AGILENT / HP | ANALYZER, SPECTRUM     | 100 Hz - 26.5 GHz | E7405A;B  | 2/10/2017               | 2/28/2018 |

**FCC Section 15.231(a) – Timing Requirements  
IC RSS-210, A1.1.3 – Types of Momentary Signals**

| EN    | Manufacturer | Description            | Range             | Model No. | Cal Date                | Due Date  |
|-------|--------------|------------------------|-------------------|-----------|-------------------------|-----------|
| 8410A | ETS / EMCO   | Field Probe, 6 cm Loop | 790 MHz           | 7405-901  | No Calibration Required |           |
| R687  | AGILENT / HP | ANALYZER, SPECTRUM     | 100 Hz - 26.5 GHz | E7405A;B  | 2/10/2017               | 2/28/2018 |



**Retlif Testing Laboratories**

Report No. R-2721P

**FCC Section 15.231(b) - Field Strength of Emissions  
IC RSS-210, A1.1.2(1) - Field Strength and Frequency Bands  
Test Data**



**Retlif Testing Laboratories**

Report No. R-2721P

|                        |                     |                                                                         |               |                   |                   |                         |            |
|------------------------|---------------------|-------------------------------------------------------------------------|---------------|-------------------|-------------------|-------------------------|------------|
| <b>Test Method:</b>    |                     | FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b) |               |                   |                   |                         |            |
|                        |                     | IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands              |               |                   |                   |                         |            |
| <b>Customer:</b>       |                     | Dorman Products, Inc                                                    |               |                   | <b>Job No.:</b>   | R-2721P-1               |            |
| <b>Test Sample:</b>    |                     | 433.00 MHz Remote Keyless Transmitter                                   |               |                   |                   |                         |            |
| <b>Model No.:</b>      |                     | PQTDORM37                                                               |               |                   |                   |                         |            |
| <b>Operating Mode:</b> |                     | Continuously Transmitting a RF Signal at 433 MHz                        |               |                   |                   |                         |            |
| <b>Technician:</b>     |                     | M. Nowak / D.Fiore                                                      |               |                   | <b>Date:</b>      | 07/07/2017, 07/19/2017  |            |
| <b>Notes:</b>          |                     | Detector: Peak, Unless otherwise specified                              |               |                   |                   | Test Distance: 3 Meters |            |
| Test Freq.             | Antenna Pol./Height | EUT Orientation                                                         | Meter Reading | Correction Factor | Corrected Reading | Converted Reading       | Peak Limit |
| MHz                    | (V/H)/Meters        | X / Y / Z                                                               | dBµV          | dB                | dBµV/m            | uV/m                    | uV/m       |
| 433.00                 | V / 1.32            | X / 83.6                                                                | 60.90         | 20.55             | 81.45             | 11816.80                | 109583.7   |
| 433.00                 | V / 1.54            | Y / 256.4                                                               | 59.30         | 20.55             | 79.85             | 9828.79                 |            |
| 433.00                 | V / 1.00            | Z / 267.2                                                               | 46.40         | 20.55             | 66.95             | 2225.87                 |            |
| 433.00                 | H / 4.00            | X / 42.7                                                                | 48.80         | 20.55             | 69.35             | 2934.27                 |            |
| 433.00                 | H / 2.27            | Y / 328.2                                                               | 54.10         | 20.55             | 74.65             | 5401.32                 |            |
| 433.00                 | H / 1.00            | Z / 286.6                                                               | 59.00         | 20.55             | 79.55             | 9495.11                 | 109583.7   |
|                        |                     |                                                                         |               |                   |                   |                         |            |
| *866.00                | V / 1.00            | X / 180.0                                                               | 20.80         | 29.83             | 50.63             | 340.02                  | 10958.3    |
| *866.00                | V / 1.00            | Y / 180.0                                                               | 20.80         | 29.83             | 50.63             | 340.02                  |            |
| *866.00                | V / 1.00            | Z / 180.0                                                               | 20.80         | 29.83             | 50.63             | 340.02                  |            |
| *866.00                | H / 1.00            | X / 180.0                                                               | 20.80         | 29.83             | 50.63             | 340.02                  |            |
| *866.00                | H / 1.00            | Y / 180.0                                                               | 20.80         | 29.83             | 50.63             | 340.02                  |            |
| *866.00                | H / 1.00            | Z / 180.0                                                               | 20.80         | 29.83             | 50.63             | 340.02                  | 10958.3    |
|                        |                     |                                                                         |               |                   |                   |                         |            |
| 1299.00                | V / 1.60            | X / 39.4                                                                | 45.40         | -1.9              | 37.50             | 74.99                   | 10958.3    |
| 1299.00                | V / 1.28            | Y / 137.9                                                               | 45.20         | -1.9              | 43.30             | 146.22                  |            |
| 1299.00                | V / 1.00            | Z / 182.0                                                               | 43.66         | -1.9              | 41.76             | 122.46                  |            |
| 1299.00                | H / 1.83            | X / 145.5                                                               | 44.60         | -1.9              | 42.70             | 136.46                  |            |
| 1299.00                | H / 1.70            | Y / 167.6                                                               | 45.70         | -1.9              | 43.80             | 154.88                  |            |
| 1299.00                | H / 1.24            | Z / 155.0                                                               | 44.88         | -1.9              | 42.98             | 140.93                  | 10958.3    |
|                        |                     |                                                                         |               |                   |                   |                         |            |
| 1732.00                | V / 1.00            | X / 142.0                                                               | 46.90         | 0.94              | 47.84             | 246.60                  | 10958.3    |
| 1732.00                | V / 1.33            | Y / 114.9                                                               | 45.20         | 0.94              | 46.14             | 202.77                  |            |
| 1732.00                | V / 1.56            | Z / 264.1                                                               | 45.32         | 0.94              | 46.26             | 205.59                  |            |
| 1732.00                | H / 1.55            | X / 0.00                                                                | 45.50         | 0.94              | 46.44             | 209.90                  |            |
| 1732.00                | H / 1.70            | Y / 102.4                                                               | 51.50         | 0.94              | 52.44             | 418.79                  |            |
| 1732.00                | H / 1.69            | Z / 347.0                                                               | 48.40         | 0.94              | 49.34             | 293.09                  | 10958.3    |
|                        |                     |                                                                         |               |                   |                   |                         |            |
| *2165.00               | V / 1.00            | X / 180.0                                                               | 42.55         | 7.90              | 50.45             | 333.04                  | 10958.3    |
| 2165.00                | V / 1.66            | Y / 248.0                                                               | 43.55         | 7.90              | 51.45             | 373.68                  |            |
| 2165.00                | V / 1.44            | Z / 74.5                                                                | 44.30         | 7.90              | 52.20             | 407.38                  |            |
| 2165.00                | H / 1.00            | X / 174.5                                                               | 43.81         | 7.90              | 51.71             | 385.03                  |            |
| 2165.00                | H / 1.50            | Y / 112.8                                                               | 45.22         | 7.90              | 53.12             | 452.90                  |            |
| 2165.00                | H / 1.24            | Z / 171.6                                                               | 45.00         | 7.90              | 52.90             | 441.57                  | 10958.3    |
|                        |                     |                                                                         |               |                   |                   |                         |            |



**Retlif Testing Laboratories**

Report No. R-2721P

|                 |                                                                                                                                                                                                                                                |                 |               |                   |                         |                        |            |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------|-------------------|-------------------------|------------------------|------------|
| Test Method:    | FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)                                                                                                                                                                        |                 |               |                   |                         |                        |            |
|                 | IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands                                                                                                                                                                                     |                 |               |                   |                         |                        |            |
| Customer:       | Dorman Products, Inc                                                                                                                                                                                                                           |                 |               |                   | Job No.:                | R-2721P-1              |            |
| Test Sample:    | 433.00 MHz Remote Keyless Transmitter                                                                                                                                                                                                          |                 |               |                   |                         |                        |            |
| Model No.:      | PQTDORM37                                                                                                                                                                                                                                      |                 |               |                   |                         |                        |            |
| Operating Mode: | Continuously Transmitting a RF Signal at 433 MHz                                                                                                                                                                                               |                 |               |                   |                         |                        |            |
| Technician:     | M. Nowak / D.Fiore                                                                                                                                                                                                                             |                 |               |                   | Date:                   | 07/07/2017, 07/19/2017 |            |
| Notes:          | Detector: Peak, unless otherwise specified                                                                                                                                                                                                     |                 |               |                   | Test Distance: 3 Meters |                        |            |
| Test Freq.      | Antenna Pol./Height                                                                                                                                                                                                                            | EUT Orientation | Meter Reading | Correction Factor | Corrected Reading       | Converted Reading      | Peak Limit |
| MHz             | (V/H)-Meters                                                                                                                                                                                                                                   | X / Y / Z       | dBµV          | dB                | dBµV/m                  | uV/m                   | uV/m       |
| *2598.00        | V / 1.00                                                                                                                                                                                                                                       | X / 180.00      | 43.00         | 8.85              | 51.85                   | 391.29                 | 10958.3    |
| *2598.00        | V / 1.00                                                                                                                                                                                                                                       | Y / 180.0       | 43.00         | 8.85              | 51.85                   | 391.29                 |            |
| *2598.00        | V / 1.00                                                                                                                                                                                                                                       | Z / 180.0       | 43.00         | 8.85              | 51.85                   | 391.29                 |            |
| *2598.00        | H / 1.00                                                                                                                                                                                                                                       | X / 180.0       | 43.90         | 8.85              | 52.75                   | 434.01                 |            |
| *2598.00        | H / 1.00                                                                                                                                                                                                                                       | Y / 180.0       | 43.90         | 8.85              | 52.75                   | 434.01                 |            |
| *2598.00        | H / 1.00                                                                                                                                                                                                                                       | Z / 180.0       | 43.90         | 8.85              | 52.75                   | 434.01                 | 10958.3    |
|                 |                                                                                                                                                                                                                                                |                 |               |                   |                         |                        |            |
| *3031.00        | V / 1.00                                                                                                                                                                                                                                       | X / 180.0       | 43.80         | 11.53             | 55.33                   | 584.11                 | 10958.3    |
| *3031.00        | V / 1.49                                                                                                                                                                                                                                       | Y / 313.2       | 43.80         | 11.53             | 55.33                   | 584.11                 |            |
| *3031.00        | V / 1.00                                                                                                                                                                                                                                       | Z / 180.0       | 43.80         | 11.53             | 55.33                   | 584.11                 |            |
| *3031.00        | H / 1.00                                                                                                                                                                                                                                       | X / 180.0       | 43.90         | 11.53             | 55.43                   | 590.88                 |            |
| *3031.00        | H / 1.00                                                                                                                                                                                                                                       | Y / 180.0       | 43.90         | 11.53             | 55.43                   | 590.88                 |            |
| *3031.00        | H / 1.00                                                                                                                                                                                                                                       | Z / 180.0       | 43.90         | 11.53             | 55.43                   | 590.88                 | 10958.3    |
|                 |                                                                                                                                                                                                                                                |                 |               |                   |                         |                        |            |
| *3464.00        | V / 1.00                                                                                                                                                                                                                                       | X / 180.0       | 43.61         | -0.93             | 42.68                   | 136.14                 | 10958.3    |
| *3464.00        | V / 1.00                                                                                                                                                                                                                                       | Y / 180.0       | 43.61         | -0.93             | 42.68                   | 136.14                 |            |
| *3464.00        | V / 1.00                                                                                                                                                                                                                                       | Z / 180.0       | 43.61         | -0.93             | 42.68                   | 136.14                 |            |
| *3464.00        | H / 1.00                                                                                                                                                                                                                                       | X / 180.0       | 45.86         | -0.93             | 44.93                   | 176.40                 |            |
| *3464.00        | H / 1.00                                                                                                                                                                                                                                       | Y / 180.0       | 45.86         | -0.93             | 44.93                   | 176.40                 |            |
| *3464.00        | H / 1.00                                                                                                                                                                                                                                       | Z / 180.0       | 45.86         | -0.93             | 44.93                   | 176.40                 | 10958.3    |
|                 |                                                                                                                                                                                                                                                |                 |               |                   |                         |                        |            |
| *3897.00        | V / 1.00                                                                                                                                                                                                                                       | X / 180.0       | 42.10         | 1.36              | 43.46                   | 148.94                 | 5000       |
| *3897.00        | V / 1.00                                                                                                                                                                                                                                       | Y / 180.0       | 42.10         | 1.36              | 43.46                   | 148.94                 |            |
| *3897.00        | V / 1.00                                                                                                                                                                                                                                       | Z / 180.0       | 42.10         | 1.36              | 43.46                   | 148.94                 |            |
| *3897.00        | H / 1.00                                                                                                                                                                                                                                       | X / 180.0       | 41.20         | 1.36              | 42.56                   | 134.27                 |            |
| *3897.00        | H / 1.00                                                                                                                                                                                                                                       | Y / 180.0       | 41.20         | 1.36              | 42.56                   | 134.27                 |            |
| *3897.00        | H / 1.00                                                                                                                                                                                                                                       | Z / 180.0       | 41.20         | 1.36              | 42.56                   | 134.27                 | 5000       |
|                 |                                                                                                                                                                                                                                                |                 |               |                   |                         |                        |            |
| *4330.00        | V / 1.00                                                                                                                                                                                                                                       | X / 180.0       | 44.21         | 1.32              | 45.53                   | 189.02                 | 5000       |
| *4330.00        | V / 1.00                                                                                                                                                                                                                                       | Y / 180.0       | 44.21         | 1.32              | 45.53                   | 189.02                 |            |
| *4330.00        | V / 1.00                                                                                                                                                                                                                                       | Z / 180.0       | 44.21         | 1.32              | 45.53                   | 189.02                 |            |
| *4330.00        | H / 1.00                                                                                                                                                                                                                                       | X / 180.0       | 43.71         | 1.32              | 45.03                   | 178.44                 |            |
| *4330.00        | H / 1.00                                                                                                                                                                                                                                       | Y / 180.0       | 43.71         | 1.32              | 45.03                   | 178.44                 |            |
| *4330.00        | H / 1.00                                                                                                                                                                                                                                       | Z / 180.0       | 43.71         | 1.32              | 45.03                   | 178.44                 | 5000       |
|                 | The frequency range was scanned from 30 MHz to 3.2 GHz. All emissions not recorded were more than 20 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.<br>NOTE: * Indicates minimum system sensitivity. |                 |               |                   |                         |                        |            |



**Retlif Testing Laboratories**

Report No. R-2721P

|                        |                     |                                                                                               |              |                       |                   |                        |            |
|------------------------|---------------------|-----------------------------------------------------------------------------------------------|--------------|-----------------------|-------------------|------------------------|------------|
| <b>Test Method:</b>    |                     | FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)                       |              |                       |                   |                        |            |
|                        |                     | IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands                                    |              |                       |                   |                        |            |
| <b>Customer:</b>       |                     | Dorman Products, Inc                                                                          |              |                       | <b>Job No.:</b>   | R-2721P-1              |            |
| <b>Test Sample:</b>    |                     | 433.00 MHz Remote Keyless Transmitter                                                         |              |                       |                   |                        |            |
| <b>Model No.:</b>      |                     | PQTDORM37                                                                                     |              |                       |                   |                        |            |
| <b>Operating Mode:</b> |                     | Continuously Transmitting a RF Signal at 433 MHz                                              |              |                       |                   |                        |            |
| <b>Technician:</b>     |                     | M. Nowak / D.Fiore                                                                            |              |                       | <b>Date:</b>      | 07/07/2017, 07/19/2017 |            |
| <b>Notes:</b>          |                     | Average values calculated from Peak readings      Duty Cycle: 42.32%      Correction -7.47 dB |              |                       |                   |                        |            |
| Test Freq.             | Antenna Pol./Height | EUT Orientation                                                                               | Peak Reading | Duty Cycle Correction | Corrected Reading | Converted Reading      | Avg. Limit |
| MHz                    | (V/H)-Meters        | X / Y / Z                                                                                     | dBµV/m       | dB                    | dBµV/m            | uV/m                   | uV/m       |
| 433.00                 | V / 1.32            | X / 83.6                                                                                      | 81.45        | -7.47                 | 73.98             | 5000.35                | 10958.3    |
| 433.00                 | V / 1.54            | Y / 256.4                                                                                     | 79.85        | -7.47                 | 72.38             | 4159.11                |            |
| 433.00                 | V / 1.00            | Z / 267.2                                                                                     | 66.95        | -7.47                 | 59.48             | 941.89                 |            |
| 433.00                 | H / 4.00            | X / 42.7                                                                                      | 69.35        | -7.47                 | 61.88             | 1241.65                |            |
| 433.00                 | H / 2.27            | Y / 328.2                                                                                     | 74.65        | -7.47                 | 67.18             | 2285.60                |            |
| 433.00                 | H / 1.00            | Z / 286.6                                                                                     | 79.55        | -7.47                 | 72.08             | 4017.91                | 10958.3    |
|                        |                     |                                                                                               |              |                       |                   |                        |            |
| *866.00                | V / 1.00            | X / 180.0                                                                                     | 50.63        | 0.00                  | 50.63             | 340.02                 | 1095.8     |
| *866.00                | V / 1.00            | Y / 180.0                                                                                     | 50.63        | 0.00                  | 50.63             | 340.02                 |            |
| *866.00                | V / 1.00            | Z / 180.0                                                                                     | 50.63        | 0.00                  | 50.63             | 340.02                 |            |
| *866.00                | H / 1.00            | X / 180.0                                                                                     | 50.63        | 0.00                  | 50.63             | 340.02                 |            |
| *866.00                | H / 1.00            | Y / 180.0                                                                                     | 50.63        | 0.00                  | 50.63             | 340.02                 |            |
| *866.00                | H / 1.00            | Z / 180.0                                                                                     | 50.63        | 0.00                  | 50.63             | 340.02                 | 1095.8     |
|                        |                     |                                                                                               |              |                       |                   |                        |            |
| 1299.00                | V / 1.60            | X / 39.4                                                                                      | 37.50        | -7.47                 | 30.03             | 31.73                  | 1095.8     |
| 1299.00                | V / 1.28            | Y / 137.9                                                                                     | 43.30        | -7.47                 | 35.83             | 61.87                  |            |
| 1299.00                | V / 1.00            | Z / 182.0                                                                                     | 41.76        | -7.47                 | 34.29             | 51.82                  |            |
| 1299.00                | H / 1.83            | X / 145.5                                                                                     | 42.70        | -7.47                 | 35.23             | 57.74                  |            |
| 1299.00                | H / 1.70            | Y / 167.6                                                                                     | 43.80        | -7.47                 | 36.33             | 65.54                  |            |
| 1299.00                | H / 1.24            | Z / 155.0                                                                                     | 42.98        | -7.47                 | 35.51             | 59.63                  | 1095.8     |
|                        |                     |                                                                                               |              |                       |                   |                        |            |
| 1732.00                | V / 1.00            | X / 142.0                                                                                     | 47.84        | -7.47                 | 40.37             | 104.35                 | 1095.8     |
| 1732.00                | V / 1.33            | Y / 114.9                                                                                     | 46.14        | -7.47                 | 38.67             | 85.80                  |            |
| 1732.00                | V / 1.00            | Z / 180.0                                                                                     | 46.26        | -7.47                 | 38.79             | 87.00                  |            |
| 1732.00                | H / 1.55            | X / 0.00                                                                                      | 46.44        | -7.47                 | 38.97             | 88.82                  |            |
| 1732.00                | H / 1.70            | Y / 102.4                                                                                     | 52.44        | -7.47                 | 44.97             | 177.21                 |            |
| 1732.00                | H / 1.69            | Z / 347.0                                                                                     | 49.34        | -7.47                 | 41.87             | 124.02                 | 1095.8     |
|                        |                     |                                                                                               |              |                       |                   |                        |            |
| *2165.00               | V / 1.00            | X / 180.0                                                                                     | 50.45        | 0.00                  | 50.45             | 333.04                 | 1095.8     |
| 2165.00                | V / 1.66            | Y / 248.0                                                                                     | 51.45        | -7.47                 | 43.98             | 158.12                 |            |
| 2165.00                | V / 1.44            | Z / 74.5                                                                                      | 52.20        | -7.47                 | 44.73             | 172.39                 |            |
| 2165.00                | H / 1.00            | X / 174.5                                                                                     | 51.71        | -7.47                 | 44.24             | 162.93                 |            |
| 2165.00                | H / 1.50            | Y / 112.8                                                                                     | 53.12        | -7.47                 | 45.65             | 191.65                 |            |
| 2165.00                | H / 1.24            | Z / 171.6                                                                                     | 52.90        | -7.47                 | 45.43             | 186.85                 | 1095.8     |
|                        |                     |                                                                                               |              |                       |                   |                        |            |



**Retlif Testing Laboratories**

Report No. R-2721P

|                        |                                                                                                                                                                                                                                               |                                                                                           |              |                       |                   |                   |                        |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------|-----------------------|-------------------|-------------------|------------------------|
| <b>Test Method:</b>    |                                                                                                                                                                                                                                               | FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)                   |              |                       |                   |                   |                        |
|                        |                                                                                                                                                                                                                                               | IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands                                |              |                       |                   |                   |                        |
| <b>Customer:</b>       |                                                                                                                                                                                                                                               | Dorman Products, Inc                                                                      |              |                       | <b>Job No.:</b>   |                   | R-2721P-1              |
| <b>Test Sample:</b>    |                                                                                                                                                                                                                                               | 433.00 MHz Remote Keyless Transmitter                                                     |              |                       |                   |                   |                        |
| <b>Model No.:</b>      |                                                                                                                                                                                                                                               | PQTDORM37                                                                                 |              |                       |                   |                   |                        |
| <b>Operating Mode:</b> |                                                                                                                                                                                                                                               | Continuously Transmitting a RF Signal at 433 MHz                                          |              |                       |                   |                   |                        |
| <b>Technician:</b>     |                                                                                                                                                                                                                                               | M. Nowak / D.Fiore                                                                        |              |                       | <b>Date:</b>      |                   | 07/07/2017, 07/19/2017 |
| <b>Notes:</b>          |                                                                                                                                                                                                                                               | Average values calculated from Peak readings    Duty Cycle: 42.32%    Correction -7.47 dB |              |                       |                   |                   |                        |
| Test Freq.             | Antenna Pol./Height                                                                                                                                                                                                                           | EUT Orientation                                                                           | Peak Reading | Duty Cycle Correction | Corrected Reading | Converted Reading | Avg. Limit             |
| MHz                    | (V/H)-Meters                                                                                                                                                                                                                                  | X / Y / Z                                                                                 | dBµV/m       | dB                    | dBµV/m            | uV/m              | uV/m                   |
| *2598.00               | V / 1.00                                                                                                                                                                                                                                      | X / 180.0                                                                                 | 51.85        | 0                     | 51.85             | 391.29            | 1095.8                 |
| *2598.00               | V / 1.00                                                                                                                                                                                                                                      | Y / 180.0                                                                                 | 51.85        | 0                     | 51.85             | 391.29            |                        |
| *2598.00               | V / 1.00                                                                                                                                                                                                                                      | Z / 180.0                                                                                 | 51.85        | 0                     | 51.85             | 391.29            |                        |
| *2598.00               | H / 1.00                                                                                                                                                                                                                                      | X / 180.0                                                                                 | 52.75        | 0                     | 52.75             | 434.01            |                        |
| *2598.00               | H / 1.00                                                                                                                                                                                                                                      | Y / 180.0                                                                                 | 52.75        | 0                     | 52.75             | 434.01            |                        |
| *2598.00               | H / 1.00                                                                                                                                                                                                                                      | Z / 180.0                                                                                 | 52.75        | 0                     | 52.75             | 434.01            | 1095.8                 |
|                        |                                                                                                                                                                                                                                               |                                                                                           |              |                       |                   |                   |                        |
| *3031.00               | V / 1.00                                                                                                                                                                                                                                      | X / 180.0                                                                                 | 55.33        | 0                     | 55.33             | 584.11            | 1095.8                 |
| *3031.00               | V / 1.49                                                                                                                                                                                                                                      | Y / 313.2                                                                                 | 55.33        | 0                     | 55.33             | 584.11            |                        |
| *3031.00               | V / 1.00                                                                                                                                                                                                                                      | Z / 180.0                                                                                 | 55.33        | 0                     | 55.33             | 584.11            |                        |
| *3031.00               | H / 1.00                                                                                                                                                                                                                                      | X / 180.0                                                                                 | 55.43        | 0                     | 55.43             | 590.88            |                        |
| *3031.00               | H / 1.00                                                                                                                                                                                                                                      | Y / 180.0                                                                                 | 55.43        | 0                     | 55.43             | 590.88            |                        |
| *3031.00               | H / 1.00                                                                                                                                                                                                                                      | Z / 180.0                                                                                 | 55.43        | 0                     | 55.43             | 590.88            | 1095.8                 |
|                        |                                                                                                                                                                                                                                               |                                                                                           |              |                       |                   |                   |                        |
| *3464.00               | V / 1.00                                                                                                                                                                                                                                      | X / 180.0                                                                                 | 42.68        | 0                     | 42.68             | 136.14            | 1095.8                 |
| *3464.00               | V / 1.00                                                                                                                                                                                                                                      | Y / 180.0                                                                                 | 42.68        | 0                     | 42.68             | 136.14            |                        |
| *3464.00               | V / 1.00                                                                                                                                                                                                                                      | Z / 180.0                                                                                 | 42.68        | 0                     | 42.68             | 136.14            |                        |
| *3464.00               | H / 1.00                                                                                                                                                                                                                                      | X / 180.0                                                                                 | 44.93        | 0                     | 44.93             | 176.40            |                        |
| *3464.00               | H / 1.00                                                                                                                                                                                                                                      | Y / 180.0                                                                                 | 44.93        | 0                     | 44.93             | 176.40            |                        |
| *3464.00               | H / 1.00                                                                                                                                                                                                                                      | Z / 180.0                                                                                 | 44.93        | 0                     | 44.93             | 176.40            | 1095.8                 |
|                        |                                                                                                                                                                                                                                               |                                                                                           |              |                       |                   |                   |                        |
| *3897.00               | V / 1.00                                                                                                                                                                                                                                      | X / 180.0                                                                                 | 43.46        | 0                     | 43.46             | 148.94            | 500                    |
| *3897.00               | V / 1.00                                                                                                                                                                                                                                      | Y / 180.0                                                                                 | 43.46        | 0                     | 43.46             | 148.94            |                        |
| *3897.00               | V / 1.00                                                                                                                                                                                                                                      | Z / 180.0                                                                                 | 43.46        | 0                     | 43.46             | 148.94            |                        |
| *3897.00               | H / 1.00                                                                                                                                                                                                                                      | X / 180.0                                                                                 | 42.56        | 0                     | 42.56             | 134.27            |                        |
| *3897.00               | H / 1.00                                                                                                                                                                                                                                      | Y / 180.0                                                                                 | 42.56        | 0                     | 42.56             | 134.27            |                        |
| *3897.00               | H / 1.00                                                                                                                                                                                                                                      | Z / 180.0                                                                                 | 42.56        | 0                     | 42.56             | 134.27            | 500                    |
|                        |                                                                                                                                                                                                                                               |                                                                                           |              |                       |                   |                   |                        |
| *4330.00               | V / 1.00                                                                                                                                                                                                                                      | X / 180.0                                                                                 | 45.53        | 0                     | 45.53             | 189.02            | 500                    |
| *4330.00               | V / 1.00                                                                                                                                                                                                                                      | Y / 180.0                                                                                 | 45.53        | 0                     | 45.53             | 189.02            |                        |
| *4330.00               | V / 1.00                                                                                                                                                                                                                                      | Z / 180.0                                                                                 | 45.53        | 0                     | 45.53             | 189.02            |                        |
| *4330.00               | H / 1.00                                                                                                                                                                                                                                      | X / 180.0                                                                                 | 45.03        | 0                     | 45.03             | 178.44            |                        |
| *4330.00               | H / 1.00                                                                                                                                                                                                                                      | Y / 180.0                                                                                 | 45.03        | 0                     | 45.03             | 178.44            |                        |
| *4330.00               | H / 1.00                                                                                                                                                                                                                                      | Z / 180.0                                                                                 | 45.03        | 0                     | 45.03             | 178.44            | 500                    |
|                        | The frequency range was scanned from 30 MHz to 3.2 GHz. All emissions not recorded were more than 20dB below the specified limit. Emissions from the EUT do not exceed the specified limits.<br>NOTE: * Indicates minimum system sensitivity. |                                                                                           |              |                       |                   |                   |                        |



**Retlif Testing Laboratories**

Report No. R-2721P


**FCC Part 15, Subpart C, Section 15.231(b), Duty Cycle Determination  
IC RSS-210 A1.1.2(2), Pulsed Operation  
Test Data**



**Retlif Testing Laboratories**

Report No. R-2721P

Agilent 11:13:12 Jun 30, 2017

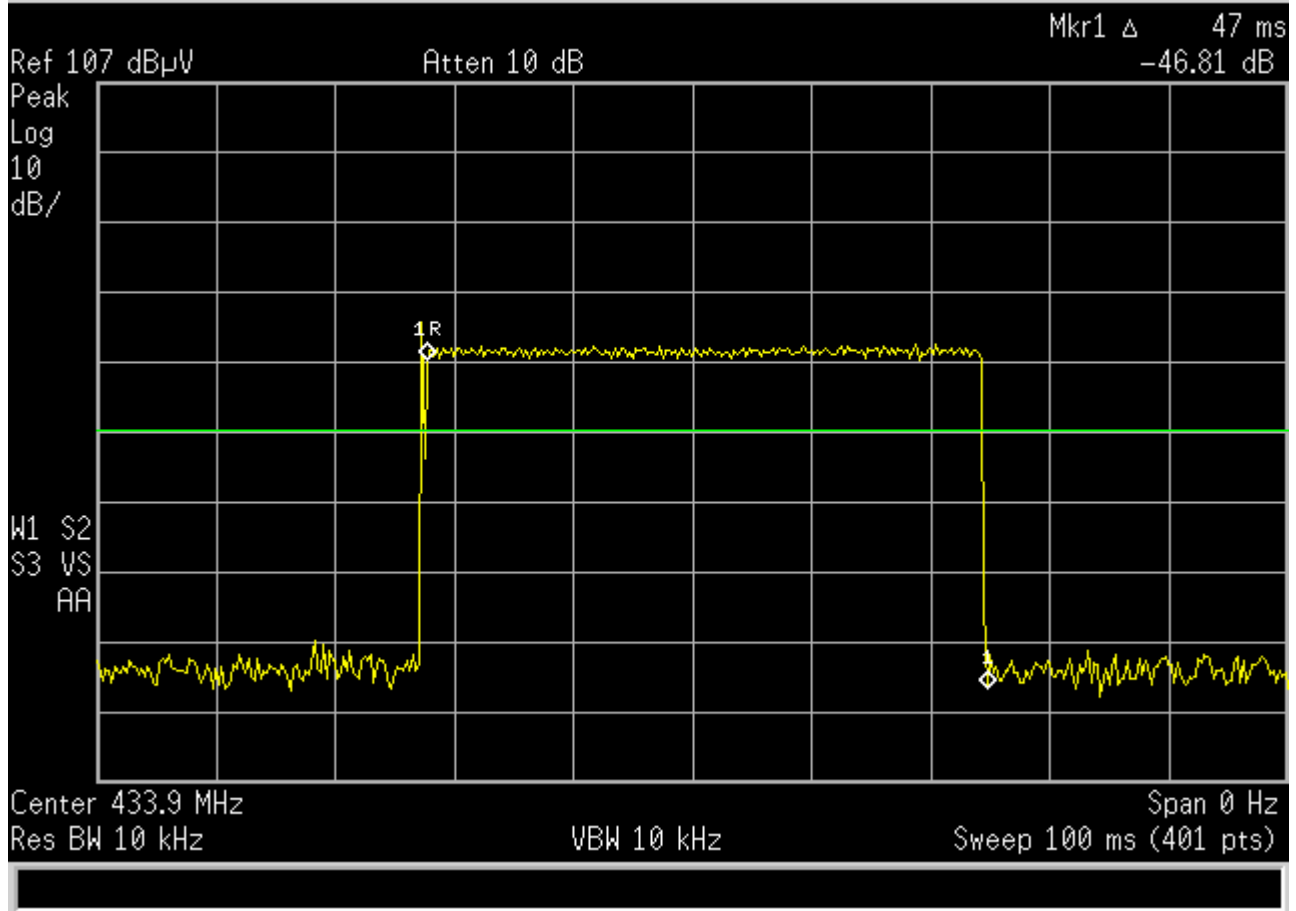


**Test Method: FCC Part 15.231(b), Duty Cycle Determination**

**Notes:** Measurement of cycle time 47ms



**Retlif Testing Laboratories**

Report No. R-2721P

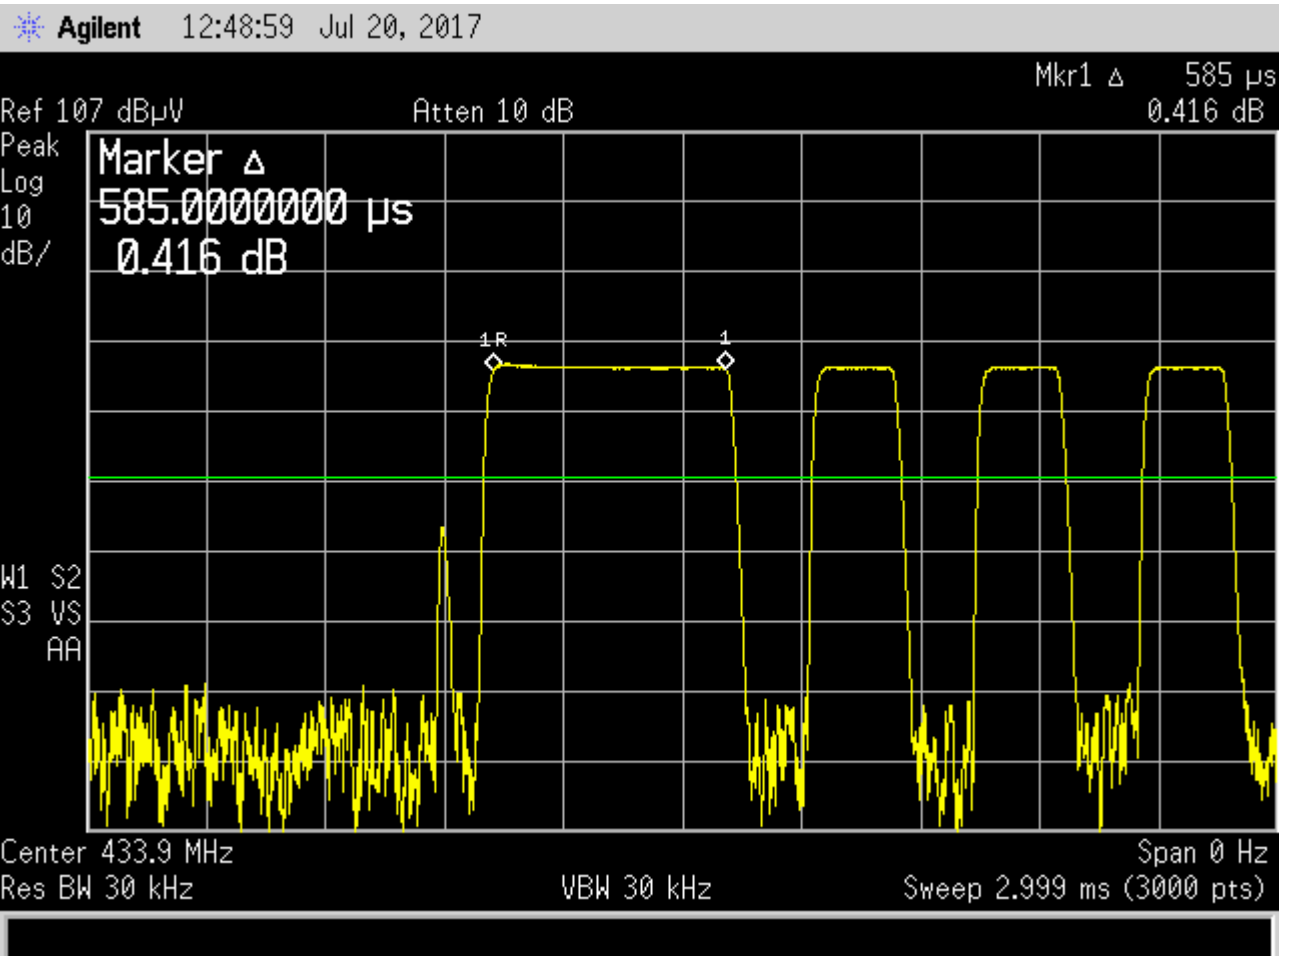


Test Method: FCC Part 15.231(b), Duty Cycle Determination

Notes: Pulse width 1 on time = 585 μs



Retlif Testing Laboratories

Report No. R-2721P

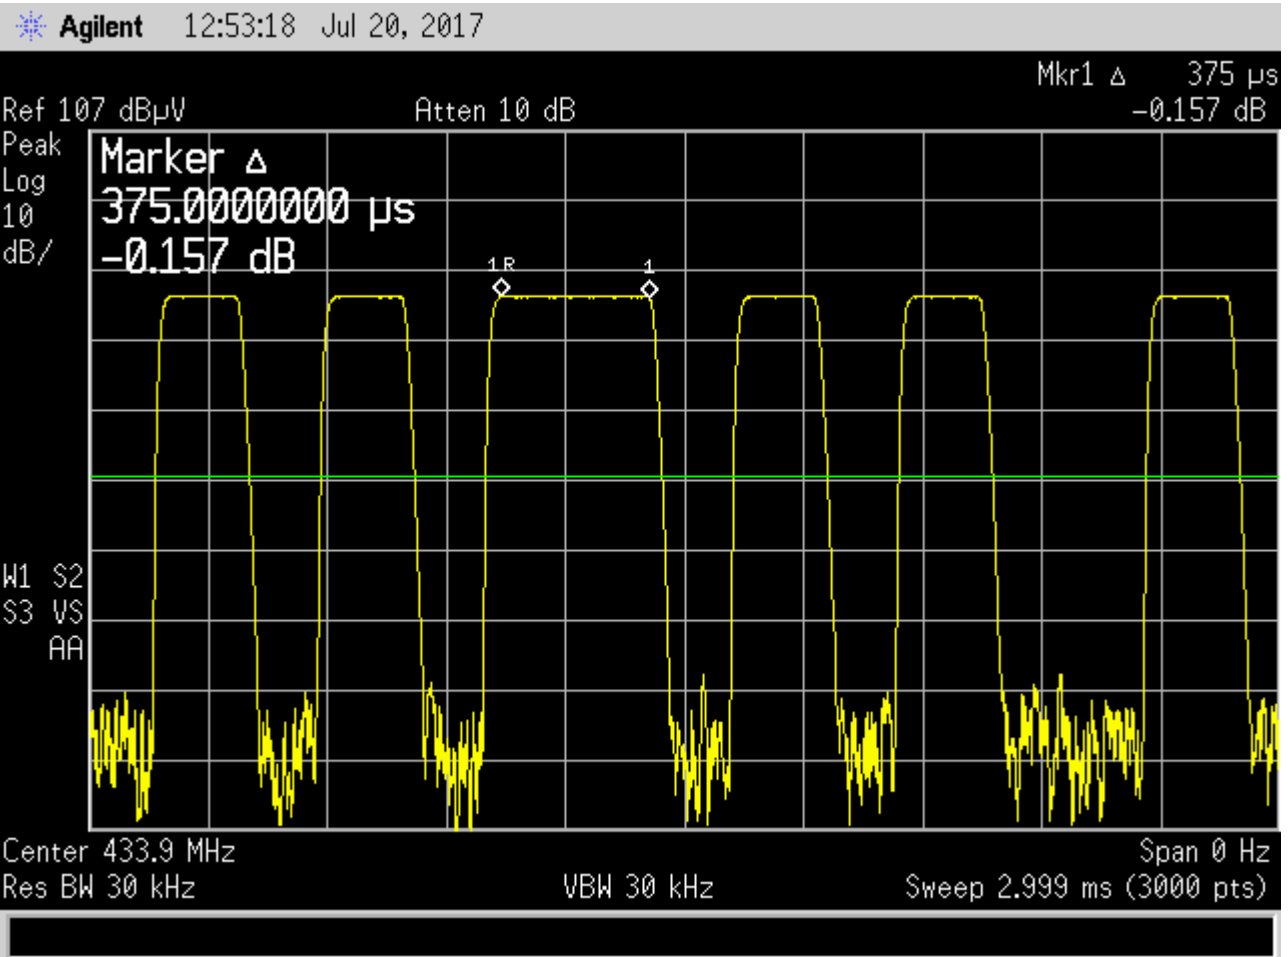


**Test Method:** FCC Part 15.231(b), Duty Cycle Determination

**Notes:** Pulse width 2 on time = 375 μs



**Retlif Testing Laboratories**

Report No. R-2721P

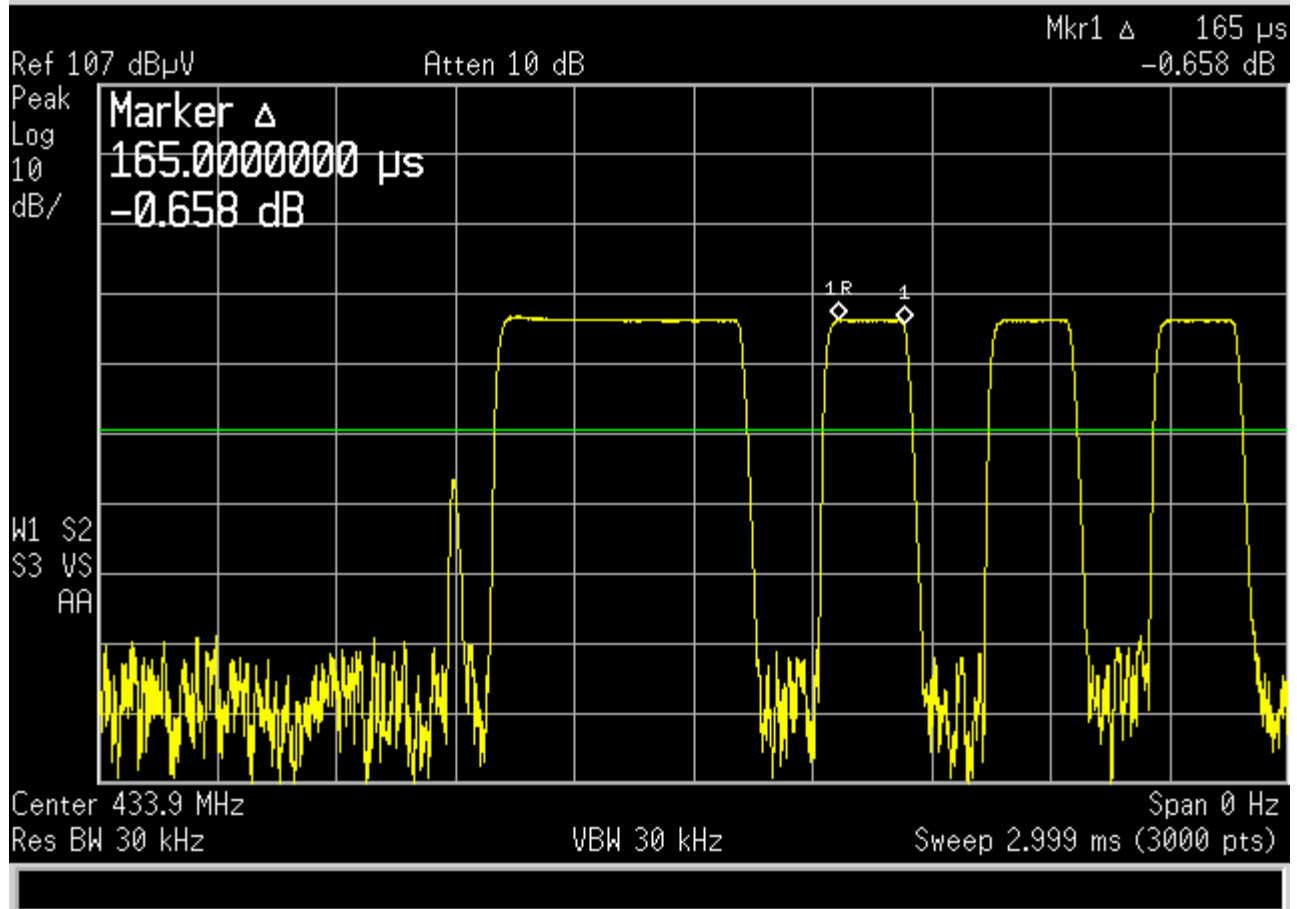


**Test Method:** FCC Part 15.231(b), Duty Cycle Determination

**Notes:** Pulse width 3 on time = 165 μs



**Retlif Testing Laboratories**

Report No. R-2721P

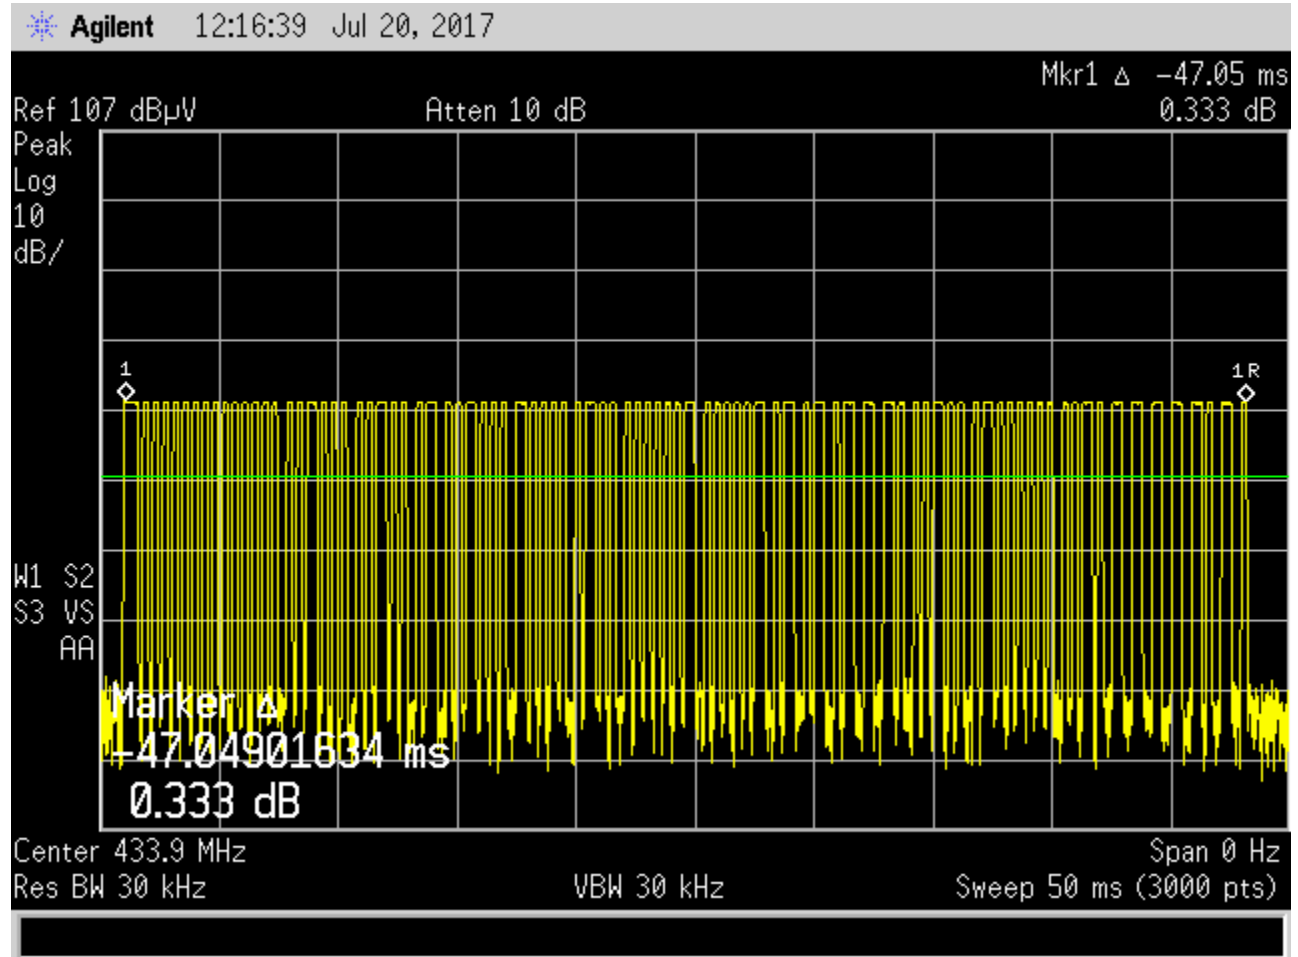

**Test Method: FCC Part 15.231(b), Duty Cycle Determination**

**Notes:** Number of Pulses = 1 @ 0.585ms  
22 @ 0.375ms  
67 @ 0.165ms



**Retlif Testing Laboratories**

Report No. R-2721P

**Field Strength of Spurious Emissions  
FCC Part 15, Subpart C, Section 15.231(b)  
Field Strength of Unwanted Emissions  
IC RSS-210 A1.1.2 (3)  
Test Data**



**Retlif Testing Laboratories**

Report No. R-2721P

| <b>Test Method:</b>                                                     | <b>FCC Part 15 Subpart C, Field Strength of Spurious Emissions, Section 15.231(b).</b> |                                |               |                   |                    |                   |                      |
|-------------------------------------------------------------------------|----------------------------------------------------------------------------------------|--------------------------------|---------------|-------------------|--------------------|-------------------|----------------------|
|                                                                         | <b>IC RSS-210, A1.1.2 (3) Field Strength of Unwanted Emissions</b>                     |                                |               |                   |                    |                   |                      |
| <b>Customer:</b>                                                        | Dorman Products, Inc.                                                                  |                                |               |                   | <b>Job No.:</b>    | R-2721P-1         |                      |
| <b>Test Sample:</b>                                                     | 433.00 MHz Remote Keyless Transmitter                                                  |                                |               |                   |                    |                   |                      |
| <b>Model No.:</b>                                                       | PQTDORM37                                                                              |                                |               |                   | <b>Serial No.:</b> | N/A               |                      |
| <b>Operating Mode:</b>                                                  | Continuously Transmitting an RF Signal at 433.00 MHz                                   |                                |               |                   |                    |                   |                      |
| <b>Technician:</b>                                                      | M. Nowak                                                                               |                                |               |                   | <b>Date:</b>       | 07/07/2017        |                      |
| <b>Notes:</b>                                                           | Test Distance: 3 Meters<br>Detector: Quasi-Peak from 30 MHz to 1 GHz                   |                                |               |                   |                    |                   |                      |
| Transmit Frequency                                                      | Test Frequency                                                                         | Antenna/<br>EUT<br>Orientation | Meter Reading | Correction Factor | Corrected Reading  | Converted Reading | Limit<br>At 3 Meters |
| MHz                                                                     | MHz                                                                                    | Polarization/Axis              | dBuV          | dB                | dBuV/m             | uV/m              | uV/m                 |
| 433.00                                                                  | 30.00                                                                                  | -                              | -             | -                 | -                  | -                 | 100.00               |
|                                                                         |                                                                                        | -                              | -             | -                 | -                  | -                 |                      |
|                                                                         | *36.00                                                                                 | H/1.00                         | 10.7          | 13.19             | 23.89              | 15.65             |                      |
|                                                                         |                                                                                        | -                              | -             | -                 | -                  | -                 |                      |
|                                                                         | 88.00                                                                                  | -                              | -             | -                 | -                  | -                 | 100.00               |
|                                                                         | 88.00                                                                                  | -                              | -             | -                 | -                  | -                 | 150.00               |
|                                                                         |                                                                                        | -                              | -             | -                 | -                  | -                 |                      |
|                                                                         | *110.00                                                                                | H/1.00                         | 11.5          | 14.19             | 25.69              | 19.25             |                      |
|                                                                         | *195.00                                                                                | H/1.00                         | 7.4           | 19.30             | 26.70              | 21.63             |                      |
|                                                                         | *202.00                                                                                | H/1.00                         | 8.5           | 13.90             | 22.40              | 13.18             |                      |
|                                                                         |                                                                                        | -                              | -             | -                 | -                  | -                 |                      |
|                                                                         | 216.00                                                                                 | -                              | -             | -                 | -                  | -                 | 150.00               |
|                                                                         | 216.00                                                                                 | -                              | -             | -                 | -                  | -                 | 200.00               |
|                                                                         |                                                                                        | -                              | -             | -                 | -                  | -                 |                      |
|                                                                         | 420.84                                                                                 | H/1.00/75.6                    | 9.0           | 20.85             | 29.85              | 31.08             |                      |
|                                                                         | 420.84                                                                                 | V/1.20/96.7                    | 13.4          | 20.85             | 34.25              | 51.58             |                      |
|                                                                         |                                                                                        |                                |               |                   |                    |                   |                      |
|                                                                         | 447.00                                                                                 | H/1.58/183.7                   | 9.9           | 20.67             | 30.57              | 33.77             |                      |
|                                                                         | 447.00                                                                                 | V/1.23/119.8                   | 12.2          | 20.67             | 32.87              | 44.00             |                      |
|                                                                         |                                                                                        | -                              | -             | -                 | -                  | -                 |                      |
|                                                                         |                                                                                        | -                              | -             | -                 | -                  | -                 |                      |
|                                                                         | 960.00                                                                                 | -                              | -             | -                 | -                  | -                 | 200.00               |
|                                                                         | 960.00                                                                                 | -                              | -             | -                 | -                  | -                 | 500.00               |
|                                                                         |                                                                                        | -                              | -             | -                 | -                  | -                 |                      |
|                                                                         | *995.00                                                                                | H/1.00                         | 13.9          | 31.88             | 45.78              | 194.54            |                      |
|                                                                         |                                                                                        | -                              | -             | -                 | -                  | -                 |                      |
| 433.00                                                                  | 1000.00                                                                                | -                              | -             | -                 | -                  | -                 | 500.00               |
|                                                                         |                                                                                        |                                |               |                   |                    |                   |                      |
|                                                                         |                                                                                        |                                |               |                   |                    |                   |                      |
| The frequency range was scanned from 30 MHz to 1.0 GHz.                 |                                                                                        |                                |               |                   |                    |                   |                      |
| The emissions observed from the EUT do not exceed the specified limits. |                                                                                        |                                |               |                   |                    |                   |                      |
| Emissions not recorded were more than 20dB under the specified limit.   |                                                                                        |                                |               |                   |                    |                   |                      |
| *Noise Floor Measurements (minimum sensitivity of the receiver system). |                                                                                        |                                |               |                   |                    |                   |                      |



**Retlif Testing Laboratories**


Report No. R-2721P

**FCC Part 15, Subpart C, Section 15.231 (c), Bandwidth of Emission  
IC RSS-210, A1.1.3, Bandwidth of Momentary Signals  
Test Data**




**Retlif Testing Laboratories**

Report No. R-2721P

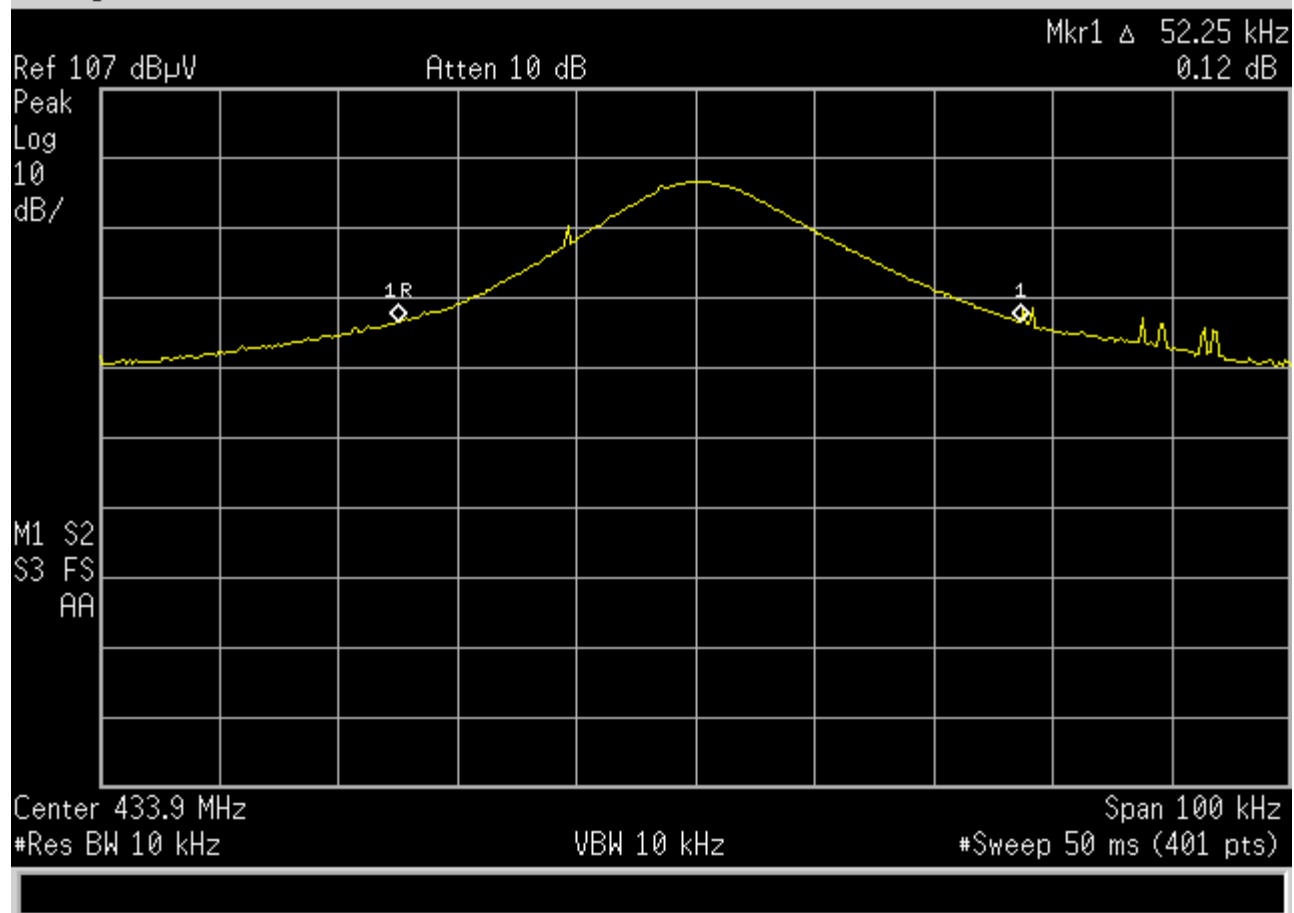

Retlif Testing Laboratories

Report No. R-2721P

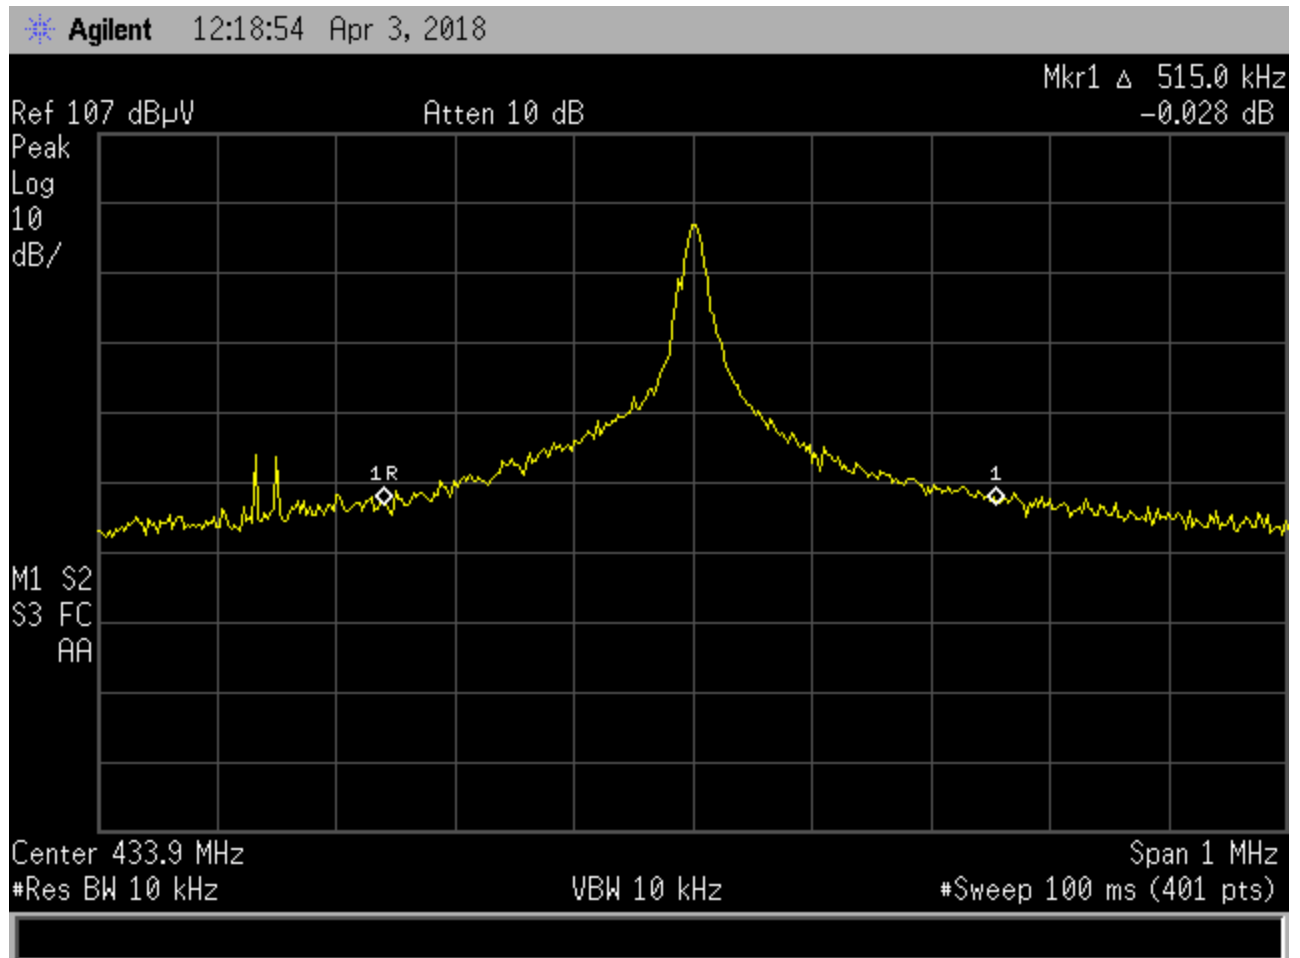

99% Bandwidth = 515.0 kHz



Retlif Testing Laboratories


Report No. R-2721P

**FCC Part 15, Subpart C, Section 15.231(a)(1), Timing Requirements  
IC RSS-210 A1.1.1(a), Types Of Momentary Signals  
Test Data**



**Retlif Testing Laboratories**

Report No. R-2721P

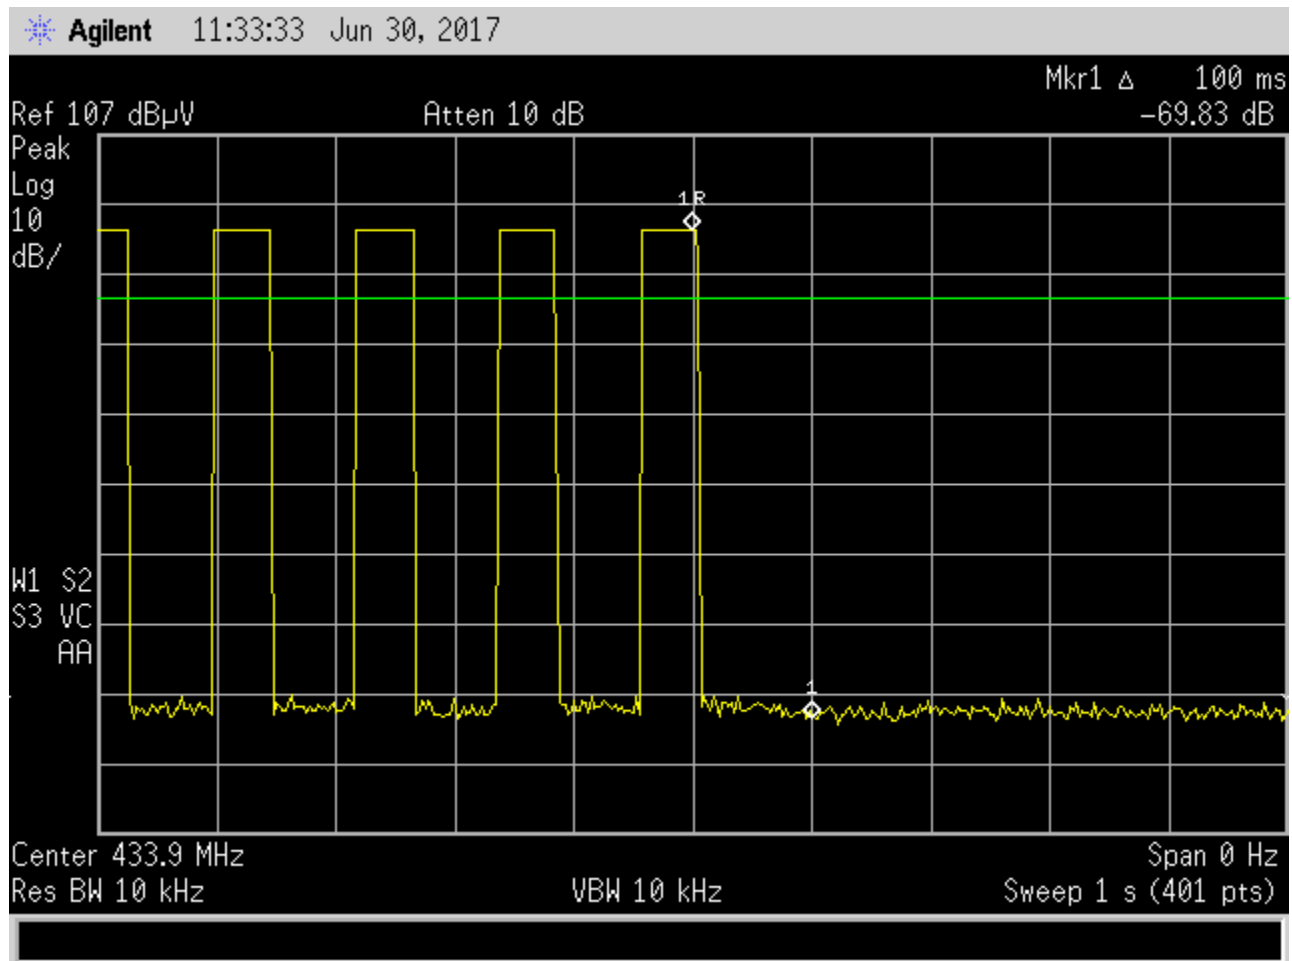

**Test Method:** FCC Part 15.231(a)(1), Transmitter Deactivation Time

**Notes:** The transmitter was verified to cease transmitting within 5 seconds of manual deactivation.



**Retlif Testing Laboratories**

Report No. R-2721P