


一、Specifications Table

Main technical parameters of products

the key technical indexes		Main technical specifications	
frequency range (MHZ)	2400-2500	Frequency Range (MHZ)	2400-2500
Characteristic impedance (Ω)	50	Impedance(Ω)	50
Gain (dBi)	1±0.5	Gain(dBi)	1±0.5
Polarization mode	Linear polarization	Polarization	Linear
Working temperature	-20°C~+70°C	Operating Temp	-20°C~+70°C
Preservation temperature	-20°C~+70°C	Storage Temp	-20°C~+70°C


manufacturer: Shenzhen Xudaxin Technology Co., Ltd. address:
909 SHIFENG Building,6267 Baoan avenue, Qiaotou
community, Fuhai street, Baoan district Shenzhen

二. Antenna diagram and dimensions (mm):

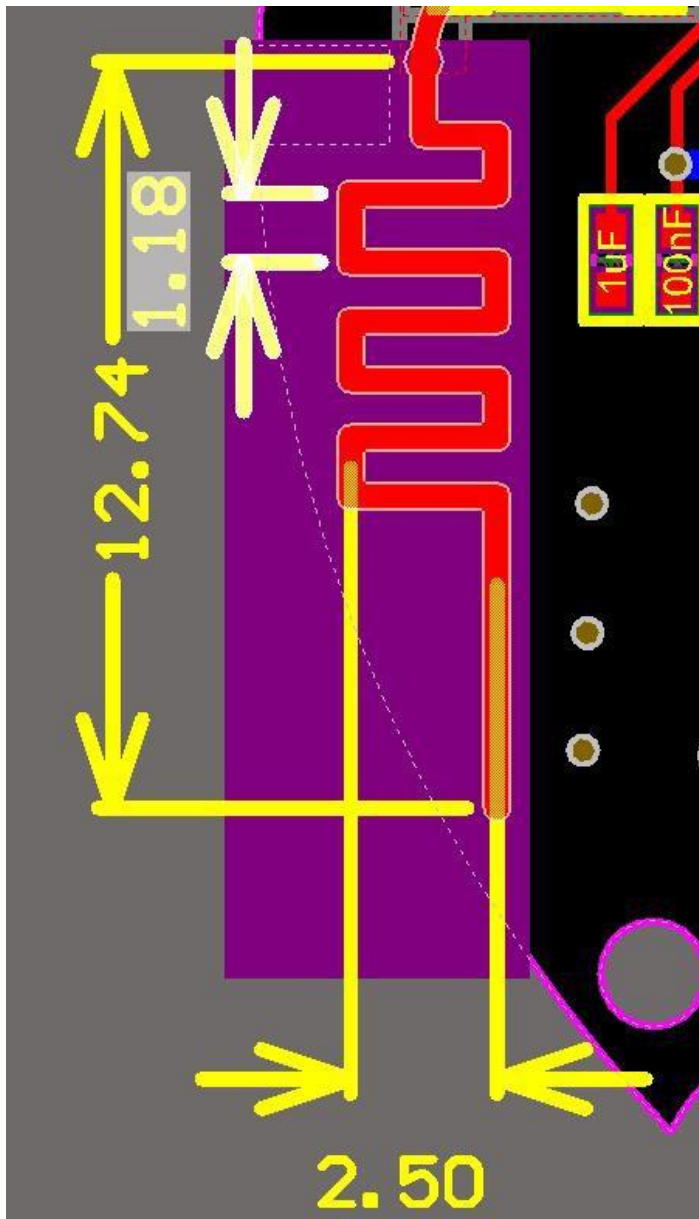


三、Test Report:


: Network analyzer test report

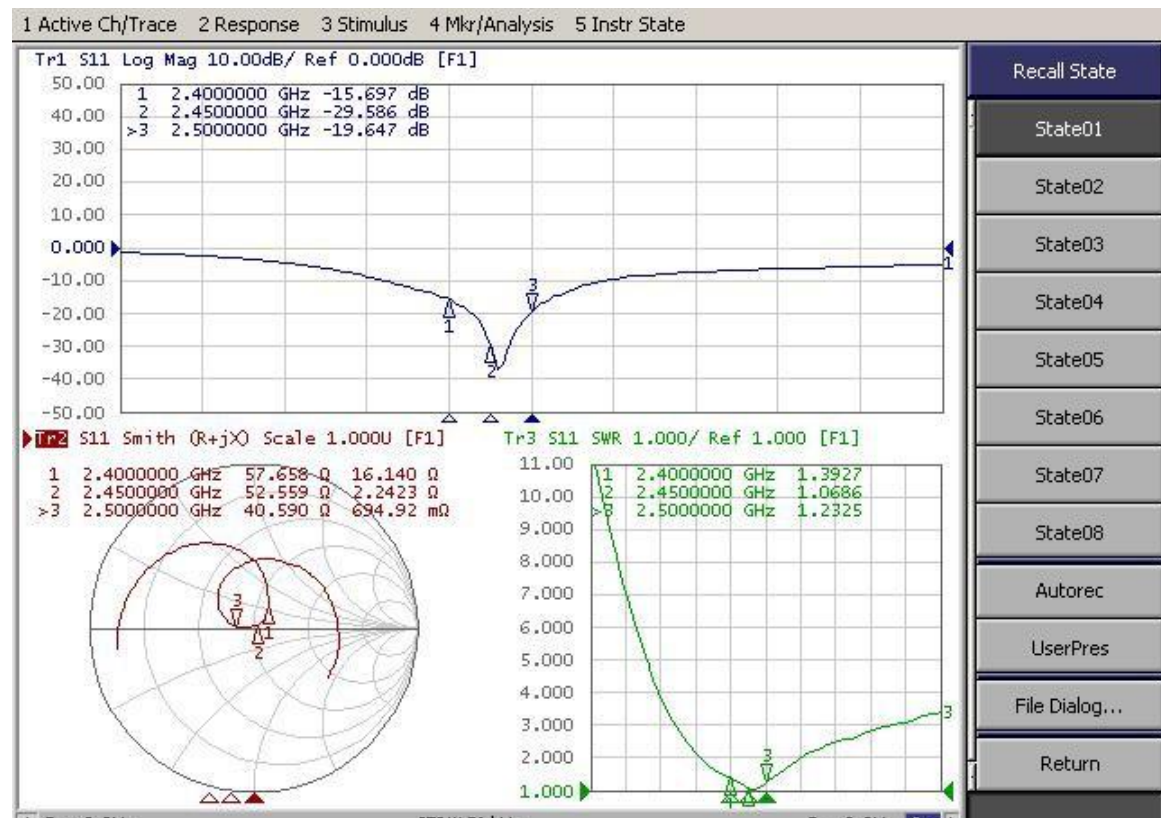





: darkroom 2D, 3 dration pattern






2.4GHz Gain:1.41 dBi



Efficiency:75.6 1%



2.45GHz Gain: 1.50dBi Efficiency: 78.45%



2.5GHz Gain: 1.46dBi Efficiency: 79.32%