

**FCC PART 15 SUBPART C**  
**EMI MEASUREMENT AND TEST REPORT**

For  
**Arescom, Inc.**

3541 Gateway Blvd.  
Fremont, CA 94538

**FCC ID: PT2AG2000S**

July 19, 2002

|                                                                                                                                                              |                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| <b>This Report Concerns:</b><br><input checked="checked" type="checkbox"/> Original Report                                                                   | <b>Equipment Type:</b><br>802.11b Wireless LAN Router |
| <b>Test Engineer:</b> Benjamin Jing                                                                                                                          |                                                       |
| <b>Report No.:</b> R0206254                                                                                                                                  |                                                       |
| <b>Test Date:</b> June 26, 2002                                                                                                                              |                                                       |
| <b>Reviewed By:</b> Jeff Lee                                                                                                                                 |                                                       |
| <b>Prepared By:</b> Bay Area Compliance Laboratory Corporation<br>230 Commercial Street<br>Sunnyvale, CA 94085<br>Tel: (408) 732-9162<br>Fax: (408) 732 9164 |                                                       |

**Note:** This test report is specially limited to the above client company and product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

**TABLE OF CONTENTS**

|                                                              |          |
|--------------------------------------------------------------|----------|
| <b>1 - GENERAL INFORMATION.....</b>                          | <b>3</b> |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) ..... | 3        |
| 1.2 OBJECTIVE .....                                          | 3        |
| 1.3 TEST METHODOLOGY .....                                   | 3        |
| 1.4 TEST FACILITY .....                                      | 3        |
| 1.5 TEST EQUIPMENT LIST .....                                | 4        |
| 1.6 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....            | 5        |
| 1.7 EXTERNAL CABLES LIST AND DETAILS .....                   | 5        |
| <b>2 - SYSTEM TEST CONFIGURATION AND REQUIREMENT.....</b>    | <b>6</b> |
| 2.1 DESCRIPTION OF TEST CONFIGURATION .....                  | 6        |
| 2.2 EQUIPMENT MODIFICATION .....                             | 6        |
| 2.3 CONFIGURATION OF TEST SYSTEM.....                        | 6        |
| 2.4 TEST SETUP BLOCK DIAGRAM .....                           | 6        |
| <b>3 - SUMMARY OF TEST RESULTS.....</b>                      | <b>7</b> |
| <b>4 - RADIATED EMISSION.....</b>                            | <b>8</b> |
| 4.1 MEASUREMENT UNCERTAINTY .....                            | 8        |
| 4.2 EUT SETUP .....                                          | 8        |
| 4.3 SPECTRUM ANALYZER SETUP .....                            | 8        |
| 4.4 TEST PROCEDURE .....                                     | 9        |
| 4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....           | 9        |
| 4.6 SUMMARY OF TEST RESULTS .....                            | 9        |

## 1 - GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

Arescom, Inc.'s product, model: AG2000 or the "EUT" as referred to in this report is a 802.11b wireless LAN router which measures approximately 5.75"L x 8.00' W x 1.50"H.

The EUT was fed by Arescom, Inc.'s AC/AC power adapter, M/N: JOD-48U.

*\* The test data was good for test sample only. It may have deviation for other product sample.*

### 1.2 Objective

This Class II Permissive Change type approval report is prepared on behalf of Arescom, Inc. in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

This Class II Permissive Change device provides one Ethernet LAN port while the original granted device has four Ethernet Switch Hub for LAN.

The objective of the manufacturer is to demonstrate compliance with FCC rules for spurious radiated emission.

### 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2000, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### 1.4 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2000.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1998, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

### 1.5 Test Equipment List

| Manufacturer      | Description              | Model            | Serial Number | Cal. Due Date |
|-------------------|--------------------------|------------------|---------------|---------------|
| HP                | Spectrum Analyzer        | 8564E            | 08303         | 12/6/02       |
| HP                | Spectrum Analyzer        | 8593B            | 2919A00242    | 12/20/02      |
| HP                | Amplifier                | 8349B            | 2644A02662    | 12/20/02      |
| HP                | Quasi-Peak Adapter       | 85650A           | 917059        | 12/6/02       |
| HP                | Amplifier                | 8447E            | 1937A01046    | 12/6/02       |
| A.H. System       | Horn Antenna             | SAS0200/571      | 261           | 12/27/02      |
| Com-Power         | Log Periodic Antenna     | AL-100           | 16005         | 11/2/02       |
| Com-Power         | Biconical Antenna        | AB-100           | 14012         | 11/2/02       |
| Solar Electronics | LISN                     | 8012-50-R-24-BNC | 968447        | 12/28/02      |
| Com-Power         | LISN                     | LI-200           | 12208         | 12/20/02      |
| Com-Power         | LISN                     | LI-200           | 12005         | 12/20/02      |
| BACL              | Data Entry Software      | DES1             | 0001          | 12/20/02      |
| Rohde & Schwarz   | Signal Generator         | SMIQ03B          | 1125.5555.03  | 7/10/02       |
| Rohde & Schwarz   | I/Q Modulation Generator | AMIQ             | 1110.2003.02  | 8/10/02       |

\* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. certifies that all calibration has been performed using suitable standards traceable to the NATIONAL INSTITUTE of STANDARDS and TECHNOLOGY (NIST).

**1.6 Local Support Equipment List and Details**

| Manufacturer | Description | Model     | Serial Number | FCC ID       |
|--------------|-------------|-----------|---------------|--------------|
| KDS          | Monitor     | VCDTS2147 | DP02301873    | N/A          |
| HP           | ThinkJet    | 2225C+    | N/A           | DS16XU2225   |
| EVEREX       | Modem       | EV-945    | None          | E3E5UVEV-945 |
| Microsoft    | KB          | X03-30785 | E06401COMB    | DOC          |
| Microsoft    | Mouse       | MUS9J     | N/A           | EMJMUSJ      |

**1.7 External Cables List and Details**

| Cable Description       | Length (M) | From               | To         |
|-------------------------|------------|--------------------|------------|
| Shielded KB Cable       | 1.6        | PS/2 KB Port/PC    | Keyboard   |
| Shielded Mouse Cable    | 1.5        | PS/2 Mouse Port/PC | Mouse      |
| Shielded Serial Cable   | 1.5        | Serial Port/PC     | Modem      |
| Shielded Parallel Cable | 2.0        | Parallel Port/PC   | Printer    |
| Shielded VGA Cable      | 1.8        | VGA Port/PC        | Monitor    |
| Shielded RJ45 Cable     | 1.2        | RJ45 Port/PC       | Microphone |

## 2 - SYSTEM TEST CONFIGURATION AND REQUIREMENT


### 2.1 Description of Test Configuration

The EUT was configured for testing in a typical fashion (as normally used by a typical user).


### 2.2 Equipment Modification

No modification(s) was made by BACL Corp. to ensure EUT comply with applicable limits and requirements.

### 2.3 Configuration of Test System

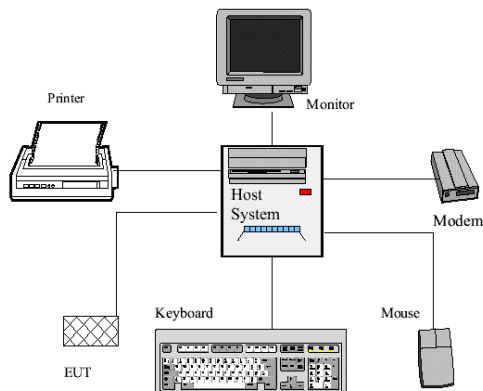

### 2.4 Test Setup Block Diagram

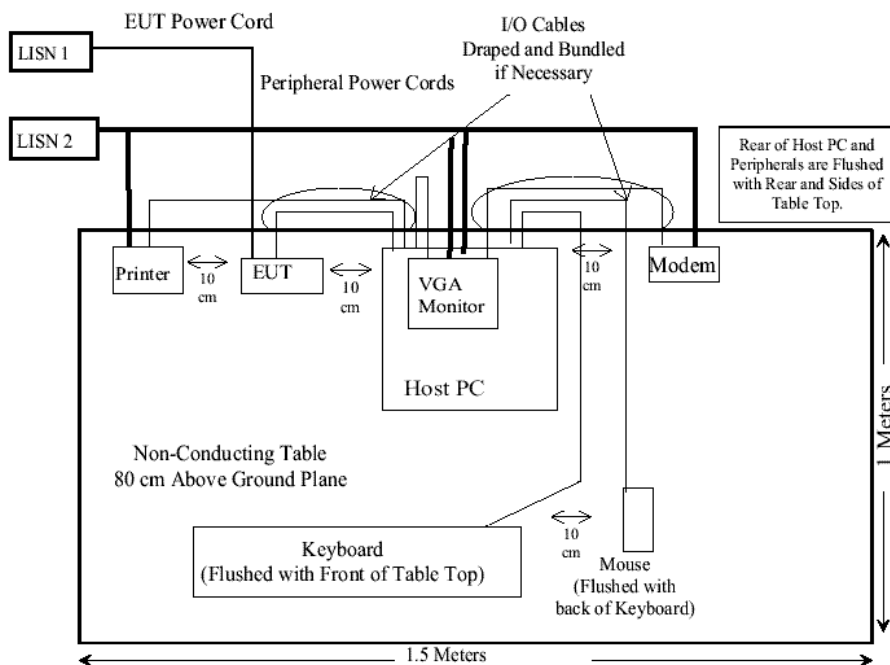

---

### 3 - SUMMARY OF TEST RESULTS

---

| FCC RULES                              | DESCRIPTION OF TEST                                          | RESULT    | REFERENCE |
|----------------------------------------|--------------------------------------------------------------|-----------|-----------|
| § 15.205<br>§15.209 (a)<br>§15.209 (f) | Restricted Bands,<br>Radiated Emission,<br>Spurious Emission | Compliant | Section 4 |

## 4 - RADIATED EMISSION

---

### 4.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is  $\pm 4.0$  dB.

### 4.2 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with the ANSI C63.4-2000. The specification used was the FCC 15 Subpart C limits.

The PC was put on the center back edge of the turntable with monitor on its top. The modem and the printer were put on each side of the PC. The EUT was put in front of the printer. The rear of the EUT and peripherals were flushed with the rear of the turntable.

The keyboard was put directly in front of the PC. The mouse was put along with it. The rear of the mouse was flushed with the rear of the keyboard.

The spacing between peripherals was 10cm.

External I/O were draped along the turntable and bundled if necessary.

The EUT utilized 120Vac/60Hz power source.

### 4.3 Spectrum Analyzer Setup

According to FCC Rules, 47 CFR §15.33 (a) (1), the system was tested to 25GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

|                                   |         |
|-----------------------------------|---------|
| Start Frequency .....             | 30 MHz  |
| Stop Frequency .....              | 25GHz   |
| Sweep Speed .....                 | Auto    |
| IF Bandwidth .....                | 1 MHz   |
| Video Bandwidth .....             | 1 MHz   |
| Quasi-Peak Adapter Bandwidth..... | 120 kHz |
| Quasi-Peak Adapter Mode .....     | Normal  |
| Resolution Bandwidth.....         | 1MHz    |

#### 4.4 Test Procedure

For the radiated emissions test, the EUT power cord was connected to the AC floor outlet since the power supply used in the EUT did not provide an accessory power outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dBμV of specification limits), and are distinguished with a "Qp" in the data table.

#### 4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for Subpart C. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Subpart C Limit}$$

#### 4.6 Summary of Test Results

According to the data in section 11.7, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207 and 15.247, and had the worst margin of:

##### Intentional Emission, 1000MHz to 25GHz, 3 meters

- 13.9 (Avg.) dBμV at 4824.00 MHz in the Vertical polarization, Low Channel
- 15.1 (Avg.) dBμV at 4884.00 MHz in the Vertical polarization, Middle Channel
- 14.8 (Avg.) dBμV at 4944.90 MHz in the Vertical polarization, High Channel

##### Unintentional Emission, 30 to 1000MHz, 3 meters

- 2.0 dBμV at 283.62.00 MHz in the horizontal polarization

**Unintentional Emission, 30MHz to 26GHz, 3 meters**

| INDICATED        |                 |          | TABLE           | ANTENNA         |               | CORRECTION FACTOR |             |            | CORRECTED AMPLITUDE   | FCC 15 SUBPART C |              |
|------------------|-----------------|----------|-----------------|-----------------|---------------|-------------------|-------------|------------|-----------------------|------------------|--------------|
| Frequency<br>MHz | Ampl.<br>dBμV/m | Comments | Angle<br>Degree | Height<br>Meter | Polar<br>H/ V | Antenna<br>dBμV/m | Cable<br>DB | Amp.<br>DB | Corr. Ampl.<br>dBμV/m | Limit<br>dBμV/m  | Margin<br>dB |
| Low Channel      |                 |          |                 |                 |               |                   |             |            |                       |                  |              |
| 4824.00          | 32.7            | Avg.     | 0               | 1.5             | v             | 32.5              | 4.9         | 30.0       | 40.1                  | 54               | -13.9        |
| 4824.00          | 30.4            | Avg.     | 60              | 1.5             | h             | 32.5              | 4.9         | 30.0       | 37.8                  | 54               | -16.2        |
| Middle Channel   |                 |          |                 |                 |               |                   |             |            |                       |                  |              |
| 4884.00          | 31.5            | Avg.     | 45              | 1.5             | v             | 32.5              | 4.9         | 30.0       | 38.9                  | 54               | -15.1        |
| 4884.00          | 29.8            | Avg.     | 90              | 1.5             | h             | 32.5              | 4.9         | 30.0       | 37.2                  | 54               | -16.8        |
| High Channel     |                 |          |                 |                 |               |                   |             |            |                       |                  |              |
| 4944.00          | 31.8            | Avg.     | 270             | 1.5             | v             | 32.5              | 4.9         | 30.0       | 39.2                  | 54               | -14.8        |
| 4944.00          | 30.2            | Avg.     | 250             | 1.5             | h             | 32.5              | 4.9         | 30.0       | 37.6                  | 54               | -16.4        |

\* There was no apparent emission after the 2<sup>nd</sup> harmonics.

**Unintentional Emission, 30MHz to 1000MHz, 3 meters**

| INDICATED        |                 | TABLE           | ANTENNA         |               | CORRECTION FACTOR |             |            | CORRECTED AMPLITUDE   | FCC 15 CLASS B  |              |
|------------------|-----------------|-----------------|-----------------|---------------|-------------------|-------------|------------|-----------------------|-----------------|--------------|
| Frequency<br>MHz | Ampl.<br>dBμV/m | Angle<br>Degree | Height<br>Meter | Polar<br>H/ V | Antenna<br>dBμV/m | Cable<br>dB | Amp.<br>dB | Corr. Ampl.<br>dBμV/m | Limit<br>dBμV/m | Margin<br>dB |
| 283.62           | 48.6            | 280             | 1.2             | H             | 14.6              | 5.8         | 25.0       | 44.0                  | 46              | -2.0         |
| 283.62           | 45.10           | 260             | 1.5             | V             | 14.6              | 5.8         | 25.0       | 40.5                  | 46              | -5.5         |
| 279.27           | 45.6            | 310             | 1.5             | H             | 13.9              | 5.2         | 25.0       | 39.7                  | 46              | -6.3         |
| 314.17           | 44.5            | 0               | 1.5             | H             | 15.9              | 3.7         | 25.0       | 39.1                  | 46              | -6.9         |
| 322.90           | 45.8            | 270             | 1.2             | H             | 15.5              | 2.8         | 25.0       | 39.1                  | 46              | -6.9         |
| 248.72           | 45.4            | 90              | 1.5             | H             | 12.6              | 2.3         | 25.0       | 35.3                  | 46              | -10.7        |
| 314.17           | 40.6            | 30              | 1.5             | V             | 15.9              | 3.7         | 25.0       | 35.2                  | 46              | -10.8        |
| 322.9            | 41.20           | 250             | 1.2             | V             | 15.5              | 2.8         | 25.0       | 34.5                  | 46              | -11.5        |
| 279.27           | 39.8            | 300             | 1.2             | V             | 13.9              | 5.2         | 25.0       | 33.9                  | 46              | -12.1        |
| 289.62           | 37.5            | 270             | 1.5             | H             | 14.6              | 5.8         | 25.0       | 32.9                  | 46              | -13.1        |
| 139.62           | 37.8            | 0               | 1.5             | V             | 12.9              | 1.8         | 25.0       | 27.5                  | 43.5            | -16.0        |
| 289.62           | 33.4            | 250             | 1.2             | V             | 14.6              | 5.8         | 25.0       | 28.8                  | 46              | -17.2        |
| 248.72           | 37.5            | 130             | 1.2             | V             | 12.6              | 2.3         | 25.0       | 27.4                  | 46              | -18.6        |
| 139.62           | 31.0            | 0               | 1.2             | H             | 12.9              | 1.8         | 25.0       | 20.7                  | 43.5            | -22.8        |