



FCC CFR47 PART 22 SUBPART H

CERTIFICATION REPORT

FOR

CELLULAR CDMA WLL PHONE

MODEL: DTP800

FCC ID: PUNDTP-800

REPORT NUMBER: 01I0933-1

ISSUE DATE: AUGUST 30, 2001

Prepared for

DOWTELECOM INC.

**4TH FLOOR, WOOSONG BLDG. 361-10, YATAP-DONG,
BUNDANG-GU, SEONGNAM-SI,
GYUNGGI-DO, KOREA**

Prepared by

COMPLIANCE CERTIFICATION SERVICES, INC.

d.b.a.

COMPLIANCE ENGINEERING SERVICES, INC.

**561F Monterey Road,
Morgan Hill, Ca 95037-9001
U.S.A.**

TEL: (408) 463-0885

FAX: (408) 463-0888

TABLE OF CONTENT

PAGE NO

FCC CERTIFICATION INFORMATION	3
TEST RESULT CERTIFICATION	6
EUT DESCRIPTION	7
TEST FACILITY.....	7
ACCREDITATION AND LISTING.....	7
MEASURING INSTRUMENT CALIBRATION	7
TEST EQUIPMENT LIST	8
FCC PART 15 TEST RESULTS	9
TESTED SYSTEMS DETAILS	9
CONFIGURATION BLOCK DIAGRAM	10
EXTERNAL I/O CABLE CONSTRUCTION DESCRIPTION	10
RADIATED EMISSION	11
CONDUCTED EMISSION	12
LINE CONDUCTION PLOT	13
SETUP PHOTOS.....	14
FCC PART 2 CERTIFICATION TEST RESULTS:	18
SECTION 2.1046: RF POWER OUTPUT	19
SECTION 2.1047: MODULATION CHARACTERISTICS	23
SECTION 2.1049: OCCUPIED BANDWIDTH.....	24
SECTION 2.1051: SPURIOUS EMISSION AT ANTENNA TERMINAL	26
SECTION 2.1053: FIELD STRENGTH OF SPURIOUS RADIATION.....	31
SECTION 2.1055: FREQUENCY STABILITY	34
SECTION 22.355: FREQUENCY STABILITY	34
SETUP PHOTOS.....	35
ATTACHMENTS	
EUT PHOTOGRAPHS	
PROPOSED FCC ID LABEL FORMAT	
TECHINICAL DESCRIPTION & TUNE UP PROCEDURE	
REQUEST OF CONFIDENTIALITY LETTER	
INSTALLATION & SERVICE MANUAL	
BLOCK DIAGRAM, SCHEMATIC DIAGRAM & PART LIST	

FCC CERTIFICATION INFORMATION

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

2.1033(c)(1): Applicant: DOWTELECOM INC.
4TH Floor, Woosong Bldg. 361-10, Yatap-Dong
Bundang-Gu, Seongnam-Si,
Gyeonggi-Do, Korea

Contact person: Mr. Seoung Chul Ju/Senior Engineer

Telephone number: 482-031-701-8962

2.1033(c)(2) FCC ID: PUNDTP-800

2.1033(c)(3) Instructions/Installation Manual

Refer to **Attachment:** Installation and Service manual.

2.1033(c)(4) Type of emissions

1M25F9W

2.1033(c)(5) Frequency Range

Transmit: **824MHz to 849MHz**
Receive: **869MHz to 894MHz**

2.1033(c)(6) Range of Operation Power

< -50dBm, 0.00001WATTS.
25dBm, 0.316WATTS.
See Attachment: *Technical Description* section 2.983(d)(3) *Means for variation of operating power.*

2.1033(c)(7) Maximum Power Rating

25dBm (0.316WATTS)

2.1033(c)(8) Applied voltage and currents into the final transistor elements

See Attachment: *Technical Description* section 2.983(d)(5) *DC voltage and current of final amplifying device.*

2.1033(c)(9) Tune-up/Optimizations Procedure

See Attachment: *Technical Description* section 2.983(d)(9) *Tune-up procedure over the power range.*

2.1033(c)(10) Complete Circuit Diagrams and Functional Diagram

Functional diagram: See Attachment: *Technical Description* section 2.983(d)(12) *Description of modulation system used.*

Complete circuit diagrams: See Attachment: Schematics and parts list.

2.1033(c)(10a) Means for Frequency Stabilization

See Attachment: *Technical Description* section 2.983(d)(10) *Description of frequency determining and stabilizing circuitry..*

2.1033(c)(10b) Means for Suppressing of Spurious radiation.

See Attachment: *Technical Description* section 2.983(d)(11) *Description of circuit emulated for suppression of spurious radiations.*

2.1033(c)(10c) Means for Limiting Modulation.

See Attachment: *Technical Description* section 2.983(d)(12) *Description of modulation system used.*

2.1033(c)(10d) Means for Limiting Power.

See Attachment: *Technical Description* section 2.983(d)(3) *Means for variation of operating power.*

2.1033(c)(11) Equipment Identification

A drawing of the equipment identification nameplate appears under **Attachment:** PROPOSED FCC ID LABEL FORMAT.

2.1033(c)(12) Photographs

Photographs of the equipment, internal and external views, are found in the **Attachment:** Eut Photographs.

2.1033(c)(13) Description of Digital Modulation Techniques

See Attachment: *Technical Description* section 2.983(d)(12) *Description of modulation system used.*

2.1033(c)(14) Standard Test Condition

The EUT was operated in Test Mode during testing. See Attachment: *Technical Description* section 2.983(d)(9) *Tune-up procedure over the power range*, for a description of the Test Mode.

TEST RESULT CERTIFICATION

COMPANY NAME: DOWTELECOM INC.
4TH FLOOR, WOOSONG BLDG. 361-10, YATAP-DONG
BUNDANG-GU, SEONGNAM-SI,
GYUNGGI-DO, KOREA

CONTACT PERSON: MR. SEOUNG CHUL JU/ SENIOR ENGINEER

TELEPHONE NO: 482-031-701-8962

EUT DESCRIPTION: CELLULAR CDMA WLL PHONE

MODEL NAME: DTP800

DATE TESTED: AUGUST 24, 2001

TYPE OF EQUIPMENT	CDMA WIRELESS LOCAL LOOP PHONE
APPLICATION PROCEDURE	CERTIFICATION
FCC RULE PARTS	FCC Part 2, 15, and 22
MEASUREMENT PROCEDURE	FCC Parts 2, 22 and ANSI C63.4

Compliance Certification Services, Inc. tested the above equipment for compliance with the requirements set forth in FCC Parts 2, 15 and 22. The said equipment, in the configuration described in this report, fulfills the technical characteristics of the specified standard.

Warning : This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Tested By:

PETE KREBILL
ASSOCIATE EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

Released For CCS By:

STEVE CHENG
EMC ENGINEERING MANAGER
COMPLIANCE CERTIFICATION SERVICES

EUT DESCRIPTION

The Dowtel DTP-800 terminal is a CDMA Wireless Local Loop (WLL) phone. Its basic purpose is for use to provide voice communication and data communication such as fax or modem if connected to a computer. It transmits from 824 MHz to 849 MHz and receives from 869 MHz to 894 MHz. The RF power is rated at 316 mW. The omni-directional dipole antenna has a rated gain of more than 1.0dBi.

TEST FACILITY

The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

ACCREDITATION AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200065-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (reference no: 31040/SIT (1300B3) and 31040/SIT (1300F2))

MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

TEST EQUIPMENT LIST

Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
Signal Generator	HP	83732B	US3449059	3/21/01	3/21/02
Spectrum Analyzer	H.P.	8593EM	3710A00205	6/20/01	6/20/02
Pre-Amp	H.P	8449B	3008A00369	5/30/01	5/30/02
Horn Antenna	EMCO	3115	2238	6/20/01	6/20/02
Horn Antenna	EMCO	3115	9001-3245	6/20/01	6/20/02
Horn Antenna	ARA	MWH-1826/B	1013	7/26/01	7/26/02


Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
Spectrum Analyzer	HP100Hz - 22GHz	8566B	2140A01296	5/4/02
Spectrum Display	HP	85662A	2152A03066	5/10/02
Quasi-Peak Detector	HP9K - 1GHz	85650A	2811A01155	5/4/02
Pre-Amplifier, 25 dB	HP 0.1 - 1300MHz	8447D (P_1M)	2944A06833	11/21/01
Antenna, BiLog	Chase 30 - 2000MHz	CBL6112	2049	12/11/01
LISN	Fisher Cus. Comm.	LISN-50/250-25-2	2023	8/5/02
EMI Test Receiver	Rohde & Schwarz	ESHS 20	827129/006	2/28/02
Horn Antenna(1 - 18GHz)	EMCO	3115	9001-3245	6/20/02
Pre-Amplifier	MITEQ1-26GHz	NSP2600-44	646456	1/3/02
EMC Receiver (9K-26.5GHz)	HP	8593EM	3710A00205	6/20/02
Horn Antenna,(18 - 26GHz)	Antenna Research Associate	MWH 1826/B	1013	7/26/02
Signal Generator	HP	8640B	2322A22402	4/10/02

FCC PART 15 TEST RESULTS

TESTED SYSTEMS DETAILS

MOUSE	HP	M-S34	LZB75062022	DZL211029
PRINTER	HP	2225C	2930S52614	DSI6XU2225
LAPTOP	IMENTIC	94A2824	H4895AAA	DoC

CONFIGURATION BLOCK DIAGRAM

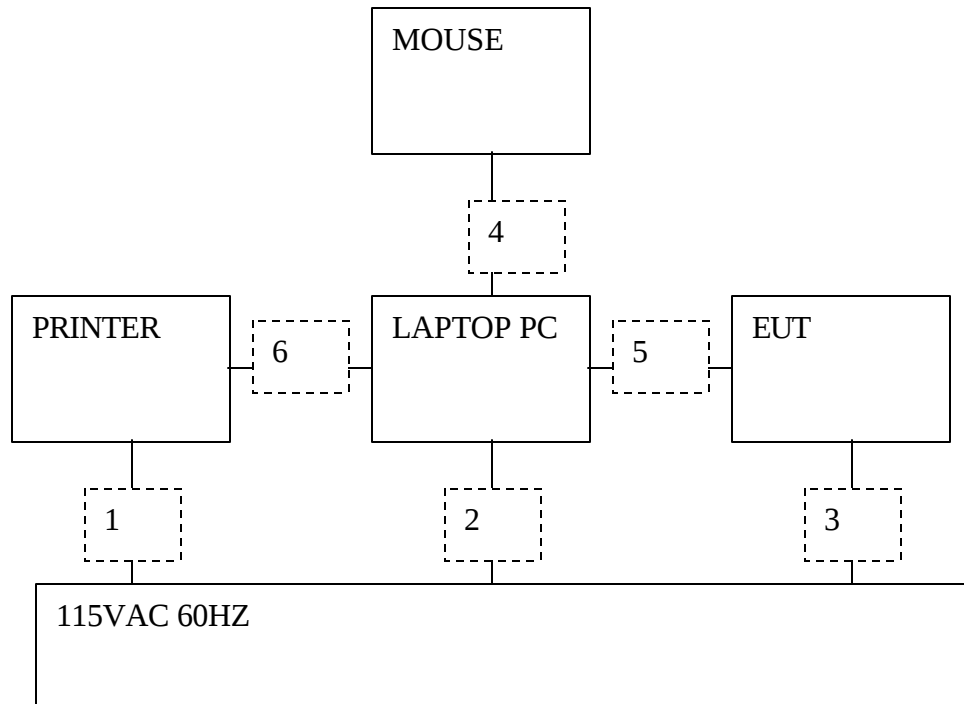

EXTERNAL I/O CABLE CONSTRUCTION DESCRIPTION

Cable No	I/O Port	# of I/O Port	Connector Type	Type of Cable	Cable Length	Data Traffic	Bundled	Remark
1	AC	1	US 115V	Un-shielded	2m	No	No	N/A
2	AC	1	US 115V	Un-shielded	2m	No	Yes	Bundled during AC LC only
3	AC	1	US 115V	Un-shielded	2m	No	No	N/A
4	Mouse	1	PS/2	Un-shielded	2m	Yes	No	N/A
5	Serial	1	DB9	Shielded	1m	Yes	No	N/A
6	Parallel	1	DB25	Shielded	2m	Yes	Yes	N/A

RADIATED EMISSION

						Project #: 01i0934-1 Report #: 010823a Date & Time: 08/23/01 10:15 AM Test Engr: Hue Ly Vang					
FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP 561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888											
Company: ETL Inc. EUT Description: cell phone Test Configuration: EUT/LAPTOP/PHONE/MOUSE/PRINTER Type of Test: FCC Class B Mode of Operation: Normal, Dial redial to laptop											
☒ A-Site ☐ B-Site ☐ C-Site ☐ F-Site 6 Worst Data											
Freq. (MHz)	Reading (dBuV)	AF (dB)	Cross (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
77.20	52.00	7.89	1.15	27.83	33.22	40.00	-6.78	3mV	180.00	1.00	P
630.00	38.00	19.82	3.66	28.80	32.68	46.00	-13.32	3mV	180.00	1.00	P
915.00	39.00	22.01	4.70	28.53	37.18	46.00	-8.82	3mV	180.00	1.00	P
130.50	33.20	12.87	1.56	27.68	19.95	43.50	-23.55	3mH	180.00	1.00	P
313.00	34.00	15.23	2.46	27.31	24.38	46.00	-21.62	3mH	180.00	1.00	P
808.00	33.00	21.07	4.45	28.72	29.80	46.00	-16.20	3mH	180.00	1.00	P
Total data #: 6											
V.2a											

CONDUCTED EMISSION


CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	FCC_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.58	27.49	--	--	0.00	48.00	--	-20.51	--	L1
16.59	28.47	--	--	0.00	48.00	--	-19.53	--	L1
27.58	37.20	--	--	0.00	48.00	--	-10.80	--	L1
3.75	33.80	--	--	0.00	48.00	--	-14.20	--	L2
0.59	28.90	--	--	0.00	48.00	--	-19.10	--	L2
27.90	34.88	--	--	0.00	48.00	--	-13.12	--	L2
6 Worst Data									

LINE CONDUCTION PLOT



561 F Monterey Road, Route 2
Morgan Hill, CA 95037-9001 USA
Tel: (408) 463-0885
Fax: (408) 463-0888

Data#: 21 File#: 01I0934.ENI Date: 08-22-2001 Time: 10:39:25
Compliance Certification Services

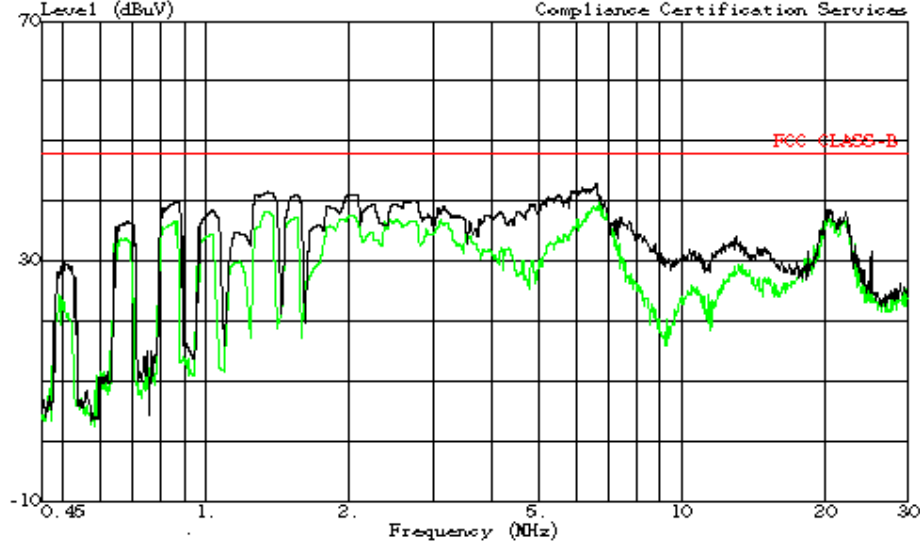

Trace: 17
Project No. : 01I0934-1
Report No. : 010821-FU
Test Engr : Hue Ly Vang
Company : ETL INC.
EUT Description : WLL TERMINAL
Model : DTP800
EUT Config. : EUT
Type of Test : FCC CLASS B
Mode of Operation:
: PEAK: L1 (Green), L2 (Black)
: 115Vac, 60Hz

Ref Trace:

SETUP PHOTOS



RADIATION FRONT



RADIATION BACK




LINE CONDUCTION FRONT



LINE CONDUCTION BACK

FCC PART 2 CERTIFICATION TEST RESULTS:

Test Set-up for the following conducted tests:



SECTION 2.1046: RF POWER OUTPUT

Section 22.913(a); Maximum ERP. The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

Test Procedure conducted:

The EUT was setup to maximum output power (maximum gain) at its lowest channel. The output power was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The ERP is then calculated by adding the EUT's antennas gain in dBd to the EUT's power in dBm. The EUT's antenna gain was rated at $< 1.0\text{dBi}$. $1.0\text{dBi} - 2.2\text{dB} = -1.2\text{dBd}$ is used for calculating ERP.

Test Procedure radiated:

The EUT was setup to its maximum output power at its lowest channel. The EUT's antenna was attached normally. ERP was measured using the radiated substitution method. The measurements are repeated for the highest and a middle channel. See the description of the test method in *Field Strength of Spurious Radiations Substitution* section of this report.

Test Result:

Complies.

Calculations and plots are shown below for conducted measurements.

A spreadsheet is shown below for radiated measurements

Conducted measurements:

Channel 1013: $25.00\text{dBm} - 1.2 = 23.8\text{dBm}$ ERP or 240mW ERP

Channel 363: $24.90\text{dBm} - 1.2 = 23.7\text{dBm}$ ERP or 234mW ERP


Channel 777: $25.00\text{dBm} - 1.2 = 23.8\text{dBm}$ ERP or 240mW ERP


Radiated measurements:


Compliance Certification Services

8/22/01
Pete Krebill

Frequency MHz	SA reading dBuV	Sig Gen dBm	CL dB	Gain dBi	Gain dBd	ERP dBm	Limit dBm	Margin dB
Channel 1013								
824.7	94.9	19.3	0.3	6.7	4.5	23.5	38	-14.5
Channel 363								
835.89	94.72	19.2	0.3	6.7	4.5	23.4	38	-14.6
Channel 777								
848.31	95	19.4	0.3	6.7	4.5	23.6	38	-14.4

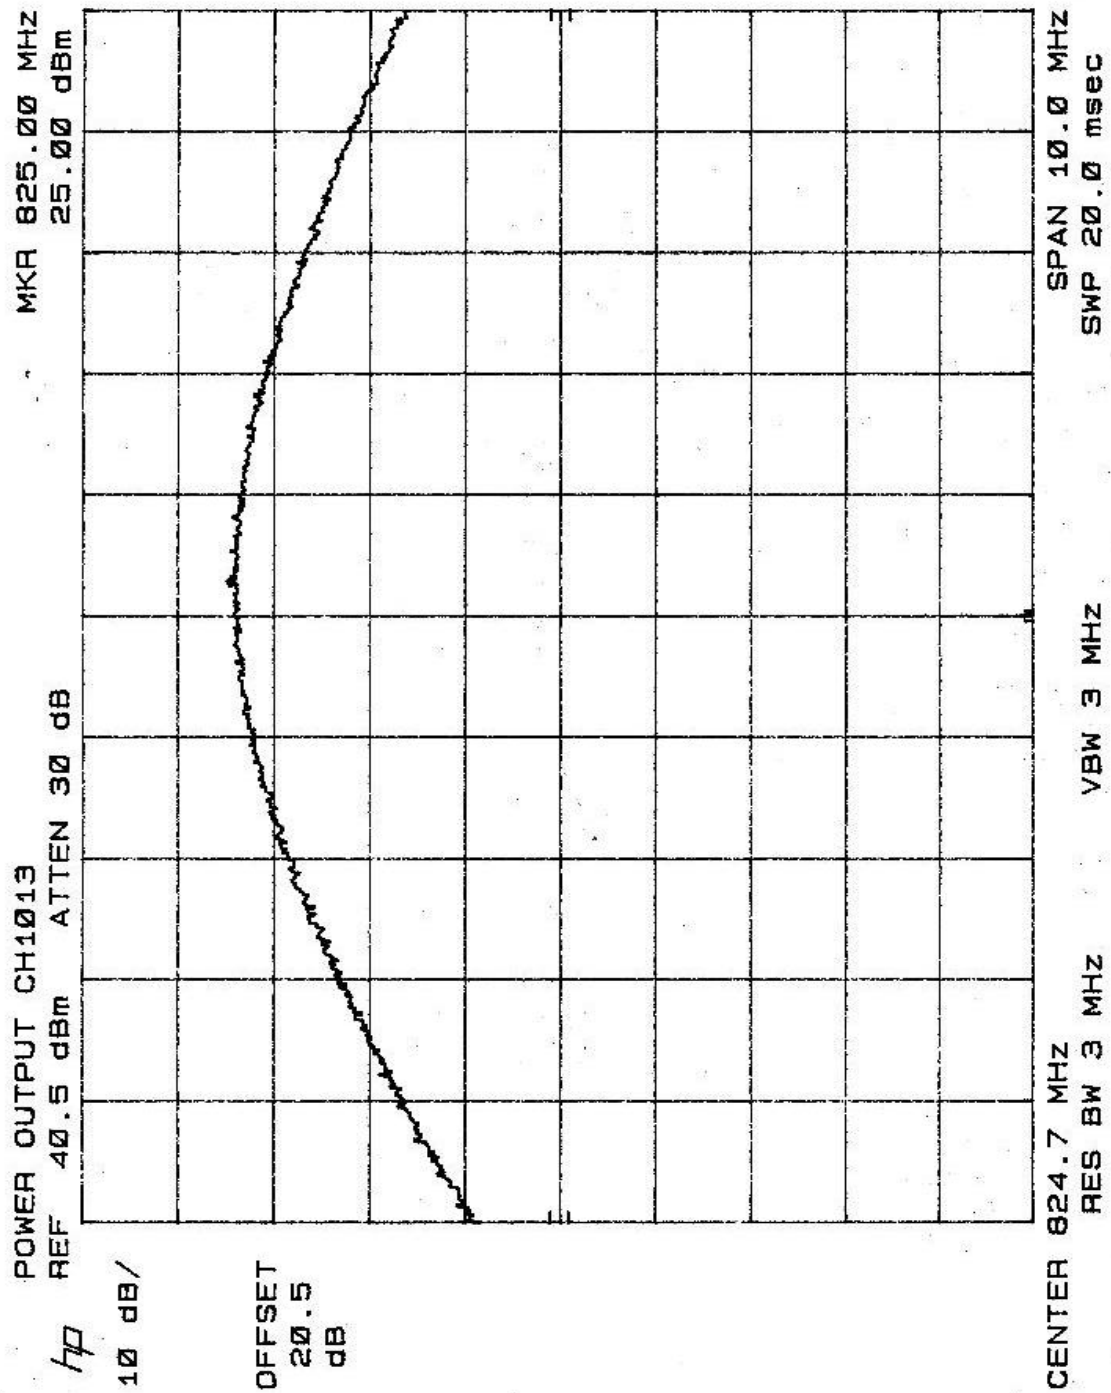

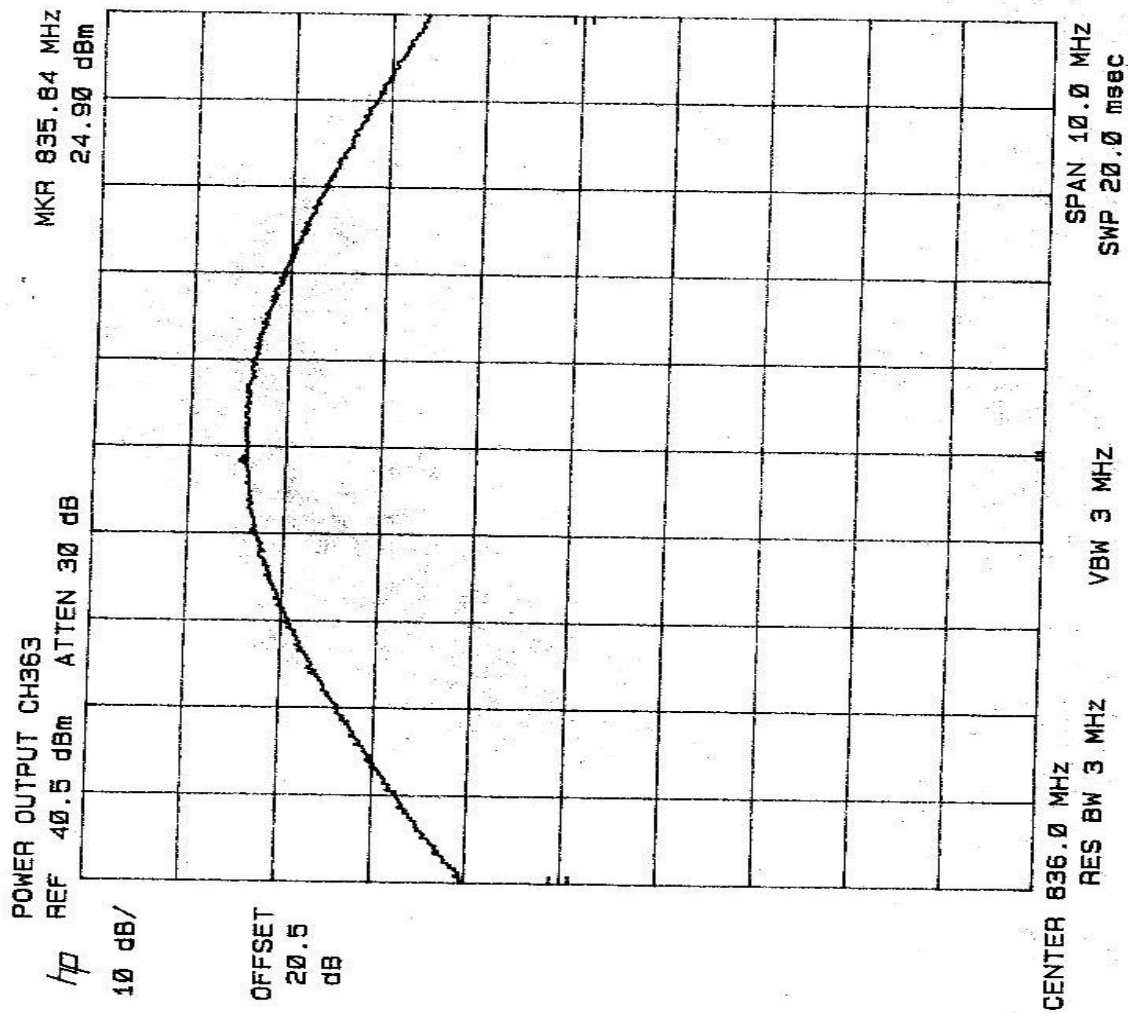

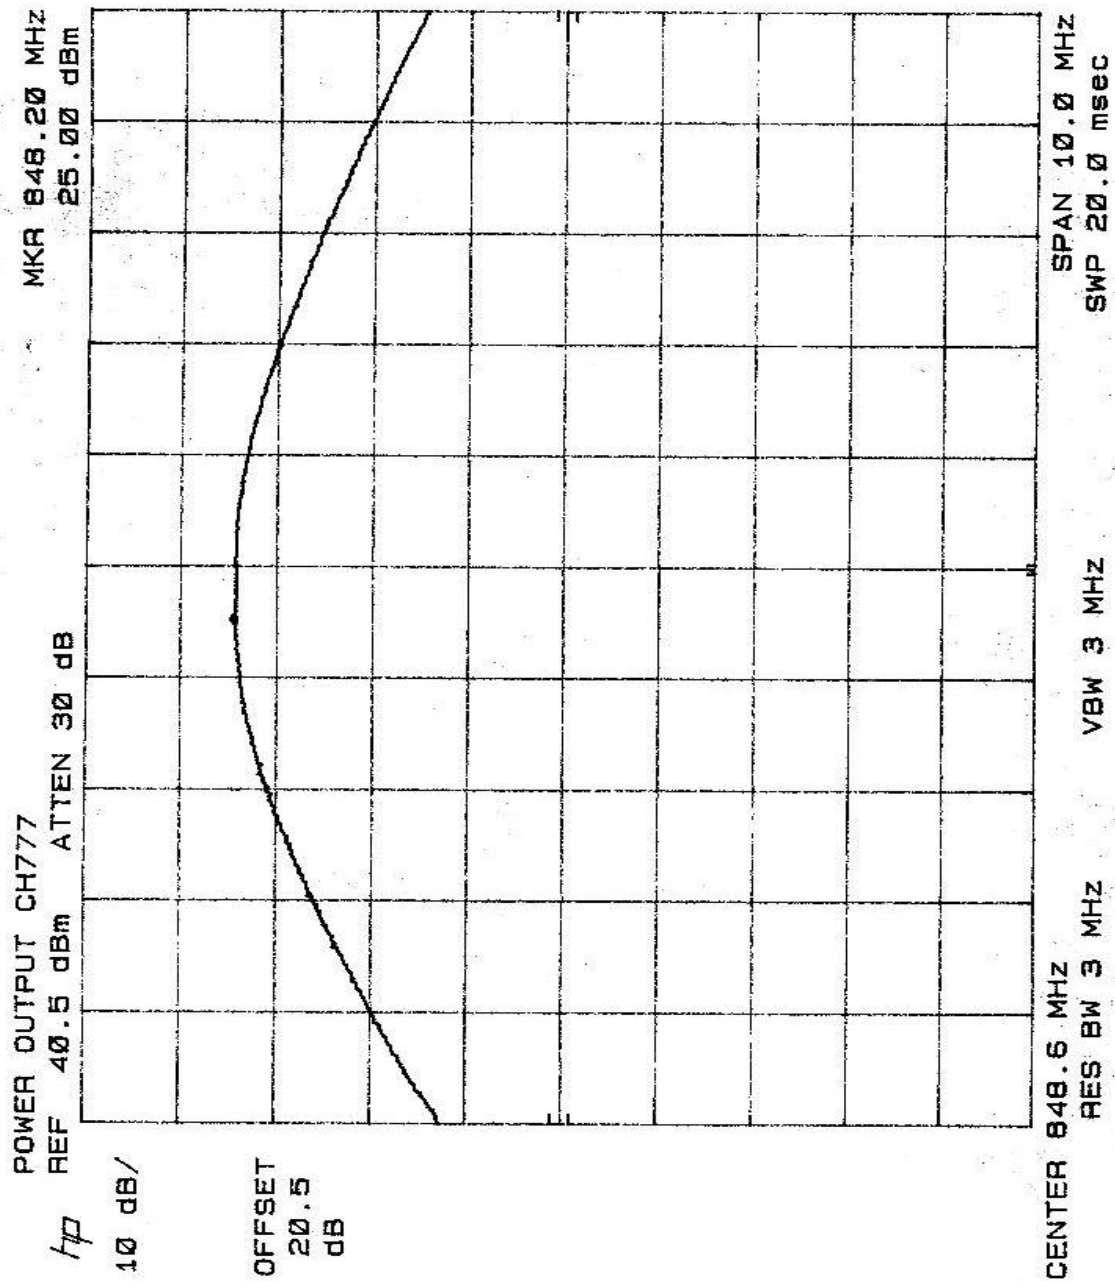

SECTION 2.1047: MODULATION CHARACTERISTICS

A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

FCC 22.915: Modulation Requirements:

Cellular systems must be capable of providing service using the types of modulation described in the cellular system compatibility specification.

For a description of the modulating system see Attachment: *Technical Description* section 2.983(d)(12) *Description of modulation system used*.

SECTION 2.1049: OCCUPIED BANDWIDTH

Section 2.1049(i); transmitters designed for other types of modulation-when modulated by an appropriate signal of sufficient amplitude to be representative of the type of service in which used.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 20 dB below the transmitter power.




Test Result:

Channel 1013: 1.403 MHz

Channel 363: 1.403 MHz

Channel 777: 1.403 MHz

Plots of the EUT's output bandwidth are shown below.

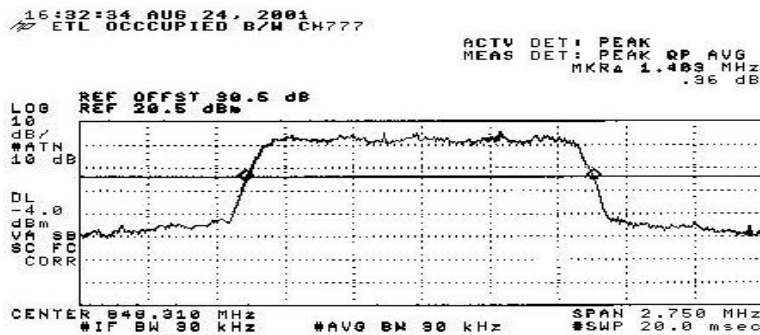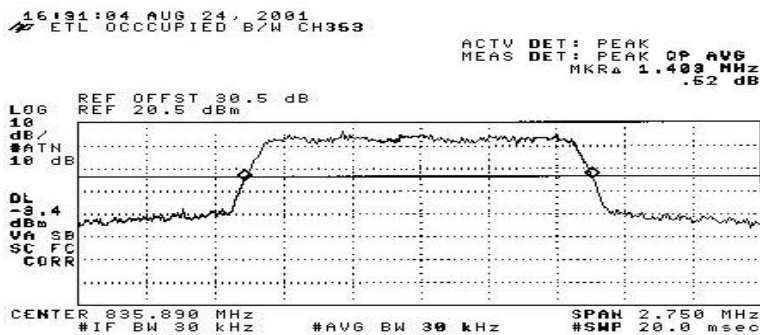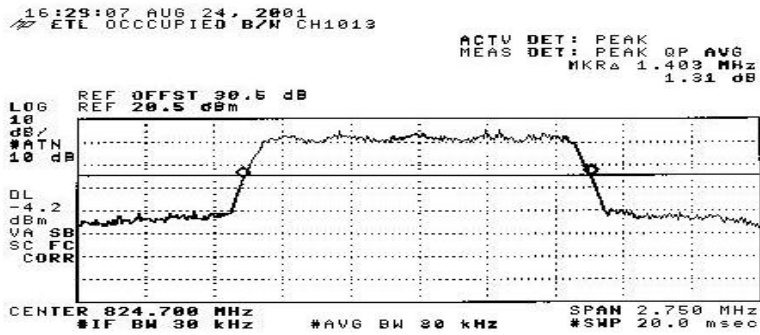

SECTION 2.1051: SPURIOUS EMISSION AT ANTENNA TERMINAL

22.917(e): The mean power of emissions must be attenuated below the mean power (P) of the unmodulated carrier by at least $43 + 10 \log (P)$ dB. Limit equivalent to -13dBm , calculation shown below.

$$43 + 10 \log (0.316\text{W}) = 38\text{dB}$$
$$25\text{dBm} - 38\text{dB} = -13\text{dBm}$$

22.917(f) Mobile emissions in the base band:

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the antenna connector.

Test Procedure:


The EUT was setup to maximum output power. A spectrum analyzer was used to scan from 30 MHz to 9GHz. A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements. The bases station frequency range was scanned while the EUT operated at its highest channel.

Test Results:

Complies. Plots are shown below.


16:45:58 AUG 24, 2001
ETL OUT OF BAND CH1019

ACTV DET: PEAK
MEAS DET: PEAK QP AVG

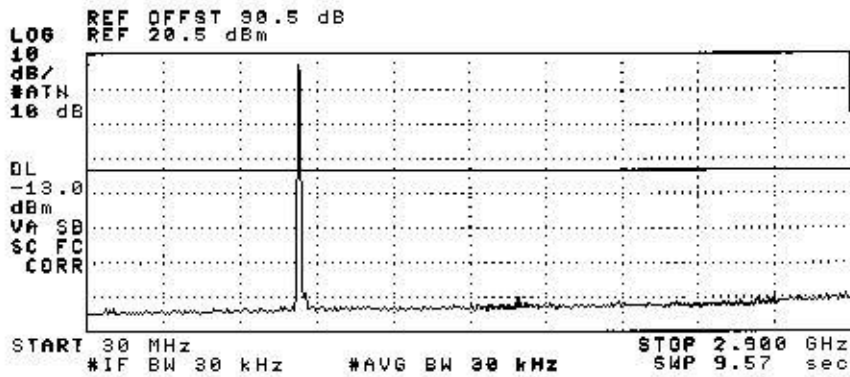


16:47:32 AUG 24, 2001
ETL OUT OF BAND CH1019

ACTV DET: PEAK
MEAS DET: PEAK QP AVG

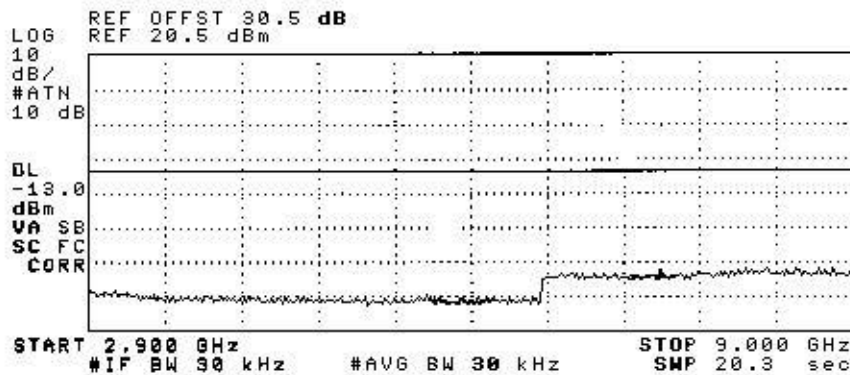


16:41:09 AUG 24, 2001
ETL OUT OF BAND CH363

ACTV DET: PEAK
MEAS DET: PEAK QP AVG

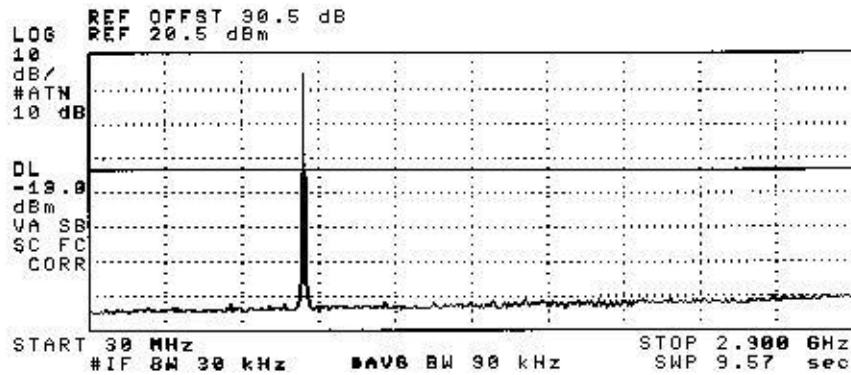


16:42:18 AUG 24, 2001
ETL OUT OF BAND CH363

ACTV DET: PEAK
MEAS DET: PEAK QP AVG

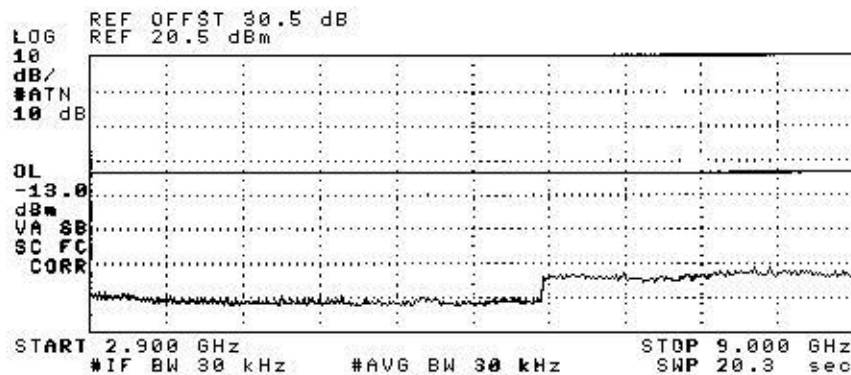


16:37:32 AUG 24, 2001
ETL OUT OF BAND CH777


ACTV DET: PEAK
MEAS DET: PEAK QP AVG

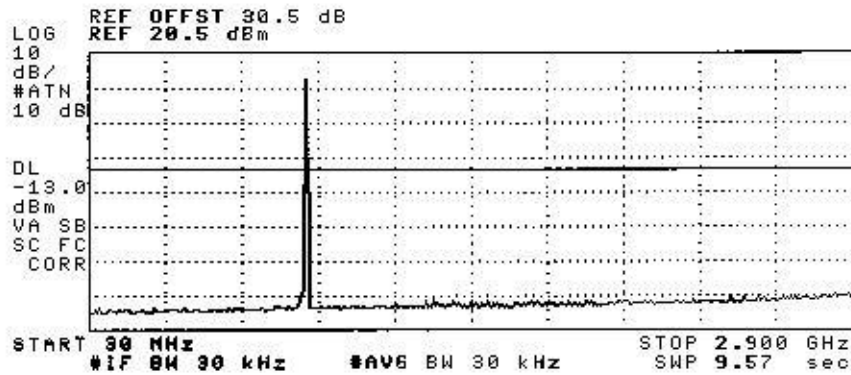

16:38:54 AUG 24, 2001
ETL OUT OF BAND CH777

ACTV DET: PEAK
MEAS DET: PEAK QP AVG

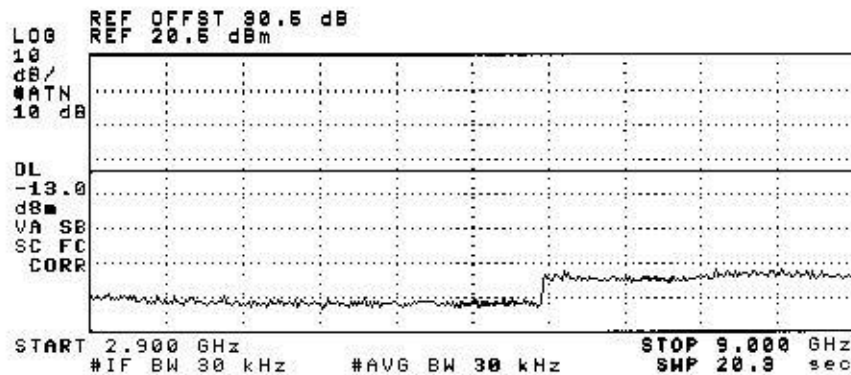

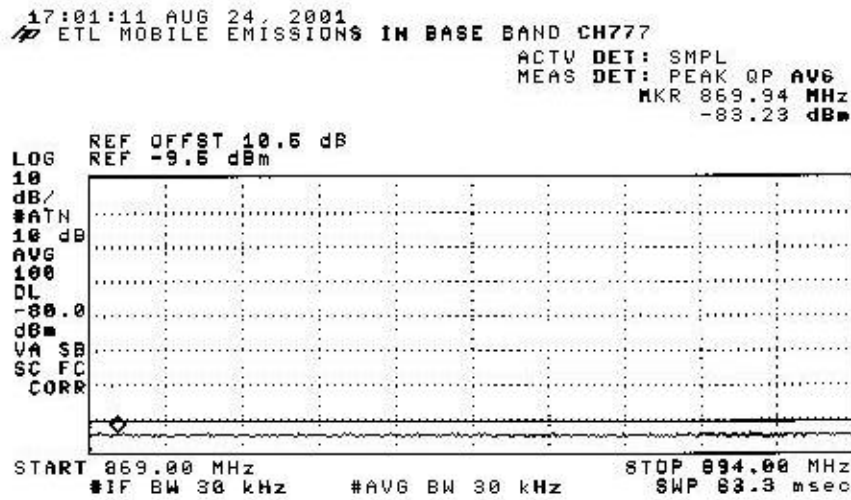


SECTION 2.1053: FIELD STRENGTH OF SPURIOUS RADIATION


SUBSTITUTION METHOD: (Radiated Emissions)

Test Set-up:

Radiated BELOW 1GHz

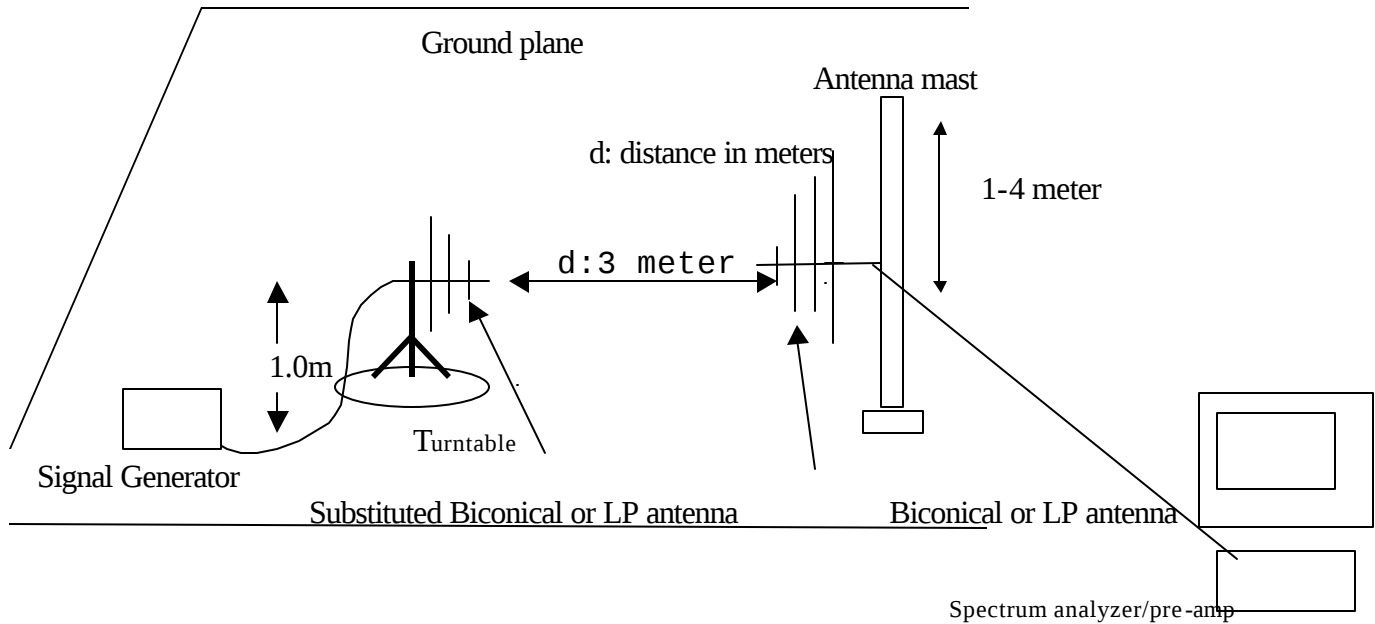

Radiated ABOVE 1 GHz

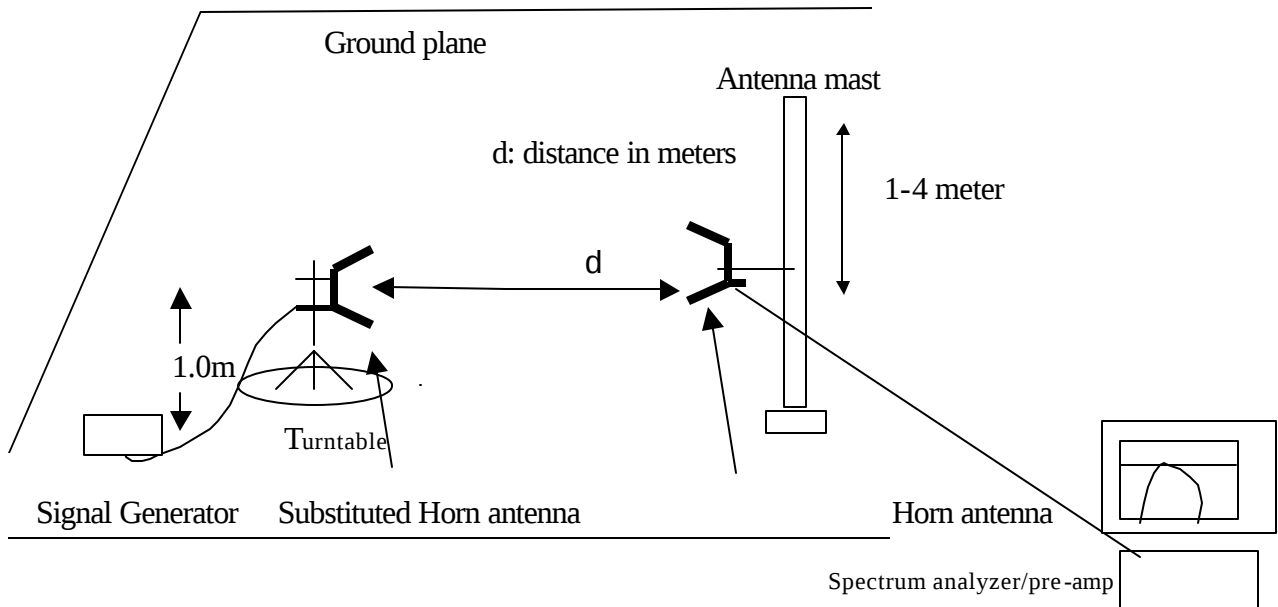

The actual signal generated by the measured equipment may be determined by means of a substitution measurement in which a known signal source replaces the device to be measured.

The substitution antenna will replace the EUT antenna in the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer.

The radiated power is equal to the power supplied by the signal generator
The formula, to calculate the true reading, is: $\text{True reading} = \text{dBm} + \text{GdBd} - \text{CL}$

dBm = signal generator output level
GdBd = the gain in dBd of the substitution antenna
CL = the cable loss

The calculated True reading is then compared to the limit and should not exceed the limit. This method must be performed for every emission measured from the EUT. This shall also be repeated for horizontal polarization.

Minimum Requirement:

The magnitude of each spurious and harmonic emissions detected as being radiated from the EUT must be at a level no more than $43 + 10 \log (\text{mean output power, watts}) \text{ dB}$ below the mean power output.

Test procedure:

EUT's antenna port was terminated with a 50-ohm load. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 1 meter from the EUT. The EUT was setup to its maximum output power at its lowest channel. All spurious emissions were measured. The measurements are repeated for the highest and a middle channel.

Test Result:

Complies. Spreadsheet shown below.

						8/22/01		
Compliance Certification Services						Pete Krebill		
Frequency	SA reading	Sig Gen	CL	Gain	Gain	ERP	Limit	Margin
MHz	dBuV	dBm	dB	dBi	dBd	dBm	dBm	dB
Channel 777								
1696	54.7	-60.3	0.3	8.7	6.5	-54.1	-13	-41.1
2544	47.3	-63	0.5	9	6.8	-56.7	-13	-43.7
Channel 363								
1671	52.7	-60.8	0.3	8.7	6.5	-54.6	-13	-41.6
2508	48.9	-61.4	0.5	9	6.8	-55.1	-13	-42.1
Channel 1013								
1649	54.2	-57.9	0.3	8.7	6.5	-51.7	-13	-38.7
2474	51	-61.1	0.5	9	6.8	-54.8	-13	-41.8
Noise floor readings below:								
3344	27.26	-90	1.4	8	5.8	-85.6	-13	-72.6
4180	25.52	-90	1.75	10.1	7.9	-83.85	-13	-70.85
5016	22.76	-90	2.22	9.9	7.7	-84.52	-13	-71.52
5852	24.84	-90	2.25	10.1	7.9	-84.35	-13	-71.35
6688	27.24	-90	2.45	11	8.8	-83.65	-13	-70.65
7524	28.67	-77.2	3.1	10.9	8.7	-71.6	-13	-58.6
8360	29.11	-75.2	4	11.1	8.9	-70.3	-13	-57.3

SECTION 2.1055: FREQUENCY STABILITY

SECTION 22.355: FREQUENCY STABILITY

Minimum standard:

The carrier frequency shall be maintained within a tolerance of 2.5ppm.
2.5ppm of 824MHz = 2.06KHz.

Test Procedure frequency/temperature:

The EUT was setup in a temperature chamber. The EUT was setup to its maximum output power at its middle channel. The temperature was varied in 10 degree steps from -30° C to +50° C. Enough time was allowed for the EUT's temperature to stabilize at each temperature. A spectrum analyzer was used to measure the frequency tolerance.

Test Procedure frequency/voltage AC:

Frequency tolerance was measured with the AC voltage to the EUT's SMPS adjusted to 85% and 115% of nominal.

Test Results:

Complies: See spreadsheet below.

Temperature	Delta from assigned frequency
-30°C	0.450 KHz
-20°C	0.450 KHz
-10°C	0.450 KHz
0°C	1.000 KHz
10°C	0.850 KHz
20°C	0.000 KHz
30°C	0.000 KHz
40°C	1.100 KHz
50°C	0.250 KHz
Voltage	
93.5VAC	1.300 KHz
138VAC	1.450 KHz

SETUP PHOTOS



ANTENNA CONDUCTED & FREQUENCY STABILITY



ERP RADIATED



ANTENNA CONDUCTED & FREQUENCY STABILITY



SPURIOUS RADIATED



SUBSTITUTION