



TEST REPORT

APPLICANT : Savant Technologies LLC dba GE
Lighting, a Savant company

PRODUCT NAME : LED LAMP

MODEL NAME : CLEDA199LD1@

BRAND NAME : GE

FCC ID : PUU-A19-DMSWIV

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2021-04-25

TEST DATE : 2021-04-25 to 2021-04-26

ISSUE DATE : 2021-05-19

Edited by : Qijie Xiao
Qijie Xiao

Approved by: Stefan Sun
Stefan Sun

NOTE: This report is issued by Morlab and may not be copied without written permission from Morlab. The test results in this report are only applicable to specific samples and specific tests. The information in this report can be verified and confirmed on our website.



DIRECTORY

1. Technical Information.....	3
1.1. Applicant and Manufacturer Information.....	3
1.2. Equipment Under Test (EUT) Description.....	3
1.3. Test Standards and Results.....	4
1.4. Environmental Conditions.....	4
2. 47 CFR Part 15C Requirements.....	5
2.1. Antenna requirement.....	5
2.2. Peak Output Power.....	6
2.3. 6dB Bandwidth.....	9
2.4. Conducted Spurious Emissions and Band Edge.....	12
2.5. Power spectral density (PSD).....	18
2.6. Restricted Frequency Bands.....	21
2.7. Conducted Emission.....	28
2.8. Radiated Emission.....	32
Annex A Test Uncertainty.....	48
Annex B Testing Laboratory Information.....	49

Change History		
Version	Date	Reason for change
1.0	2021-05-19	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Savant Technologies LLC dba GE Lighting, a Savant company
Applicant Address:	1975 Noble Road Cleveland Ohio United States 44112
Manufacturer:	Xiamen Topstar lighting Co.,Ltd.
Manufacturer Address:	676 Meixi Avenue,Tong'an District,Xiamen,China

1.2. Equipment Under Test (EUT) Description

Product Name:	LED LAMP
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	C-8235 V2.3
Software Version:	C_Life_Blub_Single_Chip_Full_V1.0.135
Modulation Type:	GFSK
Operating Frequency Range:	2402MHz - 2480MHz
Bluetooth Version:	Bluetooth 5.1 LE
Bluetooth Specification:	Bluetooth 5.1 LE 1M PHY
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi

Note 1: The EUT contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies is $F(\text{MHz})=2402+2*n$ ($0 \leq n \leq 39$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 19 (2440MHz) and 39 (2480MHz).

Note 2: Bluetooth 5.1 LE support 1M PHY.

Note 3: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT continuous transmission.

Note 4: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	<u>PASS</u>
2	15.247(b)	Peak Output Power	Apr 26, 2021	Stefan Sun	<u>PASS</u>
3	15.247(a)	Bandwidth	Apr 26, 2021	Stefan Sun	<u>PASS</u>
4	15.247(d)	Conducted Spurious Emission and Band Edge	Apr 26, 2021	Stefan Sun	<u>PASS</u>
5	15.247(e)	Power spectral density (PSD)	Apr 26, 2021	Stefan Sun	<u>PASS</u>
6	15.247(d)	Restricted Frequency Bands	Apr 25, 2021	Qijie Xiao	<u>PASS</u>
7	15.207	Conducted Emission	Apr 25, 2021	Qijie Xiao	<u>PASS</u>
8	15.209, 15.247(d)	Radiated Emission	Apr 25, 2021	Qijie Xiao	<u>PASS</u>

Note: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and 558074 D01 15.247 Meas Guidance v05r02.

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Peak Output Power

2.2.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2. Test Description

The measure output power was calculated by the reading of the spectrum

A. Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please refer ANNEX B(4).

2.2.3. Test procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the RBW to 3MHz
- c) Set VBW to 8MHz
- d) Set span to 6MHz
- e) Sweep time to auto couple.
- f) Detector=peak.
- g) Trace mode=max hold.
- h) Allow trace to fully stabilize.



- i) Use peak marker function to determine the peak amplitude level.


2.2.4. Test Result

The lowest, middle and highest chnnels are selected to perform testing to verify the conducted RF output peak power of the Module.


A. Test Verdict:

Mode	Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
			dBm	W	dBm	W	
1M PHY	0	2402	7.814	0.006	30	1	PASS
	19	2440	9.723	0.009	30	1	PASS
	39	2480	9.146	0.008	30	1	PASS


B. Test Plots:

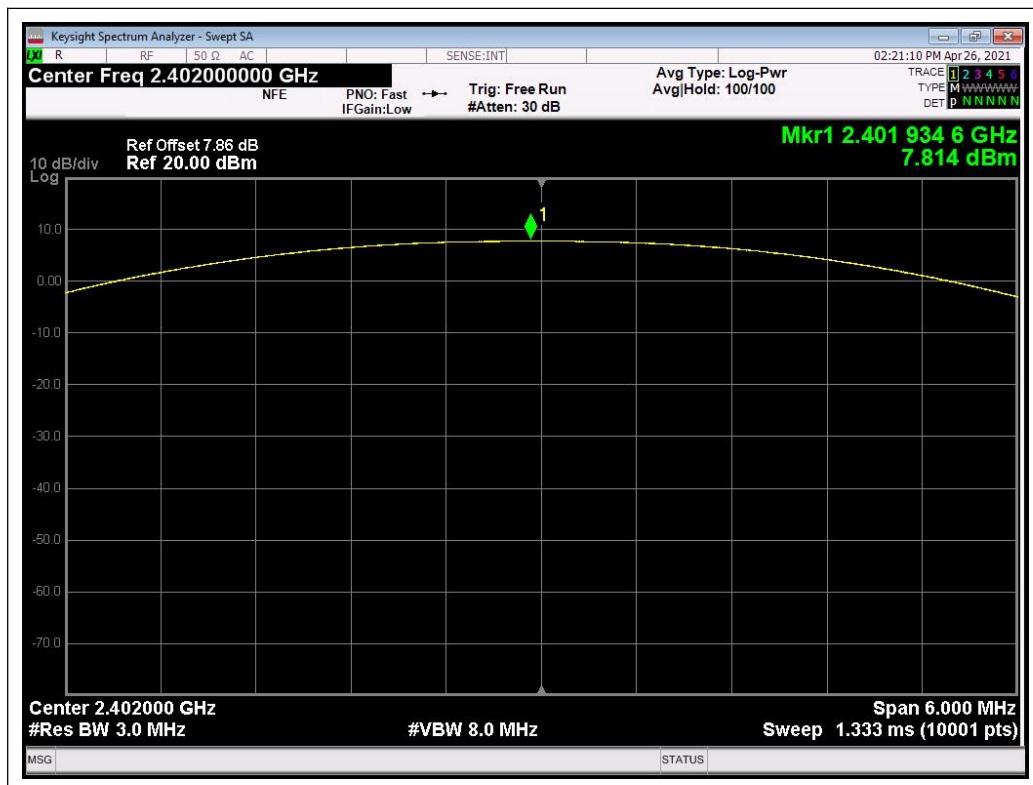

(Bluetooth 5.1 LE 1M PHY Channel 0, 2402MHz)

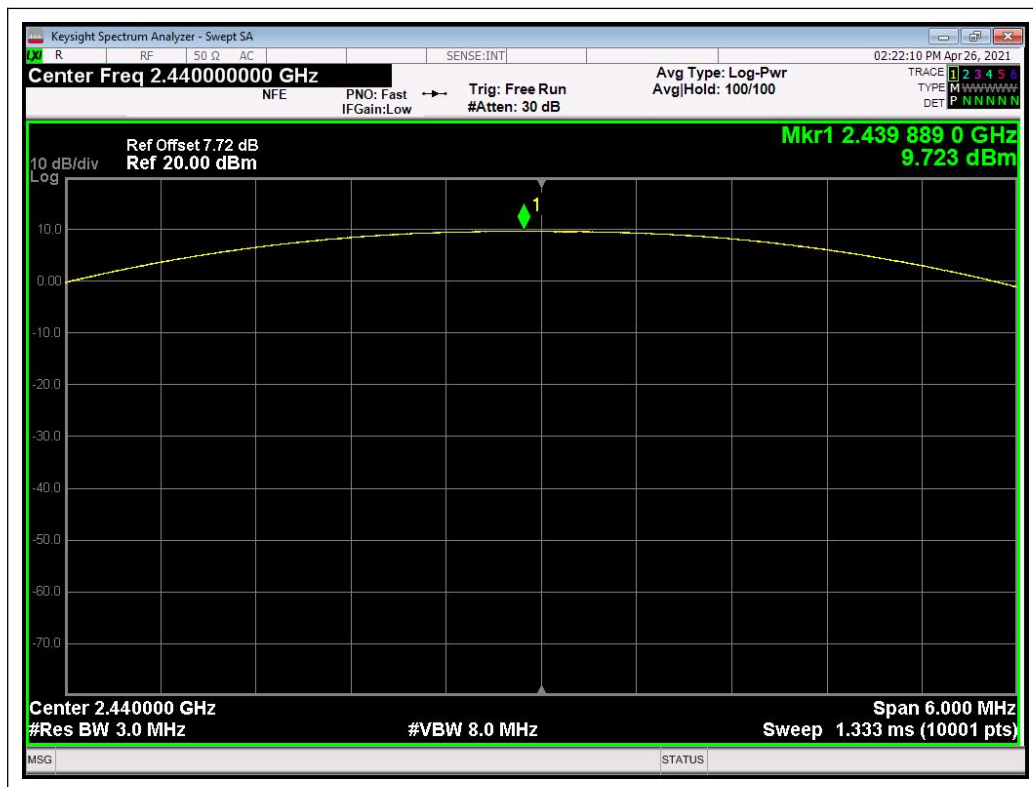

(Bluetooth 5.1 LE 1M PHY Channel 19, 2440MHz)

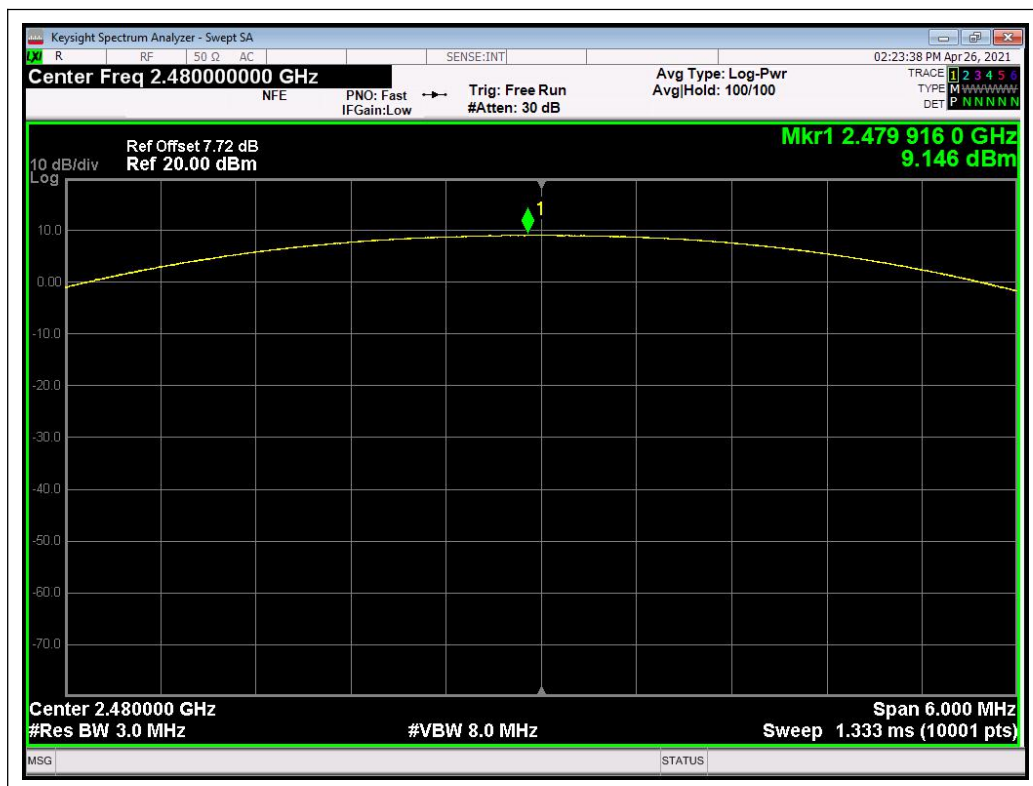

(Bluetooth 5.1 LE 1M PHY Channel 39, 2480MHz)

2.3.6dB Bandwidth

2.3.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2. Test Description

A. Test Set:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please refer ANNEX B(4).

2.3.3. Test procedure

The steps for the first option are as follows:

- (1) Set analyzer center frequency to channel center frequency.
 - a) Set RBW=100kHz
 - b) Set the VBW=300 kHz
 - c) Detector=peak
 - d) Trace mode=max hold.
 - e) Sweep = auto couple
 - f) Allow trace to fully stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

- (2) The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1(i.e. RBW=100 kHz, VBW $\geq 3 \times$ RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.


2.3.4. Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the module.


A. Test Verdict:

Mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1M PHY	0	2402	0.629	≥ 500	PASS
	19	2440	0.619	≥ 500	PASS
	39	2480	0.627	≥ 500	PASS

B. Test Plots

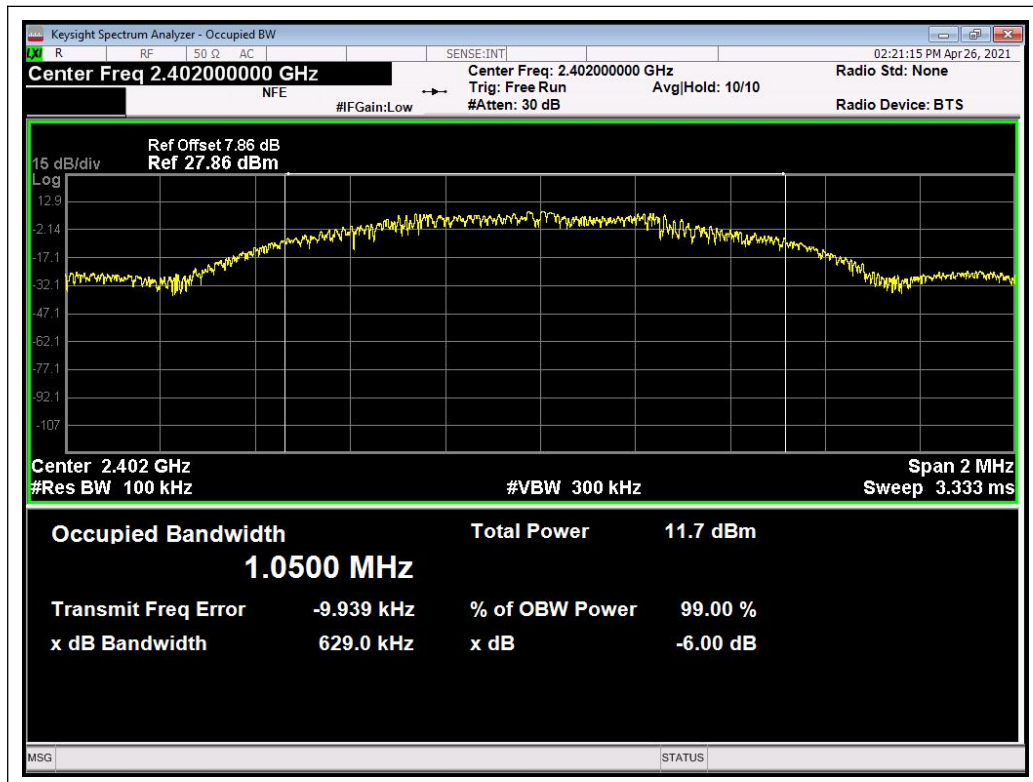

(Bluetooth 5.1 LE 1M PHY Channel 0: 2402MHz)

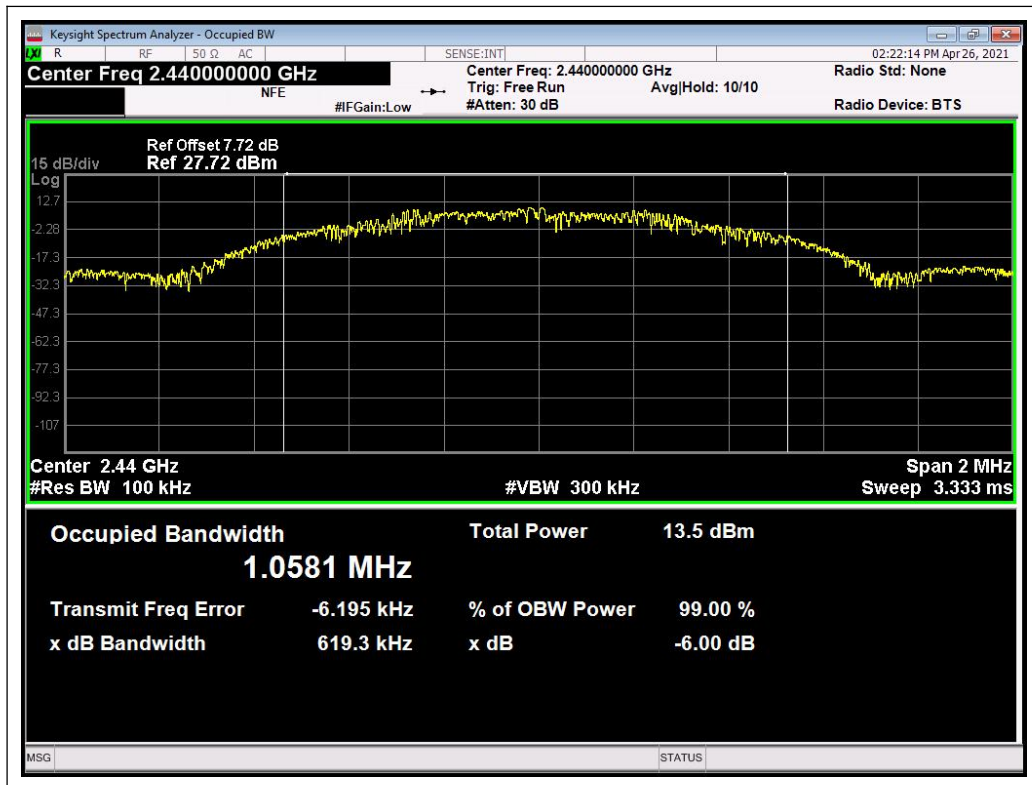

(Bluetooth 5.1 LE 1M PHY Channel 19: 2440 MHz)



(Bluetooth 5.1 LE 1M PHY Channel 39: 2480MHz)


2.4. Conducted Spurious Emissions and Band Edge

2.4.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2. Test Description

A. Test Set:

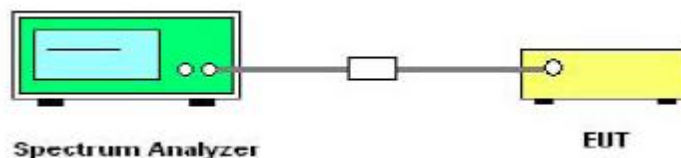

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please refer ANNEX B (4).

2.4.3. Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

2.4.4. Test Result


The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

A. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.



(LE 1M PHY _ Conducted Spurious Emissions _ Channel = 0, 30MHz to 25GHz)

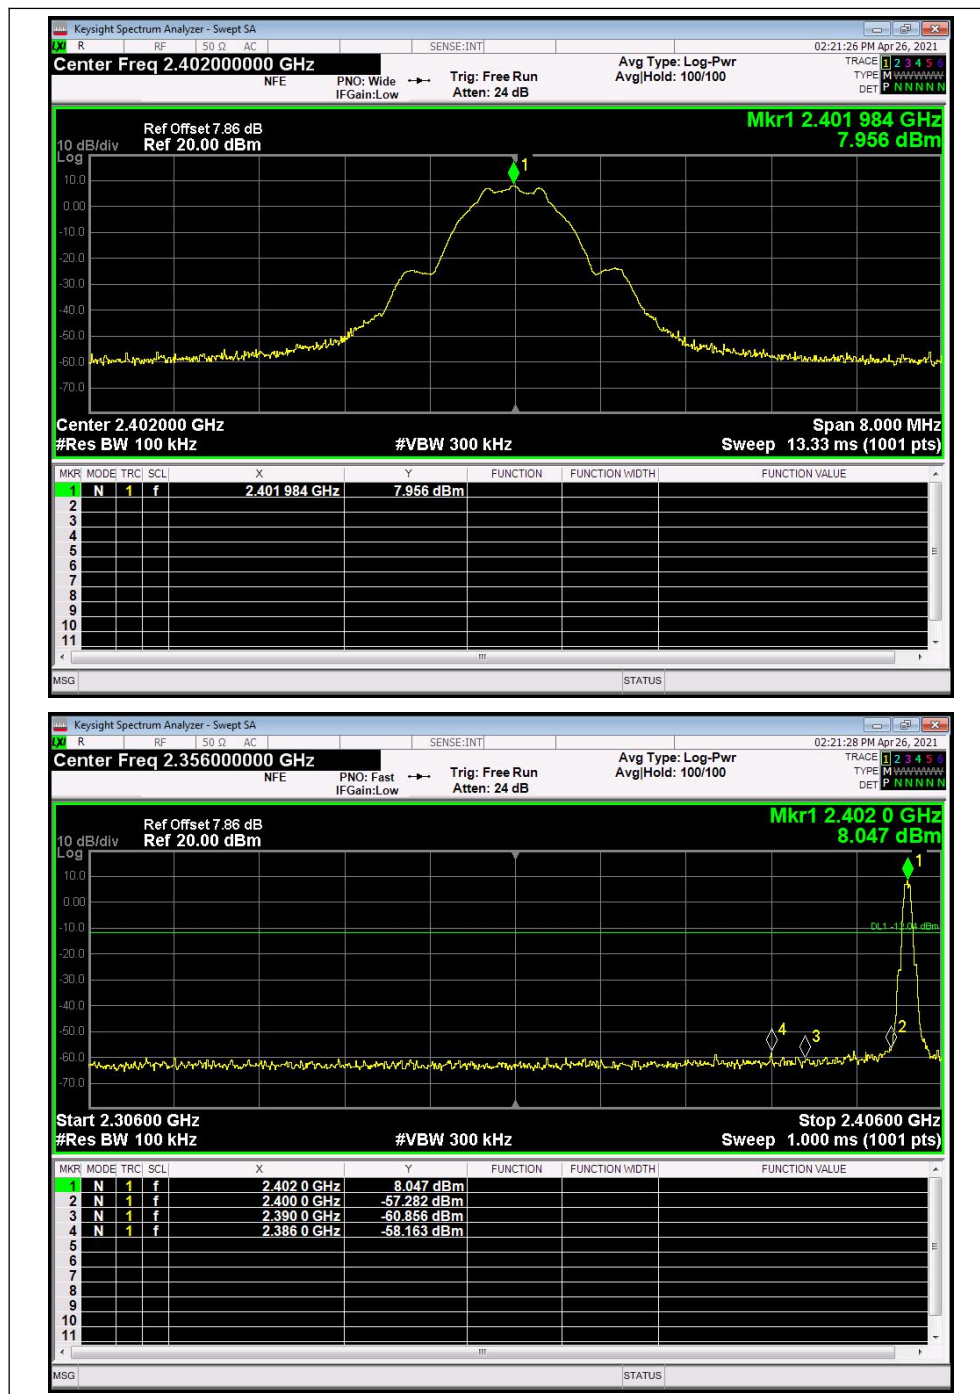


(LE 1M PHY _ Bandedge, Channel = 0)

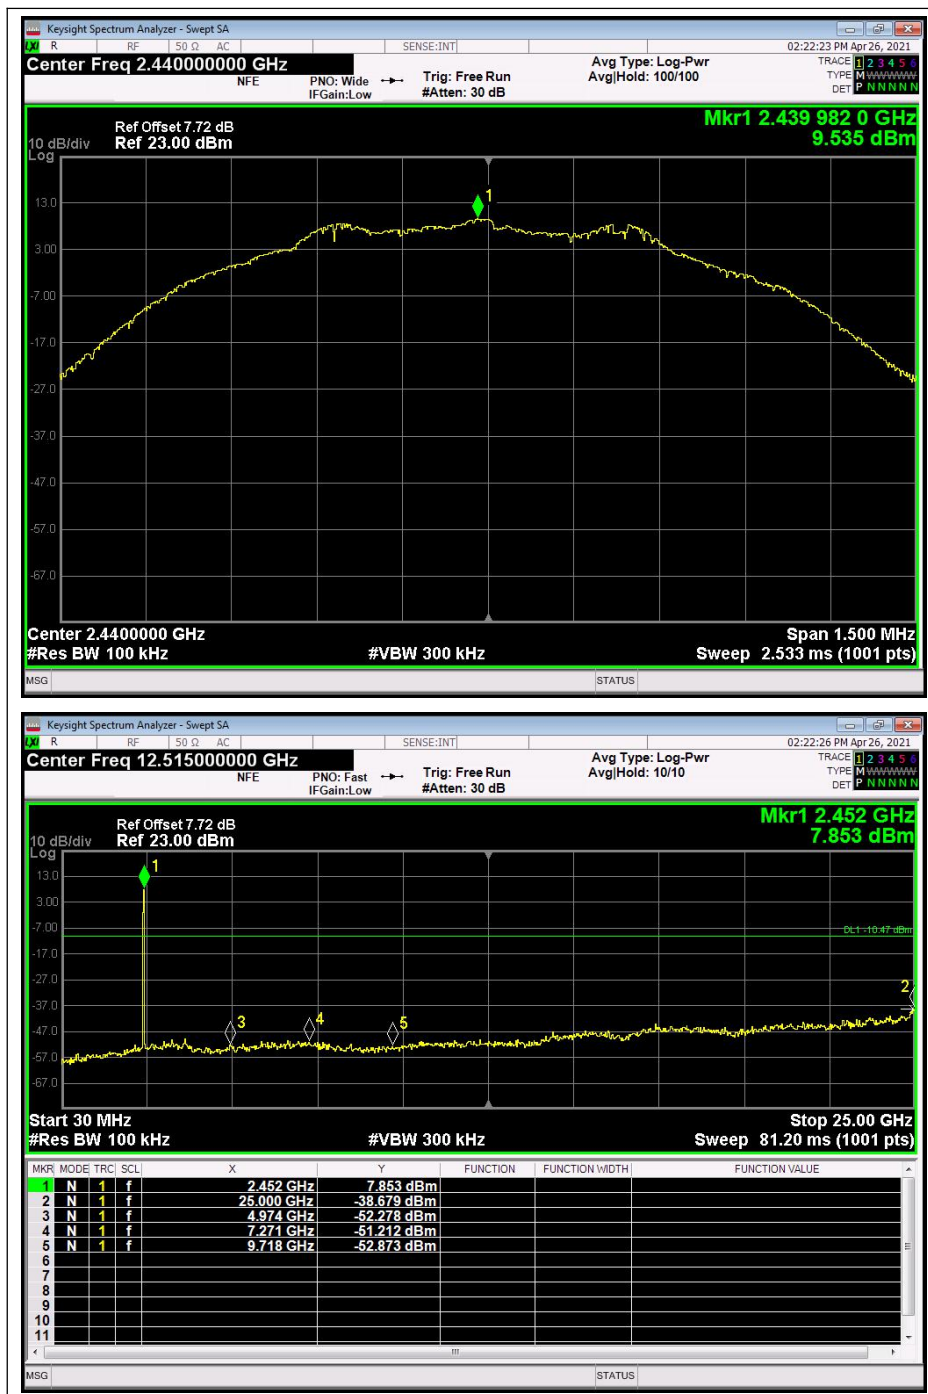

(LE 1M PHY _ Conducted Spurious Emissions _ Channel = 19, 30MHz to 25GHz)



(LE 1M PHY _ Conducted Spurious Emissions _ Channel = 39, 30MHz to 25GHz)

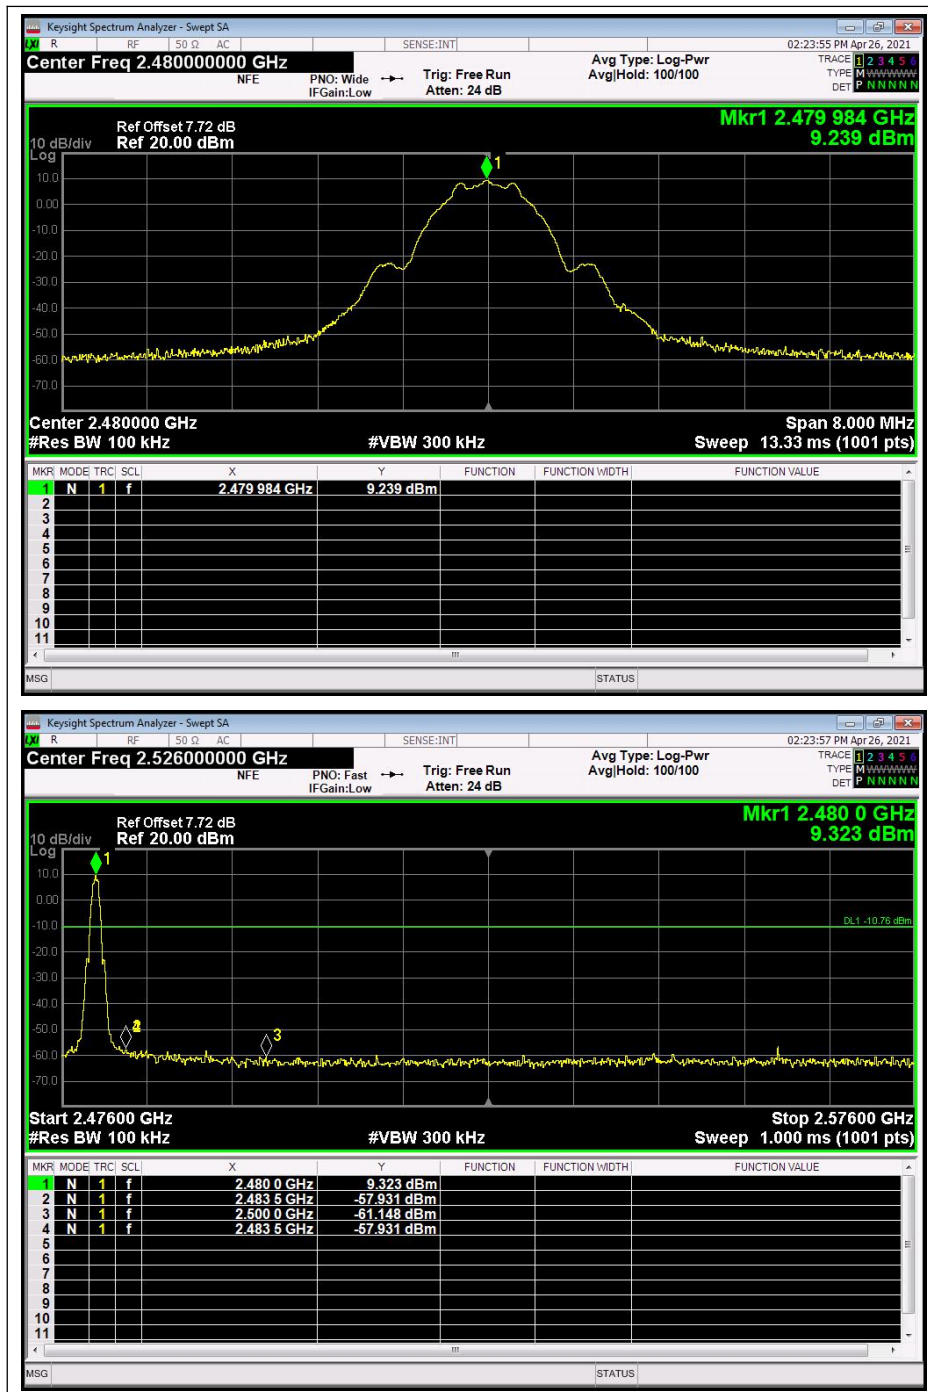

(LE 1M PHY _ Bandedge, Channel = 39)

2.5. Power spectral density (PSD)

2.5.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.5.2. Test Description

A. Test Set:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please refer ANNEX B (4).

2.5.3. Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the span to 1.5 times DTS
- c) Set the RBW to 3 kHz
- d) Set VBW to 10 kHz
- e) Sweep time to auto couple.
- f) Detector = peak.
- g) Trace mode=max hold.
- h) Allow trace to fully stabilize.
- i) Use peak marker function to determine the maximum amplitude within the RBW.


2.5.4. Test Result

The lowest, middle and highest channels are tested.


A. Test Verdict:

Mode	Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1M PHY	0	2402	-7.327	8	PASS
	19	2440	-6.086	8	PASS
	39	2480	-6.811	8	PASS


B. Test Plots

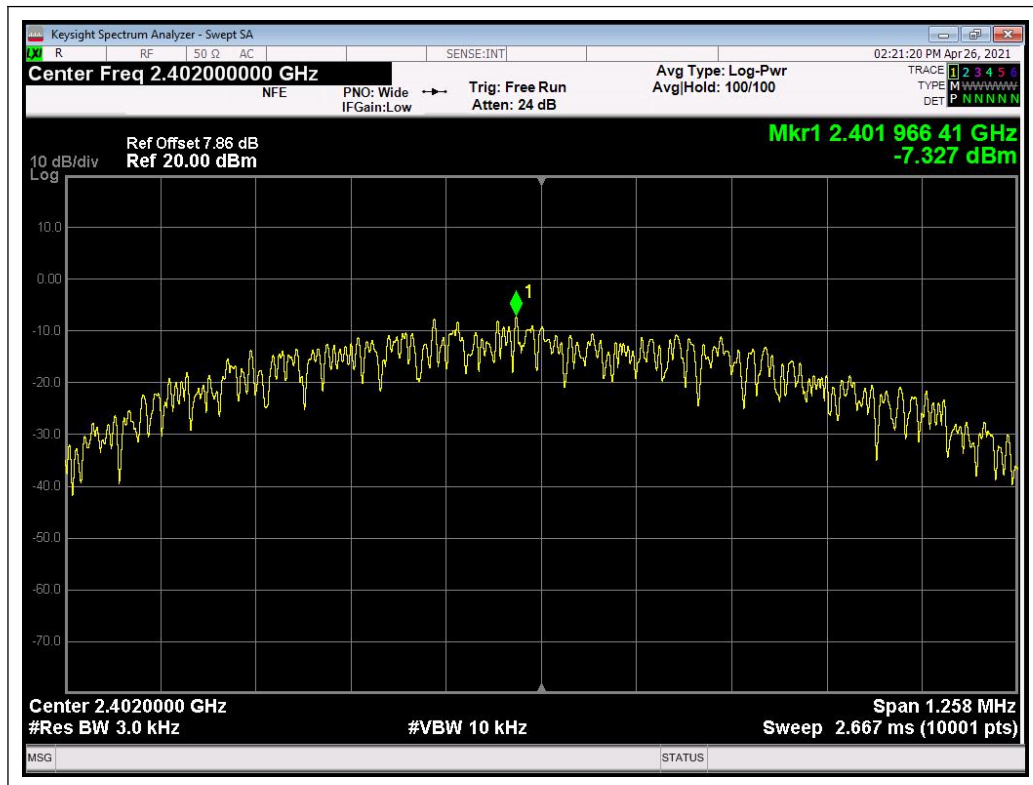

(LE 1M PHY _ Channel = 0, 2402MHz)

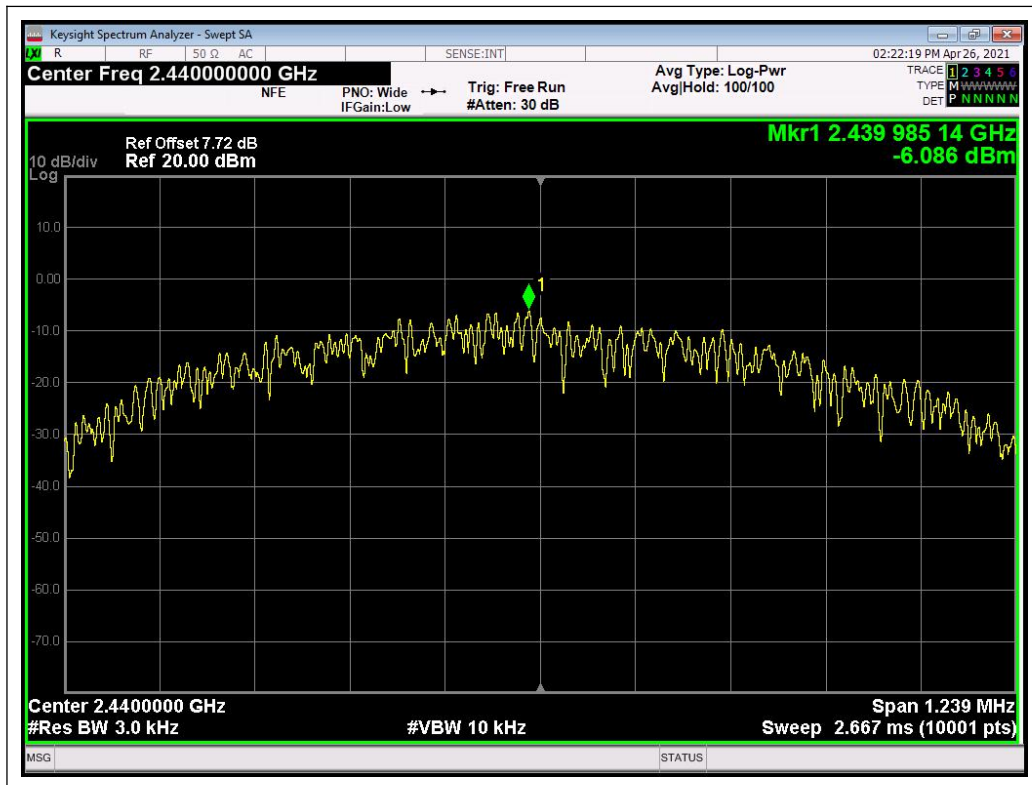

(LE 1M PHY_ Channel = 19, 2440MHz)

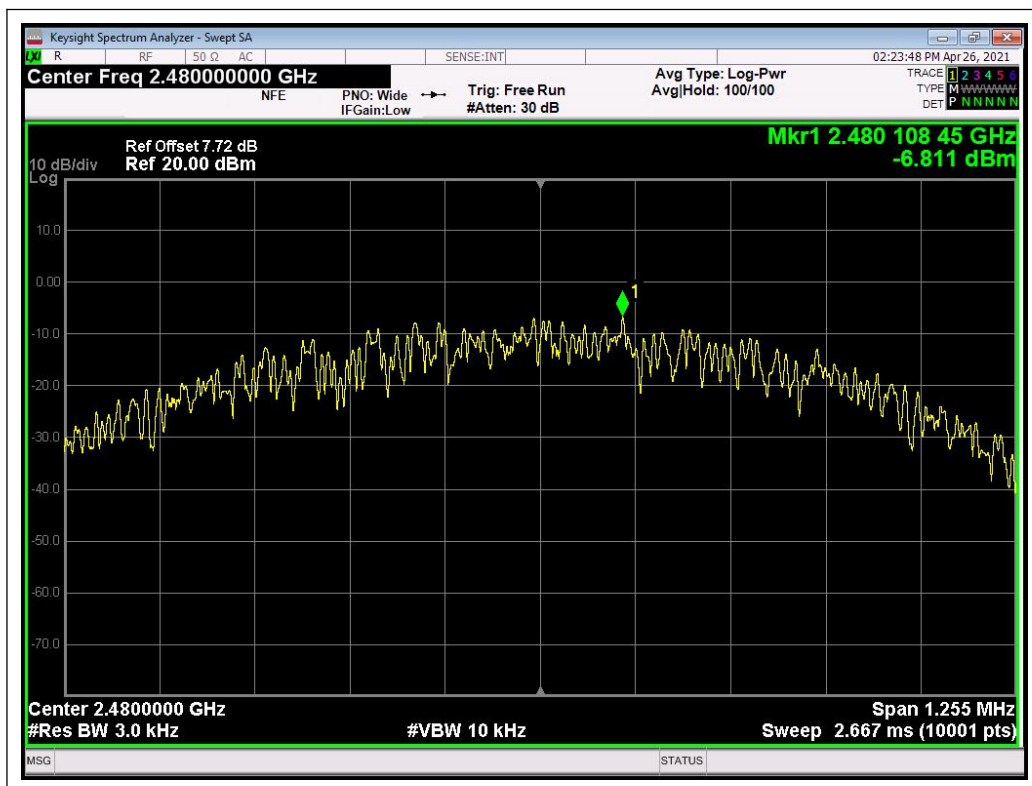

(LE 1M PHY_ Channel = 39, 2480MHz)


2.6. Restricted Frequency Bands

2.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.6.2. Test Description

A. Test Setup

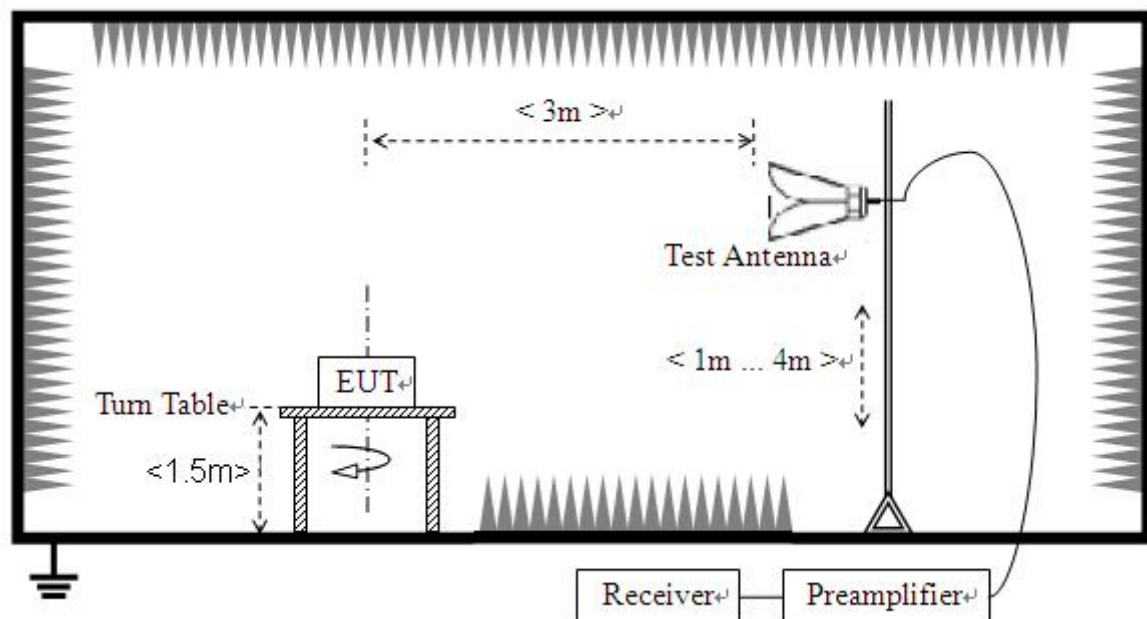

- The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.



- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasipeak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
- 4. All modes of operation were investigated and the worst-case emissions are reported.

B. Equipments List:

Please refer ANNEX B(4).



2.6.3. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna


U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m




Test Plots:

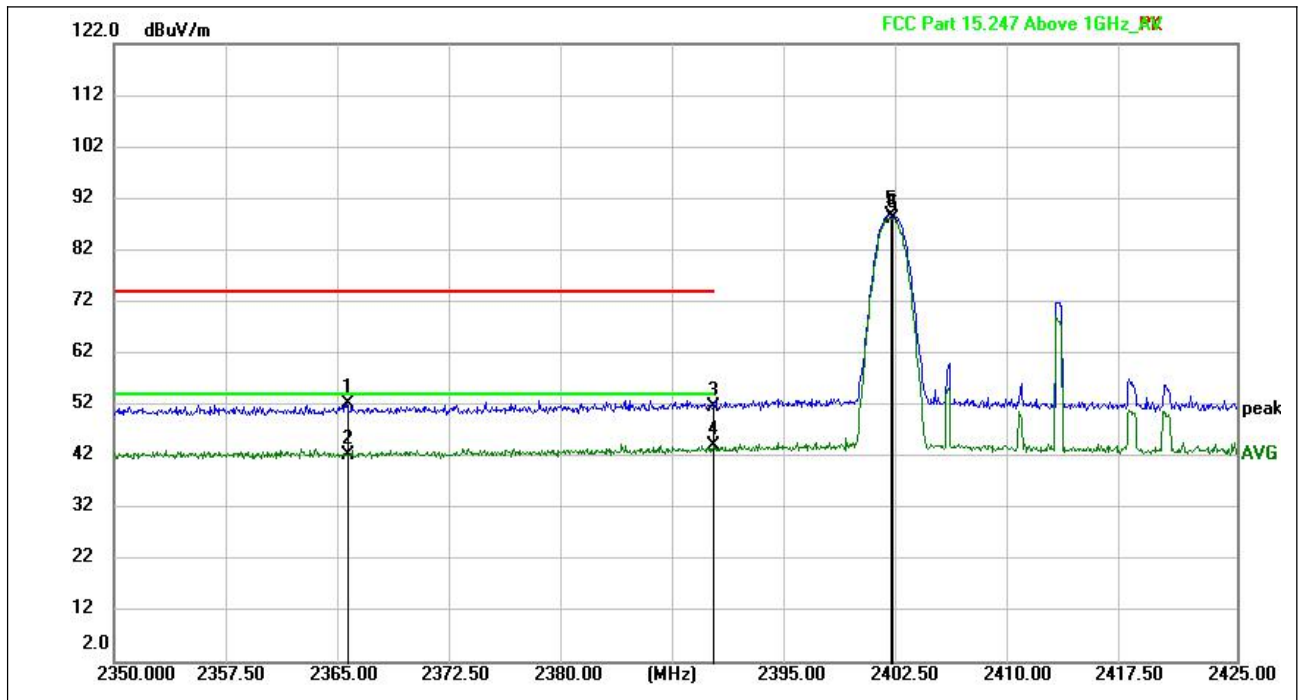


(LE 1M PHY_2402MHz, Antenna Horizontal)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
2365.645	12.17	40.10	52.27	74.00	-21.73	peak	PASS
2365.675	2.01	40.10	42.11	54.00	-11.89	AVG	PASS
2390.000	10.75	40.96	51.71	74.00	-22.29	peak	PASS
2390.000	3.02	40.96	43.98	54.00	-10.02	AVG	PASS
2401.885	47.07	41.61	88.68	---	---	peak	PASS
2401.911	46.59	41.61	88.20	---	---	AVG	PASS

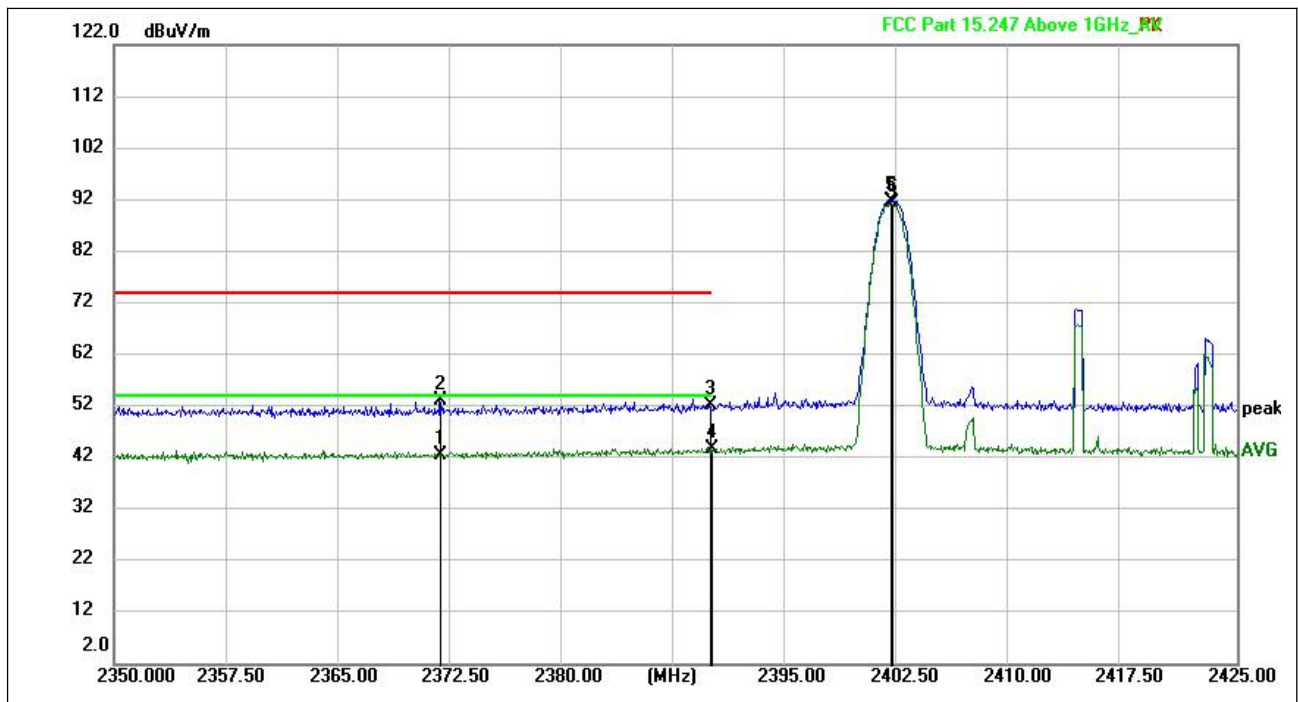


(LE 1M PHY_2402MHz, Antenna Vertical)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
2371.776	2.39	40.16	42.55	54.00	-11.45	AVG	PASS
2371.821	12.98	40.16	53.14	74.00	-20.86	peak	PASS
2389.840	11.25	40.95	52.20	74.00	-21.80	peak	PASS
2389.934	2.84	40.96	43.80	54.00	-10.20	AVG	PASS
2401.851	50.08	41.61	91.69	---	---	peak	PASS
2401.990	49.83	41.61	91.44	---	---	AVG	PASS

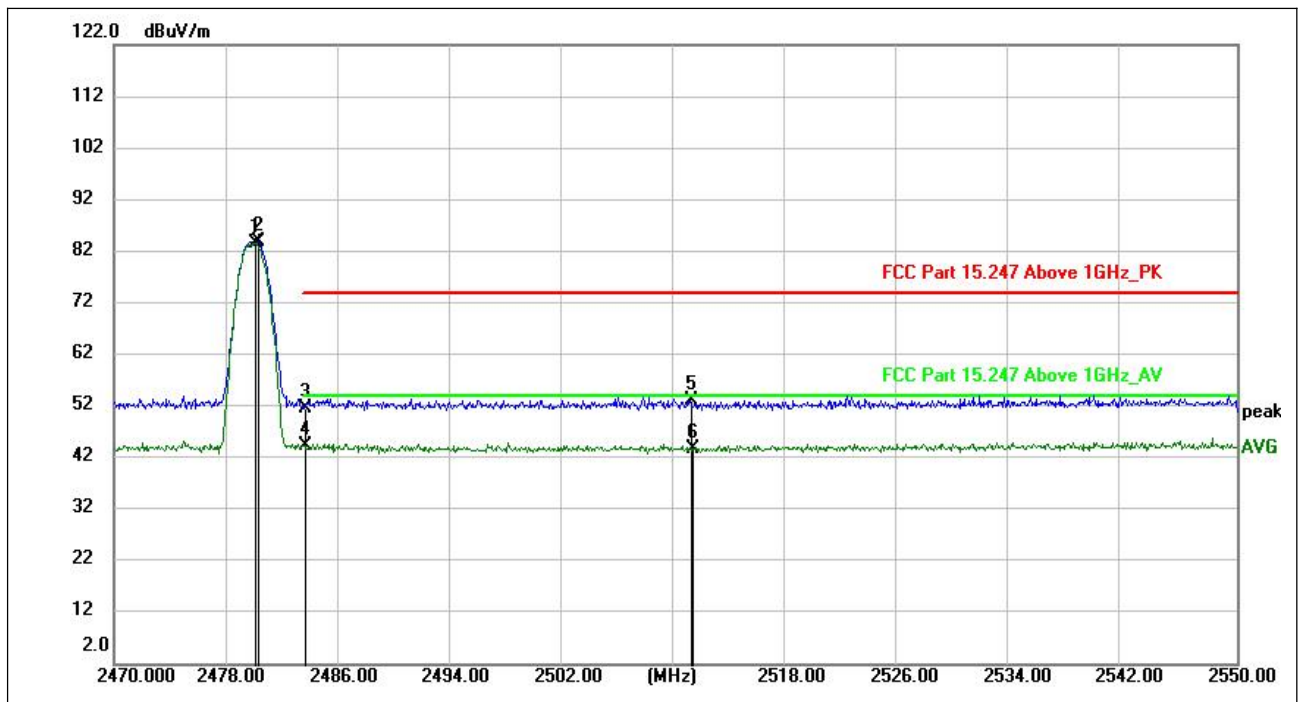

(LE 1M PHY_2480MHz, Antenna Horizontal)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
2480.072	52.39	31.14	83.53	---	---	AVG	PASS
2480.316	52.66	31.14	83.80	---	---	peak	PASS
2483.636	20.56	31.17	51.73	74.00	-22.27	peak	PASS
2483.672	13.14	31.17	44.31	54.00	-9.69	AVG	PASS
2511.052	21.82	31.31	53.13	74.00	-20.87	peak	PASS
2511.252	12.41	31.31	43.72	54.00	-10.28	AVG	PASS

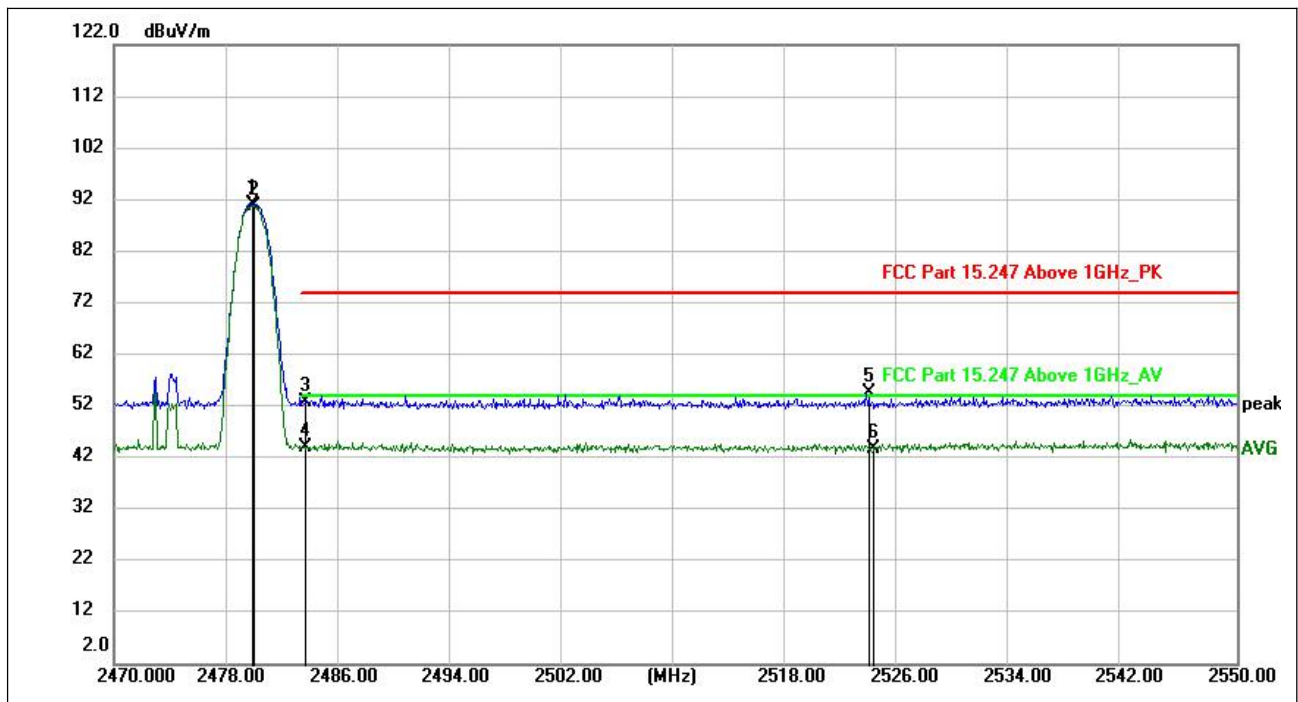

(LE 1M PHY_2480MHz, Antenna Vertical)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
2479.764	49.33	41.77	91.10	---	---	peak	PASS
2479.944	49.04	41.77	90.81	---	---	AVG	PASS
2483.660	11.15	41.76	52.91	74.00	-21.09	peak	PASS
2483.660	2.38	41.76	44.14	54.00	-9.86	AVG	PASS
2523.688	12.91	41.58	54.49	74.00	-19.51	peak	PASS
2524.008	2.10	41.60	43.70	54.00	-10.30	AVG	PASS

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency (MHz)	range	Conducted Limit (dB μ V)	
		Quai-peak	Average
0.15 - 0.50		66 to 56	56 to 46
0.50 - 5		56	46
5 - 30		60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

A. Test Setup:

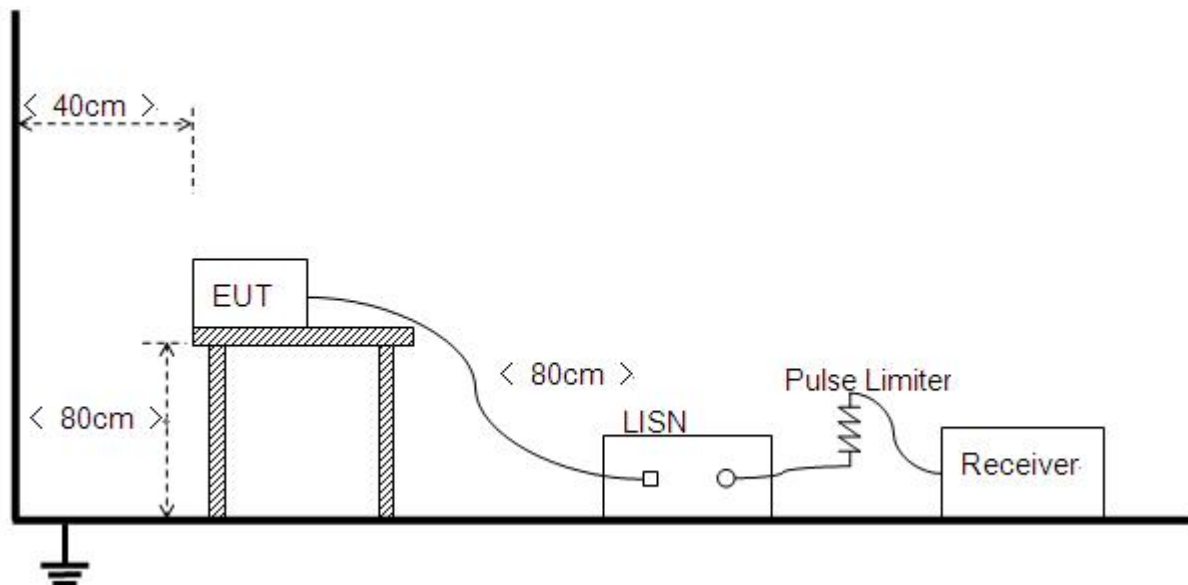

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



B. Equipments List:

Please refer ANNEX B(4).

2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test setup:

The EUT configuration of the emission tests is Charging +BLE Link.

Note: The test voltage is AC 120V/60Hz.


B. Test Plots:

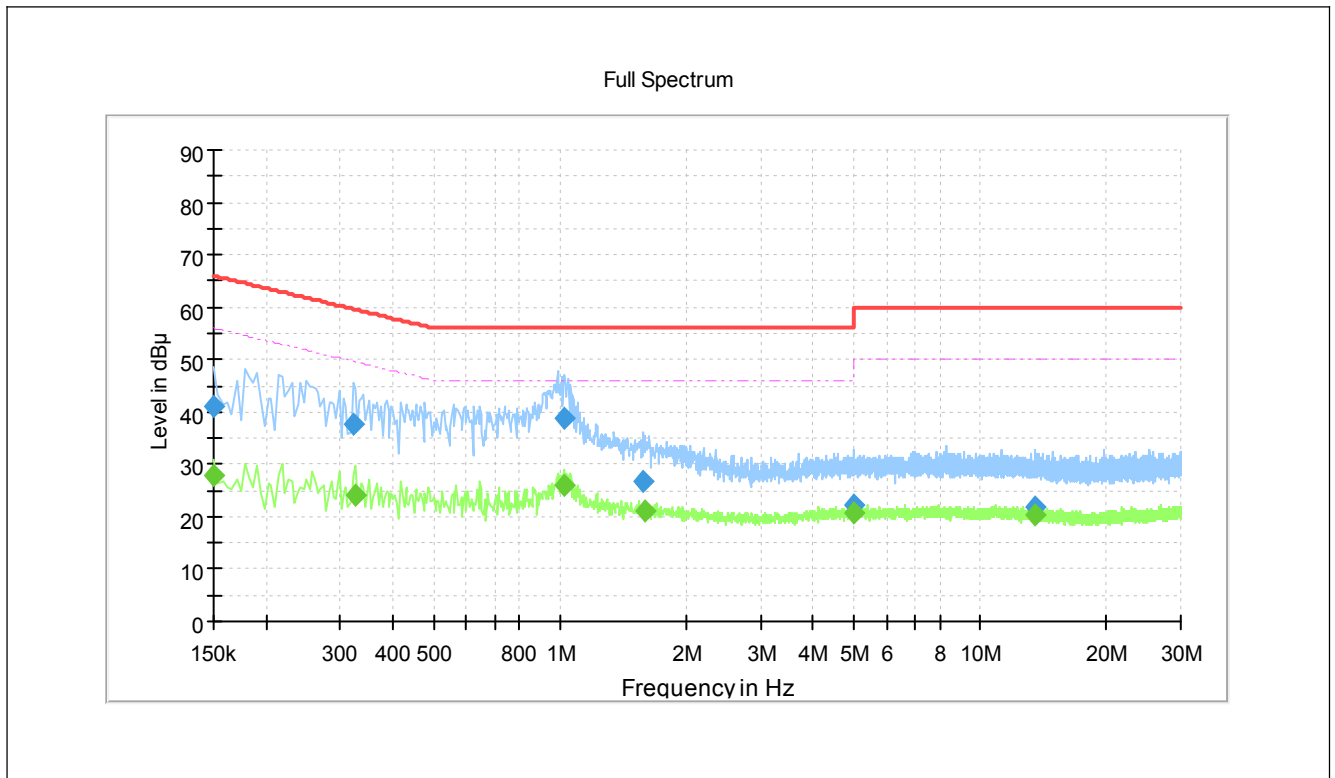

(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)	Verdict
0.150000	---	27.90	56.00	28.10	L	10.2	PASS
0.150000	41.18	---	66.00	24.82	L	10.2	PASS
0.322000	37.56	---	59.66	22.09	L	10.2	PASS
0.326000	---	24.14	49.55	25.41	L	10.2	PASS
1.022000	---	26.16	46.00	19.84	L	10.3	PASS
1.026000	38.81	---	56.00	17.19	L	10.3	PASS
1.582000	26.75	---	56.00	29.25	L	10.3	PASS
1.586000	---	20.94	46.00	25.06	L	10.3	PASS
4.998000	22.28	---	56.00	33.72	L	10.4	PASS
4.998000	---	20.61	46.00	25.39	L	10.4	PASS
13.434000	---	20.31	50.00	29.69	L	10.8	PASS
13.434000	21.71	---	60.00	38.29	L	10.8	PASS

Full Spectrum

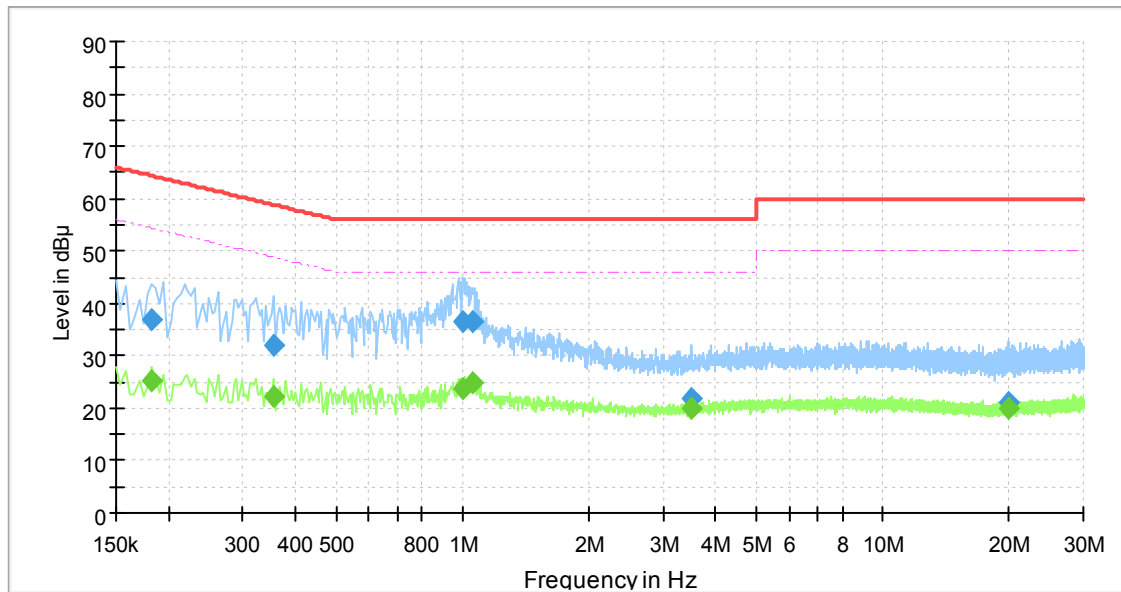

(Plot A: N Phase)

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)	Verdict
0.182000	---	25.28	54.39	29.11	N	10.2	PASS
0.182000	36.81	---	64.39	27.58	N	10.2	PASS
0.354000	---	22.08	48.87	26.79	N	10.2	PASS
0.354000	31.98	---	58.87	26.89	N	10.2	PASS
1.002000	---	23.80	46.00	22.20	N	10.3	PASS
1.002000	36.48	---	56.00	19.52	N	10.3	PASS
1.054000	36.35	---	56.00	19.65	N	10.3	PASS
1.054000	---	24.67	46.00	21.33	N	10.3	PASS
3.510000	21.68	---	56.00	34.32	N	10.3	PASS
3.510000	---	19.80	46.00	26.20	N	10.3	PASS
19.930000	---	19.87	50.00	30.13	N	10.8	PASS
19.930000	21.15	---	60.00	38.85	N	10.8	PASS

2.8. Radiated Emission

2.8.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.8.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

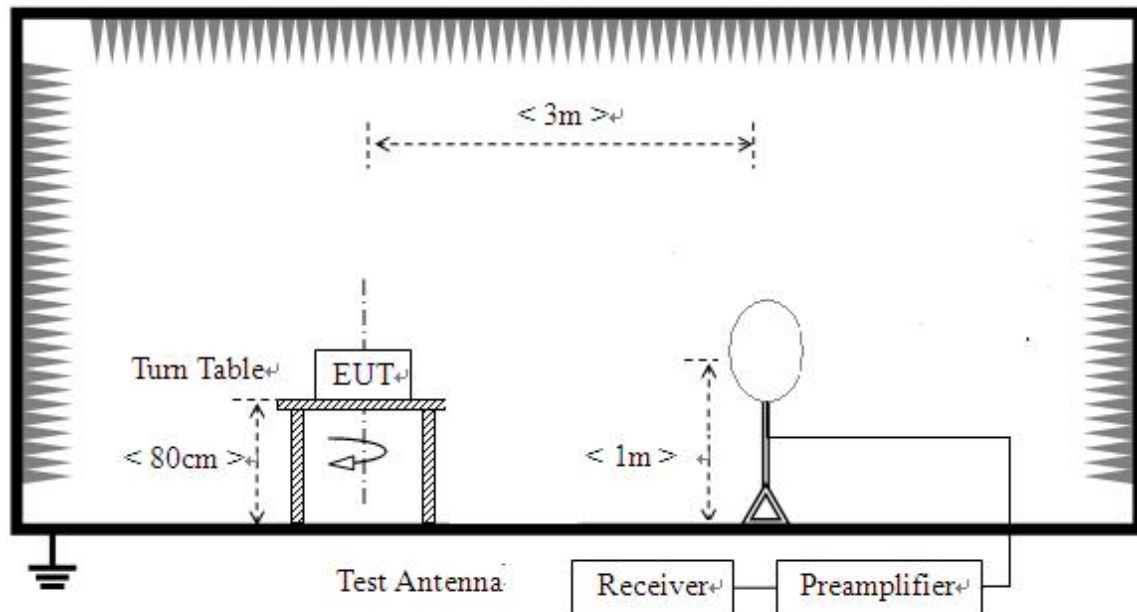

- 2) For radiated emissions from 30MHz to 1GHz

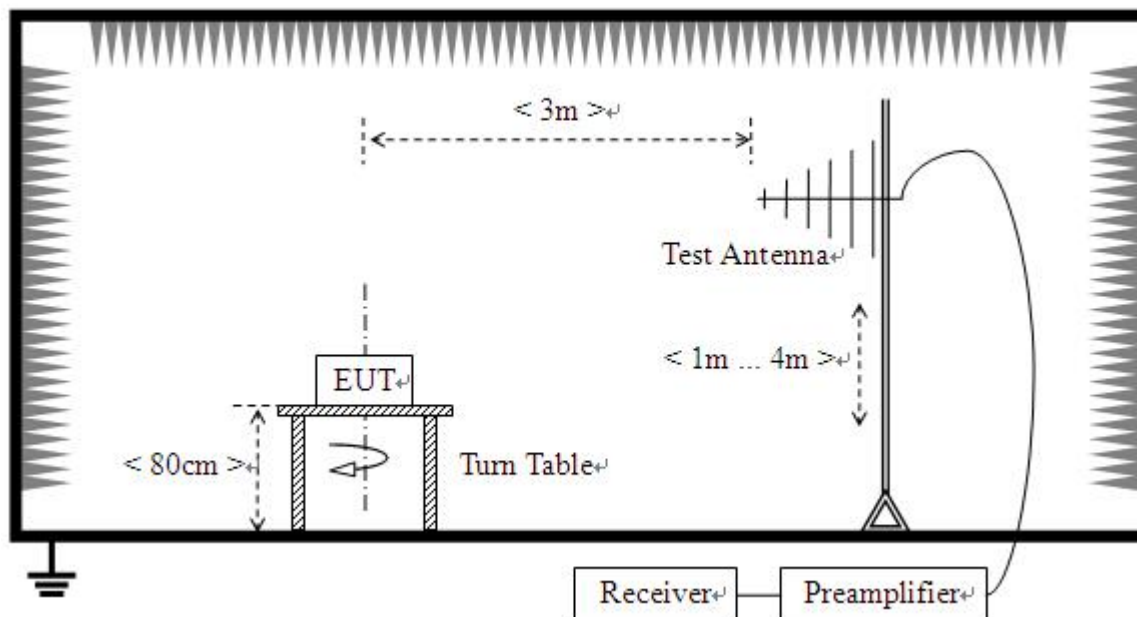

3) For radiated emissions above 1GHz

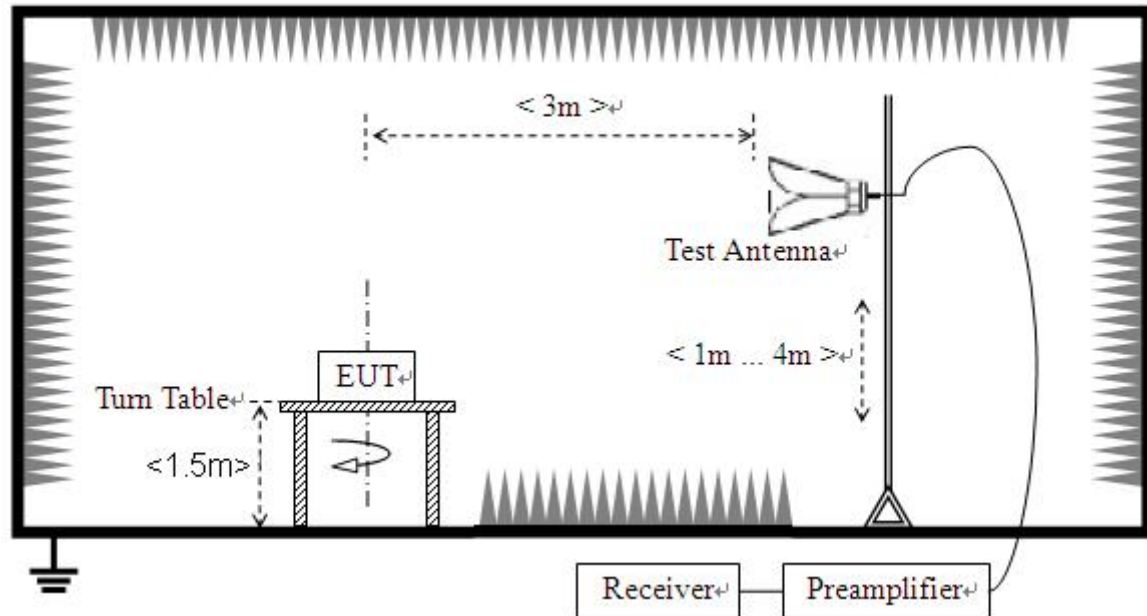

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10:2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with



Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz:

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasipeak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


B. Equipments List:

Please refer ANNEX B(4).

2.8.3. Test Result


Note1: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note2: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 10dB lower than the limit was not recorded.

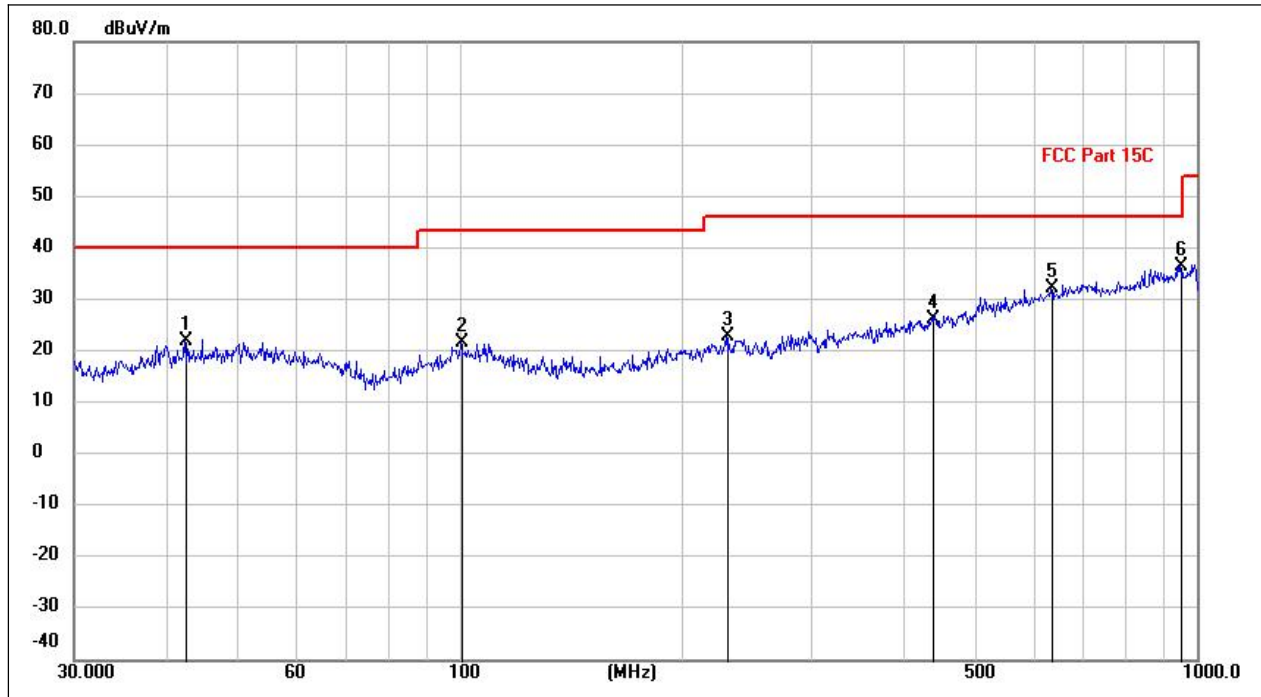


(LE 1M PHY_2402MHz, Antenna Horizontal, 30MHz to 1GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
42.5253	6.76	15.17	21.93	40.00	-18.07	peak	PASS
100.7218	6.58	15.04	21.62	43.50	-21.88	peak	PASS
230.5023	8.44	14.39	22.83	46.00	-23.17	peak	PASS
438.2710	5.85	20.34	26.19	46.00	-19.81	peak	PASS
634.4633	8.13	24.00	32.13	46.00	-13.87	peak	PASS
951.0927	8.15	28.34	36.49	46.00	-9.51	peak	PASS

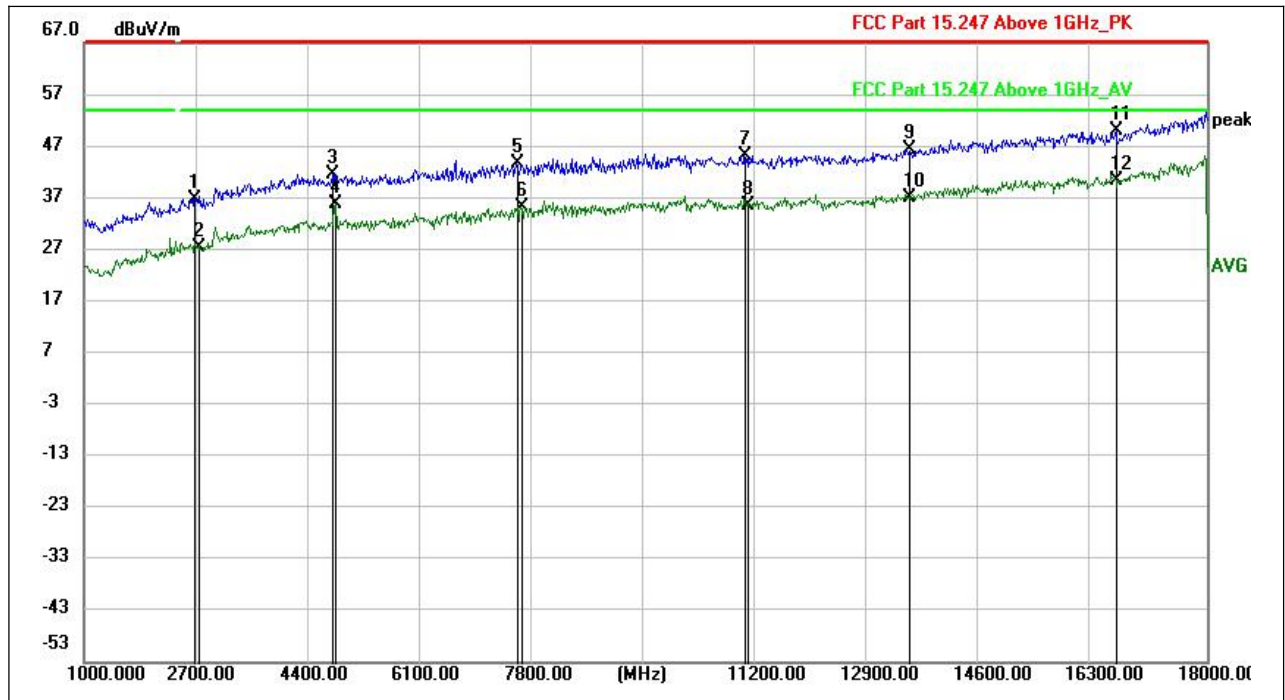


(LE 1M PHY _2402MHz, Antenna Horizontal, 1GHz to 18GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
2682.150	47.22	-10.49	36.73	74.00	-37.27	peak	PASS
2723.800	37.72	-10.48	27.24	54.00	-26.76	AVG	PASS
4769.750	45.81	-4.20	41.61	74.00	-32.39	peak	PASS
4808.000	39.62	-3.96	35.66	54.00	-18.34	AVG	PASS
7560.300	44.38	-0.85	43.53	74.00	-30.47	peak	PASS
7630.000	36.01	-0.77	35.24	54.00	-18.76	AVG	PASS
11011.300	42.67	2.41	45.08	74.00	-28.92	peak	PASS
11052.100	33.11	2.24	35.35	54.00	-18.65	AVG	PASS
13478.850	40.75	5.63	46.38	74.00	-27.62	peak	PASS
13480.550	31.46	5.64	37.10	54.00	-16.90	AVG	PASS
16634.900	39.20	10.90	50.10	74.00	-23.90	peak	PASS
16634.900	29.47	10.90	40.37	54.00	-13.63	AVG	PASS

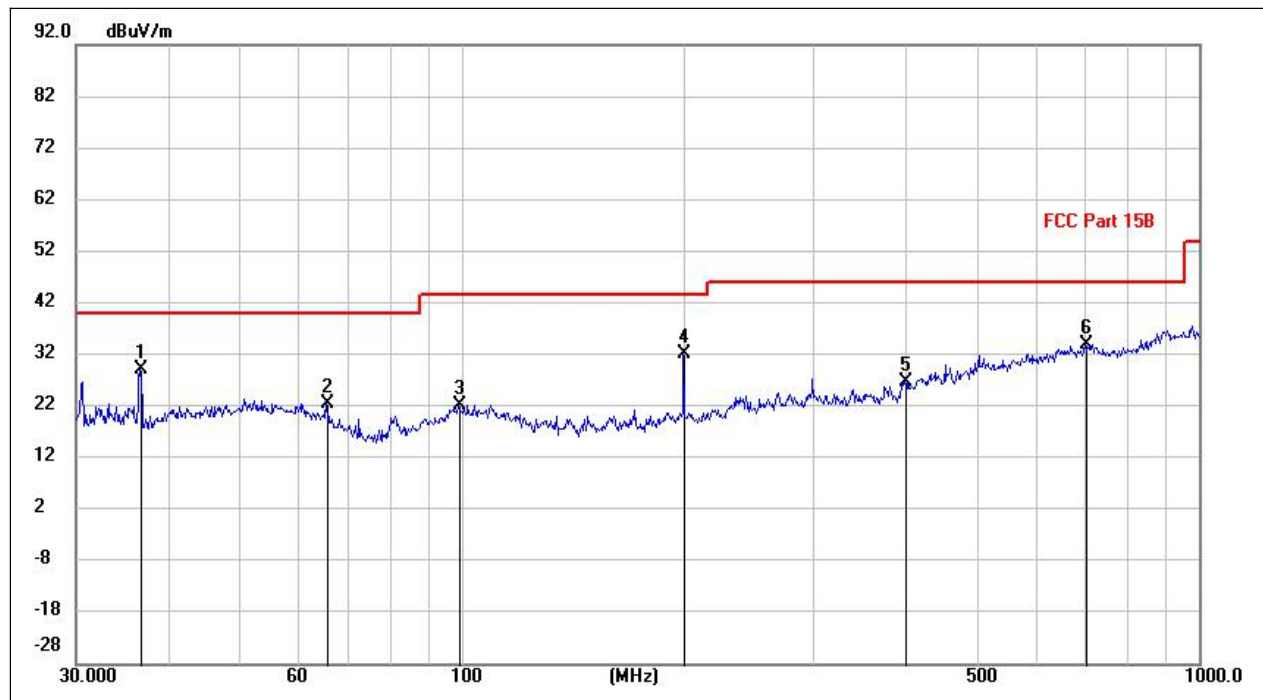


(LE 1M PHY _2402MHz, Antenna Vertical, 30MHz to 1GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
36.6567	15.85	13.41	29.26	40.00	-10.74	peak	PASS
65.7684	9.39	13.17	22.56	40.00	-17.44	peak	PASS
99.2493	7.78	14.57	22.35	43.50	-21.15	peak	PASS
200.0557	17.94	14.35	32.29	43.50	-11.21	peak	PASS
399.7304	6.99	19.76	26.75	46.00	-19.25	peak	PASS
703.3623	13.85	20.20	34.05	46.00	-11.95	peak	PASS

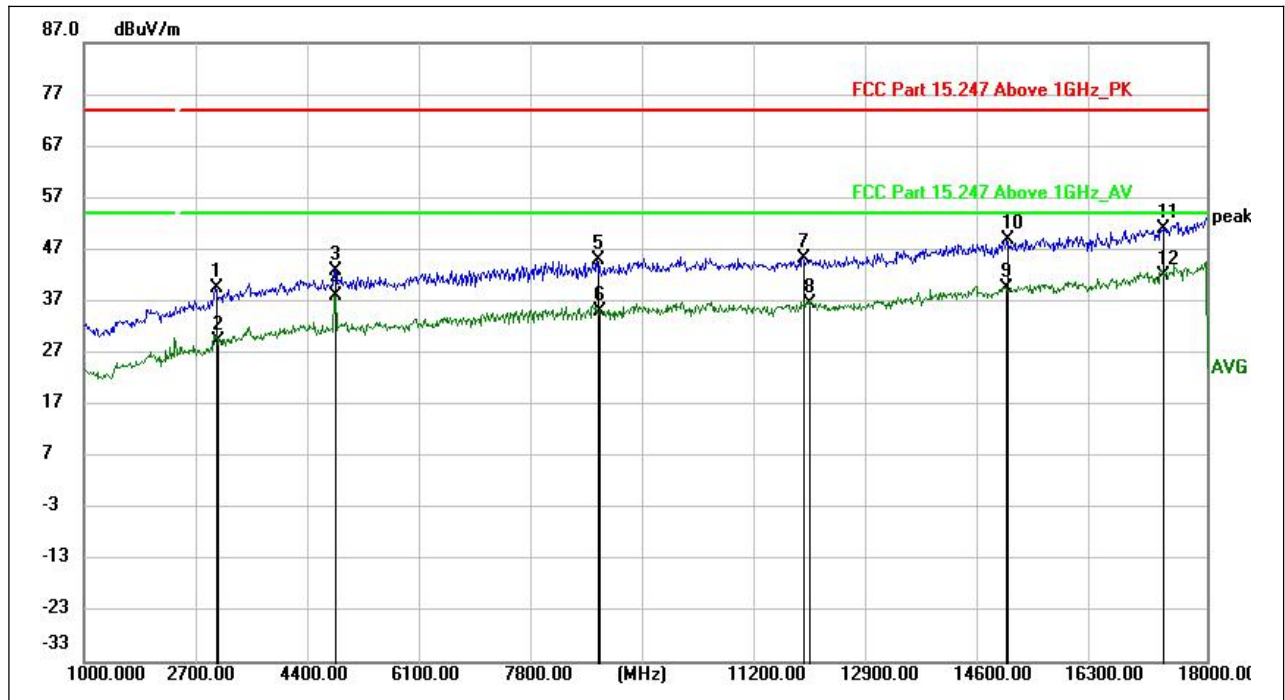


(LE 1M PHY_2402MHz, Antenna Vertical , 1GHz to 18GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
3000.900	46.51	-7.03	39.48	74.00	-34.52	peak	PASS
3029.800	37.30	-7.94	29.36	54.00	-24.64	AVG	PASS
4808.000	46.76	-3.96	42.80	74.00	-31.20	peak	PASS
4808.000	41.96	-3.96	38.00	54.00	-16.00	AVG	PASS
8780.900	44.39	0.48	44.87	74.00	-29.13	peak	PASS
8817.450	34.69	0.32	35.01	54.00	-18.99	AVG	PASS
11893.600	42.25	3.02	45.27	74.00	-28.73	peak	PASS
11974.350	33.16	3.45	36.61	54.00	-17.39	AVG	PASS
14974.000	30.17	9.25	39.42	54.00	-14.58	AVG	PASS
14982.500	39.74	9.25	48.99	74.00	-25.01	peak	PASS
17325.100	38.15	12.84	50.99	74.00	-23.01	peak	PASS
17353.150	29.17	12.80	41.97	54.00	-12.03	AVG	PASS

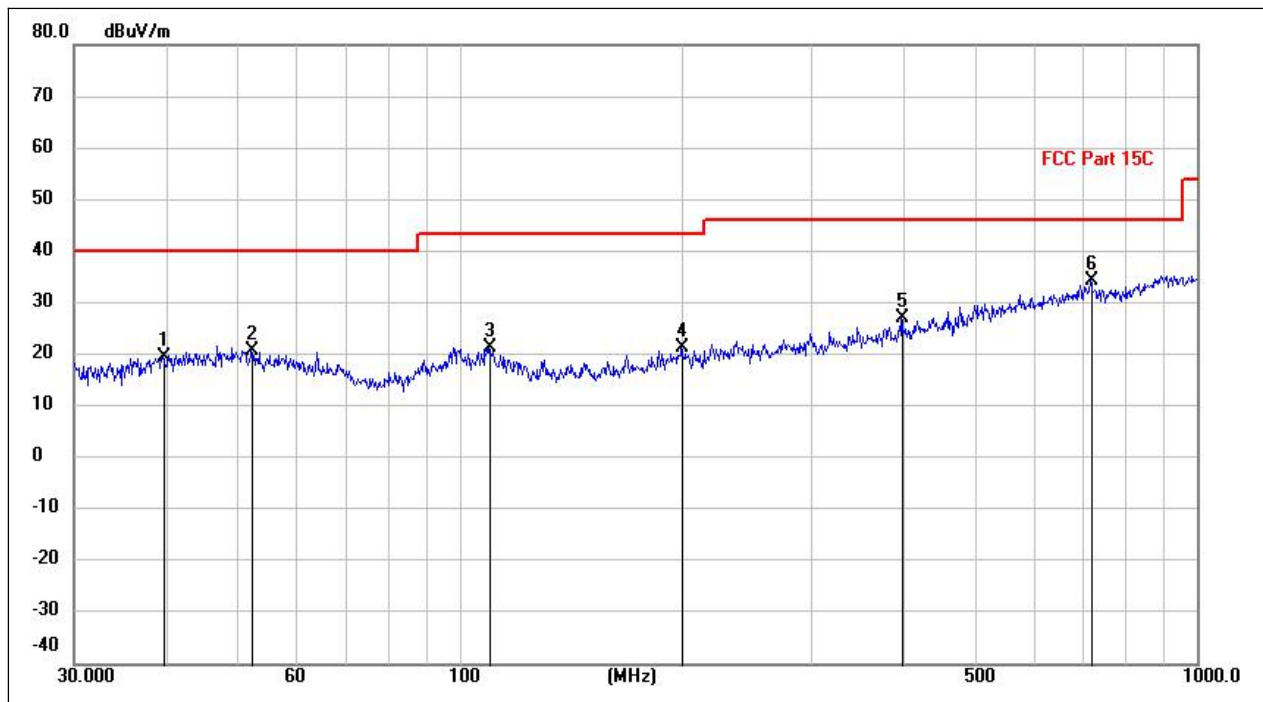


(LE 1M PHY _2440MHz, Antenna Horizontal, 30MHz to 1GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
39.5896	4.42	15.08	19.50	40.00	-20.50	peak	PASS
52.3729	5.46	15.40	20.86	40.00	-19.14	peak	PASS
109.4500	6.44	14.89	21.33	43.50	-22.17	peak	PASS
200.2312	7.06	14.31	21.37	43.50	-22.13	peak	PASS
398.6107	7.41	19.58	26.99	46.00	-19.01	peak	PASS
717.8138	9.43	25.00	34.43	46.00	-11.57	peak	PASS

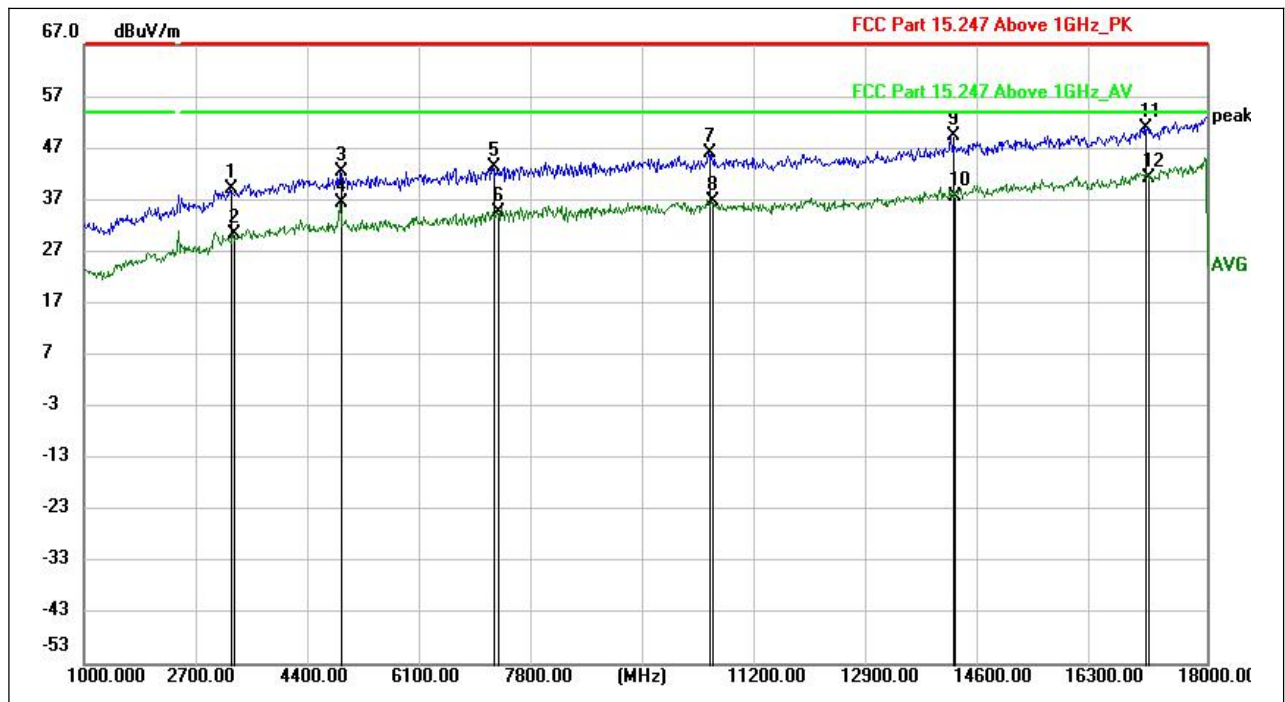


(LE 1M PHY _2440MHz, Antenna Horizontal, 1GHz to 18GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
3217.650	47.31	-8.30	39.01	74.00	-34.99	peak	PASS
3273.750	38.16	-7.89	30.27	54.00	-23.73	AVG	PASS
4880.650	46.51	-3.96	42.55	74.00	-31.45	peak	PASS
4880.650	40.48	-3.96	36.52	54.00	-17.48	AVG	PASS
7196.500	44.86	-1.53	43.33	74.00	-30.67	peak	PASS
7268.750	35.91	-1.36	34.55	54.00	-19.45	AVG	PASS
10457.950	44.41	1.63	46.04	74.00	-27.96	peak	PASS
10507.250	34.81	1.77	36.58	54.00	-17.42	AVG	PASS
14145.250	42.09	7.19	49.28	74.00	-24.72	peak	PASS
14176.700	30.30	7.19	37.49	54.00	-16.51	AVG	PASS
17079.450	39.83	11.03	50.86	74.00	-23.14	peak	PASS
17119.400	29.63	11.49	41.12	54.00	-12.88	AVG	PASS

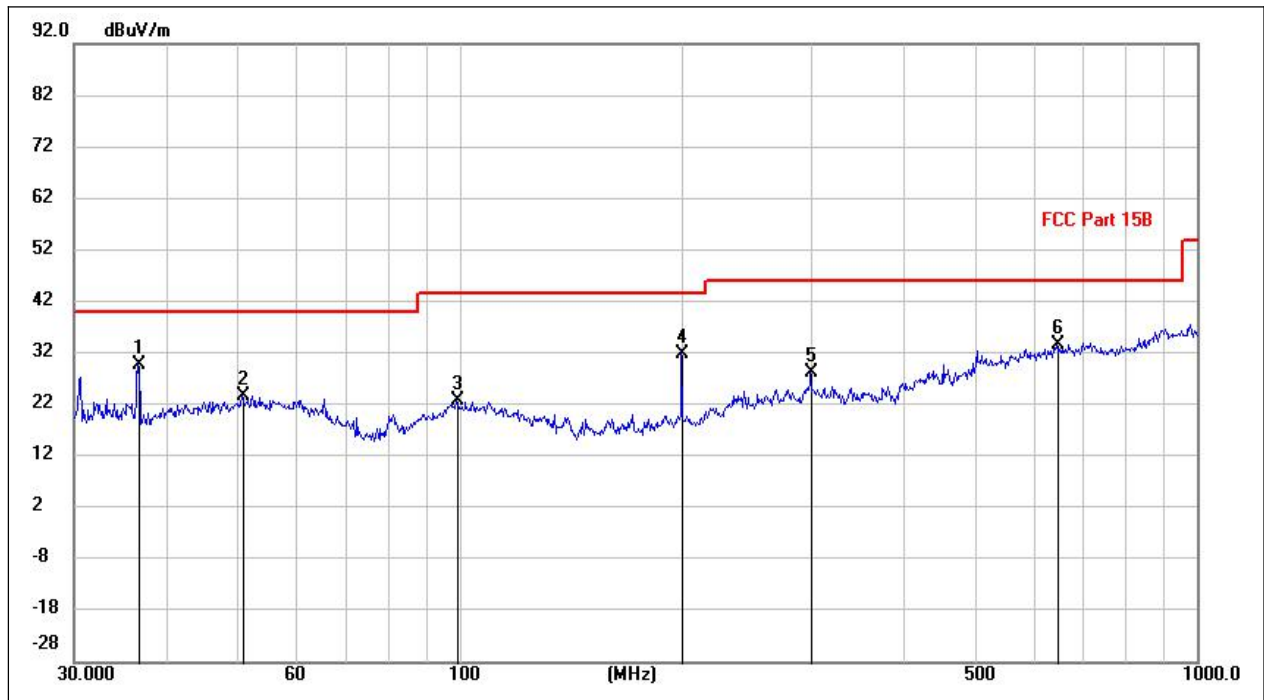


(LE 1M PHY_2440MHz, Antenna Vertical, 30MHz to 1GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
36.6567	16.35	13.41	29.76	40.00	-10.24	peak	PASS
50.8795	7.93	15.90	23.83	40.00	-16.17	peak	PASS
99.2493	8.28	14.57	22.85	43.50	-20.65	peak	PASS
200.0557	17.44	14.35	31.79	43.50	-11.71	peak	PASS
300.1566	10.75	17.48	28.23	46.00	-17.77	peak	PASS
647.0451	14.14	19.47	33.61	46.00	-12.39	peak	PASS

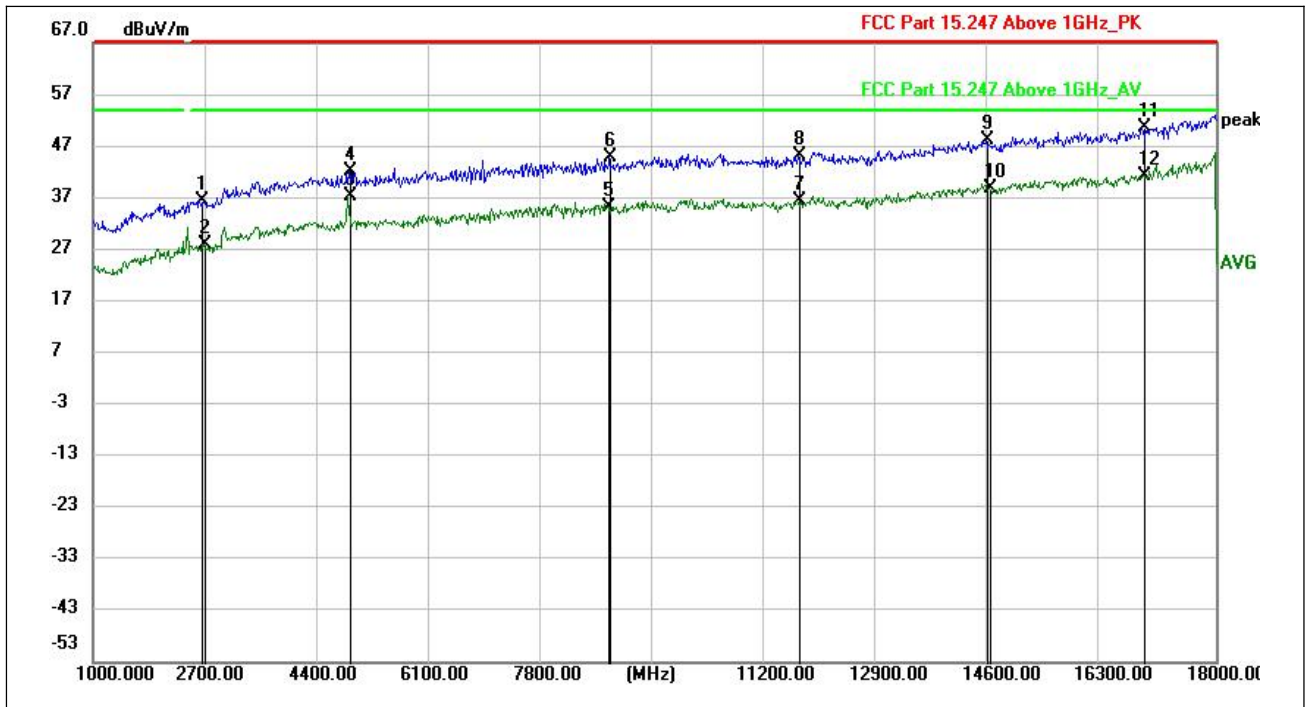


(LE 1M PHY _2440MHz, Antenna Vertical, 1GHz to 18GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
2635.400	47.19	-10.68	36.51	74.00	-37.49	peak	PASS
2698.300	38.49	-10.53	27.96	54.00	-26.04	AVG	PASS
4880.650	41.16	-3.96	37.20	54.00	-16.80	AVG	PASS
4880.500	46.07	-3.95	42.12	74.00	-31.88	peak	PASS
8817.450	34.76	0.32	35.08	54.00	-18.92	AVG	PASS
8825.950	44.50	0.24	44.74	74.00	-29.26	peak	PASS
11682.800	33.44	2.83	36.27	54.00	-17.73	AVG	PASS
11686.200	42.14	2.86	45.00	74.00	-29.00	peak	PASS
14534.550	39.96	8.28	48.24	74.00	-25.76	peak	PASS
14580.450	30.66	8.05	38.71	54.00	-15.29	AVG	PASS
16898.400	38.86	11.66	50.52	74.00	-23.48	peak	PASS
16902.650	29.72	11.65	41.37	54.00	-12.63	AVG	PASS

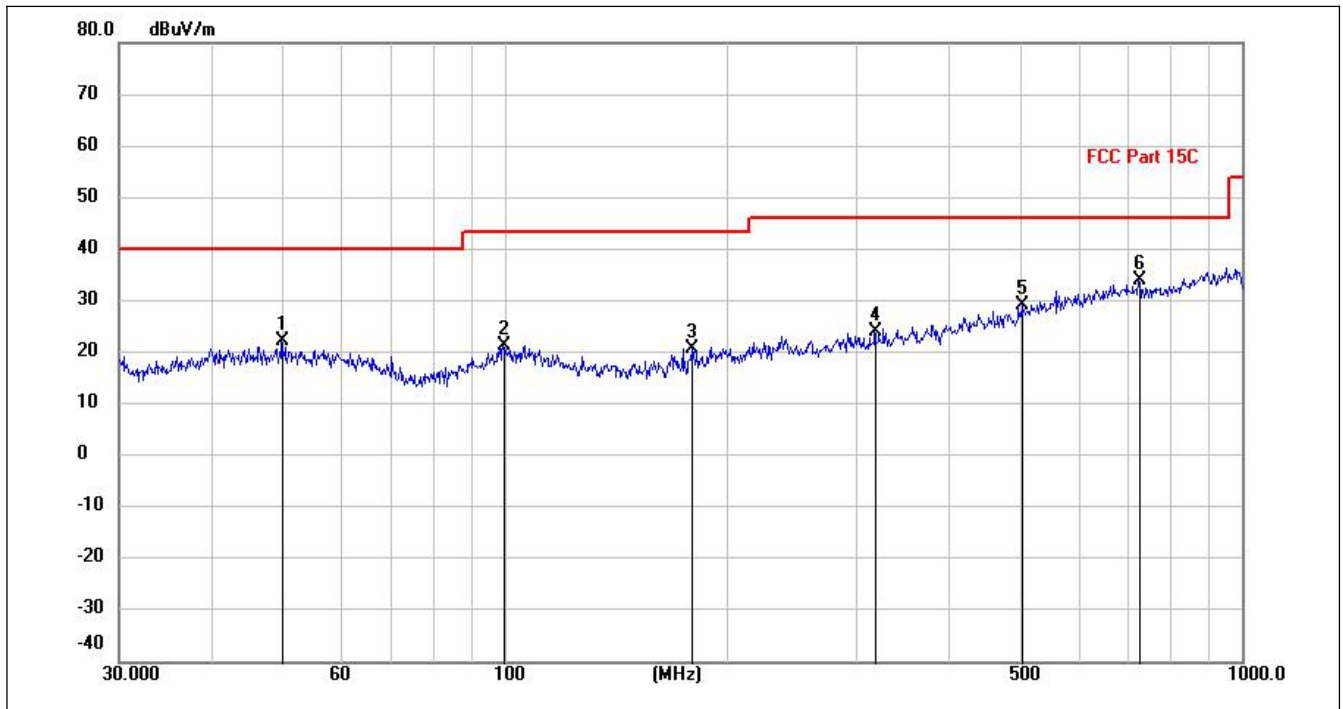


(LE 1M PHY _2480MHz, Antenna Horizontal, 30MHz to 1GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
50.0040	6.04	16.20	22.24	40.00	-17.76	peak	PASS
99.8427	6.30	15.06	21.36	43.50	-22.14	peak	PASS
179.4807	8.04	12.66	20.70	43.50	-22.80	peak	PASS
318.3702	6.38	17.72	24.10	46.00	-21.90	peak	PASS
504.5293	7.18	22.00	29.18	46.00	-16.82	peak	PASS
725.9138	8.82	25.15	33.97	46.00	-12.03	peak	PASS

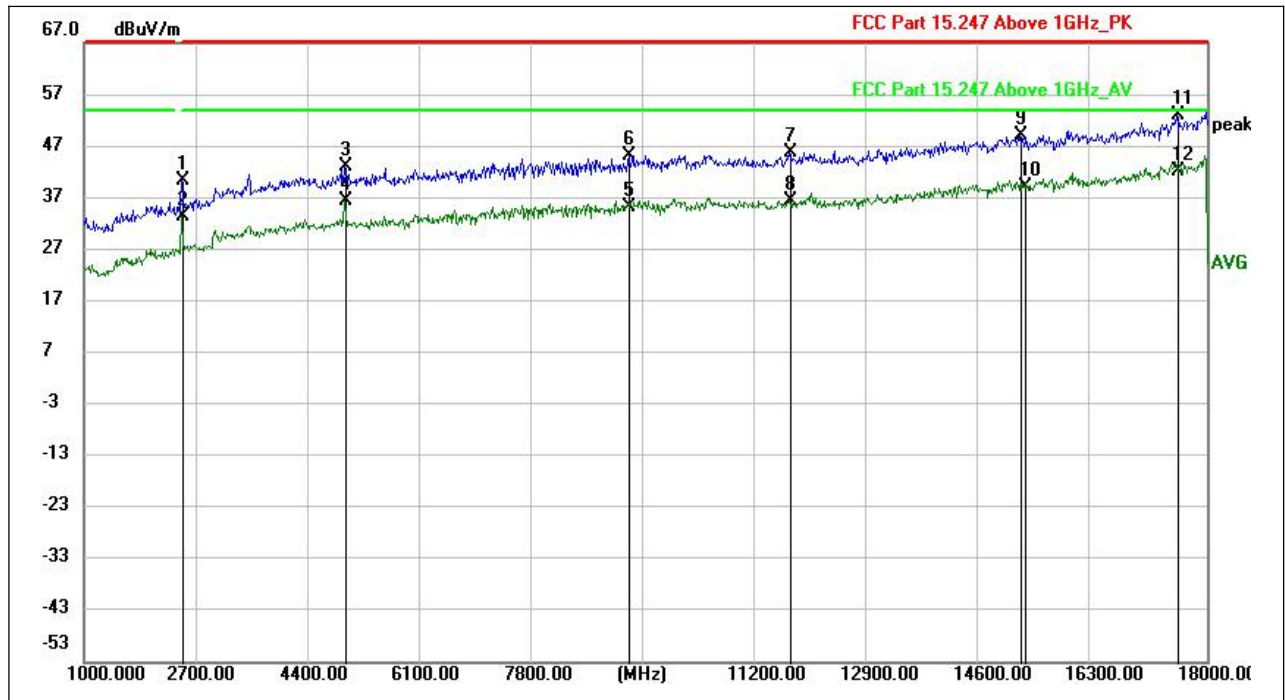


(LE 1M PHY _2480MHz, Antenna Horizontal, 1GHz to 18GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
2479.850	51.46	-11.21	40.25	---	---	peak	PASS
2479.850	44.72	-11.21	33.51	---	---	AVG	PASS
4960.150	46.46	-3.55	42.91	74.00	-31.09	peak	PASS
4960.150	40.08	-3.55	36.53	54.00	-17.47	AVG	PASS
9234.800	34.71	0.63	35.34	54.00	-18.66	AVG	PASS
9251.800	44.61	0.67	45.28	74.00	-28.72	peak	PASS
11681.950	42.89	2.82	45.71	74.00	-28.29	peak	PASS
11681.950	33.66	2.82	36.48	54.00	-17.52	AVG	PASS
15175.450	40.27	8.82	49.09	74.00	-24.91	peak	PASS
15244.300	29.71	9.45	39.16	54.00	-14.84	AVG	PASS
17558.850	39.94	13.08	53.02	74.00	-20.98	peak	PASS
17569.900	29.24	13.03	42.27	54.00	-11.73	AVG	PASS

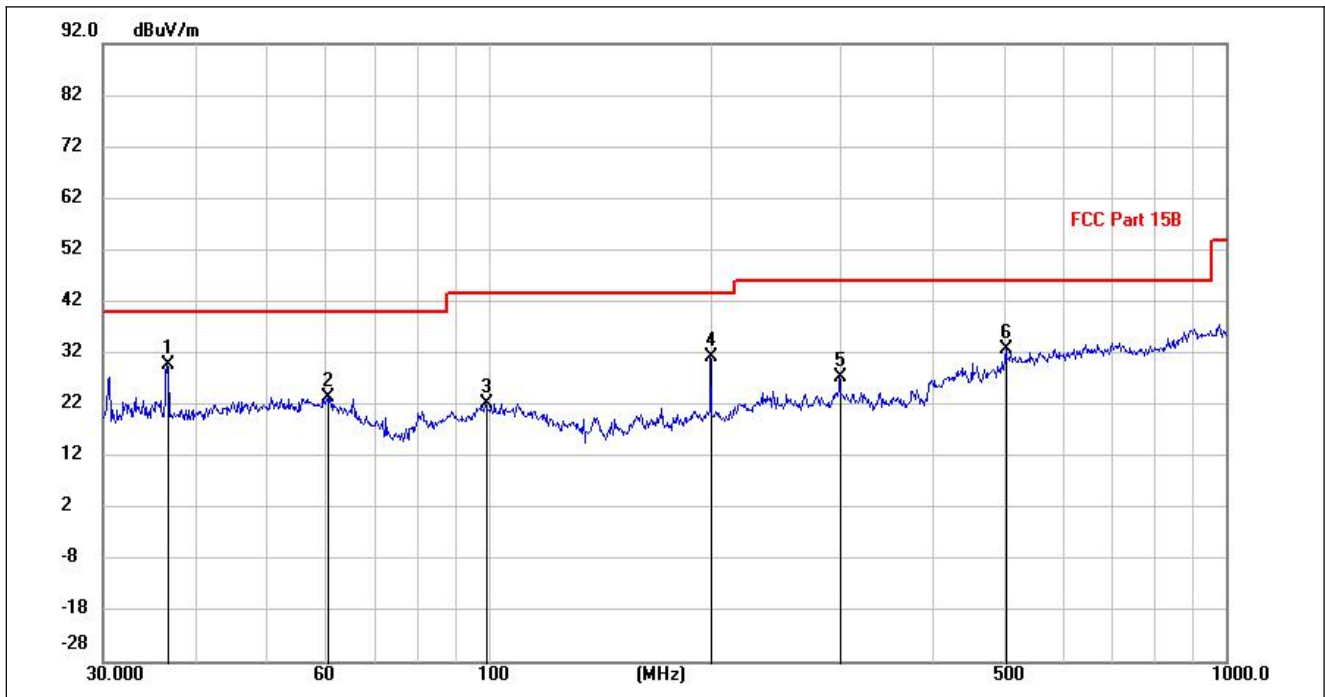

(LE 1M PHY _2480MHz, Antenna Vertical, 30MHz to 1GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
36.6567	16.35	13.41	29.76	40.00	-10.24	peak	PASS
60.5449	8.91	14.48	23.39	40.00	-16.61	peak	PASS
99.2493	7.78	14.57	22.35	43.50	-21.15	peak	PASS
200.0557	16.94	14.35	31.29	43.50	-12.21	peak	PASS
300.1566	9.75	17.48	27.23	46.00	-18.77	peak	PASS
503.2923	14.76	18.10	32.86	46.00	-13.14	peak	PASS

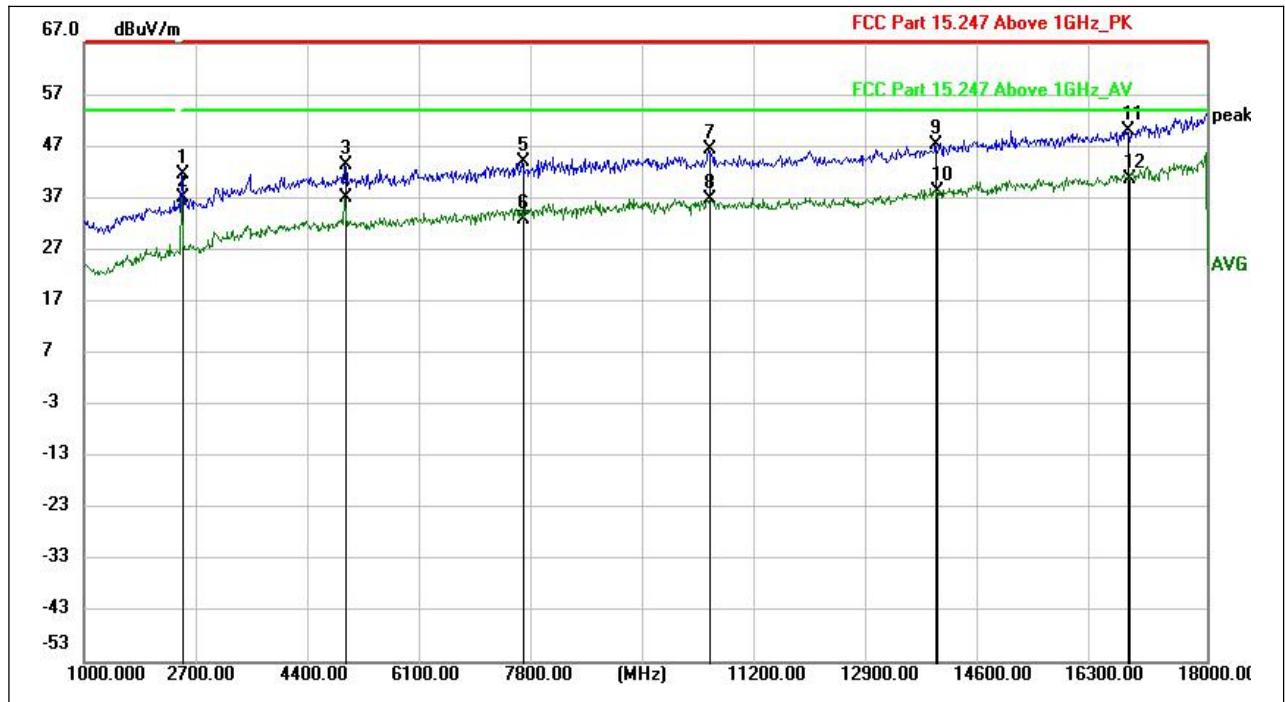

(LE 1M PHY _2480MHz, Antenna Vertical , 1GHz to 18GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
2479.850	52.59	-11.21	41.38	---	---	peak	PASS
2479.850	48.06	-11.21	36.85	---	---	AVG	PASS
4960.150	46.62	-3.36	43.26	74.00	-30.74	peak	PASS
4960.150	40.30	-3.36	36.94	54.00	-17.06	AVG	PASS
7637.650	44.84	-0.76	44.08	74.00	-29.92	peak	PASS
7658.050	33.62	-0.75	32.87	54.00	-21.13	AVG	PASS
10462.200	44.05	2.15	46.20	74.00	-27.80	peak	PASS
10472.400	34.31	2.27	36.58	54.00	-17.42	AVG	PASS
13903.000	40.45	6.70	47.15	74.00	-26.85	peak	PASS
13909.800	31.52	6.73	38.25	54.00	-15.75	AVG	PASS
16804.900	39.01	10.92	49.93	74.00	-24.07	peak	PASS
16816.800	29.58	11.10	40.68	54.00	-13.32	AVG	PASS



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{ dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 3.1\text{dB}$
Conducted Emission	$\pm 1.8\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



Annex B Testing Laboratory Information

1. 1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Kehu-Morlab Test Laboratory
Laboratory Address:	Unit 101, No.1732 Gangzhong Road, Xiamen Area, Pilot Free Trade Zone (Fujian) P.R. China
Telephone:	+86 592 5612050
Facsimile:	+86 592 5612095

2. Identification of the Responsible Testing Location

Name:	Kehu-Morlab Test Laboratory
Address:	Unit 101, No.1732 Gangzhong Road, Xiamen Area, Pilot Free Trade Zone (Fujian) P.R. China

3. Accreditation Certificate

Accredited Testing Laboratory:	The FCC designation number is CN1249. (Kehu-Morlab Test Laboratory)
---------------------------------------	--

4. Test Equipments Utilized

4.1 Conducted Test Equipments

No.	Equipment Name	Serial No.	Model No.	Manufacturer	Cal.Due Date
1	MXA Signal Analyzer	MY57150136	N9030A	Keysight	2022. 03.08
2	RF cable (30MHz-26.5GHz)	RF01	N/A	Morlab	2022.03.06
3	Coaxial cable	RF02	N/A	Morlab	2022.03.06
4	SMA connector	RF03	N/A	Xingbo	N/A
Software Version: MW 2.0.0.0					

**4.2 Conducted Emission Test Equipments**

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Due Date
1	EMI Receiver	102174	ESR3	R&S	2022.03.15
2	LISN	101338	ENV432	R&S	2022.03.09

4.3 Auxiliary Test Equipment

No.	Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Due Date
1	Computer	E75	Think Pad	Lenovo	N/A

4.4 List of Software Used

Description	Manufacturer	Software Version
Test system	CAICT	Eagle 2.0
EMC32	R&S	V10.00.00

4.5 Radiated Test Equipments

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	ETS-Lindgren	2022.07.20
2	Receiver	101799	ESR7	R&S	2022.03.15
3	Signal Analyzer	101294	FSV40	R&S	2022.06.04
4	Active Ring Antenna	FMZB 1513 #269	FMZB 1513	Schwarzbeck	2022.01.18
5	Linear Log Periodic Broad Band Antenna	949	VULB 9163	Schwarzbeck	2021.09.24
6	Ultra-Wideband Horn Antenna	102615	HF907	R&S	2022.01.18
7	Steatite Antennas	17868	QSH-SL-18 -26-S-20	Seibersdorf	2022.03.23
8	Ultra-Wideband Horn Antenna	17989	QSH-26-40	Schwarzbeck	2022.03.23
9	RF Switch and Control Platform	N/A	RSC	CDSI	N/A
10	Coaxial cable (N male) (9kHz -3GHz)	EMC02	N/A	Morlab	2022.03.23
11	Coaxial cable (N male)	EMC03	N/A	Morlab	2022.03.23



	(9kHz -3GHz)				
12	Coaxial cable (N male) (1GHz-26.5GHz)	EMC04	N/A	Morlab	2022.03.23
13	Coaxial cable (N male) (1GHz-26.5GHz)	EMC05	N/A	Morlab	2022.03.23
14	Pre-amplifier (1GHz-18GHz)	8810011	PAP-1G18	CDSI	2022.03.23
15	Pre-amplifier (18GHz-40GHz)	17021-17024	PAP-1840	CDSI	2022.03.23
16	High Pass Filter	EMC21	HFP-1.0/18 G-60	CDSI	2022.03.23
17	High Pass Filter	EMC22	HFP-3.0/18 G-60	CDSI	2022.03.23

_____ END OF REPORT _____