

TEST REPORT

On behalf of

Savant Technologies LLC, dba GE Lighting, a Savant company

Product Name: In-wall Outlet

Model No.: COTLSTD2PM2W1

FCC ID: PUU-COTLSTD2PM2

Prepared For: Savant Technologies LLC, dba GE Lighting, a Savant company
1975 Noble Road Cleveland, Ohio United States 44112

Prepared By: Audix Technology (Shanghai) Co., Ltd.
3F, Building 34, No. 680 Guiping Rd.,
Caohejing, Hi-Tech Park,
Shanghai 200233, China

Tel: +86-21-64955500



File No. : C1D2509039
Report No. : ACI-F25138
Date of Test : 2025.07.13-10.20
Date of Report : 2025.10.24

The statement is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS

	Page
1 SUMMARY OF STANDARDS AND RESULTS	5
1.1 Description of Standards and Results	5
2 GENERAL INFORMATION	6
2.1 Description of Equipment Under Test	6
2.2 EUT Specifications Assessed in Current Report	7
2.3 Test Information	7
2.4 Duty Cycle Check	8
2.5 Sample Description	9
2.6 Supported equipment	9
2.7 Description of Test Facility	9
3 CONDUCTED EMISSION TEST	10
3.1 Test Equipment	10
3.2 Block Diagram of Test Setup	10
3.3 Conducted Emission Limits (§15.207)	11
3.4 Test Configuration	11
3.5 Operating Condition of EUT	11
3.6 Test Procedures	11
3.7 Test Results	12
4 RADIATED EMISSION TEST	15
4.1 Test Equipment	15
4.2 Block Diagram of Test Setup	15
4.3 Radiated Emission Limit (§15.209)	17
4.4 Test Configuration	18
4.5 Operating Condition of EUT	18
4.6 Test Procedures	18
4.7 Test Results	19
5 99% OCCUPIED BANDWIDTH MEASUREMENT	46
5.1 Test Equipment	46
5.2 Block Diagram of Test Setup	46
5.3 Operating Condition of EUT	46
5.4 Test Procedure	46
5.5 Test Results	47
6 6 DB BANDWIDTH MEASUREMENT	51
6.1 Test Equipment	51
6.2 Block Diagram of Test Setup	51
6.3 Specification Limits (§15.247(a)(2))	51
6.4 Operating Condition of EUT	51
6.5 Test Procedure	51
6.6 Test Results	52
7 MAXIMUM OUTPUT POWER MEASUREMENT	56
7.1 Test Equipment	56
7.2 Block Diagram of Test Setup	56
7.3 Specification Limits (§15.247(b)(3))	56
7.4 Operating Condition of EUT	56
7.5 Test Procedure	56
7.6 Test Results	57

8	EMISSION LIMITATIONS MEASUREMENT.....	61
8.1	Test Equipment.....	61
8.2	Block Diagram of Test Setup	61
8.3	Specification Limits (§15.247(d))	61
8.4	Operating Condition of EUT	61
8.5	Test Procedure	61
8.6	Test Results	63
9	POWER SPECTRAL DENSITY MEASUREMENT	73
9.1	Test Equipment.....	73
9.2	Block Diagram of Test Setup	73
9.3	Specification Limits (§15.247(e))	73
9.4	Operating Condition of EUT	73
9.5	Test Procedure	73
9.6	Test Results	74
10	ANTENNA REQUIREMENT	78
10.1	Specification Limits (§15.203).....	78
10.2	Result.....	78
11	MEASUREMENT UNCERTAINTY LIST	79
APPENDIX I PHOTOGRAPHS OF TEST		TOTAL 4 PAGES
APPENDIX II PHOTOGRAPHS OF EUT		TOTAL 8 PAGES

TEST REPORT

Applicant : Savant Technologies LLC, dba GE Lighting, a Savant company
EUT Description : In-wall Outlet
(A) Model No. : Refer to Sec.2.1
(B) Power Supply : 120V AC 60Hz
(C) Test Voltage : 120V/60Hz, DC 3.3V from test fixture

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 15 SUBPART C
AND ANSI C63.10:2020*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report also shows that the EUT (M/N: Refer to Sec2.1), which was tested is technically compliance with the FCC limits.

This report applies to above tested Sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

The test results for EUT's BLE function are contained in No.ACI-F25139 report.

Date of Test : 2025.07.13-10.20 Date of Report : 2025.10.24

Producer :

Huimin Yan

HUIMIN YAN / Assistant

Review :

Lvy W

LVY LV / Deputy Assistant Manager

 For and on behalf of
Audix Technology (Shanghai) Co., Ltd.

Signatory :

Authorized Signature(s)

KAMP CHEN/Manager

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The result is determined according to the decision rules of customer selection in the ASC-403 application service form.

1. According to IEC GUIDE 115 Procedure 2 and ILAC-G8, the uncertainties value is not used in determining the PASS/FAIL results.

2. If the required specification or standard already contains the decision rules, it will be carried out in accordance with the regulations or standard documents or the requirements of the competent units. If the required specification or standard does not contain a decision rule, the same paragraph 1.

3. If your company has a required decision rule, it will be implemented in accordance with the requirements and ISO/IEC Guide 98-4 specifications.

The EUT have been tested according to the applicable standards as referenced below:

Description / Test Item	Test Standard	Results	Meets Limit
EMISSION			
Conducted Emission	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.207
Radiated Emission	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.209(a) 15.205(a)(c)
6 dB Bandwidth Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.247(a)(2)
Maximum Output Power Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.247(b)(3)
Emission Limitations Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.247(d)
Band Edge Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.247(d)
Power Spectral Density Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.247(e)
Antenna Requirement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.203
N/A is an abbreviation for Not Applicable.			

2 GENERAL INFORMATION

2.1 Description of Equipment Under Test

Description : In-wall Outlet

Type of EUT : ☒ Production ☐ Pre-product ☐ Pro-type

Model Number : COTLSTD2PM2W1

Radio Tech : BLE 4.2;
IEEE 802.11 b/g/n.

Channel Freq. : BLE: 2402MHz-2480MHz;
802.11b/g/n20: 2412MHz-2462MHz.

Modulation : BLE: GFSK;
802.11b: DSSS (CCK, DQPSK, DBPSK);
802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK).

Antenna Info. : Antenna Type: PCB Antenna
Antenna Gain: 0.5 dBi

Note : The Antenna information was provided by the customer.

Applicant : Savant Technologies LLC, dba GE Lighting, a Savant company
1975 Noble Road Cleveland, Ohio United States 44112

Manufacturer : same as Applicant

Factory#1 : Sichuan Hongrui Electric Co., ltd
Building #201, Comprehensive Bonded Zone, feiyun
road, East No.261, High-TechPark, Mianyang

Factory#2 : VIETNAM CHANGHONG ELECTRIC COMPANY
LIMITED
Workshop W4 (leased by WWWHP), Land plot 4.2B,
Dinh Vu Industrial Zone, Dong Hai 2 Ward, Hai An
District, Haiphong City, VN.

2.2 EUT Specifications Assessed in Current Report

Mode	Modulation	Data Rate(Mbps)
802.11b	DSSS (DQPSK, DBPSK, CCK)	Up to 11
802.11g	OFDM (64-QAM, 16-QAM, QPSK, BPSK)	Up to 54
802.11n-HT 20	OFDM (64-QAM, 16-QAM, QPSK, BPSK)	Up to 72.2

Channel List			
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

2.3 Test Information



The test software “UI_mptool.exe” was used to control EUT work in TX mode, Power Index and select test channel.

Mode	data rate (Mbps)	Power Level Index Setting	Test Channel		Frequency (MHz)
802.11b	11	auto(91)	Low:	1	2412
		auto(98)	Middle:	6	2437
		auto(88)	High:	11	2462
802.11g	6	auto(89)	Low:	1	2412
		auto(100)	Middle:	6	2437
		auto(83)	High:	11	2462
802.11n20	MCS0	auto(85)	Low:	1	2412
		auto(96)	Middle:	6	2437
		auto(83)	High:	11	2462

Note: The setting information was provided by the customer.

2.4 Duty Cycle Check

Mode	Transmission Duration (ms)	Transmission Period (ms)	Duty Cycle (%)	Duty Cycle Correct Factor
802.11b	1	1	100	N/A
802.11g	1	1	100	N/A
802.11n20	1	1	100	N/A

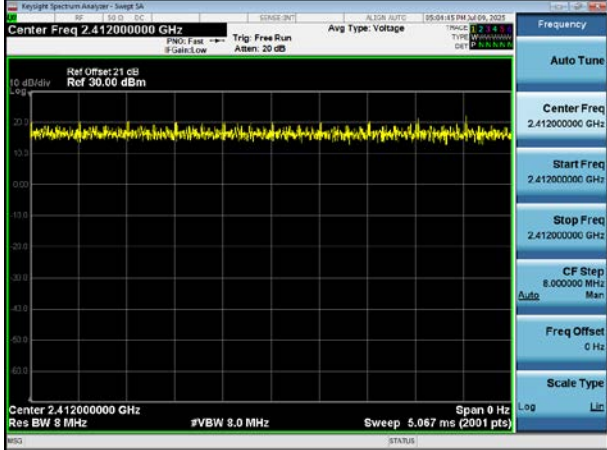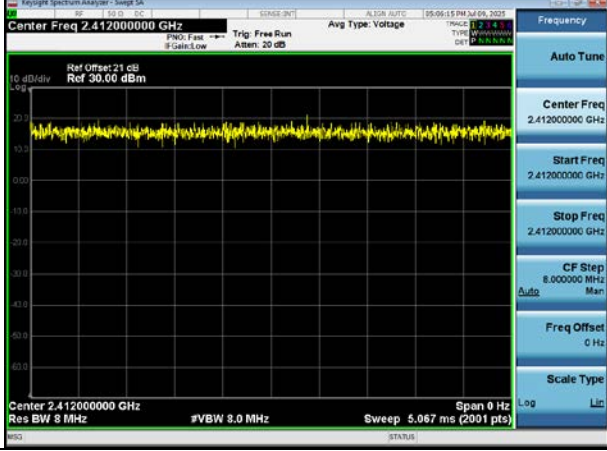Mode	Ton	Ton+off
802.11b	 Keynote Spectrum Analyzer - Sweep SA Center Freq 2.462000000 GHz Ref Offset 21 dB Ref 30.00 dBm Center 2.462000000 GHz Res BW 8 MHz Span 0 Hz Sweep 3.067 ms (2001 pts)	
802.11g	 Keynote Spectrum Analyzer - Sweep SA Center Freq 2.412000000 GHz Ref Offset 21 dB Ref 30.00 dBm Center 2.412000000 GHz Res BW 8 MHz Span 0 Hz Sweep 5.067 ms (2001 pts)	
802.11n20	 Keynote Spectrum Analyzer - Sweep SA Center Freq 2.412000000 GHz Ref Offset 21 dB Ref 30.00 dBm Center 2.412000000 GHz Res BW 8 MHz Span 0 Hz Sweep 5.067 ms (2001 pts)	

2.5 Sample Description

Test Item	Model Number	Sample Number	Date of receipted
Conducted Emission	COTLSTD2PM2W1	E20250901-01-01/03	2025.09.01
Radiated Emission	COTLSTD2PM2W1	E20250925-05-01/02	2025.09.25
Conducted RF Test	COTLSTD2PM2W1	E20250623419-01/06	2025.06.23

2.6 Supported equipment

Brand : Acer
Product Name: : Notebook PC
Model Name : TravelMate P238 series
Model Number : N15W8

Product Name : Test Fixture
Product Function : USB to TTL

2.7 Description of Test Facility

Name of Firm : Audix Technology (Shanghai) Co., Ltd.
Site Location : 3F, Building 34, No. 680 Guiping Rd.,
Caohejing, Hi-Tech Park,
Shanghai 200233, China
Accredited by NVLAP, Lab Code : 200371-0
FCC Designation Number : CN5027
Test Firm Registration Number : 954668

3 CONDUCTED EMISSION TEST


3.1 Test Equipment

The following test equipments are used during the conducted emission test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESCI	101302	2025.02.22	1 Year
2.	Artificial Mains Network (AMN)	R&S	ESH2-Z5	843890/011	2025.02.22	1 Year
3.	Fixed Attenuator	SHYL	TTS-1	001	2025.02.22	1 Year
4.	50Ω Coaxial Switch	Anritsu	MP59B	6200655085	2025.02.22	1 Year
5.	Coaxial Cable	Audix	CE Cable	CE-SH1-001	2025.02.22	1 Year
6.	Software	Audix	e3	e3.v9.210616	--	--

3.2 Block Diagram of Test Setup

3.2.1 Conducted Disturbance Test Setup

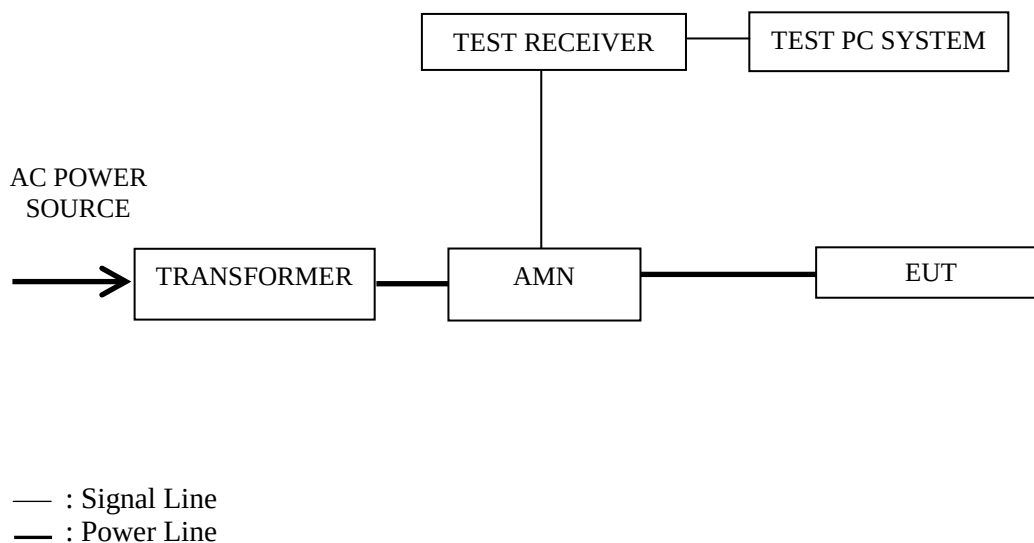

3.3 Conducted Emission Limits (§15.207)

Frequency Range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	66~56	56~46
0.5 ~ 5	56	46
5 ~ 30	60	50
NOTE 1 – The lower limit shall apply at the transition frequencies. NOTE 2 – The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz~0.50 MHz		

3.4 Test Configuration

The EUT (listed in Sec.2.1) was installed as shown on Sec.3.2 to meet FCC requirement and operating in a manner which tends to maximize its emission level in a normal application.

3.5 Operating Condition of EUT

3.5.1 Setup the EUT as shown in Sec. 3.2.

3.5.2 Turn on the power of all equipment.

3.5.3 Turn the EUT on the test mode, and then test.

3.6 Test Procedures

The EUT was placed upon a non-metallic table, which is 0.8 m above the horizontal conducting ground plane and 0.4 m from a vertical reference plane. The EUT was connected to the power mains through an Artificial Mains Network (AMN) to provide a 50 Ω coupling impedance for the measuring equipment. Both sides of AC line (Line & Neutral) were checked to find out the maximum conducted emission according to FCC Part 15 Subpart C and ANSI C63.10:2020 requirements during conducted disturbance test.

The I.F. bandwidth of Test Receiver ESCI was set at 9 kHz.

The frequency range from 150 kHz to 30 MHz was checked.

Test with a dummy load in lieu of the antenna to determine compliance with Section 15.207 limits within the transmitter's fundamental emission band. (According to KDB 174176 D01 Line Conducted FAQ)

The test modes were done on conducted disturbance test and all the test results are listed in Sec. 3.7

3.7 Test Results

< **PASS** >

The frequency and amplitude of the highest conducted emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Worst case emission:

No.	Operation	Mode	Channel	Frequency (MHz)	Data Page
1.	Transmitting	802.11b	1	2412	P13-14

NOTE 1 –Emission Level (dBμV/m) = Read Level (dBμV) + AMN Factor (dB) + Aux Factor (dB) + Cable Loss (dB)


Margin (dB) = Limits (dBμV) - Emission Level (dBμV)

NOTE 2 – “QP” means “Quasi-Peak” values

NOTE 3 – The emission levels which not reported are too low against the official limit.

Worst case emission


Test Date:	2025.09.02	Temp./Hum.:	22°C/51%RH	Test By:	Jarey
------------	------------	-------------	------------	----------	-------

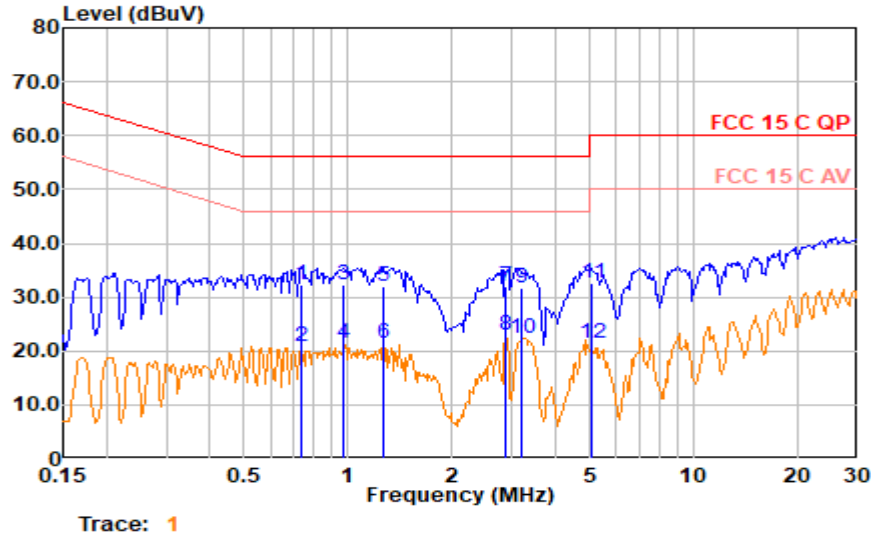Mode: 802.11b CH2412MHz

Polarization at Line

Frequency (MHz)	Meter Reading dB (μV)	AMN Factor (dB)	Aux Factor (dB)	Cable Loss (dB)	Emission Level dB (μV)	Limits dB (μV)	Margin (dB)	Remark
0.736	22.40	0.20	9.50	0.13	32.24	56.00	23.76	QP
0.736	11.14	0.20	9.50	0.13	20.97	46.00	25.03	Average
0.972	22.47	0.20	9.50	0.14	32.31	56.00	23.69	QP
0.972	11.55	0.20	9.50	0.14	21.39	46.00	24.61	Average
1.271	22.05	0.27	9.50	0.14	31.96	56.00	24.04	QP
1.271	11.65	0.27	9.50	0.14	21.57	46.00	24.43	Average
2.880	21.95	0.30	9.50	0.14	31.89	56.00	24.11	QP
2.880	12.99	0.30	9.50	0.14	22.93	46.00	23.07	Average
3.205	21.70	0.30	9.50	0.15	31.65	56.00	24.35	QP
3.205	12.27	0.30	9.50	0.15	22.22	46.00	23.78	Average
5.113	22.50	0.29	9.50	0.18	32.47	60.00	27.53	QP
5.113	11.55	0.29	9.50	0.18	21.52	50.00	28.48	Average

Mode: 802.11b CH2412MHz

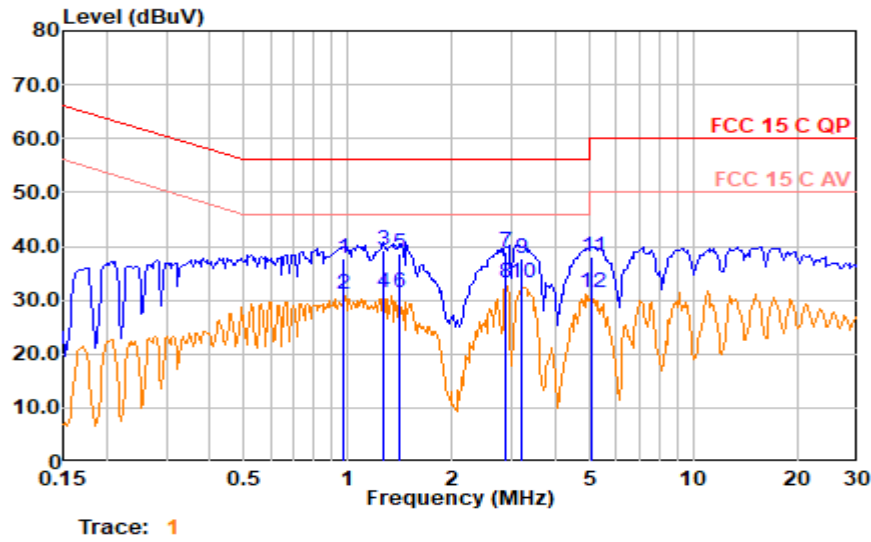

Polarization at Neutral

Frequency (MHz)	Meter Reading dB (μV)	AMN Factor (dB)	Aux Factor (dB)	Cable Loss (dB)	Emission Level dB (μV)	Limits dB (μV)	Margin (dB)	Remark
0.972	28.03	0.20	9.50	0.14	37.87	56.00	18.13	QP
0.972	21.40	0.20	9.50	0.14	31.24	46.00	14.76	Average
1.271	29.55	0.20	9.50	0.14	39.39	56.00	16.61	QP
1.271	21.69	0.20	9.50	0.14	31.53	46.00	14.47	Average
1.418	28.76	0.20	9.50	0.14	38.60	56.00	17.40	QP
1.418	21.48	0.20	9.50	0.14	31.32	46.00	14.68	Average
2.882	28.99	0.20	9.50	0.14	38.83	56.00	17.17	QP
2.882	23.35	0.20	9.50	0.14	33.19	46.00	12.81	Average
3.205	27.87	0.20	9.50	0.15	37.72	56.00	18.28	QP
3.205	23.29	0.20	9.50	0.15	33.13	46.00	12.87	Average
5.113	28.11	0.20	9.50	0.18	37.99	60.00	22.01	QP
5.113	21.51	0.20	9.50	0.18	31.39	50.00	18.61	Average

4 RADIATED EMISSION TEST


4.1 Test Equipment

The following test equipment are used during the radiated emission test in a semi-anechoic chamber:


Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Preamplifier	Agilent	8447D	2944A10548	2025.02.22	1 Year
2.	Preamplifier	HP	8449B	3008A00864	2025.02.22	1 Year
3.	EXA Signal Analyzer	Agilent	N9010A	MY52221182	2024.08.09 2025.08.09	1 Year
4.	Test Receiver	R&S	ESCI	101303	2025.02.22	1 Year
5.	Loop Antenna	Schaffner	HLA6120	1193	2025.08.04	1 Year
6.	Bilog Antenna+ 6dB Attenuator	Schwarzbeck	VULB 9168+ EMCI-N-6-06	708+AT-N0638	2025.01.15	1 Year
7.	Horn Antenna	EMCO	3115	96074878	2024.07.25 2025.07.25	1 Year
8.	Horn Antenna	EMCO	3116	00062643	2025.01.21	2 Year
9.	RE Cable-1m+ Coaxial Switch	HARBOUR+ ANRITSU	RE Cable-1m+ MP59B	RE-1m-00x+ 6200655086	2025.02.22	1 Year
10.	RE Cable-3m+ RE Cable-10m	TIMES+ SCHAFFNER	LMR400-NMNM -3.0M+RG 212U-MIL C 17	20250211-0001 +RE-10m-001	2025.02.22	1 Year
11.	Coaxial Cable(CH.3)	Mini-Circuits	FLC-2FT- SMSM+	21112086	2025.02.22	1 Year
12.	RE Cable-5m	TIMES	SFT205-SMNM -5.0M	20250211-0001	2025.02.22	1 Year
13.	Software	Audix	e3	e3.v9.210616	--	--

4.2 Block Diagram of Test Setup


4.2.1 EUT & Peripherals




4.2.2 9kHz to 30MHz

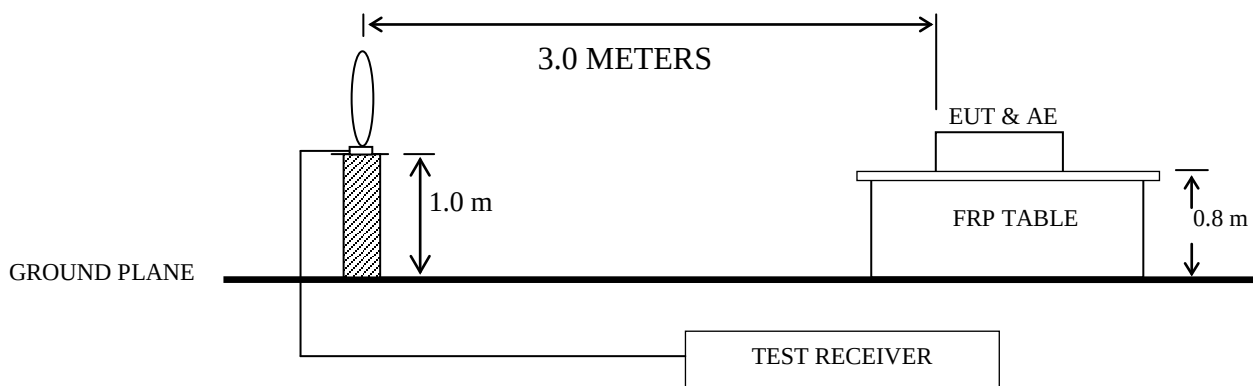

4.2.3 30MHz to 1GHz

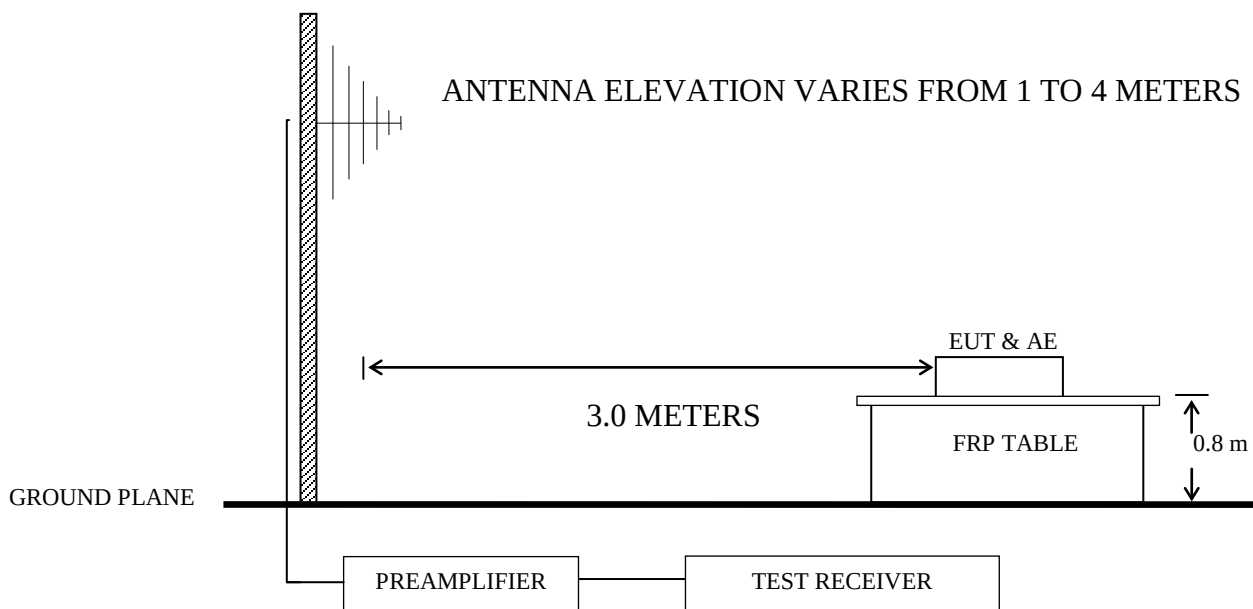

4.2.4 Above 1GHz

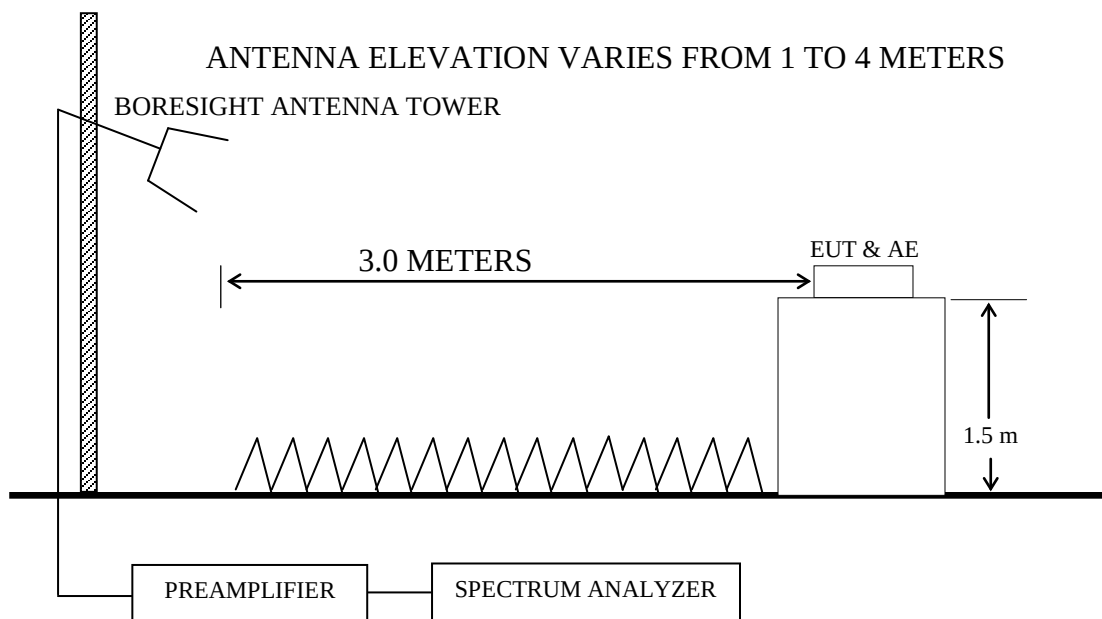

4.3 Radiated Emission Limit (§15.209)

Frequency (MHz)	Distance (m)	Field strength limits (μV/m)	
		(μV/m)	dB (μV/m)
0.009 ~ 0.490	300	2400/F(kHz)	20log(2400/F(kHz))
0.490 ~ 1.705	30	24000/F(kHz)	20log(24000/F(kHz))
1.705 ~ 30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0

NOTE 1 - Emission Level dB (μV/m) = 20 log Emission Level (μV/m)

NOTE 2 - The tighter limit applies at the band edges.

NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

NOTE 4 - The limits shown are based on Quasi-peak value detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. The limits in these three bands are based on average detector.

NOTE 5 - Above 1 GHz, the limit on peak emission is 20 dB above the maximum permitted average emission limit applicable to the EUT

4.4 Test Configuration

The EUT (listed in Sec.2.1) and the simulators (listed in Sec.2.2) were installed as shown on Sec.4.2 to meet FCC requirements and operating in a manner that tends to maximize its emission level in a normal application.

4.5 Operating Condition of EUT

4.5.1 Setup the EUT as shown in Sec. 4.2.

4.5.2 Turn the EUT on.

4.5.3 Connect the EUT and the TTL terminal of Test Fixture through four HCI cables of EUT, as follows (3V3 to VCC, TX to RXD, RX to TXD, GND to GND). Plug the USB terminal of Test Fixture to the USB port of Notebook PC.

4.5.4 Use the software as section 2.3 to select the test mode, then test.

4.5.5 Repeat step 4.5.3 and 4.5.4, until the test of all modes finished.

4.6 Test Procedures

Radiated emission test applies to harmonics/spurs that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209. A pre-amp is necessary for this measurement. For measurement above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.

The EUT was placed on a turntable. Below 1 GHz, the table height is 80 cm above the reference ground plane. Above 1 GHz, the table height is 1.5 m. The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (Calibrated Bilog Antenna) or Horn antenna was used as receiving antenna. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.10:2020 requirements during radiated emission test.

The resolution bandwidth of Test Receiver R&S ESCI was set at 200 Hz from 9kHz to 150kHz, set 9kHz from 150kHz to 30MHz, and set at 120 kHz from 30MHz to 1000MHz.

The resolution bandwidth of Agilent N9010A was set at 1MHz for above 1GHz.

The frequency range from 9 kHz to 25 GHz (Up to 10th harmonics from fundamental frequency) was checked.

All the test results are listed in Sec.4.7.

4.7 Test Results

<PASS>

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Frequency range: below 1GHz (Worst case emission)

No.	Operation	Mode	Channel	Frequency	Data Page
1.	Transmitting	802.11b	11	2462 MHz	P20-21

Note: The emissions between 9kHz to 30MHz were too low against the limit.

Frequency range: above 1GHz (Worst case emission)

No.	Operation	Mode	Channel	Frequency	Data Page
1.	Transmitting	802.11b	11	2462 MHz	P22-25
2.		802.11g	6	2437 MHz	P26-29
3.		802.11n20	6	2437 MHz	P30-33

Band-Edge and Restricted bands:

No.	Operation	Mode	Channel	Frequency	Data Page
1.	Transmitting	802.11b	1	2412 MHz	P34-35
2.			11	2462 MHz	P36-37
3.		802.11g	1	2412 MHz	P38-39
4.			11	2462 MHz	P40-41
5.		802.11n20	1	2412 MHz	P42-43
6.			11	2462 MHz	P44-45

NOTE 1 – Emission Level (dBμV/m) = Read Level (dBμV) + Antenna Factor (dB/m) + Cable Loss (dB) - Preamp Factor (dB)

Margin (dB) = Limits (dBμV/m) - Emission Level (dBμV/m).

NOTE 2 – “QP” means “Quasi-Peak” values

NOTE 3 – 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

NOTE 4 – The emission levels which not reported are too low against the official limit.

NOTE 5 – The emission levels recorded below is data of EUT configured in Side direction, for this direction was the maximum emission direction during the test. The data of Stand & Lying direction are too low against the official limit to be reported.

NOTE 6 – All reading are Quasi-Peak values below or equal to 1GHz, Peak and Average values above 1GHz.


For above 1GHz test, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.

NOTE 7 – The frequency range 2310-2390MHz & 2483.5-2500MHz were tested for Restricted bands.

Radiated emission < 1GHz

Test Date:	2025.10.20	Temp./Hum.:	22°C/51%RH	Test By:	Jarey
------------	------------	-------------	------------	----------	-------


Mode: 802.11b CH2462MHz

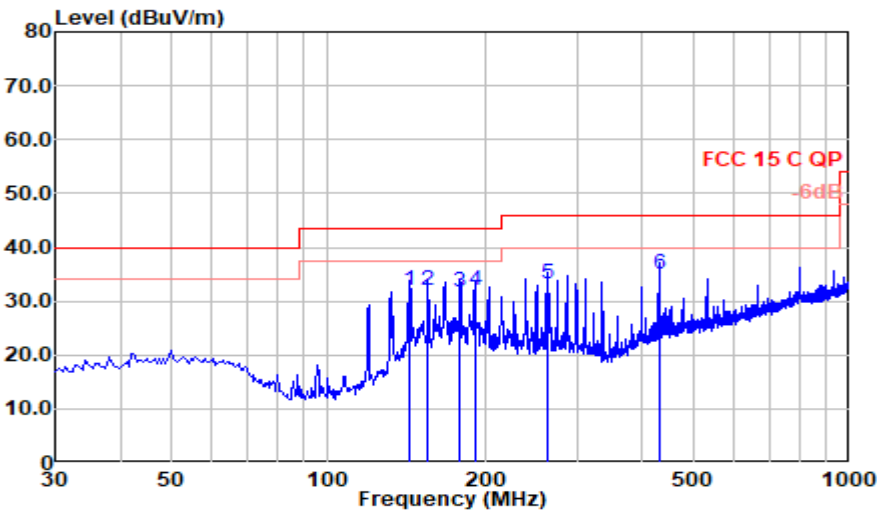

Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
143.005	40.75	18.90	1.34	29.09	31.90	43.50	11.60	QP
155.615	40.34	19.14	1.39	29.00	31.87	43.50	11.63	QP
179.380	41.49	17.66	1.53	29.00	31.68	43.50	11.82	QP
191.020	42.84	16.40	1.59	28.89	31.93	43.50	11.57	QP
262.800	42.14	18.01	1.90	28.76	33.29	46.00	12.71	QP
431.095	39.34	22.34	2.43	28.99	35.12	46.00	10.88	QP

Mode: 802.11b CH2462MHz

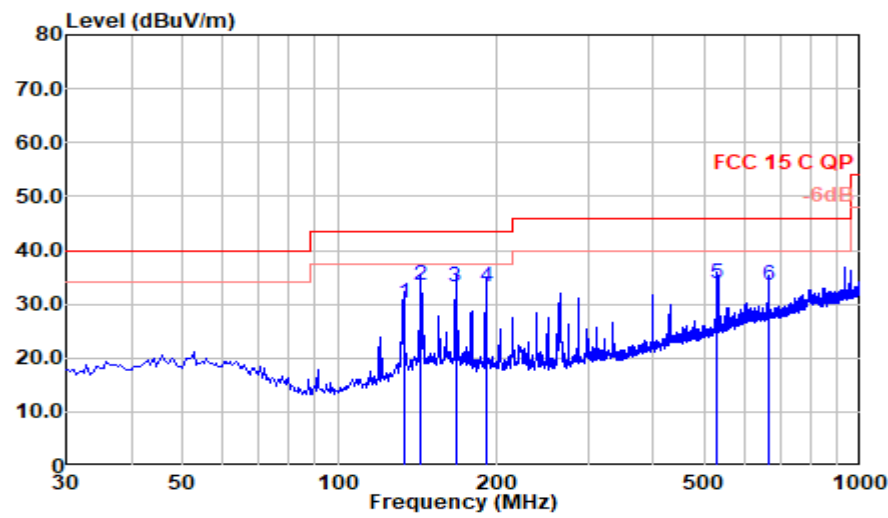


Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
133.305	40.37	17.86	1.30	29.21	30.32	43.50	13.18	QP
143.490	42.24	18.90	1.34	29.08	33.40	43.50	10.10	QP
167.255	41.92	18.87	1.46	29.00	33.25	43.50	10.25	QP
191.505	44.01	16.35	1.59	28.88	33.06	43.50	10.44	QP
531.490	36.08	23.93	2.70	28.92	33.78	46.00	12.22	QP
666.320	32.57	26.30	3.03	28.47	33.43	46.00	12.57	QP

Radiated Emission > 1GHz

Test Date:	2025.10.20	Temp./Hum.:	22°C/51%RH	Test By:	Jarey
------------	------------	-------------	------------	----------	-------


Mode: 802.11b CH2462MHz

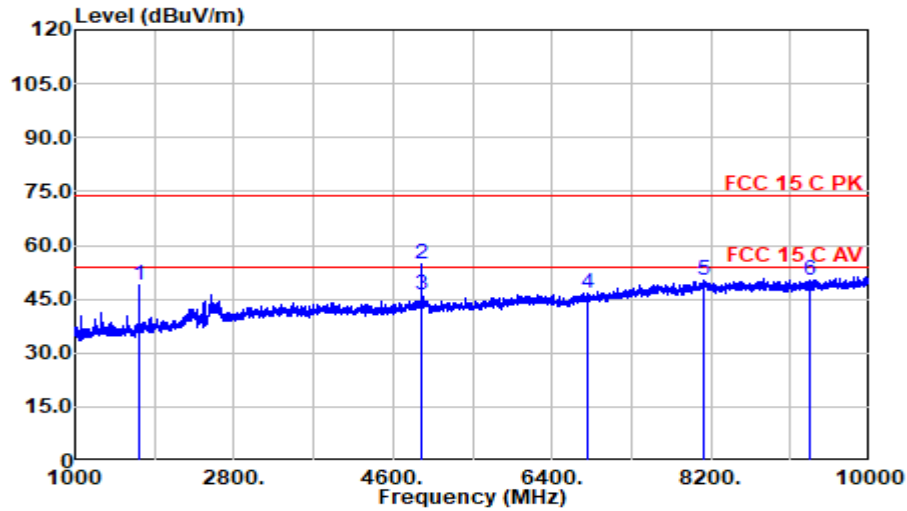

Polarization at Horizontal


Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
1726.750	57.58	25.68	2.32	36.83	48.76	74.00	25.24	Peak
4922.750	54.82	32.25	4.16	36.47	54.76	74.00	19.24	Peak
4922.750	46.38	32.25	4.16	36.47	46.32	54.00	7.68	Average
6807.625	44.14	34.60	4.96	36.88	46.82	74.00	27.18	Peak
8110.250	45.46	36.90	5.23	37.30	50.28	74.00	23.72	Peak
9313.000	44.92	37.33	5.34	37.20	50.39	74.00	23.61	Peak

Mode: 802.11b CH2462MHz

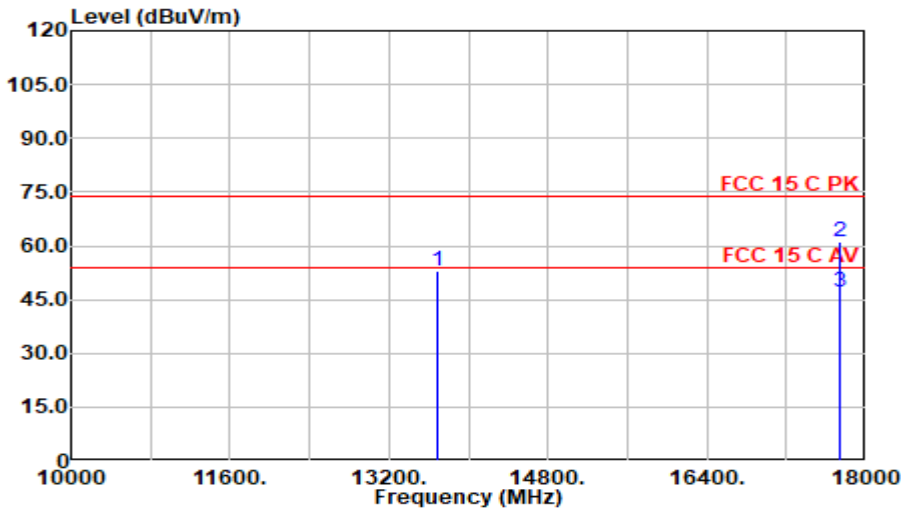


Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
13694.750	41.57	40.19	6.93	35.86	52.84	74.00	21.16	Peak
17742.880	42.21	45.41	7.98	34.50	61.11	74.00	12.89	Peak
17742.880	28.32	45.41	7.98	34.50	47.22	54.00	6.78	Average

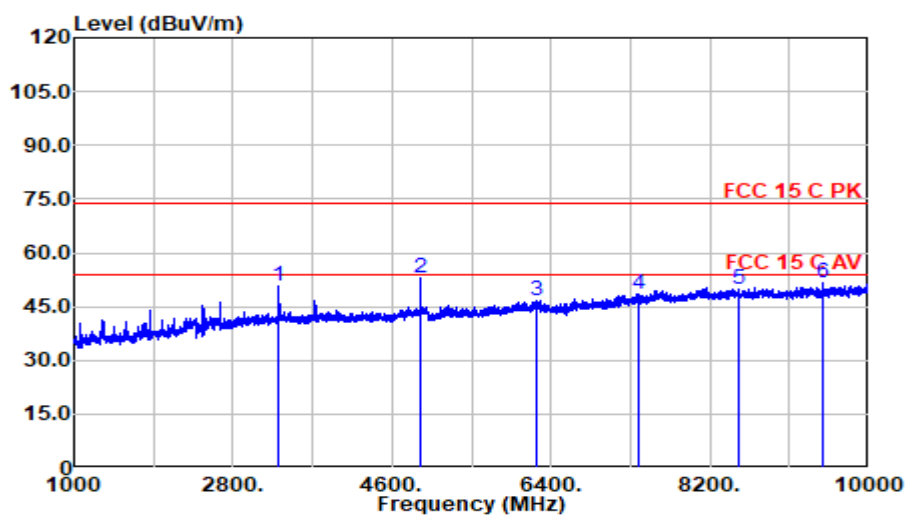Mode: 802.11b CH2462MHz


Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
3322.625	52.40	30.55	3.25	35.65	50.54	74.00	23.46	Peak
4922.750	53.02	32.25	4.16	36.47	52.96	74.00	21.04	Peak
6240.250	44.51	33.90	4.85	36.83	46.43	74.00	27.57	Peak
7389.875	44.45	36.08	5.05	37.06	48.52	74.00	25.48	Peak
8535.250	44.50	37.40	5.25	37.30	49.85	74.00	24.15	Peak
9474.500	46.08	37.35	5.39	37.15	51.67	74.00	22.33	Peak

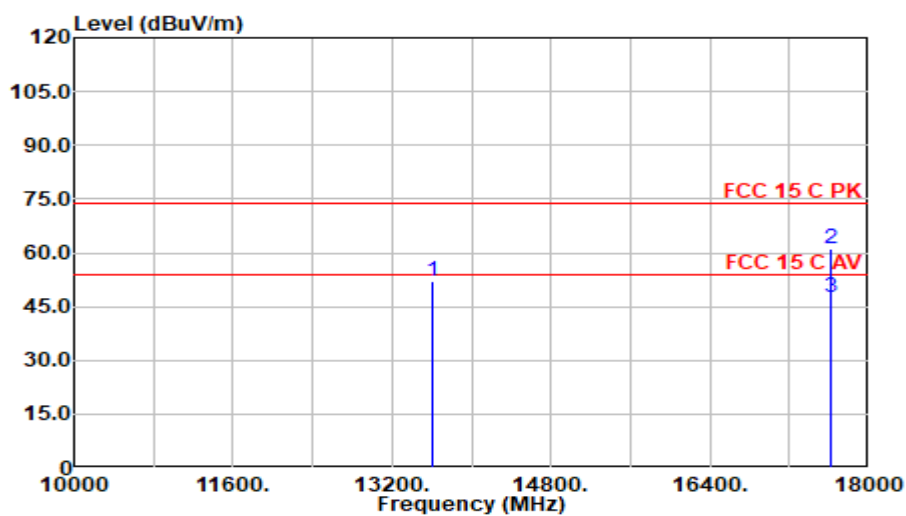Mode: 802.11b CH2462MHz


Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
13616.130	40.99	40.03	6.90	35.88	52.04	74.00	21.96	Peak
17611.130	43.00	44.58	7.95	34.55	60.97	74.00	13.03	Peak
17611.130	29.44	44.58	7.95	34.55	47.41	54.00	6.59	Average

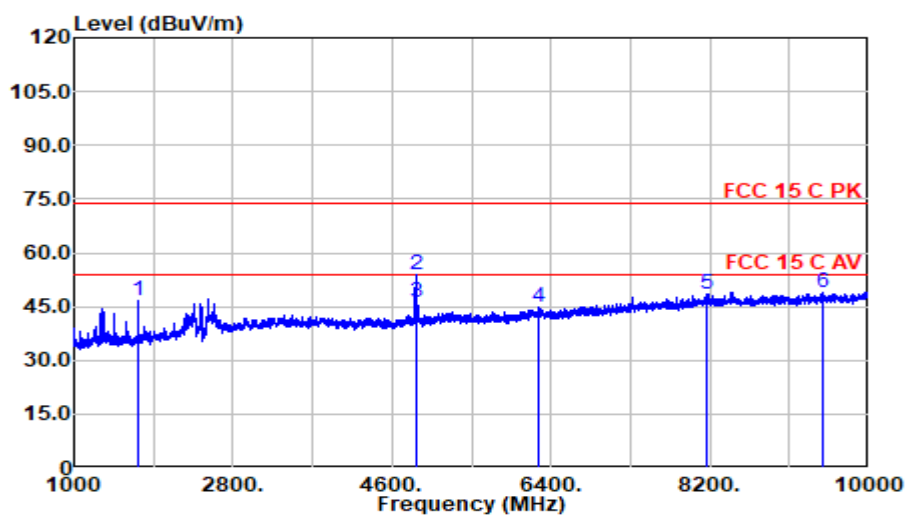Mode: 802.11g CH2437MHz


Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
1731.000	55.60	25.76	2.32	36.83	46.86	74.00	27.14	Peak
4876.000	53.69	32.30	4.13	36.45	53.67	74.00	20.33	Peak
4876.000	46.27	32.30	4.13	36.45	46.25	54.00	7.75	Average
6270.000	42.73	33.86	4.86	36.83	44.62	74.00	29.38	Peak
8161.250	43.63	36.92	5.23	37.30	48.48	74.00	25.52	Peak
9476.625	43.33	37.35	5.39	37.15	48.92	74.00	25.08	Peak

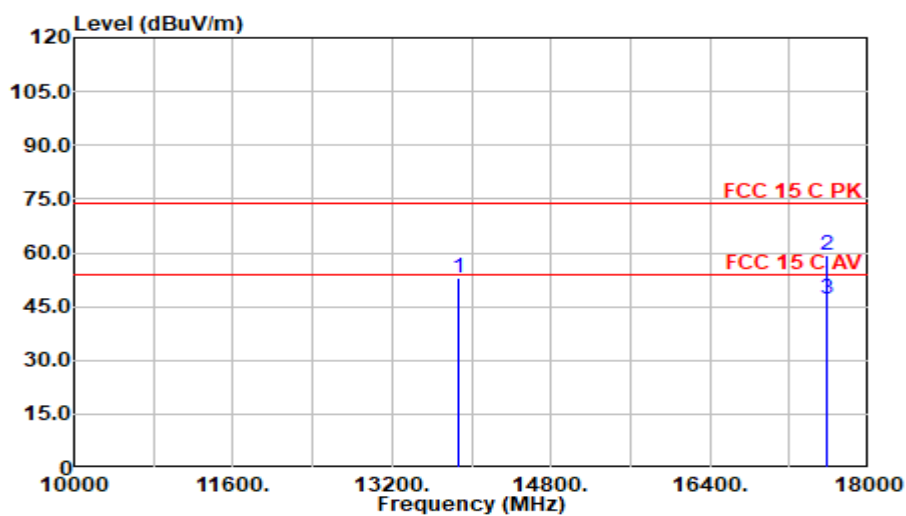Mode: 802.11g CH2437MHz

Polarization at Horizontal


Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
13862.630	41.08	40.69	7.00	35.83	52.95	74.00	21.05	Peak
17583.500	41.78	44.35	7.94	34.56	59.51	74.00	14.49	Peak
17583.500	29.38	44.35	7.94	34.56	47.11	54.00	6.89	Average

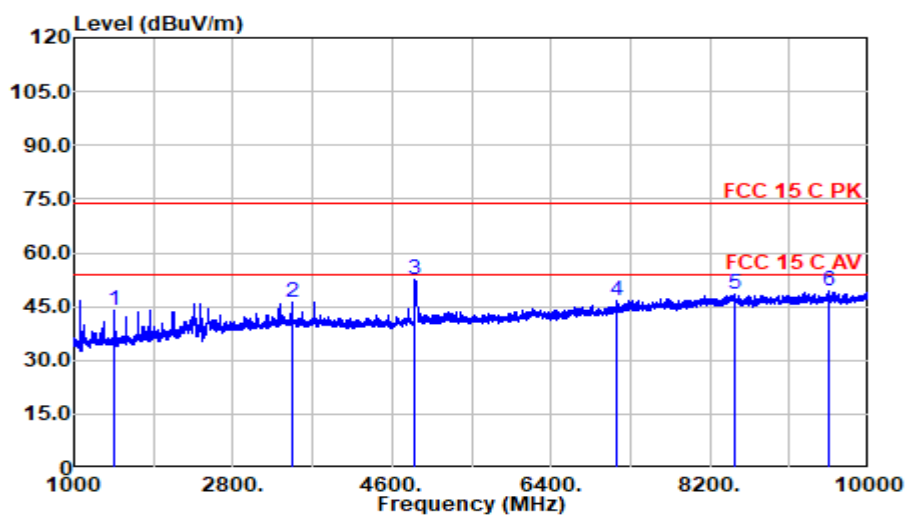Mode: 802.11g CH2437MHz

Polarization at Vertical


Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
1461.125	54.12	24.62	2.14	36.97	43.91	74.00	30.09	Peak
3465.000	48.10	30.60	3.33	35.75	46.28	74.00	27.72	Peak
4863.250	52.67	32.30	4.13	36.45	52.65	74.00	21.35	Peak
7147.625	43.59	35.10	5.01	36.96	46.73	74.00	27.27	Peak
8473.625	43.02	37.45	5.25	37.30	48.42	74.00	25.58	Peak
9557.375	43.70	37.40	5.41	37.13	49.39	74.00	24.61	Peak

Mode: 802.11g CH2437MHz

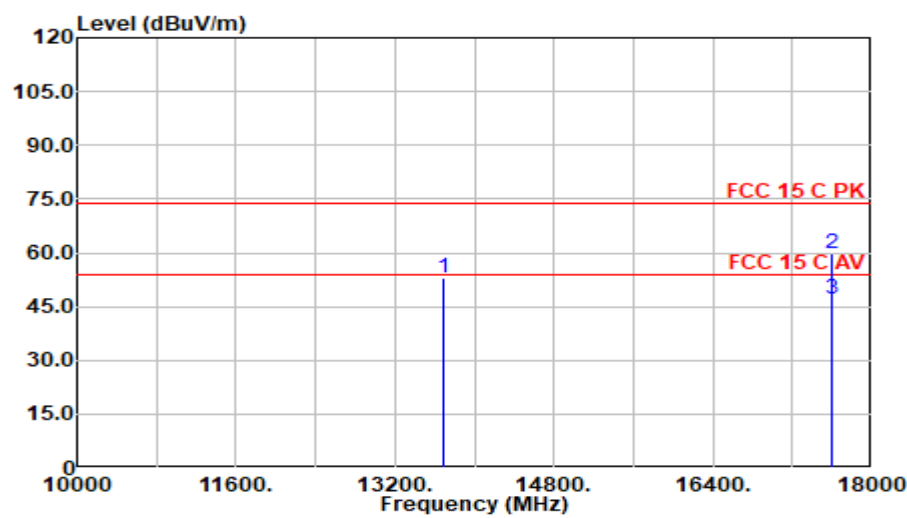

Polarization at Vertical


Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
13682.000	41.57	40.16	6.93	35.86	52.80	74.00	21.20	Peak
17594.130	42.14	44.45	7.94	34.56	59.97	74.00	14.03	Peak
17594.130	29.41	44.45	7.94	34.56	47.25	54.00	6.75	Average

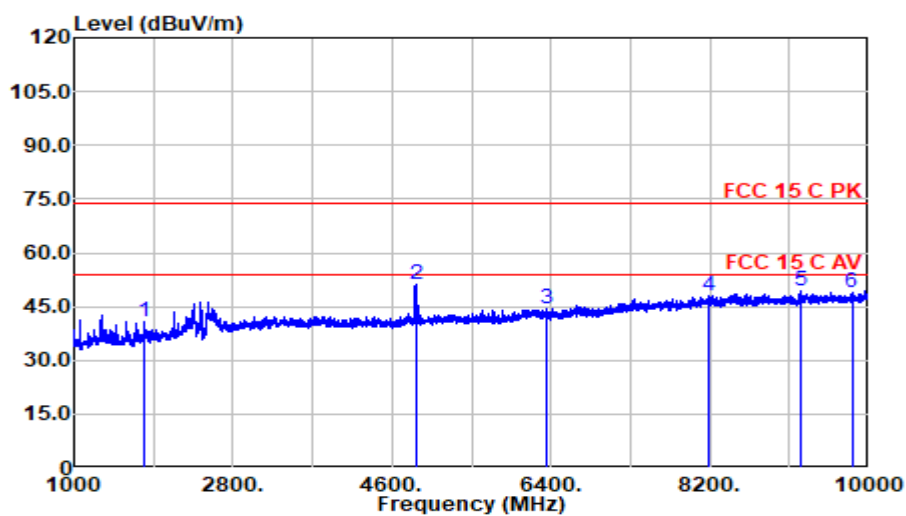Mode: 802.11n CH2437MHz

Polarization at Horizontal


Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
1794.750	49.34	25.74	2.36	36.79	40.65	74.00	33.35	Peak
4882.375	51.33	32.30	4.14	36.46	51.31	74.00	22.69	Peak
6346.500	42.33	33.80	4.88	36.84	44.17	74.00	29.83	Peak
8197.375	43.22	36.99	5.23	37.30	48.15	74.00	25.85	Peak
9225.875	43.97	37.40	5.31	37.23	49.46	74.00	24.54	Peak
9808.125	43.00	37.50	5.47	37.06	48.92	74.00	25.08	Peak

Mode: 802.11n CH2437MHz

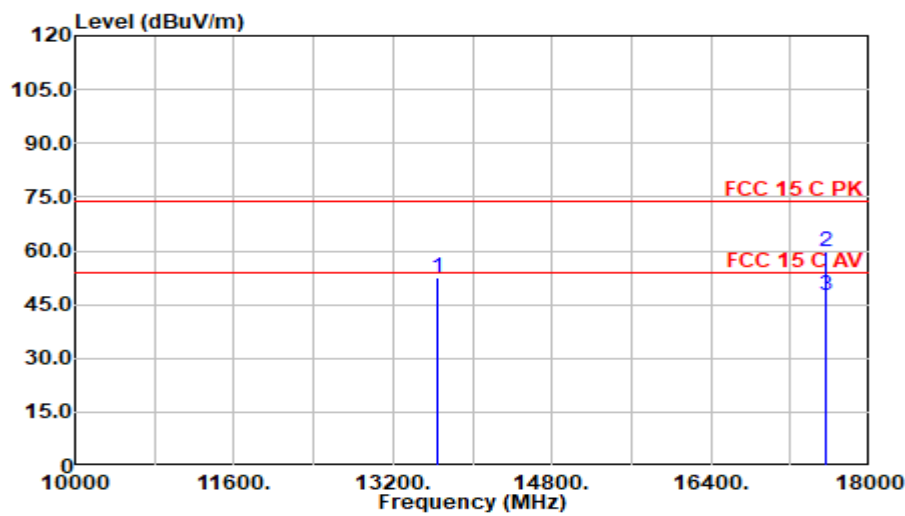

Polarization at Horizontal


Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
13643.750	41.27	40.09	6.91	35.87	52.40	74.00	21.60	Peak
17551.630	42.49	44.07	7.93	34.58	59.91	74.00	14.09	Peak
17551.630	30.25	44.07	7.93	34.58	47.67	54.00	6.33	Average

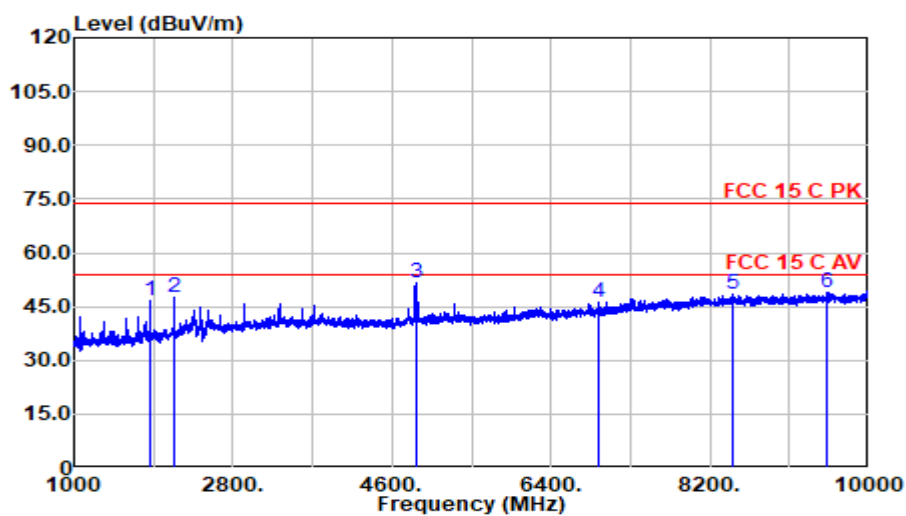Mode: 802.11n CH2437MHz

Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
1858.500	54.74	26.07	2.40	36.76	46.44	74.00	27.56	Peak
2128.375	54.62	26.84	2.56	36.50	47.52	74.00	26.48	Peak
4876.000	51.82	32.30	4.13	36.45	51.80	74.00	22.20	Peak
6945.750	43.51	34.60	4.97	36.89	46.19	74.00	27.81	Peak
8467.250	42.99	37.47	5.25	37.30	48.40	74.00	25.60	Peak
9531.875	43.40	37.40	5.41	37.14	49.07	74.00	24.93	Peak

Mode: 802.11n CH2437MHz

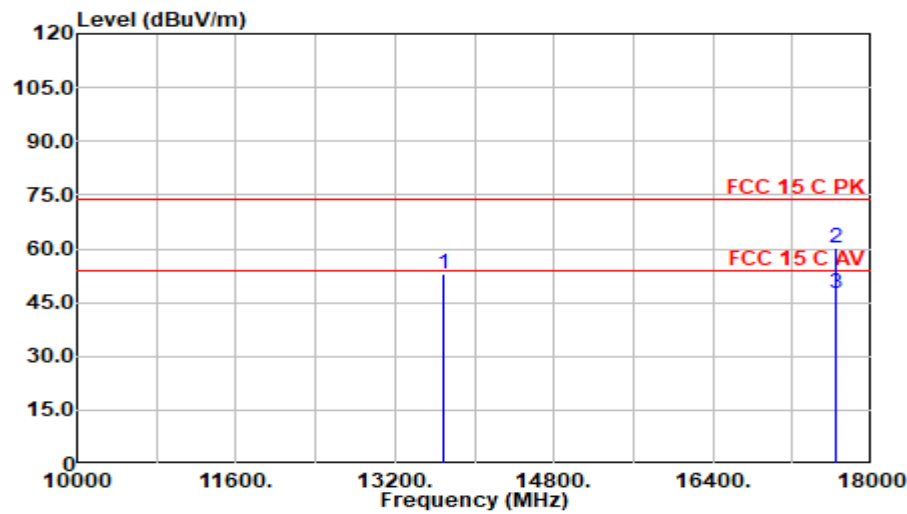


Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
13696.880	41.58	40.19	6.93	35.86	52.85	74.00	21.15	Peak
17643.000	41.98	44.80	7.96	34.54	60.20	74.00	13.80	Peak
17643.000	29.40	44.80	7.96	34.54	47.62	54.00	6.38	Average

Band-Edge and Restricted bands:

Test Date:	2025.10.20	Temp./Hum.:	22°C/51%RH	Test By:	Jarey
------------	------------	-------------	------------	----------	-------


Mode: 802.11b CH2412MHz

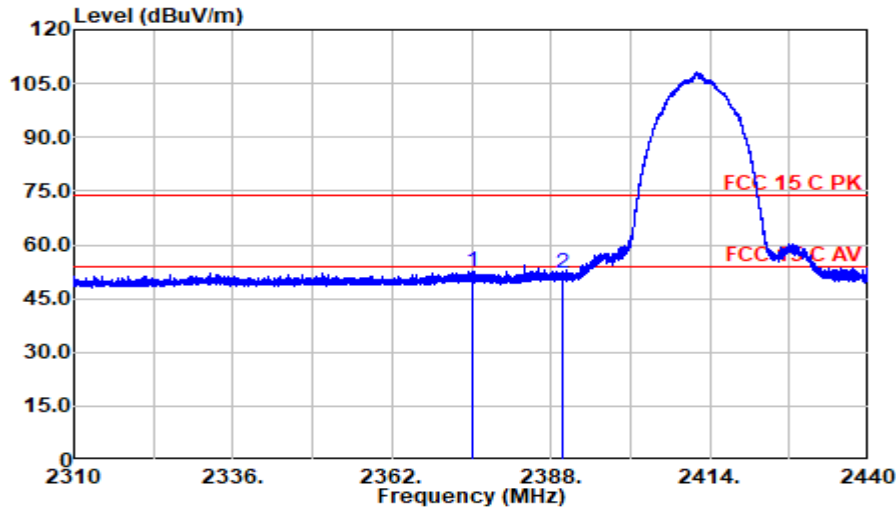

Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2375.130	58.24	27.80	2.70	36.15	52.60	74.00	21.40	Peak
2390.000	57.83	27.80	2.71	36.13	52.22	74.00	21.78	Peak


Mode: 802.11b CH2412MHz

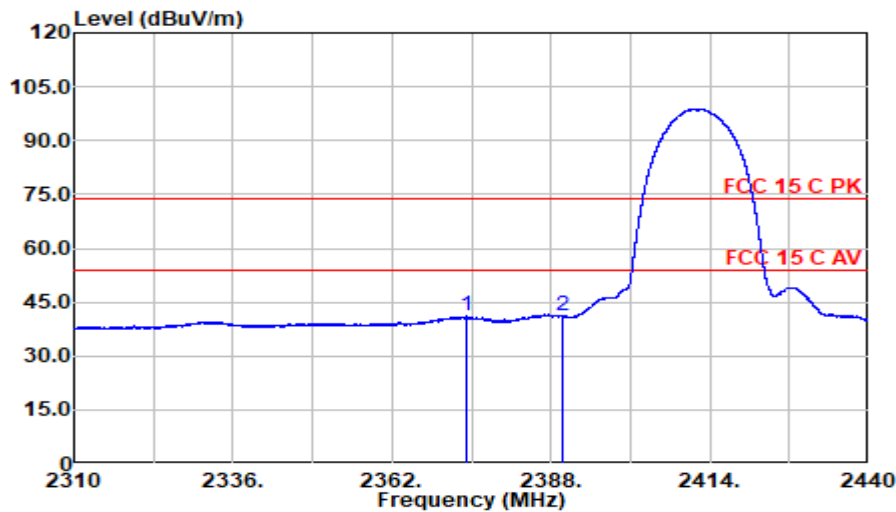

Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2374.220	46.67	27.80	2.70	36.15	41.02	54.00	12.98	Average
2390.000	46.80	27.80	2.71	36.13	41.18	54.00	12.82	Average


Mode: 802.11b CH2412MHz

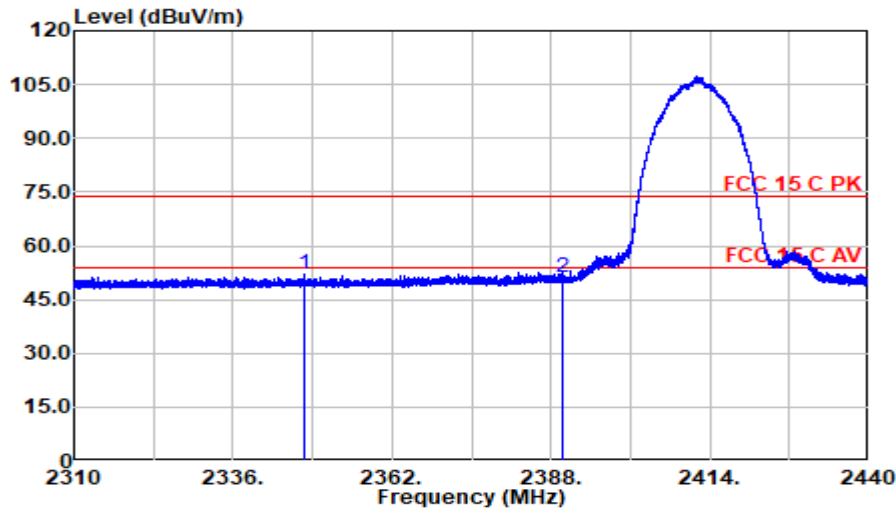

Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2347.765	57.69	27.78	2.69	36.19	51.98	74.00	22.02	Peak
2390.000	56.63	27.80	2.71	36.13	51.02	74.00	22.98	Peak


Mode: 802.11b CH2412MHz

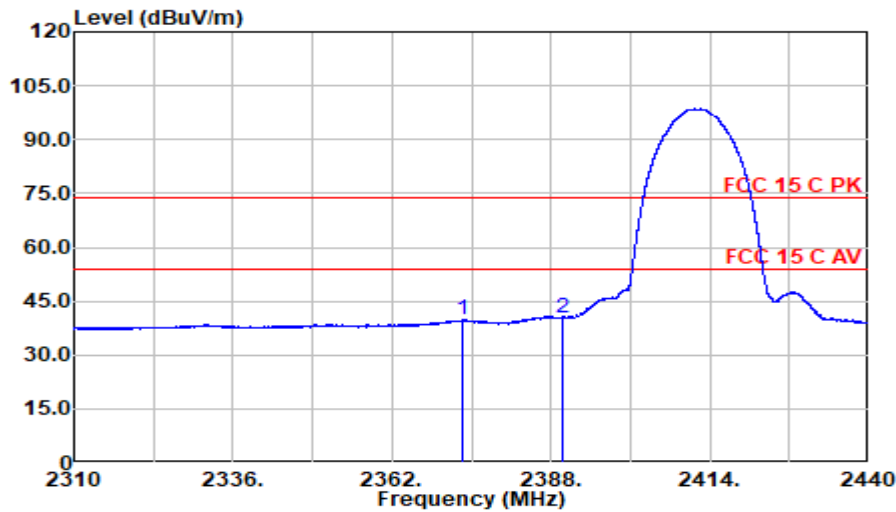

Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2373.684	45.53	27.80	2.70	36.15	39.88	54.00	14.12	Average
2390.000	46.04	27.80	2.71	36.13	40.43	54.00	13.57	Average


Mode: 802.11b CH2462MHz

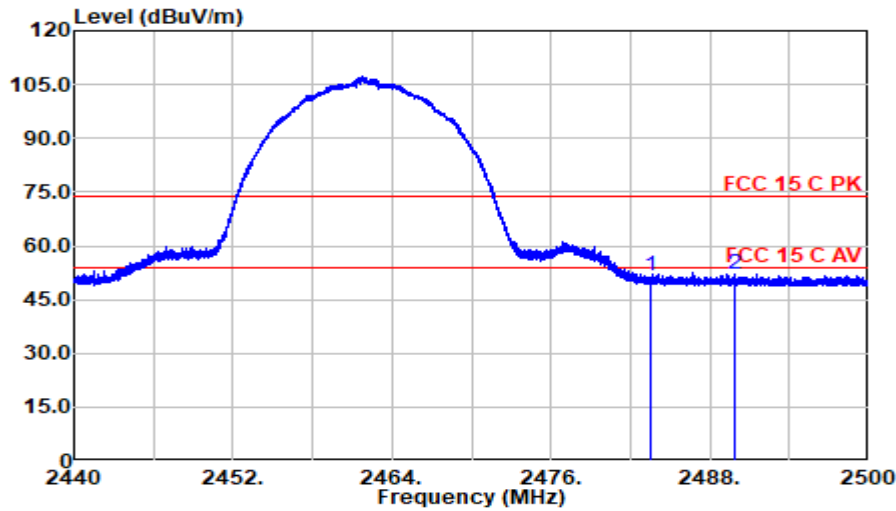

Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	57.32	27.50	2.76	36.01	51.57	74.00	22.43	Peak
2489.823	57.97	27.50	2.76	36.00	52.23	74.00	21.77	Peak


Mode: 802.11b CH2462MHz

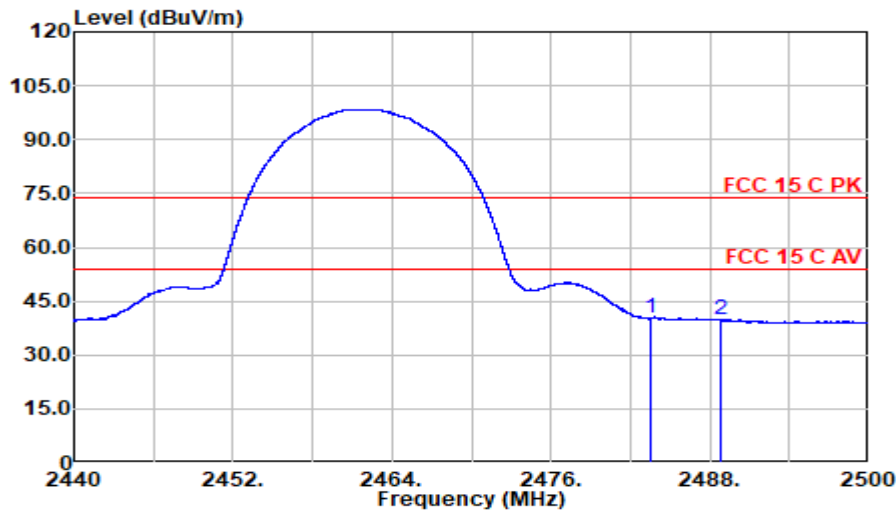

Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	45.83	27.50	2.76	36.01	40.08	54.00	13.92	Average
2488.758	45.55	27.50	2.76	36.00	39.82	54.00	14.18	Average


Mode: 802.11b CH2462MHz

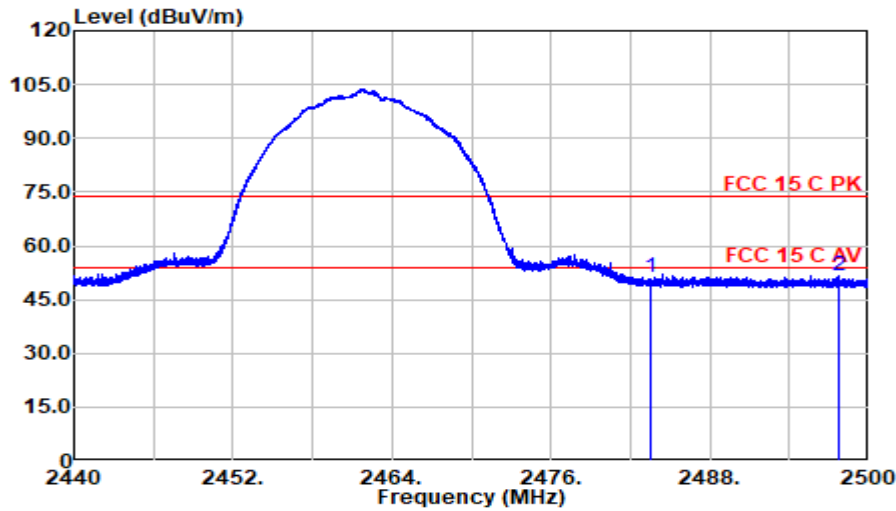

Polarization at Vertical


Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	56.71	27.50	2.76	36.01	50.96	74.00	23.04	Peak
2497.712	57.30	27.50	2.77	35.99	51.58	74.00	22.42	Peak

Mode: 802.11b CH2462MHz

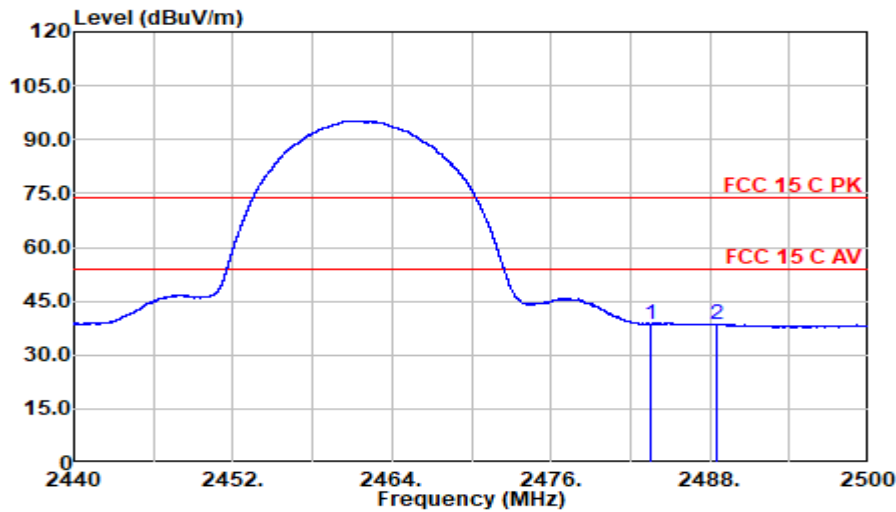


Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	44.33	27.50	2.76	36.01	38.59	54.00	15.41	Average
2488.518	44.34	27.50	2.76	36.00	38.60	54.00	15.40	Average

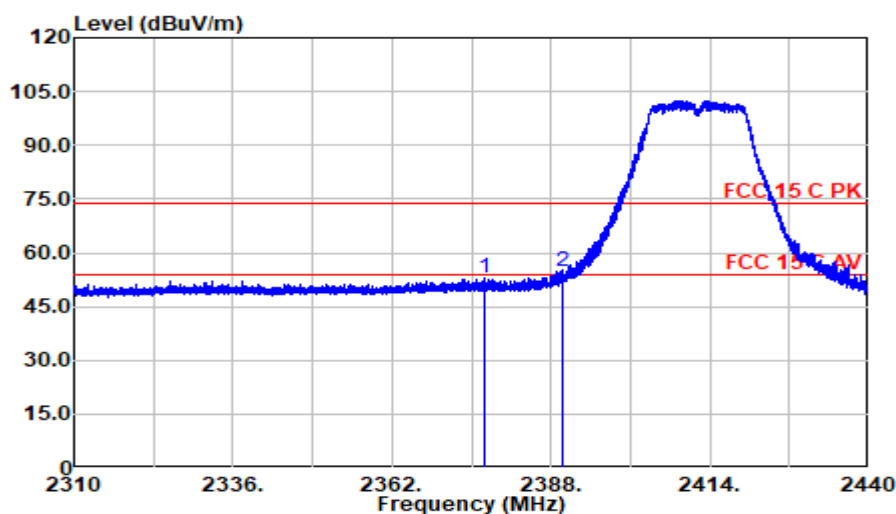Mode: 802.11g CH2412MHz


Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2376.982	58.70	27.80	2.70	36.15	53.06	74.00	20.94	Peak
2390.000	60.22	27.80	2.71	36.13	54.60	74.00	19.40	Peak

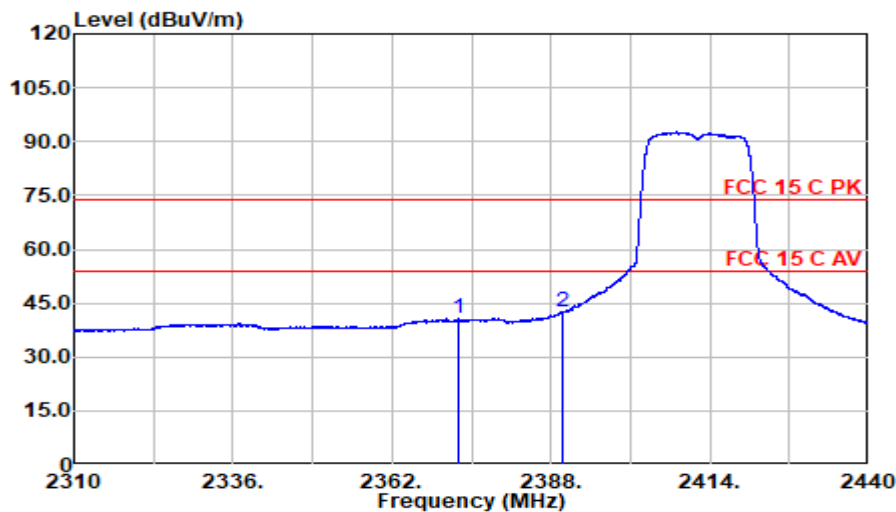Mode: 802.11g CH2412MHz


Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2372.774	46.29	27.80	2.70	36.15	40.64	54.00	13.36	Average
2390.000	48.28	27.80	2.71	36.13	42.66	54.00	11.34	Average

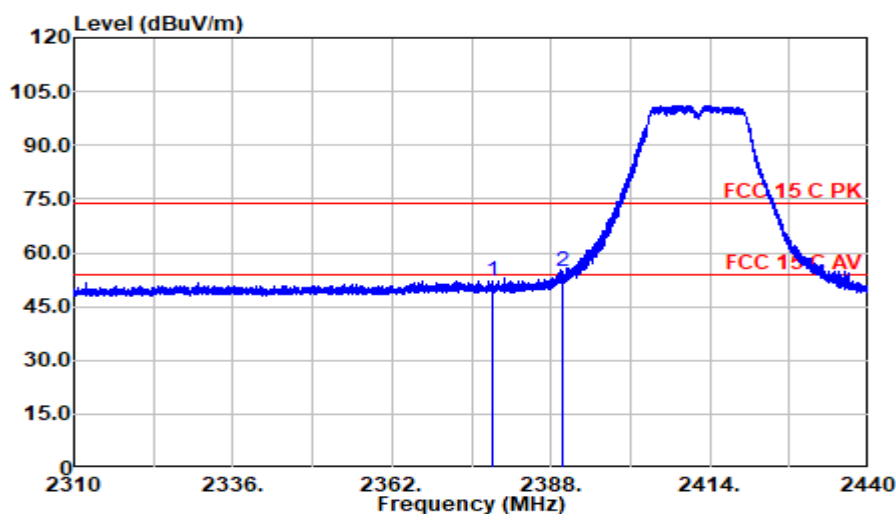Mode: 802.11g CH2412MHz


Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2378.494	57.87	27.80	2.71	36.14	52.24	74.00	21.76	Peak
2390.000	60.32	27.80	2.71	36.13	54.71	74.00	19.29	Peak

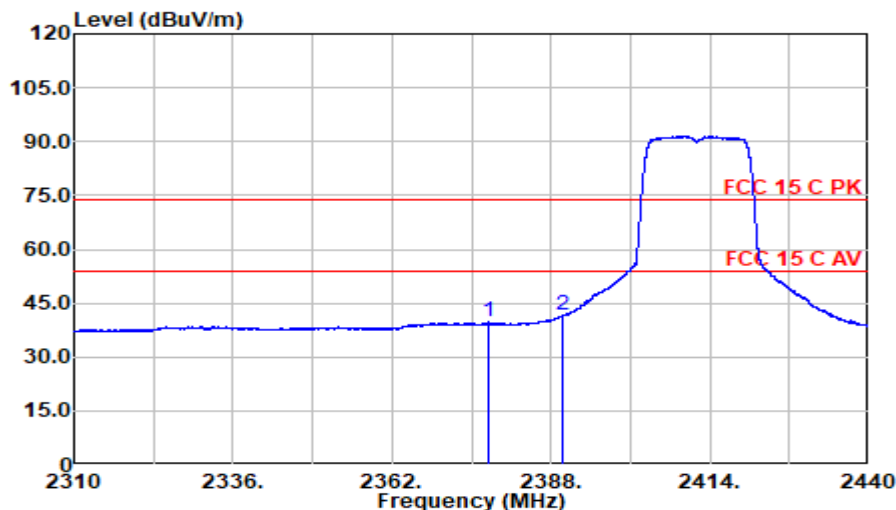Mode: 802.11g CH2412MHz


Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2377.925	45.33	27.80	2.70	36.15	39.69	54.00	14.31	Average
2390.000	47.15	27.80	2.71	36.13	41.54	54.00	12.46	Average

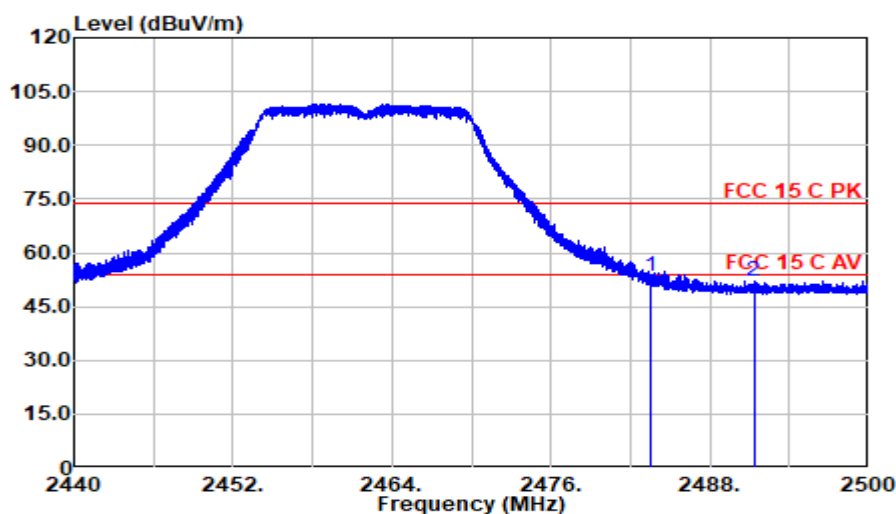Mode: 802.11g CH2462MHz

Polarization at Horizontal


Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	59.18	27.50	2.76	36.01	53.44	74.00	20.56	Peak
2491.315	57.76	27.50	2.77	36.00	52.03	74.00	21.97	Peak

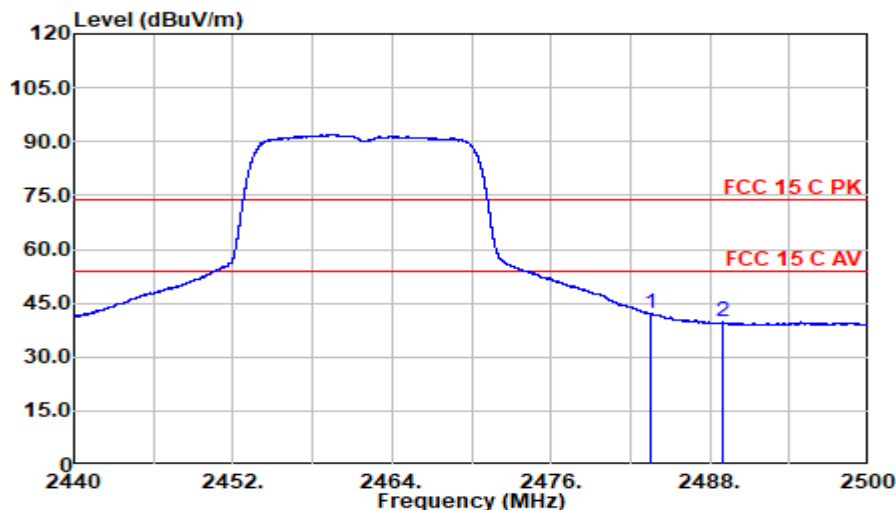Mode: 802.11g CH2462MHz

Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	47.74	27.50	2.76	36.01	42.00	54.00	12.00	Average
2488.998	45.48	27.50	2.76	36.00	39.74	54.00	14.26	Average


Mode: 802.11g CH2462MHz

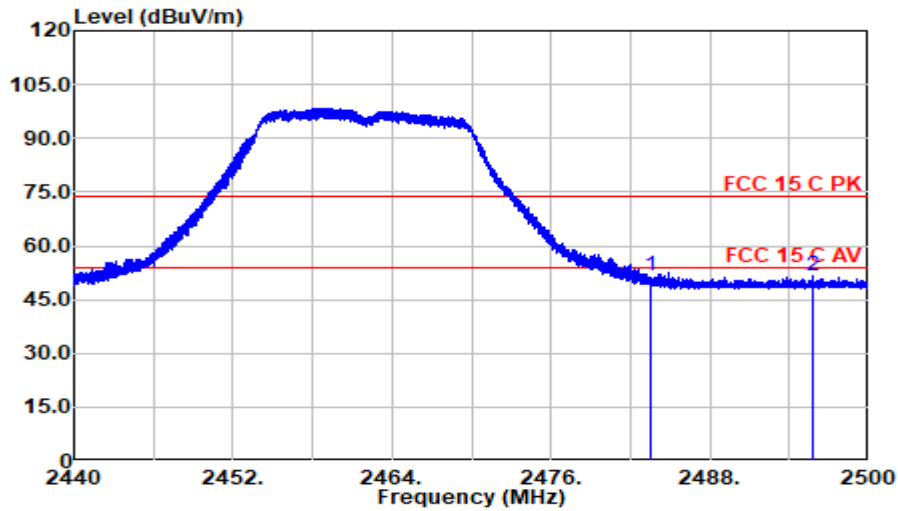

Polarization at Vertical


Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	57.30	27.50	2.76	36.01	51.55	74.00	22.45	Peak
2495.792	57.12	27.50	2.77	35.99	51.40	74.00	22.60	Peak

Mode: 802.11g CH2462MHz

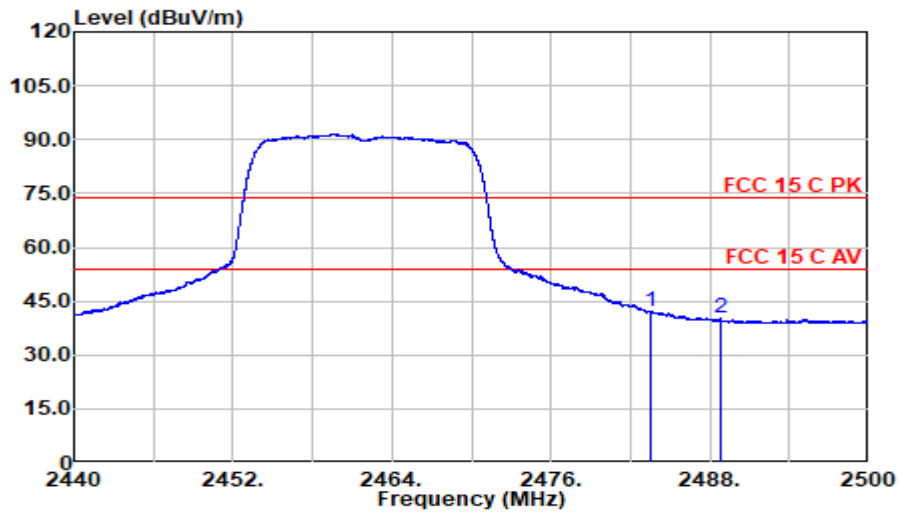


Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	47.84	27.50	2.76	36.01	42.09	54.00	11.91	Average
2488.780	45.82	27.50	2.76	36.00	40.08	54.00	13.92	Average

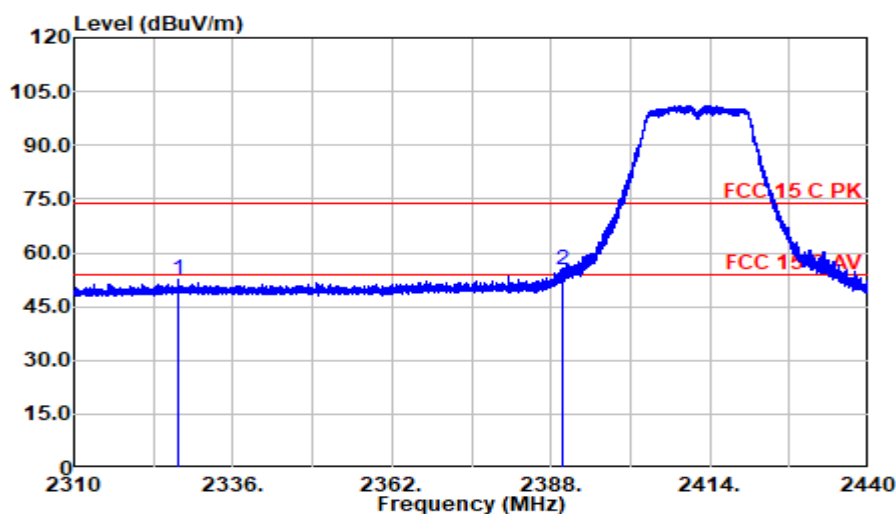Mode: 802.11n CH2412MHz

Polarization at Horizontal


Frequency (MHz)	Meter Reading dB (μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	Margin (dB)	Remark
2327.127	58.43	27.62	2.68	36.21	52.51	74.00	21.49	Peak
2390.000	60.81	27.80	2.71	36.13	55.20	74.00	18.80	Peak

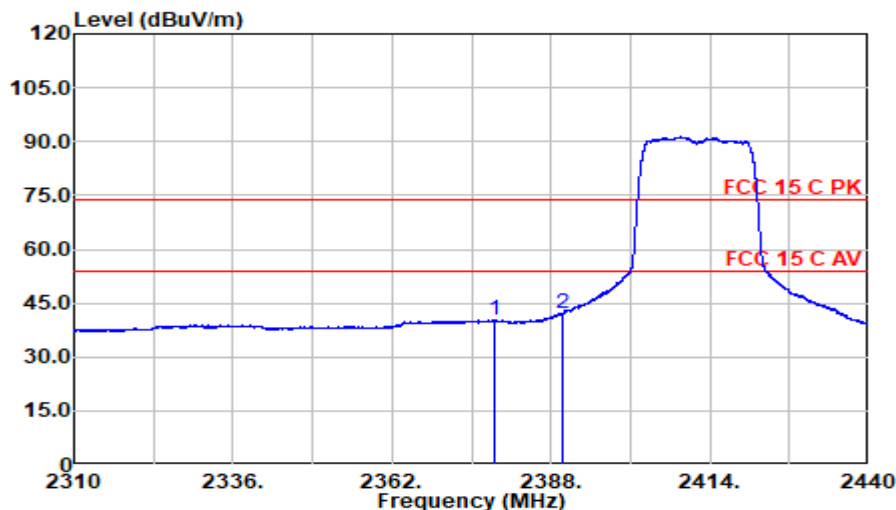Mode: 802.11n CH2412MHz

Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	Margin (dB)	Remark
2378.770	45.97	27.80	2.71	36.14	40.33	54.00	13.67	Average
2390.000	47.84	27.80	2.71	36.13	42.22	54.00	11.78	Average


Mode: 802.11n CH2412MHz

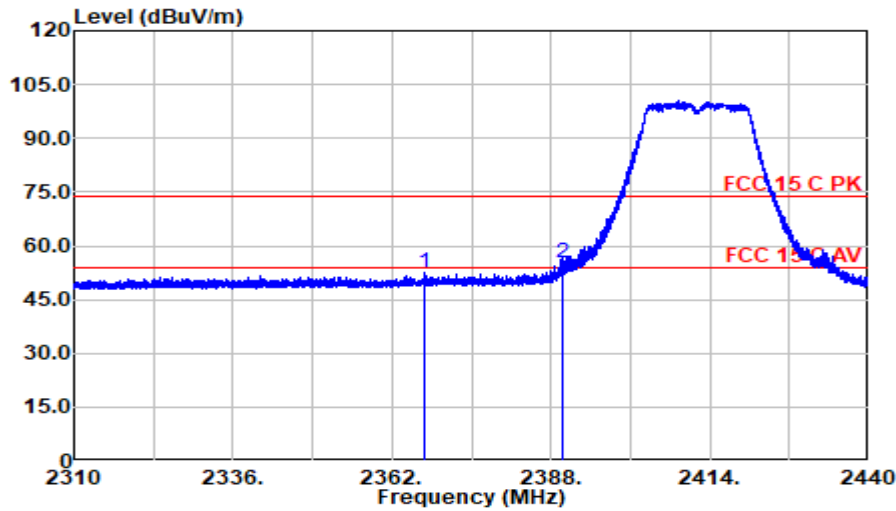

Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2367.330	58.08	27.80	2.70	36.16	52.42	74.00	21.58	Peak
2390.000	60.92	27.80	2.71	36.13	55.30	74.00	18.70	Peak


Mode: 802.11n CH2412MHz

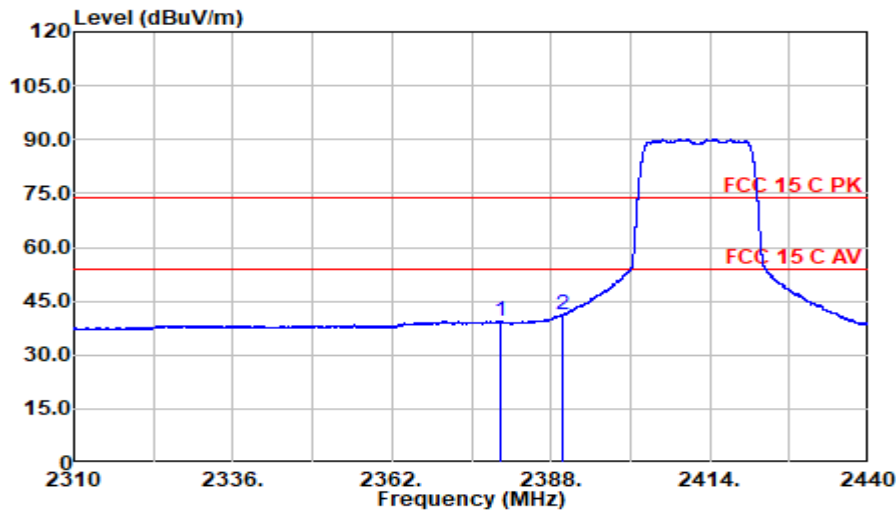

Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2379.875	44.96	27.80	2.71	36.14	39.32	54.00	14.68	Average
2390.000	46.83	27.80	2.71	36.13	41.21	54.00	12.79	Average


Mode: 802.11n CH2462MHz

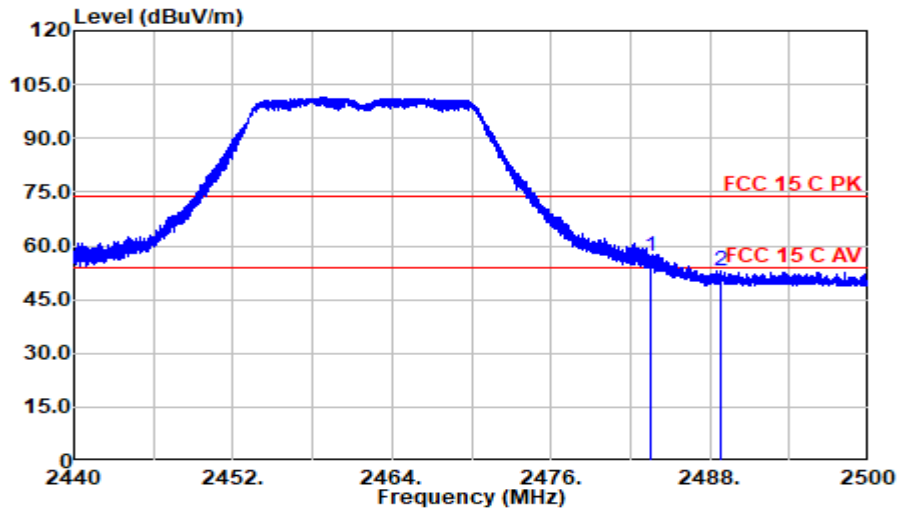

Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	62.82	27.50	2.76	36.01	57.07	74.00	16.93	Peak
2488.802	58.71	27.50	2.76	36.00	52.97	74.00	21.03	Peak


Mode: 802.11n CH2462MHz

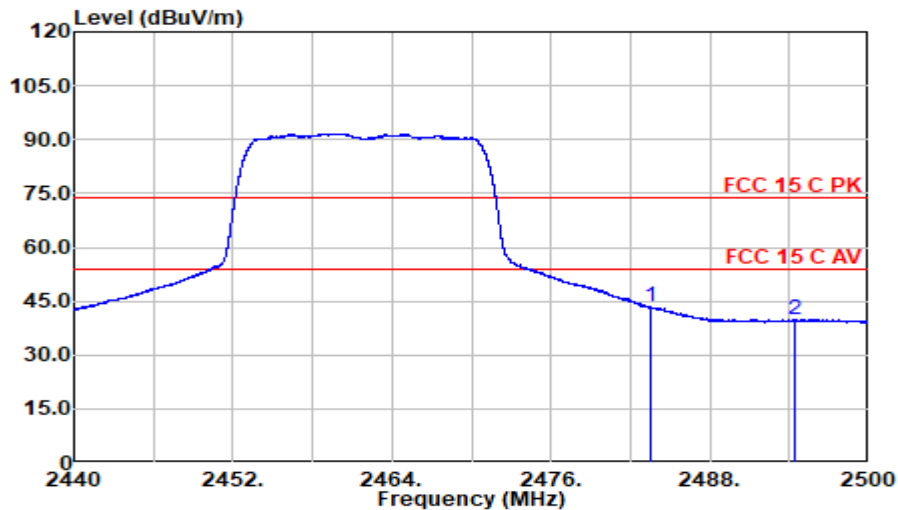

Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	49.06	27.50	2.76	36.01	43.32	54.00	10.68	Average
2494.465	45.77	27.50	2.77	35.99	40.04	54.00	13.96	Average


Mode: 802.11n CH2462MHz

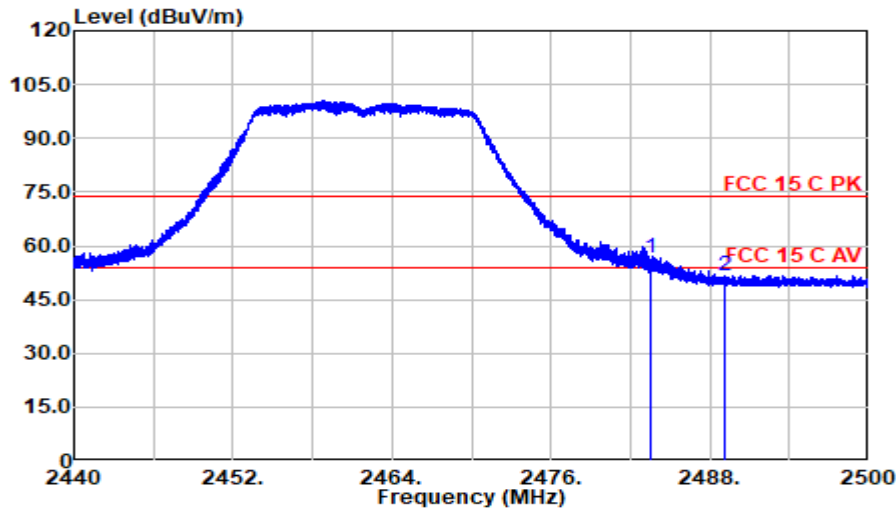

Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	62.54	27.50	2.76	36.01	56.79	74.00	17.21	Peak
2489.163	57.54	27.50	2.76	36.00	51.80	74.00	22.20	Peak

Mode: 802.11n CH2462MHz

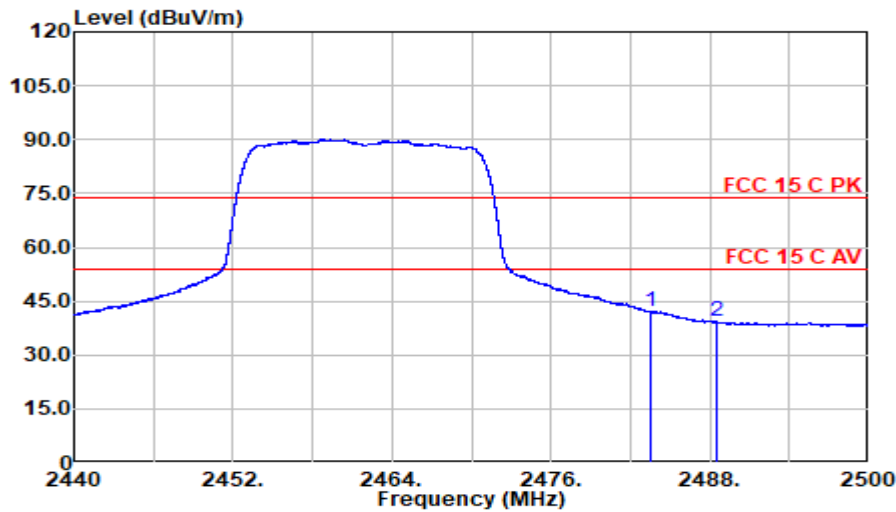

Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	48.03	27.50	2.76	36.01	42.28	54.00	11.72	Average
2488.495	44.96	27.50	2.76	36.00	39.22	54.00	14.78	Average


5 99% OCCUPIED BANDWIDTH MEASUREMENT

5.1 Test Equipment

The following test equipment was used during the Emission Bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2024.08.09 2025.08.09	1 Year
2.	RF Cable	Mini-Circuits	FLC-3FT-SM SM+	22022838	2024.08.09 2025.08.09	1 Year
3.	20 dB Attenuator	Mini-Circuits	BW-S20W2+	2172	2025.02.22	1 Year

5.2 Block Diagram of Test Setup



5.3 Operating Condition of EUT

The software as section 2.3 was used to enable the EUT to change the test mode one by one.

5.4 Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of 99% power bandwidth was measure by spectrum analyzer with settings: Span = between 1.5 times and 5.0 times of the OBW, RBW = 1% to 5% of the OBW, VBW $\geq 3 \times$ RBW, Detector = Peak, Trace = Max Hold. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

The test procedure is defined in ANSI C63.10:2020 (the 6.9.3 Measurement Procedure “Occupied bandwidth—power bandwidth (99%) measurement procedure” was used).

5.5 Test Results

PASSED.

All the test results are attached in next pages.

(Test Date: 2025.07.23 Temperature: 23°C Humidity: 51 %)

Mode	Channel	Frequency (MHz)	99% Bandwidth (MHz)
802.11b	1	2412	14.067
	6	2437	14.079
	11	2462	14.073
802.11g	1	2412	17.189
	6	2437	17.19
	11	2462	17.191
802.11n20	1	2412	18.18
	6	2437	18.161
	11	2462	18.168

802.11b


CH2412



CH2437




CH2462

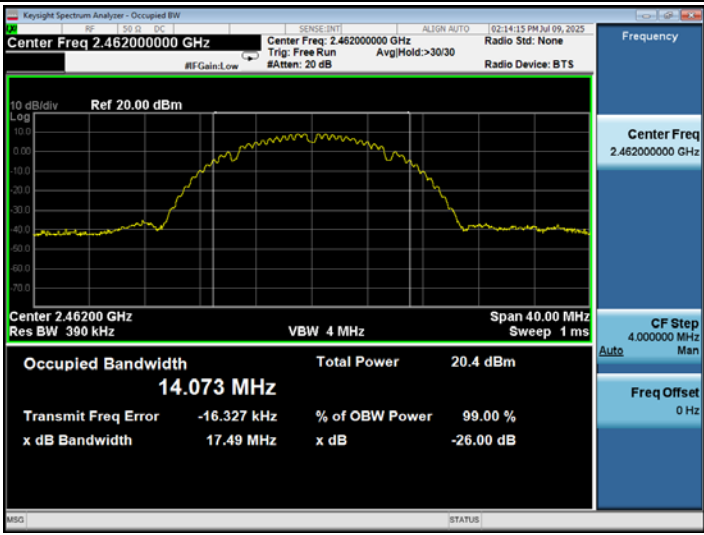


802.11g


CH2412

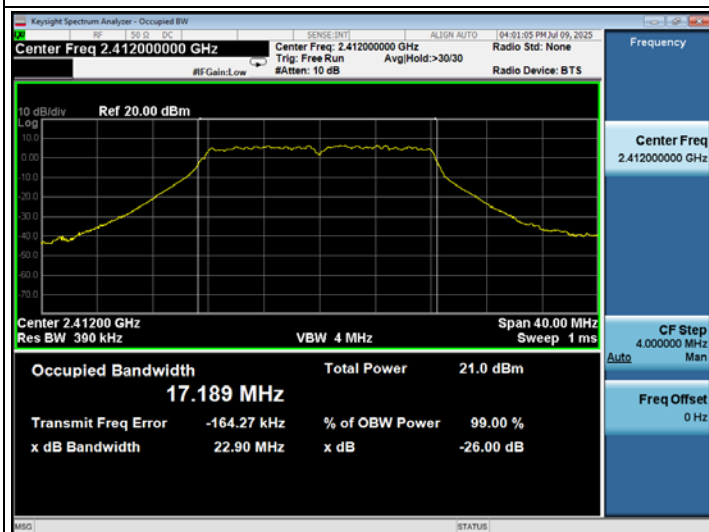

CH2437

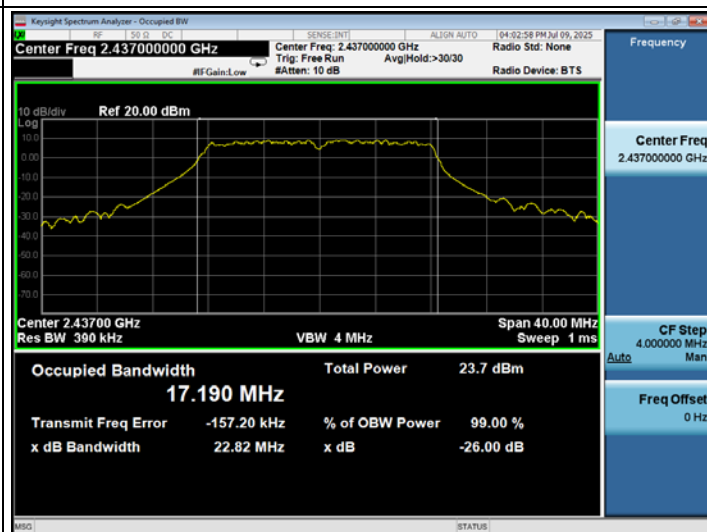


CH2462

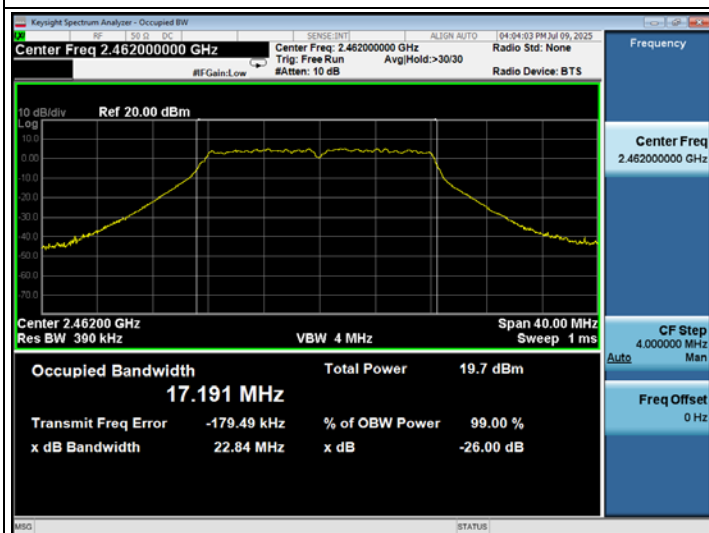


802.11n20


CH2412

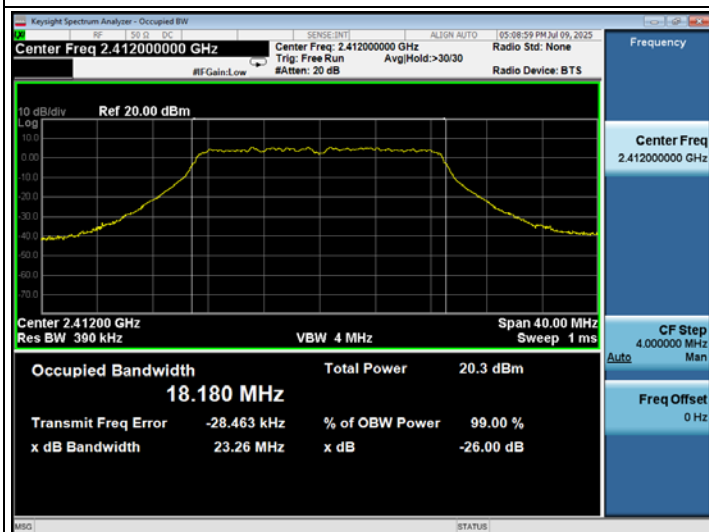

CH2437

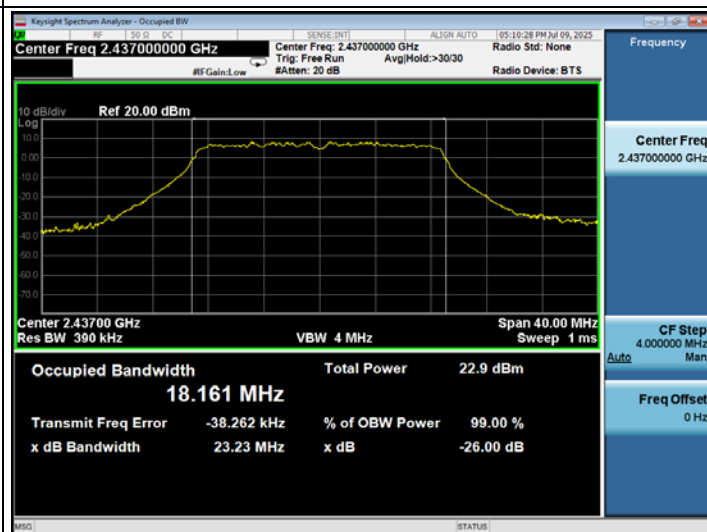

CH2462

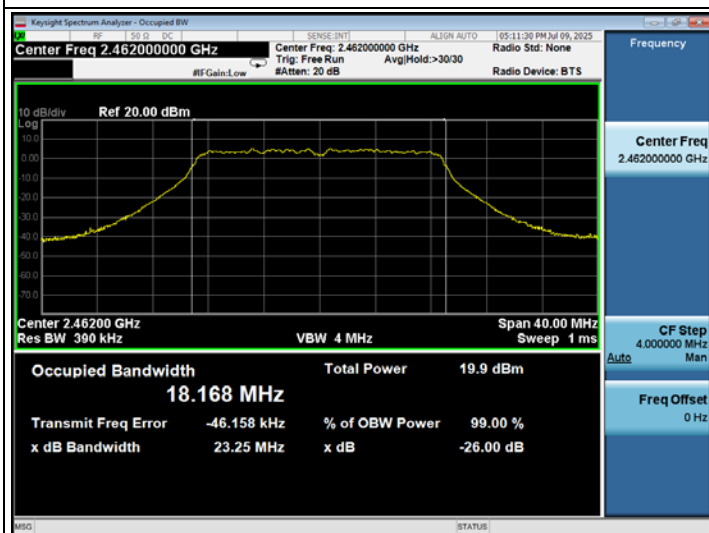

6 6 dB BANDWIDTH MEASUREMENT

6.1 Test Equipment

The Same as Section. 5.1.

6.2 Block Diagram of Test Setup

The Same as Section. 5.2.

6.3 Specification Limits (§15.247(a)(2))

The minimum 6 dB bandwidth shall be at least 500 kHz.

6.4 Operating Condition of EUT

The software as section 2.3 was used to enable the EUT to change the test mode one by one.

6.5 Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with settings: RBW = 100kHz, VBW $\geq 3 \times$ RBW.

The 6 dB bandwidth is defined as the total spectrum the power of which is lower than peak power minus 6 dB .

The test procedure is defined in ANSI C63.10:2020 (the 11.8.2 Measurement Procedure “Option 2” was used).

6.6 Test Results

PASSED.

All the test results are attached in next pages.

(Test Date: 2025.07.23 Temperature: 23°C Humidity: 51 %)

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit
802.11b	1	2412	9.128	500 kHz
	6	2437	9.127	500 kHz
	11	2462	9.126	500 kHz
802.11g	1	2412	16.58	500 kHz
	6	2437	16.57	500 kHz
	11	2462	16.58	500 kHz
802.11n20	1	2412	17.76	500 kHz
	6	2437	17.77	500 kHz
	11	2462	17.79	500 kHz

802.11b

CH2412



CH2437




CH2462



802.11g


CH2412

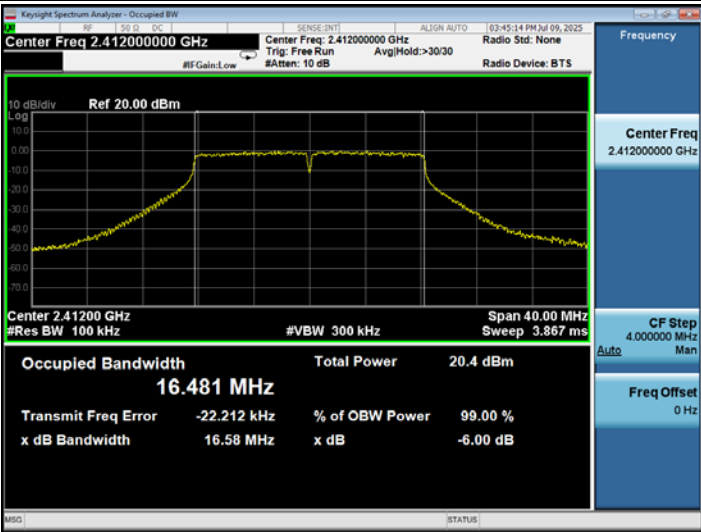

CH2437




CH2462

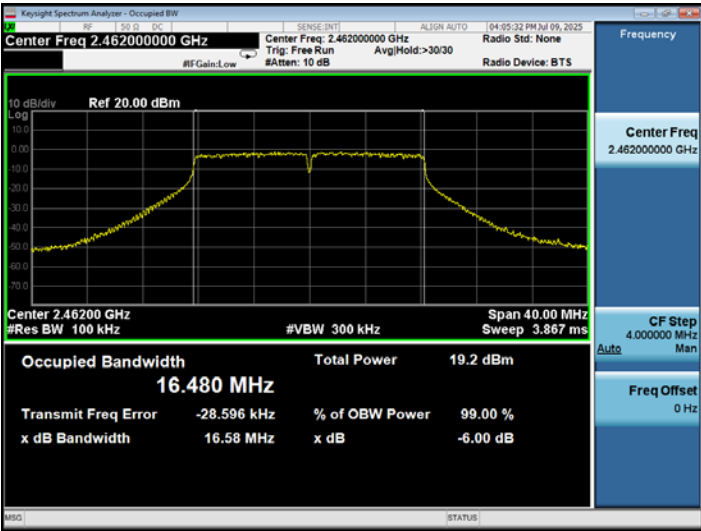

802.11n20


CH2412

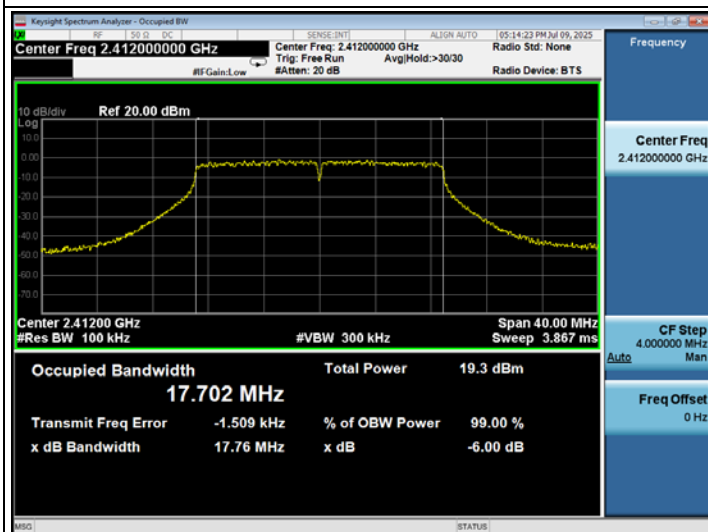

CH2437



CH2462

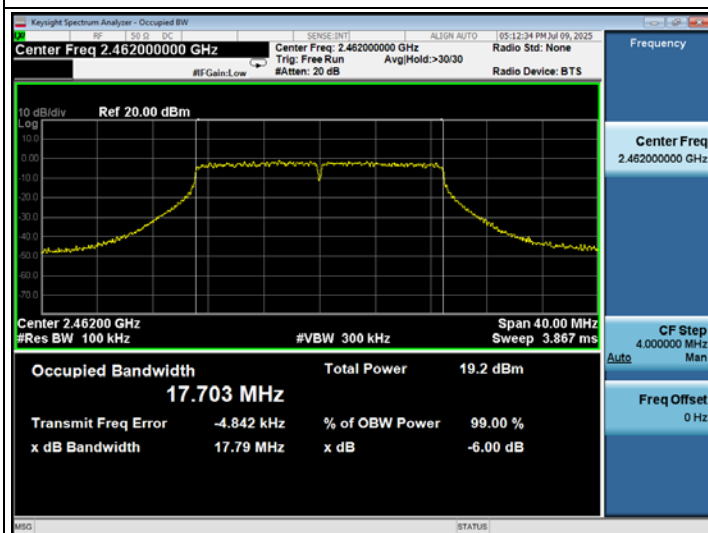

7 MAXIMUM OUTPUT POWER MEASUREMENT

7.1 Test Equipment

The Same as Section. 5.1.

7.2 Block Diagram of Test Setup

The Same as Section. 5.2.

7.3 Specification Limits ((§15.247(b)(3))

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5 MHz is: 1 Watt. (30 dBm)

7.4 Operating Condition of EUT

The software as section 2.3 was used to enable the EUT to change the test mode one by one.

7.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

Method AVGSA-1 uses trace averaging with the EUT transmitting at full power throughout each sweep.

The procedure for this method is as follows:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq [3 \times \text{RBW}]$.
- d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run.”
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

The test procedure is defined in ANSI C63.10:2020 (11.9.2.2.2 Measurement Procedure “ Method AVGSA-1” was used).

7.6 Test Results

PASSED.


All the test results are listed below.

(Test Date: 2025.07.23 Temperature: 23°C Humidity: 51 %)


Mode	Channel	Frequency (MHz)	Maximum conducted (average) Output Power (dBm)	Limit
802.11b	1	2412	17.57	30 dBm
	6	2437	17.32	30 dBm
	11	2462	17.2	30 dBm
802.11g	1	2412	13.97	30 dBm
	6	2437	16.66	30 dBm
	11	2462	12.85	30 dBm
802.11n20	1	2412	12.92	30 dBm
	6	2437	15.73	30 dBm
	11	2462	12.76	30 dBm

802.11b


CH2412

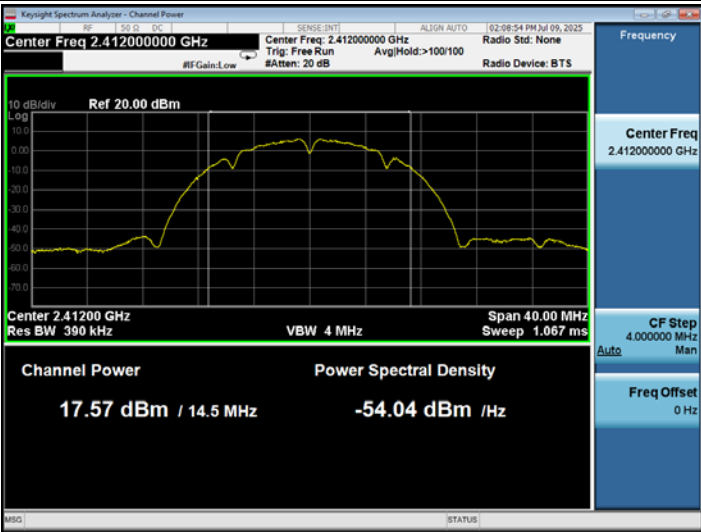

CH2437

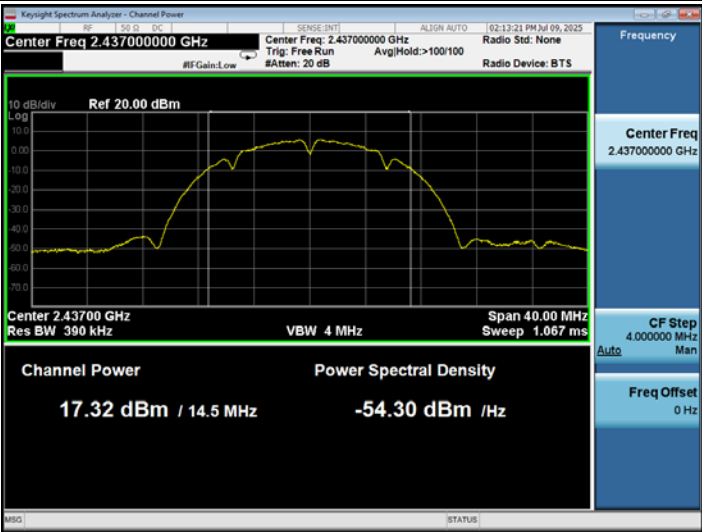


CH2462

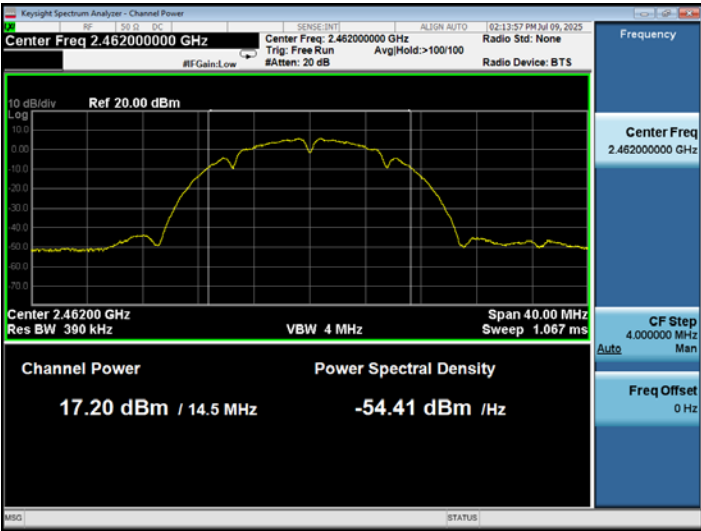


802.11g


CH2412

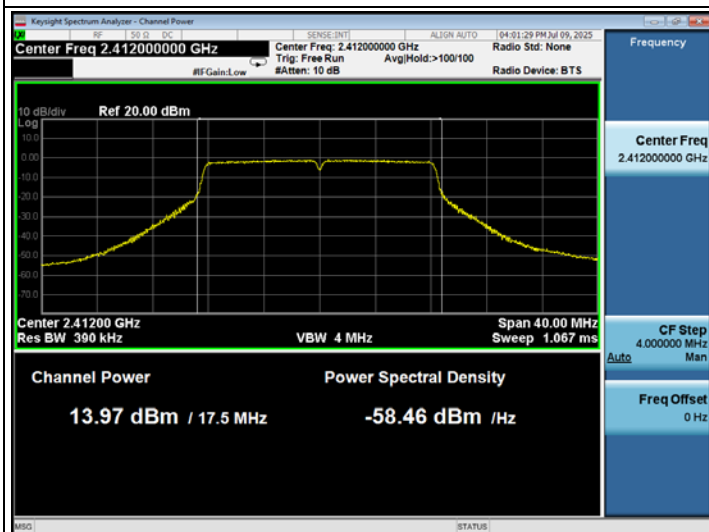

CH2437

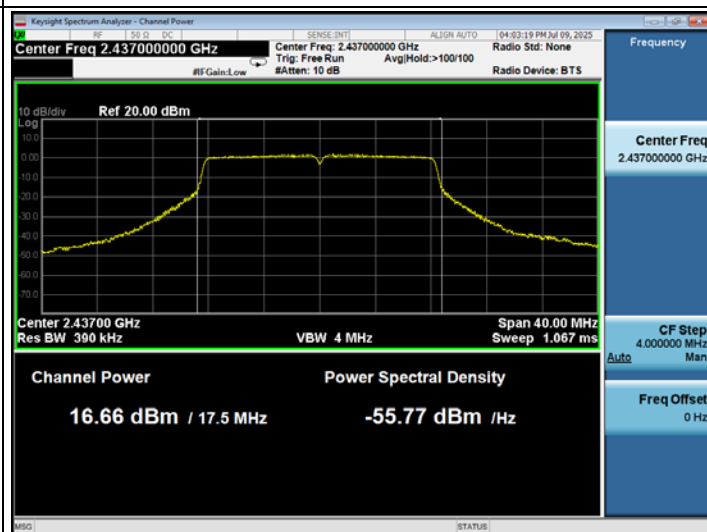


CH2462

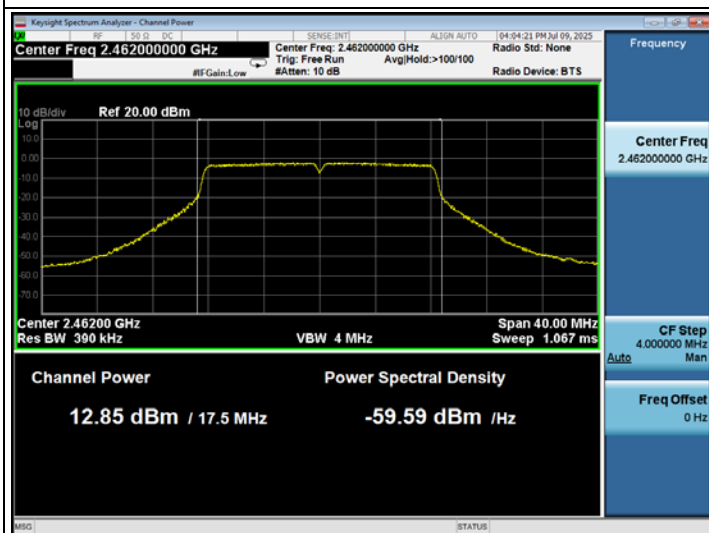


802.11n20


CH2412

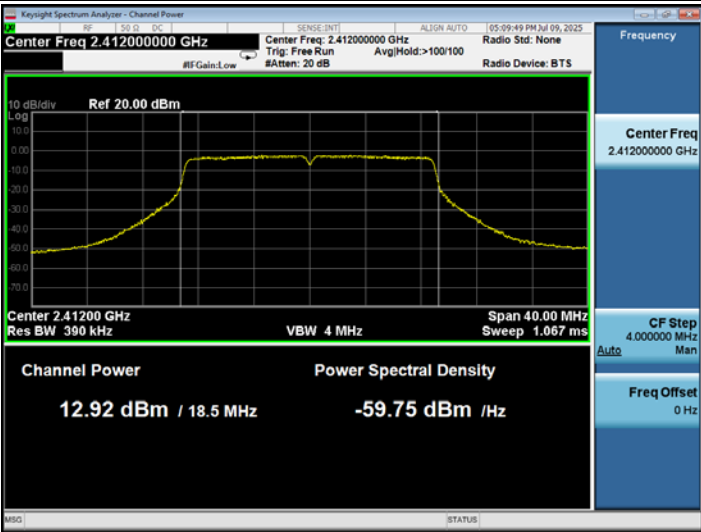

CH2437

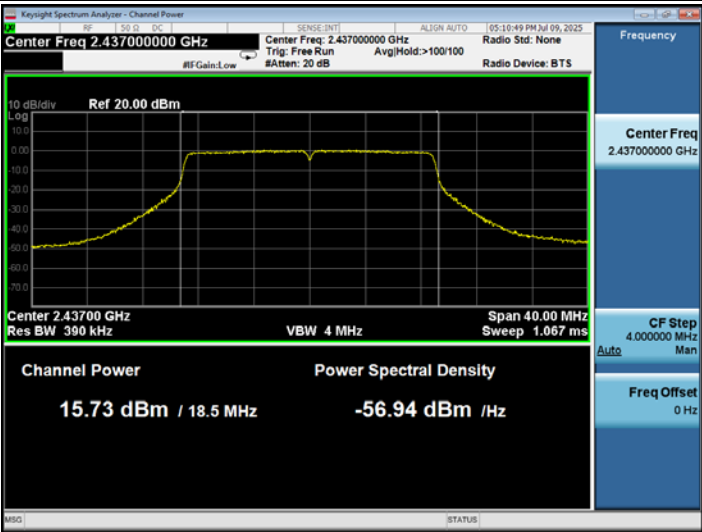

CH2462

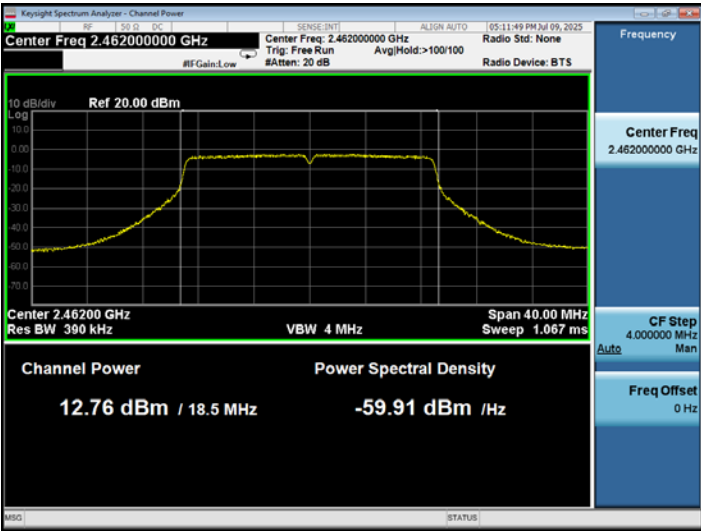

8 EMISSION LIMITATIONS MEASUREMENT

8.1 Test Equipment

The Same as Section. 5.1.

8.2 Block Diagram of Test Setup

The Same as Section. 5.2.

8.3 Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). (※This test result attaching to Section. 3.7)

8.4 Operating Condition of EUT

The software as section 2.3 was used to enable the EUT to change the test mode one by one.

8.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.

- c) Set the VBW $\geq [3 \times \text{RBW}]$.
 - d) Detector = peak.
 - e) Sweep time = auto couple.
 - f) Trace mode = max hold.
 - g) Allow trace to fully stabilize.
 - h) Use the peak marker function to determine the maximum amplitude level.
- Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

Scan up through 10th harmonic.

The test procedure is defined in ANSI C63.10:2020 (11.11.2 Reference level measurement and 11.11.3 Emission level measurement was used).

8.6 Test Results

PASSED.

The test data was attached in the next pages.


(Test Date: 2025.07.23 Temperature: 23°C Humidity: 51 %)

Mode	Channel	Frequency (MHz)	Data Page
802.11b	1	2412	P64
	6	2437	P65
	11	2462	P66
802.11g	1	2412	P67
	6	2437	P68
	11	2462	P69
802.11n20	1	2412	P70
	6	2437	P71
	11	2462	P72


802.11b

CH2412



Reference Level

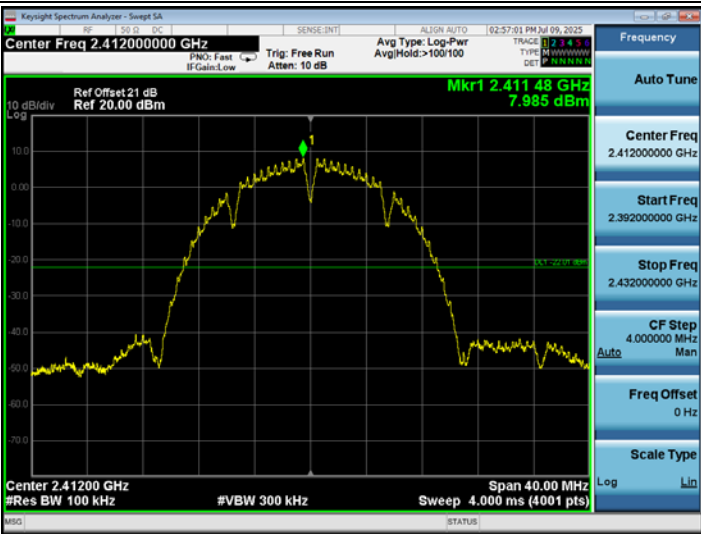

Lower Edge

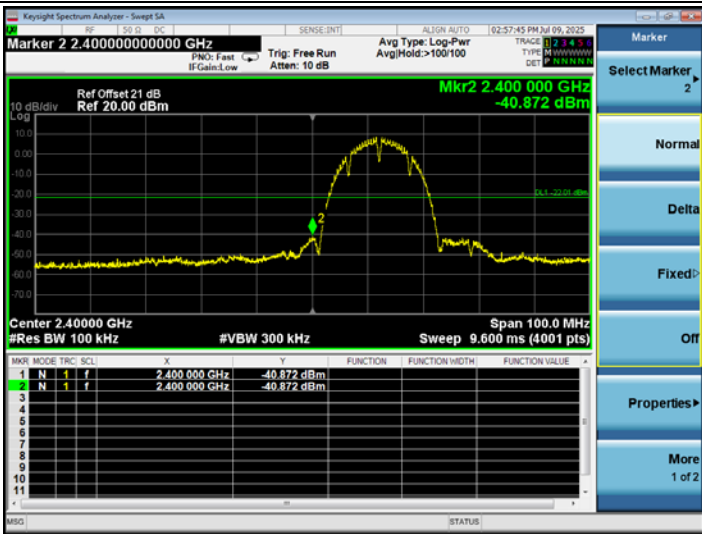


Emission Level

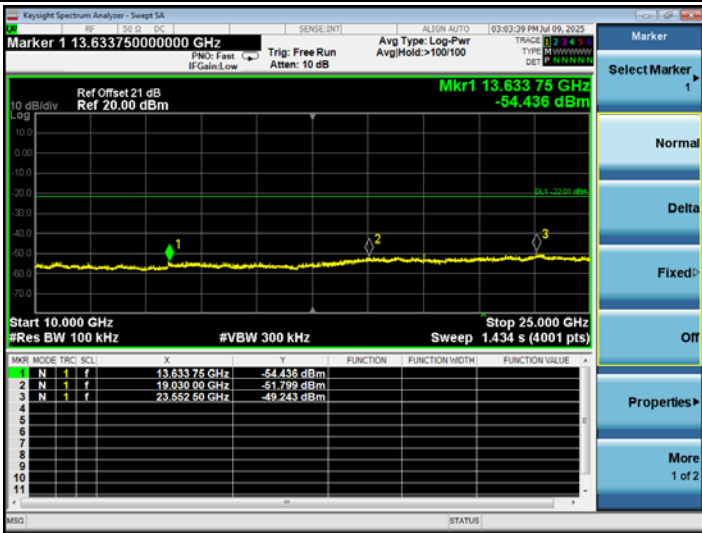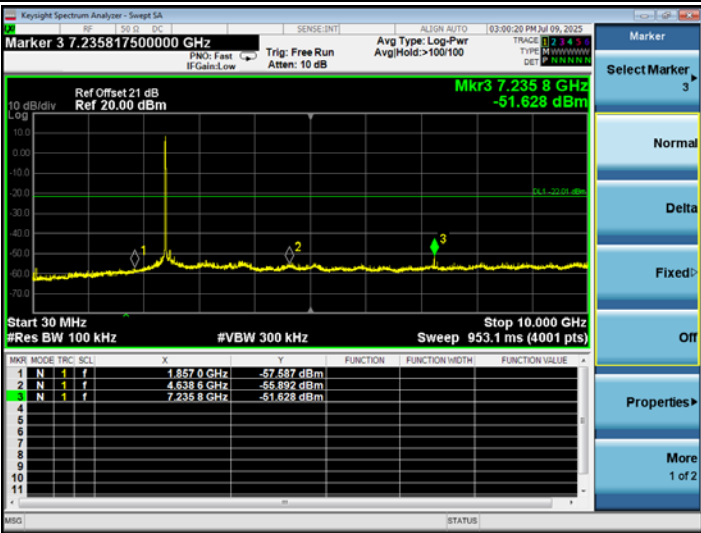



802.11b

CH2437

Reference Level

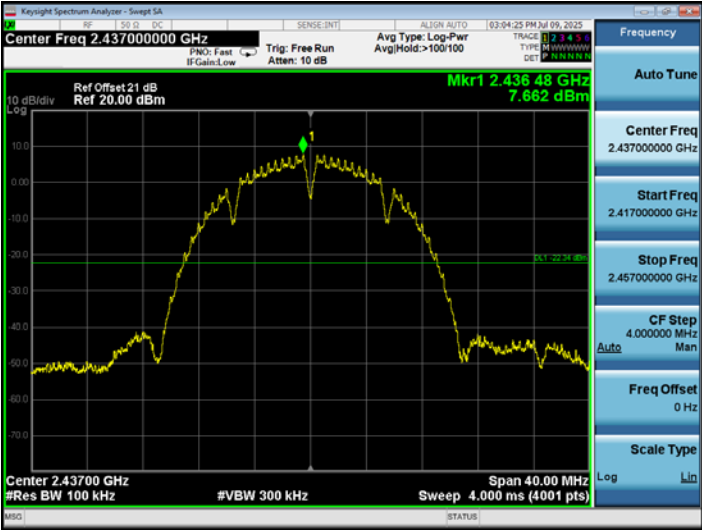


Emission Level

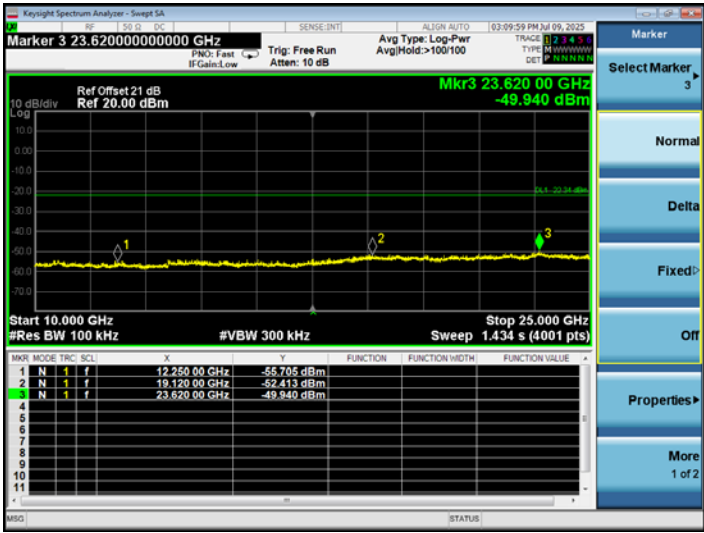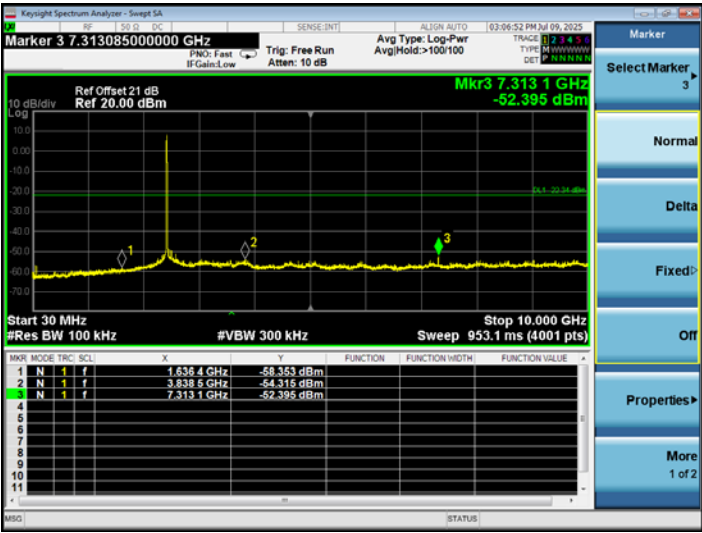


802.11b

CH2462



Reference Level

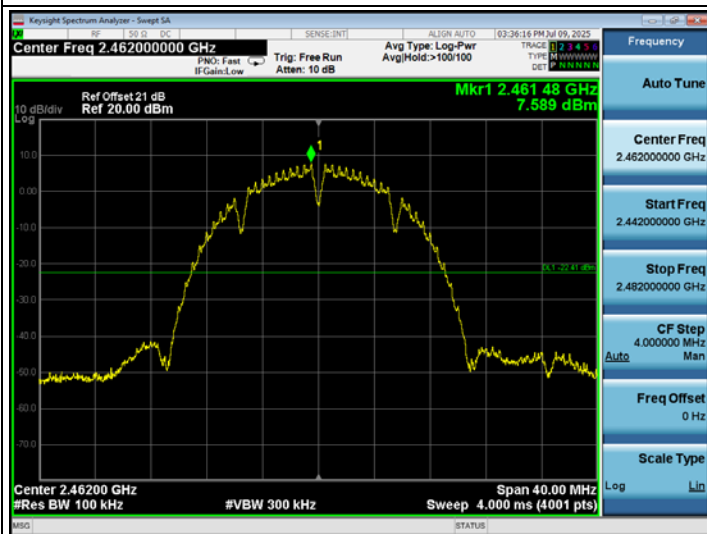

Higher Edge

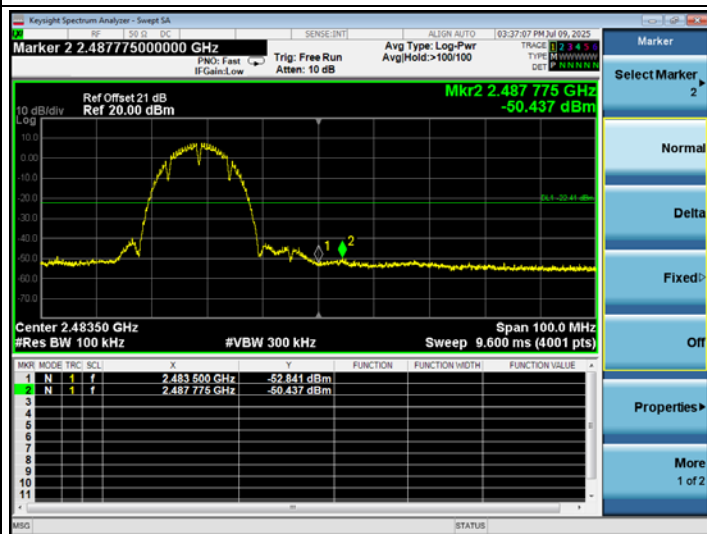


Emission Level

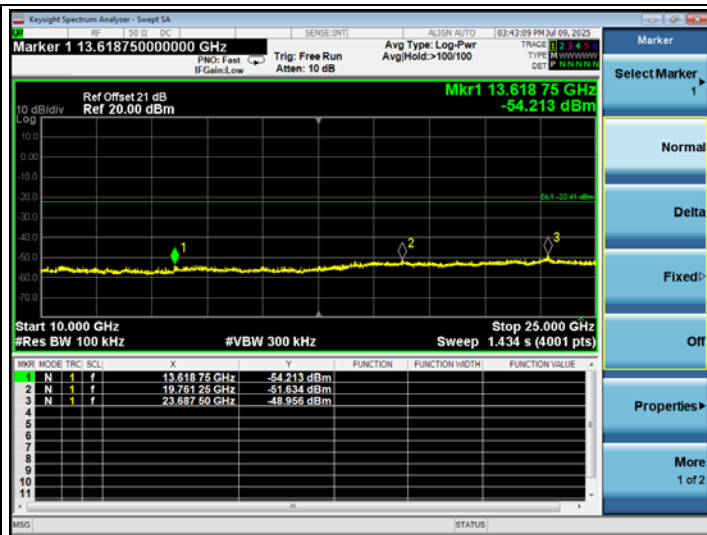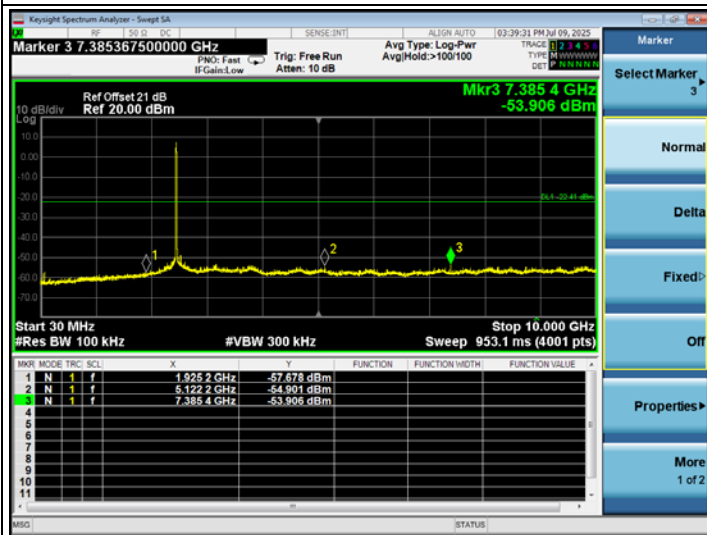


802.11g

CH2412



Reference Level

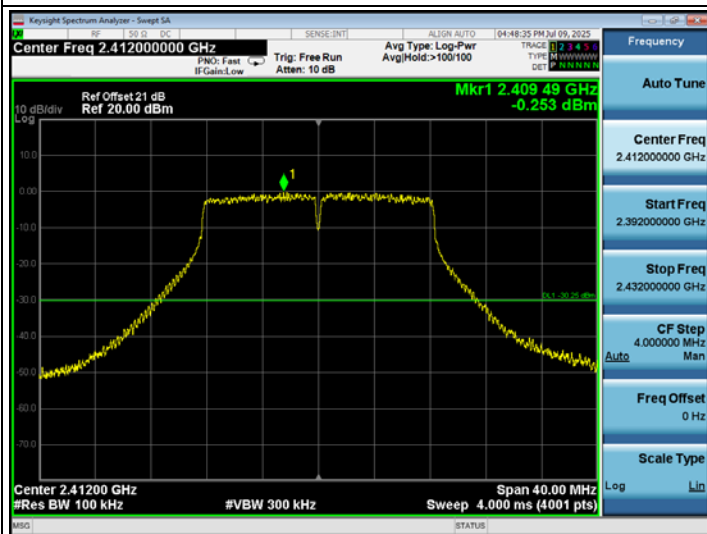

Lower Edge

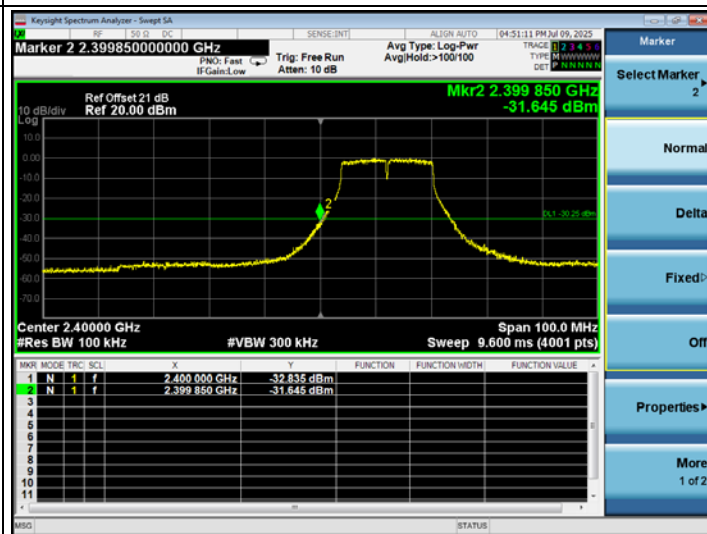


Emission Level

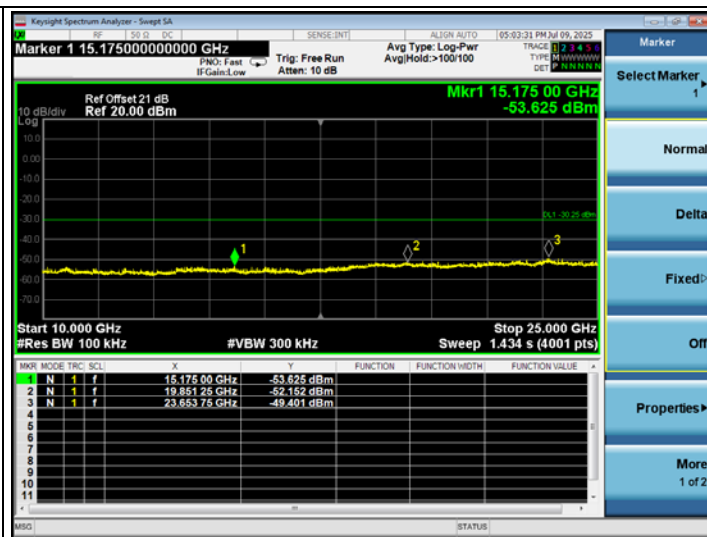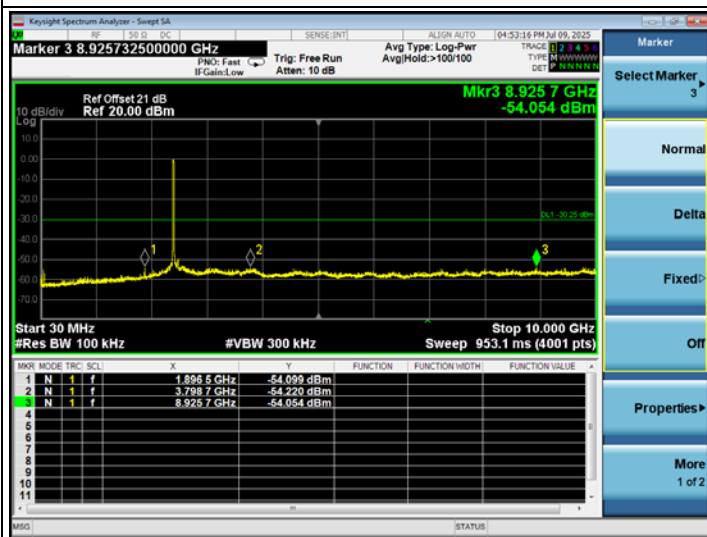



802.11g

CH2437

Reference Level

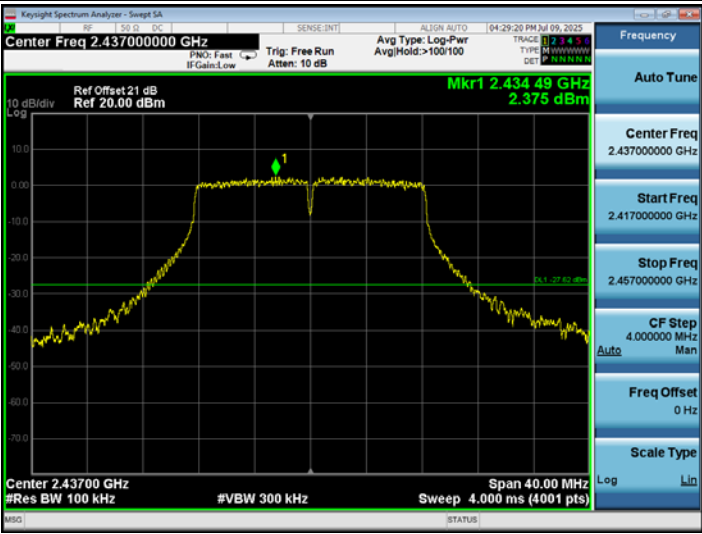


Emission Level

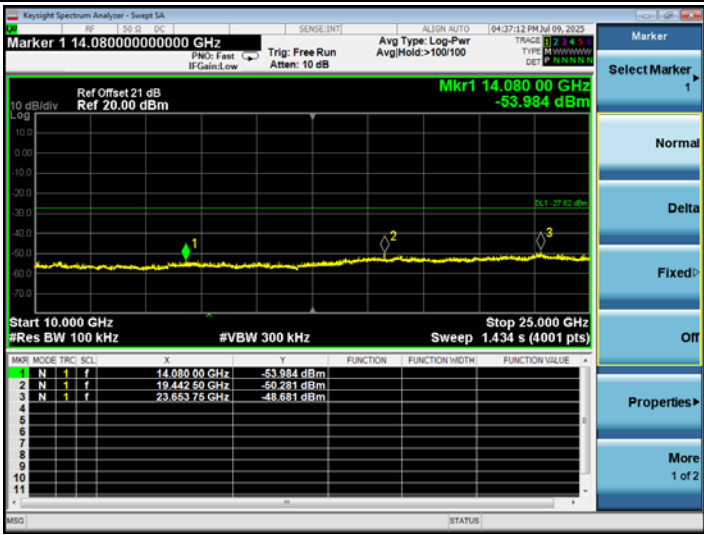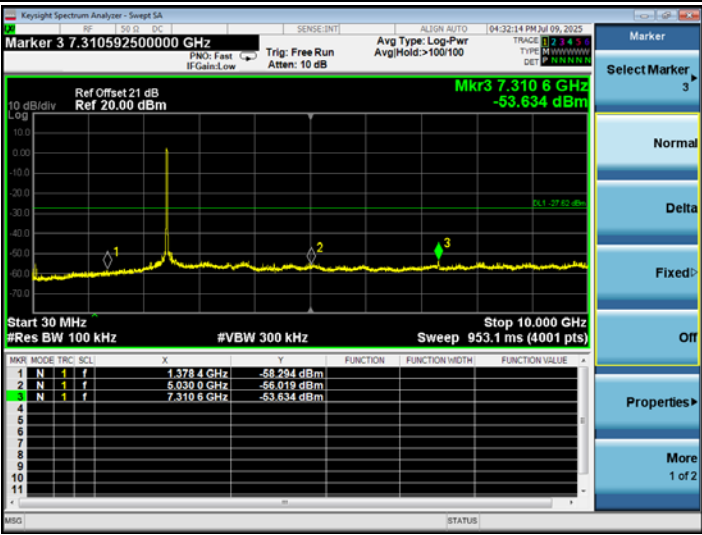


802.11g

CH2462



Reference Level

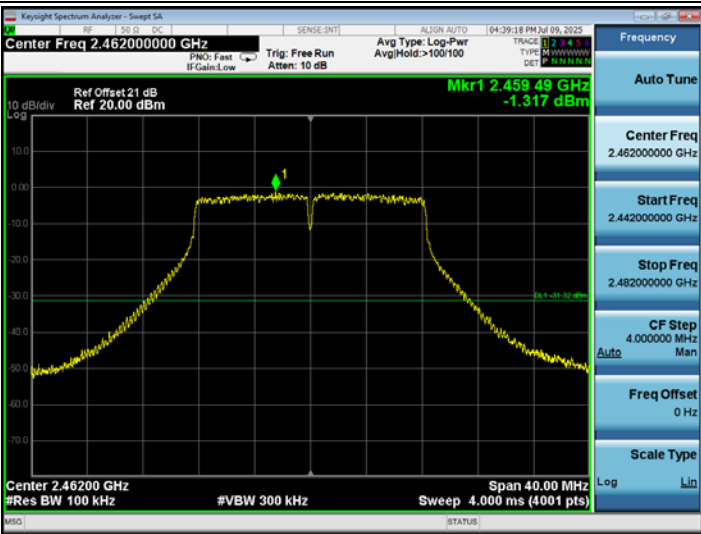

Higher Edge

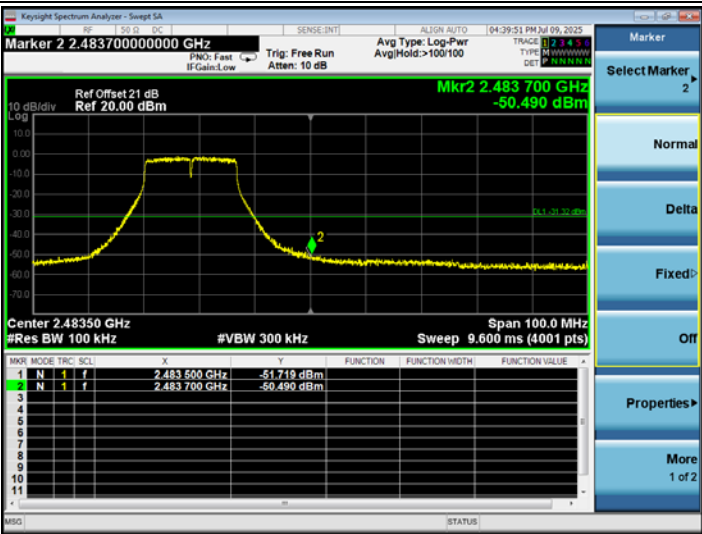


Emission Level

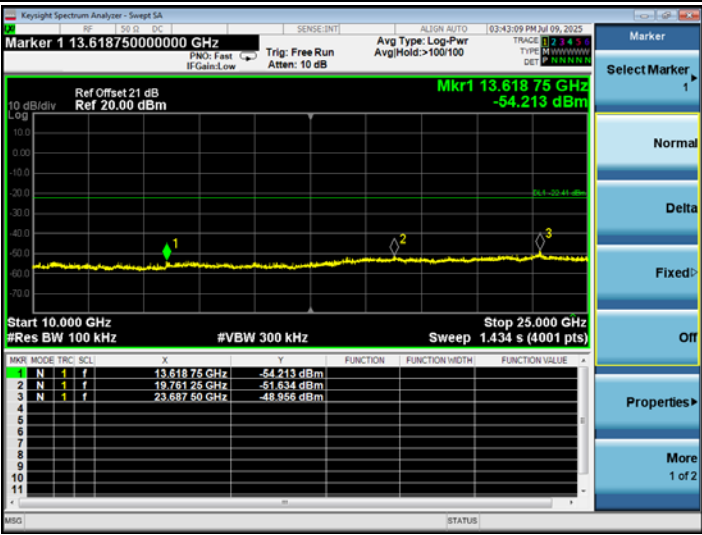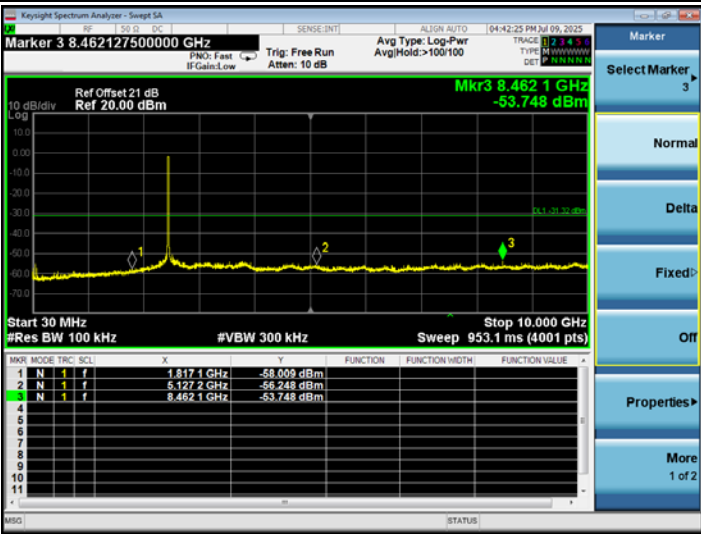


802.11n20

CH2412



Reference Level

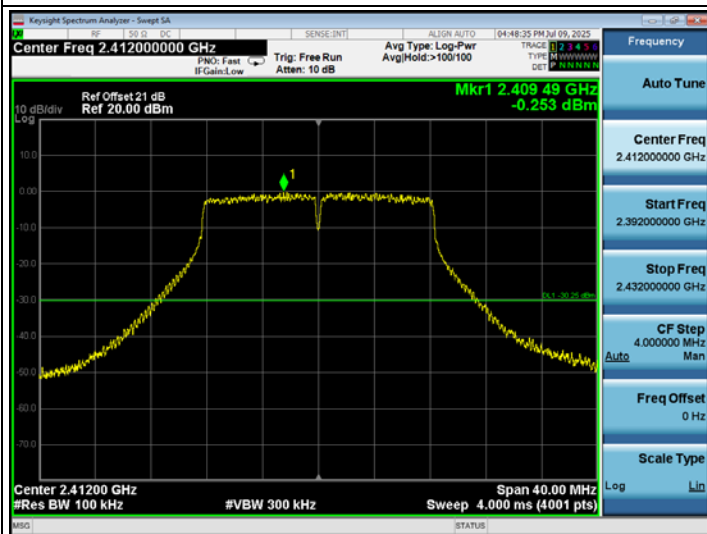

Lower Edge

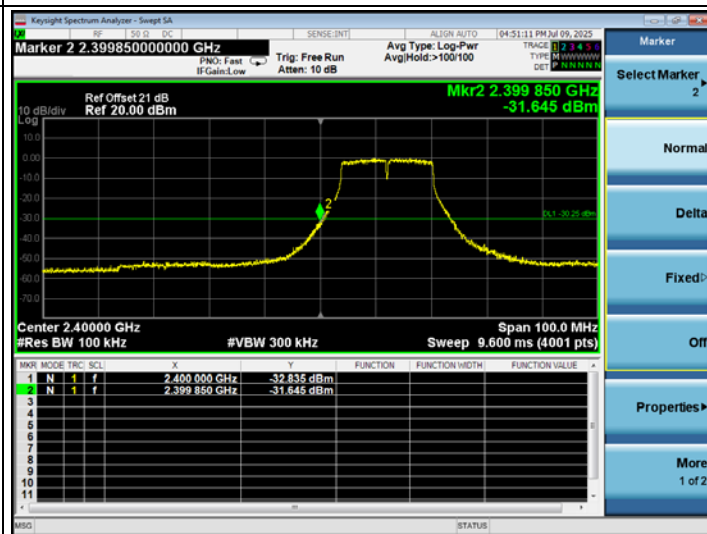


Emission Level

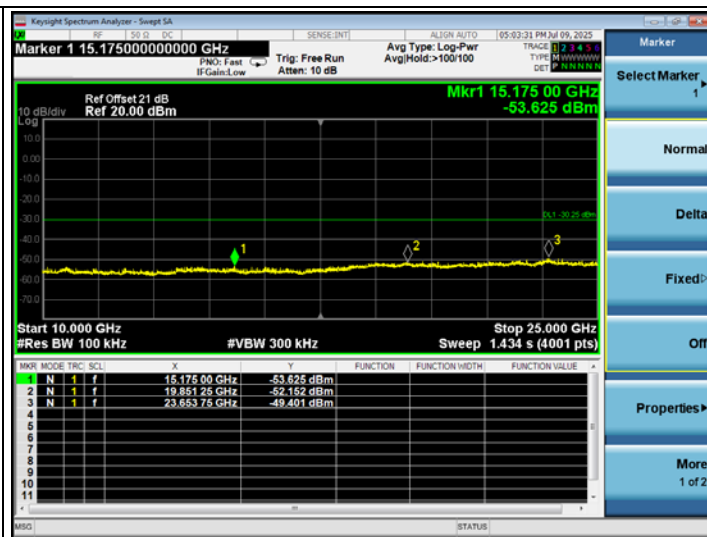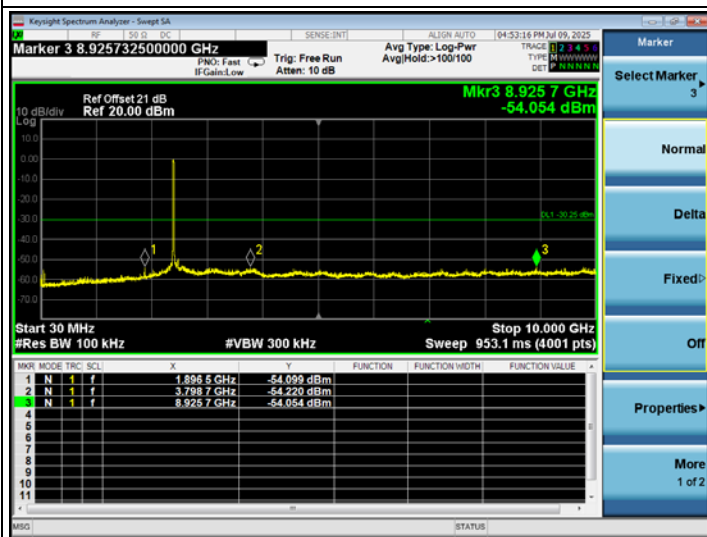



802.11n20

CH2437

Reference Level

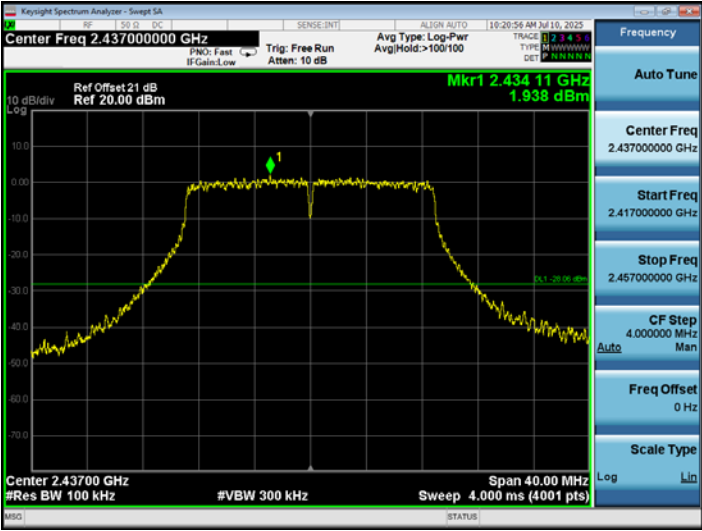


Emission Level

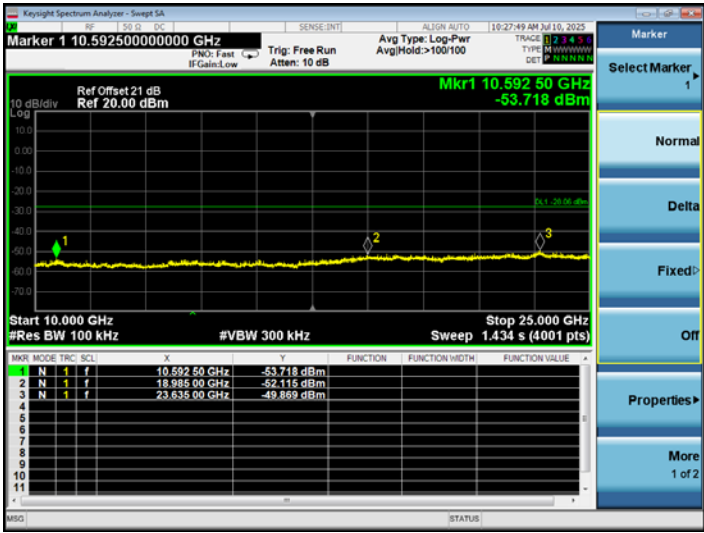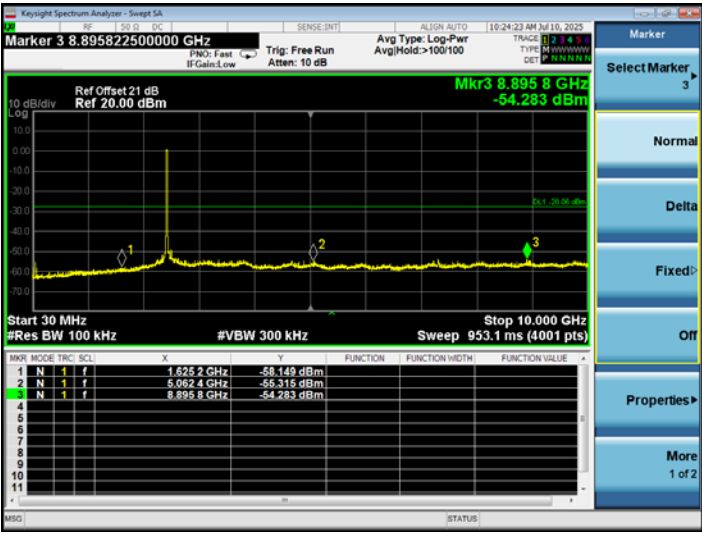


802.11n20

CH2462



Reference Level

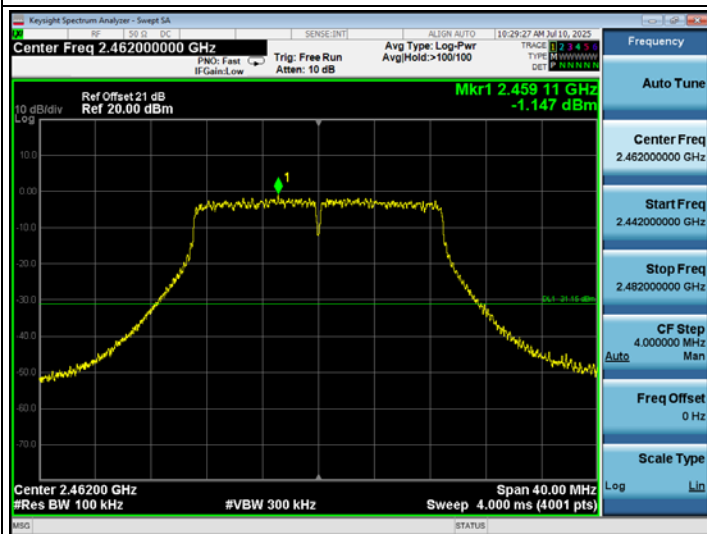

Higher Edge

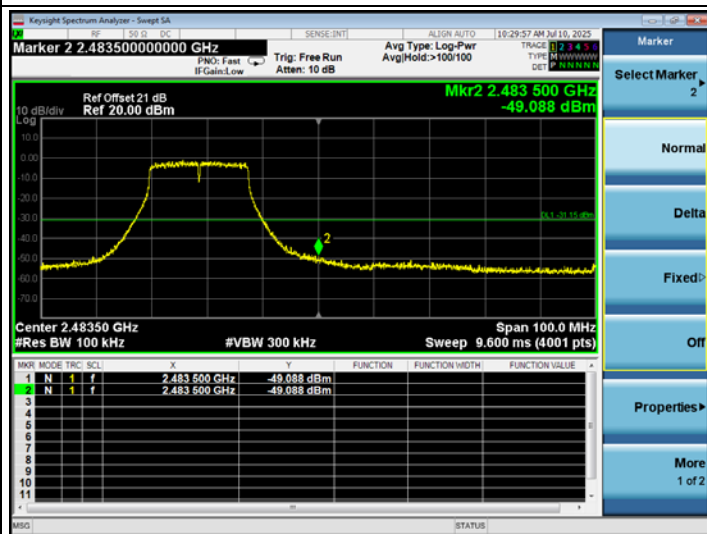

Emission Level

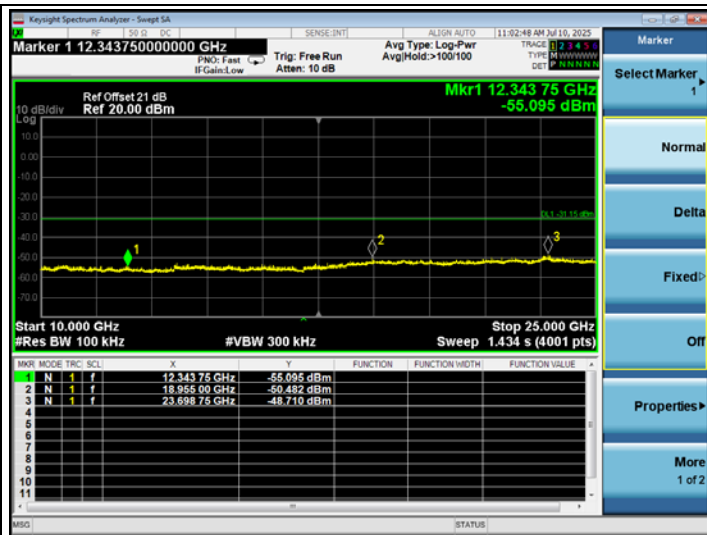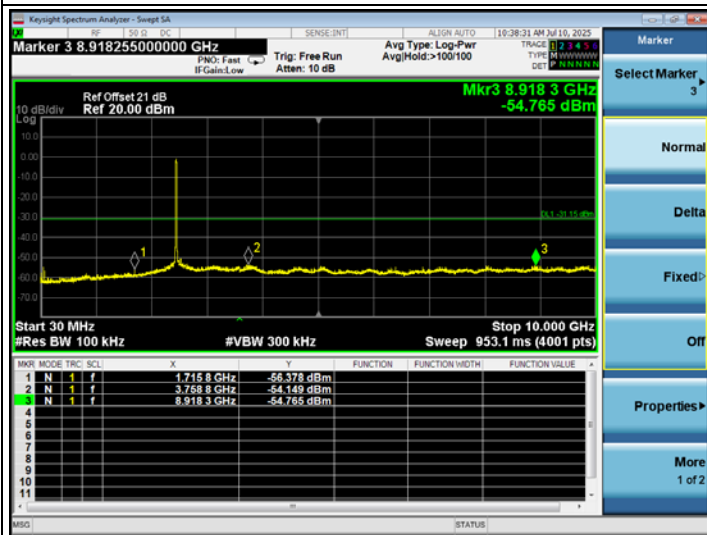

9 POWER SPECTRAL DENSITY MEASUREMENT

9.1 Test Equipment

The Same as Section. 5.1.

9.2 Block Diagram of Test Setup

The Same as section 5.2.

9.3 Specification Limits (§15.247(e))

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band. The same method of determining the conducted output power shall be used to determine the power spectral density.

9.4 Operating Condition of EUT

The software as section 2.3 was used to enable the EUT to change the test mode one by one.

9.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

Method AVGPS-1 uses trace averaging with EUT transmitting at full power throughout each sweep.

The following procedure may be used when the maximum (average) conducted output power was used to determine compliance to the fundamental output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has a power averaging (rms) detector, then it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously ($D \geq 98\%$), or else sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter OFF time to be considered):

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to at least 1.5 times the OBW.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = power averaging (rms) or sample detector (when rms not available).
- f) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (rms) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

The test procedure is defined in ANSI C63.10:2020 (11.10.5 Measurement Procedure “Method AVGPS-1” was used).

9.6 Test Results

PASSED.

All the test results are attached in next pages.

(Test Date: 2025.07.23 Temperature: 23°C Humidity: 51 %)

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limit
802.11b	1	2412	-14.211	8 dBm
	6	2437	-14.362	8 dBm
	11	2462	-14.504	8 dBm
802.11g	1	2412	-18.452	8 dBm
	6	2437	-15.86	8 dBm
	11	2462	-19.25	8 dBm
802.11n20	1	2412	-19.918	8 dBm
	6	2437	-17.367	8 dBm
	11	2462	-20.189	8 dBm

802.11b

CH2412



CH2437




CH2462




802.11g


CH2412

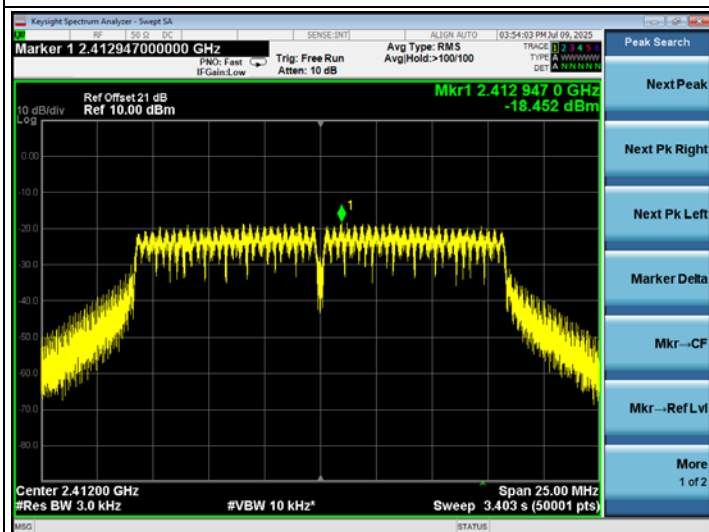

CH2437

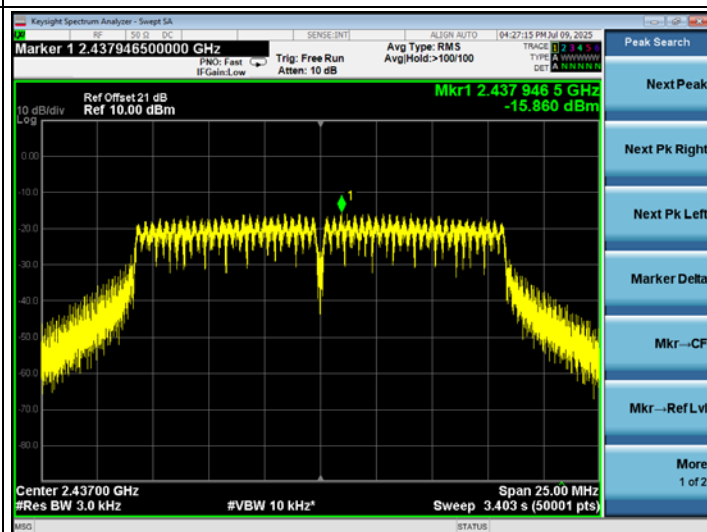


CH2462

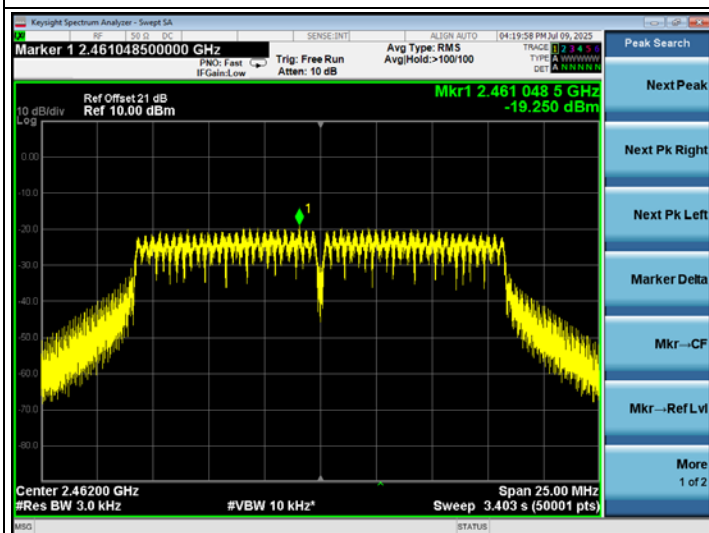


802.11n20


CH2412

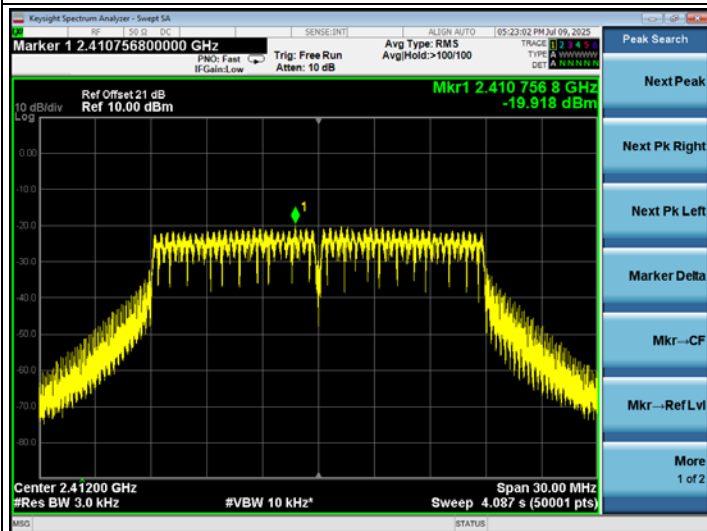

CH2437

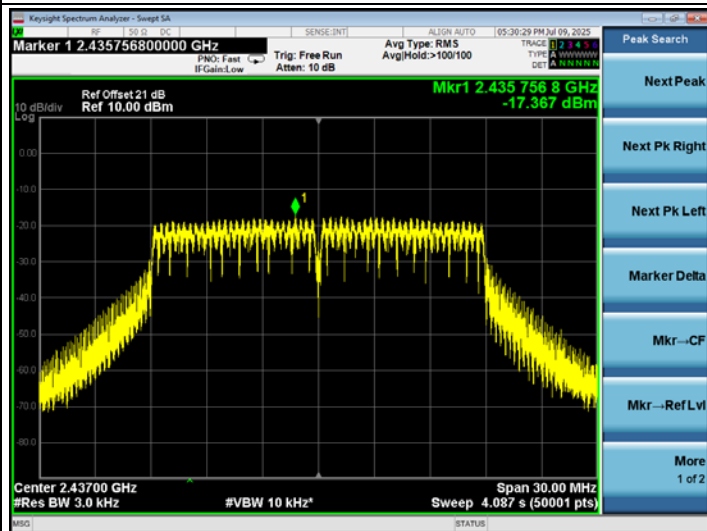

CH2462

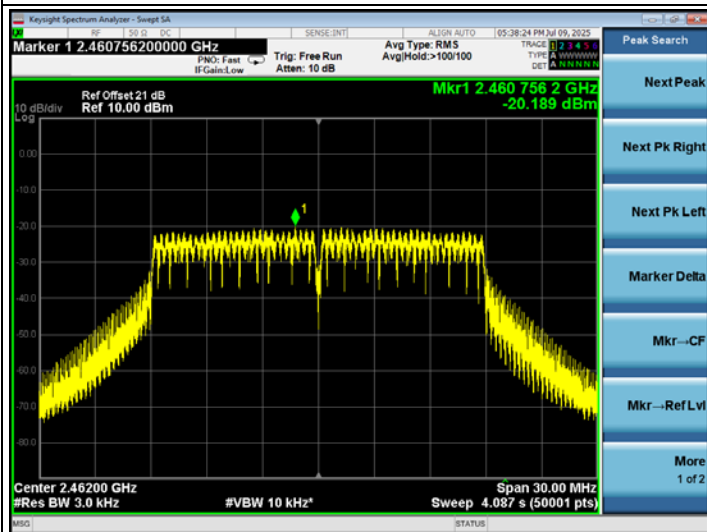

10 ANTENNA REQUIREMENT

10.1 Specification Limits (§15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 Result

According to KDB 353028 D1, the following describes the three ways that can be used to demonstrate compliance to Section 15.203:

- a) Antenna permanently attached.
- b) Unique (non-standard) antenna connector.
- c) Professional installation.

For this product, the antenna is:

- ☒ Antenna permanently attached
- ☐ Unique (non-standard) antenna connector
- ☐ Professional installation
- ☐ not meet any of ways list above

that

- ☒ compliant
- ☐ not compliant

with the requirement of Section 15.203.

11 MEASUREMENT UNCERTAINTY LIST

The measurement uncertainty was estimated for test on the EUT according to CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage of K=2.

The uncertainties value is not used in determining the PASS/FAIL results.

Test Items/Facilities	Frequency/Equipment/Unit	Uncertainty
Conducted Emission No.1 Shielded Room	9kHz~150kHz	±3.1 dB
	150kHz~30MHz	±2.6 dB
Conducted Emission No.3 Shielded Room	9kHz~150kHz	±3.1 dB
	150kHz~30MHz	±2.6 dB
Radiated Emission	30MHz~200MHz, Horizontal	±3.8 dB
	30MHz~200MHz, Vertical	±4.1 dB
	200MHz~1000MHz, Horizontal	±3.6 dB
	200MHz~1000MHz, Vertical	±5.1 dB
	1GHz~6GHz	±5.3 dB
	6GHz~18GHz	±5.3 dB
	18GHz~40GHz	±3.5 dB
Output Power Test	50MHz~18GHz	0.77 dB
Power Density Test	9kHz~6GHz	1.08 dB
RF Frequency Test	9kHz~40GHz	6×10^{-4}
Bandwidth Test	9kHz~6GHz	1.5×10^{-3}
RF Radiated Power Test	30MHz~1000MHz	3.06 dB
Conducted Output Power Test	50MHz~18GHz	0.83 dB
AC Voltage(<10kHz) Test	120V~230V	0.04 %
DC Power Test	0V~30V	0.4 %
Temperature	-40°C~+100°C	0.52 °C
Humidity	30%~95%	2.6 %