DEKRA Testing and Certification (Shanghai) Ltd. Guangzhou Branch
Block 5, No.3, Qiyun Road, Huangpu District, Guangzhou, Guangdong, China
Tel +86 20 6661 2000 Fax +86 20 6661 2001 https://www.dekra.com

Test report No: 4955464.53

TEST REPORT
Radio Spectrum Matters (RF)

Identification of item tested	Cync Direct Connect Strip
Trademark	GE
Model and /or type reference	CSTR16CBDM, CSTR32CBDM
FCC ID	PUU-STR-CBDMI
Features	120Vac, 60Hz
Applicant´s name / address	Savant Technologies LLC dba GE Lighting, a Savant company 1975 Noble Road, Cleveland, Ohio, United States, 44112
Test method requested, standard	FCC CFR Title 47 Part15 Subpart C Section 15.247; KDB558074 D01v05r02;
Verdict Summary	COMPLIANCE
Tested by (name & signature)	Johnny Bo Johnny Bo
Approved by (name & signature)	Tim Yan Tim Yan
Date of issue	2026-07-20
Report template No	TRF_EMC 2017-06- FCC_Part15C_247

INDEX

page

General conditions 4
Uncertainty 4
Environmental conditions 4
Possible test case verdicts 4
Definition of symbols used in this test report 5
Abbreviations 5
Document History 5
Remarks and Comments 5
1 General Information 6
1.1 General Description of the Item(s) 6
1.2 Test data 8
1.3 The environment(s) in which the EUT is intended to be used 8
1.4 Channel List 8
2 Description of Test Setup 10
2.1 Operating mode(s) used for tests 10
2.2 Support / Auxiliary equipment / unit / software for the EUT 10
2.3 Test Configuration / Block diagram used for tests 10
2.4 Measurement procedure 10
3 Verdict summary section 11
3.1 Standards 11
3.2 Deviation(s) from the Standard(s) / Test Specification(s) 11
3.3 Overview of results 11
4 Transmitter Test Results 12
4.1 AC Power Line Conducted Emission 12
4.2 Emissions in non-restricted frequency bands 17
4.3 Emissions in restricted frequency bands 48
4.4 Band Edge 75
4.5 Duty cycle 82
4.6 DTS Bandwidth 85
4.7 Fundamental emission output power 95
4.8 Power spectral density 97
5 Identification of the Equipment Under Test 104
Annex 1 – Measurement Uncertainty 105
Annex 2 - Used Equipment 106

Annex 3 - Test Photos 108

GENERAL CONDITIONS

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.
5. This report will not be used for social proof function in China market.

UNCERTAINTY

For all measurements where guidance for the calculation of the instrumentation uncertainty of a measurement is specified in EN 55016-4-2 (CISPR 16-4-2), EN/IEC 61000-4 series or a product standard, the measurement instrumentation uncertainty has been calculated and applied in accordance with these standards.

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	-40 °C – 105 °C
Relative Humidity air	30% - 60%
Atmospheric pressure	86 kPa – 106 kPa

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not tested	N/T

DEFINITION OF SYMBOLS USED IN THIS TEST REPORT

☒ Indicates that the listed condition, standard or equipment is applicable for this report/test/EUT.				
☐ Indicates that the listed condition, standard or equipment is not applicable for this report/test/EUT.				
Decimal separator used in this report	☐	Comma (,)	☒	Point (.)

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	:	Equipment Under Test
QP	:	Quasi-Peak
CAV	:	CISPR Average
AV	:	Average
CDN	:	Coupling Decoupling Network
SAC	:	Semi-Anechoic Chamber
OATS	:	Open Area Test Site
BW	:	Bandwidth
AM	:	Amplitude Modulation
PM	:	Pulse Modulation
HCP	:	Horizontal Coupling Plane
VCP	:	Vertical Coupling Plane
U_N	:	Nominal voltage
*T*x	:	Transmitter
*R*x	:	Receiver
N/A	:	Not Applicable
N/M	:	Not Measured

DOCUMENT HISTORY

Report nr.	Date	Description
4955464.53	2026-07-20	- First release.

REMARKS AND COMMENTS

The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Description of the item .....:	Cync Direct Connect Strip
Trademark.....:	GE
Model / Type number.....:	CSTR16CBDM, CSTR32CBDM
FCC ID .....:	PUU-STR-CBDMI
Hardware .....:	N/A
Software.....:	N/A
Firmware .....:	N/A
Ratings.....:	120Vac, 60Hz
Manufacturer.....:	Savant Technologies LLC,dba GE Lighting, a Savant company 1975 Noble Road, Cleveland, OH, 44112-1719, US
Factory 1 .....:	Foshan Lighting Chanchang Optoelectronics Co., Ltd. Hecheng Street, Cangjiang Industrial Park, Gaoming District, Foshan City, Guangdong Province, P. R. China
Factory 2 .....:	Foshan Electrical And Lighting Co.,Ltd.Gaoming Fitting Branch Fuwan Industrial Zone, Hecheng Street, Gaoming District, Foshan, Guangdong, China
Factory 3 .....:	Foshan Electrical and Lighting Co.,Ltd. Gaoming Branch No.19, Hengchang Road, Fuwan Industrial Park, Hecheng Street, Gaoming District, Foshan, Guangdong, P.R.China
Factory 4 .....:	FSL OPTOTECH (THAILAND)CO.,LTD. No.24, Moo.13, Bang Ya Phraek, Phra Pradaeng, Samut Prakan, Thailand 10130
Factory 5 .....:	NINGBO DONGXING (CAMBODIA) ELECTRIC CO.,LTD. Prey Taphem Village, Por Angkrorng Commune, Bor Set District, Kampong Speu Province,Kingdom of Cambodia

			Reference poles				
Rated power supply .....:	Voltage and Frequency		L1	L2	L3	N	PE
	☒	AC: 120 V, 60Hz	☒	☐	☐	☒	☐
	☐	DC:					
	☐	Battery:					
Mounting position.....:	☐	Table top equipment					
	☒	Wall/Ceiling mounted equipment					
	☐	Floor standing equipment					
	☐	Hand-held equipment					
	☐	Other: Built-in					

According to customer's declaration, the product contains RF module and the characteristics of radio module:

BLE

Operating frequency range(s).....:	2402 MHz – 2480 MHz
Type of Modulation .....:	GFSK
Maximum e.i.r.p .....:	7.7 dBm
Antenna type.....:	PCB Antenna
Operating Temperature Range.....:	-20 °C – 40 °C
Antenna gain.....:	0.5 dBi

WIFI

Frequency Band .....:	2412 MHz-2462 MHz
Type of Modulation .....:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM(64-QAM, 16-QAM, QPSK, BPSK)
Data Rate.....:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS7
Geo-location Capability.....:	Not Support
Adaptivity .....:	Adaptive
Maximum RF output power(EIRP)..:	17.0 dBm
Antenna type.....:	PCB Antenna
Antenna gain.....:	0.5 dBi
Number of channel .....:	IEEE 802.11b: 11 IEEE 802.11g: 11 IEEE 802.11n-HT20: 11
Operating Temperature Range.....:	-20 °C – 40 °C

Intended use of the Equipment Under Test (EUT)
The apparatus as supplied for the test is Cync Direct Connect Strip intended for residential use. Based on customer description: All model are identical except rangting power. The product have two LED driver option: XY12SE-240050VQ-UW or S012EFU2400050. Hence, models CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW) was chosen for full test, model CSTR32CBDM (with LED driver: S012EFU2400050) was chosen for AC Power Line Conducted Emission, Emissions in non-restricted frequency bands, Emissions in restricted frequency bands test for compliance verification, and the corresponding test data are also representative of the other models as well.

Copy of marking plate:
No provide.

1.2 Test data

Test Location	DEKRA Testing and Certification (Shanghai) Ltd. Guangzhou Branch Block 5, No.3, Qiyun Road, Huangpu District, Guangzhou, Guangdong, China FCC Designation Number: CN1324;
Date of receipt of test item	2026-04-13
Date (s) of performance of tests	2026-04-13 to 2026-05-11
Test sample	Normal sample: CSTR16CBDM (lab on.4955464-1) CSTR32CBDM (lab on.4955464-4) RF conducted sample: CSTR16CBDM (lab on.4955464-3) CSTR32CBDM (lab on.4955464-5) RF radiated sample: CSTR16CBDM (lab on.4955464-2) CSTR32CBDM (lab on.4955464-6)

1.3 The environment(s) in which the EUT is intended to be used

The equipment under test (EUT) is intended to be used in the following environment(s):

☒	Residential (domestic) environment.
☒	Commercial and light-industrial environment.
☐	Industrial environment.

1.4 Channel List

The radio module (Bluetooth) operating channels are:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478

11	2424	25	2452	39	2480
12	2426	26	2454	-	-
13	2428	27	2456	-	-

The radio module (WIFI) operating channels are:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	-	-

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Operating mode	Operating mode description	Used for methos	
		Conducted	Radiated
1	Transmitting at WIFI	☒	☒
2			
3			
4			
Supplemental information: ---			

2.2 Support / Auxiliary equipment / unit / software for the EUT

The EUT has been tested with the following auxiliary equipment / unit / software:

Auxiliary equipment / unit / software	Type / Version	Manufacturer	Supplied by
Laptop	Latitude 5488	DELL	DEKRA
Serial Port Utility (soft ware)	V5.0.1.1117	---	DEKRA
Supplemental information: ---			

2.3 Test Configuration / Block diagram used for tests

Refer to Annex 3.

2.4 Measurement procedure

The EUT was controlled by a serial PCB(TELINK BDT) which provided by manufacturer which connected to laptop through the com port. After connected, run the software “Serial Port Utility” supplied by manufacturer to control the EUT work in required test mode as below table.

RF Mode	Set_channel(MHz)
BLE_1M	2402
	2440
	2480
IEEE 802.11 b/g/n20	2412
	2442
	2462

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2026	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
KDB 558074 D01 v05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
ANSI C63.10	2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

3.3 Overview of results

FCC measurement			
Requirement – Test case	**Basic standard(s)**	**Verdict**	**Remark**
AC Power Line Conducted Emission	FCC 15.207	PASS	---
Emissions in non-restricted frequency bands	FCC 15.247(d), FCC 15.209	PASS	---
Emissions in restricted frequency bands	FCC 15.247(b)(3)	PASS	---
Duty cycle	ANSI C63.10:2020	PASS	---
Band Edge	FCC 15.247(d)	PASS	---
Fundamental emission output power	FCC 15.247(d), FCC 15.209	PASS	---
DTS Bandwidth	FCC 15.247(a)(2)	PASS	---
Power Spectral Density	FCC 15.247(e)	PASS	---
Antenna Requirement	FCC 15.203	PASS	---
Supplementary information: ---			

The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to calculate the uncertainty associated with the measurement result.

4 TRANSMITTER TEST RESULTS

4.1	AC Power Line Conducted Emission	VERDICT:	PASS

Limits

FCC Part 15 Subpart C Paragraph 15.207				
Frequency range [MHz]	Limit: QP [dB(μV)[1)]]	Limit: AV [dB(μV) [1)]]	IF BW	Detector(s)
0.15 - 0.50	66 – 56 [2)]	56 - 46 [2)]	9 KHz	QP, AV
0.50 - 5.0	56	46	9 KHz	QP, AV
5.0 - 30	60	50	9 KHz	QP, AV

[1)] At the transition frequency, the lower limit applies.
[2)] The limit decreases linearly with the logarithm of the frequency.

Test Configuration

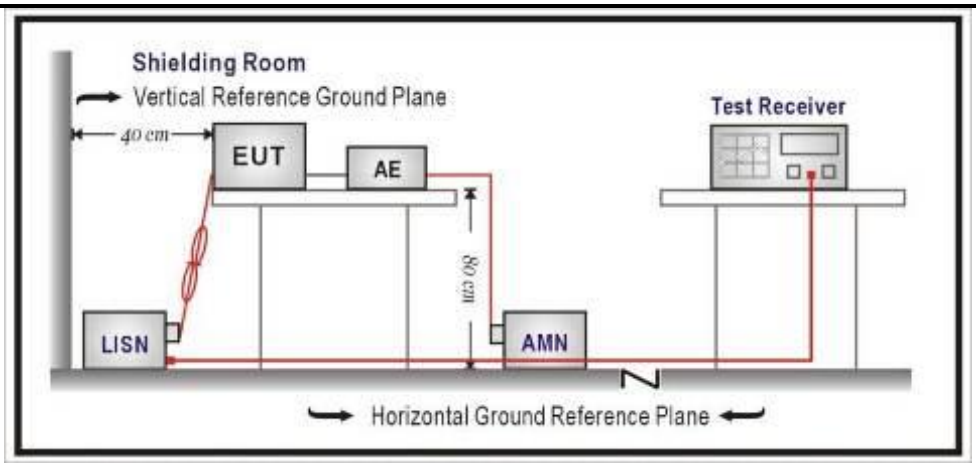

Performed measurements

Port under test		Terminal							
☒	AC mains input power	☒	N	☒	L1	☐	L2	☐	L3
☐	DC input power	☐	Positive (+)			☐	Negative (-)		

Test method applied	☒	Artificial mains network		
	☐	Voltage probe		
Test setup	☒	Table top	☐	Artificial hand applied
	☐	Floor standing	☐	Other:
	Refer to the Annex 2 for test setup photo(s).			
Operating mode(s) used	Mode 1			
Envirment condition (temperature; humidiry)	23.0 °C; 45.0 %			
Remark	---			

Measurement data CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)	Port under test	AC mains input power
Operating mode / voltage / frequency used during the test		Mode 1/120 Vac / 60 Hz

Live

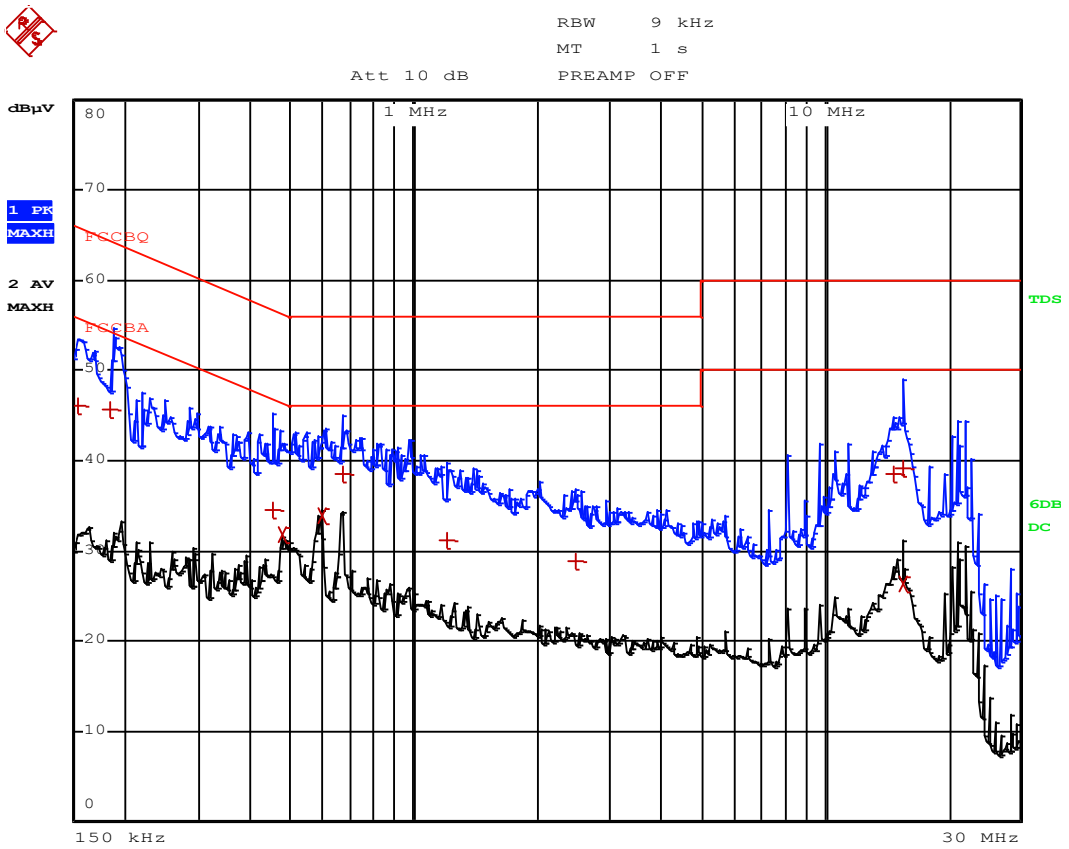

EDIT PEAK LIST (Final Measurement Results)

Trace1:	FCCBQ
Trace2:	FCCBA
Trace3:	---

TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
2 Average	598 kHz	33.81	-12.18
2 Average	478 kHz	31.84	-14.52
1 Quasi Peak	670 kHz	38.49	-17.50
1 Quasi Peak	186 kHz	45.74	-18.46
1 Quasi Peak	154 kHz	46.09	-19.68
1 Quasi Peak	15.498 MHz	39.08	-20.91
1 Quasi Peak	14.698 MHz	38.52	-21.47
1 Quasi Peak	450 kHz	34.48	-22.39
2 Average	15.498 MHz	26.43	-23.56
1 Quasi Peak	1.206 MHz	31.25	-24.74
1 Quasi Peak	2.474 MHz	28.78	-27.21

Remarks:

1) Level (Final measurement) = received value + transducer (Lisn + cable)

2) Delta = Level – Limit

No other significant emissions were measured at the frequency range of interest employing both the QP and AV detectors.

Measurement data CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)	Port under test	AC mains input power

Neutral

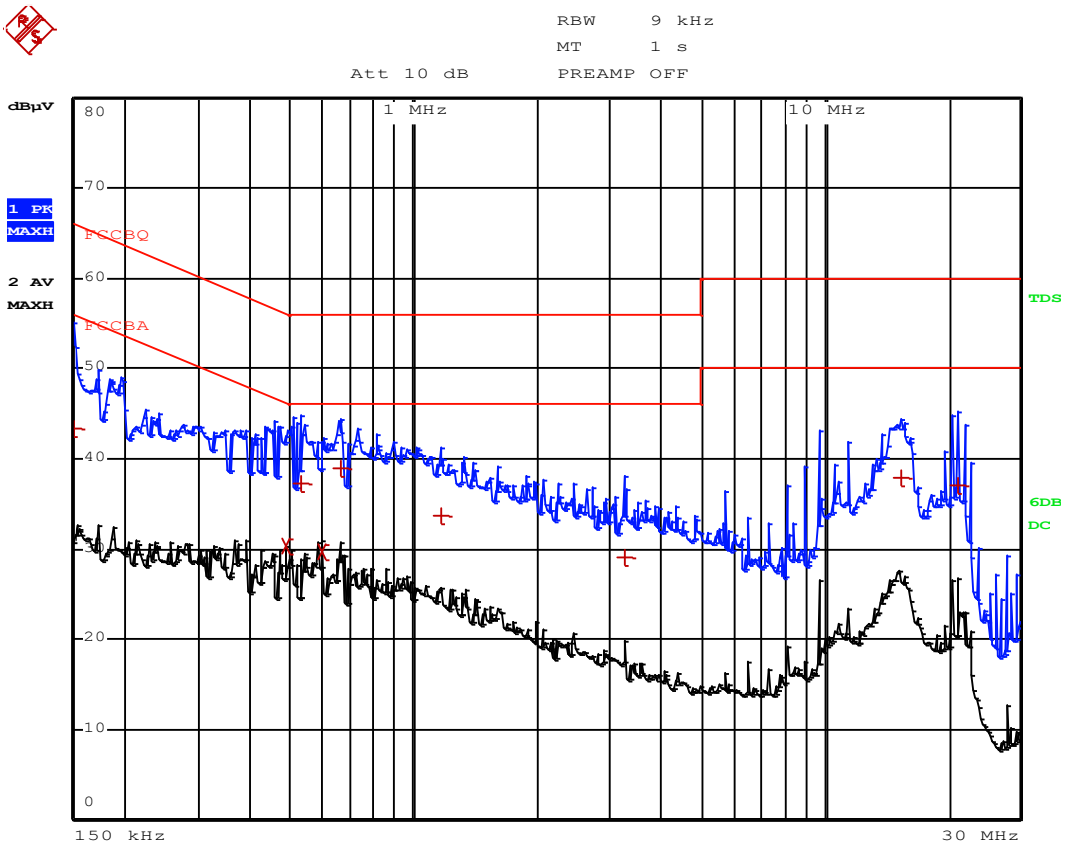

EDIT PEAK LIST (Final Measurement Results)

Trace1:	FCCBQ
Trace2:	FCCBA
Trace3:	---

TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
2 Average	486 kHz	30.31	-15.91
2 Average	598 kHz	29.71	-16.29
1 Quasi Peak	666 kHz	38.96	-17.03
1 Quasi Peak	530 kHz	37.25	-18.74
1 Quasi Peak	15.438 MHz	37.85	-22.14
1 Quasi Peak	1.17 MHz	33.78	-22.21
1 Quasi Peak	150 kHz	43.35	-22.64
1 Quasi Peak	21.234 MHz	36.98	-23.02
1 Quasi Peak	3.266 MHz	29.13	-26.86

Remarks:

1) Level (Final measurement) = received value + transducer (Lisn + cable)

2) Delta = Level – Limit

No other significant emissions were measured at the frequency range of interest employing both the QP and AV detectors.

Remark	--

Measurement data CSTR32CBDM (with LED driver: S012EFU2400050)	Port under test	AC mains input power
Operating mode / voltage / frequency used during the test		Mode 1/120 Vac / 60 Hz

Live

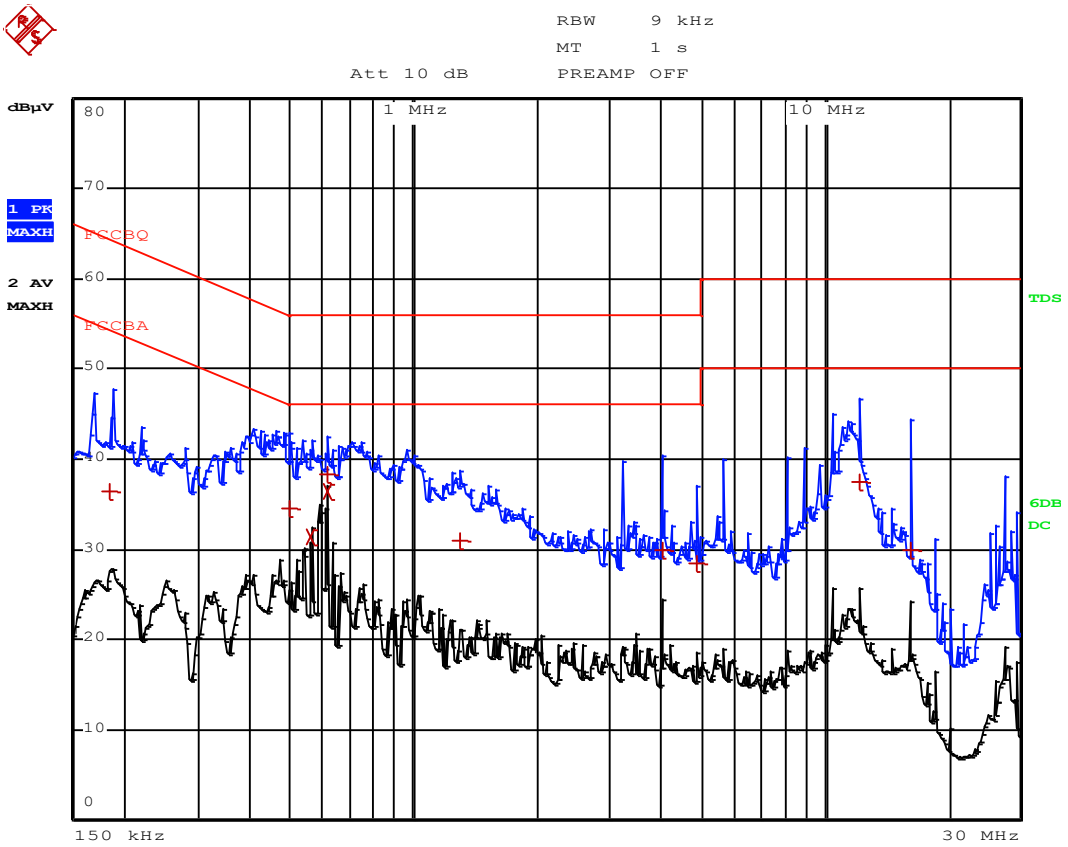

EDIT PEAK LIST (Final Measurement Results)

Trace1:	FCCBQ
Trace2:	FCCBA
Trace3:	---

TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
2 Average	614 kHz	36.50	-9.49
2 Average	562 kHz	31.39	-14.60
1 Quasi Peak	614 kHz	38.29	-17.70
1 Quasi Peak	498 kHz	34.49	-21.53
1 Quasi Peak	12.178 MHz	37.58	-22.41
1 Quasi Peak	1.302 MHz	30.96	-25.04
1 Quasi Peak	4.066 MHz	29.81	-26.18
1 Quasi Peak	4.882 MHz	28.39	-27.60
1 Quasi Peak	186 kHz	36.51	-27.69
1 Quasi Peak	16.254 MHz	29.96	-30.04

Remarks:

1) Level (Final measurement) = received value + transducer (Lisn + cable)

2) Delta = Level – Limit

No other significant emissions were measured at the frequency range of interest employing both the QP and AV detectors.

Measurement data CSTR32CBDM (with LED driver: S012EFU2400050)	Port under test	AC mains input power

Neutral

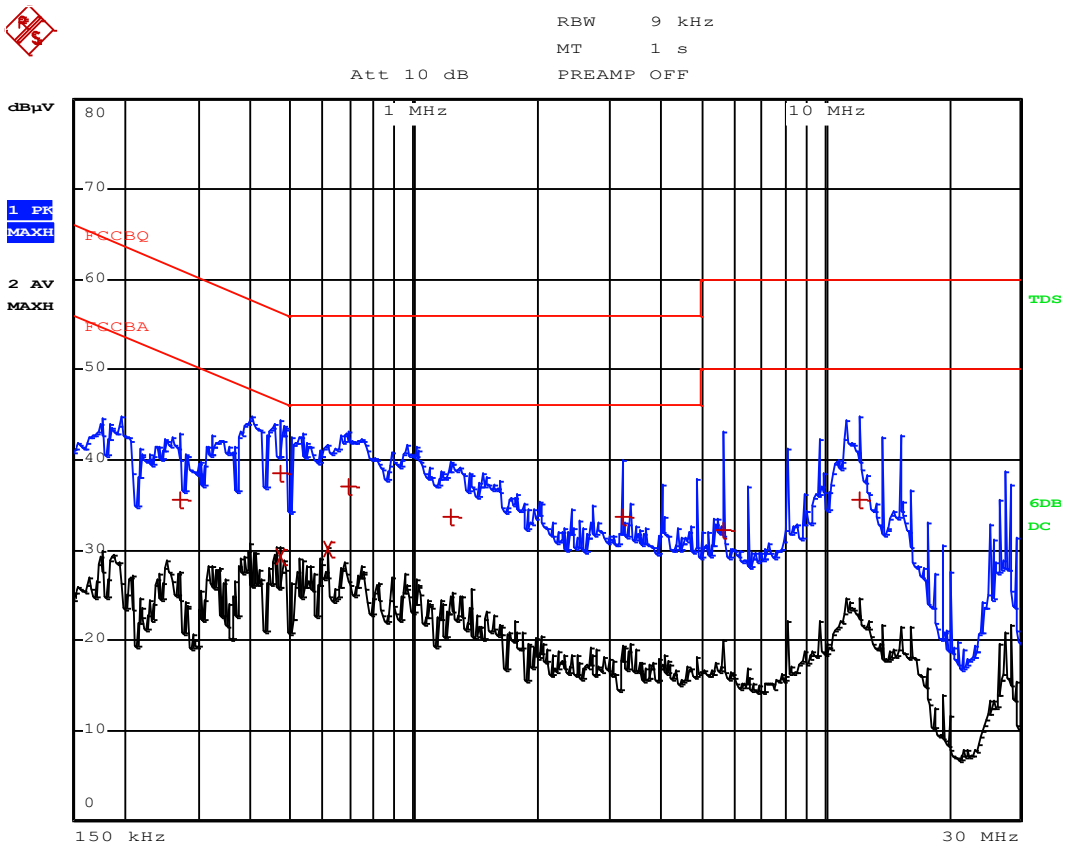

EDIT PEAK LIST (Final Measurement Results)

Trace1:	FCCBQ
Trace2:	FCCBA
Trace3:	---

TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
2 Average	618 kHz	30.21	-15.78
2 Average	474 kHz	29.21	-17.23
1 Quasi Peak	474 kHz	38.55	-17.89
1 Quasi Peak	694 kHz	36.96	-19.03
1 Quasi Peak	1.23 MHz	33.74	-22.25
1 Quasi Peak	3.254 MHz	33.70	-22.29
1 Quasi Peak	12.206 MHz	35.67	-24.32
1 Quasi Peak	270 kHz	35.51	-25.60
1 Quasi Peak	5.682 MHz	32.15	-27.84

Remarks:

1) Level (Final measurement) = received value + transducer (Lisn + cable)

2) Delta = Level – Limit

No other significant emissions were measured at the frequency range of interest employing both the QP and AV detectors.

Remark	--

4.2	Emissions in non-restricted frequency bands	VERDICT: PASS

Emissions Limit 15.209(a)			
Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30(Note 1)
1.705 - 30	30	29.5	30(Note 1)
30 - 88	100	40	3(Note 2)
88 - 216	150	43.5	3(Note 2)
216 - 960	200	46	3(Note 2)
Above 960	500	54	3(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

Test Configuration

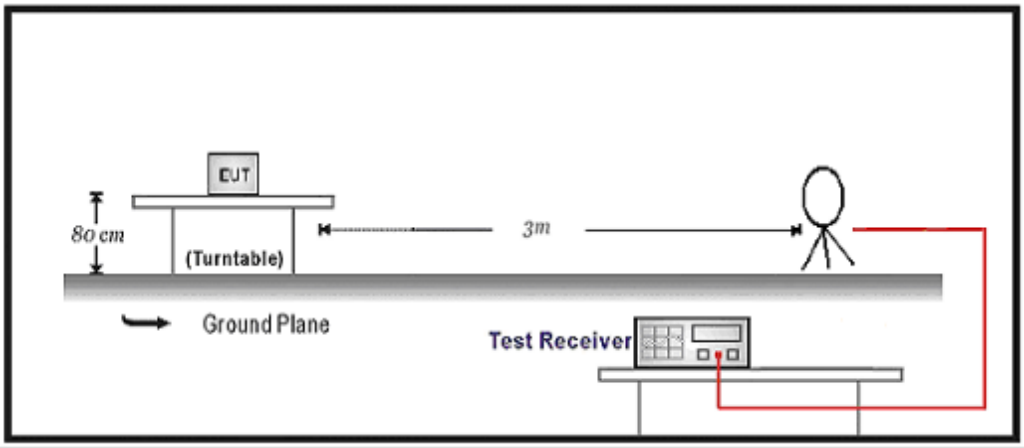

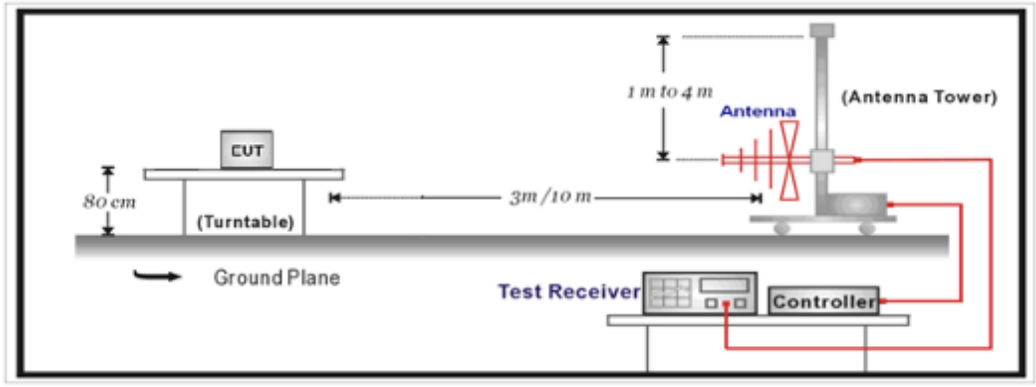

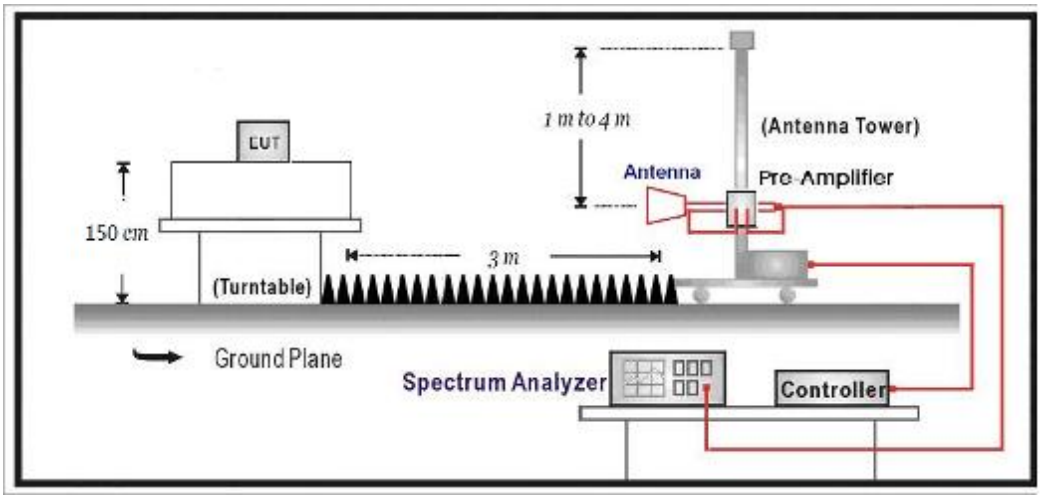

Performed measurements

Port under test	Enclosure port	
Test method applied	☐	Conducted measurement
	☒	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	1)The test frequency range, 9kHz~30MHz, 18GHz~26GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report. 2)The EUT are tested in three orientations. The record is the worst orientation which refer to the Annex 3 for test setup photo(s).	

Results of 30 – 1000 MHz

Measurement data CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)	
Operating mode / voltage / frequency used during the test	Mode 1 / 120 Vac / 60 Hz

Horizontal

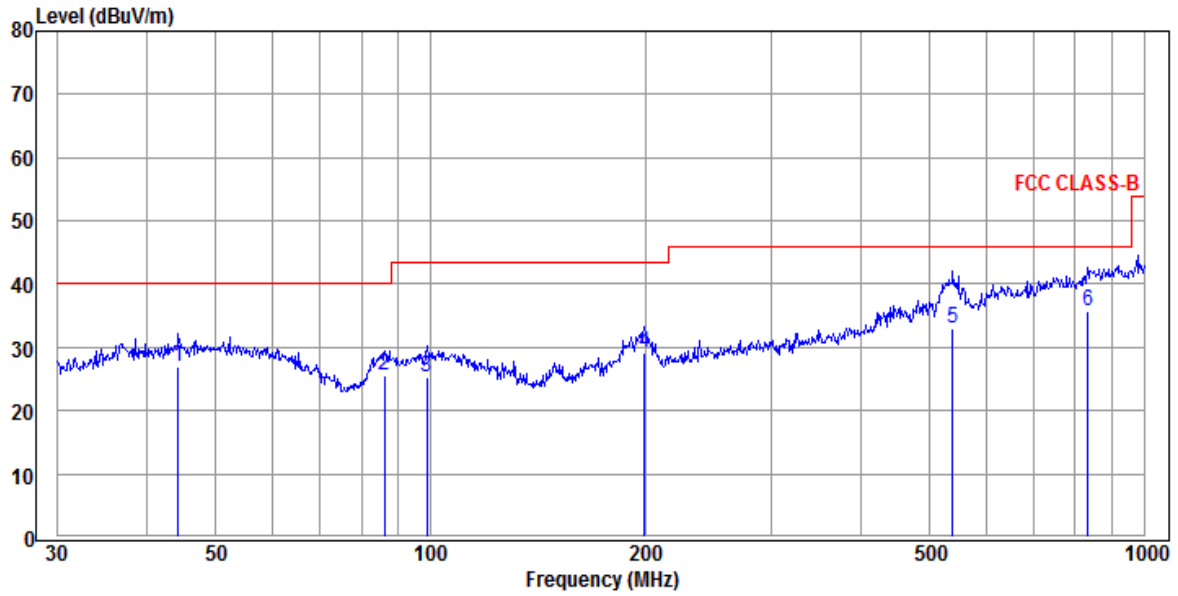

Freq	Reading	C.F	Result	Limit	Margin	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
44.28	6.40	20.63	27.03	40.00	12.97	QP
86.20	9.66	15.88	25.54	40.00	14.46	QP
98.83	6.35	18.84	25.19	43.50	18.31	QP
199.29	11.19	17.98	29.17	43.50	14.33	QP
539.48	6.94	26.09	33.03	46.00	12.97	QP
833.32	4.89	30.82	35.71	46.00	10.29	QP

Margin=limit-result

Remarks:

1) C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

2) Result = Reading + C.F (Correction Factor)
No other significant emissions were measured at the frequency range of interest employing the QP detector.

Measurement data CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)	
Operating mode / voltage / frequency used during the test	Mode 1 / 120 Vac / 60 Hz

Vertical

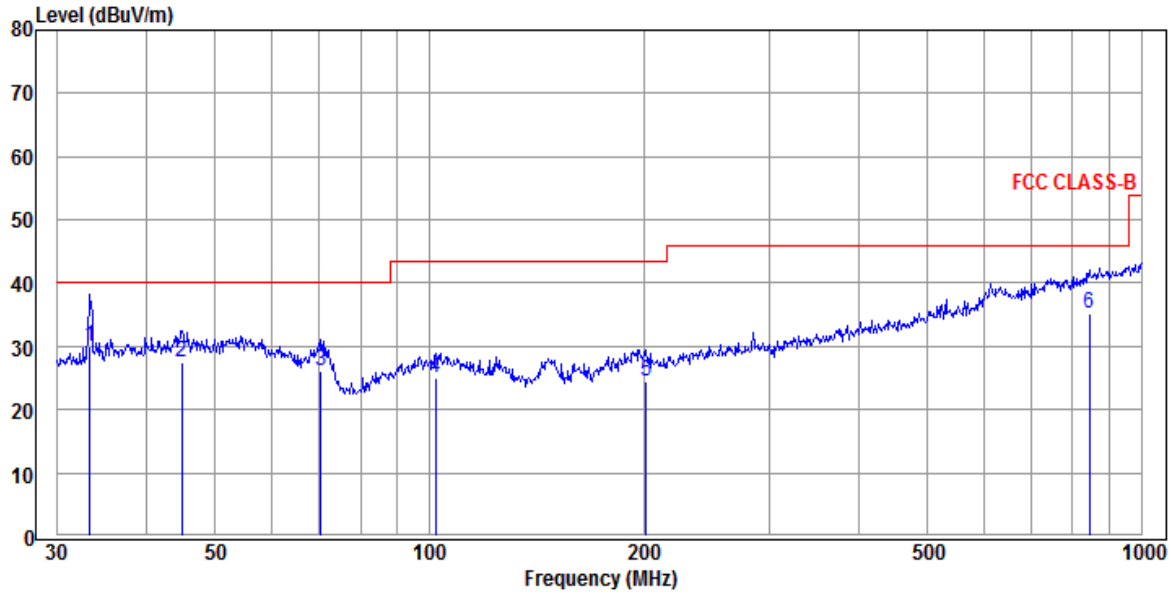

Freq	Reading	C.F	Result	Limit	Margin	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
33.33	11.40	18.67	30.07	40.00	9.93	QP
44.90	6.69	20.68	27.37	40.00	12.63	QP
70.34	9.91	16.14	26.05	40.00	13.95	QP
102.00	6.07	18.93	25.00	43.50	18.50	QP
201.39	6.64	17.89	24.53	43.50	18.97	QP
845.09	3.93	31.25	35.18	46.00	10.82	QP

Margin=limit-result

Remarks:

1) C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

2) Result = Reading + C.F (Correction Factor)

No other significant emissions were measured at the frequency range of interest employing the QP detector.

Remark	

Results of 1 – 18 GHz

Model	CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)
Operation Mode (worst case)	Mode 1 @2412 MHz, IEEE 802.11 b
Test voltage	3.3 Vdc

Results

Horizontal

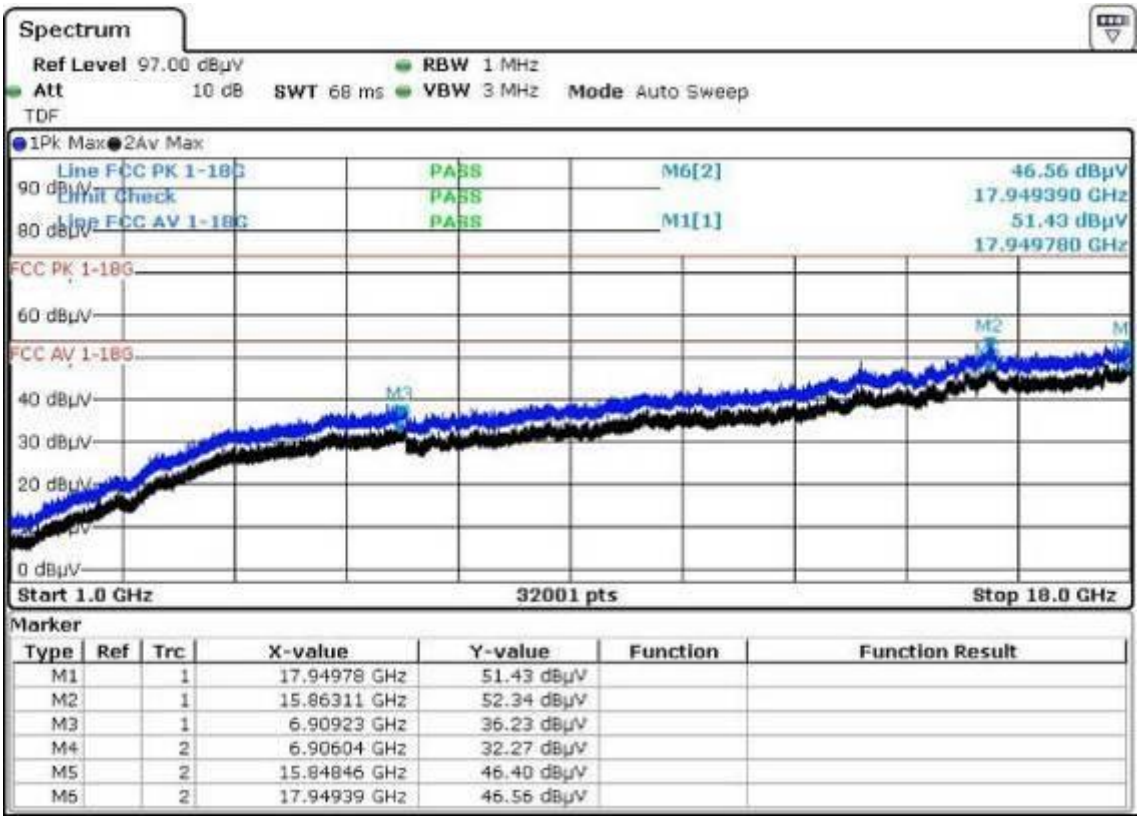

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.94978 GHz	51.43 dBµV		
M2		1	15.86311 GHz	52.34 dBµV		
M3		1	6.90923 GHz	36.23 dBµV		
M4		2	6.90604 GHz	32.27 dBµV		
M5		2	15.84846 GHz	46.40 dBµV		
M6		2	17.94939 GHz	46.56 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

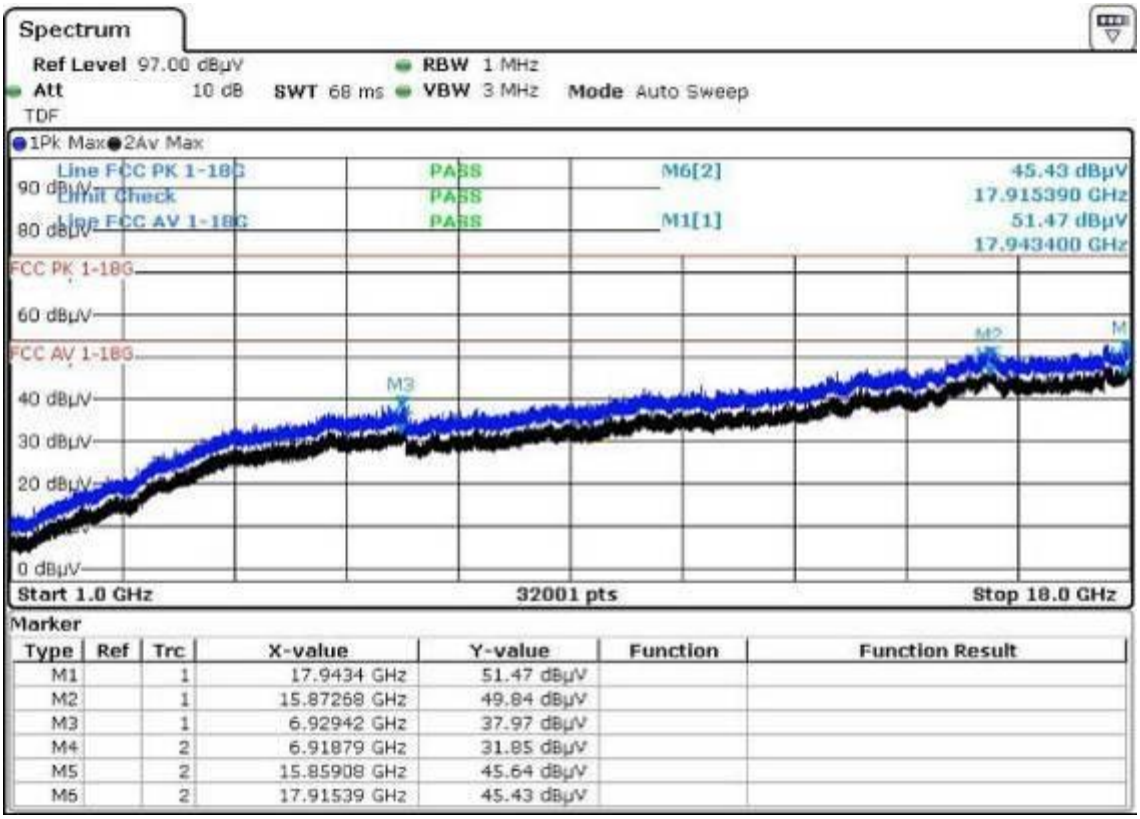

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.9434 GHz	51.47 dBµV		
M2		1	15.87268 GHz	49.84 dBµV		
M3		1	6.92942 GHz	37.97 dBµV		
M4		2	6.91879 GHz	31.85 dBµV		
M5		2	15.85908 GHz	45.64 dBµV		
M6		2	17.91539 GHz	45.43 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)
Operation Mode (worst case)	Mode 1 @2412 MHz, IEEE 802.11 g
Test voltage	3.3 Vdc

Results

Horizontal

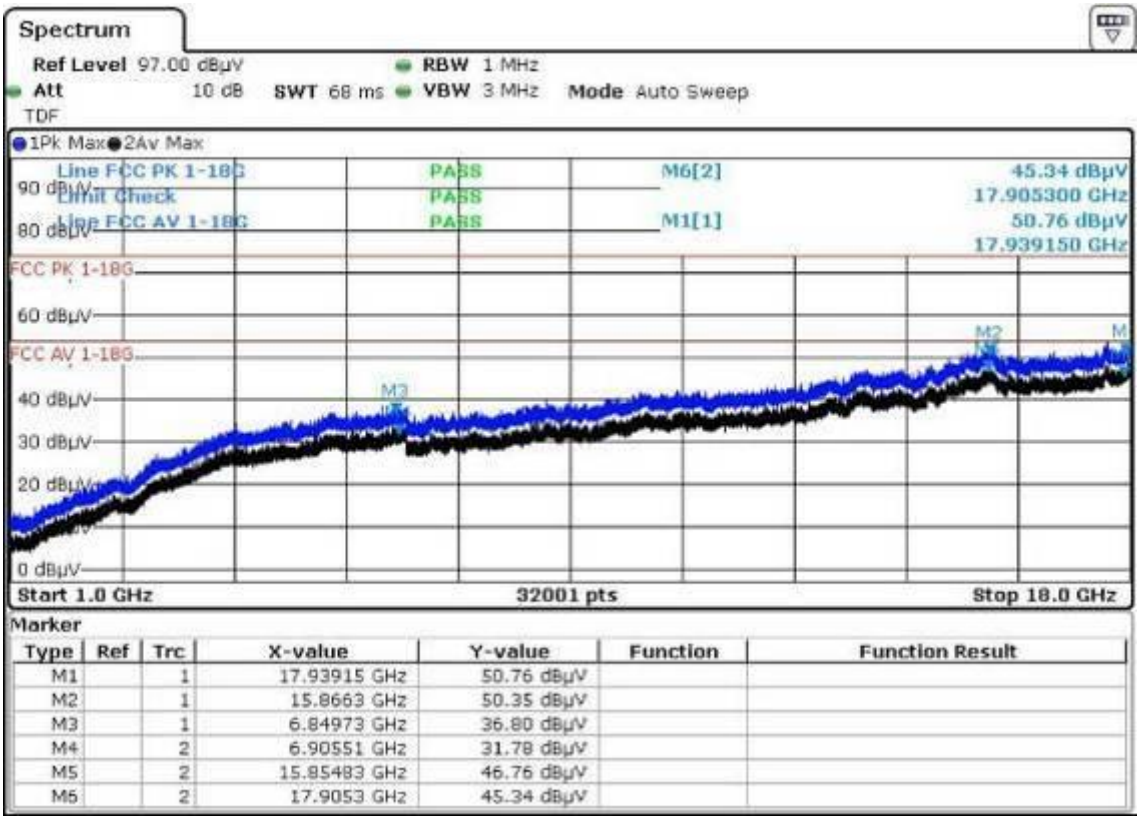

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.93915 GHz	50.76 dBµV		
M2		1	15.8663 GHz	50.35 dBµV		
M3		1	6.84973 GHz	36.80 dBµV		
M4		2	6.90551 GHz	31.78 dBµV		
M5		2	15.85483 GHz	46.76 dBµV		
M6		2	17.9053 GHz	45.34 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

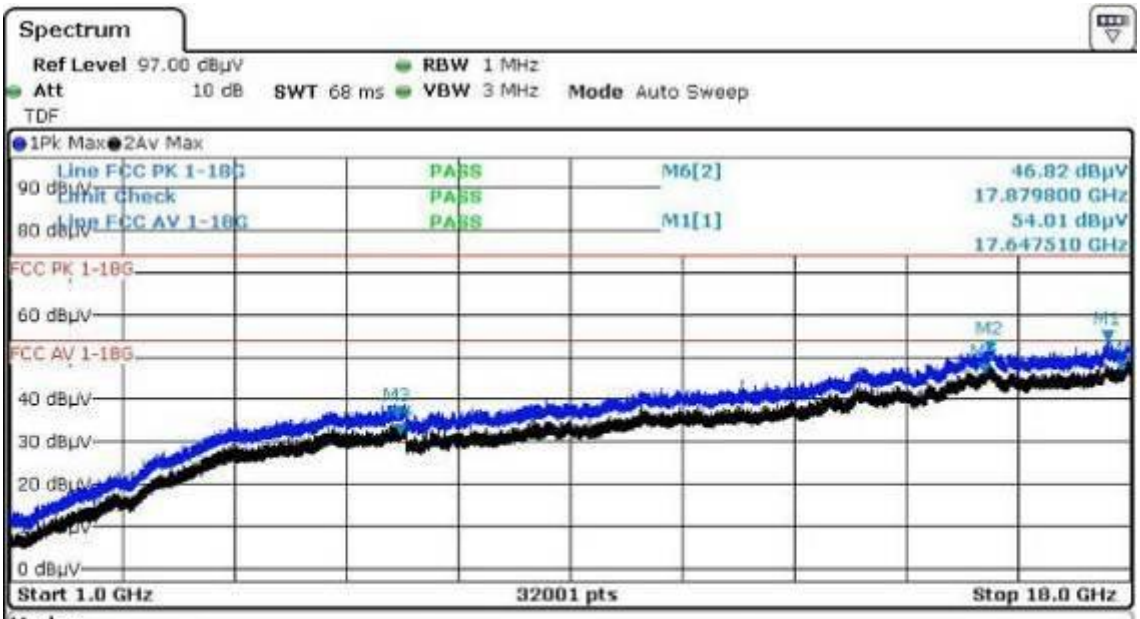

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.64751 GHz	54.01 dBµV		
M2		1	15.86046 GHz	51.44 dBµV		
M3		1	6.87842 GHz	35.94 dBµV		
M4		2	6.92092 GHz	31.81 dBµV		
M5		2	15.7863 GHz	46.27 dBµV		
M6		2	17.8798 GHz	46.82 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)
Operation Mode (worst case)	Mode 1 @2412 MHz, IEEE 802.11 n20
Test voltage	3.3 Vdc

Results

Horizontal

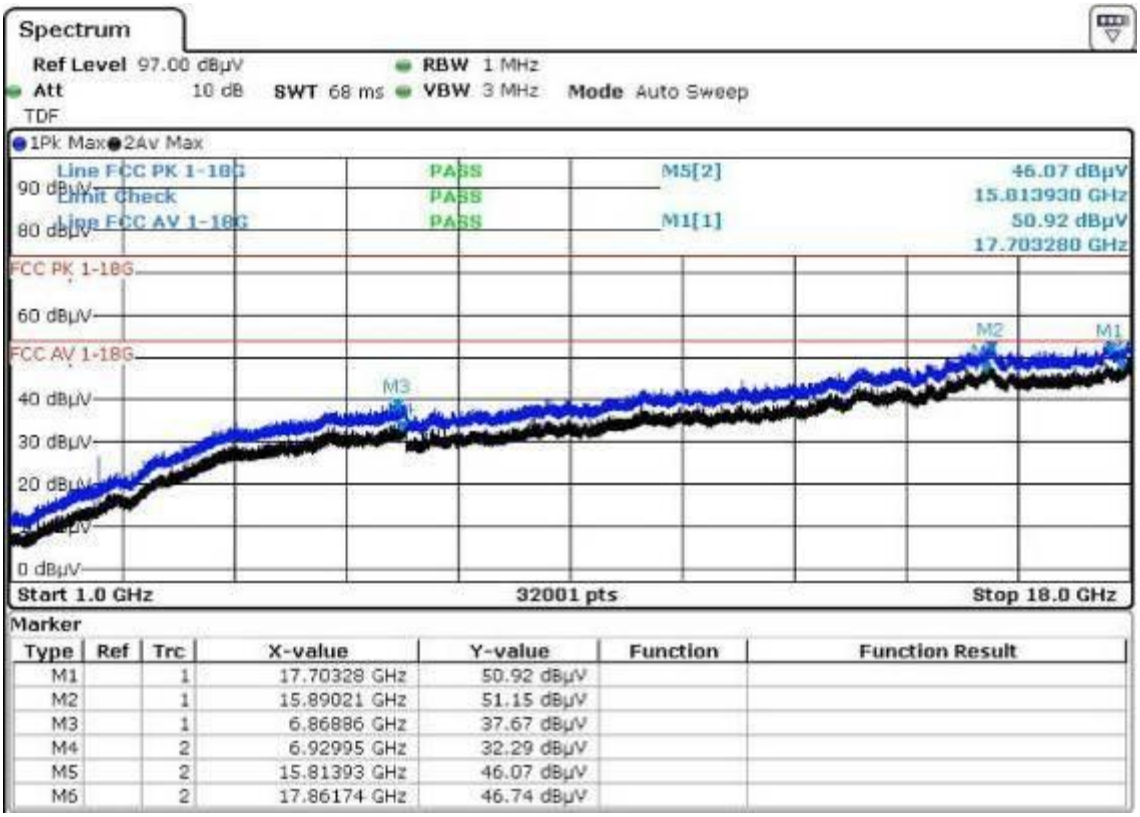

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

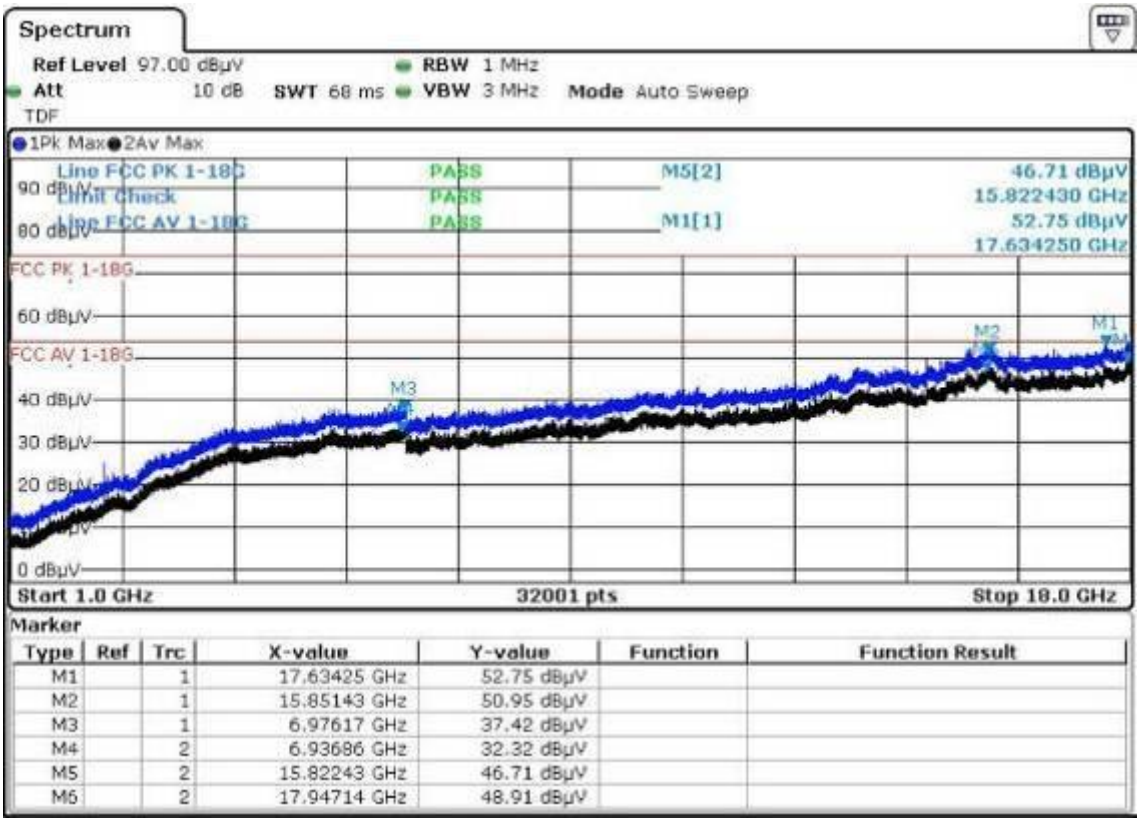

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.63425 GHz	52.75 dBµV		
M2		1	15.85143 GHz	50.95 dBµV		
M3		1	6.97617 GHz	37.42 dBµV		
M4		2	6.93686 GHz	32.32 dBµV		
M5		2	15.82243 GHz	46.71 dBµV		
M6		2	17.94714 GHz	48.91 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)
Operation Mode (worst case)	Mode 1 @2462 MHz, IEEE 802.11 b
Test voltage	3.3 Vdc

Results

Horizontal

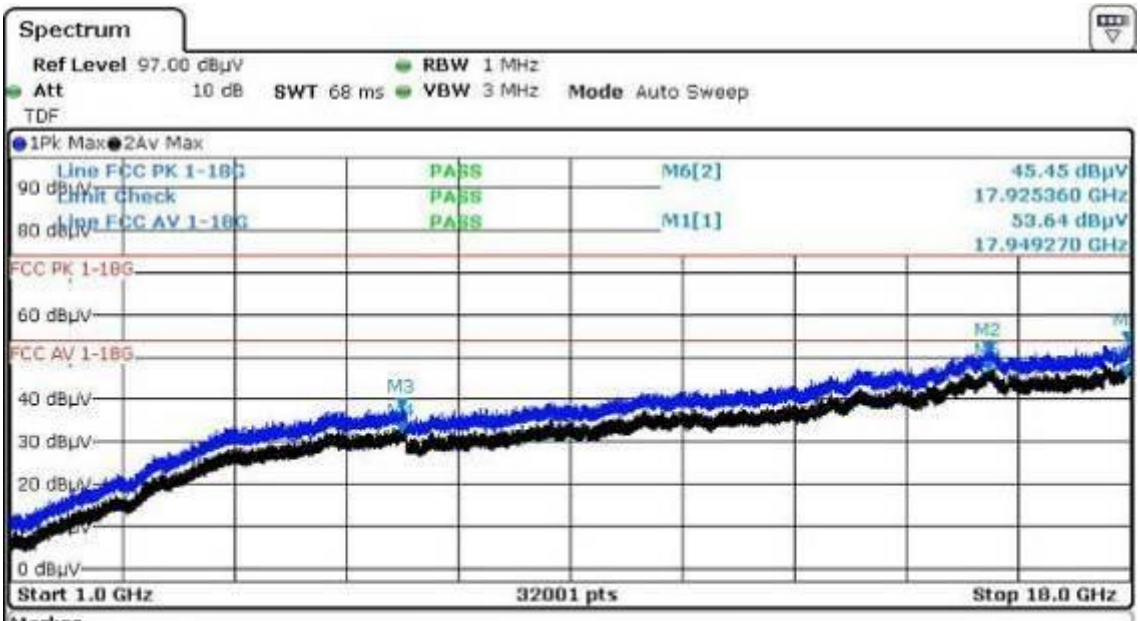

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.94927 GHz	53.64 dBµV		
M2		1	15.85674 GHz	51.17 dBµV		
M3		1	6.94642 GHz	37.86 dBµV		
M4		2	6.93951 GHz	32.00 dBµV		
M5		2	15.85058 GHz	46.47 dBµV		
M6		2	17.92536 GHz	45.45 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

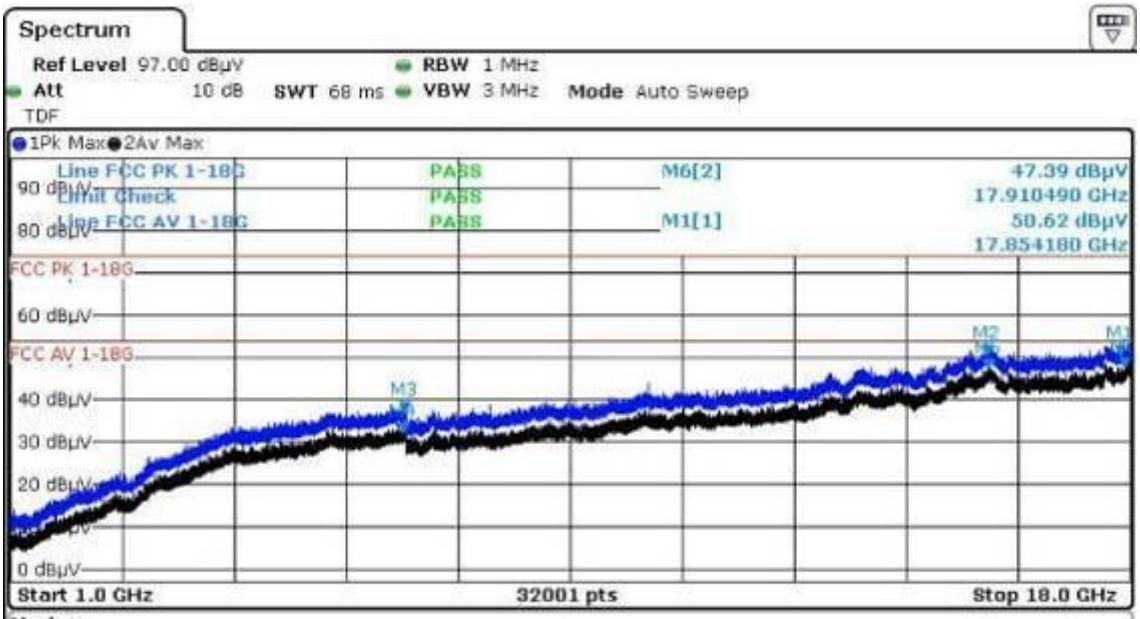

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.85418 GHz	50.62 dBµV		
M2		1	15.82486 GHz	50.61 dBµV		
M3		1	6.98042 GHz	37.05 dBµV		
M4		2	6.95704 GHz	32.17 dBµV		
M5		2	15.84846 GHz	47.05 dBµV		
M6		2	17.91049 GHz	47.39 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)
Operation Mode (worst case)	Mode 1 @2462 MHz, IEEE 802.11 g
Test voltage	3.3 Vdc

Results

Horizontal

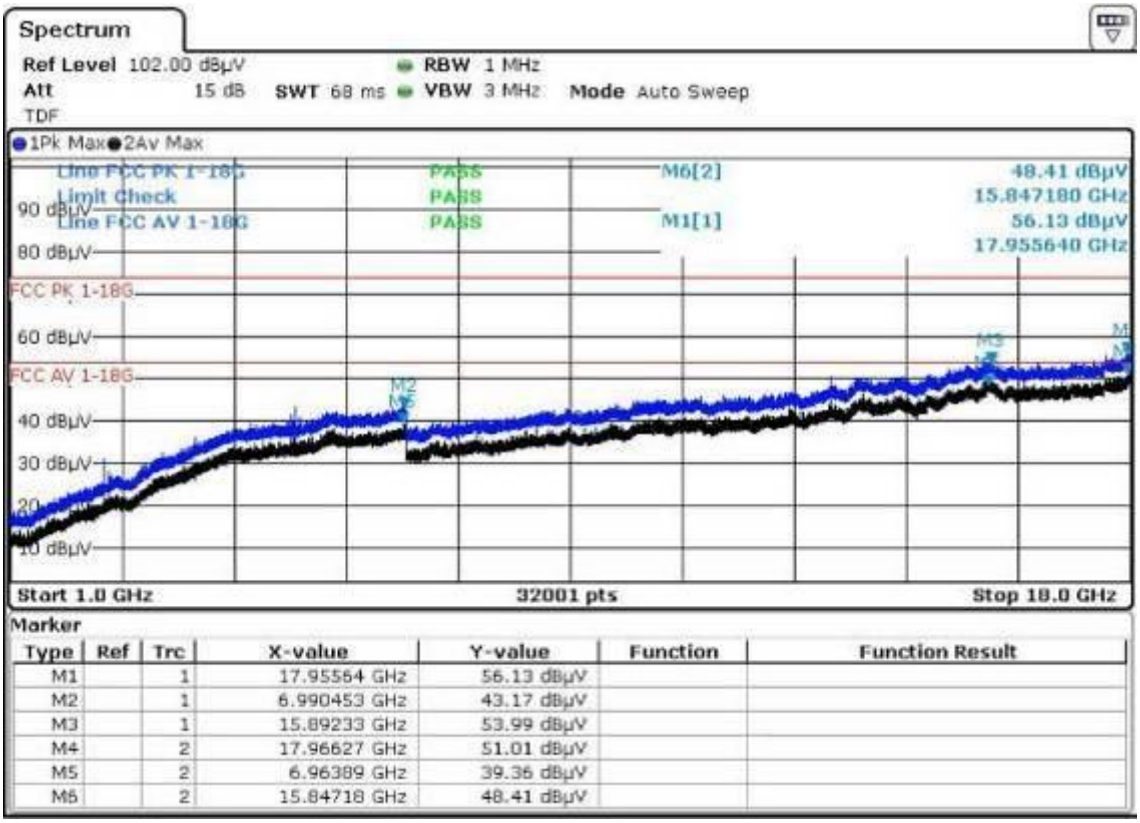

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.95564 GHz	56.13 dBµV		
M2		1	6.990453 GHz	43.17 dBµV		
M3		1	15.89233 GHz	53.99 dBµV		
M4		2	17.96627 GHz	51.01 dBµV		
M5		2	6.96389 GHz	39.36 dBµV		
M6		2	15.84718 GHz	48.41 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

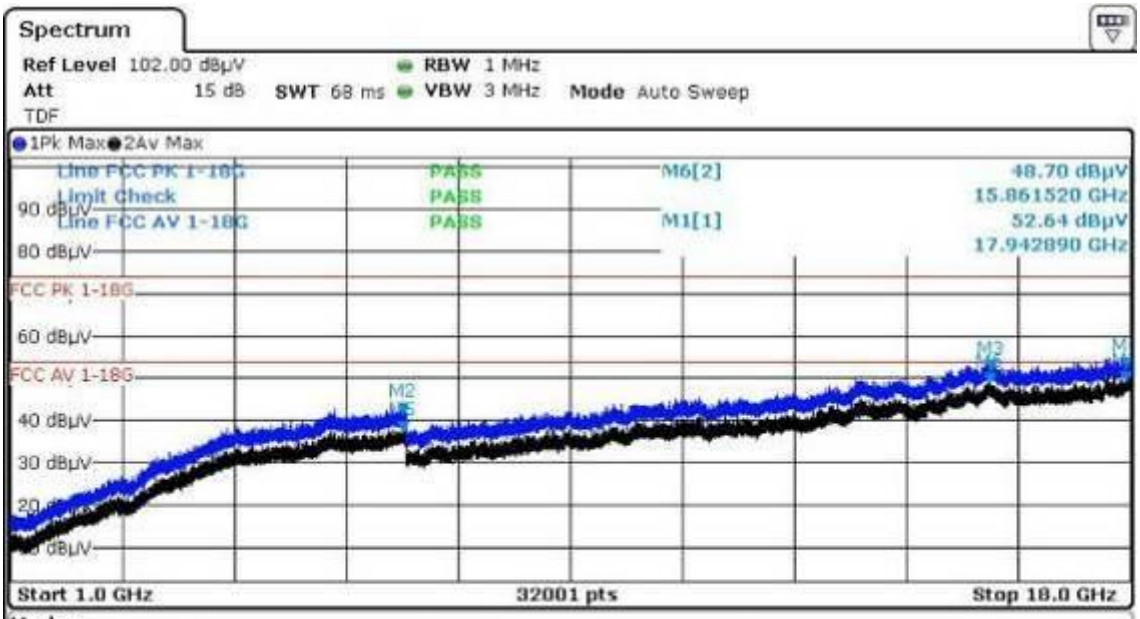

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.94289 GHz	52.64 dBµV		
M2		1	6.95167 GHz	41.69 dBµV		
M3		1	15.89552 GHz	51.75 dBµV		
M4		2	17.93652 GHz	49.06 dBµV		
M5		2	6.96602 GHz	37.42 dBµV		
M6		2	15.86152 GHz	48.70 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)
Operation Mode (worst case)	Mode 1 @2462 MHz, IEEE 802.11 n20
Test voltage	3.3 Vdc

Results

Horizontal

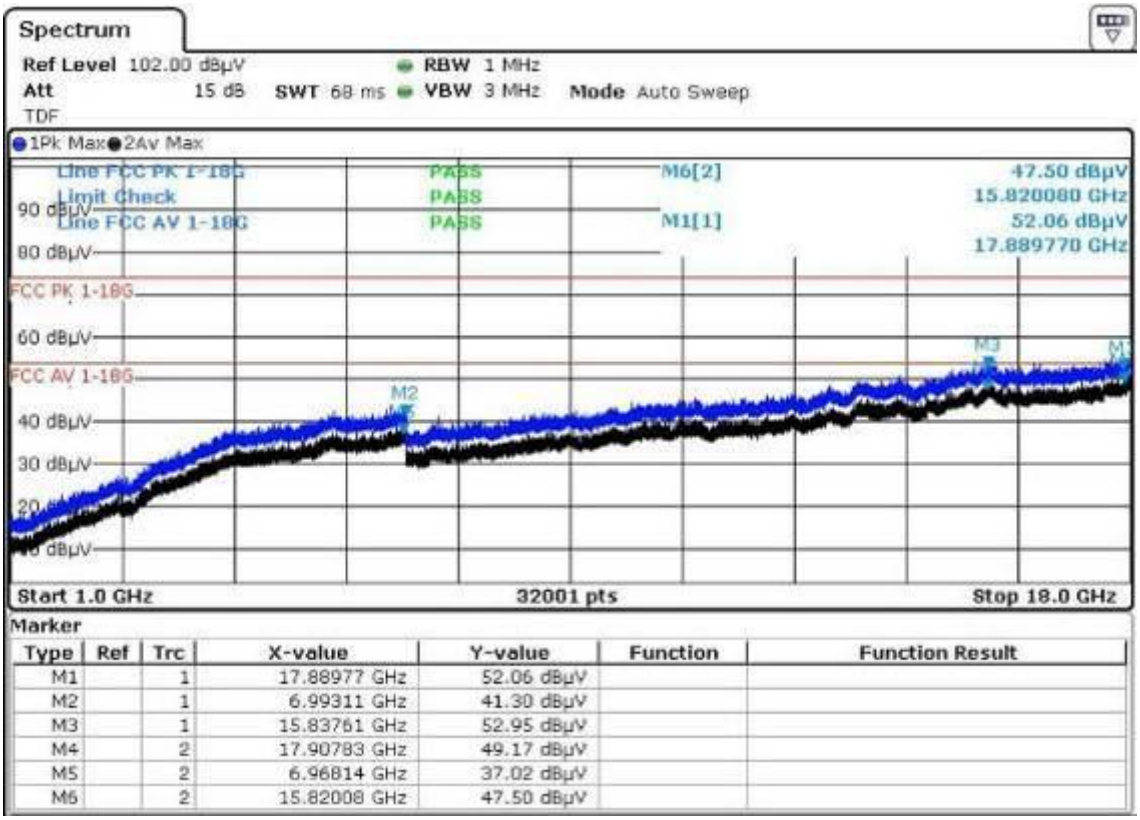

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

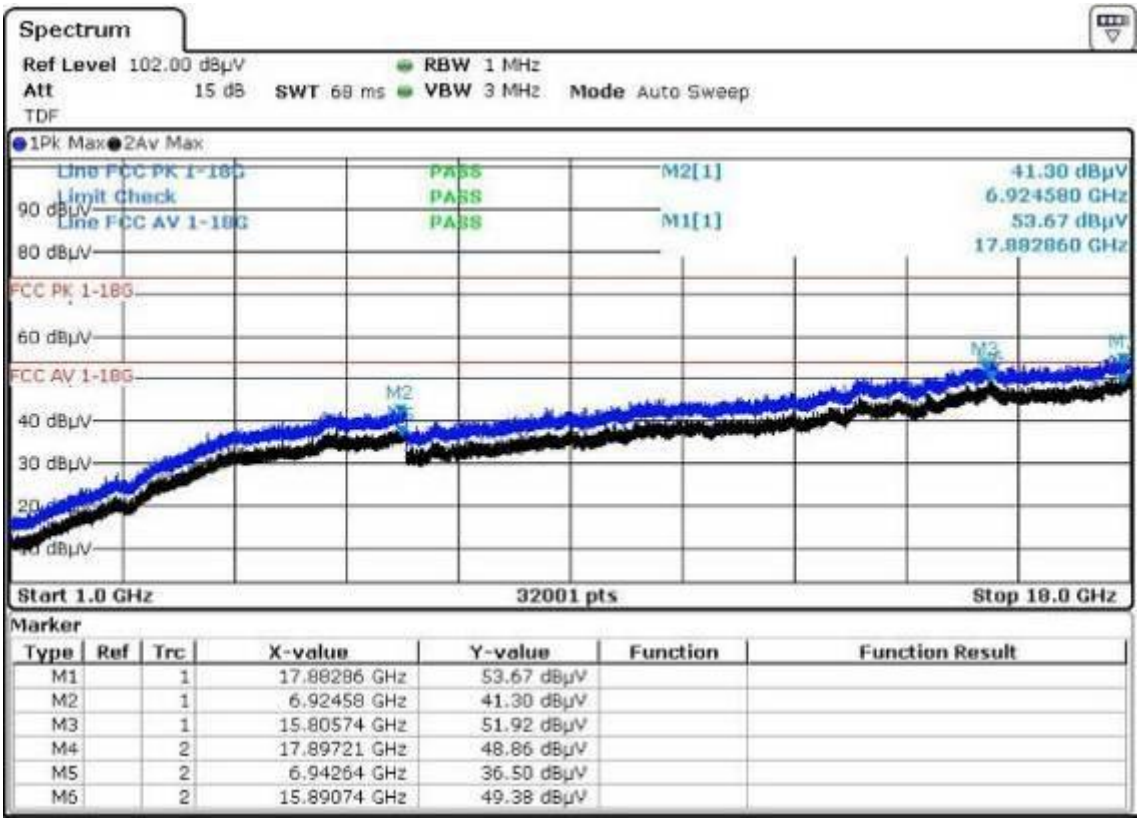

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.88286 GHz	53.67 dBµV		
M2		1	6.92458 GHz	41.30 dBµV		
M3		1	15.80574 GHz	51.92 dBµV		
M4		2	17.89721 GHz	48.86 dBµV		
M5		2	6.94264 GHz	36.50 dBµV		
M6		2	15.89074 GHz	49.38 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Results of 30 – 1000 MHz

Measurement data CSTR32CBDM (with LED driver: S012EFU2400050)	
Operating mode / voltage / frequency used during the test	Mode 1 / 120 Vac / 60 Hz

Horizontal

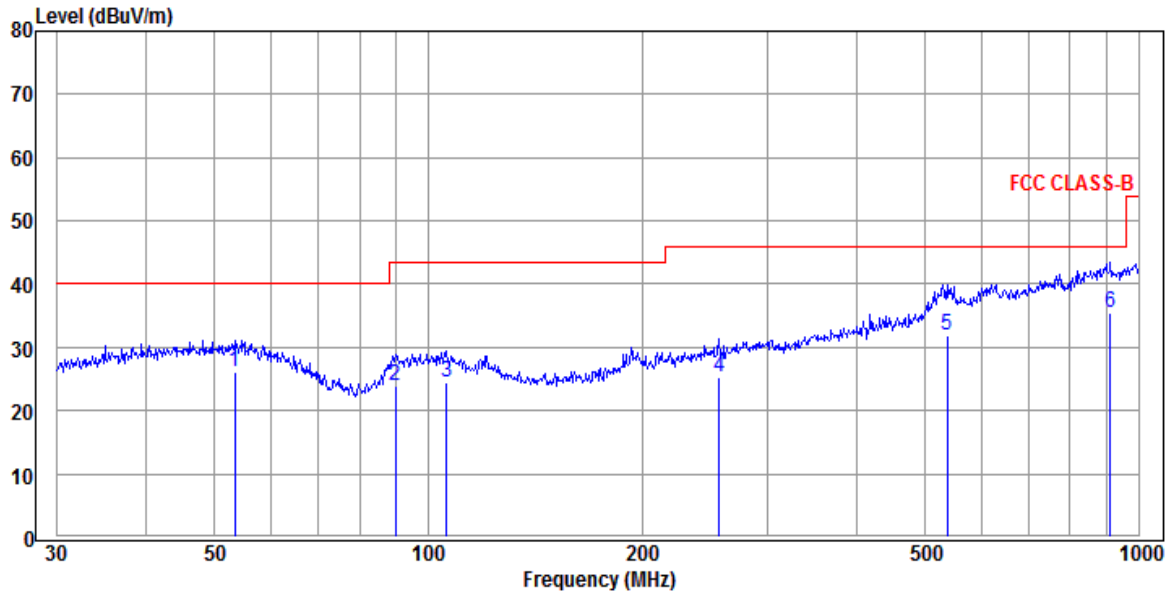

Freq	Reading	C.F	Result	Limit	Margin	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
53.32	5.49	20.56	26.05	40.00	13.95	QP
89.91	6.78	17.05	23.83	43.50	19.67	QP
106.01	5.54	18.86	24.40	43.50	19.10	QP
256.52	5.50	19.88	25.38	46.00	20.62	QP
537.59	5.94	26.06	32.00	46.00	14.00	QP
912.86	3.60	31.79	35.39	46.00	10.61	QP

Margin=limit-result

Remarks:

1) C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

2) Result = Reading + C.F (Correction Factor)
No other significant emissions were measured at the frequency range of interest employing the QP detector.

Measurement data CSTR32CBDM (with LED driver: S012EFU2400050)	
Operating mode / voltage / frequency used during the test	Mode 1 / 120 Vac / 60 Hz

Vertical

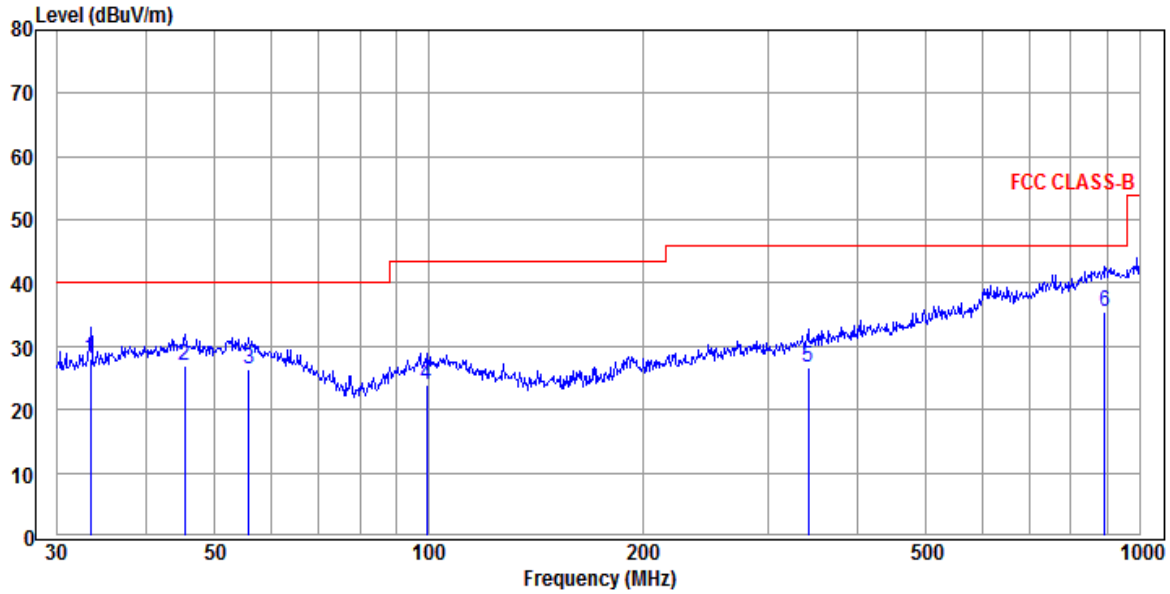

Freq	Reading	C.F	Result	Limit	Margin	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
33.45	9.22	18.69	27.91	40.00	12.09	QP
45.38	6.20	20.70	26.90	40.00	13.10	QP
55.81	6.04	20.36	26.40	40.00	13.60	QP
99.18	5.10	18.88	23.98	43.50	19.52	QP
341.98	4.34	22.42	26.76	46.00	19.24	QP
893.86	3.94	31.66	35.60	46.00	10.40	QP

Margin=limit-result

Remarks:

1) C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

2) Result = Reading + C.F (Correction Factor)

No other significant emissions were measured at the frequency range of interest employing the QP detector.

Remark	

Results of 1 – 18 GHz

Model	CSTR32CBDM (with LED driver: S012EFU2400050)
Operation Mode (worst case)	Mode 1 @2412 MHz, IEEE 802.11 b
Test voltage	3.3 Vdc

Results

Horizontal

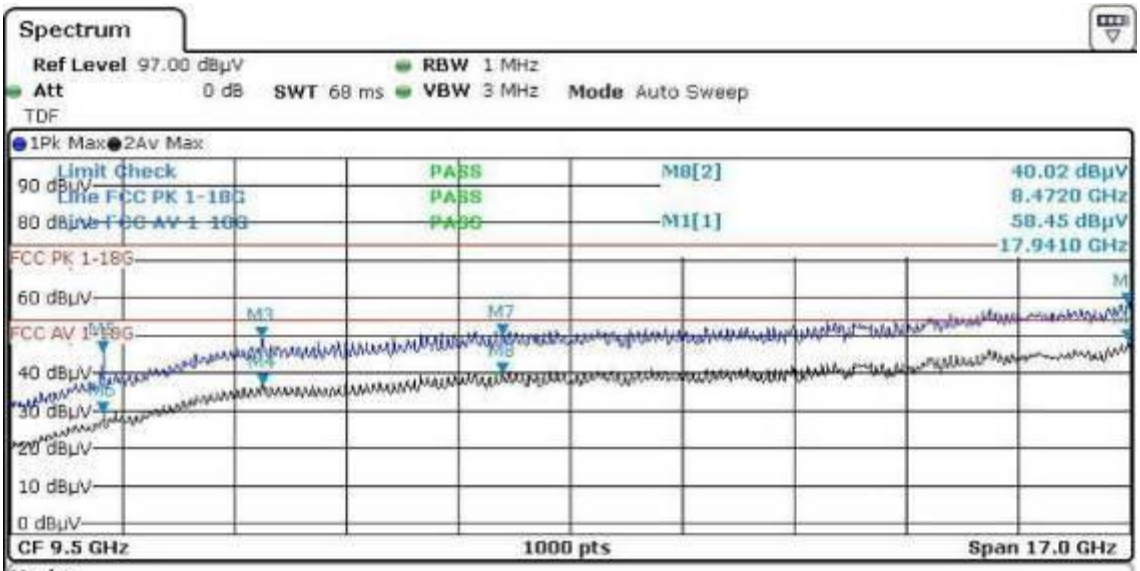

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.941 GHz	58.45 dBµV		
M2		2	17.958 GHz	48.63 dBµV		
M3		1	4.817 GHz	49.39 dBµV		
M4		2	4.834 GHz	36.86 dBµV		
M5		1	2.412 GHz	45.56 dBµV		
M6		2	2.412 GHz	29.60 dBµV		
M7		1	8.472 GHz	50.22 dBµV		
M8		2	8.472 GHz	40.02 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

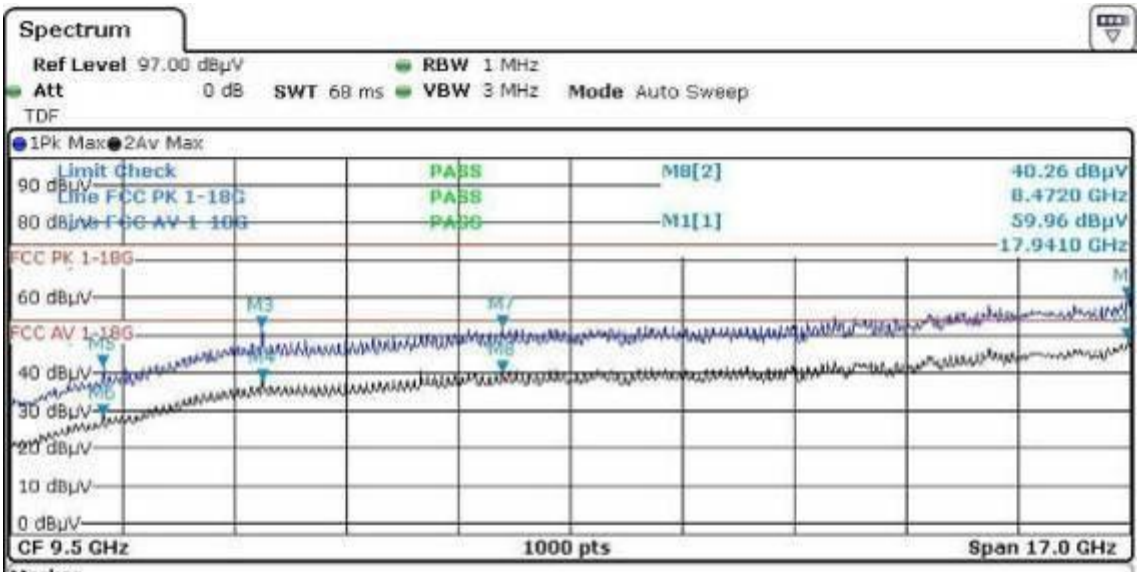

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.941 GHz	59.96 dBµV		
M2		2	17.958 GHz	49.08 dBµV		
M3		1	4.817 GHz	52.01 dBµV		
M4		2	4.834 GHz	38.27 dBµV		
M5		1	2.412 GHz	42.06 dBµV		
M6		2	2.412 GHz	28.65 dBµV		
M7		1	8.472 GHz	52.34 dBµV		
M8		2	8.472 GHz	40.26 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR32CBDM (with LED driver: S012EFU2400050)
Operation Mode (worst case)	Mode 1 @2412 MHz, IEEE 802.11 g
Test voltage	3.3 Vdc

Results

Horizontal

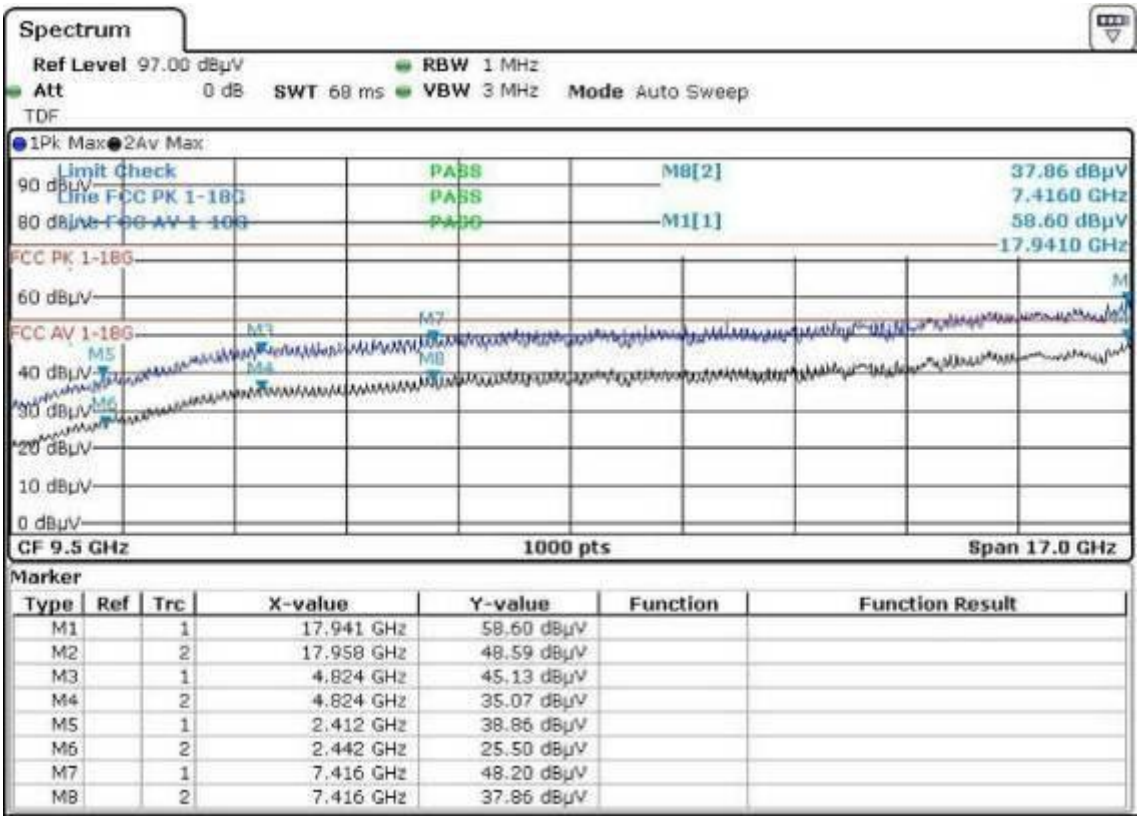

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

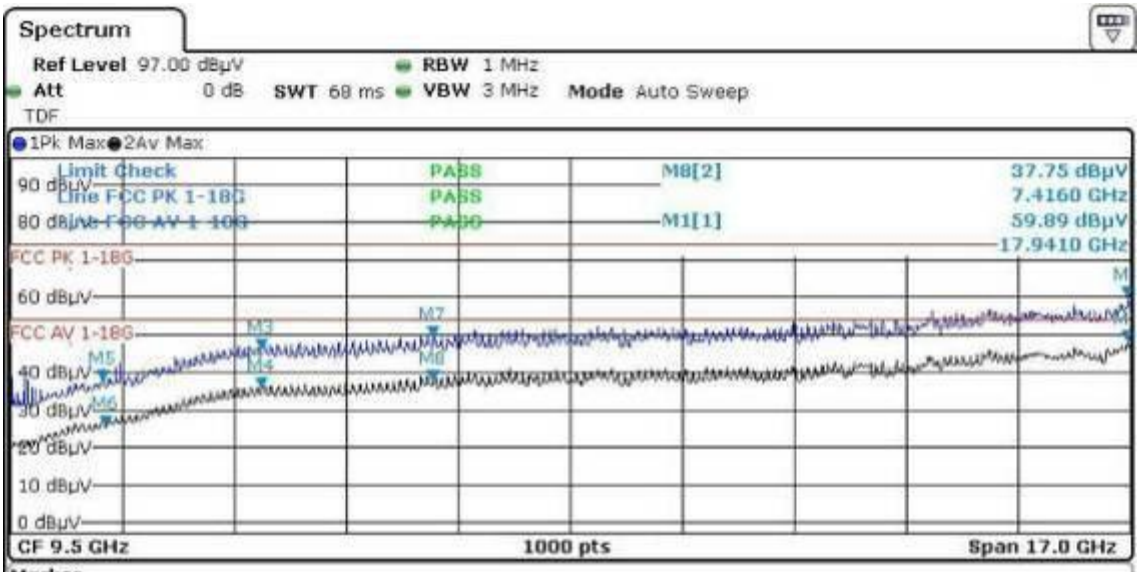

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.941 GHz	59.89 dBµV		
M2		2	17.958 GHz	48.39 dBµV		
M3		1	4.824 GHz	46.11 dBµV		
M4		2	4.824 GHz	35.81 dBµV		
M5		1	2.412 GHz	37.93 dBµV		
M6		2	2.442 GHz	25.69 dBµV		
M7		1	7.416 GHz	49.46 dBµV		
M8		2	7.416 GHz	37.75 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR32CBDM (with LED driver: S012EFU2400050)
Operation Mode (worst case)	Mode 1 @2412 MHz, IEEE 802.11 n20
Test voltage	3.3 Vdc

Results

Horizontal

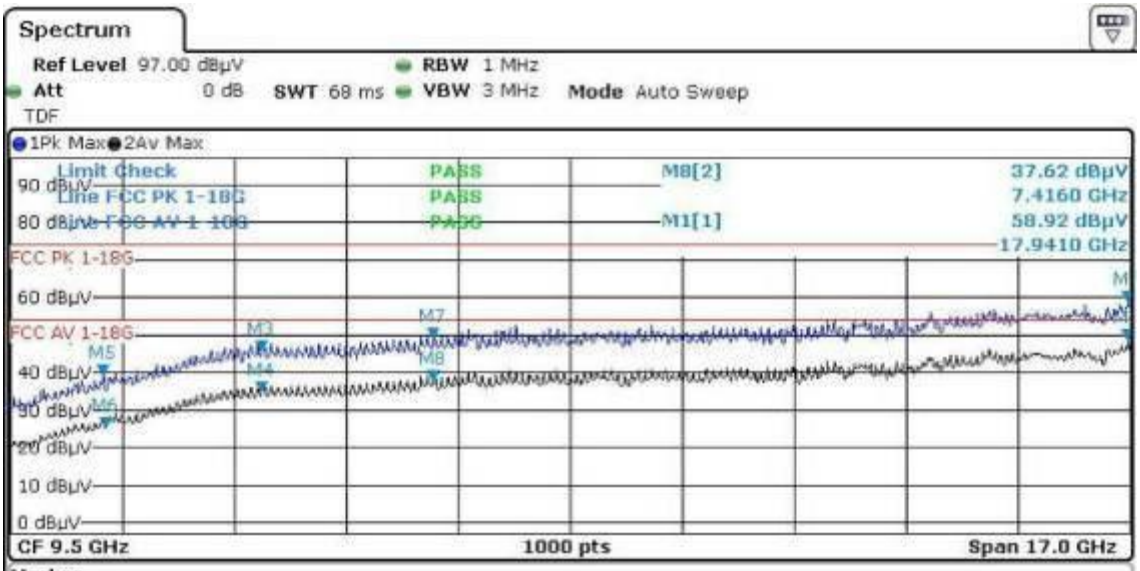

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.941 GHz	58.92 dBµV		
M2		2	17.958 GHz	48.59 dBµV		
M3		1	4.824 GHz	45.53 dBµV		
M4		2	4.824 GHz	34.86 dBµV		
M5		1	2.412 GHz	39.28 dBµV		
M6		2	2.442 GHz	25.49 dBµV		
M7		1	7.416 GHz	48.89 dBµV		
M8		2	7.416 GHz	37.62 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

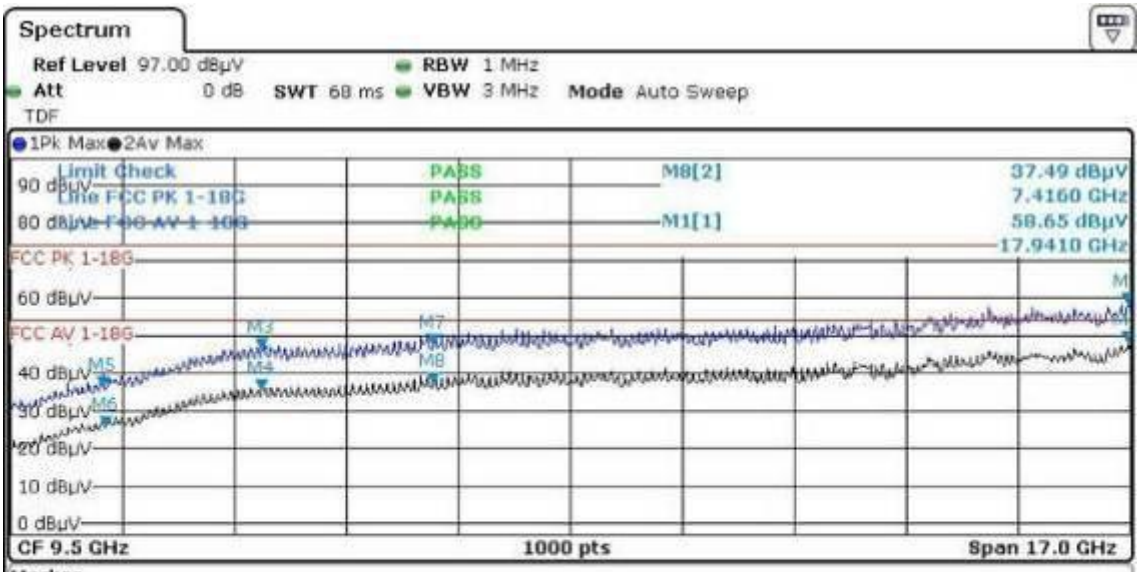

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	17.941 GHz	58.65 dBµV		
M2		2	17.958 GHz	48.19 dBµV		
M3		1	4.824 GHz	46.48 dBµV		
M4		2	4.824 GHz	35.44 dBµV		
M5		1	2.412 GHz	36.35 dBµV		
M6		2	2.442 GHz	25.67 dBµV		
M7		1	7.416 GHz	47.73 dBµV		
M8		2	7.416 GHz	37.49 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR32CBDM (with LED driver: S012EFU2400050)
Operation Mode (worst case)	Mode 1 @2462 MHz, IEEE 802.11 b
Test voltage	3.3 Vdc

Results

Horizontal

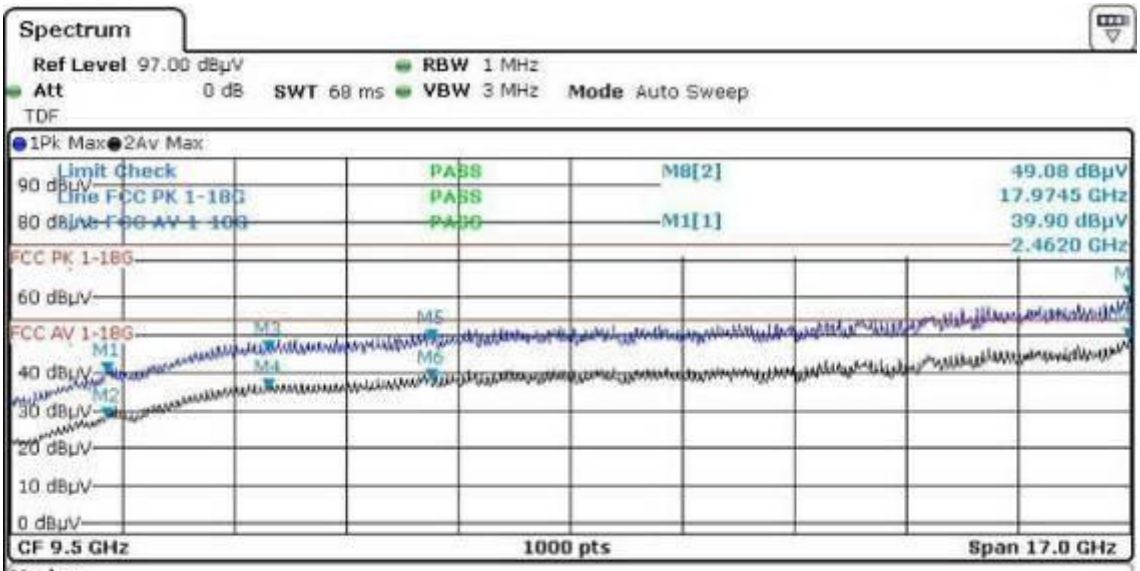

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.462 GHz	39.90 dBµV		
M2		2	2.462 GHz	27.88 dBµV		
M3		1	4.924 GHz	45.80 dBµV		
M4		2	4.924 GHz	35.49 dBµV		
M5		1	7.386 GHz	48.88 dBµV		
M6		2	7.386 GHz	38.06 dBµV		
M7		1	17.9745 GHz	60.48 dBµV		
M8		2	17.9745 GHz	49.08 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

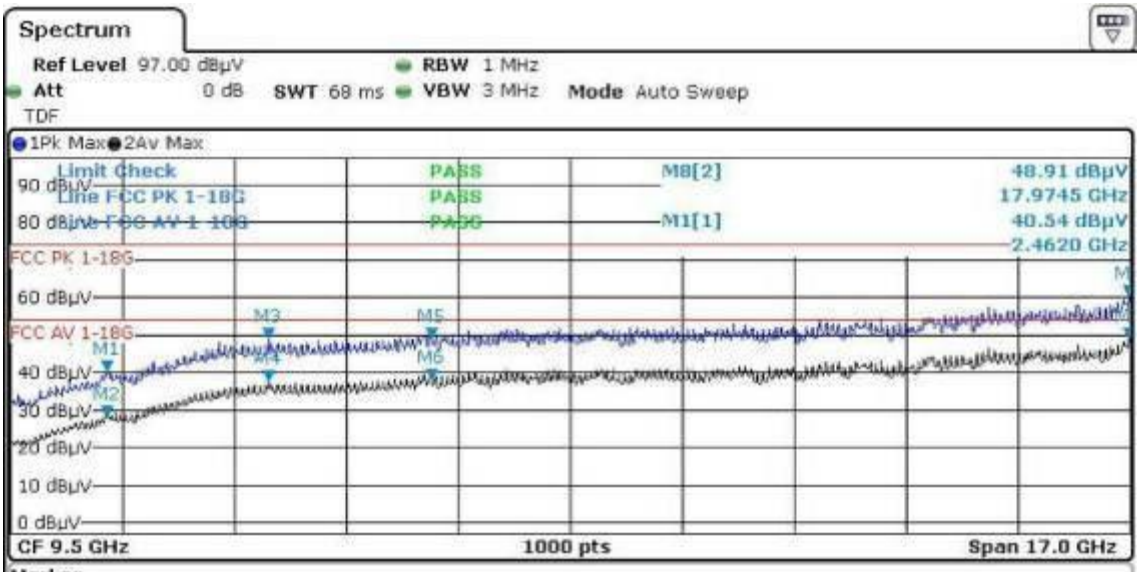

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.462 GHz	40.54 dBµV		
M2		2	2.462 GHz	28.27 dBµV		
M3		1	4.924 GHz	49.11 dBµV		
M4		2	4.924 GHz	37.73 dBµV		
M5		1	7.386 GHz	48.90 dBµV		
M6		2	7.386 GHz	38.21 dBµV		
M7		1	17.9745 GHz	60.23 dBµV		
M8		2	17.9745 GHz	48.91 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)
Operation Mode (worst case)	Mode 1 @2462 MHz, IEEE 802.11 g
Test voltage	3.3 Vdc

Results

Horizontal

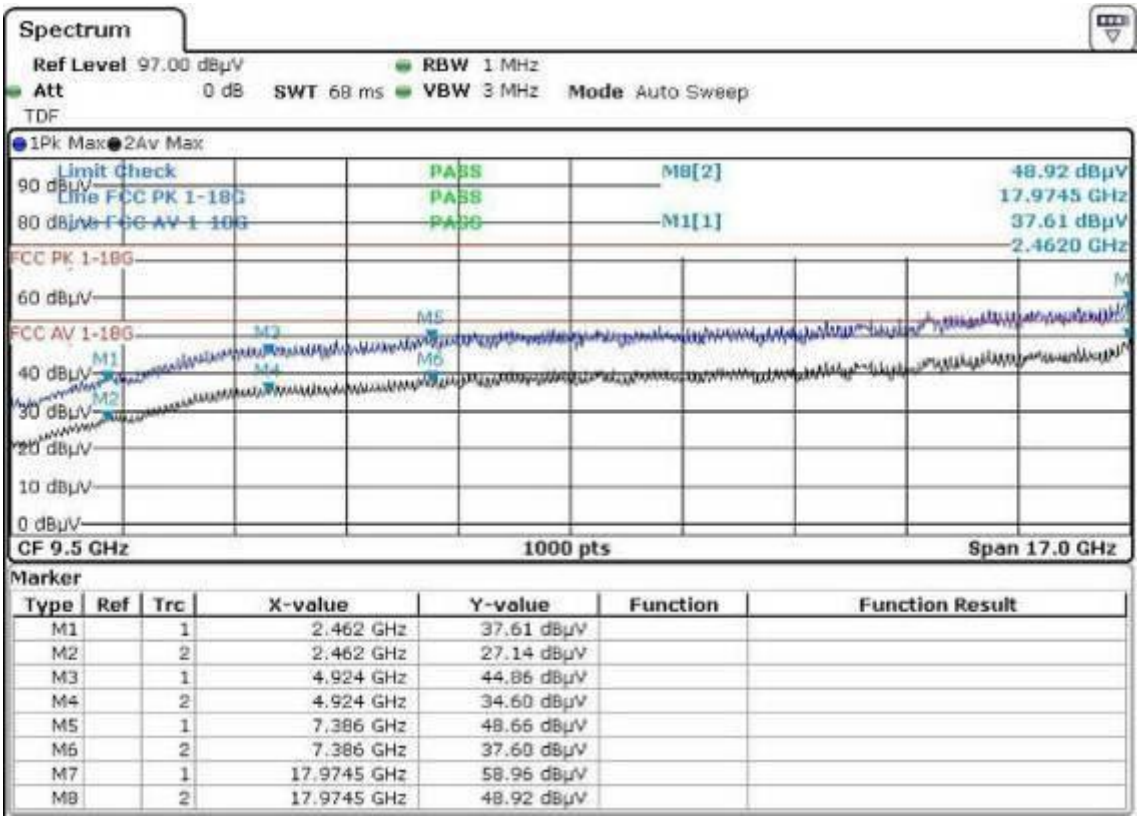

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

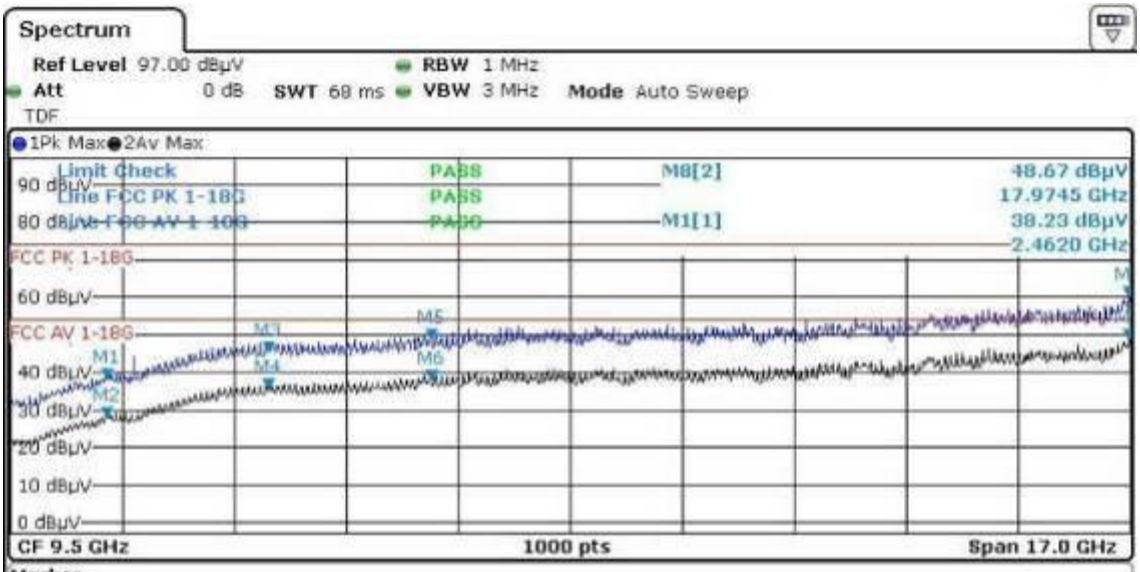

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.462 GHz	38.23 dBµV		
M2		2	2.462 GHz	27.92 dBµV		
M3		1	4.924 GHz	45.40 dBµV		
M4		2	4.924 GHz	35.42 dBµV		
M5		1	7.386 GHz	48.70 dBµV		
M6		2	7.386 GHz	37.68 dBµV		
M7		1	17.9745 GHz	60.01 dBµV		
M8		2	17.9745 GHz	48.67 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)
Operation Mode (worst case)	Mode 1 @2462 MHz, IEEE 802.11 n20
Test voltage	3.3 Vdc

Results

Horizontal

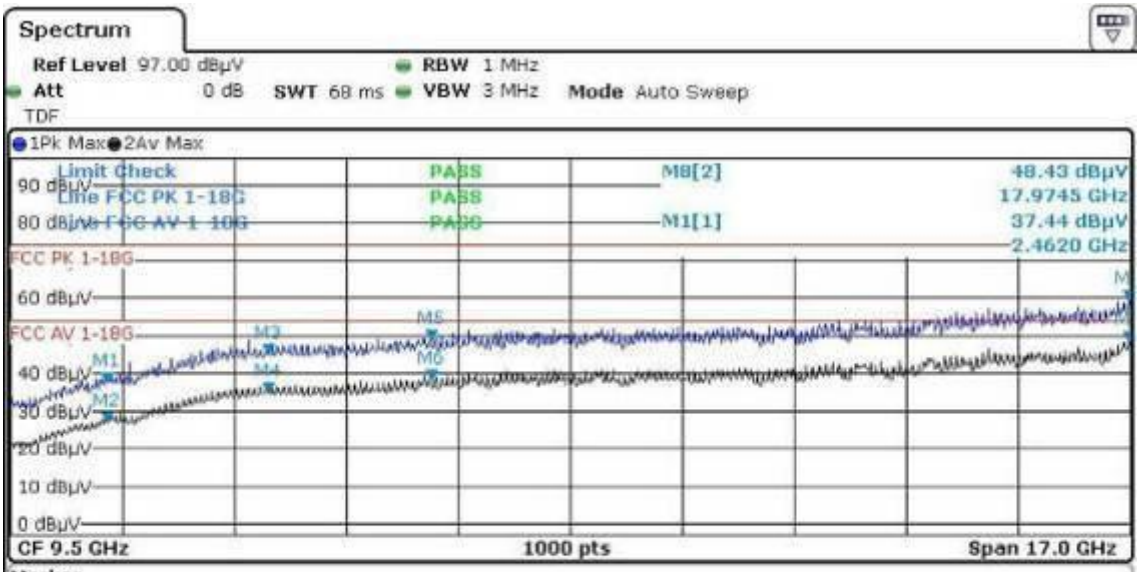

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.462 GHz	37.44 dBµV		
M2		2	2.462 GHz	26.88 dBµV		
M3		1	4.924 GHz	45.05 dBµV		
M4		2	4.924 GHz	34.71 dBµV		
M5		1	7.386 GHz	48.75 dBµV		
M6		2	7.386 GHz	38.02 dBµV		
M7		1	17.9745 GHz	59.15 dBµV		
M8		2	17.9745 GHz	48.43 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

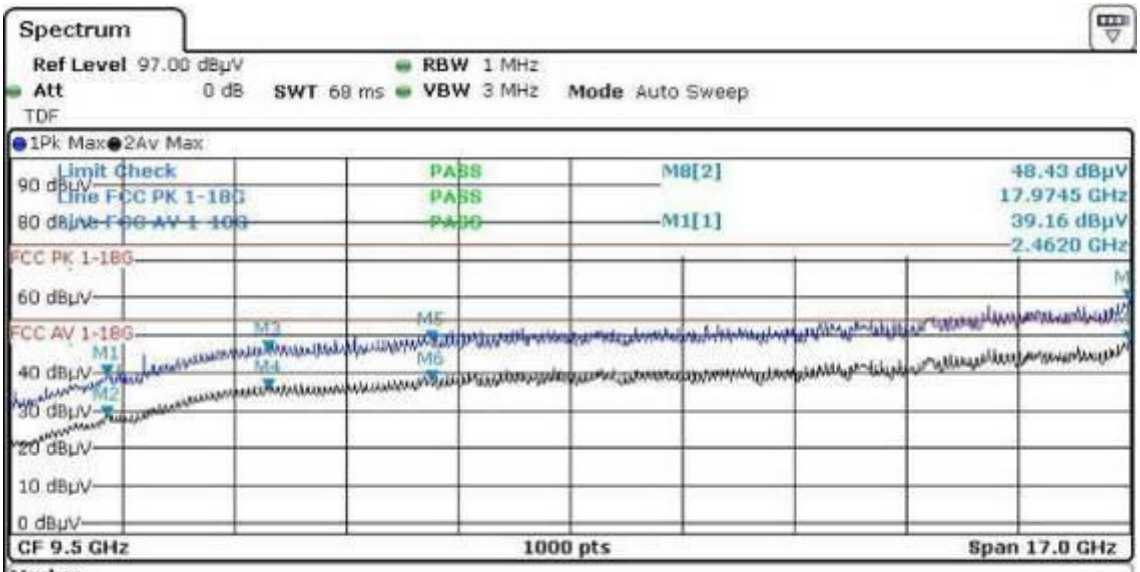

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.462 GHz	39.16 dBµV		
M2		2	2.462 GHz	28.49 dBµV		
M3		1	4.924 GHz	45.64 dBµV		
M4		2	4.924 GHz	35.65 dBµV		
M5		1	7.386 GHz	48.21 dBµV		
M6		2	7.386 GHz	37.57 dBµV		
M7		1	17.9745 GHz	59.08 dBµV		
M8		2	17.9745 GHz	48.43 dBµV		

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

4.3	Emissions in restricted frequency bands	VERDICT: PASS

Restricted Bands of operation of FCC			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 –16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975–12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675–12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			
Restricted Bands of operation for IC			
0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	

Restricted Band Emissions Limit			
Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30(Note 1)
1.705 - 30	30	29.5	30(Note 1)
30 - 88	100	40	3(Note 2)
88 - 216	150	43.5	3(Note 2)
216 - 960	200	46	3(Note 2)
Above 960	500	54	3(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

Test Configuration

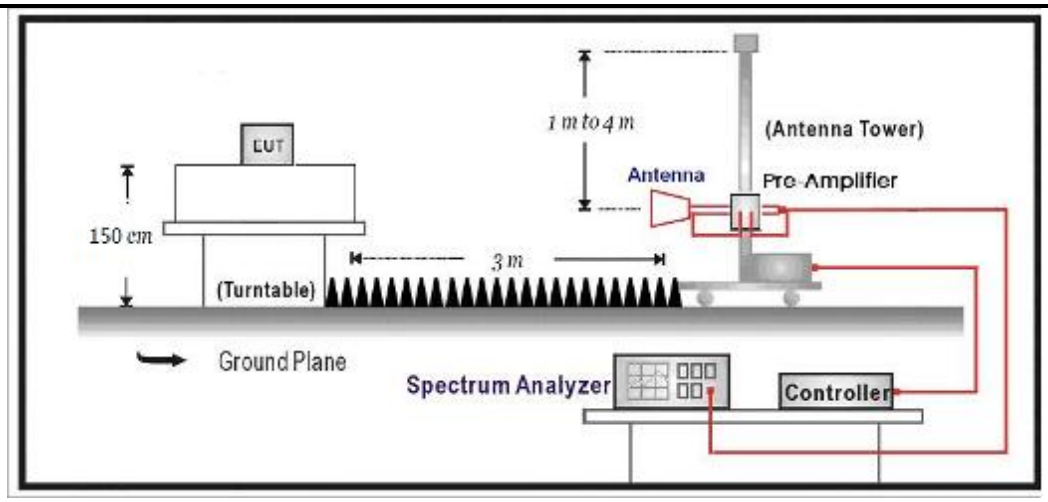

Performed measurements

Port under test	Enclosure port	
Test method applied	☐	Conducted measurement
	☒	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	---	

Model	CSTR16CBDM
Operation Mode (worst case)	Mode 1 @2412 MHz, IEEE 802.11 b
Test voltage	3.3 Vdc

Results

Horizontal

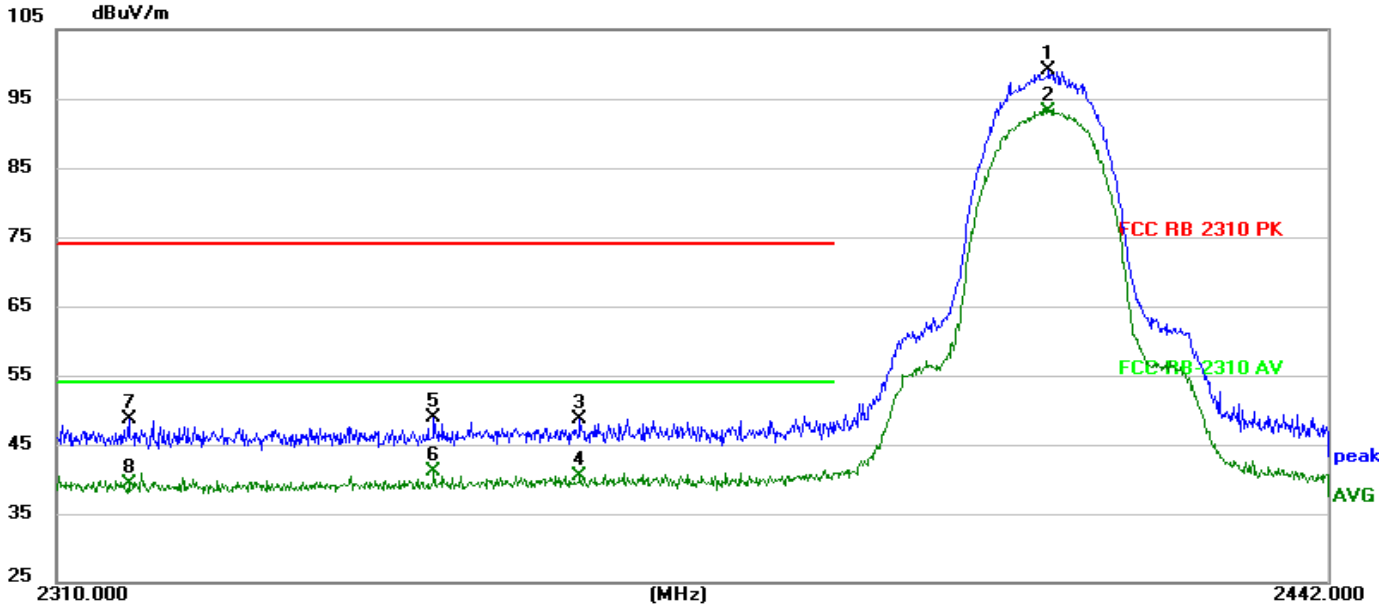

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	2412.4420	109.58	-10.52	99.06			peak	Pass
2	2412.4420	103.71	-10.52	93.19			AVG	Pass
3	2363.4033	59.48	-10.73	48.75	74.00	-25.25	peak	Pass
4	2363.4033	51.24	-10.73	40.51	54.00	-13.49	AVG	Pass
5	2348.3996	59.67	-10.78	48.89	74.00	-25.11	peak	Pass
6 *	2348.3996	51.81	-10.78	41.03	54.00	-12.97	AVG	Pass
7	2317.3137	59.42	-10.85	48.57	74.00	-25.43	peak	Pass
8	2317.3137	50.16	-10.85	39.31	54.00	-14.69	AVG	Pass

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

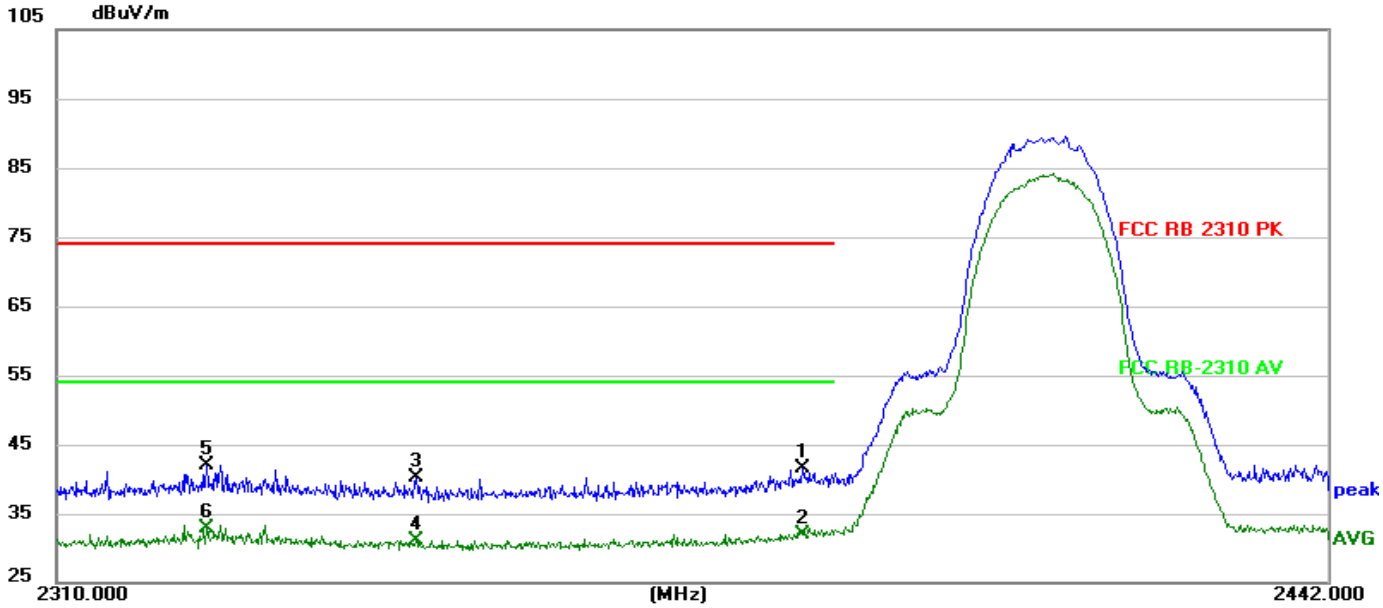

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	2386.5071	62.17	-20.64	41.53	74.00	-32.47	peak	Pass
2	2386.5071	52.61	-20.64	31.97	54.00	-22.03	AVG	Pass
3	2346.6133	61.01	-20.78	40.23	74.00	-33.77	peak	Pass
4	2346.6133	51.83	-20.78	31.05	54.00	-22.95	AVG	Pass
5	2325.1891	62.77	-20.83	41.94	74.00	-32.06	peak	Pass
6 *	2325.1891	53.80	-20.83	32.97	54.00	-21.03	AVG	Pass

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)
Operation Mode (worst case)	Mode 1 @2462 MHz, IEEE 802.11 b
Test voltage	3.3 Vdc

Results

Horizontal

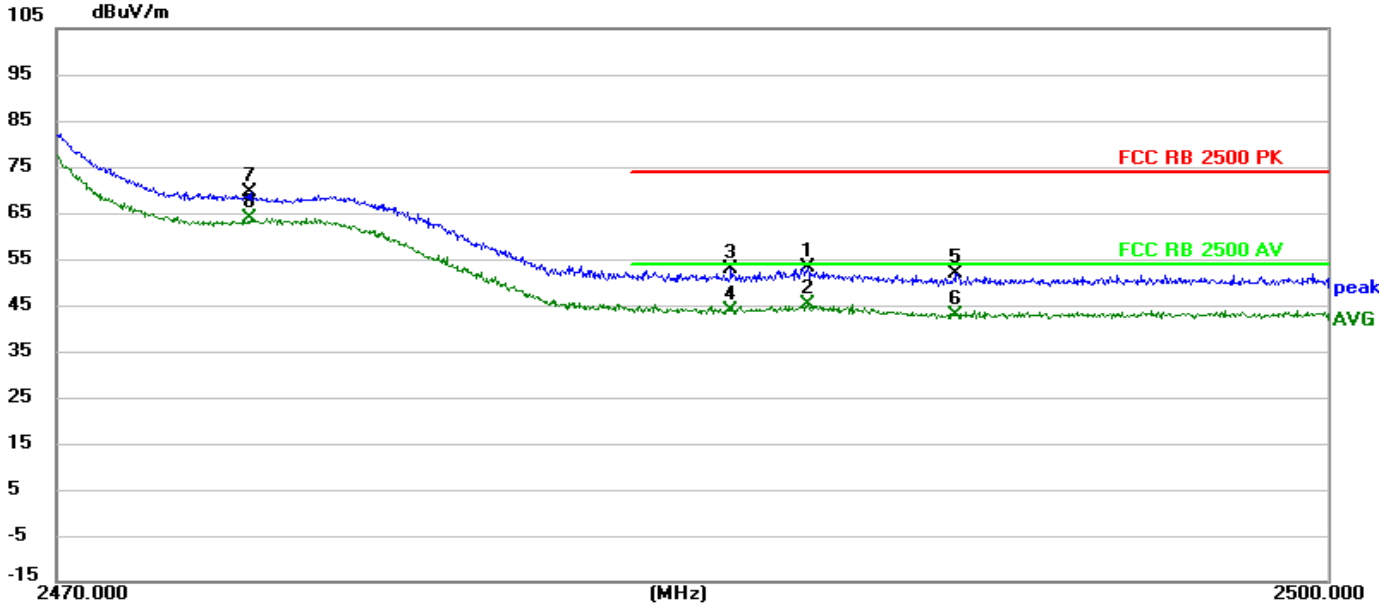

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	2487.6593	63.43	-10.14	53.29	74.00	-20.71	peak	Pass
2	2487.6593	55.36	-10.14	45.22	54.00	-8.78	AVG	Pass
3	2485.8733	62.92	-10.14	52.78	74.00	-21.22	peak	Pass
4	2485.8733	54.00	-10.14	43.86	54.00	-10.14	AVG	Pass
5	2491.1966	61.98	-10.11	51.87	74.00	-22.13	peak	Pass
6	2491.1966	52.80	-10.11	42.69	54.00	-11.31	AVG	Pass
7 *	2474.5536	79.56	-10.20	69.36	74.00	-4.64	peak	Pass
8	2474.5536	74.15	-10.20	63.95	74.00	-10.05	AVG	Pass

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

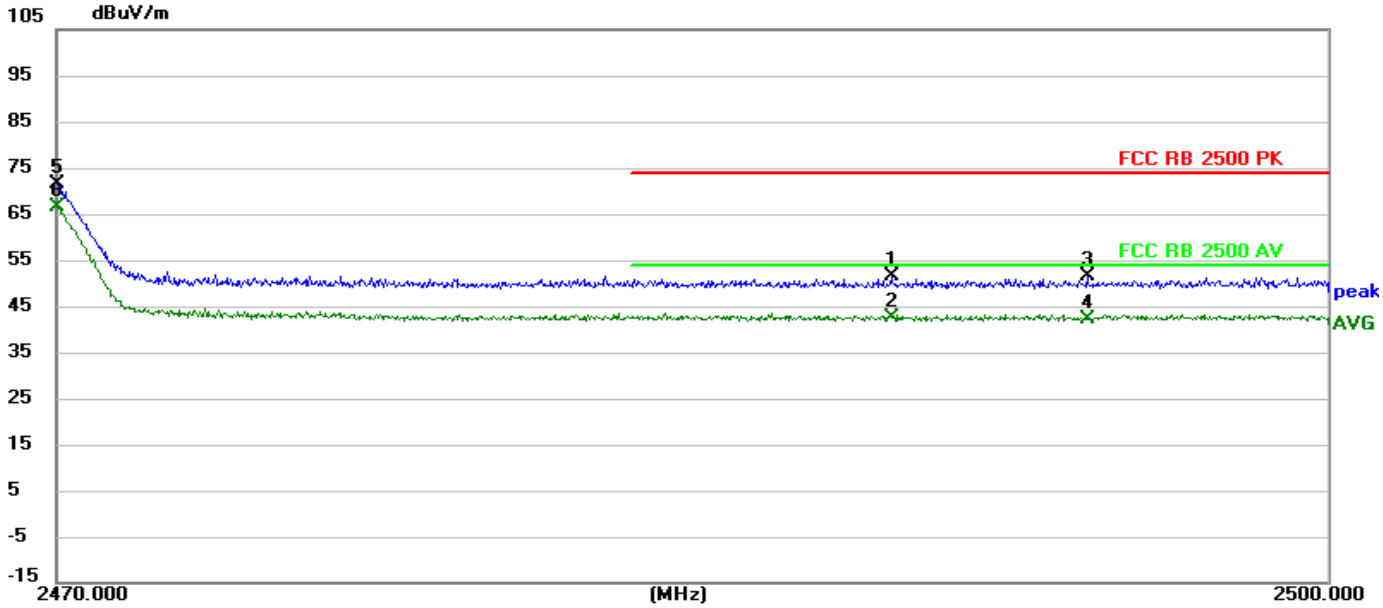

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	2489.6431	61.67	-10.13	51.54	74.00	-22.46	peak	Pass
2	2489.6431	52.53	-10.13	42.40	54.00	-11.60	AVG	Pass
3	2494.2773	61.52	-10.10	51.42	74.00	-22.58	peak	Pass
4	2494.2773	52.37	-10.10	42.27	54.00	-11.73	AVG	Pass
5 *	2470.0000	81.57	-10.23	71.34	74.00	-2.66	peak	Pass
6	2470.0000	76.77	-10.23	66.54	74.00	-7.46	AVG	Pass

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)
Operation Mode (worst case)	Mode 1 @2412 MHz, IEEE 802.11 g
Test voltage	3.3 Vdc

Results

Horizontal

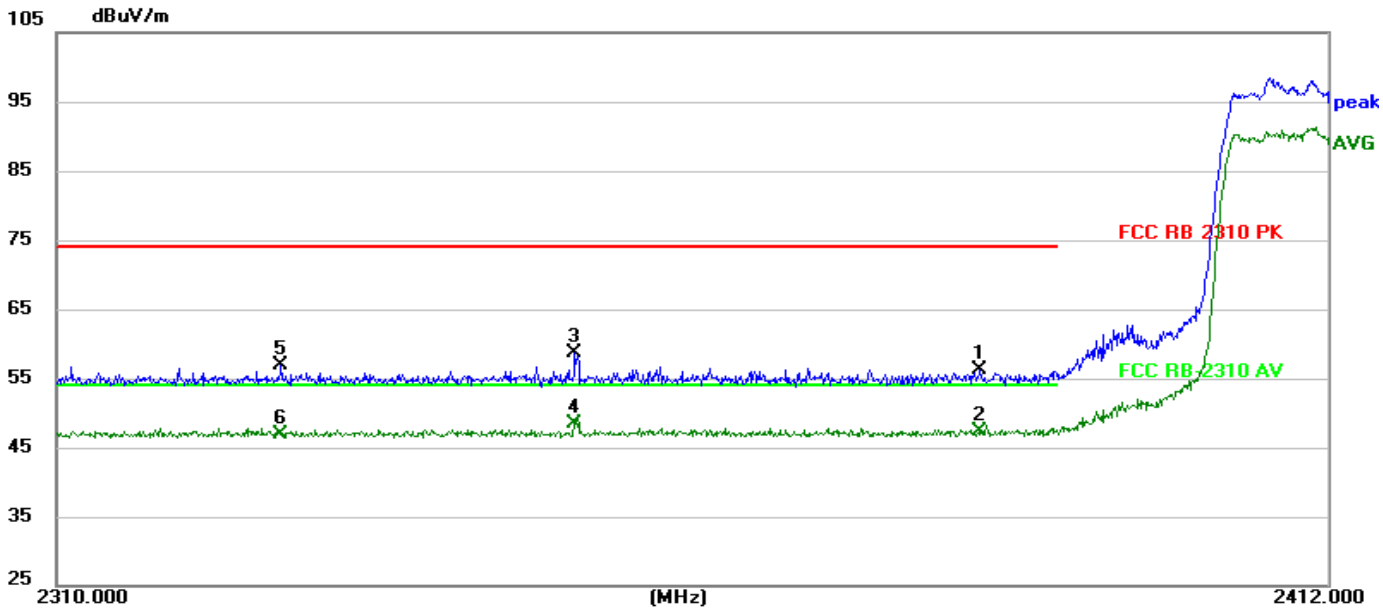

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	2383.7122	60.89	-4.65	56.24	74.00	-17.76	peak	Pass
2	2383.7122	52.07	-4.65	47.42	54.00	-6.58	AVG	Pass
3	2351.0709	63.38	-4.77	58.61	74.00	-15.39	peak	Pass
4 *	2351.0709	53.17	-4.77	48.40	54.00	-5.60	AVG	Pass
5	2327.7271	61.72	-4.83	56.89	74.00	-17.11	peak	Pass
6	2327.7271	51.83	-4.83	47.00	54.00	-7.00	AVG	Pass

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

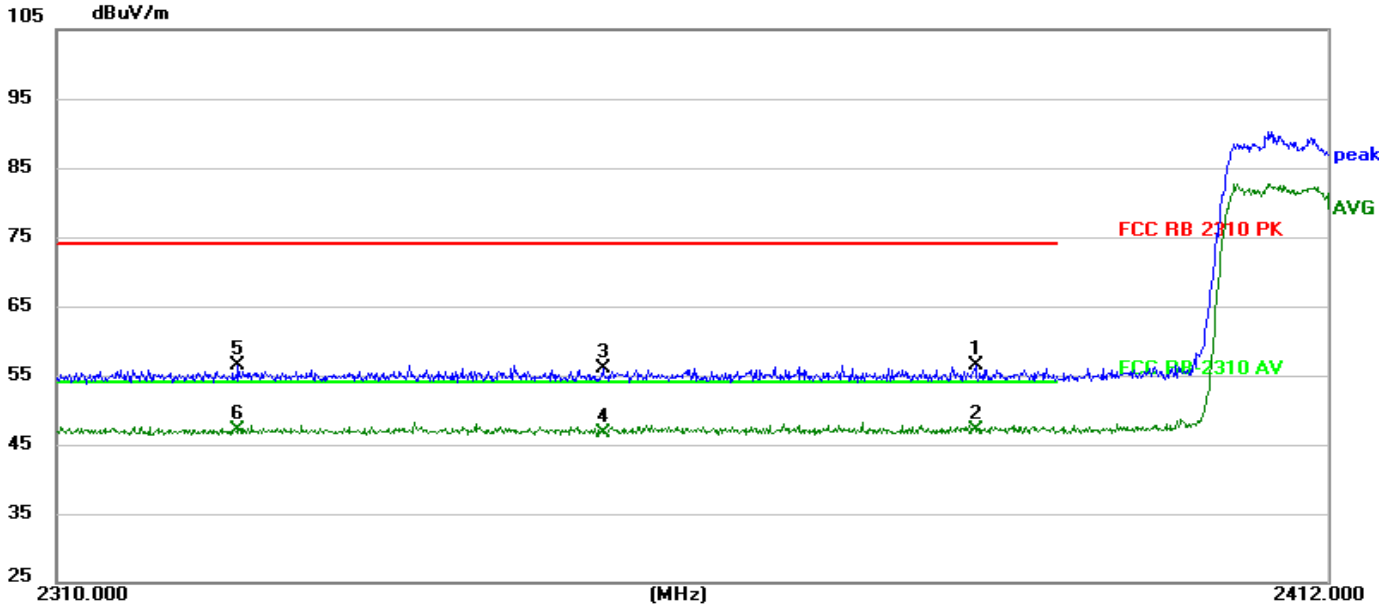

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	2383.2435	60.99	-4.65	56.34	74.00	-17.66	peak	Pass
2	2383.2435	51.75	-4.65	47.10	54.00	-6.90	AVG	Pass
3	2353.2368	60.80	-4.76	56.04	74.00	-17.96	peak	Pass
4	2353.2368	51.53	-4.76	46.77	54.00	-7.23	AVG	Pass
5	2324.2806	61.32	-4.84	56.48	74.00	-17.52	peak	Pass
6 *	2324.2806	52.01	-4.84	47.17	54.00	-6.83	AVG	Pass

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)
Operation Mode (worst case)	Mode 1 @2462 MHz, IEEE 802.11 g
Test voltage	3.3 Vdc

Results

Horizontal

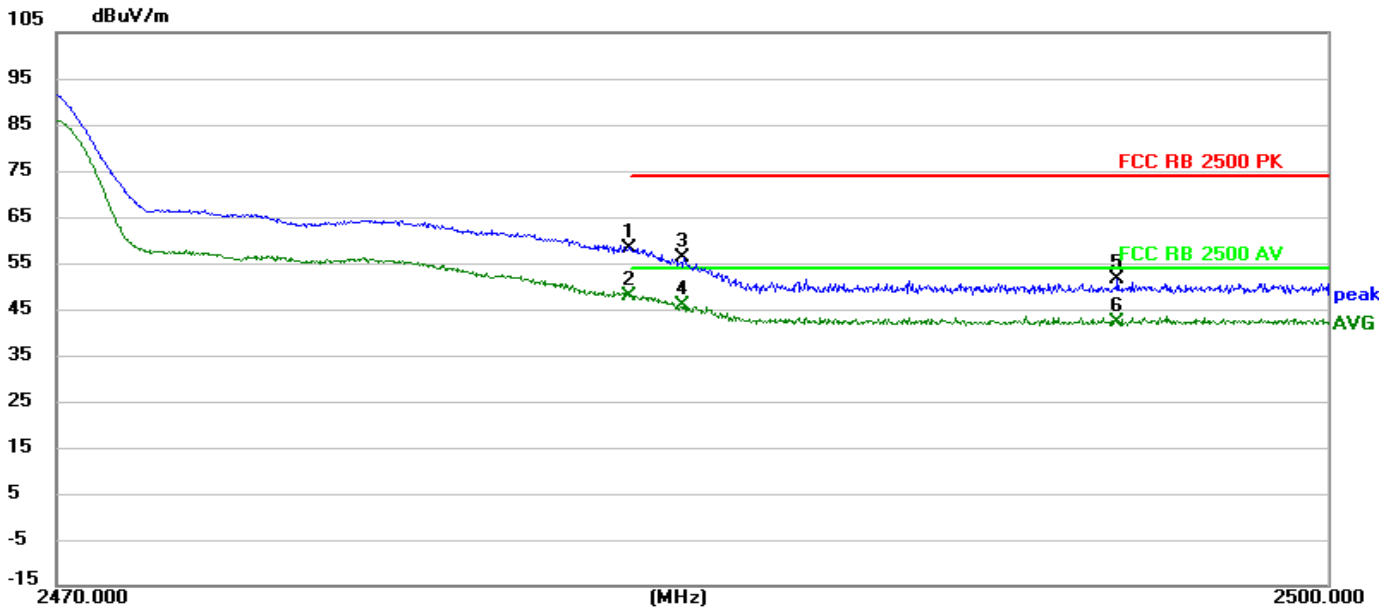

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	2483.5023	68.28	-10.16	58.12	74.00	-15.88	peak	Pass
2 *	2483.5023	58.09	-10.16	47.93	54.00	-6.07	AVG	Pass
3	2484.7530	66.20	-10.15	56.05	74.00	-17.95	peak	Pass
4	2484.7530	55.99	-10.15	45.84	54.00	-8.16	AVG	Pass
5	2495.0002	61.48	-10.10	51.38	74.00	-22.62	peak	Pass
6	2495.0002	52.38	-10.10	42.28	54.00	-11.72	AVG	Pass

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

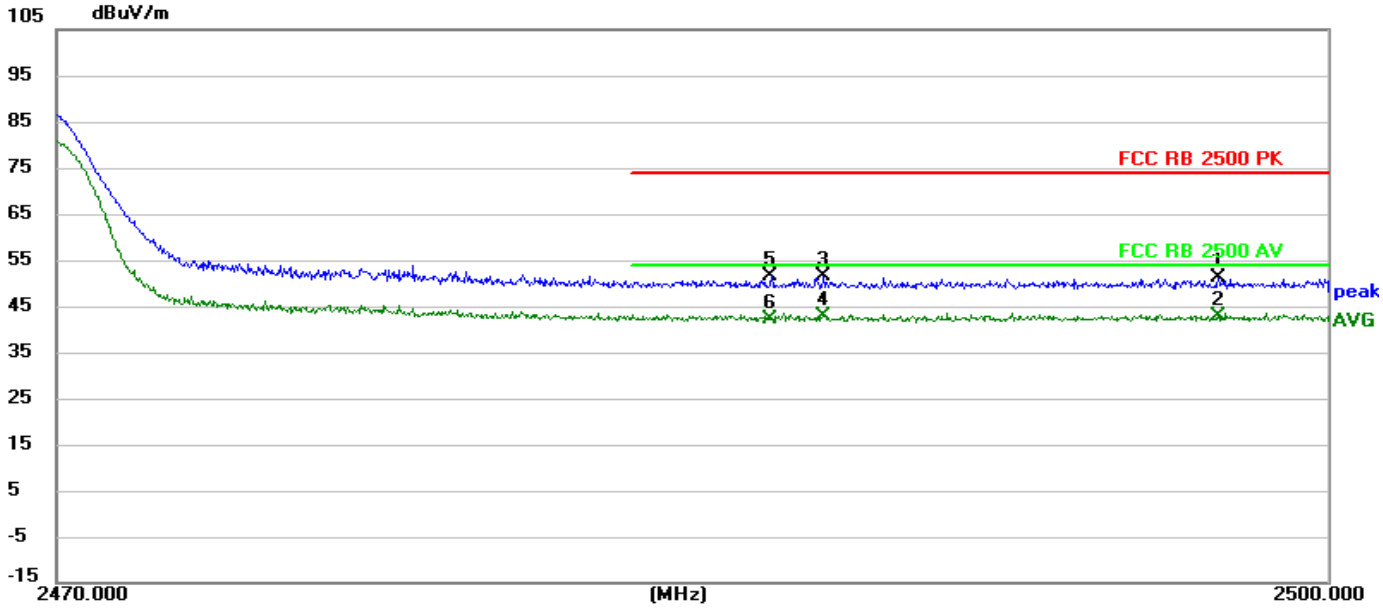

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	2497.3777	61.22	-10.08	51.14	74.00	-22.86	peak	Pass
2	2497.3777	52.89	-10.08	42.81	54.00	-11.19	AVG	Pass
3	2488.0559	61.60	-10.14	51.46	74.00	-22.54	peak	Pass
4 *	2488.0559	53.07	-10.14	42.93	54.00	-11.07	AVG	Pass
5	2486.8240	61.64	-10.14	51.50	74.00	-22.50	peak	Pass
6	2486.8240	52.44	-10.14	42.30	54.00	-11.70	AVG	Pass

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)
Operation Mode (worst case)	Mode 1 @2412 MHz, IEEE 802.11 n20
Test voltage	3.3 Vdc

Results

Horizontal

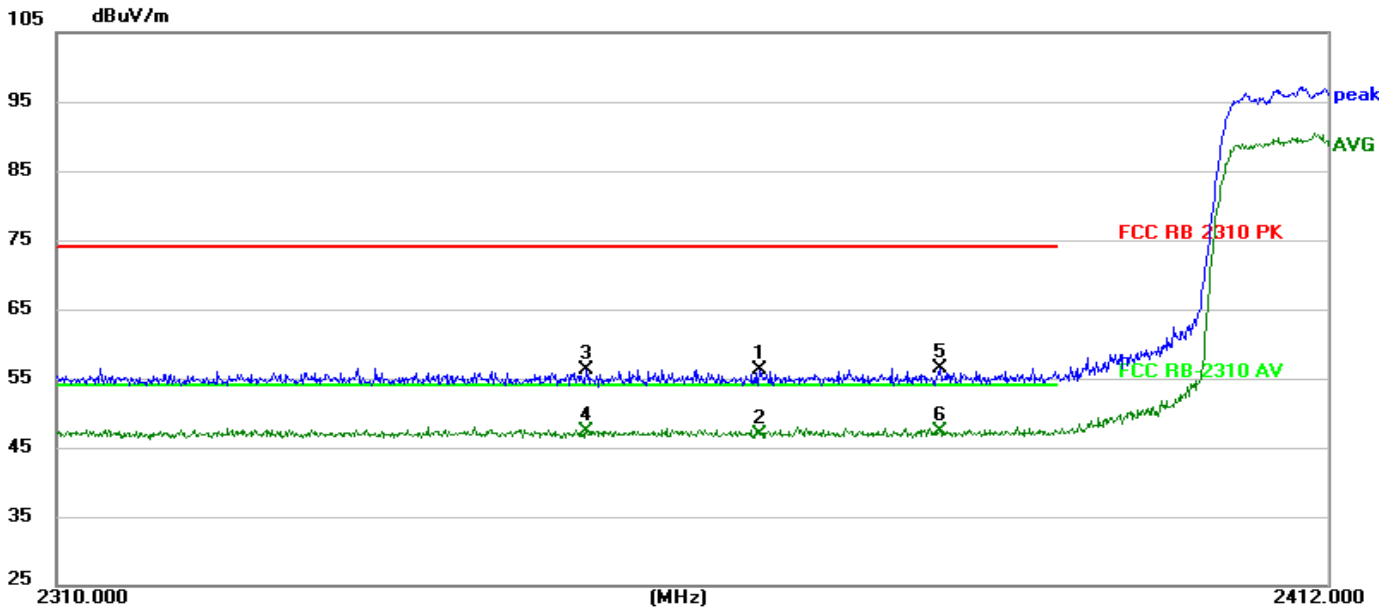

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	2365.8506	60.89	-4.72	56.17	74.00	-17.83	peak	Pass
2	2365.8506	51.70	-4.72	46.98	54.00	-7.02	AVG	Pass
3	2351.9346	61.09	-4.77	56.32	74.00	-17.68	peak	Pass
4	2351.9346	52.00	-4.77	47.23	54.00	-6.77	AVG	Pass
5	2380.3917	61.05	-4.66	56.39	74.00	-17.61	peak	Pass
6 *	2380.3917	51.94	-4.66	47.28	54.00	-6.72	AVG	Pass

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

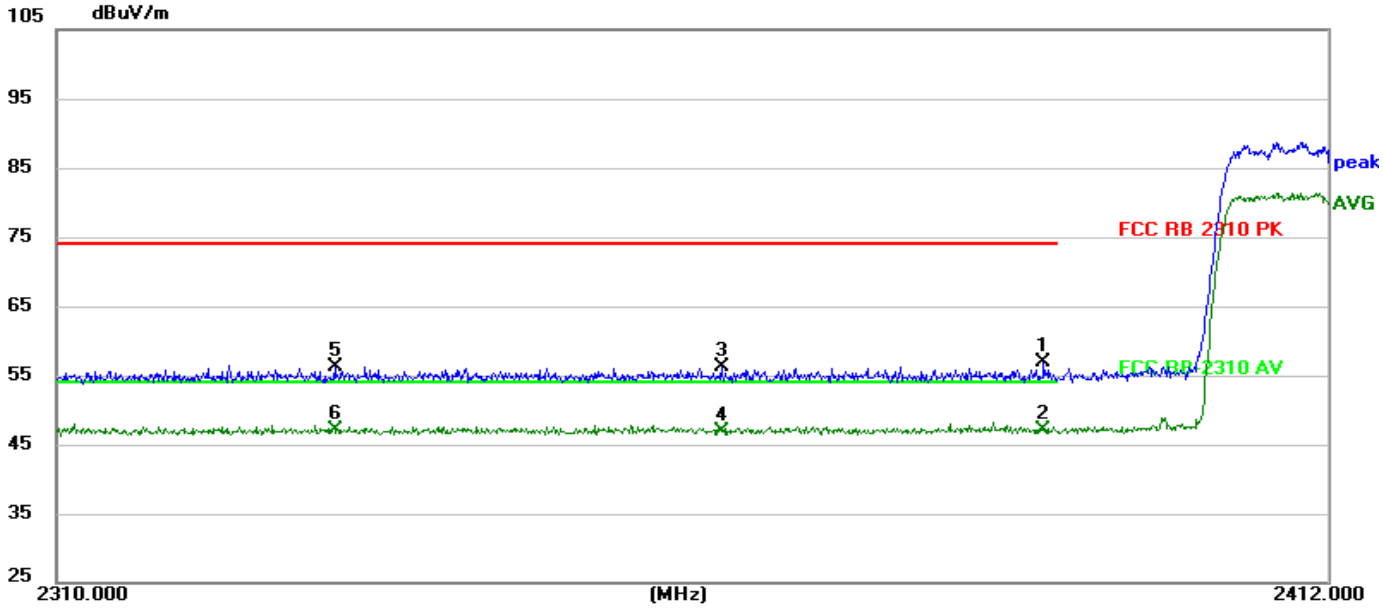

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	2388.8255	61.45	-4.64	56.81	74.00	-17.19	peak	Pass
2 *	2388.8255	51.71	-4.64	47.07	54.00	-6.93	AVG	Pass
3	2362.6950	61.02	-4.73	56.29	74.00	-17.71	peak	Pass
4	2362.6950	51.67	-4.73	46.94	54.00	-7.06	AVG	Pass
5	2331.8810	60.93	-4.81	56.12	74.00	-17.88	peak	Pass
6	2331.8810	51.82	-4.81	47.01	54.00	-6.99	AVG	Pass

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR16CBDM
Operation Mode (worst case)	Mode 1 @2462 MHz, IEEE 802.11 n20
Test voltage	3.3 Vdc

Results

Horizontal

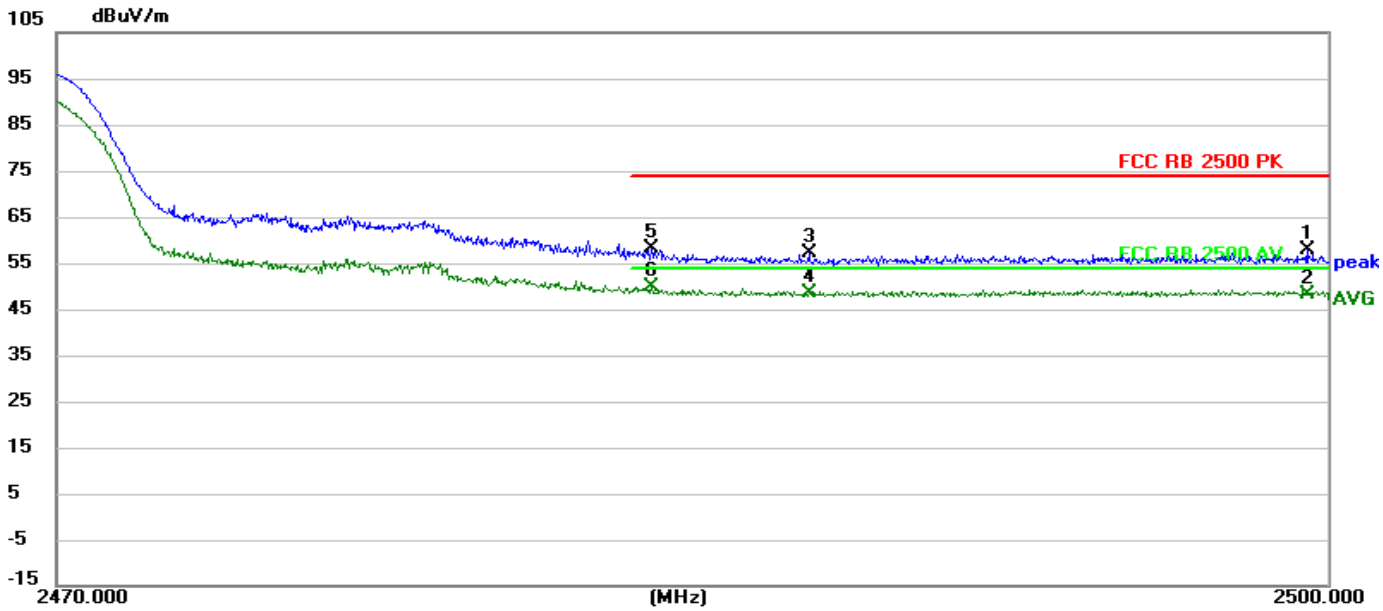

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	2499.4919	61.85	-4.07	57.78	74.00	-16.22	peak	Pass
2	2499.4919	52.20	-4.07	48.13	54.00	-5.87	AVG	Pass
3	2487.7118	61.23	-4.14	57.09	74.00	-16.91	peak	Pass
4	2487.7118	52.60	-4.14	48.46	54.00	-5.54	AVG	Pass
5	2483.9748	62.49	-4.16	58.33	74.00	-15.67	peak	Pass
6 *	2483.9748	54.03	-4.16	49.87	54.00	-4.13	AVG	Pass

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

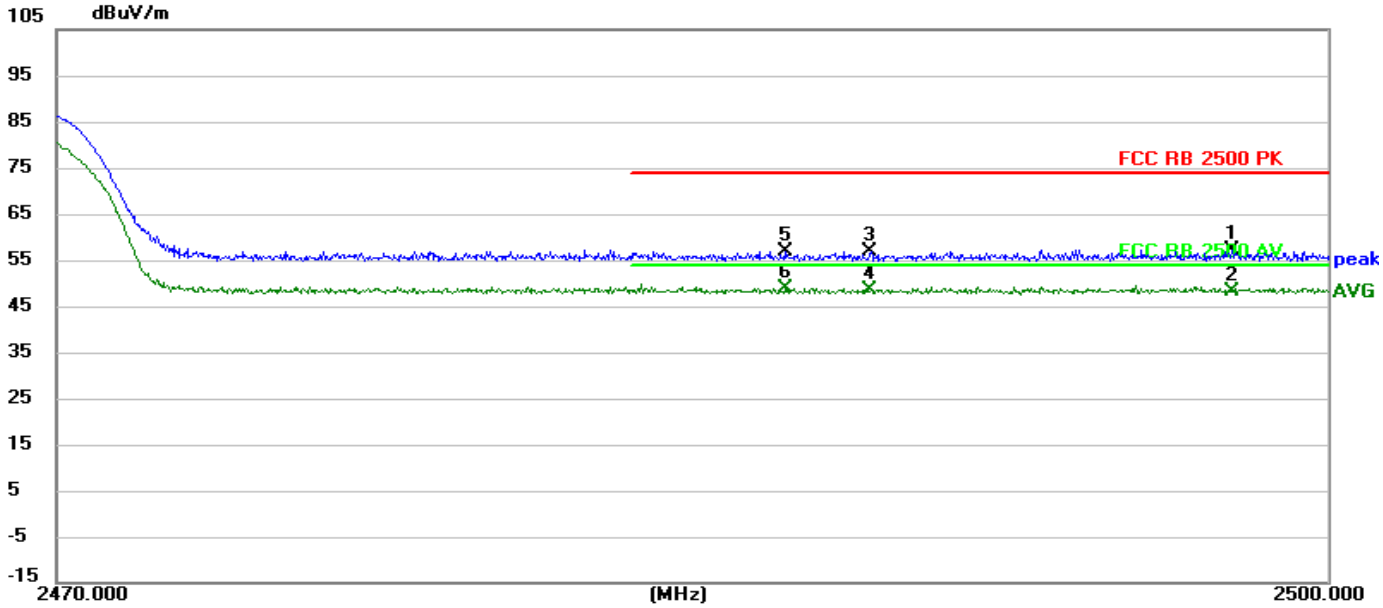

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	2497.7227	61.20	-4.08	57.12	74.00	-16.88	peak	Pass
2	2497.7227	52.33	-4.08	48.25	54.00	-5.75	AVG	Pass
3	2489.1650	61.05	-4.13	56.92	74.00	-17.08	peak	Pass
4	2489.1650	52.67	-4.13	48.54	54.00	-5.46	AVG	Pass
5	2487.1399	61.02	-4.14	56.88	74.00	-17.12	peak	Pass
6 *	2487.1399	52.99	-4.14	48.85	54.00	-5.15	AVG	Pass

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR32CBDM (with LED driver: S012EFU2400050)
Operation Mode (worst case)	Mode 1 @2412 MHz, IEEE 802.11 b
Test voltage	3.3 Vdc

Results

Horizontal

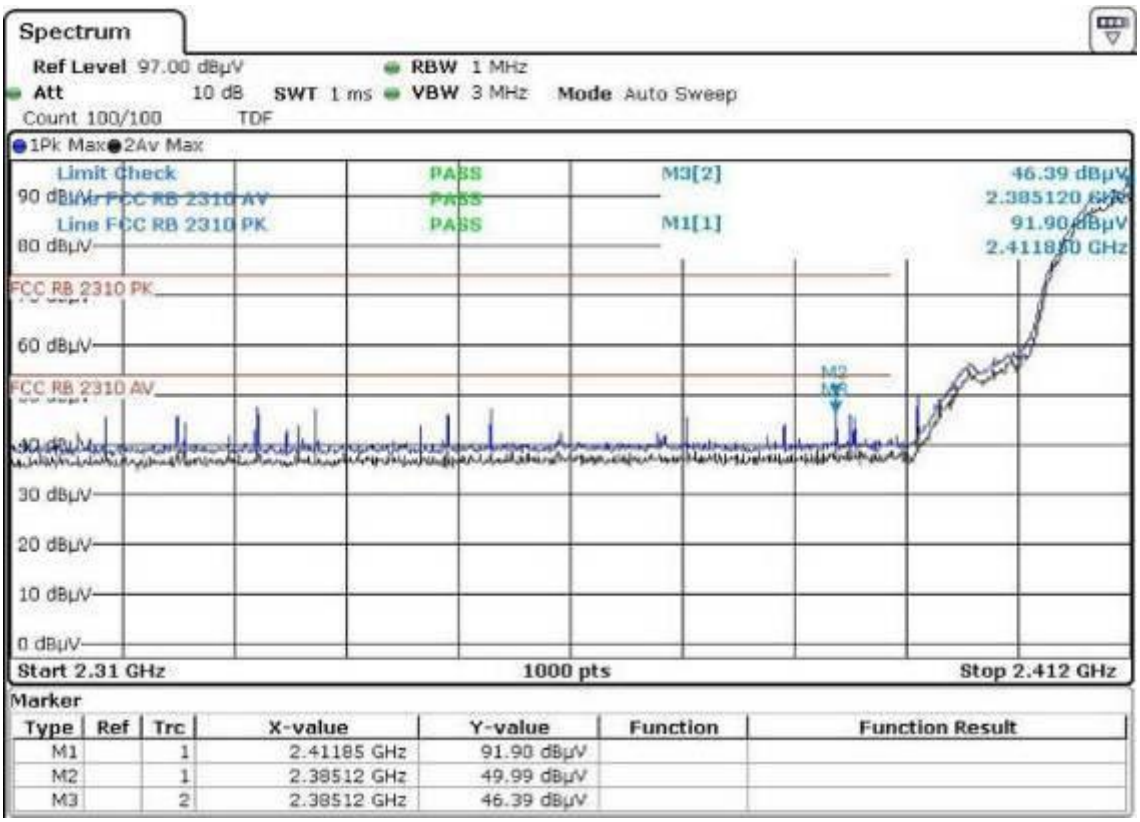

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

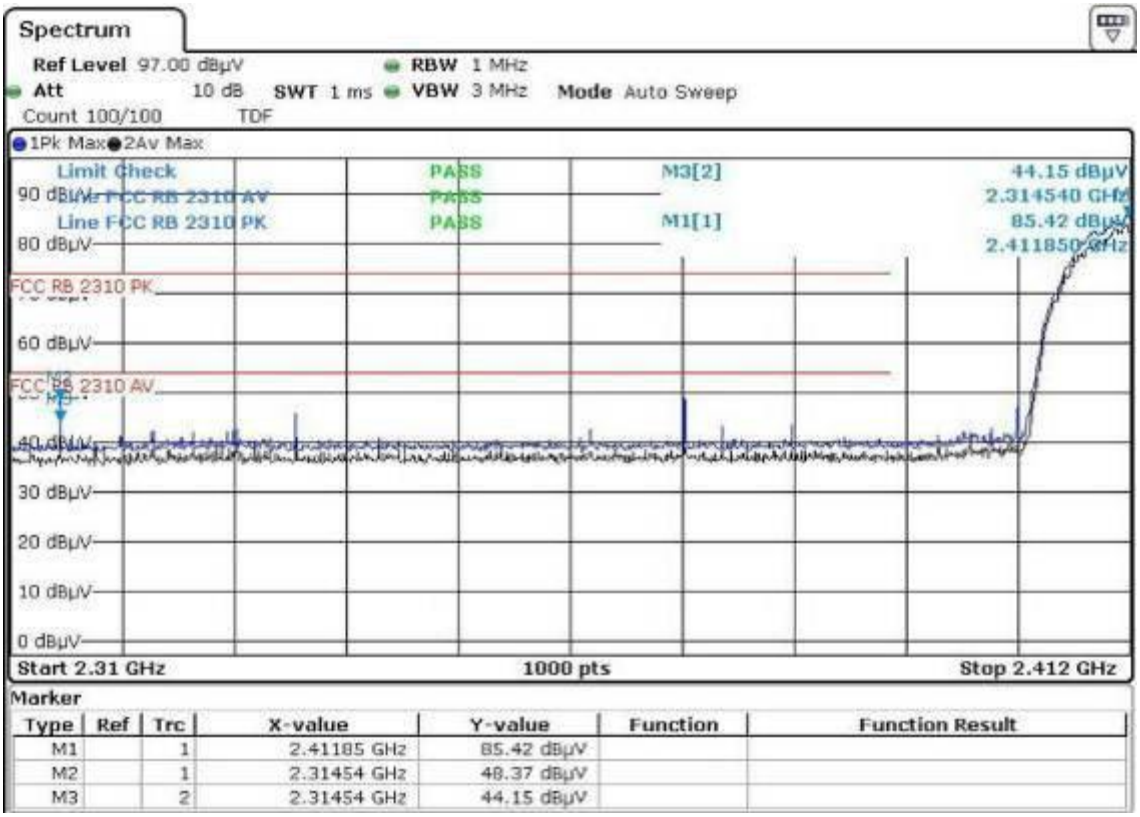

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR16CBDM (with LED driver: XY12SE-240050VQ-UW)
Operation Mode (worst case)	Mode 1 @2462 MHz, IEEE 802.11 b
Test voltage	3.3 Vdc

Results

Horizontal

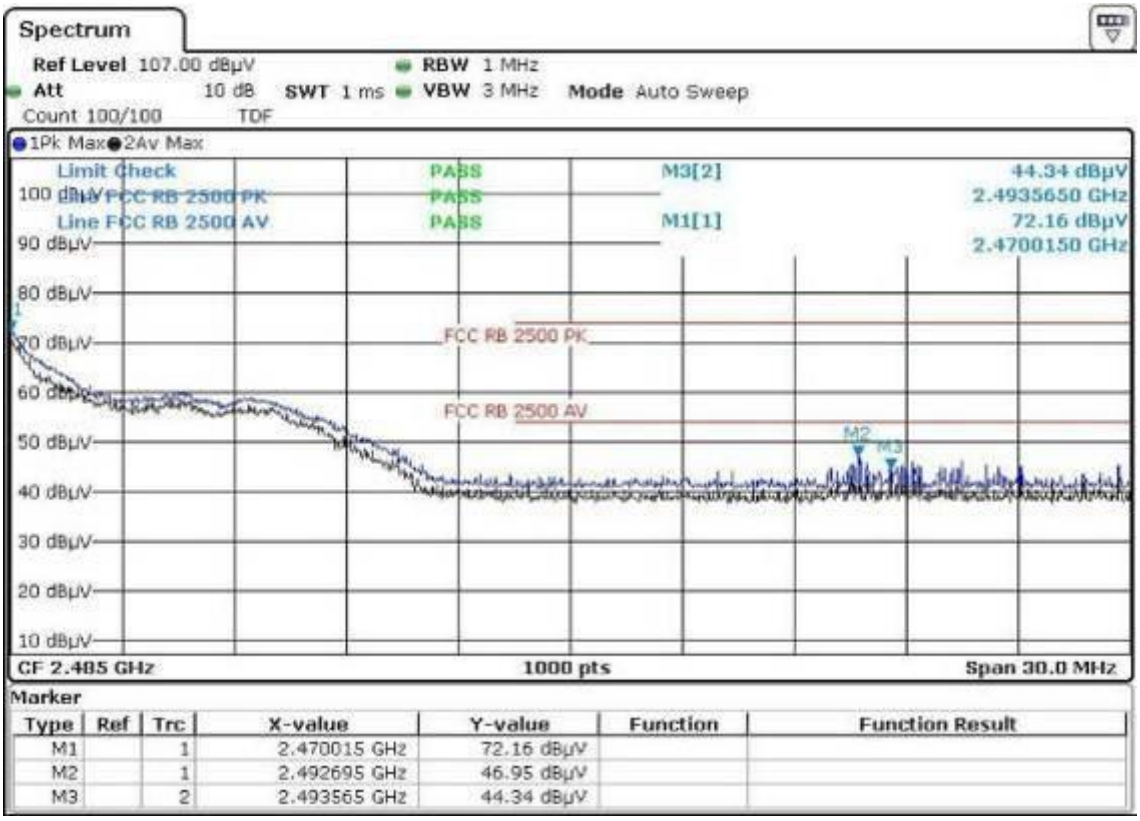

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

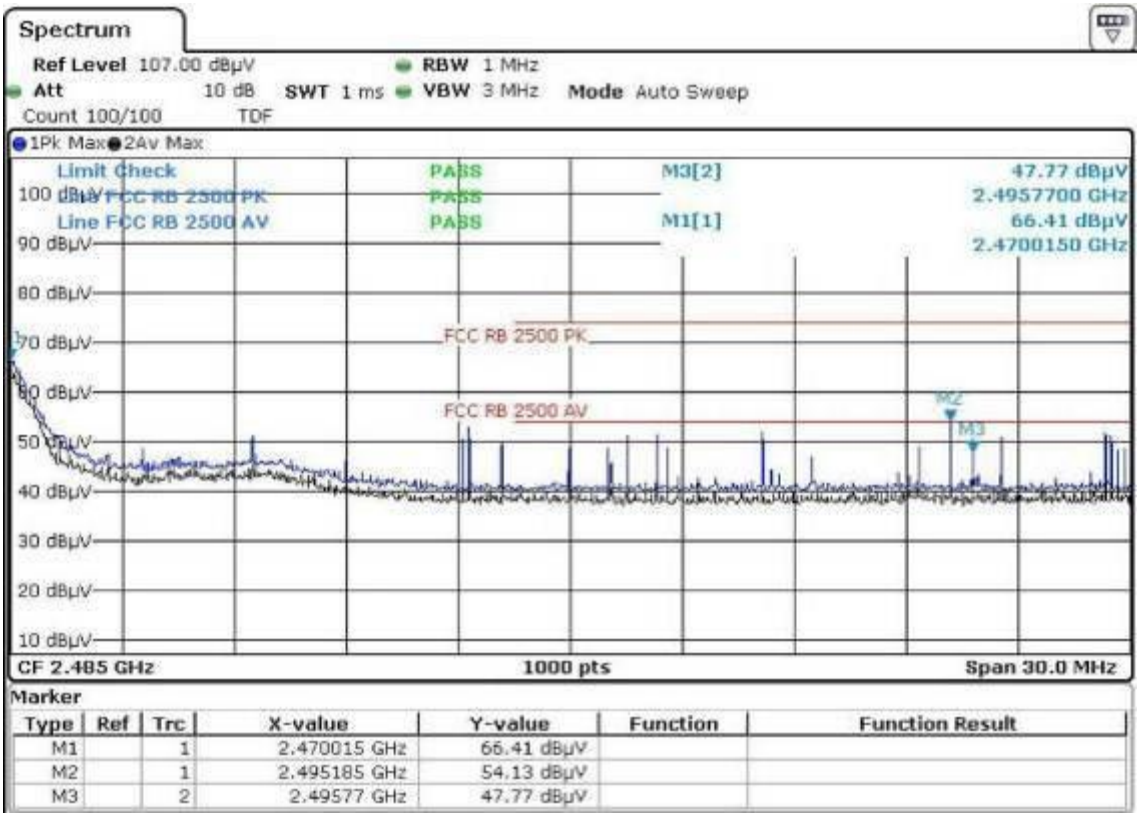

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR32CBDM (with LED driver: S012EFU2400050)
Operation Mode (worst case)	Mode 1 @2412 MHz, IEEE 802.11 g
Test voltage	3.3 Vdc

Results

Horizontal

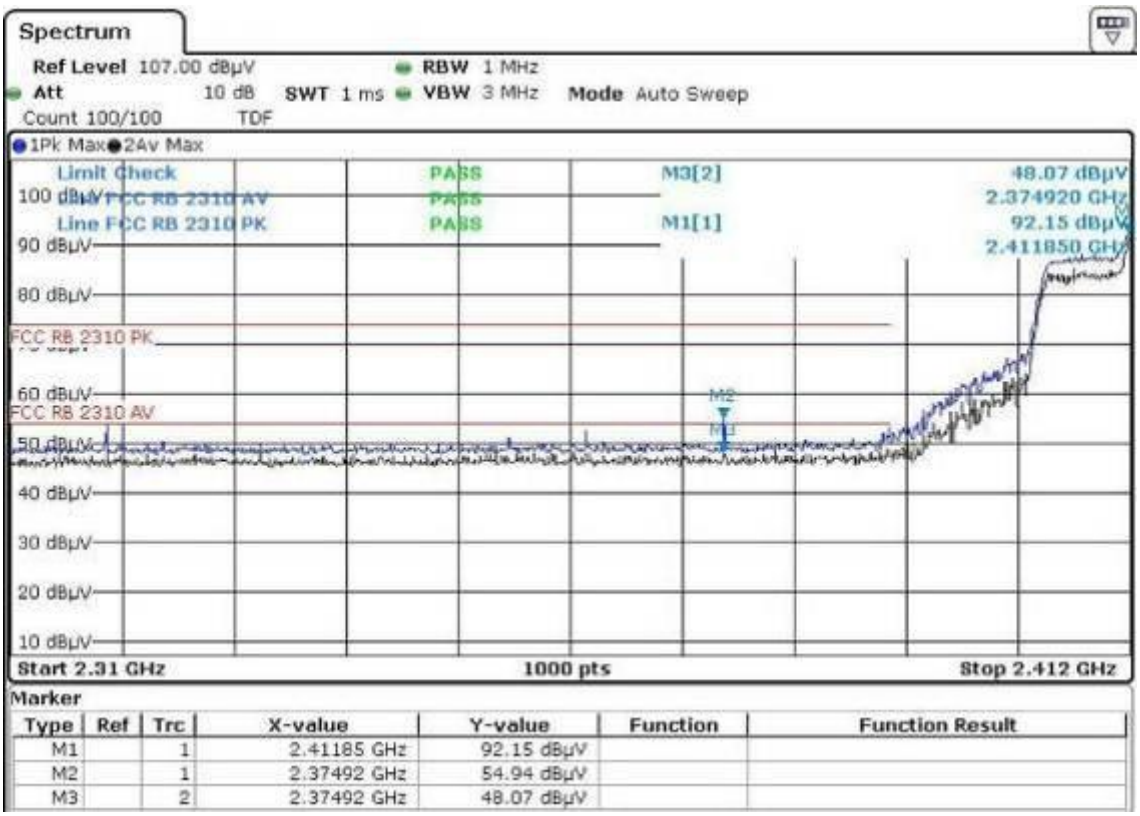

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

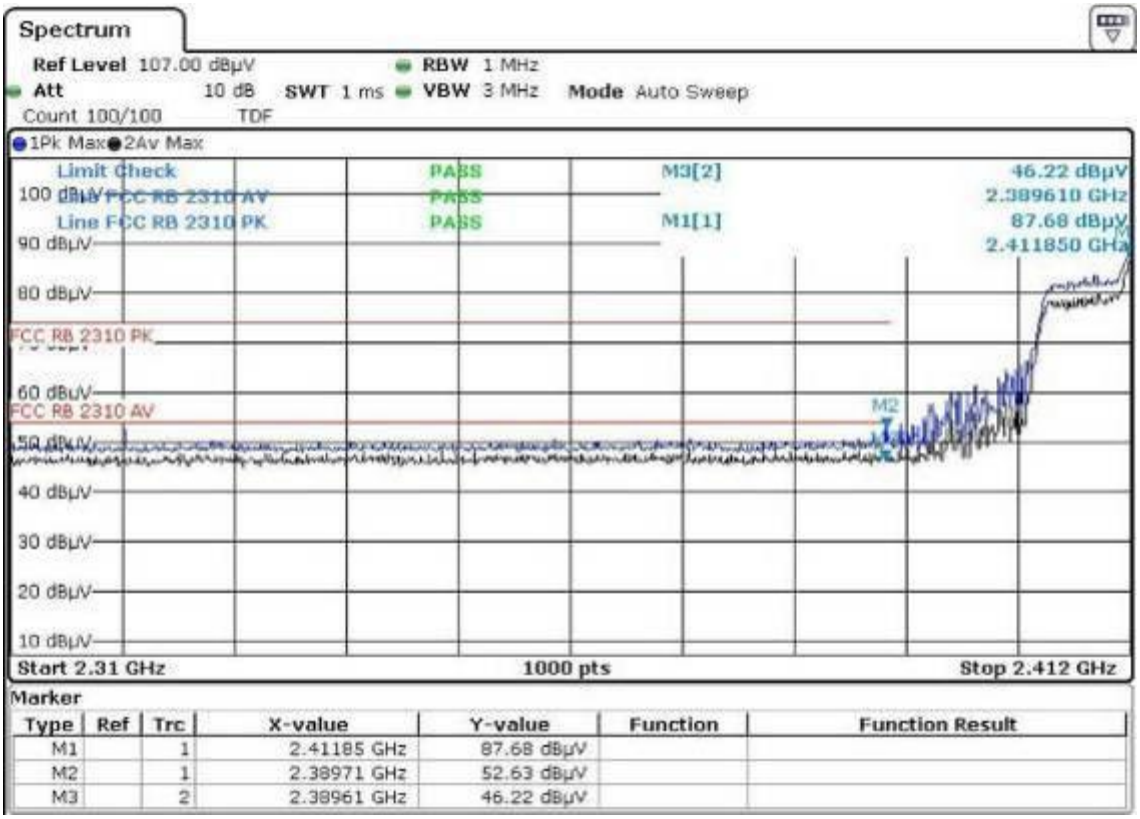

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR32CBDM (with LED driver: S012EFU2400050)
Operation Mode (worst case)	Mode 1 @2462 MHz, IEEE 802.11 g
Test voltage	3.3 Vdc

Results

Horizontal

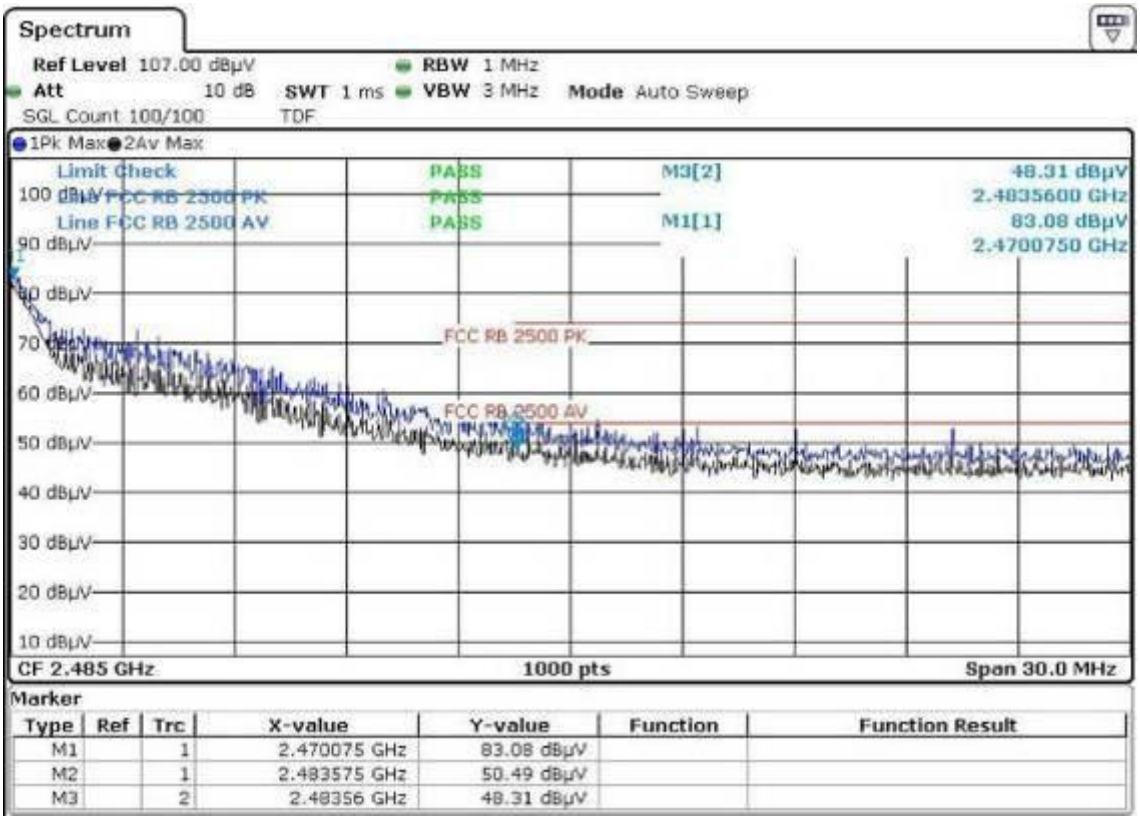

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

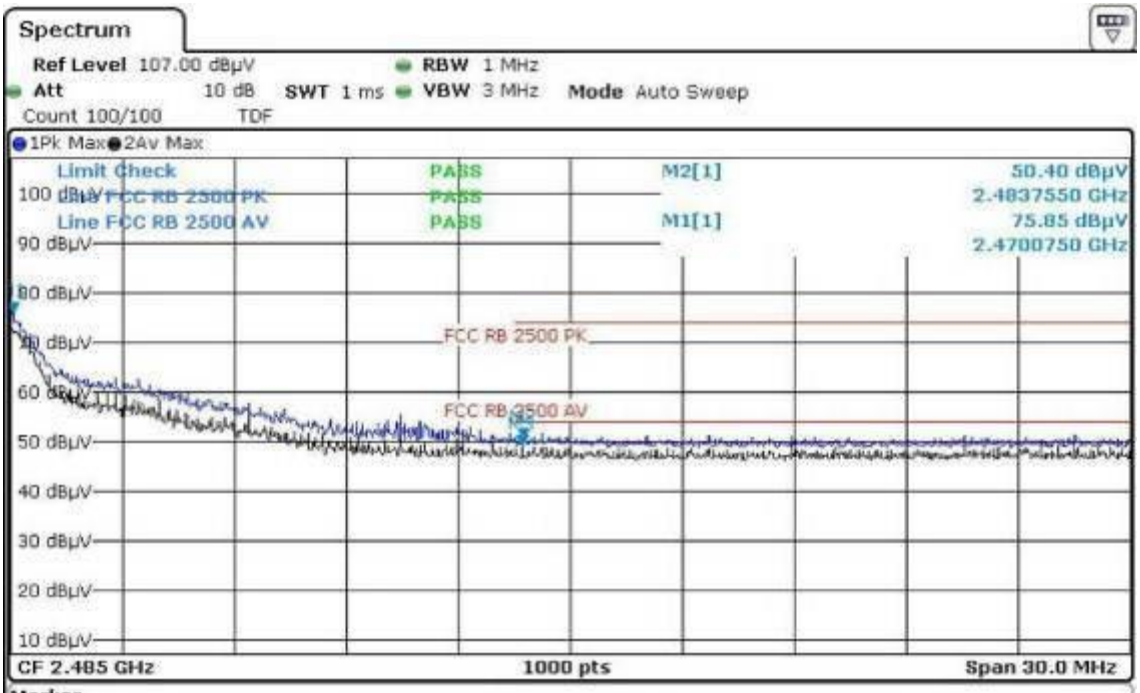

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR32CBDM (with LED driver: S012EFU2400050)
Operation Mode (worst case)	Mode 1 @2412 MHz, IEEE 802.11 n20
Test voltage	3.3 Vdc

Results

Horizontal

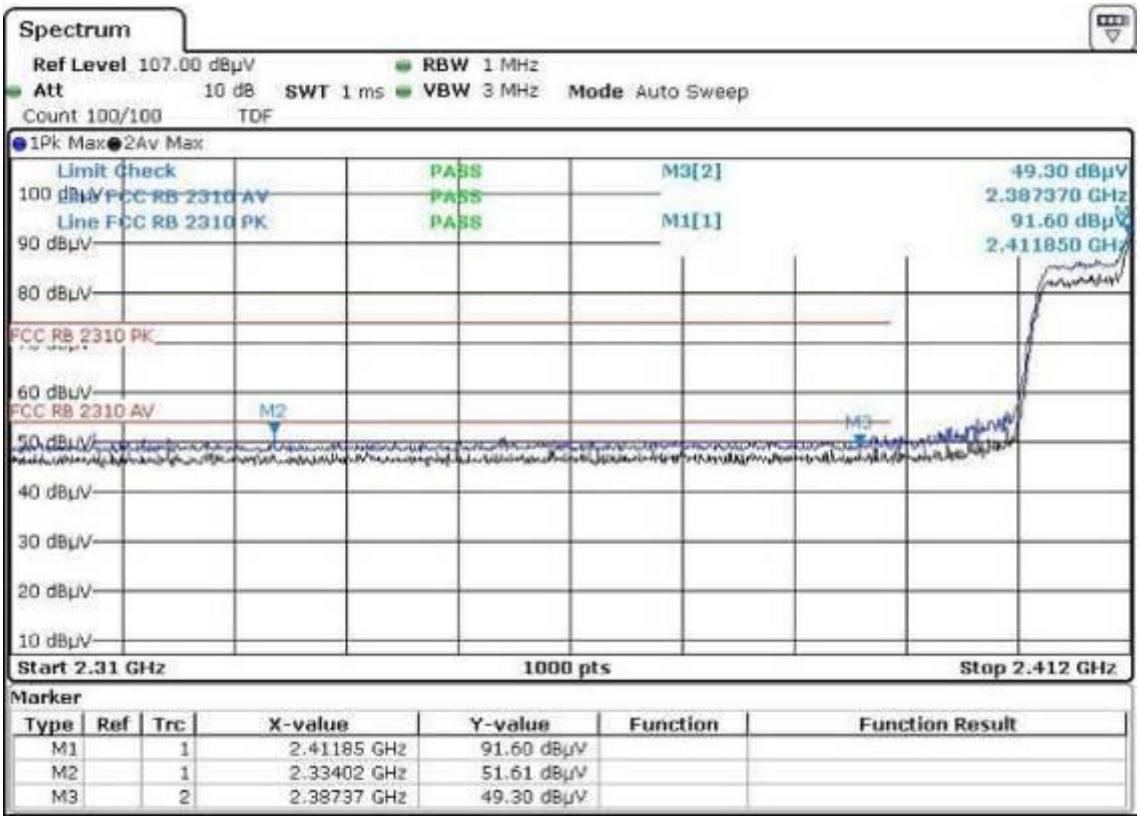

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

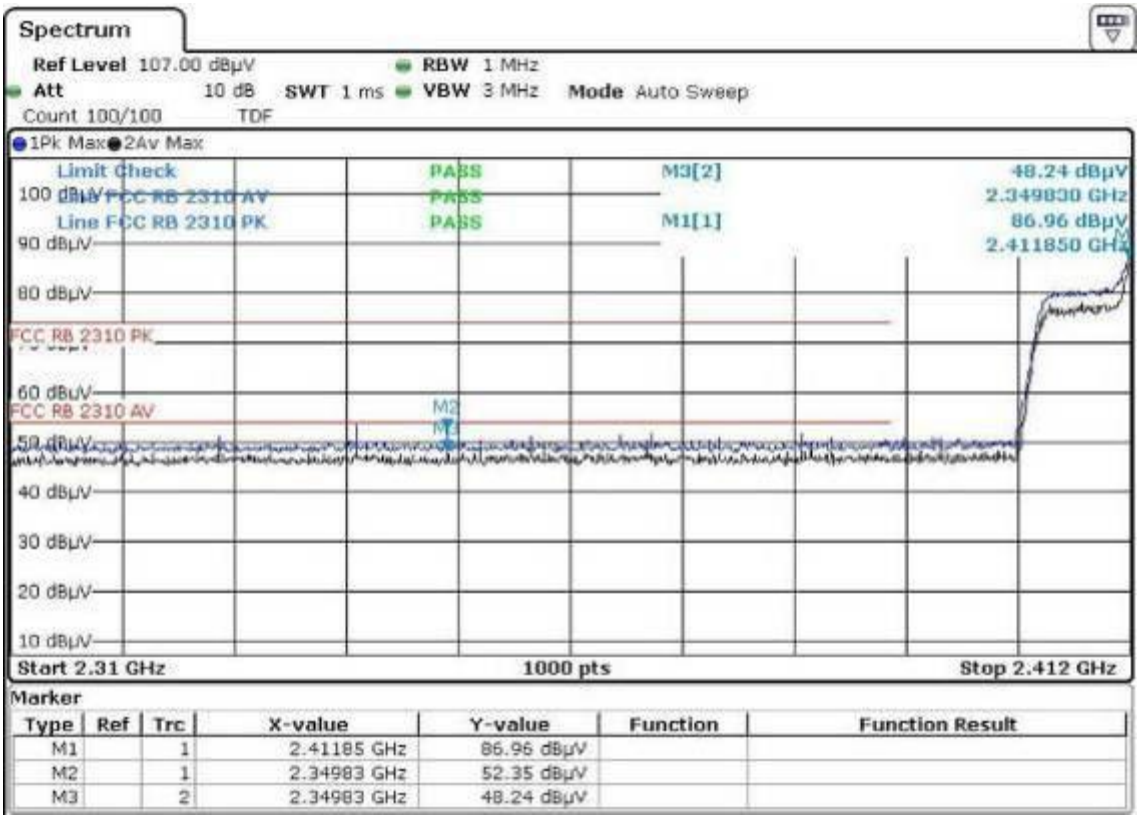

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	CSTR32CBDM (with LED driver: S012EFU2400050)
Operation Mode (worst case)	Mode 1 @2462 MHz, IEEE 802.11 n20
Test voltage	3.3 Vdc

Results

Horizontal

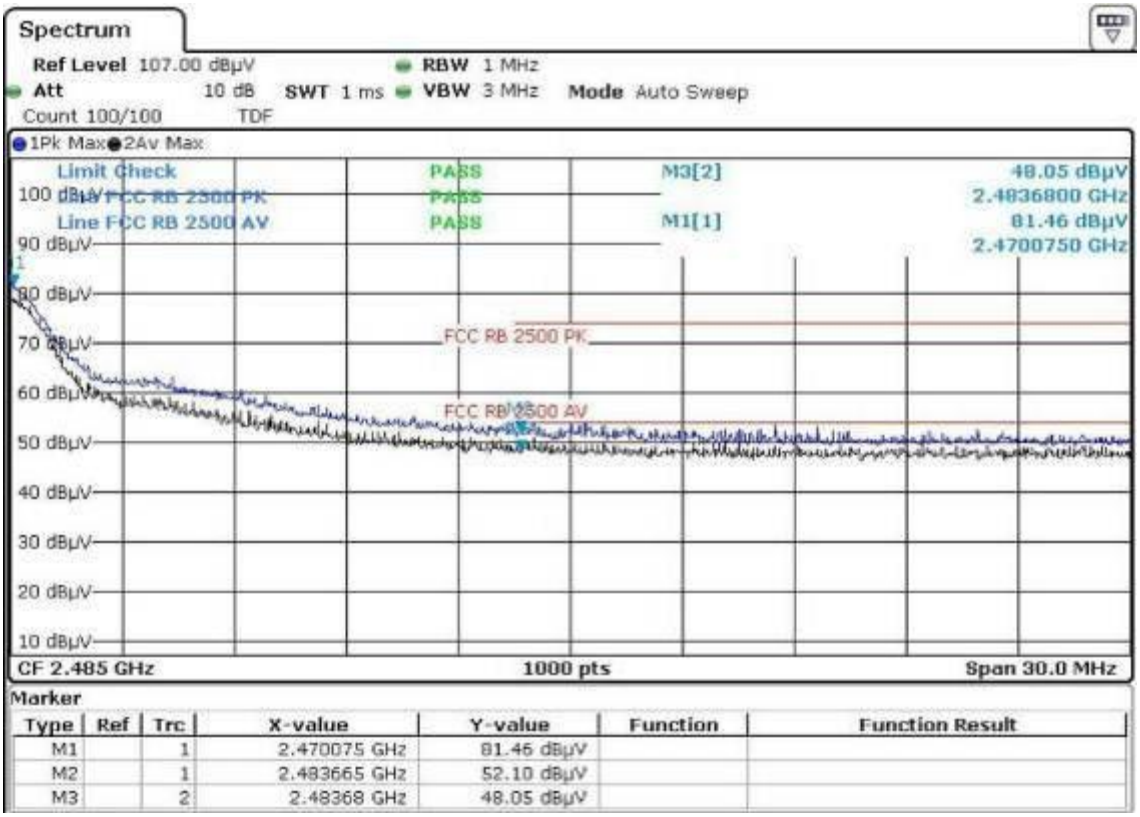

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

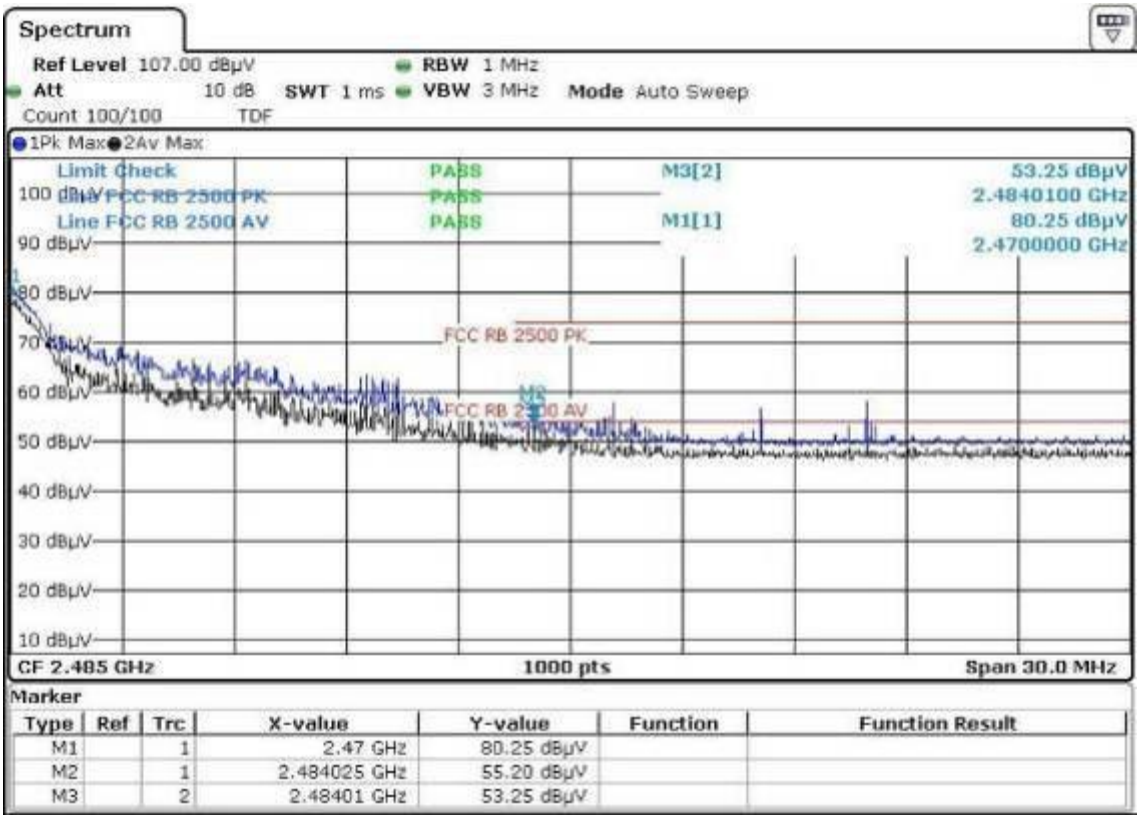

Remarks:

1) Due to the spectrum display limitation, the unit dBuV in test figure is dBuV/m actually.

2) Y-Value (dBuV/m)= received value (dBuV)+ Correction Factor (Antenna factor (dBuV/m)+ Cable loss (dB)- Preamp gain (dB))

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

4.4 Band Edge	VERDICT: PASS

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at by LEast 30 dB relative to the maximum in-band peak PSD by LEvel in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at by least 20 dB relative to the maximum in-band peak PSD by level in 100 kHz (i.e., 20 dBc).

Test Configuration

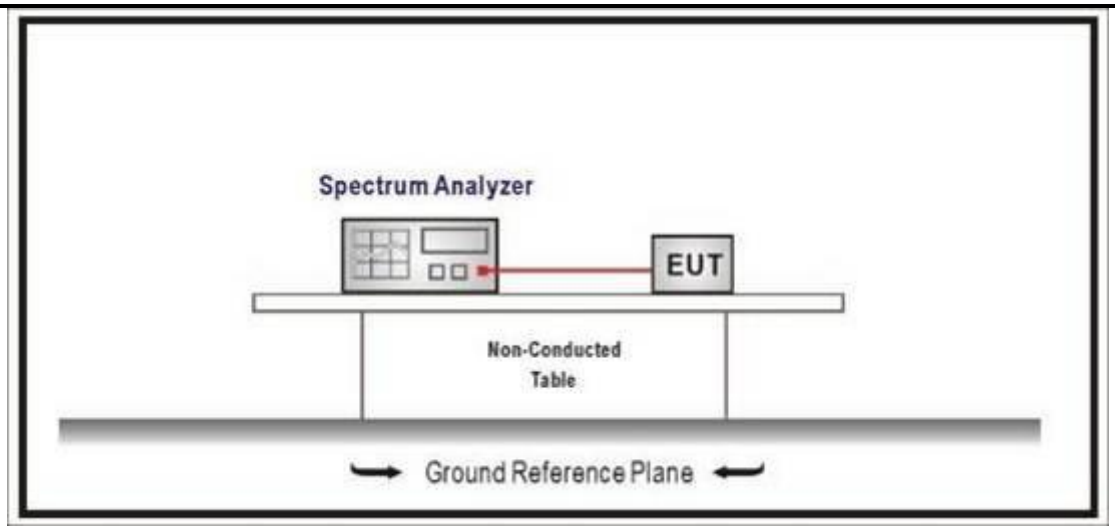

Performed measurements

Port under test	Antenna port	
Test method applied	☒	Conducted measurement
	☐	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	---	

IEEE 802.11 b
Results @2412 MHz

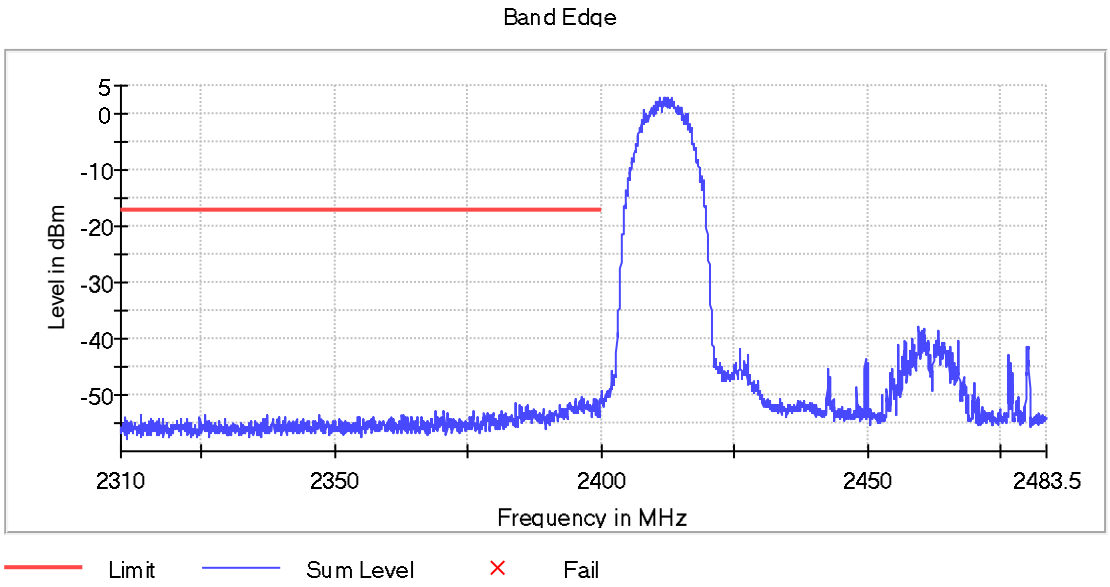

Inband Peak

Frequency (MHz)	Level (dBm)
2412.0000	3.0

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2396.275000	-50.5	33.5	-17.0	PASS
2399.175000	-50.7	33.7	-17.0	PASS
2399.975000	-50.7	33.7	-17.0	PASS
2396.775000	-50.7	33.8	-17.0	PASS
2396.225000	-50.8	33.8	-17.0	PASS
2395.275000	-50.8	33.9	-17.0	PASS
2396.725000	-50.9	33.9	-17.0	PASS
2399.925000	-50.9	33.9	-17.0	PASS
2398.525000	-50.9	33.9	-17.0	PASS
2399.225000	-51.0	34.0	-17.0	PASS
2395.125000	-51.1	34.1	-17.0	PASS
2395.825000	-51.1	34.1	-17.0	PASS
2395.875000	-51.1	34.1	-17.0	PASS
2397.325000	-51.1	34.1	-17.0	PASS
2395.325000	-51.1	34.1	-17.0	PASS

IEEE 802.11 b
Results @2462 MHz

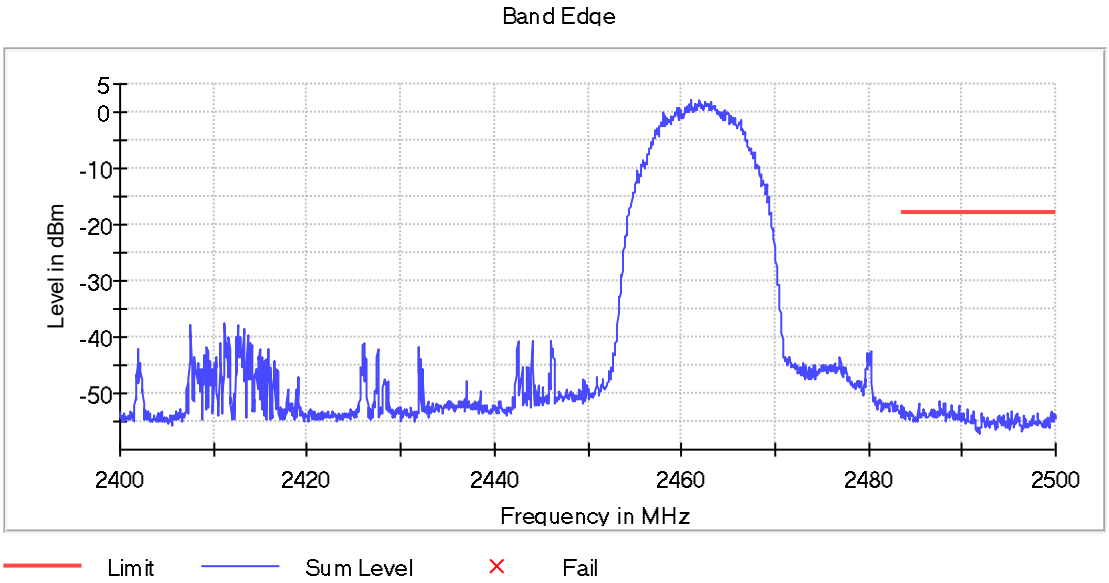

Inband Peak

Frequency (MHz)	Level (dBm)
2462.0000	2.1

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2487.625000	-51.3	33.4	-17.9	PASS
2488.125000	-51.7	33.8	-17.9	PASS
2485.425000	-51.8	33.9	-17.9	PASS
2488.075000	-51.8	33.9	-17.9	PASS
2485.375000	-51.8	33.9	-17.9	PASS
2488.875000	-52.0	34.1	-17.9	PASS
2487.675000	-52.0	34.1	-17.9	PASS
2489.675000	-52.0	34.2	-17.9	PASS
2488.825000	-52.2	34.3	-17.9	PASS
2489.625000	-52.2	34.4	-17.9	PASS
2487.575000	-52.4	34.5	-17.9	PASS
2483.775000	-52.6	34.7	-17.9	PASS
2488.175000	-52.7	34.8	-17.9	PASS
2490.575000	-52.8	34.9	-17.9	PASS
2487.025000	-52.8	34.9	-17.9	PASS

IEEE 802.11 g
Results @2412 MHz

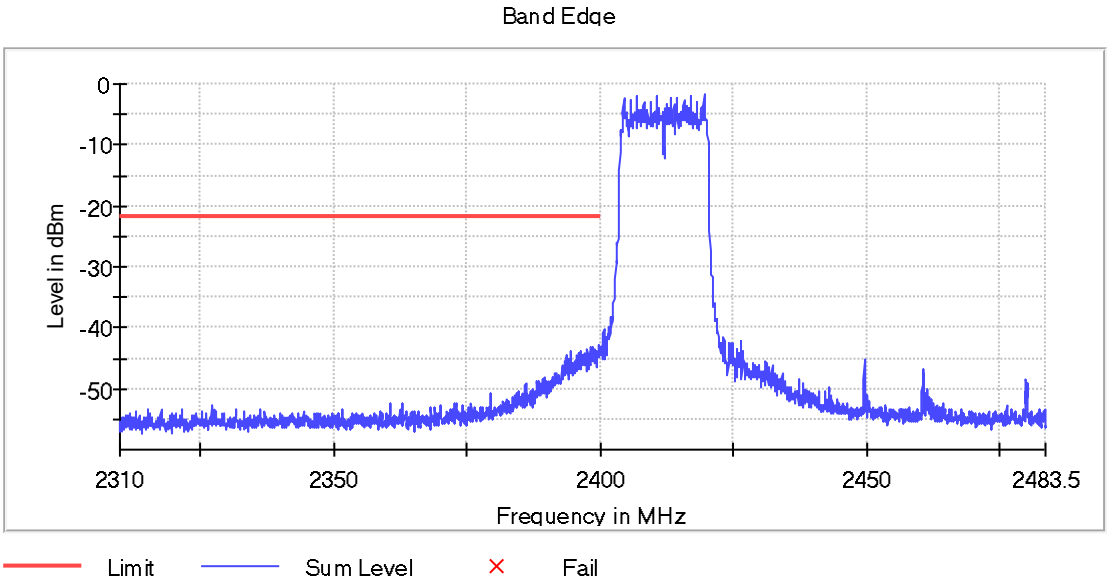

Inband Peak

Frequency (MHz)	Level (dBm)
2412.0000	-1.8

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.875000	-42.8	21.0	-21.8	PASS
2398.625000	-43.1	21.3	-21.8	PASS
2398.225000	-43.1	21.3	-21.8	PASS
2399.825000	-43.2	21.4	-21.8	PASS
2398.275000	-43.2	21.4	-21.8	PASS
2398.525000	-43.4	21.6	-21.8	PASS
2397.675000	-43.5	21.7	-21.8	PASS
2399.925000	-43.5	21.7	-21.8	PASS
2399.775000	-43.5	21.8	-21.8	PASS
2399.175000	-43.6	21.8	-21.8	PASS
2398.575000	-43.6	21.8	-21.8	PASS
2397.625000	-43.7	22.0	-21.8	PASS
2399.425000	-43.8	22.0	-21.8	PASS
2396.425000	-43.9	22.1	-21.8	PASS
2398.425000	-43.9	22.1	-21.8	PASS

IEEE 802.11 g
Results @2462 MHz

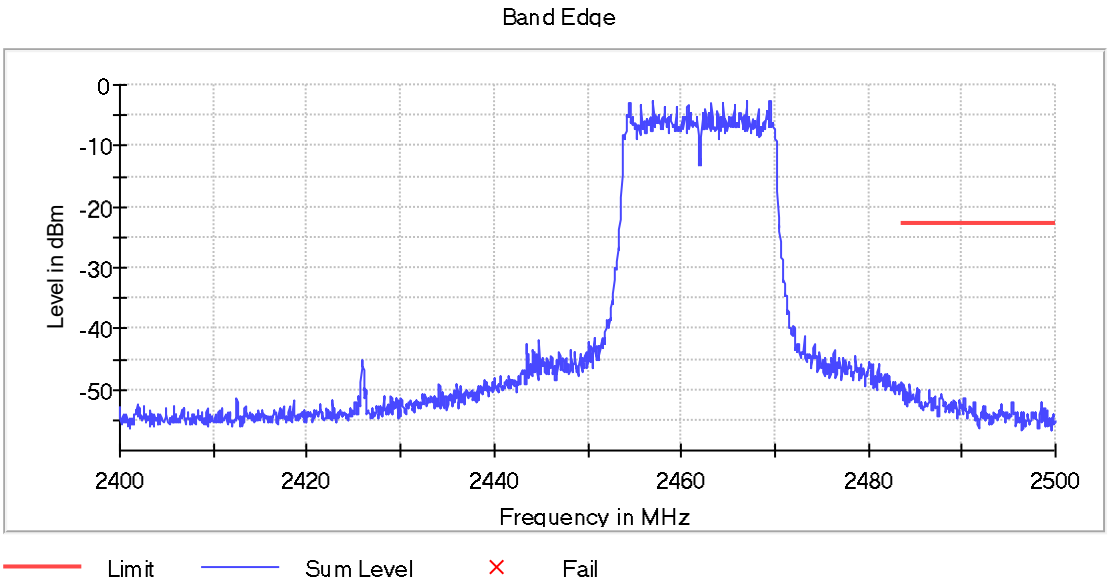

Inband Peak

Frequency (MHz)	Level (dBm)
2462.0000	-2.6

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.575000	-48.8	26.2	-22.6	PASS
2483.525000	-48.9	26.3	-22.6	PASS
2484.475000	-49.0	26.4	-22.6	PASS
2484.425000	-49.1	26.5	-22.6	PASS
2483.825000	-49.1	26.5	-22.6	PASS
2483.625000	-49.5	26.9	-22.6	PASS
2483.775000	-49.5	26.9	-22.6	PASS
2485.175000	-49.9	27.3	-22.6	PASS
2485.125000	-50.0	27.3	-22.6	PASS
2483.875000	-50.0	27.4	-22.6	PASS
2485.425000	-50.1	27.5	-22.6	PASS
2486.525000	-50.2	27.6	-22.6	PASS
2486.475000	-50.2	27.6	-22.6	PASS
2485.375000	-50.3	27.7	-22.6	PASS
2484.025000	-50.4	27.8	-22.6	PASS

IEEE 802.11 n20
Results @2412 MHz

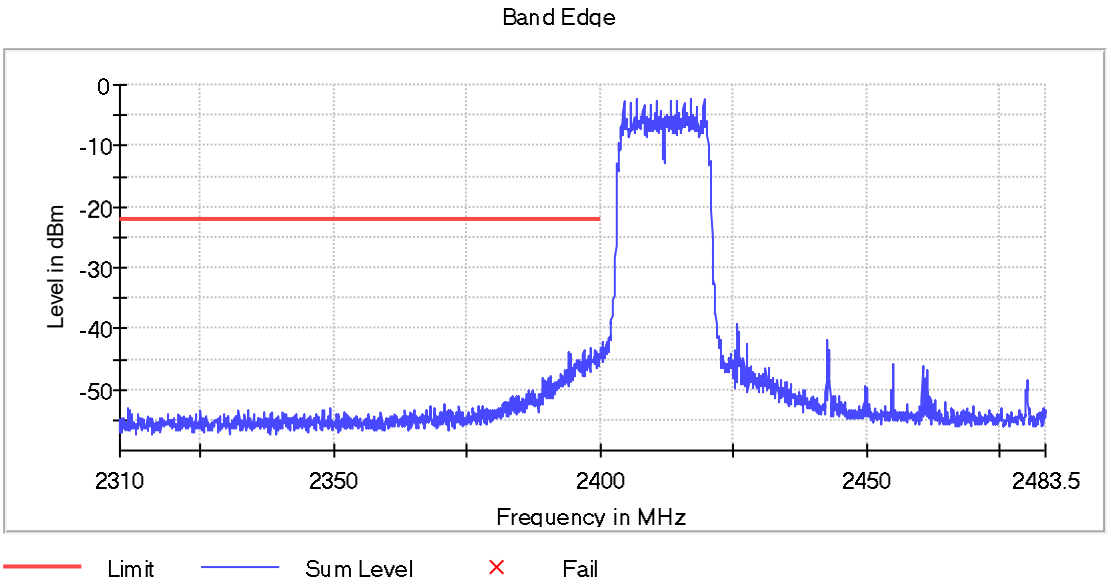

Inband Peak

Frequency (MHz)	Level (dBm)
2412.0000	-2.2

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2398.275000	-43.3	21.1	-22.2	PASS
2398.225000	-43.4	21.2	-22.2	PASS
2396.975000	-43.5	21.3	-22.2	PASS
2399.175000	-43.6	21.4	-22.2	PASS
2399.225000	-43.7	21.5	-22.2	PASS
2398.175000	-43.8	21.6	-22.2	PASS
2397.025000	-43.8	21.6	-22.2	PASS
2398.325000	-43.8	21.6	-22.2	PASS
2394.175000	-44.0	21.8	-22.2	PASS
2399.975000	-44.0	21.8	-22.2	PASS
2396.925000	-44.1	21.9	-22.2	PASS
2399.125000	-44.1	21.9	-22.2	PASS
2394.475000	-44.2	22.0	-22.2	PASS
2399.775000	-44.2	22.0	-22.2	PASS
2399.725000	-44.4	22.2	-22.2	PASS

IEEE 802.11 n20
Results @2462 MHz

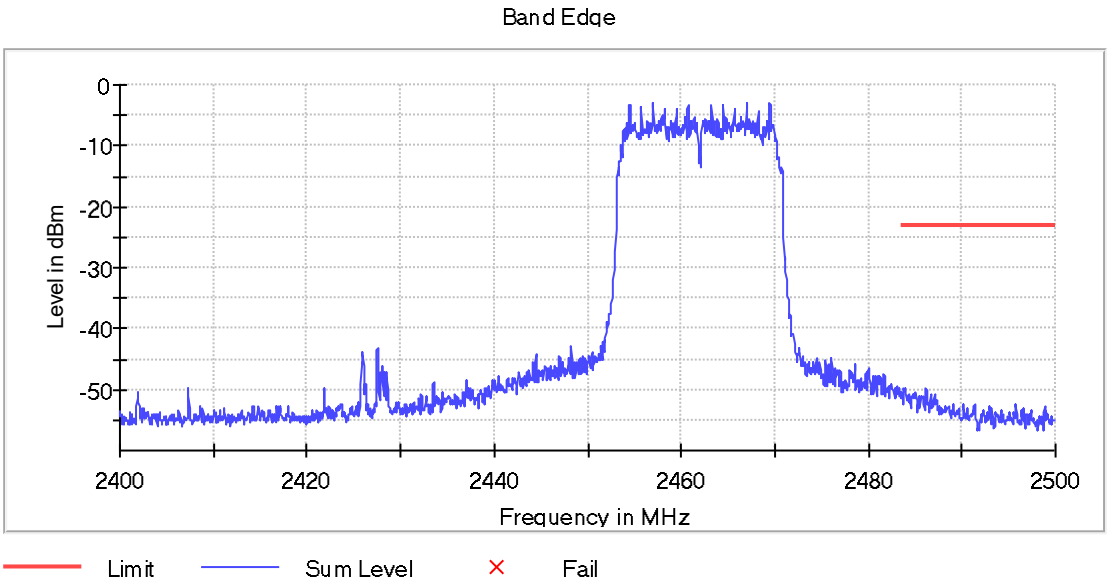

Inband Peak

Frequency (MHz)	Level (dBm)
2462.0000	-3.0

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2486.175000	-49.7	26.7	-23.0	PASS
2483.825000	-49.9	26.9	-23.0	PASS
2483.975000	-49.9	26.9	-23.0	PASS
2486.225000	-50.2	27.2	-23.0	PASS
2483.925000	-50.3	27.4	-23.0	PASS
2483.875000	-50.4	27.4	-23.0	PASS
2485.075000	-50.4	27.5	-23.0	PASS
2486.125000	-50.4	27.5	-23.0	PASS
2483.775000	-50.5	27.5	-23.0	PASS
2484.025000	-50.6	27.6	-23.0	PASS
2484.825000	-50.7	27.7	-23.0	PASS
2487.075000	-50.7	27.7	-23.0	PASS
2484.275000	-50.7	27.7	-23.0	PASS
2484.775000	-50.7	27.8	-23.0	PASS
2487.125000	-50.8	27.8	-23.0	PASS

4.5 Duty cycle	VERDICT: PASS

Test Configuration

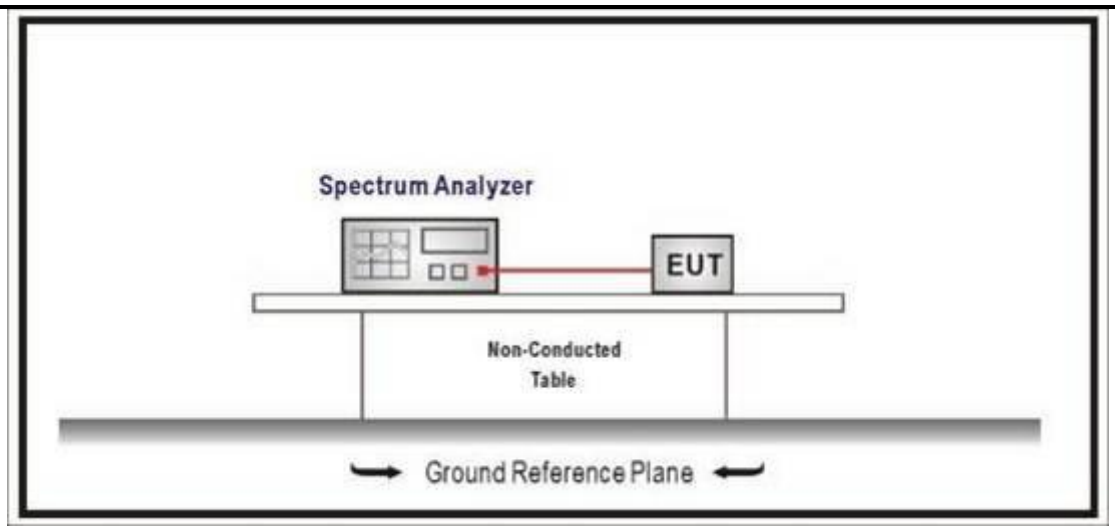

Performed measurements

Port under test	Antenna port	
Test method applied	☒	Conducted measurement
	☐	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	---	

Results

Test Mode	Tx On (ms)	Tx On + Tx Off (ms)	Duty Cycle
IEEE 802.11 b	---	---	100 %

Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control Level for the tested mode of operation.
Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: VBW ≥ 1/T will be used.

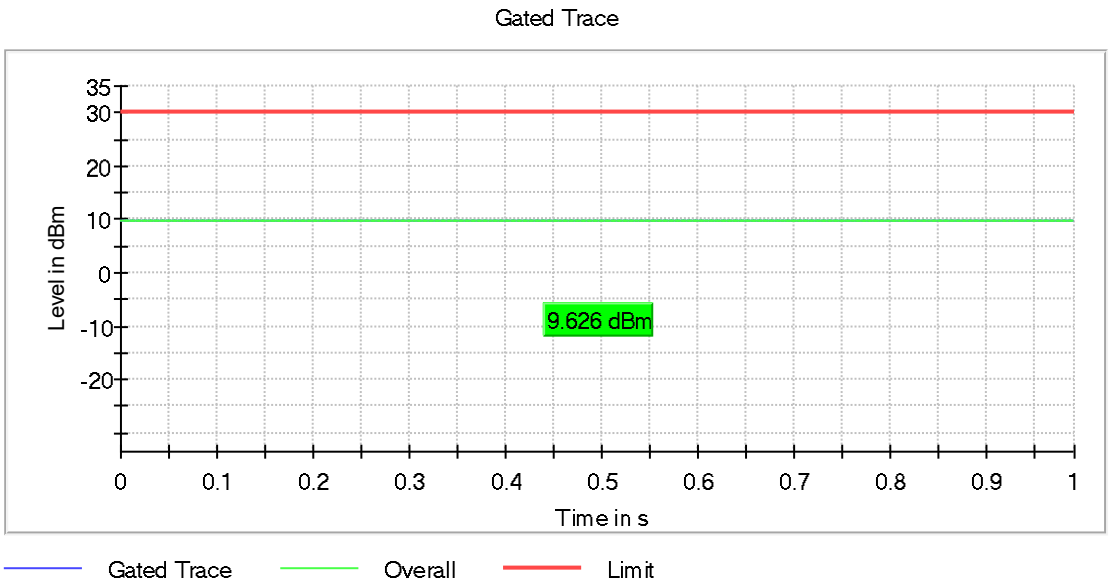

Test Mode	Tx On (ms)	Tx On + Tx Off (ms)	Duty Cycle
IEEE 802.11 g	---	---	100 %

Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control Level for the tested mode of operation.
Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: VBW ≥ 1/T will be used.

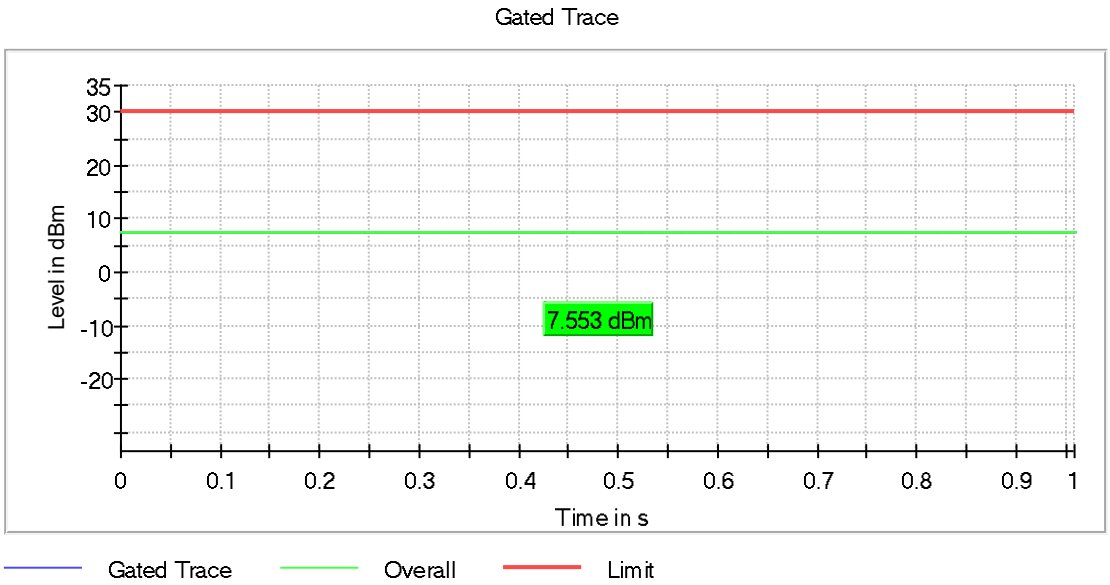

Test Mode	Tx On (ms)	Tx On + Tx Off (ms)	Duty Cycle
IEEE 802.11 n20	---	---	100 %

Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control Level for the tested mode of operation.

Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: VBW ≥ 1/T will be used.

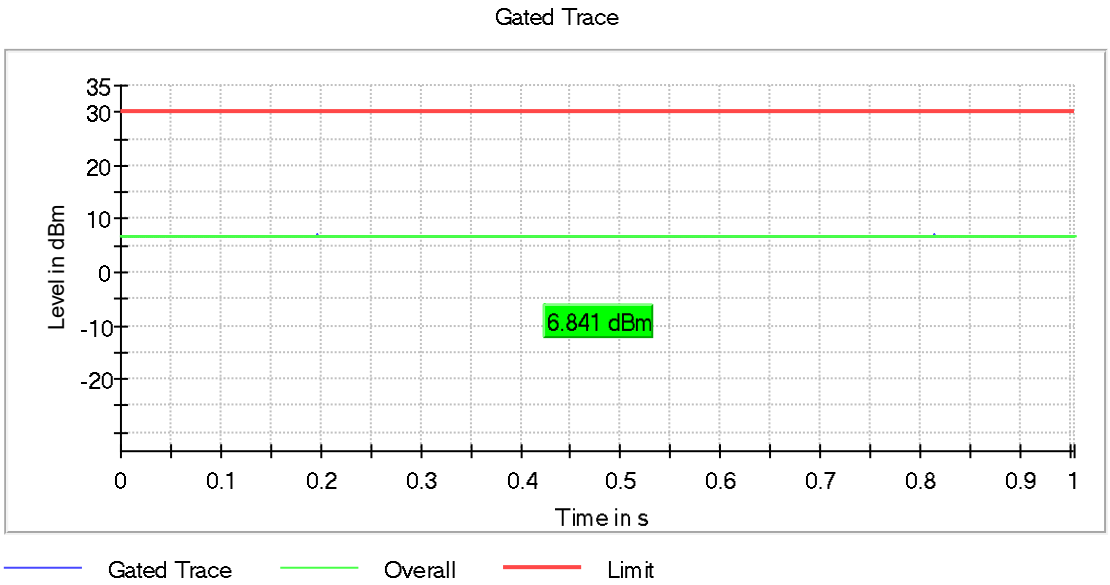

4.6 DTS Bandwidth	VERDICT: PASS

Standard	FCC Part 15 Subpart C Paragraph 15.247 (a)(2)
Systems using digital modulation techniques operate in the 2400-2483.5 MHz .The minimum 6 dB bandwidth shall be at by least 500 kHz	

Test Configuration

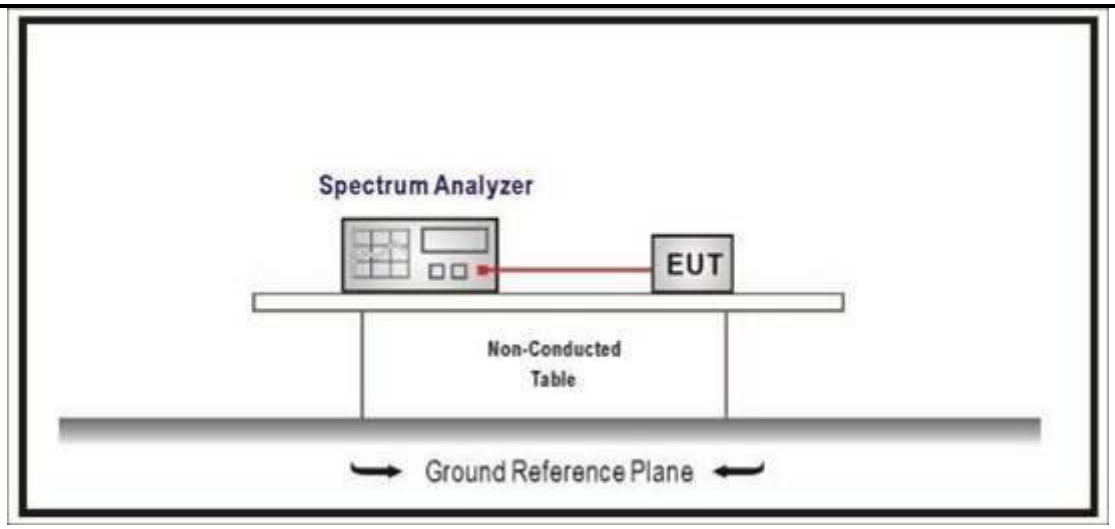

Performed measurements

Port under test	Antenna port	
Test method applied	☒	Conducted measurement
	☐	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	6dB Occupied Bandwidth: RBW: 100 KHz, VBW: 300 KHz 99% Occupied Bandwidth: RBW: 200 KHz, VBW: 1000 KHz	

Results

Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (MHz)	Limit (kHz)	Result
IEEE 802.11 b	1	2412	9.7	>500	Pass
	6	2437	9.4	>500	Pass
	11	2462	9.7	>500	Pass

6dB Occupied Bandwidth

Mode 1 / CH1 (2412MHz)

6 dB Bandwidth

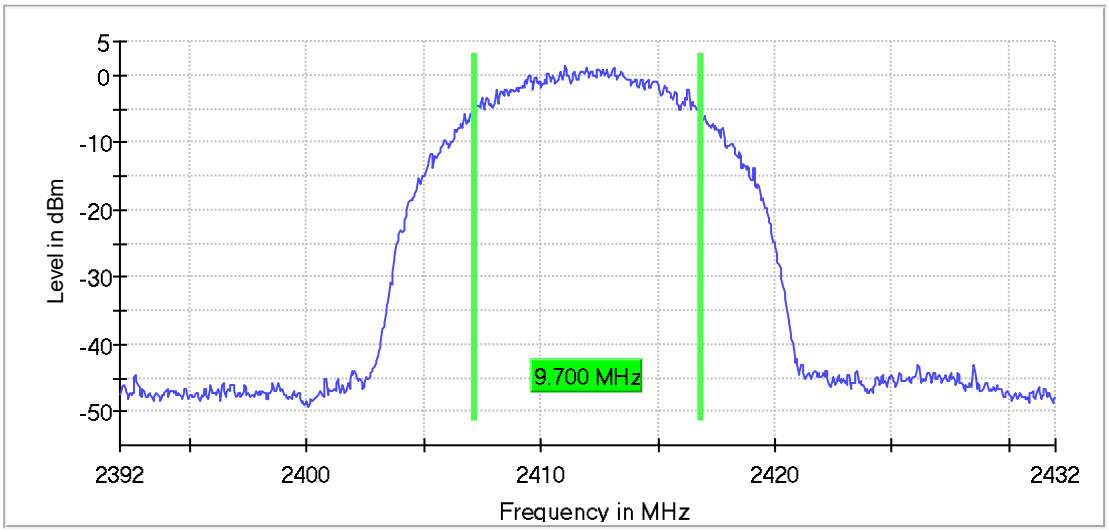

Mode 1 / CH6 (2437MHz)

6 dB Bandwidth

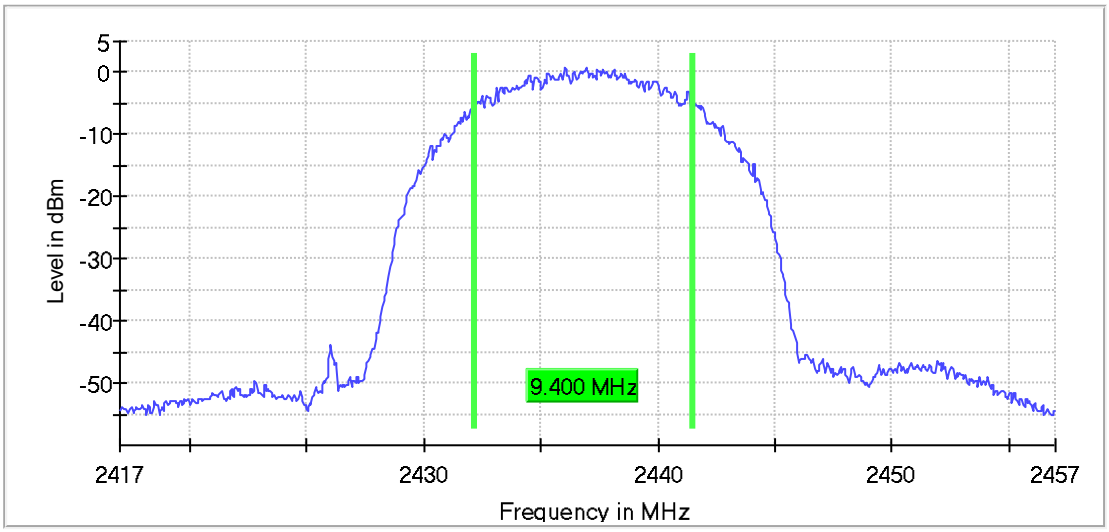

Mode 1 / CH39 (2462MHz)

6 dB Bandwidth

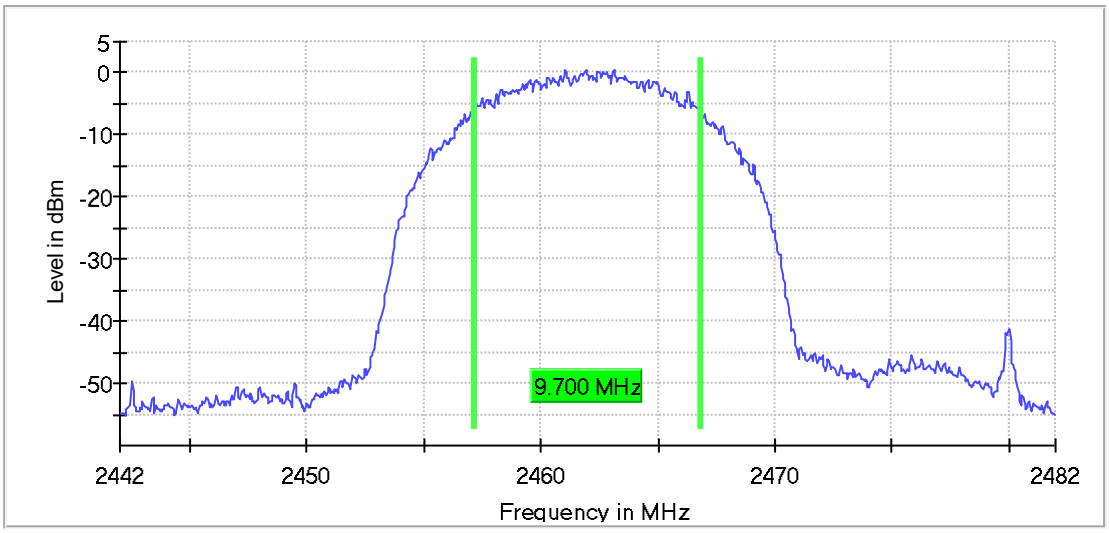

Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (MHz)	Limit	Result
IEEE 802.11 b	1	2412	13.1	Within frequency range	Pass
	6	2437	13.1	Within frequency range	Pass
	11	2462	13.0	Within frequency range	Pass

99% Occupied Bandwidth

Mode 1 / CH1 (2412 MHz)

99 % Bandwidth

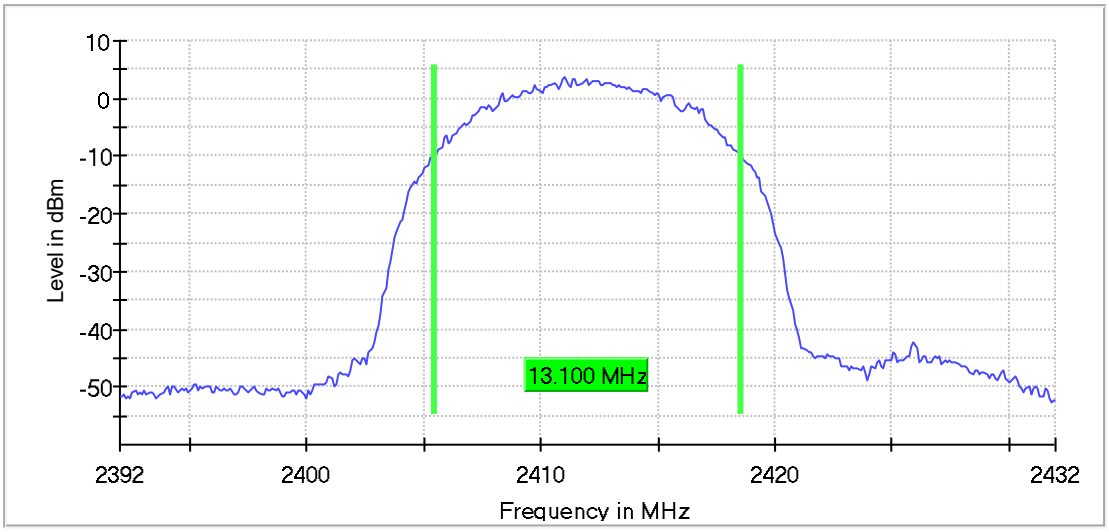

Mode 1 / CH6 (2437 MHz)

99 % Bandwidth

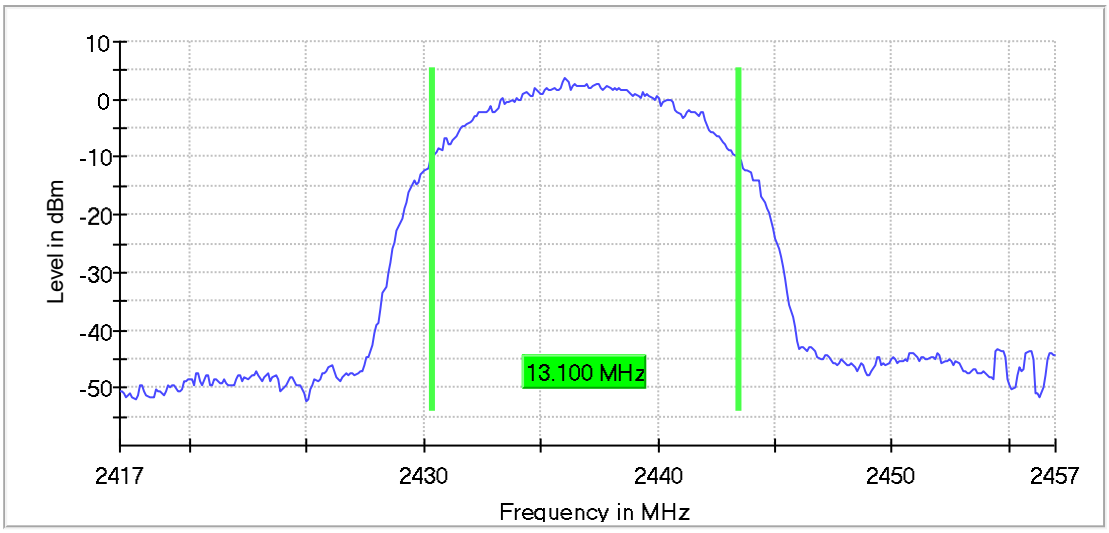

Mode 1 / CH39 (2462 MHz)

99 % Bandwidth

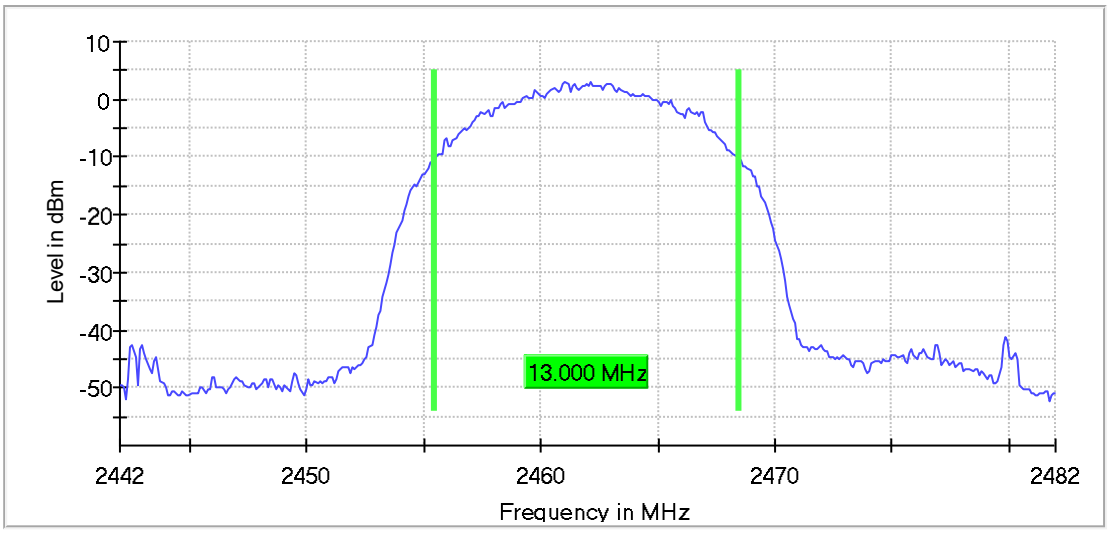

Results

Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (MHz)	Limit (kHz)	Result
IEEE 802.11 g	1	2412	16.4	>500	Pass
	6	2437	16.25	>500	Pass
	11	2462	16.4	>500	Pass

6dB Occupied Bandwidth

Mode 1 / CH1 (2412MHz)

6 dB Bandwidth

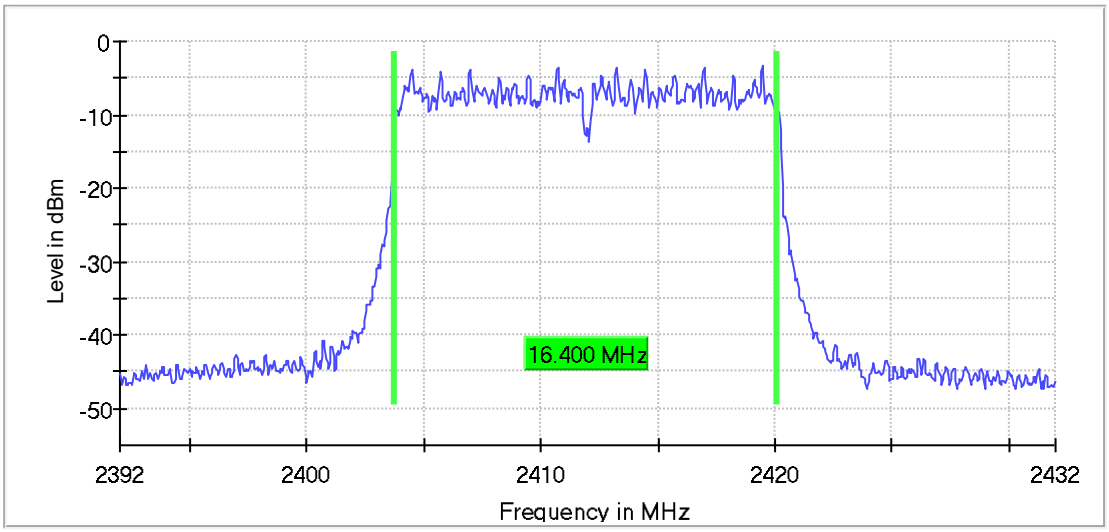

Mode 1 / CH6 (2437MHz)

6 dB Bandwidth

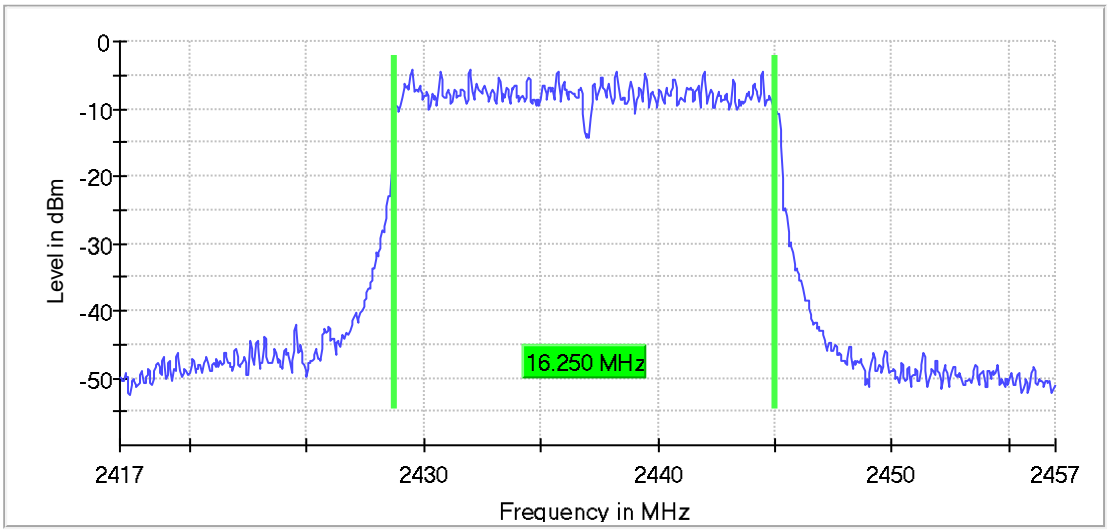

Mode 1 / CH39 (2462MHz)

6 dB Bandwidth

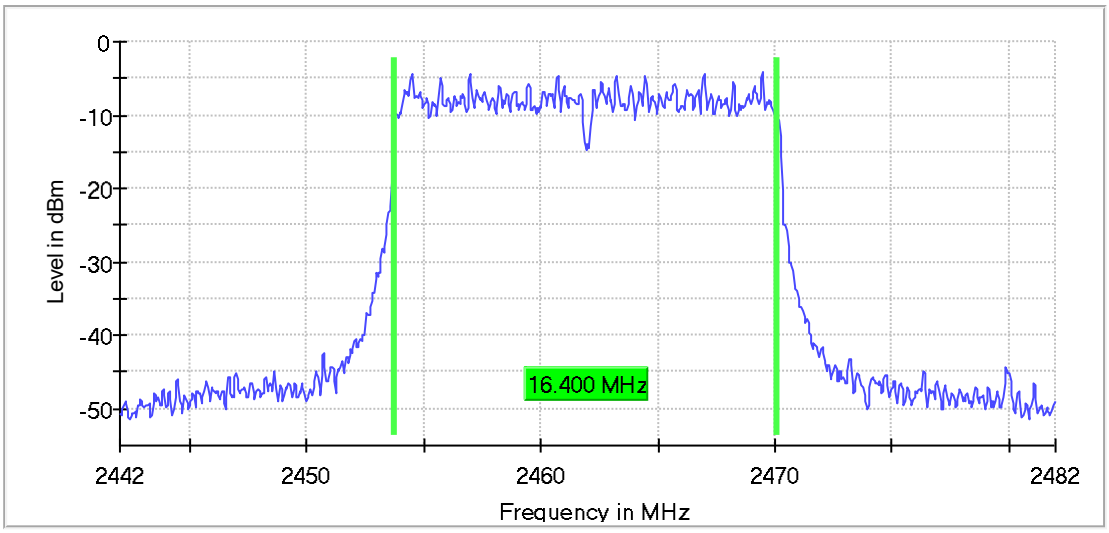

Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (MHz)	Limit	Result
IEEE 802.11 g	1	2412	16.3	Within frequency range	Pass
	3	2437	16.3	Within frequency range	Pass
	11	2462	16.3	Within frequency range	Pass

99% Occupied Bandwidth

Mode 1 / CH1 (2412 MHz)

99 % Bandwidth

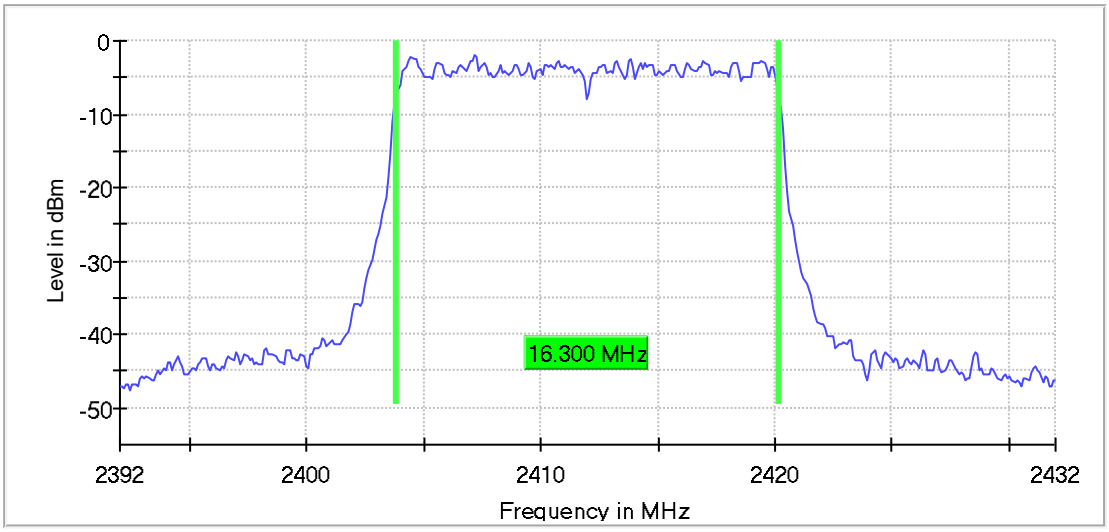

Mode 1 / CH6 (2437 MHz)

99 % Bandwidth

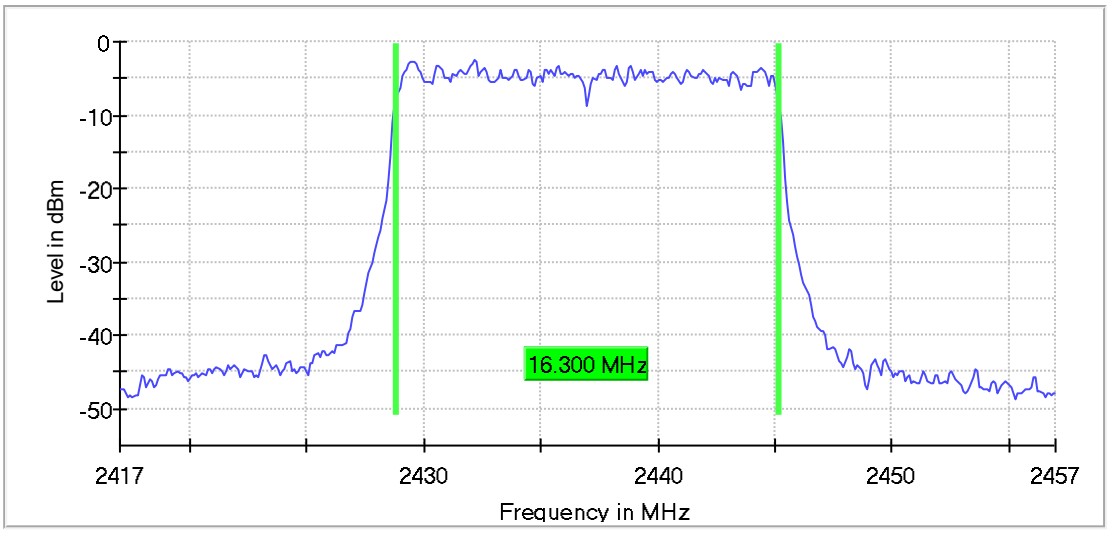

Mode 1 / CH39 (2462 MHz)

99 % Bandwidth

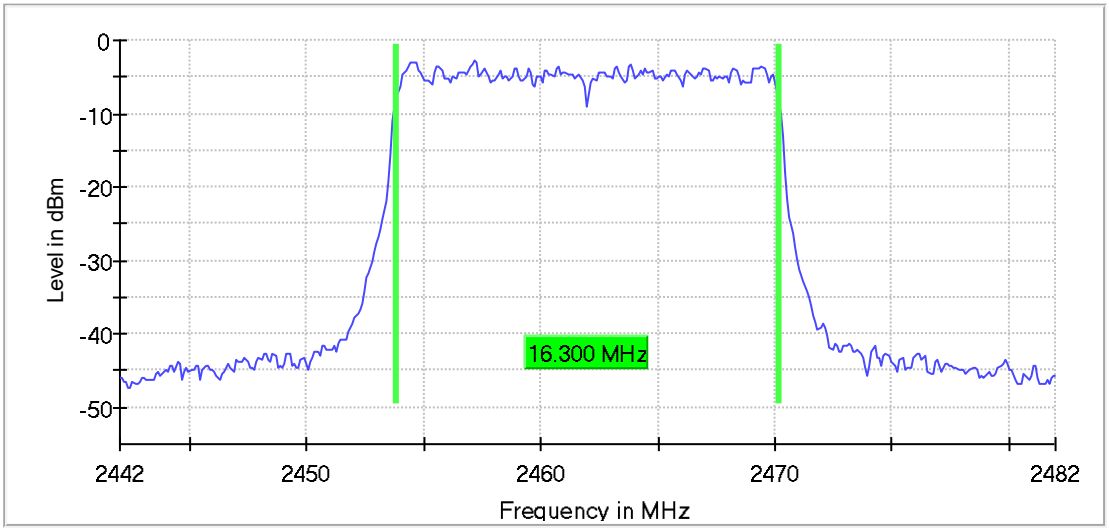

Results

Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (MHz)	Limit (kHz)	Result
IEEE 802.11 n20	1	2412	16.4	>500	Pass
	6	2437	16.35	>500	Pass
	11	2462	16.4	>500	Pass

6dB Occupied Bandwidth

Mode 1 / CH1 (2412MHz)

6 dB Bandwidth

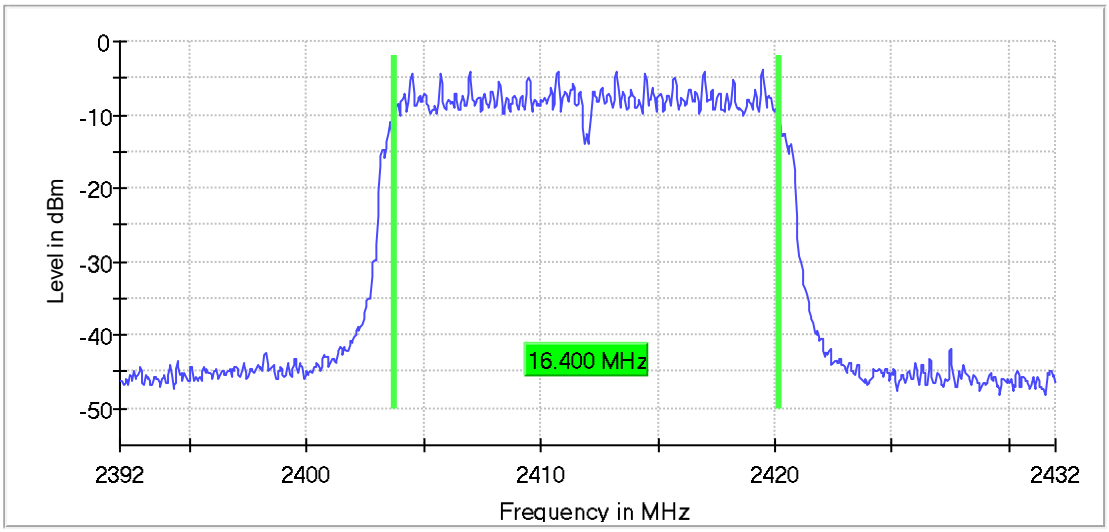

Mode 1 / CH6 (2437MHz)

6 dB Bandwidth

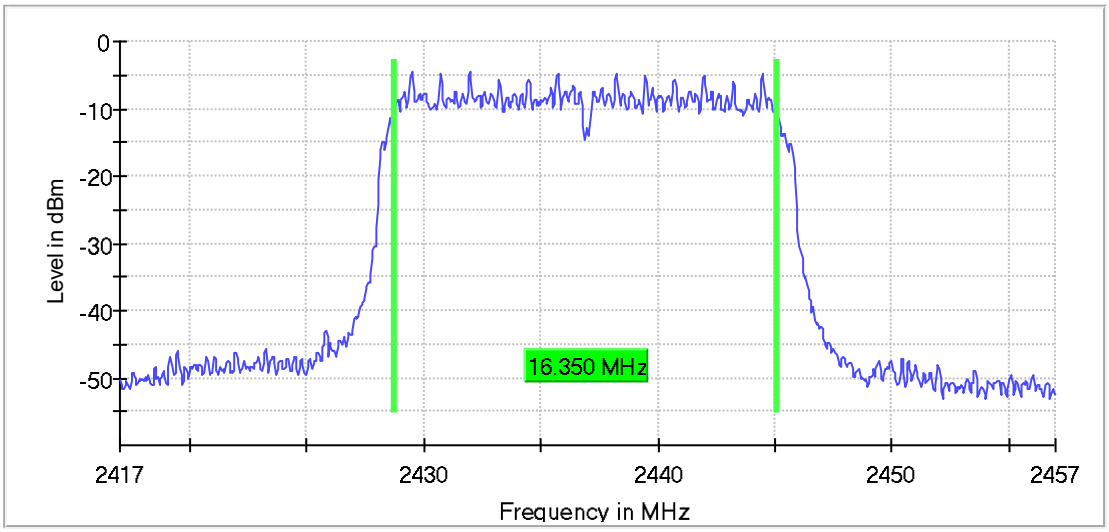

Mode 1 / CH39 (2462MHz)

6 dB Bandwidth

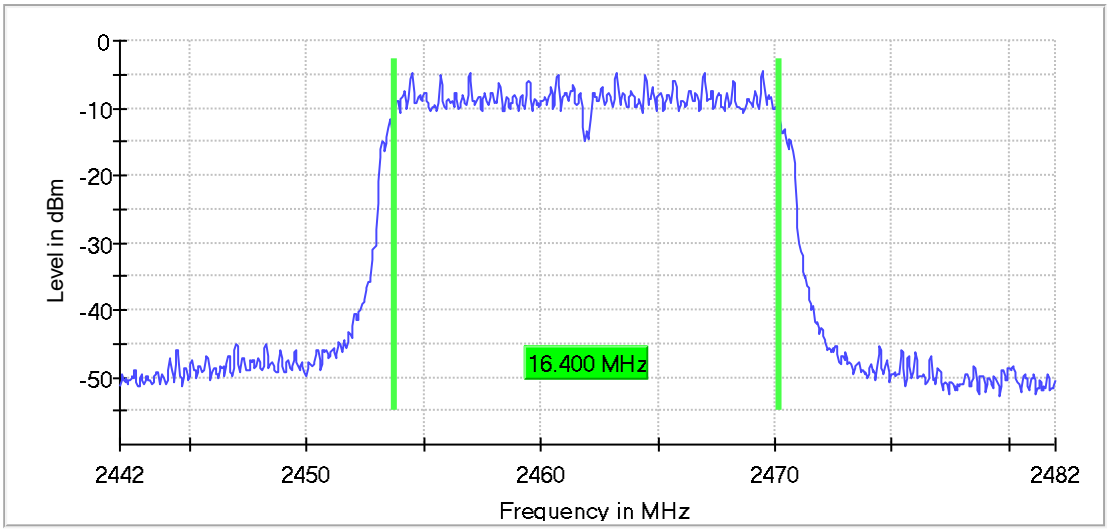

Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (MHz)	Limit	Result
IEEE 802.11 n20	1	2412	17.0	Within frequency range	Pass
	3	2437	17.0	Within frequency range	Pass
	11	2462	17.0	Within frequency range	Pass

99% Occupied Bandwidth

Mode 1 / CH1 (2412 MHz)

99 % Bandwidth

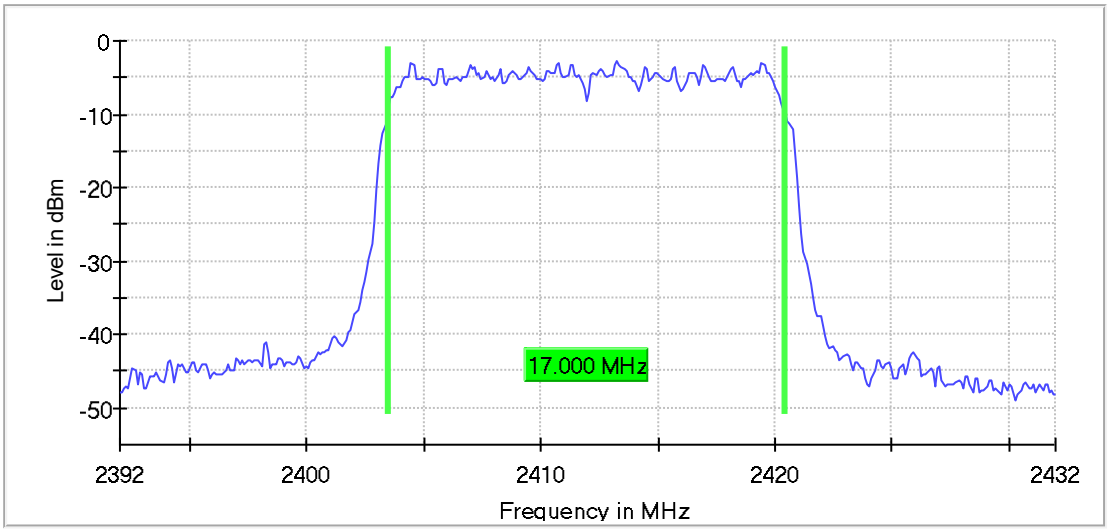

Mode 1 / CH6 (2437 MHz)

99 % Bandwidth

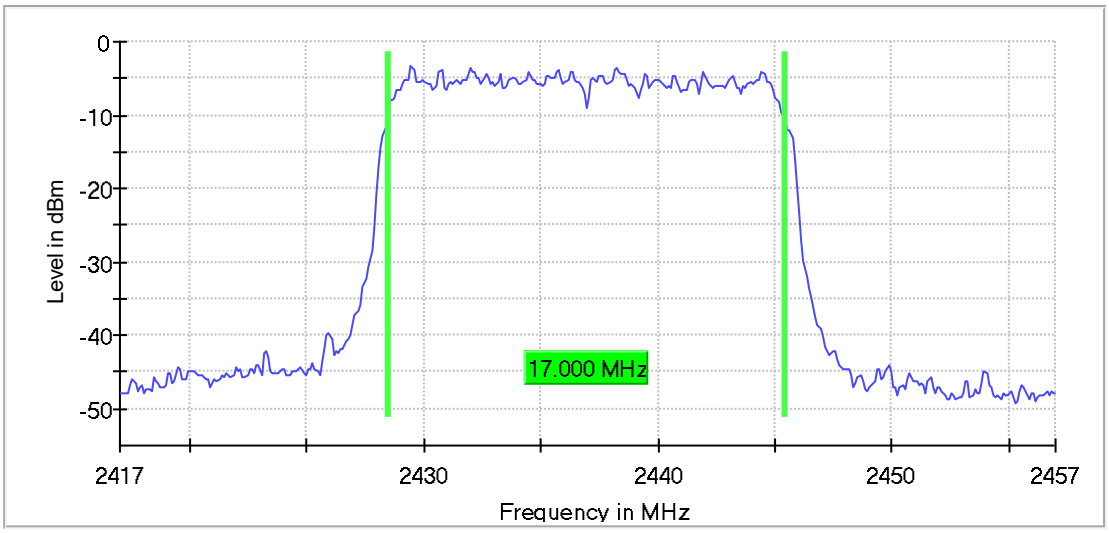

Mode 1 / CH39 (2462 MHz)

99 % Bandwidth

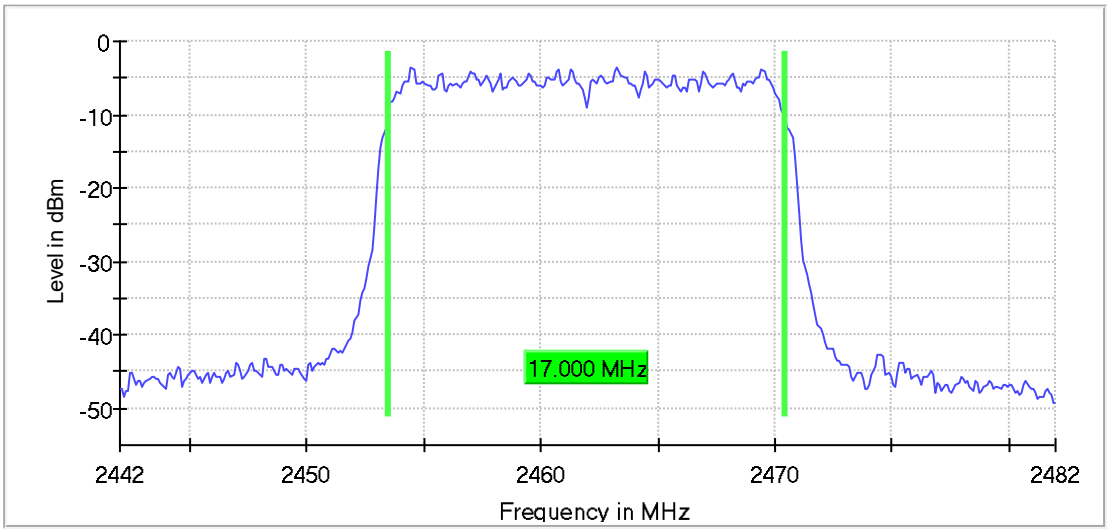

4.7	Fundamental emission output power	VERDICT: PASS

Standard			FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
☒	GTX ＜6dBi		Pout≤30dBm
☐	GTX ＞6dBi		
	☐	Non-Fix point-point	Pout≤30-(GTX -6)
	☐	Fix point-point	Pout≤30-[(GTX-6)]/3
	☐	Point-to-multipoint	Pout≤30-(GTX-6)
	☐	Overlap Beams	Pout≤30-[(GTX-6)]/3
	☐	Aggregate power transmitted simultaneously on all beams	Pout≤30-[(GTX-6)]/3
	☐	singby LE directional beam	Pout≤30-[(GTX-6)]/3+8dB
Note 1 : GTX directional gain of transmitting antennas. Note 2 : Pout is maximum peak conducted output power .			

Test Configuration

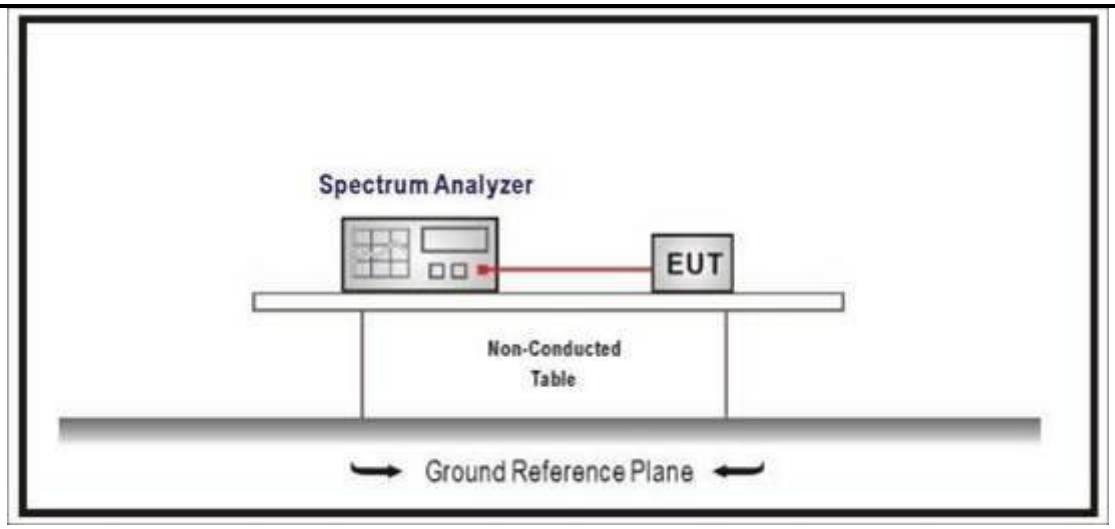

Performed measurements

Port under test	Antenna port	
Test method applied	☒	Conducted measurement
	☐	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	---	

Results

Mode	Channel	Test Frequency (MHz)	Power Output (dBm)	Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Result
IEEE 802.11 b	1	2412	16.0	≤30	16.5	≤36	Pass
	6	2437	16.2	≤30	16.7	≤36	Pass
	11	2462	15.9	≤30	16.4	≤36	Pass
IEEE 802.11 g	1	2412	16.4	≤30	16.9	≤36	Pass
	6	2437	16.3	≤30	16.8	≤36	Pass
	11	2462	15.7	≤30	16.2	≤36	Pass
IEEE 802.11 n20	1	2412	16.5	≤30	17.0	≤36	Pass
	6	2437	13.3	≤30	13.8	≤36	Pass
	11	2462	13.5	≤30	14.0	≤36	Pass

4.8	Power spectral density	VERDICT: PASS

Standard	FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
Power Spectral Density≤8dBm/3kHz	

Test Configuration

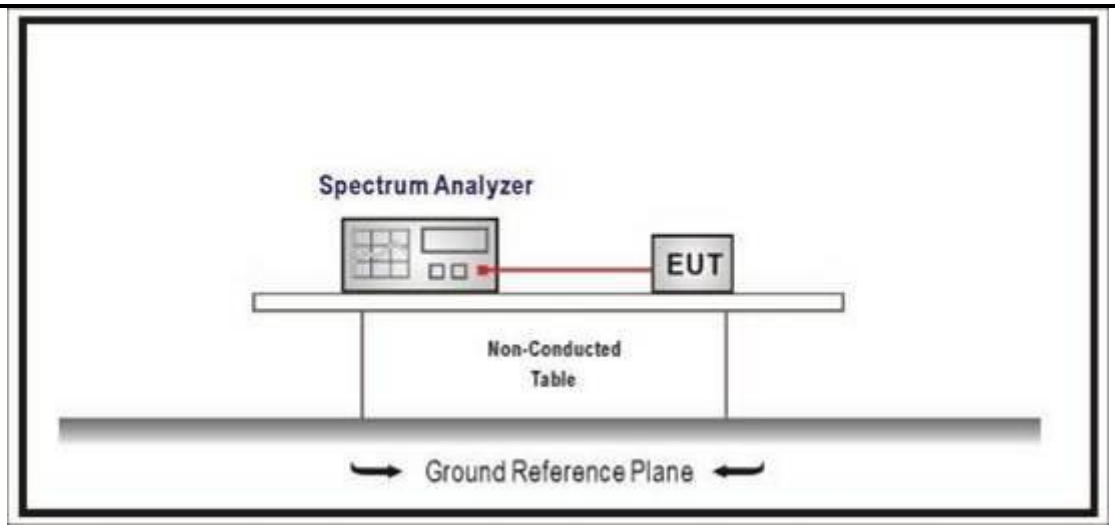

Performed measurements

Port under test	Antenna port	
Test method applied	☒	Conducted measurement
	☐	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	---	

Results

Mode	Channel	Test Frequency (MHz)	Power Output (dBm/3kHz)	Limit (dBm/3kHz)	Result
IEEE 802.11 b	1	2412	1.210	≤8	Pass
	6	2437	0.462	≤8	Pass
	11	2462	0.526	≤8	Pass
IEEE 802.11 g	1	2412	-3.379	≤8	Pass
	6	2437	-4.139	≤8	Pass
	11	2462	-4.244	≤8	Pass
IEEE 802.11 n20	1	2412	-3.856	≤8	Pass
	6	2437	-4.522	≤8	Pass
	11	2462	-4.671	≤8	Pass

Result

Data of 2412 MHz, IEEE 802.11 b

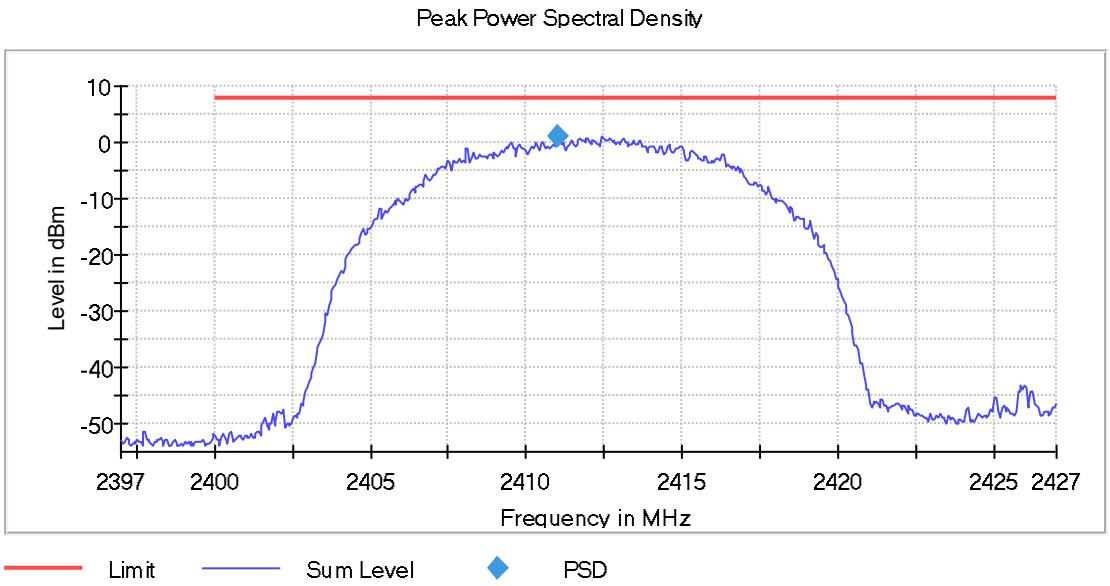

Data of 2437 MHz, IEEE 802.11 b

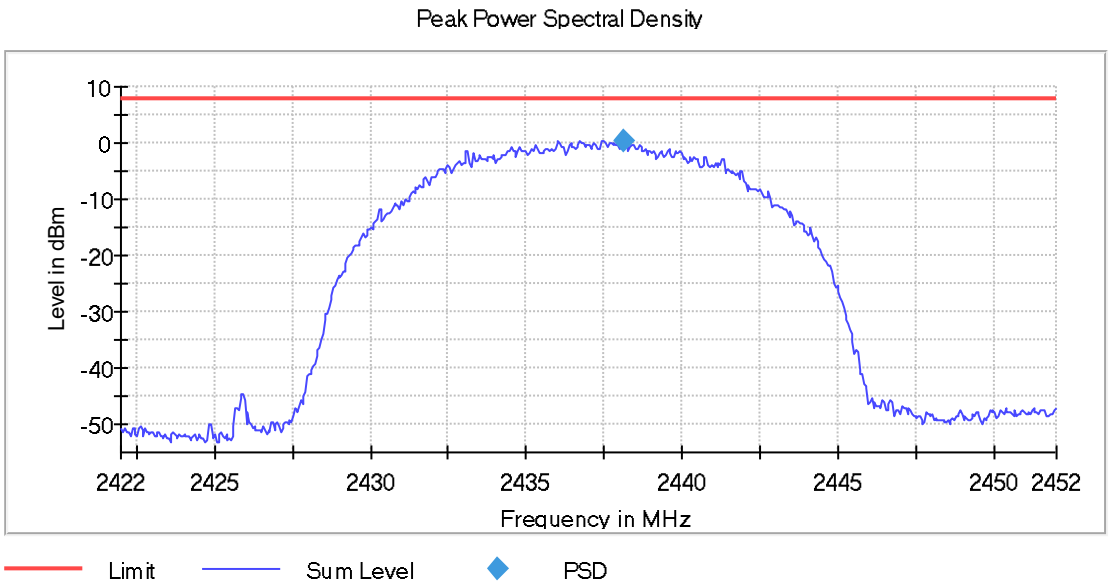

Data of 2462 MHz, IEEE 802.11 b

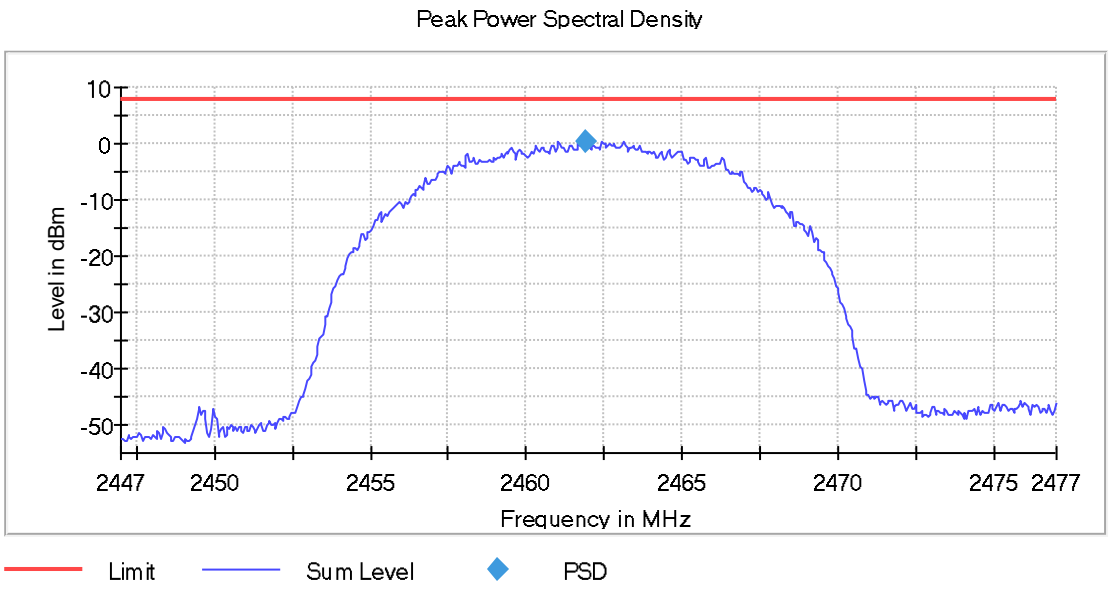

Result

Data of 2412 MHz, IEEE 802.11 g

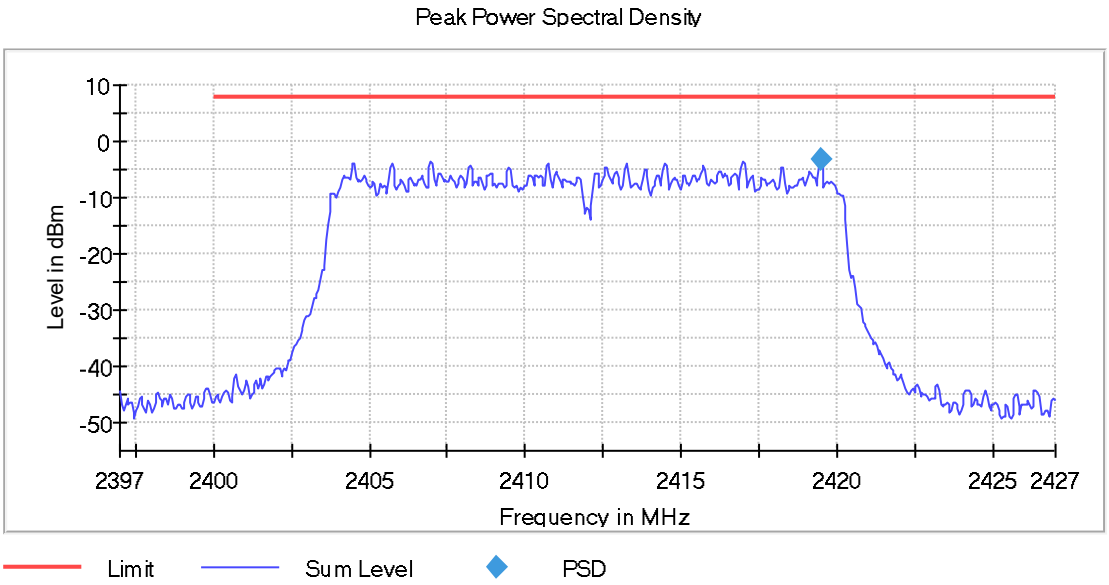

Data of 2437 MHz, IEEE 802.11 g

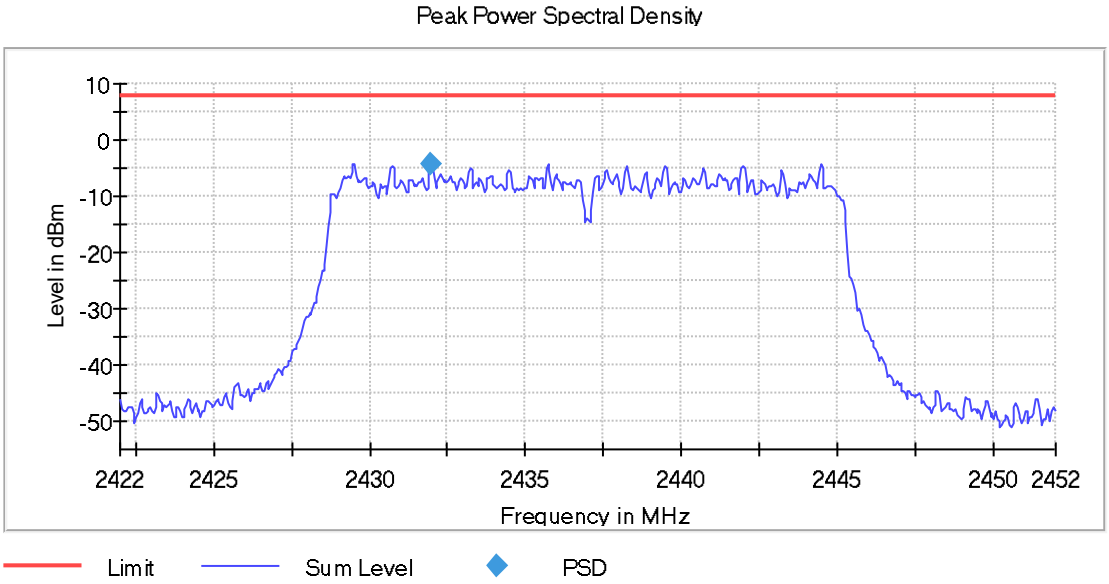

Data of 2462 MHz, IEEE 802.11 g

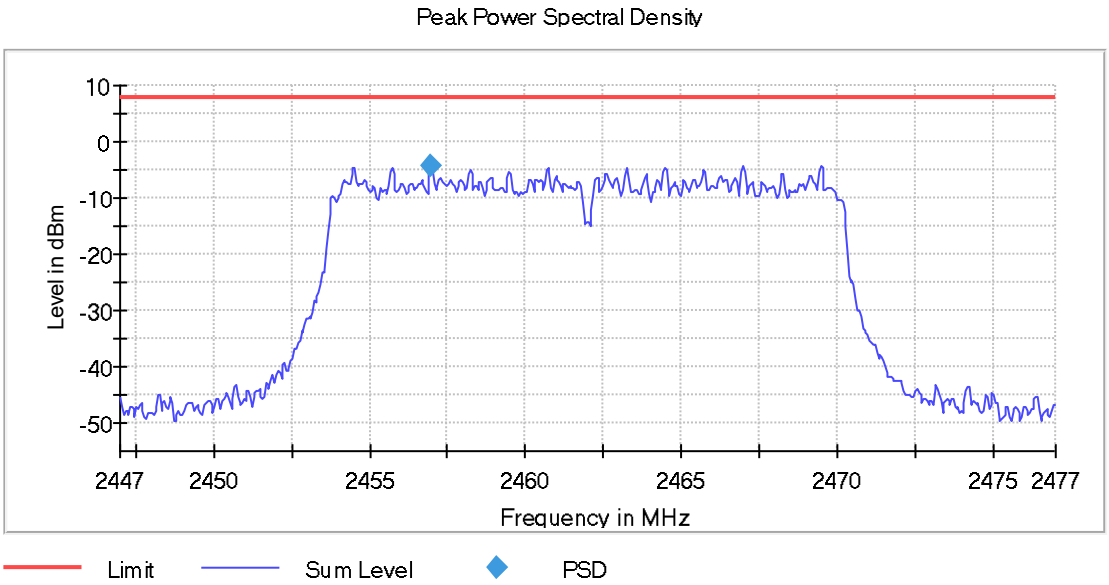

Result

Data of 2412 MHz, IEEE 802.11 n20

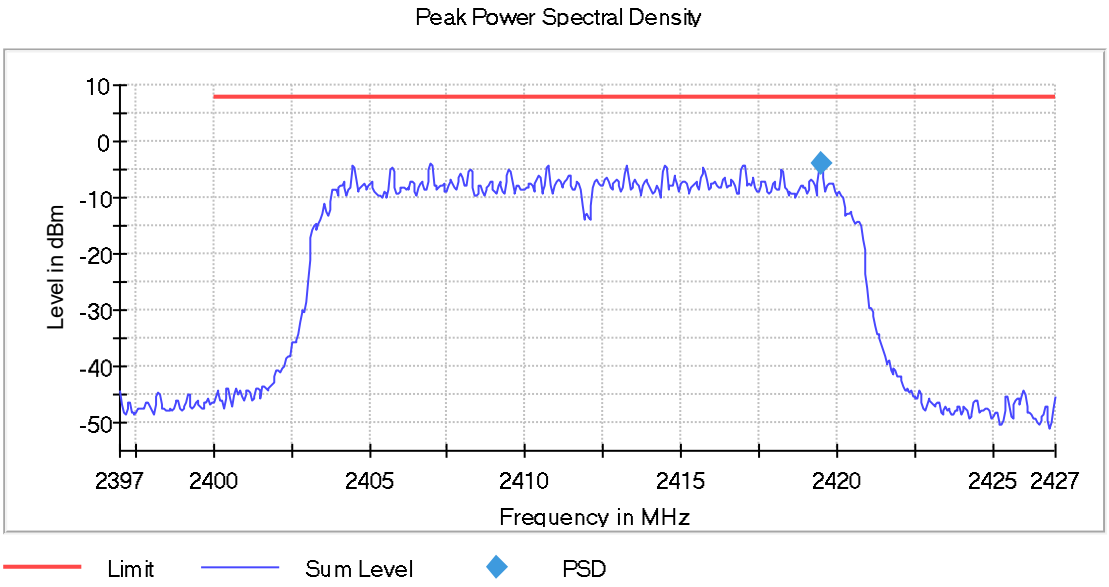

Data of 2437 MHz, IEEE 802.11 n20

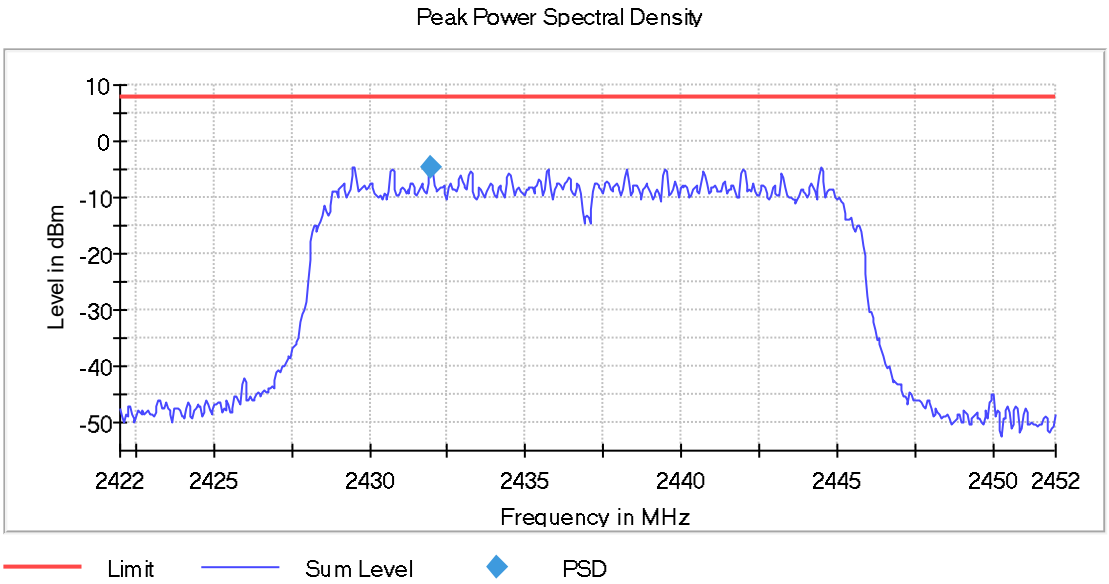

Data of 2462 MHz, IEEE 802.11 n20

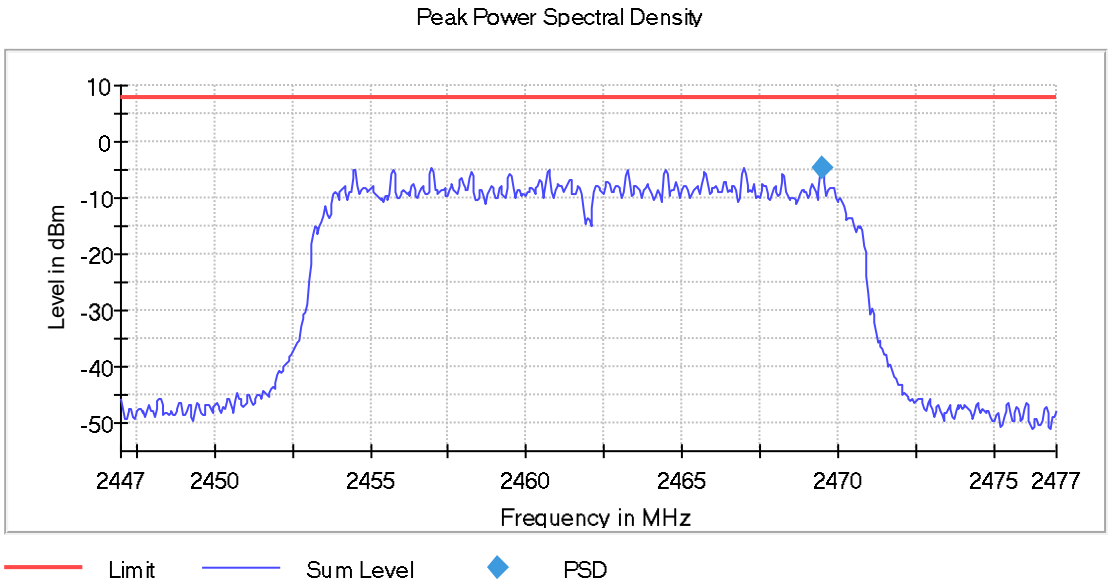

5 IDENTIFICATION OF THE EQUIPMENT UNDER TEST

The photographs show the tested device.

Refer to documents External photo and Internal photo.

ANNEX 1 – MEASUREMENT UNCERTAINTY

Test Item	Uncertainty
Radiated EM field emission (30 MHz– 1000 MHz)	±4.88 dB
Mains disturbance voltage (150 kHz – 30 MHz)	±2.82 dB
Occupied Channel Bandwidth	±0.7%
RF Output power, conducted	±0.6dB
Power Spectral Density, Conducted	±0.6dB
Unwanted Emissions, Conducted	±0.7dB
Spurious (30-1000MHz)	±4.4dB
Spurious (1-18GHz)	±3.94dB
Spurious (18-26.5GHz)	±4.04dB
Spurious (26.5-40GHz)	±4.04dB

ANNEX 2 - USED EQUIPMENT

For Conducted emission :

Instrumentation	Manufacturer	Model No.	Serial No.	DEKRA No.	Cal. Last date	Cal. Due date
Shielding Room	Changzhou Feite	/	/	G/L861	2024/03/25	2027/03/24
EMI Receiver	R&S	ESCI	101206	G/L857	2025/05/14	2026/05/13
LISN	R&S	ENV216	101337	G/L859	2025/05/13	2026/05/12

For Radiated Emission (9KHz-30MHz)

Instrumentation	Manufacturer	Model No.	Serial No.	DEKRA No.	Cal. Last date	Cal. Due date
3m Chamber	ETS	FACT3-2.0	CT000344-1100	G/L856	2025/03/11	2028/03/10
EMI receiver	R&S	ESCI	101205	G/L858	2025/05/14	2026/05/13
0.6m Loop antenna	TESEQ	HLA6121	540045	GZ1905	2025/11/09	2026/11/08

For Radiated Emission (30MHz-1000MHz)

Instrumentation	Manufacturer	Model No.	Serial No.	DEKRA No.	Cal. Last date	Cal. Due date
3m Chamber	ETS	FACT3-2.0	CT000344-1100	G/L856	2025/03/11	2028/03/10
EMI receiver	R&S	ESCI	101205	G/L858	2025/05/14	2026/05/13
Antenna (30MHz-3GHz)	SCHWARZBECK	VULB9163	506	G/L864	2025/07/04	2026/07/03
Test software	AUDIX	e3	Version 6.130520	---	---	---

For Radiated Emission (1GHz-40GHz)

Instrumentation	Manufacturer	Model No.	Serial No.	DEKRA No.	Cal. Last date	Cal. Due date
3m Chamber	ETS	FACT3-2.0	CT000344-1100	G/L856	2025/03/11	2028/03/10
Horn antenna preamplifier	Schwarzbeek	SCU-18	102234	G/L1236-1	2025/10/14	2026/10/13
Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA 9120D	02408	GZ2019	2026/01/18	2027/01/17
Antenna (18GHz-26.5GHz)	ETS	3160-09	00164643	G/L1237	2026/01/18	2027/01/17
Horn antenna preamplifier	SCHWARZBECK	SCU-26D	1879064	G/L1237-1	2026/01/08	2027/01/07
Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	00908	GZ1901	2025/06/22	2026/06/21
Horn antenna preamplifier	EMCI	EMC264045 SE	980679	GZ1901-1	2025/06/06	2026/06/05
Spectrum analyzer	R&S	FSV40	SN101012	G/L1235	2025/11/18	2026/11/17

FOR RF

Instrumentation	Manufacturer	Model	Serial no.	DEKRA No.	Cal. Last date	Cal Due date
Spectrum analyzer	R&S	FSV	SN101012	G/L1235	2025/11/18	2026/11/17
Chamber	ETS	/	/	G/L856	2025/03/11	2028/03/10
Horn antenna (1GHz-18GHz)	R&S	HF907	102306	G/L1236	2025/05/28	2026/05/27
Horn antenna preamplifier	Schwarzbeek	SCU-18	102234	G/L1236-1	2025/10/14	2026/10/13
Horn antenna (18GHz-26.5GHz)	ETS	3160-09	00164643	G/L1237	2026/01/18	2027/01/17
Horn antenna preamplifier	/	SCU-26D	1879064	G/L1237-1	2026/01/08	2027/01/07
EMI receiver	R&S	ESCI	101205	G/L857	2026/05/19	2027/05/18
Antenna (30MHz-3GHz)	SCHWARZBECK	VULB9163	506	G/L864	2025/07/04	2026/07/03
OSP	R&S	OSP 150	101907	GZ1893	2025/12/23	2026/12/22
Signal generator	R&S	SMB 100A	181317	GZ1895	2025/12/23	2026/12/22
Vector signal generator	R&S	SMBV100A	263671	GZ1896	2026/01/12	2027/01/11
Wireless connectivity tester	R&S	CMW 270	100990	GZ1894	2025/12/23	2026/12/22
Manual step attenuator (11dB)	Keysight	8494B	TH60074118	GZ2086	2025/09/03	2026/09/02
Manual step attenuator (70dB)	Keysight	8495D	TH60074471	GZ2087	2025/09/03	2026/09/02
Band filter	HX Microwave	HXLBQ-DZA118	23110101-2	GZ2540	2025/11/11	2026/11/10
Band filter	HX Microwave	HXLBQ-DZA104	23110101-1	GZ2541	2025/09/03	2026/09/02
Band filter	HX Microwave	HXLBQ-DZA219	23080804-1	GZ2464	2025/07/15	2026/07/14
Programmable Temperature & Humidity Chamber	ASTUOD	TT-5166	52689	GZ2209	2026/03/09	2027/03/10
Test software	R&S	EMC32	Version 11.30.00	---	-	-

ANNEX 3 - TEST PHOTOS

Refer to document Test setup.

--- END ---