

承认书

SPECIFICATION

制造商/Manufacturer	惠州市华阳多媒体电子有限公司 FORYOU MULTIMEDIA ELECTRONICS CO.,LTD	
型号/ Part No.	MP-A13	
客户承认签字/印章 Customer Approved Signatures		
编制/Drawn	审核/Checked	批准/Approved
		

惠州市华阳多媒体电子有限公司

FORYOU MULTIMEDIA ELECTRONICS CO.,LTD

No.1, North Shangxia Road, Dongjiang Hi-tech Industry Park, Huizhou,
Guangdong, P. R. China

一、适用范围

本产品仅适用于符合 WPC 标准的无线充电器产品上

/This product is only applicable to wireless charger products in line with the WPC standard dimensions.

二、外形尺寸/


1、 要求/Requirements:

线圈圈数 /nuber of coils	线圈层数/nuber of layers	线材/wire	
12	1	105× ϕ 0.08	

2、外形寸法/shape inch method

1. DIMENSION (UNIT mm)

* DIMENSION WITHOUT TOLERANCE IS FOR REFERENCE.

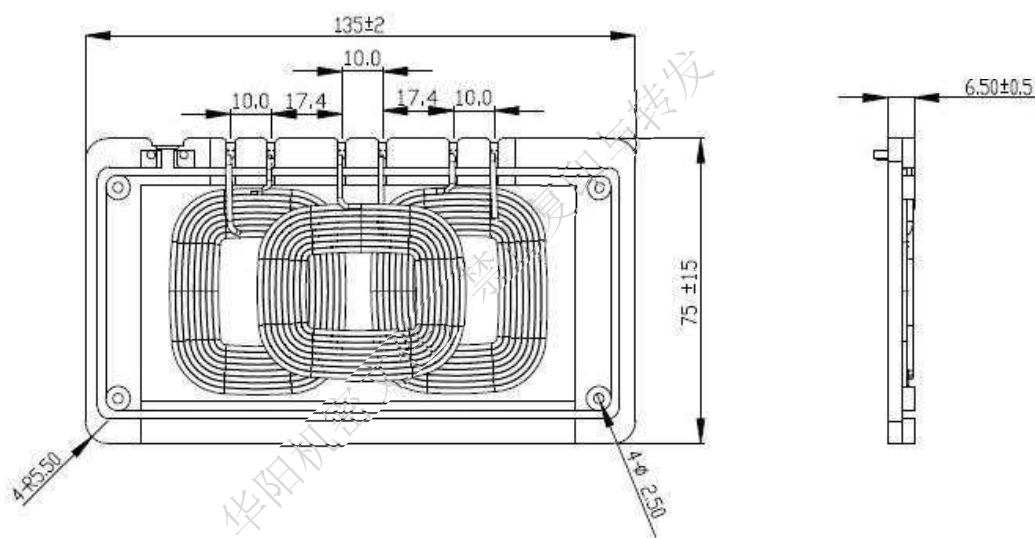

* DIMENSION WITHOUT TOLERANCE IS FOR REFERENCE.

三、 电子特性/Electrical Characteristics

No.	ITEM	SPEC	CONDITION	TEST EQUIPMENT
1	L(Upper)	6.8 μ H $\pm$ 10%	100KHz/1V	Chroma 11025
2	L(Lower)	6.8 μ H $\pm$ 10%	100KHz/1V	Chroma 11025
3	DCR	56m Ω $\pm$ 20%	20 $\pm$ 15 $^{\circ}$ C	Chroma 11025

备注：以上电感量是不带磁片时线圈的电感量。

Note: The above inductance is the inductance of the coil without magnetic plates.

四、使用条件/Conditions of use

项目/Item	规格/Specification	备注/Remarks
操作温度 Operate temperature	-40℃~ +125℃	
存储温度 Storage temperature	-40℃~ +125℃	
工作频率 Operate Frequency	110.5kHz – 148kHz	

五、包装/Packing

PVC 胶袋/plastic bag+纸箱/cardboard box

六、线圈组件/Coil Assemble

Coil Assemble

No.	ITME	MATERIAL SPECIFICATION	MANUFACTURER
1	Enamel coated copper wire (0.08*105)	Enamel coated copper wire (0.08*105)	Zhuhai Weihai Wire Co., Ltd
2	Without Tin Lead	Without Tin Lead	Thousand island metal foil co.,LTD
3	Magnetic sheet	MAGNETIC SHEET,99*54*1mm	Huizhou KELI MAGNETICS
4	Glue	CN-906 glue	Kang Rui
5	Double Tape	DS15B Double tape	CROWN