

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 74 SUBPART H REQUIREMENT**

*OF*

**Wireless Microphone**

**MODEL NO.: TH-U20**

**BRAND NAME:JWL**

**FCC ID: PVDTH-U20**

**REPORT NO:LW-SZ0601003E**

**ISSUE DATE: January 18, 2006**

*Prepared for*

**SHEN ZHEN JWL ELECTRONIC CO., LTD  
ROOM B-OP, 27/F WINDOW TO MODERNIZATION BUILDING  
HUA QIANG ROAD NORTH, FUTIAN DISTRICT  
SHENZHEN, GUANGDONG, CHINA**

*Prepared by*

**LONGWAY (SHENZHEN) CERTIFICATION SERVICE CO., LTD.**

*d.b.a.*

**LONGWAY (SHENZHEN) CERTIFICATION SERVICE CO., LTD.  
NO. 1501, B BUILDING, EAST GARDEN, SHENNAN ROAD  
#12038, NANSHAN DISTRICT, SHENZHEN,  
GUANGDONG, CHINA**

**TEL: 86-755-86174774**

**FAX: 86-755-86174774**

**VERIFICATION OF COMPLIANCE**

|                      |                                                                                                                                                            |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicant:           | Shen Zhen JWL Electronic Co., Ltd.<br>Room B-OP, 27/F Window to modernization Building Hua Qiang Road<br>North, Futian District Shenzhen, Guangdong, China |
| Manufacturer:        | Shen Zhen JWL Electronic Co., Ltd.<br>Room B-OP, 27/F Window to modernization Building Hua Qiang Road<br>North, Futian District Shenzhen, Guangdong, China |
| Product Description: | Wireless Microphone                                                                                                                                        |
| Brand Name:          | JWL                                                                                                                                                        |
| Model Number:        | HT-U20                                                                                                                                                     |
| Serial Number:       | N/A                                                                                                                                                        |
| File Number:         | LW-SZ0601003E                                                                                                                                              |
| Date of Test:        | January 03,2006 ~ January 17, 2006                                                                                                                         |

**We hereby certify that:**

The EUT was assessed by LONGWAY (SHENZHEN) CERTIFICATION SERVICE CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA 603; ANSI C 63.4:2001 and the sample tested as described in this report is in compliance with the FCC Rules Part 74 Subpart H.

The test results of this report relate only to the tested sample identified in this report.

*Approved By*



---

**King Chen / Q.A. Manager**  
**LONGWAY(SHENZHEN) CERTIFICATION**  
**SERVICE CO., LTD.**

## Table of Contents

|                                      |           |
|--------------------------------------|-----------|
| <b>1. GENERAL INFORMATION</b>        | <b>4</b>  |
| <b>2. SYSTEM TEST CONFIGURATION</b>  | <b>6</b>  |
| <b>3. SUMMARY OF TEST RESULTS</b>    | <b>9</b>  |
| <b>4. DESCRIPTION OF TEST MODES</b>  | <b>9</b>  |
| <b>5. MAXIMUM TRANSMITTER POWRE</b>  | <b>10</b> |
| <b>6. MODULATION CHARACTERISTICS</b> | <b>13</b> |
| <b>7. FREQUENCY TOLERANCE</b>        | <b>21</b> |
| <b>8. EMISSION BANDWIDTH</b>         | <b>25</b> |
| <b>9. UNWANTED RADIATION</b>         | <b>28</b> |
| <b>APPENDIX 1</b>                    |           |
| <b>PHOTOGRAPHS OF SETUP</b>          | <b>34</b> |
| <b>APPENDIX 2</b>                    |           |
| <b>PHOTOGRAPHS OF EUT</b>            | <b>36</b> |

## 1. GENERAL INFORMATION

### 1.1 Product Description

The Shen Zhen JWL Electronic Co., Ltd. Model: HT-U20 (referred to as the EUT in this report). The EUT is a signal channel Wireless Microphone designed as Low Power Auxiliary Stations for transmitting voice only. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

- A). Frequency Tolerance: 0.00093% (0.005%)
- B). Communication Type: Voice/Tone only
- C). Modulation: FM
- D). Emission type: F3E
- E). Emission designator: 53K2F3E (2M+2DK, M=14, D=12.6, K=1, Necessary Bandwidth = 53.2 KHz)
- F). Emission Bandwidth: 58.8 KHz (Limit: 200 KHz)
- G). Peak Frequency Deviation: 12.6 KHz (Limit <  $\pm 75$  KHz)
- H). Audio Frequency Response: 14 KHz
- I). Maximum Transmitter Power: 0.0199 mW (Limit: 250 mW)
- J). Output power Modification: Fixed can't be change
- K). Unwanted Radiation:
  - 1). At least 50 dB (Limit 25 dB) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
  - 2). At least 60 dB (Limit 35 dB) on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
  - 3). At least 50 dB (Limit – 4.01 dB) on any frequency removed from the center of authorized bandwidth by more than 250%)
- L ). Antenna Designation: Integral
- M). Power Supply: 9.0 V dc by battery
- N). DC Voltage= 6.8 V and DC Current= 7.3 mA into the final stage for normal operation over the power range
- O). Battery Endpoint: DC 6.8V
- P). Operating Frequency Range and Channels  
Frequency Range: 710.4 MHz – 805.9 MHz  
  
CH 01 – 710.4 MHz CH 02 – 734.6 MHz CH 03 – 802.525 MHz CH 04 – 805.9 MHz
- Q). Effective distance: 30M

## 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID filing to comply with the FCC Part 74, Subpart H Rules.

## 1.3 Test Methodology

The radiated emission testing was performed according to the procedures of ANSI TIA/EIA 603 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

## 1.4 Test Facility

The open area test site used to collect the radiated data is located at No. 6, Jinao industrial park, No.35 Jukeng Road, Dashuikeng Village, Guanlan Town, Baoan District, Shenzhen, China. The Open Area Test Site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and CISPR 22/EN 55022 requirements.

## 1.5 Special Accessories

Not available for this EUT intended for grant.

## 1.6 Equipment Modifications

Not available for this EUT intended for grant.

## 1.7 Differences between Models

| Model Name | Differences |
|------------|-------------|
| HT-U20     | N/A         |

## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the TX frequency was fixed which was for the purpose of the measurements.

### 2.3 GENERAL TECHNICAL REQUIREMENTS

- a). Section 74.861 (e) - 1: Maximum transmitter power less than 250mW
- b). Section 74.861 (e) - 3: Peak Frequency Deviation less than  $\pm 75$  KHz
- c). Section 74.861 (e) - 4: Frequency Tolerance less than 0.005%

d). Section 74.861 (e) - 5: Emission Bandwidth shall less than 200KHz

e). Section 74.861 (e) - 6: Unwanted radiation

According to Section 74.861 (e) – 6, the mean power of emission shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- 1). At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
- 2). At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
- 4). At least  $43 + 10 \log_{10}(T)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

## 2.4 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System**




Table 2-1 Equipment Used in Tested System

| Item | Equipment           | Mfr/Brand | Model/Type<br>No. | FCC ID    | Series<br>No. | Note       |
|------|---------------------|-----------|-------------------|-----------|---------------|------------|
| E-1  | Wireless Microphone | N/A       | HT-U20            | PVDHT-U20 | N/A           | <b>EUT</b> |
|      |                     |           |                   |           |               |            |
|      |                     |           |                   |           |               |            |
|      |                     |           |                   |           |               |            |
|      |                     |           |                   |           |               |            |
|      |                     |           |                   |           |               |            |

### 3. SUMMARY OF TEST RESULTS

| FCC Rules            | Description Of Test | Result    |
|----------------------|---------------------|-----------|
| Subpart 74.861 (e)-1 | Carrier Power       | Compliant |
| Subpart 74.861 (e)-3 | Frequency Deviation | Compliant |
| Subpart 74.861 (e)-4 | Frequency Tolerance | Compliant |
| Subpart 74.861 (e)-5 | Operating Bandwidth | Compliant |
| Subpart 74.861 (e)-6 | Unwanted Radiation  | Compliant |

### 4. DESCRIPTION OF TEST MODES

The EUT (Wireless Microphone) has been tested under normal operating condition. Three channels ( the top one-805.9 MH, the middle one-734.6 MHz and the bottom one-710.4 MHz) have been chosen for testing. On each channel three axes have been evaluated for radiated emission.

## 5. MAXIMUM TRANSMITTER POWER

### 5.1 PROVISIONS APPLICABLE

According to FCC Part 74 Section 74.861(e) – 1: The power of the measured unmodulated carrier power at the output of the transmitter power amplifier may not exceed 250mW

### 5.2 MEASUREMENT PROCEDURE

- 1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- 3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- 6). The transmitter shall then be rotated through 360 ° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- 8). The maximum signal level detected by the measuring receiver shall be noted.
- 9). Replace the antenna with a proper Antenna (substitution antenna).
- 10). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- 11). The substitution antenna shall be connected to a calibrated signal generator.
- 12). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- 13). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.

14). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.


15). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.

16). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.


17). The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for the gain of the substitution antenna if necessary.

### 5.3 TEST SETUP BLOCK DAIGRAM(setup block diagram of configuration)

#### TEST SETUP:

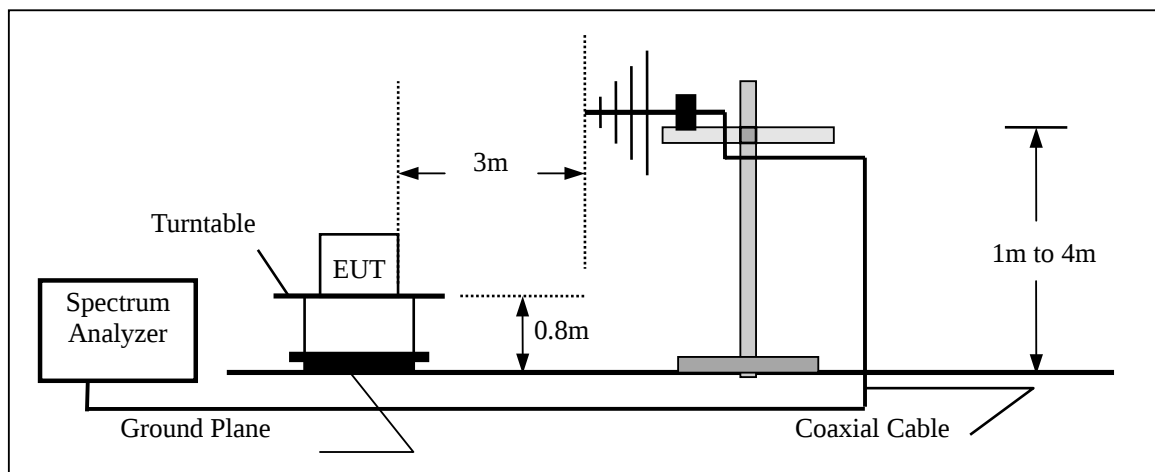

#### SUBSTITUTION METHOD:

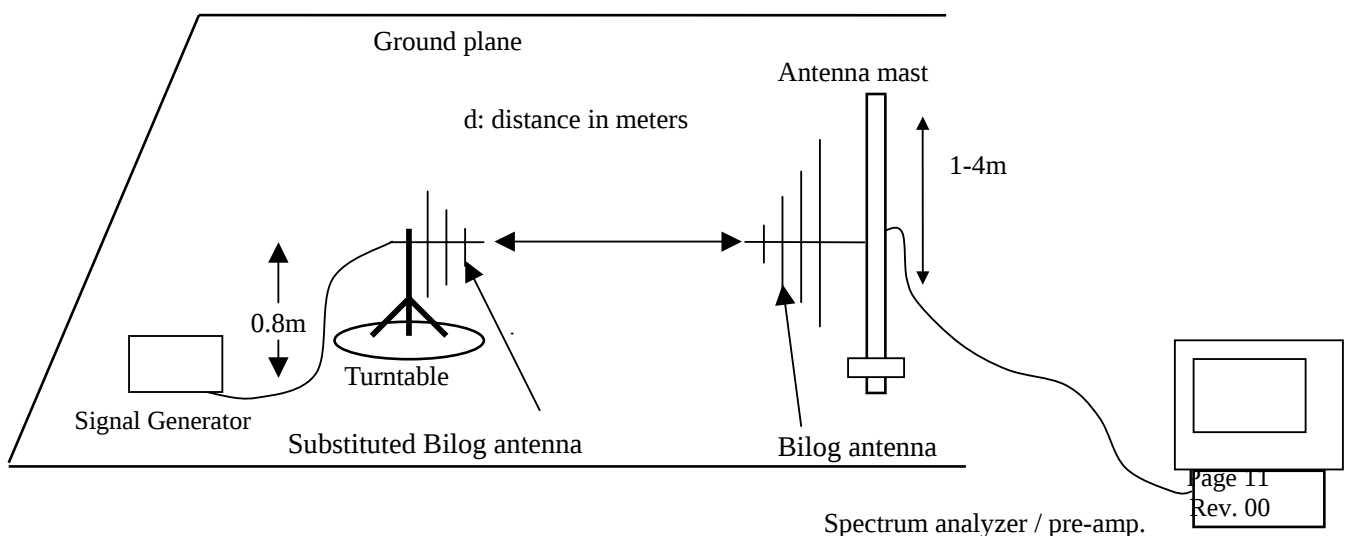

## 5.4 MEASUREMENT EQUIPMENT USED:

| Open Area Test Site |                |           |            |            |            |
|---------------------|----------------|-----------|------------|------------|------------|
| EQUIPMENT TYPE      | MFR            | MODEL NO. | SERIAL NO. | LAST CAL.  | CAL DUE.   |
| Spectrum Analyzer   | ADVANTEST      | R3132     | N/A        | 06/08/2005 | 06/07/2006 |
| EMI Test Receiver   | HP             | 8546A     | 3448A00232 | 06/08/2005 | 06/07/2006 |
| Pre-Amplifier       | HP             | 8447D     | 2944A07999 | 06/08/2005 | 06/07/2006 |
| Bi-Log Antenna      | EMCO           | 3142      | 9910-1436  | 06/08/2005 | 06/07/2006 |
| Bi-Log Antenna      | SCHAFFNER      | CBL6143   | 5082       | 06/08/2005 | 06/07/2006 |
| CABLE               | TIME MICROWAVE | LMR-400   | N-TYPE04   | 06/08/2005 | 06/07/2006 |

## 5.5 TEST RESULT

**The Output Power of Wireless Microphone****The top channel-805.9 MHz**

| Freq<br>(MHz) | Antenna<br>Polarity | Reading<br>(dBm) | SGOP<br>(dBm) | Ant.<br>Gain<br>(dB) | Dipole<br>Gain<br>(dBi) | Cable<br>(dB) | Corrected Power |          | Limit<br>(W) |
|---------------|---------------------|------------------|---------------|----------------------|-------------------------|---------------|-----------------|----------|--------------|
|               |                     |                  |               |                      |                         |               | (dBm)           | (mW)     |              |
| 805.900       | V                   | -18.12           | -27.11        | 11.81                | 0                       | 1.71          | -17.01          | 0.019907 | 0.25         |
| 805.900       | H                   | -33.74           | -41.47        | 11.81                | 0                       | 1.71          | -31.37          | 0.000729 | 0.25         |

**The middle channel-734.6 MHz**

| Freq<br>(MHz) | Antenna<br>Polarity | Reading<br>(dBm) | SGOP<br>(dBm) | Ant.<br>Gain<br>(dB) | Dipole<br>Gain<br>(dBi) | Cable<br>(dB) | Corrected Power |          | Limit<br>(W) |
|---------------|---------------------|------------------|---------------|----------------------|-------------------------|---------------|-----------------|----------|--------------|
|               |                     |                  |               |                      |                         |               | (dBm)           | (mW)     |              |
| 734.600       | V                   | -24.22           | -34.35        | 11.7                 | 0                       | 1.64          | -24.29          | 0.003724 | 0.25         |
| 734.600       | H                   | -27.95           | -40.04        | 11.7                 | 0                       | 1.64          | -29.98          | 0.001005 | 0.25         |

**The bottom channel-710.4 MHz**

| Freq<br>(MHz) | Antenna<br>Polarity | Reading<br>(dBm) | SGOP<br>(dBm) | Ant.<br>Gain<br>(dB) | Dipole<br>Gain<br>(dBi) | Cable<br>(dB) | Corrected Power |          | Limit<br>(W) |
|---------------|---------------------|------------------|---------------|----------------------|-------------------------|---------------|-----------------|----------|--------------|
|               |                     |                  |               |                      |                         |               | (dBm)           | (mW)     |              |
| 710.400       | V                   | -25.86           | -36.08        | 11.67                | 0                       | 1.61          | -26.02          | 0.002500 | 0.25         |
| 710.400       | H                   | -29.76           | -41.47        | 11.67                | 0                       | 1.61          | -31.41          | 0.000723 | 0.25         |

## 6. MODULATION CHARACTERISTICS

### 6.1 PROVISIONS APPLICABLE

a).According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

b). According to CFR 47 section 74.861(e)-3, any form of modulation may be used. A maximum deviation of  $\pm 75$  KHz is permitted when frequency modulation is employed.

### 6.2 MEASUREMENT METHOD

#### 6.2.1 Modulation Limit

1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from  $-20$  to  $+20$ dB. Record the frequency deviation obtained as a function of the input level.

2). Repeat step 1 with input frequency changing to 300,1000,3000, and 14000Hz in sequence.

#### 6.2.2 Audio Frequency Response

1). Configure the EUT as shown in figure 1.

2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).

3). Vary the Audio frequency from 100 Hz to 30 KHz and record the frequency deviation.

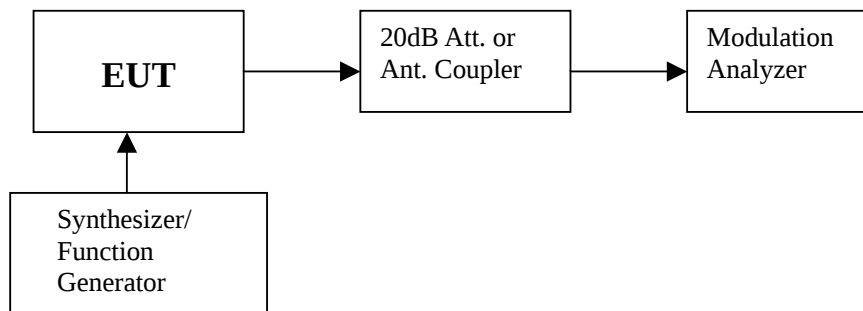


Figure 1: Modulation characteristic measurement configuration

## 6.3 MEASUREMENT INSTRUMENTS


| EQUIPMENT TYPE         | MFR           | MODEL NUMBER | LAST CAL.  | CAL DUE.   |
|------------------------|---------------|--------------|------------|------------|
| Audio Signal Generator | HP            | 3325A        | 06/07/2005 | 06/06/2006 |
| Modulation Analyzer    | HP            | 8920B        | 06/07/2005 | 06/06/2006 |
| Attenuator             | MINI CIRCUITS | MCL BW-S20W2 | 06/07/2005 | 06/06/2006 |

## 6.4 MEASUREMENT RESULT

a). Modulation Limit:


**Top channel – 805.9 MHz**

| Modulation Level (dB) | Peak Freq. Deviation At 300 Hz (KHz) | Peak Freq. Deviation At 1000 Hz (KHz) | Peak Freq. Deviation At 3000 Hz (KHz) | Peak Freq. Deviation At 14000 Hz (KHz) |
|-----------------------|--------------------------------------|---------------------------------------|---------------------------------------|----------------------------------------|
| -20                   | 7.732                                | 7.961                                 | 9.056                                 | 10.143                                 |
| -15                   | 7.761                                | 8.120                                 | 9.278                                 | 10.516                                 |
| -10                   | 7.893                                | 8.276                                 | 9.545                                 | 10.665                                 |
| -5                    | 8.244                                | 8.344                                 | 10.381                                | 11.148                                 |
| 0                     | 8.970                                | 9.246                                 | 10.562                                | 11.876                                 |
| +5                    | 9.135                                | 9.868                                 | 10.879                                | 12.081                                 |
| +10                   | 9.646                                | 9.979                                 | 11.005                                | 12.603                                 |
| +15                   | 9.712                                | 10.111                                | 11.173                                | 12.593                                 |
| +20                   | 9.941                                | 10.213                                | 11.338                                | 12.474                                 |

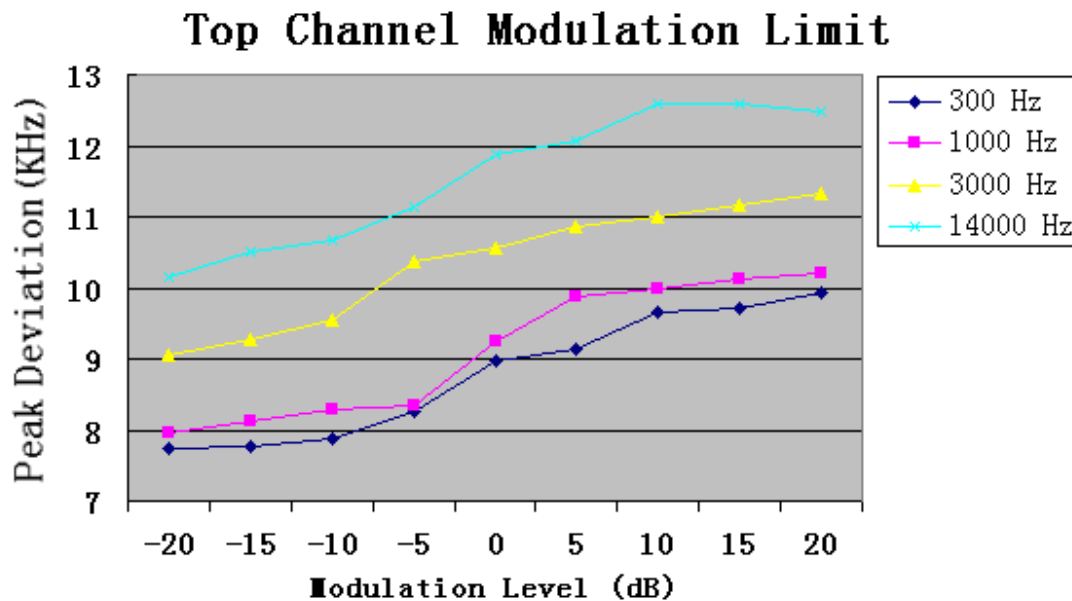


**Middle channel – 734.6 MHz**

| <b>Modulation Level (dB)</b> | <b>Peak Freq. Deviation At 300 Hz (KHz)</b> | <b>Peak Freq. Deviation At 1000 Hz (KHz)</b> | <b>Peak Freq. Deviation At 3000 Hz (KHz)</b> | <b>Peak Freq. Deviation At 14000 Hz (KHz)</b> |
|------------------------------|---------------------------------------------|----------------------------------------------|----------------------------------------------|-----------------------------------------------|
| -20                          | 7.733                                       | 7.958                                        | 9.052                                        | 10.143                                        |
| -15                          | 7.769                                       | 8.116                                        | 9.279                                        | 10.518                                        |
| -10                          | 7.890                                       | 8.275                                        | 9.548                                        | 10.667                                        |
| -5                           | 8.247                                       | 8.341                                        | 10.387                                       | 11.149                                        |
| 0                            | 8.970                                       | 9.247                                        | 10.566                                       | 11.878                                        |
| +5                           | 9.131                                       | 9.864                                        | 10.875                                       | 12.107                                        |
| +10                          | 9.648                                       | 9.972                                        | 11.003                                       | 12.584                                        |
| +15                          | 9.715                                       | 10.114                                       | 11.172                                       | 12.573                                        |
| +20                          | 9.944                                       | 10.214                                       | 11.334                                       | 12.471                                        |

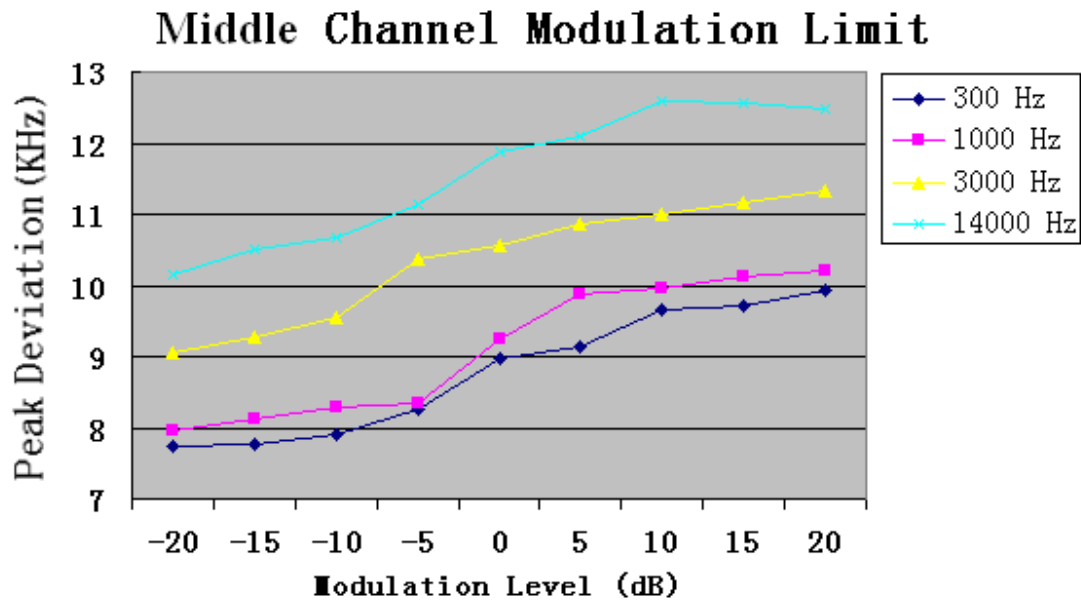

**Bottom channel – 710.4 MHz**




| <b>Modulation Level (dB)</b> | <b>Peak Freq. Deviation At 300 Hz (KHz)</b> | <b>Peak Freq. Deviation At 1000 Hz (KHz)</b> | <b>Peak Freq. Deviation At 3000 Hz (KHz)</b> | <b>Peak Freq. Deviation At 14000 Hz (KHz)</b> |
|------------------------------|---------------------------------------------|----------------------------------------------|----------------------------------------------|-----------------------------------------------|
| -20                          | 7.735                                       | 7.963                                        | 9.056                                        | 10.142                                        |
| -15                          | 7.764                                       | 8.124                                        | 9.272                                        | 10.510                                        |
| -10                          | 7.889                                       | 8.273                                        | 9.543                                        | 10.665                                        |
| -5                           | 8.243                                       | 8.344                                        | 10.389                                       | 11.148                                        |
| 0                            | 8.968                                       | 9.245                                        | 10.567                                       | 11.874                                        |
| +5                           | 9.135                                       | 9.861                                        | 10.875                                       | 12.093                                        |
| +10                          | 9.644                                       | 9.979                                        | 11.013                                       | 12.579                                        |
| +15                          | 9.717                                       | 10.116                                       | 11.179                                       | 12.543                                        |
| +20                          | 9.943                                       | 10.214                                       | 11.336                                       | 12.467                                        |

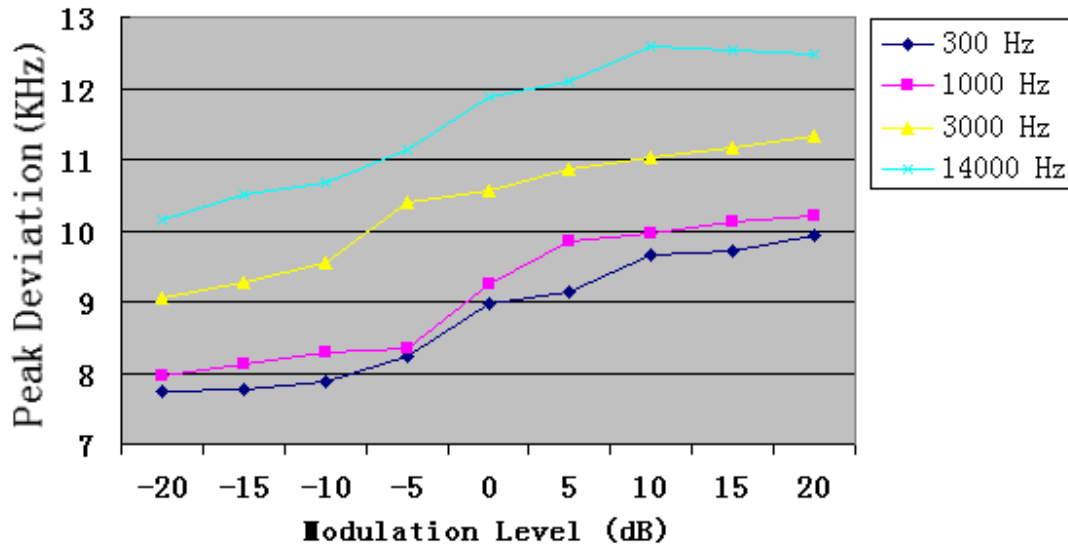**Bottom Channel Modulation Limit**

## b). Audio Frequency Response:

**Top channel – 805.9 MHz**

| Frequency (Hz) | Deviation (KHz) |
|----------------|-----------------|
| 100            | 3.11            |
| 200            | 3.72            |
| 300            | 4.14            |
| 400            | 4.73            |
| 500            | 4.99            |
| 600            | 5.17            |
| 700            | 5.42            |
| 800            | 5.73            |
| 900            | 6.04            |
| 1000           | 6.35            |
| 1200           | 6.53            |
| 1400           | 6.81            |
| 1600           | 6.99            |
| 1800           | 7.10            |
| 2000           | 7.25            |
| 2400           | 7.47            |
| 2800           | 7.66            |
| 3200           | 7.94            |
| 3600           | 8.23            |
| 4000           | 8.68            |
| 4500           | 9.02            |
| 5000           | 9.13            |
| 5500           | 9.22            |
| 6000           | 9.36            |
| 6500           | 9.46            |
| 7000           | 9.55            |
| 8000           | 9.99            |
| 9000           | 10.02           |
| 10000          | 10.09           |
| 12000          | 10.14           |
| 14000          | 10.25           |
| 16000          | 10.02           |
| 18000          | 9.45            |
| 20000          | 8.68            |
| 25000          | 8.06            |
| 30000          | 7.14            |

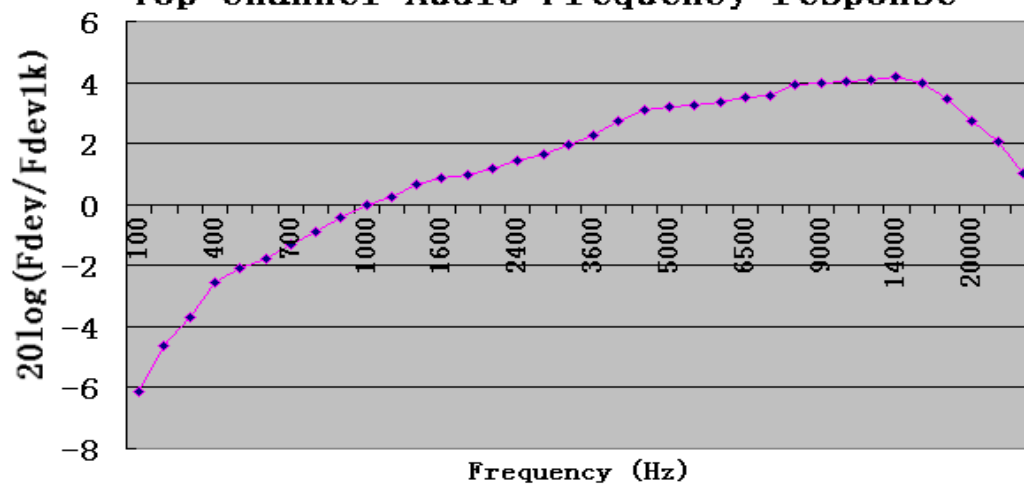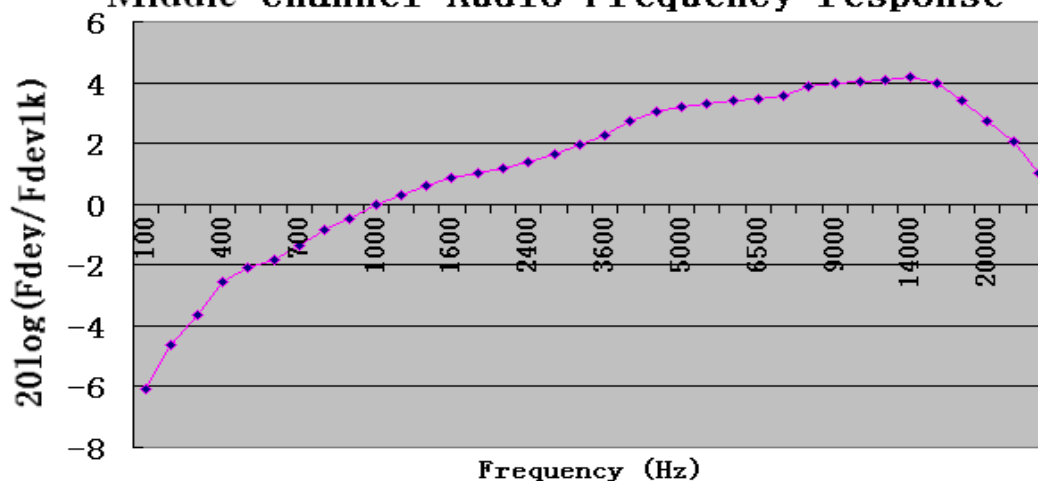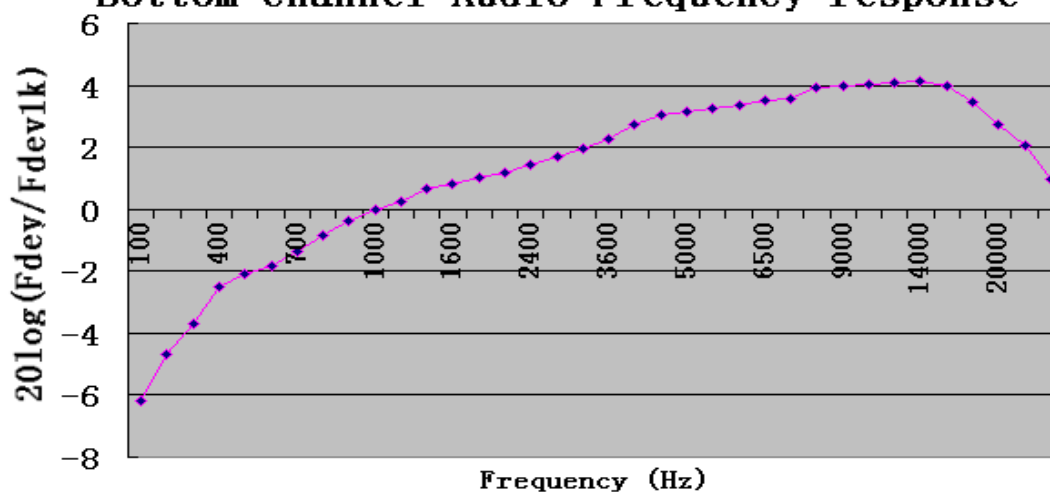**Top channel Audio Frequency response****Middle channel Audio Frequency response****Bottom channel Audio Frequency response**

**Middle channel – 734.6 MHz**

| Frequency (Hz) | Deviation (KHz) |
|----------------|-----------------|
| 100            | 3.15            |
| 200            | 3.71            |
| 300            | 4.15            |
| 400            | 4.72            |
| 500            | 4.98            |
| 600            | 5.14            |
| 700            | 5.43            |
| 800            | 5.75            |
| 900            | 6.01            |
| 1000           | 6.33            |
| 1200           | 6.56            |
| 1400           | 6.82            |
| 1600           | 6.97            |
| 1800           | 7.11            |
| 2000           | 7.25            |
| 2400           | 7.44            |
| 2800           | 7.66            |
| 3200           | 7.92            |
| 3600           | 8.23            |
| 4000           | 8.68            |
| 4500           | 9.01            |
| 5000           | 9.14            |
| 5500           | 9.26            |
| 6000           | 9.36            |
| 6500           | 9.46            |
| 7000           | 9.52            |
| 8000           | 9.93            |
| 9000           | 10.02           |
| 10000          | 10.08           |
| 12000          | 10.13           |
| 14000          | 10.23           |
| 16000          | 10.01           |
| 18000          | 9.43            |
| 20000          | 8.67            |
| 25000          | 8.05            |
| 30000          | 7.16            |

**Bottom channel – 710.4 MHz**

| Frequency (Hz) | Deviation (KHz) |
|----------------|-----------------|
| 100            | 3.13            |
| 200            | 3.72            |
| 300            | 4.13            |
| 400            | 4.74            |
| 500            | 4.97            |
| 600            | 5.16            |
| 700            | 5.43            |
| 800            | 5.73            |
| 900            | 6.05            |
| 1000           | 6.33            |
| 1200           | 6.52            |
| 1400           | 6.84            |
| 1600           | 6.97            |
| 1800           | 7.13            |
| 2000           | 7.25            |
| 2400           | 7.47            |
| 2800           | 7.68            |
| 3200           | 7.96            |
| 3600           | 8.23            |
| 4000           | 8.69            |
| 4500           | 9.02            |
| 5000           | 9.13            |
| 5500           | 9.21            |
| 6000           | 9.34            |
| 6500           | 9.48            |
| 7000           | 9.54            |
| 8000           | 9.96            |
| 9000           | 10.03           |
| 10000          | 10.10           |
| 12000          | 10.12           |
| 14000          | 10.23           |
| 16000          | 10.04           |
| 18000          | 9.45            |
| 20000          | 8.67            |
| 25000          | 8.01            |
| 30000          | 7.11            |

## 7. FREQUENCY TOLERANCE

### 7.1 PROVISIONS APPLICABLE

- a). According to FCC Part 2 Section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for hand carried battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
- c). According to FCC Part 74 Section 74.861(e)-4, the frequency tolerance must be maintained within 0.005%.

### 7.2 MEASUREMENT PROCEDURE

#### 7.2.1 Frequency stability versus environmental temperature

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to  $50^{\circ}\text{C}$ . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a  $10^{\circ}\text{C}$  decreased per stage until the lowest temperature  $-30^{\circ}\text{C}$  is measured, record all measured frequencies on each temperature step.

#### 7.2.2 Frequency stability versus input voltage

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within  $15^{\circ}\text{C}$  to  $25^{\circ}\text{C}$ . Otherwise, an environment chamber set for a temperature of  $20^{\circ}\text{C}$  shall be used. Install new battery in the EUT.
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
3. For battery operated only device, supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

### 7.3 TEST SETUP BLOCK DIAGRAM(block diagram of configuration)

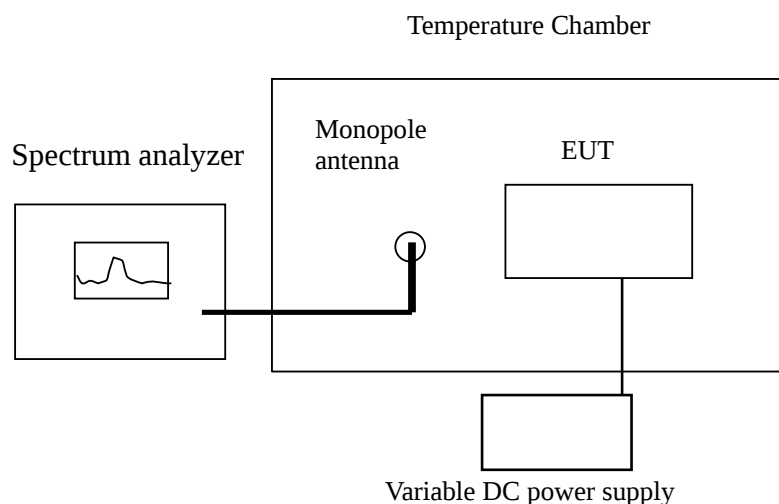


Figure 1

### 7.4 Test equipment used:

| Equipment                     | Model No. | Serial No. | Cal. Due.  |
|-------------------------------|-----------|------------|------------|
| Advantest Spectrum Analyzer   | R3132     | 120901472  | 06/06/2006 |
| Shihin Temperature Chamber    | BM50-CB   | 908        | 06/28/2006 |
| DC Power Supply               | WYK-605   | N/A        | 05/28/2006 |
| Huber + suhner low loss cable | N/A       | N/A        | 06/06/2006 |
| Monopole Antenna              | N/A       | N/A        | N/A        |

### 7.5 TEST RESULT

- a. Frequency stability versus input voltage (battery operation end point voltage is 6.8V)

| Wireless Microphone | Reference Frequency (MHz) | Frequency Measured at end point voltage | Frequency Error (%) | Limit (%) |
|---------------------|---------------------------|-----------------------------------------|---------------------|-----------|
| Top channel         | 805.9000                  | 805.895003                              | -0.00062            | 0.005     |
| Middle channel      | 734.6000                  | 734.596547                              | -0.00047            | 0.005     |
| Bottom channel      | 710.4000                  | 710.395809                              | -0.00059            | 0.005     |

## b. Frequency stability versus ambient temperature

**Top channel-805.9 MHz**

| Reference Frequency: 805.9000 MHz |              | Limit: $\pm 0.005\%$                                       |          |
|-----------------------------------|--------------|------------------------------------------------------------|----------|
| Environment Temperature<br>( )    | Power Supply | Frequency deviation measured with time Elapse (30 minutes) |          |
|                                   |              | (MHz)                                                      | %        |
| 50                                | New Battery  | 805.906608                                                 | 0.00082  |
| 40                                | New Battery  | 805.905238                                                 | 0.00065  |
| 30                                | New Battery  | 805.904594                                                 | 0.00057  |
| 20                                | New Battery  | 805.903949                                                 | 0.00049  |
| 10                                | New Battery  | 805.902659                                                 | 0.00033  |
| 0                                 | New Battery  | 805.902095                                                 | 0.00026  |
| -10                               | New Battery  | 805.900886                                                 | 0.00011  |
| -20                               | New Battery  | 805.899839                                                 | -0.00002 |
| -30                               | New Battery  | 805.898146                                                 | -0.00023 |

**Middle channel-734.6 MHz**

| Reference Frequency: 734.6 MHz |              | Limit: $\pm 0.005\%$                                       |          |
|--------------------------------|--------------|------------------------------------------------------------|----------|
| Environment Temperature<br>( ) | Power Supply | Frequency deviation measured with time Elapse (30 minutes) |          |
|                                |              | (MHz)                                                      | %        |
| 50                             | New Battery  | 734.606832                                                 | 0.00093  |
| 40                             | New Battery  | 734.605730                                                 | 0.00078  |
| 30                             | New Battery  | 734.604775                                                 | 0.00065  |
| 20                             | New Battery  | 734.603820                                                 | 0.00052  |
| 10                             | New Battery  | 734.603453                                                 | 0.00047  |
| 0                              | New Battery  | 734.602277                                                 | 0.00031  |
| -10                            | New Battery  | 734.601396                                                 | 0.00019  |
| -20                            | New Battery  | 734.600294                                                 | 0.00004  |
| -30                            | New Battery  | 734.599192                                                 | -0.00011 |

**Bottom channel-710.4 MHz**

| Reference Frequency: 710.4000 MHz |              | Limit: $\pm 0.005\%$                                          |          |
|-----------------------------------|--------------|---------------------------------------------------------------|----------|
| Environment<br>Temperature<br>( ) | Power Supply | Frequency deviation measured with time<br>Elapse (30 minutes) |          |
|                                   |              | (MHz)                                                         | %        |
| 50                                | New Battery  | 710.406109                                                    | 0.00086  |
| 40                                | New Battery  | 710.405186                                                    | 0.00073  |
| 30                                | New Battery  | 710.404902                                                    | 0.00069  |
| 20                                | New Battery  | 710.403907                                                    | 0.00055  |
| 10                                | New Battery  | 710.402913                                                    | 0.00041  |
| 0                                 | New Battery  | 710.401989                                                    | 0.00028  |
| -10                               | New Battery  | 710.400924                                                    | 0.00013  |
| -20                               | New Battery  | 710.400284                                                    | 0.00004  |
| -30                               | New Battery  | 710.399361                                                    | -0.00009 |

## 8. EMISSION BANDWIDTH


### 8.1 PROVISIONS APPLICABLE

According to FCC Part 74 Section 74.861(e)-5: The operation bandwidth shall not exceed 200 KHz

### 8.2 MEASUREMENT PROCEDURE

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). Set EUT as normal operation
- 3). Set SPA Center Frequency = fundamental frequency , RBW,VBW= 1 KHz, Span =200 KHz.
- 4). Set SPA Max hold. Mark peak, -26dB.

### 8.3 TEST SETUP BLOCK DIAGRAM (Block Diagram of Configuration)

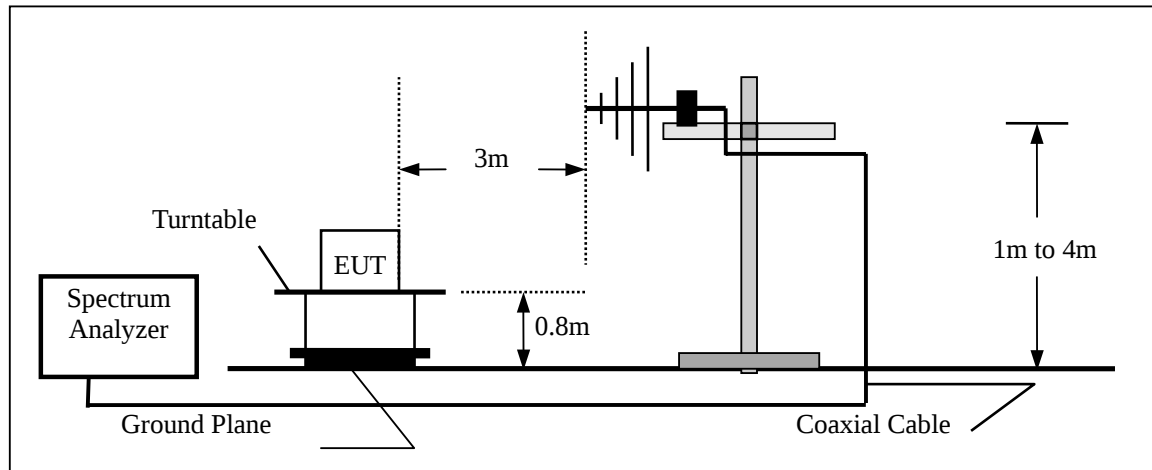

### 8.4 MEASUREMENT EQUIPMENT USED:

| Open Area Test Site # 3 |           |              |               |            |            |
|-------------------------|-----------|--------------|---------------|------------|------------|
| EQUIPMENT TYPE          | MFR       | MODEL NUMBER | SERIAL NUMBER | LAST CAL.  | CAL DUE.   |
| Spectrum Analyzer       | ADVANTEST | R3132        | 120901472     | 06/07/2005 | 06/06/2006 |
| EMI Test Receiver       | HP        | 8546A        | 3448A00232    | 06/07/2005 | 06/06/2006 |
| Pre-Amplifier           | HP        | 8447D        | 2944A07999    | 06/07/2005 | 06/06/2006 |
| Bi-log Antenna          | EMCO      | 3142         | 9910-1436     | 06/07/2005 | 05/06/2006 |

### 8.5 MEASUREMENT RESULT:

26dB bandwidth = 58.8 KHz

Refer to attached data chart.

**Top channel - 805.9 MHz****Middle channel – 734.6 MHz**

**Bottom channel – 710.4 MHz**

## 9. UNWANTED RADIATION

### 9.1 PROVISIONS APPLICABLE

According to Section 74.861(e)-6, The mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- 1). On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB;
- 2). On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB;
- 3). On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least  $43 + 10 \log_{10} (TP)$  dB

### 9.2 MEASUREMENT PROCEDURE

- 1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- 3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- 6). The transmitter shall then be rotated through 360 ° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- 8). The maximum signal level detected by the measuring receiver shall be noted.
- 9). The measurement shall be repeated with the test antenna set to horizontal polarization.
- 10). Replace the antenna with a proper Antenna (substitution antenna).
- 11). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- 12). The substitution antenna shall be connected to a calibrated signal generator.
- 13). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to

increase the sensitivity of the measuring receiver.


14). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.

15). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.


16). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.

17). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.


### 9.3 TEST SETUP BLOCK DIAGRAM (block diagram of configuration)

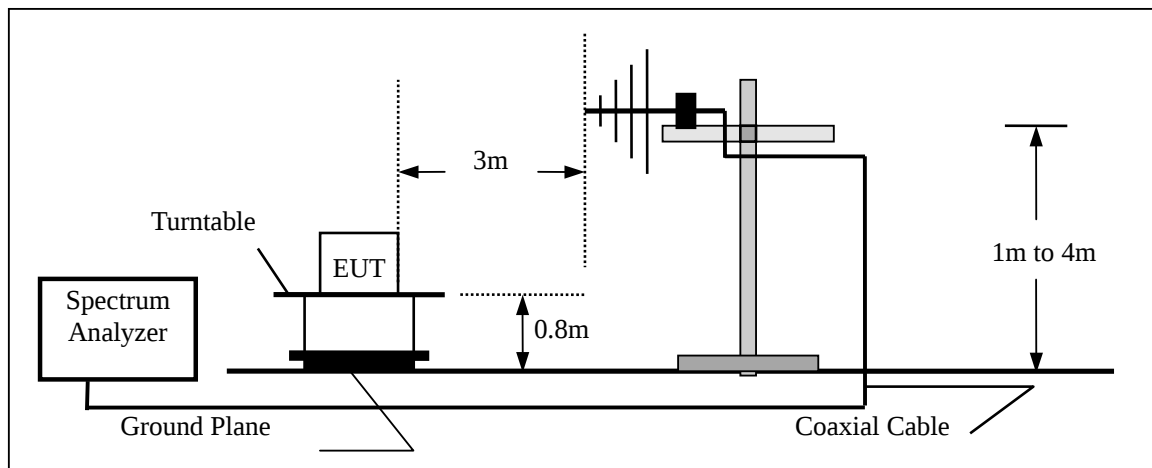

## Radiation below 1GHz

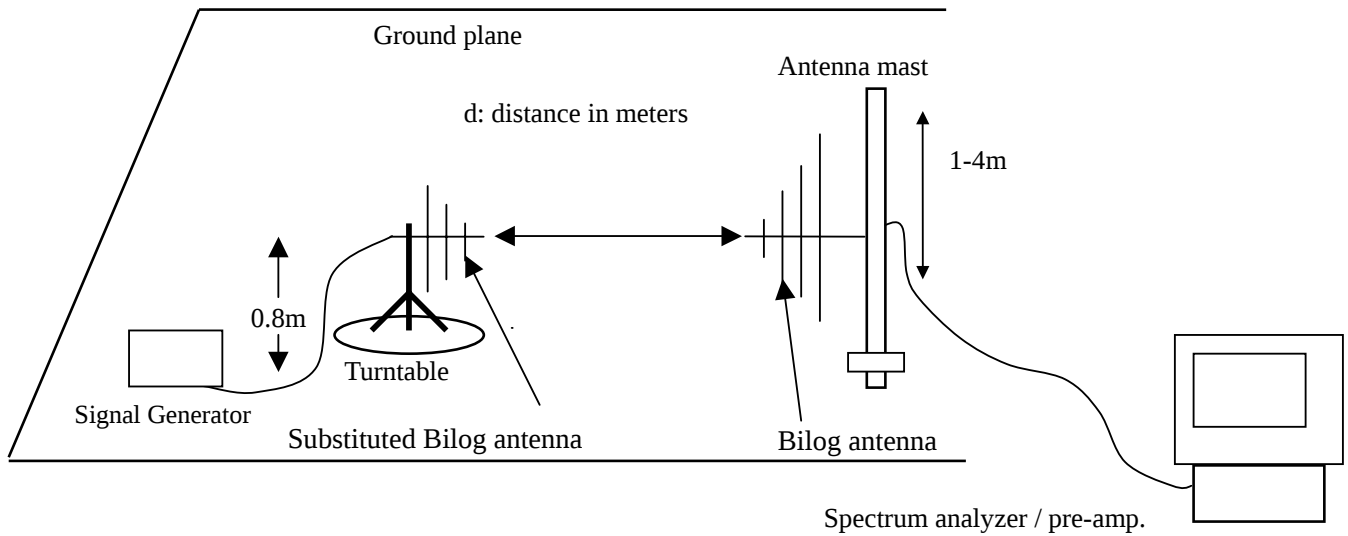

## Radiation above 1GHz

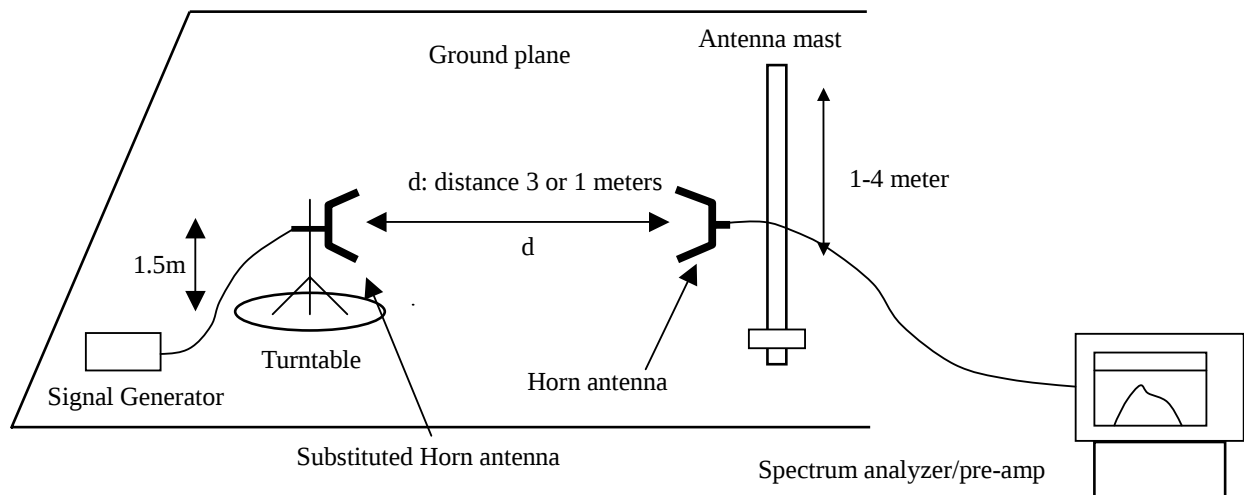

## 9.4 MEASUREMENT EQUIPMENT USED:

| Open Area Test Site |                |           |            |            |            |
|---------------------|----------------|-----------|------------|------------|------------|
| EQUIPMENT TYPE      | MFR            | MODEL NO. | SERIAL NO. | LAST CAL.  | CAL DUE.   |
| Spectrum Analyzer   | ADVANTEST      | R3132     | N/A        | 06/07/2005 | 06/06/2006 |
| EMI Test Receiver   | HP             | 8546A     | 3448A00232 | 06/07/2005 | 06/06/2006 |
| Pre-Amplifier       | HP             | 8447D     | 2944A07999 | 06/07/2005 | 06/06/2006 |
| Bi-Log Antenna      | EMCO           | 3142      | 9910-1436  | 06/07/2005 | 06/06/2006 |
| Bi-Log Antenna      | SCHAFFNER      | CBL6143   | 5082       | 06/07/2005 | 06/06/2006 |
| CABLE               | TIME MICROWAVE | LMR-400   | N-TYPE04   | 06/07/2005 | 06/06/2006 |
| Horn Antenna        | ARA            | DRG-118/A | 104        | 06/07/2005 | 06/06/2006 |

**9.5 MEASUREMENT RESULTS:**

Calculation: Limit (dBm)= EL-43-10log<sub>10</sub> (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,, in this application, the EL is -17.01 dBm.



Limit (dBm)= -17.01-43-10log<sub>10</sub> (0.0000199) = -13


**Top channel & Middle channel & Bottom channel**

| Frequency (MHz) | Reading level (dBm) | Antenna Polarization | S.G. (dBm) | Cable loss (dB) | Ant.Gain (dB) | Emission level (dBm) | Limit (dBm) | Margin (dB)                     |
|-----------------|---------------------|----------------------|------------|-----------------|---------------|----------------------|-------------|---------------------------------|
| 30 MHz to 1 GHz | *                   | H/V                  |            |                 |               |                      | -13         | At least 20 dB down than limits |
| 1 GHz to 9 GHz  | *                   | H/V                  |            |                 |               |                      | -13         |                                 |

Notes: \* means the output power of all the spurious frequency is at least 20dB down to the limit.

## 9.6 RADIATION EMISSION MASK:

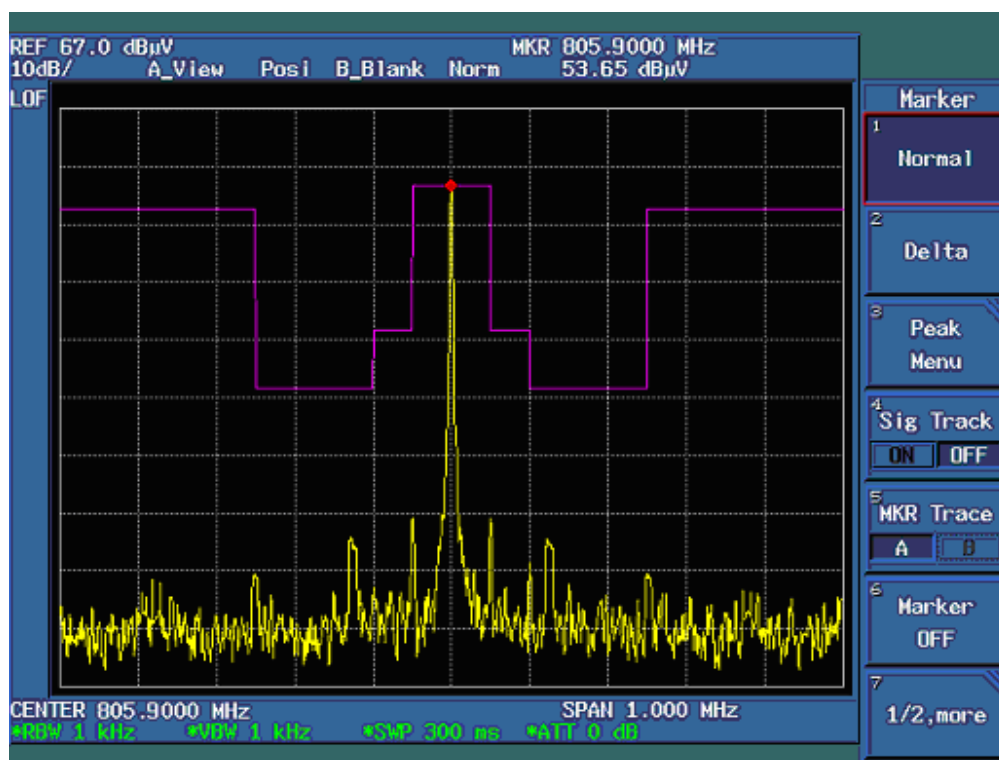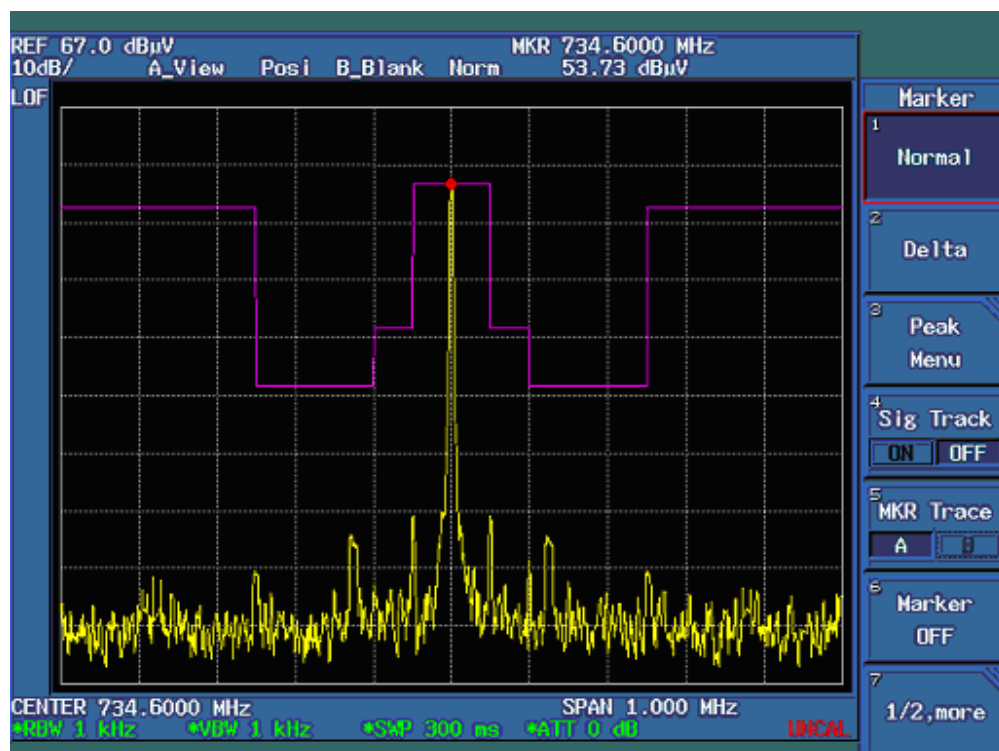Top channel - 805.9 MHzMiddle channel – 734.6 MHz

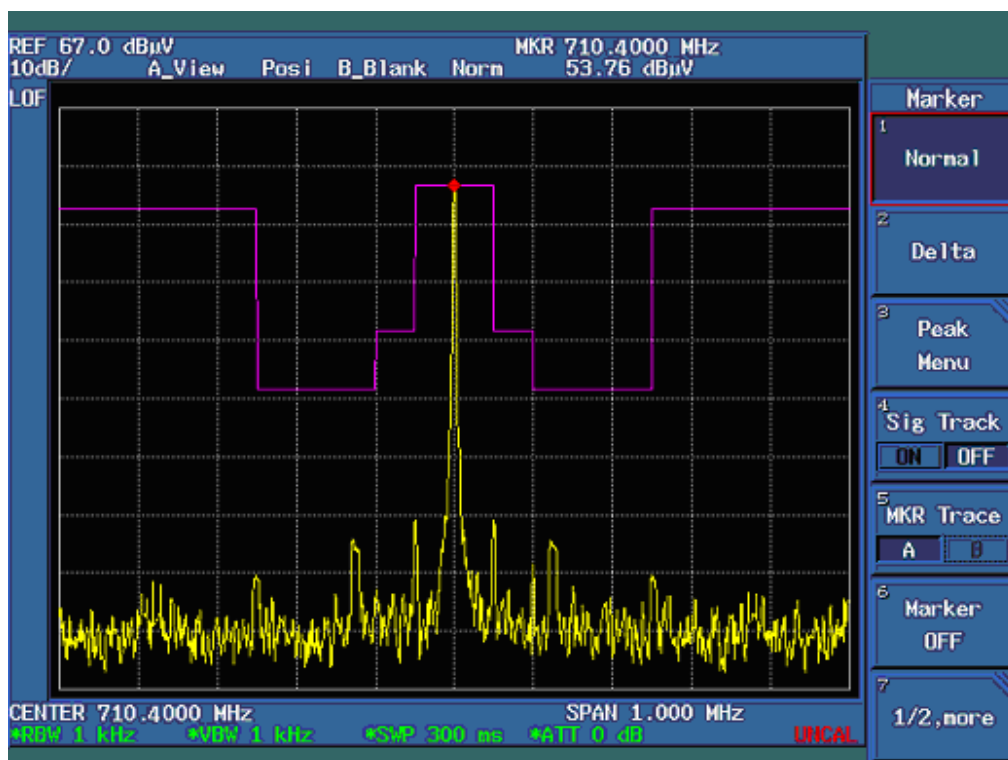**Bottom channel – 710.4 MHz**

## **APPENDIX 1**

### **PHOTOGRAPHS OF SET UP**

### Radiated Emission Setup Photo



## **APPENDIX 2**

### **PHOTOGRAPHS OF EUT**

***Top View of EUT***



***Bottom View of EUT***



***Side View of EUT***




***Front View of EUT***



***Back View of EUT***



***Inside View of EUT-1***

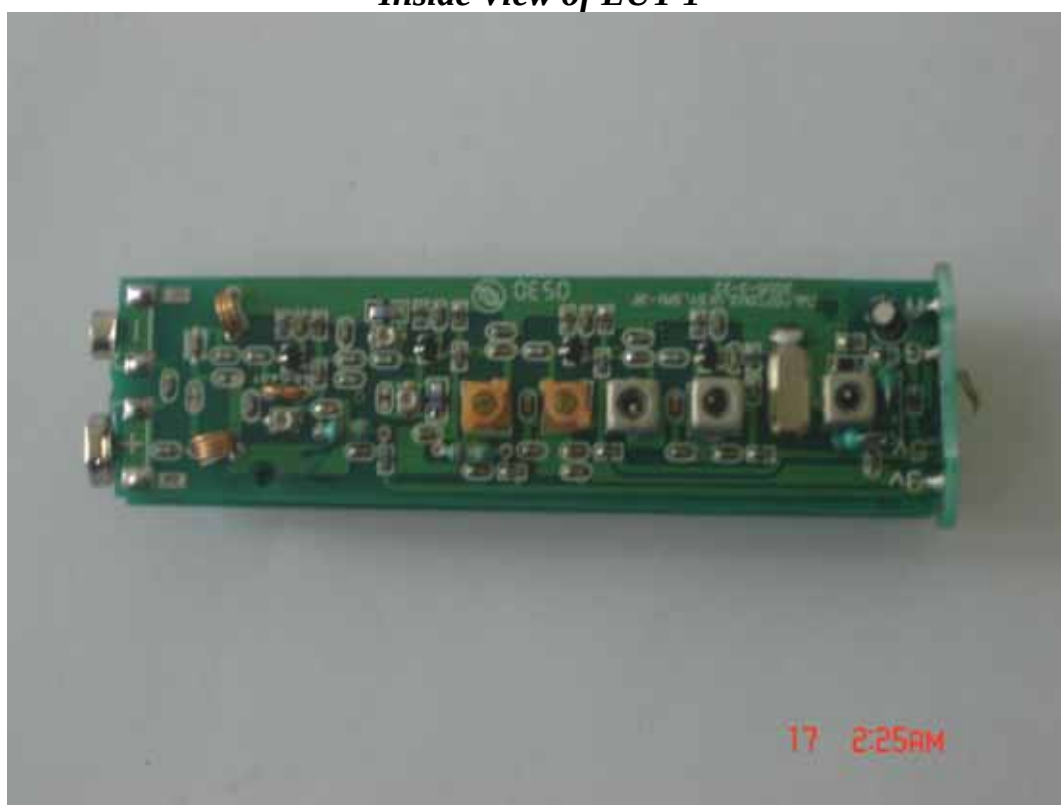

***Inside View of EUT-2***

