

# TEST REPORT

**Test Report Reference: R62162\_A Edition 1**

**Equipment under Test: cB-0907-01**

**Serial Number: none**

**FCC ID: PVH090701S**

**Applicant: connectBlue AB**

**Test Laboratory  
(CAB)  
accredited by  
DATech GmbH  
in compliance with DIN EN ISO/IEC 17025  
under the  
Reg. No. DAT-P-105/99-21  
and  
FCC Test site registration number 90877**

TEST REPORT REFERENCE: R62162\_A Edition 1

| <b>Contents:</b>                                                        | <b>Page</b> |
|-------------------------------------------------------------------------|-------------|
| 1 IDENTIFICATION .....                                                  | 3           |
| 1.1 APPLICANT .....                                                     | 3           |
| 1.2 MANUFACTURER .....                                                  | 3           |
| 1.3 DATES .....                                                         | 3           |
| 1.4 TEST LABORATORY .....                                               | 4           |
| 1.5 RESERVATION .....                                                   | 4           |
| 1.6 NORMATIVE REFERENCES .....                                          | 4           |
| 1.7 TEST RESULTS .....                                                  | 4           |
| 2 TECHNICAL DATA OF EQUIPMENT .....                                     | 5           |
| 2.1 DEVICE UNDER TEST .....                                             | 5           |
| 2.2 PERIPHERY DEVICES .....                                             | 6           |
| 3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES .....                      | 6           |
| 4 LIST OF MEASUREMENTS .....                                            | 7           |
| 5 TEST RESULTS .....                                                    | 8           |
| 5.1 20 dB BANDWIDTH .....                                               | 8           |
| 5.1.1 METHOD OF MEASUREMENT (20 dB BANDWIDTH) .....                     | 8           |
| 5.1.2 TEST RESULTS (20 dB BANDWIDTH) .....                              | 9           |
| 5.2 CARRIER FREQUENCY SEPARATION .....                                  | 12          |
| 5.2.1 METHOD OF MEASUREMENT (CARRIER FREQUENCY SEPARATION) .....        | 12          |
| 5.2.2 TEST RESULTS (CARRIER FREQUENCY SEPARATION) .....                 | 13          |
| 5.3 NUMBER OF HOPPING FREQUENCIES .....                                 | 15          |
| 5.3.1 METHOD OF MEASUREMENT (NUMBER OF HOPPING FREQUENCIES) .....       | 15          |
| 5.3.2 TEST RESULTS (NUMBER OF HOPPING FREQUENCIES) .....                | 16          |
| 5.4 DWELL TIME .....                                                    | 17          |
| 5.4.1 METHOD OF MEASUREMENT (DWELL TIME) .....                          | 17          |
| 5.4.2 TEST RESULTS (DWELL TIME) .....                                   | 18          |
| 5.5 MAXIMUM PEAK OUTPUT POWER .....                                     | 24          |
| 5.5.1 METHOD OF MEASUREMENT (MAXIMUM PEAK OUTPUT POWER) .....           | 24          |
| 5.5.2 TEST RESULTS (MAXIMUM PEAK OUTPUT POWER) .....                    | 25          |
| 5.6 BAND-EDGE COMPLIANCE .....                                          | 28          |
| 5.6.1 METHOD OF MEASUREMENT (BAND-EDGE COMPLIANCE) .....                | 28          |
| 5.6.2 TEST RESULT (BAND-EDGE COMPLIANCE) .....                          | 29          |
| 5.7 CONDUCTED EMISSIONS (TRANSMITTER) .....                             | 32          |
| 5.7.1 METHOD OF MEASUREMENT (CONDUCTED EMISSIONS) .....                 | 32          |
| 5.7.2 TEST RESULTS (CONDUCTED EMISSIONS) .....                          | 33          |
| 5.8 RADIATED EMISSIONS (TRANSMITTER) .....                              | 38          |
| 5.8.1 METHOD OF MEASUREMENT (RADIATED EMISSIONS) .....                  | 38          |
| 5.8.2 TEST RESULTS (RADIATED EMISSIONS) .....                           | 45          |
| 5.8.2.1 PRELIMINARY MEASUREMENT (9 kHz to 25 GHz) .....                 | 45          |
| 5.8.2.2 FINAL MEASUREMENT (1 GHz to 25 GHz) .....                       | 54          |
| 5.9 CONDUCTED EMISSIONS ON POWER SUPPLY LINES (150 kHz to 30 MHz) ..... | 57          |
| 5.9.1 METHOD OF MEASUREMENT .....                                       | 57          |
| 5.9.2 TEST RESULTS (CONDUCTED EMISSIONS ON POWER SUPPLY LINES) .....    | 58          |
| 6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS .....                   | 60          |
| 7 LIST OF ANNEXES .....                                                 | 64          |

TEST REPORT REFERENCE: R62162\_A Edition 1

---

## 1 IDENTIFICATION

### 1.1 APPLICANT

|                            |                               |
|----------------------------|-------------------------------|
| Name:                      | connectBlue AB                |
| Address:                   | Norra Vallgatan 64 3V         |
|                            | Malmö SE-211 19               |
| Country:                   | Sweden                        |
| Name for contact purposes: | Mr. Martin Engdahl            |
| Tel:                       | + 46 40 63 07 100             |
| Fax:                       | + 46 40 23 71 37              |
| e-mail address:            | martin.engdahl@connectblue.se |

### 1.2 MANUFACTURER

|                            |                               |
|----------------------------|-------------------------------|
| Name:                      | connectBlue AB                |
| Address:                   | Norra Vallgatan 64 3V         |
|                            | Malmö SE-211 19               |
| Country:                   | Sweden                        |
| Name for contact purposes: | Mr. Martin Engdahl            |
| Tel:                       | + 46 40 63 07 100             |
| Fax:                       | + 46 40 23 71 37              |
| e-mail address:            | martin.engdahl@connectblue.se |

### 1.3 DATES

|                                 |                  |
|---------------------------------|------------------|
| Date of receipt of test sample: | 07 November 2006 |
| Start of test:                  | 07 November 2006 |
| End of test:                    | 13 November 2006 |

TEST REPORT REFERENCE: R62162\_A Edition 1


---

## 1.4 TEST LABORATORY

The tests were carried out at: **PHOENIX TESTLAB GmbH**  
**Königswinkel 10**  
**D-32825 Blomberg**      **Phone: +49 (0) 52 35 / 95 00-0**  
**Germany**      **Fax: +49 (0) 52 35 / 95 00-10**


accredited by DATech GmbH in compliance with DIN EN ISO/IEC 17025 under Reg. No. DAT-P-105/99-21 and FCC Test site registration number 90877.

Test engineer: Thomas KÜHN  
Name

  
Signature

20 November 2006  
Date

Test report checked: Bernd STEINER  
Name

  
Signature

20 November 2006  
Date

**PHOENIX TESTLAB GmbH**  
**Königswinkel 10**  
**32825 Blomberg**  
**Tel. 0 52 35 / 95 00-0**  
**Fax 0 52 35 / 95 00-10**

Stamp

## 1.5 RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT REFERENCE.

## 1.6 NORMATIVE REFERENCES

- [1] **ANSI C63.4-2003** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC CFR 47 Part 15 (February 2006)** Radio Frequency Devices
- [3] **FCC Public Notice DA 00-705 (March 2000)**

## 1.7 TEST RESULTS

The requirements of this test document are fulfilled by the equipment under test. The complete test results are presented in the following.

TEST REPORT REFERENCE: R62162\_A Edition 1

## 2 TECHNICAL DATA OF EQUIPMENT

### 2.1 DEVICE UNDER TEST

|                                |                                                                    |          |             |            |             |            |
|--------------------------------|--------------------------------------------------------------------|----------|-------------|------------|-------------|------------|
| Type:                          | cB-0907-01                                                         |          |             |            |             |            |
| Type of equipment: *           | Bluetooth module                                                   |          |             |            |             |            |
| FCC ID: *                      | PVH090701S                                                         |          |             |            |             |            |
| Rated RF output power: *       | 5 dBm (50 $\Omega$ )                                               |          |             |            |             |            |
| Antenna type: *                | Fractus FR05-S1-N-0-104                                            |          |             |            |             |            |
| Antenna gain: *                | 0 dBi                                                              |          |             |            |             |            |
| Antenna connector: *           | None, an temporary UFL connector is mounted for test purposes only |          |             |            |             |            |
| Channel spacing: *             | 1 MHz                                                              |          |             |            |             |            |
| Alignment range: *             | 2402 MHz to 2480 MHz                                               |          |             |            |             |            |
| Number of channels: *          | 79                                                                 |          |             |            |             |            |
| Modulation: *                  | FHSS (GFSK)                                                        |          |             |            |             |            |
| Supply Voltage: *              | $U_{nom}$ =                                                        | 5.0 V DC | $U_{min}$ = | 3.0 V DC * | $U_{max}$ = | 6.0 V DC * |
| Temperature range: *           | -30 °C to + 85 °C                                                  |          |             |            |             |            |
| Lowest internal frequency: *   | App. 16 kHz                                                        |          |             |            |             |            |
| Highest internal frequency: *  | 2.480 GHz                                                          |          |             |            |             |            |
| Ancillaries to be tested with: | -                                                                  |          |             |            |             |            |

\* declared by the applicant.

Bluetooth operates in the unlicensed ISM band at 2.4 GHz. In North America (USA and Canada) a band with a width of 83.5 MHz is available. In this band 79 RF channels spaced 1 MHz apart are defined. The channel is represented by a pseudo random hopping sequence through the 79 channels. The normally occupancy time of one frequency will be 625  $\mu$ s. The ordinary hopping rate will be 1600 hops/s. All frequencies will be used equally.

For the compliance with further requirements for a Bluetooth device, please refer the "Additional declaration part according to FCC 15.247 for Bluetooth devices", which will be attached to this test report.

**The following external I/O cables were used:**

| Identification | Connector            |                  | Lenght |
|----------------|----------------------|------------------|--------|
|                | EUT                  | Ancillary        |        |
| DC in          | Customised connector | 6.3 mm jack plug | 2 m *  |
| -              | -                    | -                | -      |

\*: Length during the test if no other specified.

TEST REPORT REFERENCE: R62162\_A Edition 1

---

## 2.2 PERIPHERY DEVICES

The following equipment was used as control unit and ancillary equipment:

- The Bluetooth module was connected to a carrier board (cB-0903-03), which was delivered by the applicant. The carrier board was supplied via an external power supply with 5.0 V DC.
- A personal computer with a terminal-software was used, connected temporary to the carrier board, for setting the equipment into the necessary operation mode. During the measurement procedures the personal computer was disconnected.

## 3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES

The EUT is intended to be used in several bluetooth applications. Because the cB-0907-01 is a module, which will be implemented in a final application, it was mounted on a carrier board to change the operation modes of the EUT from a Laptop with a test software. The tests were carried out with an unmodified sample with integral antenna (sample marked with "4") and another sample equipped with a temporary antenna connector (sample marked with "5").

During the tests the test sample was powered by an external power supply via the carrier board with 5.0 V DC. The emission measurement on AC mains was carried out by using a mascot power supply type 2121.

If not otherwise stated, for modulating the transmitter, a pseudo random bit sequence with a length of 27 byte and with a pattern type DH5 was used.


For selecting an operation mode, a personal computer with software delivered by the applicant was connected to the carrier board. After adjusting the operating mode, the personal computer was removed. To do this the test-engineer was instructed by the applicant.

During the tests, the EUT was not labelled with a FCC-label.

The following operation modes were used during the tests:

| Operation mode | Description of the operation mode   |
|----------------|-------------------------------------|
| 1              | Continuous transmitting on 2402 MHz |
| 2              | Continuous transmitting on 2441 MHz |
| 3              | Continuous transmitting on 2480 MHz |
| 4              | Inquiry                             |
| 5              | Paging                              |
| 6              | Transmitter hopping on all channels |
| 7              | Continuous receiving on 2441 MHz    |

TEST REPORT REFERENCE: R62162\_A Edition 1

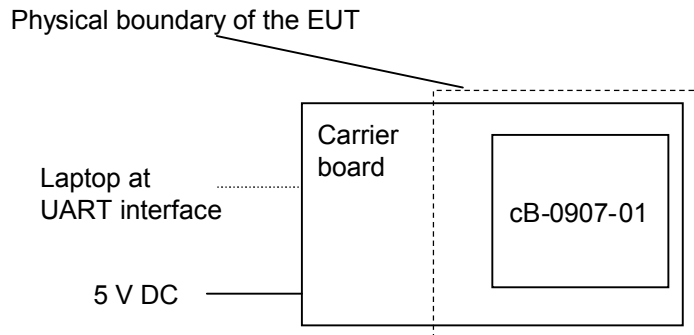

## 4 LIST OF MEASUREMENTS

| Application                        | Frequency range [MHz] | FCC 47 CFR Part 15 section | Status | Refer page |
|------------------------------------|-----------------------|----------------------------|--------|------------|
| 20 dB bandwidth                    | General               | 15.247 (a) (1)             | Passed | 8 et seq.  |
| Carrier frequency separation       | General               | 15.247 (a) (1)             | Passed | 12 et seq. |
| Number of hopping channels         | 2400.0 - 2483.5       | 15.247 (a) (1) (iii)       | Passed | 15 et seq. |
| Dwell time                         | 2400.0 - 2483.5       | 15.247 (a) (1) (iii)       | Passed | 17 et seq. |
| Maximum peak output power          | 2400.0 - 2483.5       | 15.247 (b) (1)             | Passed | 24 et seq. |
| Band edge compliance               | 2400.0 - 2483.5       | 15.247 (d)                 | Passed | 28 et seq. |
| Conducted emissions (transmitter)  | 0.009 - 25,000        | 15.247 (d)                 | Passed | 32 et seq. |
| Radiated emissions (transmitter)   | 0.009 - 25,000        | 15.205 (a)<br>15.209 (a)   | Passed | 38 et seq. |
| Conducted emissions on supply line | 0.15 – 30             | 15.207 (a)                 | Passed | 57 et seq. |

TEST REPORT REFERENCE: R62162\_A Edition 1

---

## 5 TEST RESULTS

### 5.1 20 dB BANDWIDTH

#### 5.1.1 METHOD OF MEASUREMENT (20 dB BANDWIDTH)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disabled, the transmitter shall work with its maximum data rate.

The following spectrum analyser settings shall be used:

- Span: App. 2 to 3 times the 20 dB bandwidth, centred on the actual hopping channel.
- Resolution bandwidth:  $\geq 1\%$  of the 20 dB bandwidth.
- Video bandwidth:  $\geq$  the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency lines shall be set on the intersection points between the second display line and the measured curve.

The measurement will be performed at the upper, the lower end and the middle of the assigned frequency band.

Test set-up:




TEST REPORT REFERENCE: R62162\_A Edition 1


## 5.1.2 TEST RESULTS (20 dB BANDWIDTH)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 21 °C | Relative humidity | 40 % |
|---------------------|-------|-------------------|------|

62162\_26.wmf: (20 dB bandwidth at the lower end of the assigned frequency band):

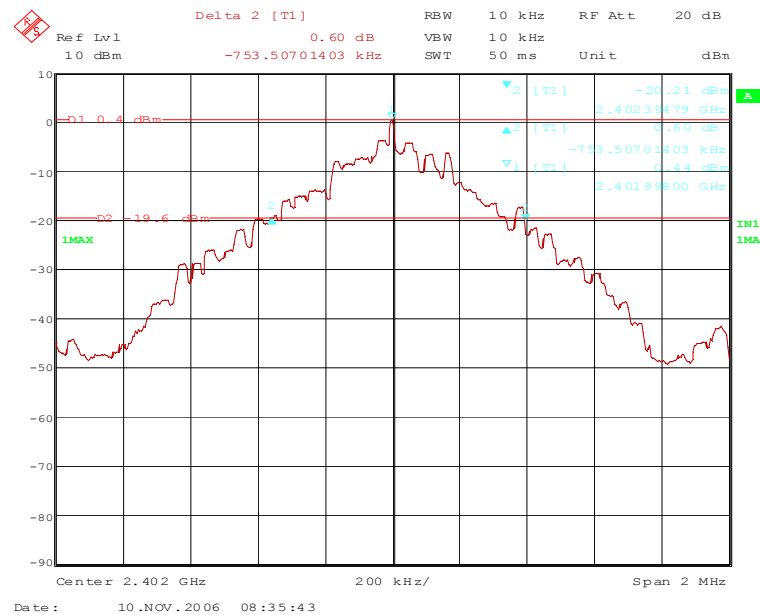


62162\_27.wmf: (20 dB bandwidth at the middle of the assigned frequency band):

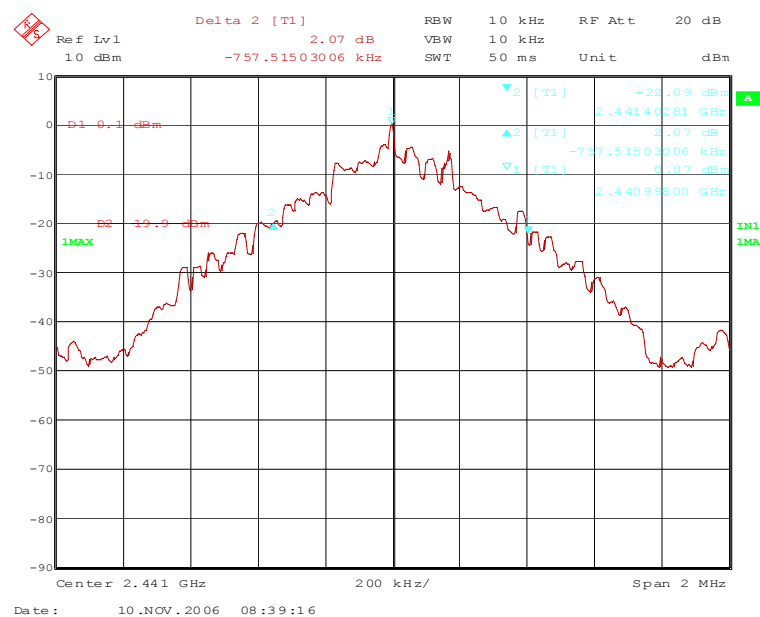


TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_28.wmf: (20 dB bandwidth at the upper end of the assigned frequency band):

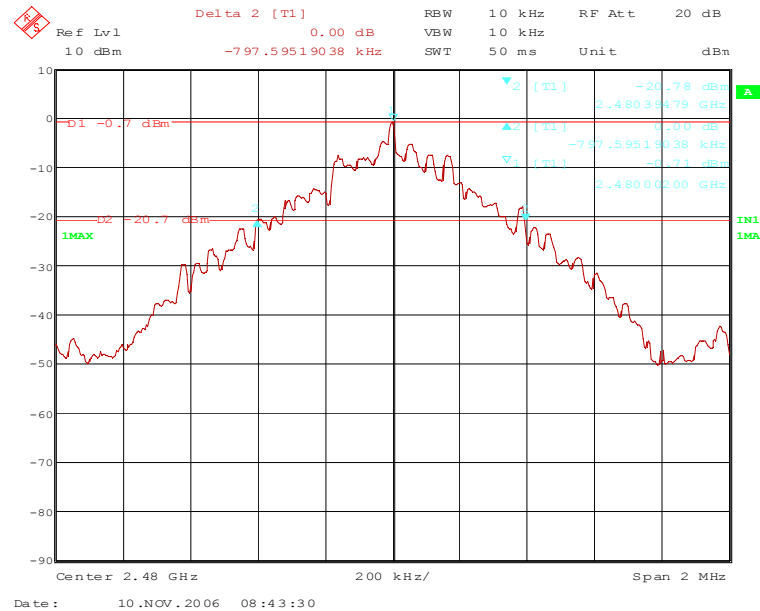


62162\_29.wmf: (20 dB bandwidth with inquiry mode):

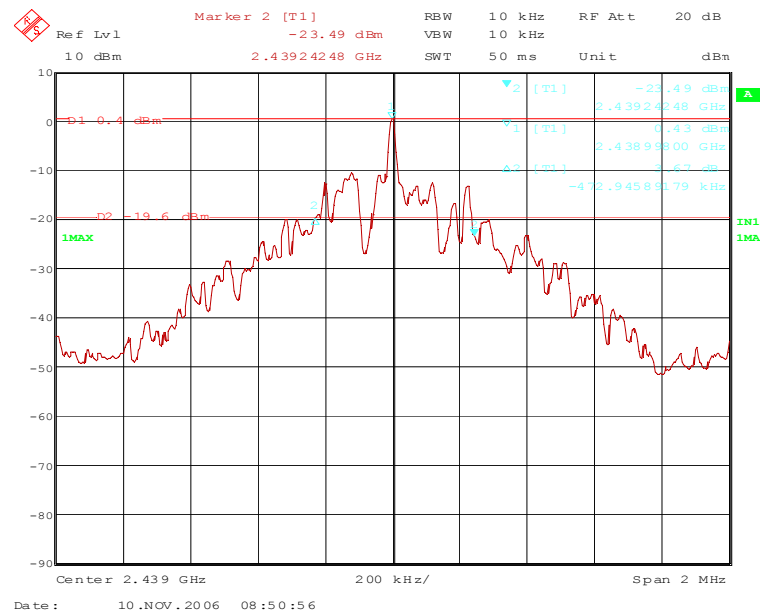

TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_30.wmf: (20 dB bandwidth with paging mode):

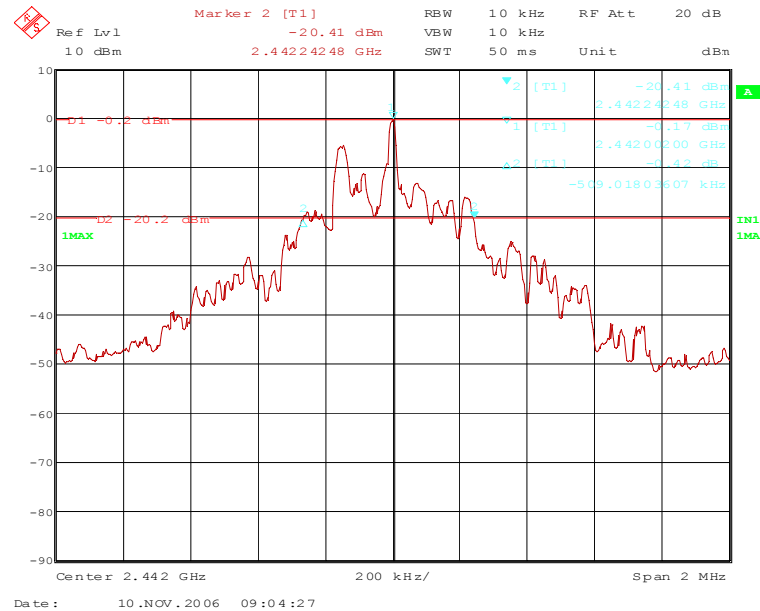

| Channel number    | Channel frequency [MHz] | 20 dB bandwidth [kHz] |
|-------------------|-------------------------|-----------------------|
| 0                 | 2402                    | 753.507               |
| 39                | 2441                    | 757.515               |
| 78                | 2480                    | 797.595               |
| 37 (inquiry mode) | 2439                    | 472.946               |
| 40 (paging mode)  | 2442                    | 509.018               |

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R62162\_A Edition 1

---

## 5.2 CARRIER FREQUENCY SEPARATION

### 5.2.1 METHOD OF MEASUREMENT (CARRIER FREQUENCY SEPARATION)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.


The following spectrum analyser settings shall be used:

- Span: Wide enough to capture the peaks of two adjacent channels.
- Resolution bandwidth:  $\geq 1\%$  of the span.
- Video bandwidth:  $\geq$  the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker and the delta marker function will be used to determine the separation between the peaks of two adjacent channel signals.

The measurement will be performed at the upper, the lower end and the middle of the assigned frequency band.

Test set-up:

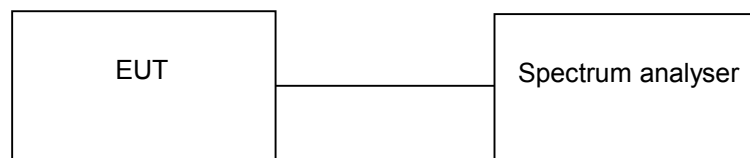


TEST REPORT REFERENCE: R62162\_A Edition 1


## 5.2.2 TEST RESULTS (CARRIER FREQUENCY SEPARATION)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 21 °C | Relative humidity | 40 % |
|---------------------|-------|-------------------|------|

62162\_31.wmf: (channel separation at the lower end of the assigned frequency band):

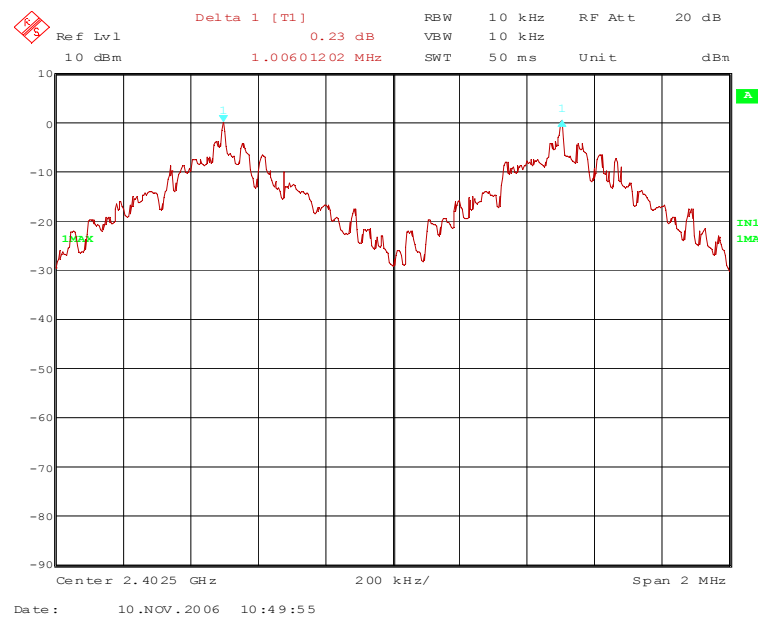


62162\_32.wmf: (channel separation at the middle of the assigned frequency band):

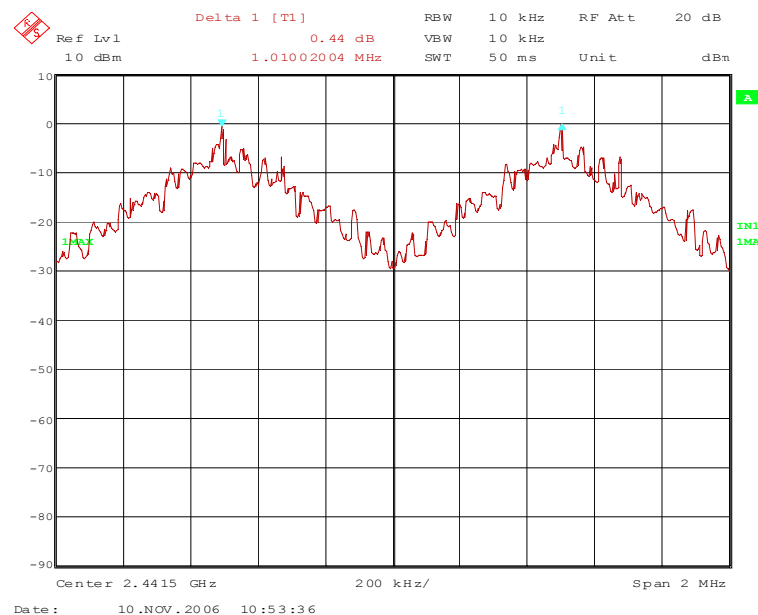

TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_33.wmf: (channel separation at the upper end of the assigned frequency band):

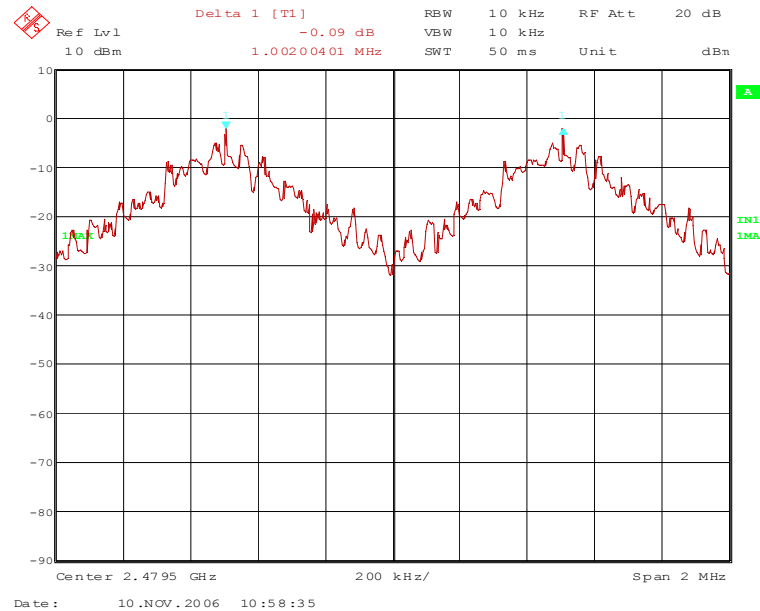

| Channel number | Channel frequency [MHz] | Channel separation [kHz] | Minimum limit [kHz]       |
|----------------|-------------------------|--------------------------|---------------------------|
| 0              | 2402                    | 1006.012                 | 753.507 (20 dB bandwidth) |
| 39             | 2441                    | 1010.020                 | 757.515 (20 dB bandwidth) |
| 78             | 2480                    | 1002.004                 | 797.595 (20 dB bandwidth) |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R62162\_A Edition 1

---

## 5.3 NUMBER OF HOPPING FREQUENCIES

### 5.3.1 METHOD OF MEASUREMENT (NUMBER OF HOPPING FREQUENCIES)


The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings shall be used:

- Span: Equal to the assigned frequency band.
- Resolution bandwidth:  $\geq 1$  % of the span.
- Video bandwidth:  $\geq$  the resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the number of hopping channels could be counted. It might be possible to divide the span into some sub ranges in order to clearly show all hopping frequencies.

Test set-up:

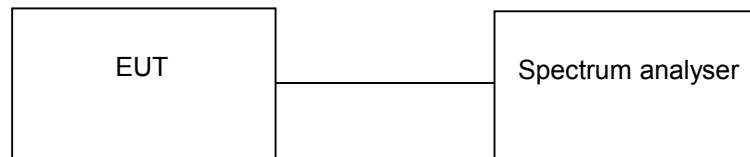


TEST REPORT REFERENCE: R62162\_A Edition 1

### 5.3.2 TEST RESULTS (NUMBER OF HOPPING FREQUENCIES)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 21 °C | Relative humidity | 40 % |
|---------------------|-------|-------------------|------|

62162\_34.wmf (number of hopping channels):

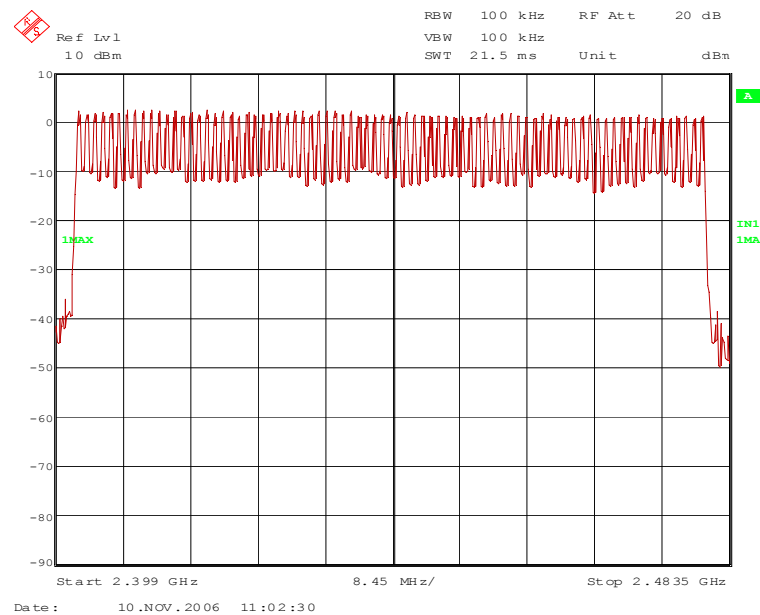

| Number of hopping channels | Limit       |
|----------------------------|-------------|
| 79                         | At least 15 |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

|            |
|------------|
| 31, 46, 54 |
|------------|

TEST REPORT REFERENCE: R62162\_A Edition 1

---

## 5.4 DWELL TIME

### 5.4.1 METHOD OF MEASUREMENT (DWELL TIME)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings shall be used:

- Span: Zero, centred on a hopping channel.
- Resolution bandwidth: 1 MHz.
- Video bandwidth:  $\geq$  the resolution bandwidth.
- Sweep: As necessary to capture the entire dwell time per hopping channel.
- Detector function: peak.
- Trace mode: Max hold.

The marker and delta marker function of the spectrum analyser will be used to determine the dwell time.

The measurement will be performed at the upper and lower end and the middle of the assigned frequency band.

If the EUT is possible to operate with different mode of operation (data rates, modulation formats etc.) the test will be repeated with every different operation mode of the EUT.

Test set-up:




TEST REPORT REFERENCE: R62162\_A Edition 1


## 5.4.2 TEST RESULTS (DWEELL TIME)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 21 °C | Relative humidity | 40 % |
|---------------------|-------|-------------------|------|

62162\_35.wmf: (Dwell time at the lower end of the assigned frequency band), hopping mode DH1:

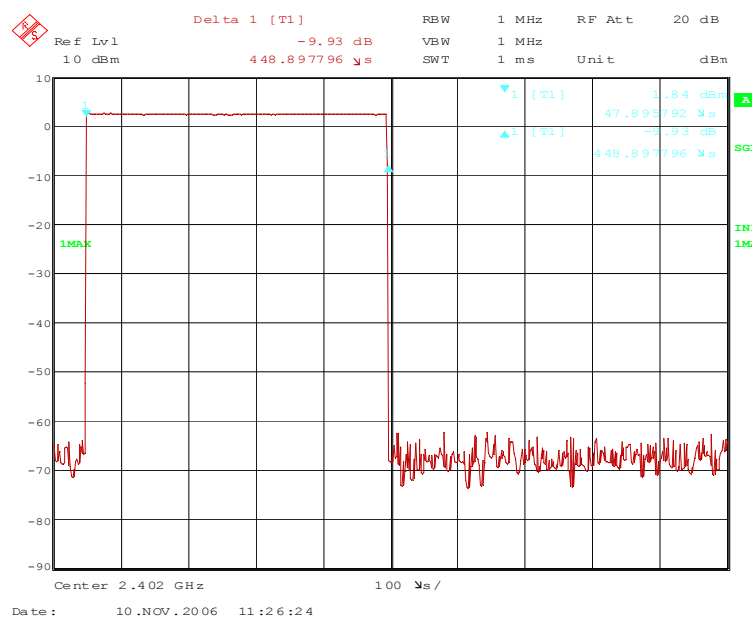


62162\_36.wmf: Dwell time at the middle of the assigned frequency band), hopping mode DH1:

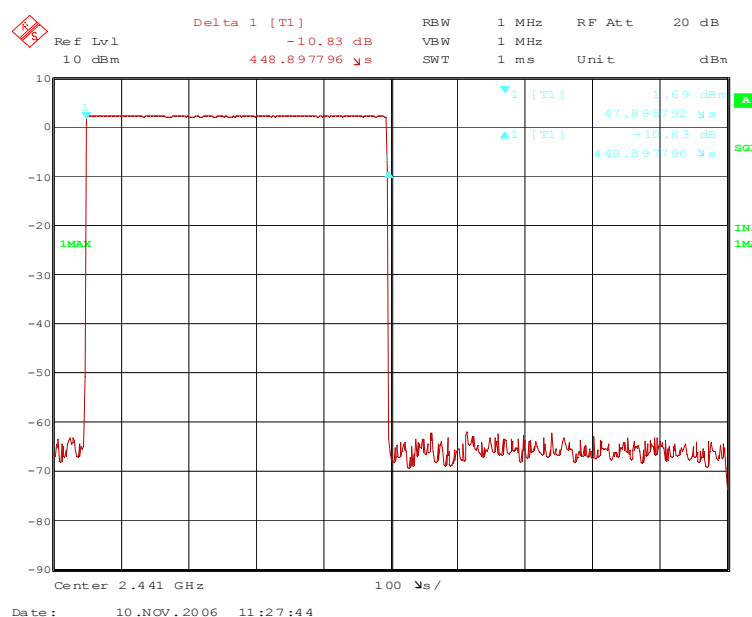


TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_37.wmf: (Dwell time at the upper end of the assigned frequency band), hopping mode DH1:

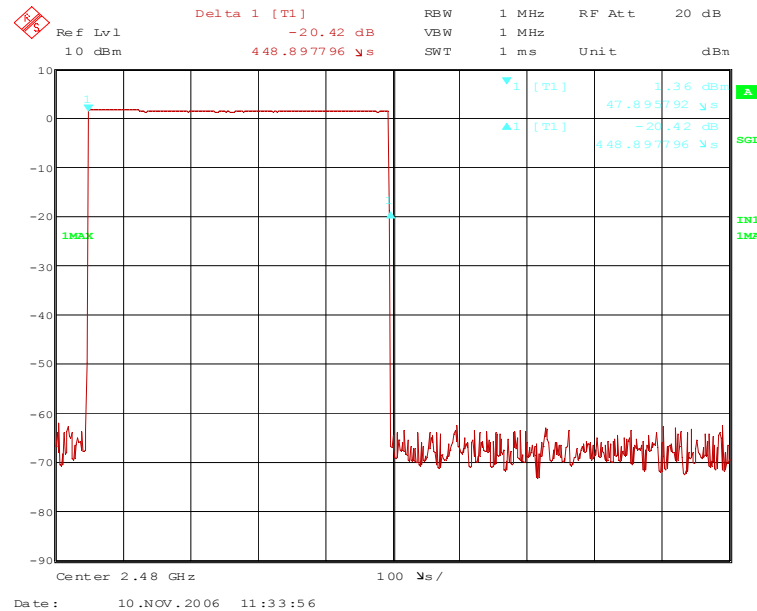


62162\_40.wmf: (Dwell time at the lower end of the assigned frequency band), hopping mode DH3:

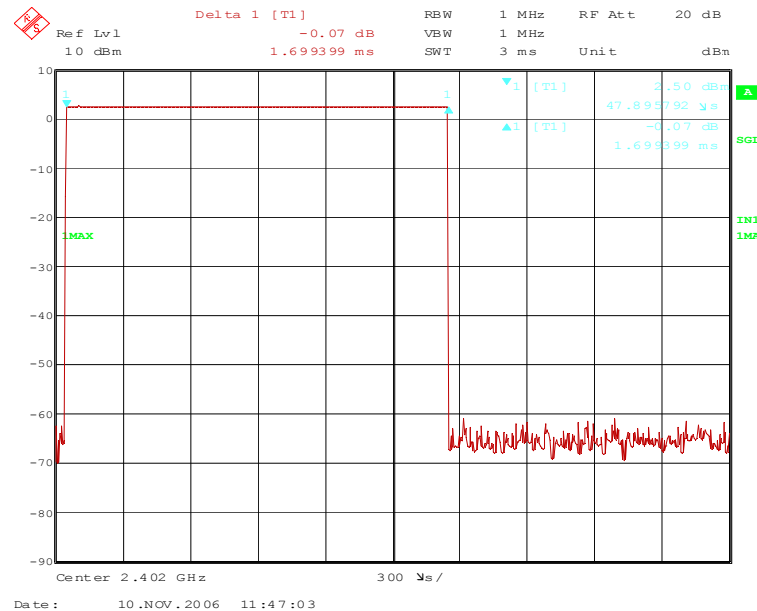


TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_39.wmf: Dwell time at the middle of the assigned frequency band), hopping mode DH3:

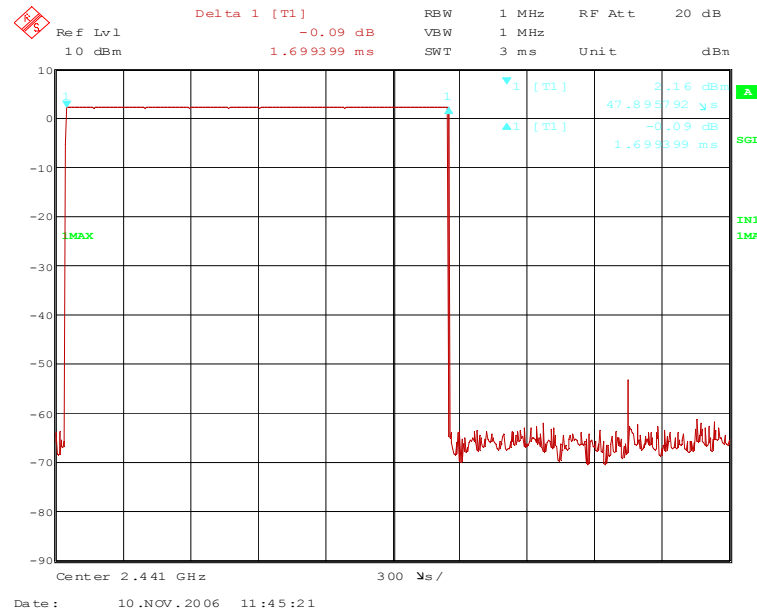


62162\_38.wmf: (Dwell time at the upper end of the assigned frequency band), hopping mode DH3:

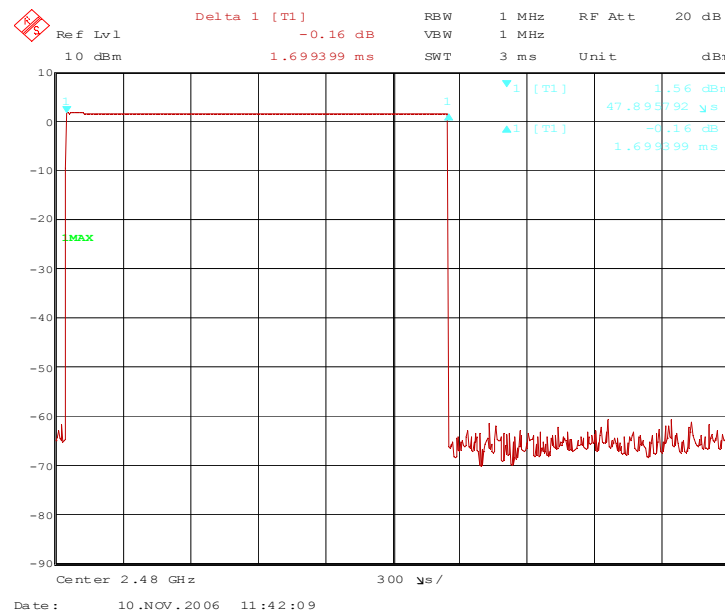


TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_41.wmf: (Dwell time at the lower end of the assigned frequency band), hopping mode DH5:

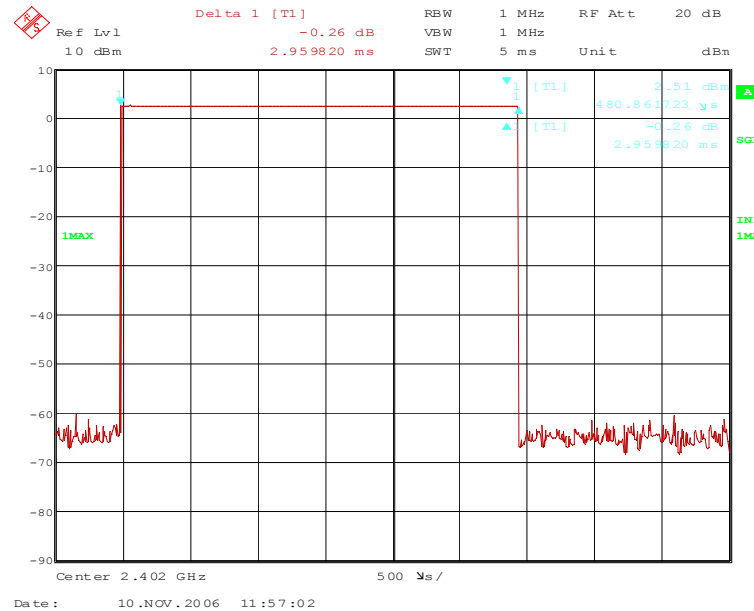


62162\_42.wmf: Dwell time at the middle of the assigned frequency band), hopping mode DH5:

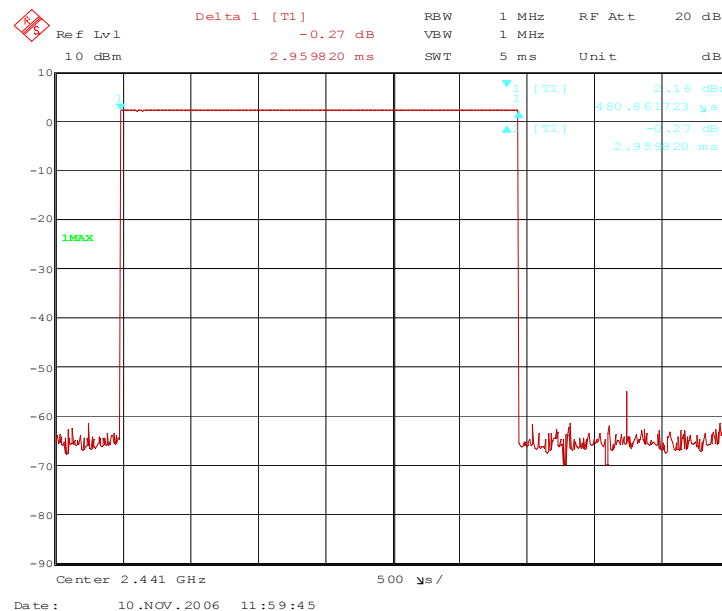

TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_43.wmf: (Dwell time at the upper end of the assigned frequency band), hopping mode DH5:

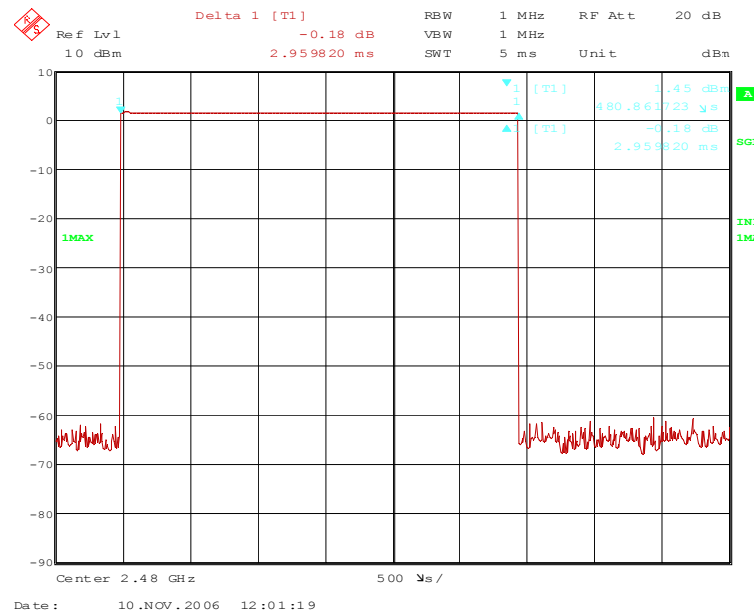

The dwell time is calculated with the following formula:

Dwell time =  $t_{\text{pulse}} \times n_{\text{hops}} / \text{number of hopping channels} \times 31.6$  (equal to 0.4 s x number of hopping channels)

Where:

$t_{\text{pulse}}$  is the measured pulse time (pls. refer the plots of the spectrum analyser above) [s],  
 $n_{\text{hops}}$  is the number of hops per second in the actual operating mode of the transmitter [1/s].

The hopping rate of the system is 1600 hops per second and the system uses 79 channels. For this reason one time slot has a length of 625  $\mu\text{s}$ .

With the used hopping mode (DH1) a packet need 1 timeslot for transmitting and the next timeslot for receiving. So the system makes in worst case 800 hops per second in transmit mode ( $n_{\text{hops}} = 800 \text{ 1/s}$ ).

With the used hopping mode (DH3) a packet need 3 timeslots for transmitting and the next timeslot for receiving. So the system makes in worst case 400 hops per second in transmit mode ( $n_{\text{hops}} = 400 \text{ 1/s}$ ).

With the used hopping mode (DH5) a packet need 5 timeslots for transmitting and the next timeslot for receiving. So the system makes in worst case 266.67 hops per second in transmit mode ( $n_{\text{hops}} = 266.667 \text{ 1/s}$ ).

TEST REPORT REFERENCE: R62162\_A Edition 1

| Hopping mode DH1 |                         |                                      |                 |            |
|------------------|-------------------------|--------------------------------------|-----------------|------------|
| Channel number   | Channel frequency [MHz] | $t_{\text{pulse}}$ [ $\mu\text{s}$ ] | Dwell time [ms] | Limit [ms] |
| 0                | 2402                    | 448.898                              | 143.647         | 400        |
| 39               | 2441                    | 448.898                              | 143.647         | 400        |
| 78               | 2480                    | 448.898                              | 143.647         | 400        |
| Hopping mode DH3 |                         |                                      |                 |            |
| Channel number   | Channel frequency [MHz] | $t_{\text{pulse}}$ [ms]              | Dwell time [ms] | Limit [ms] |
| 0                | 2402                    | 1.699                                | 271.840         | 400        |
| 39               | 2441                    | 1.699                                | 271.840         | 400        |
| 78               | 2480                    | 1.699                                | 271.840         | 400        |
| Hopping mode DH5 |                         |                                      |                 |            |
| Channel number   | Channel frequency [MHz] | $t_{\text{pulse}}$ [ms]              | Dwell time [ms] | Limit [ms] |
| 0                | 2402                    | 2.960                                | 315.733         | 400        |
| 39               | 2441                    | 2.960                                | 315.733         | 400        |
| 78               | 2480                    | 2.960                                | 315.733         | 400        |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R62162\_A Edition 1

---

## 5.5 MAXIMUM PEAK OUTPUT POWER

### 5.5.1 METHOD OF MEASUREMENT (MAXIMUM PEAK OUTPUT POWER)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disabled.


The following spectrum analyser settings shall be used:

- Span: Approx. 5 times the 20 dB bandwidth, centred on a hopping channel.
- Resolution bandwidth: > the 20 dB bandwidth of the emission being measured.
- Video bandwidth:  $\geq$  the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The indicated level is the peak output power, which has to be corrected with the value of the cable loss and an external attenuation (if necessary).

The measurement will be performed at the upper and lower end and the middle of the assigned frequency band.

Test set-up:

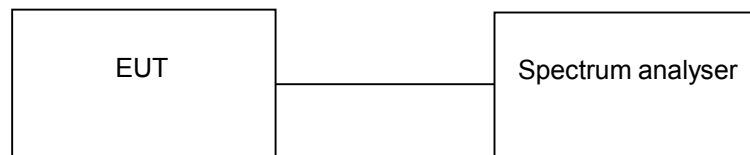


TEST REPORT REFERENCE: R62162\_A Edition 1


## 5.5.2 TEST RESULTS (MAXIMUM PEAK OUTPUT POWER)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 21 °C | Relative humidity | 40 % |
|---------------------|-------|-------------------|------|

62162\_44.wmf (maximum peak output power at the lower end of the assigned frequency band):

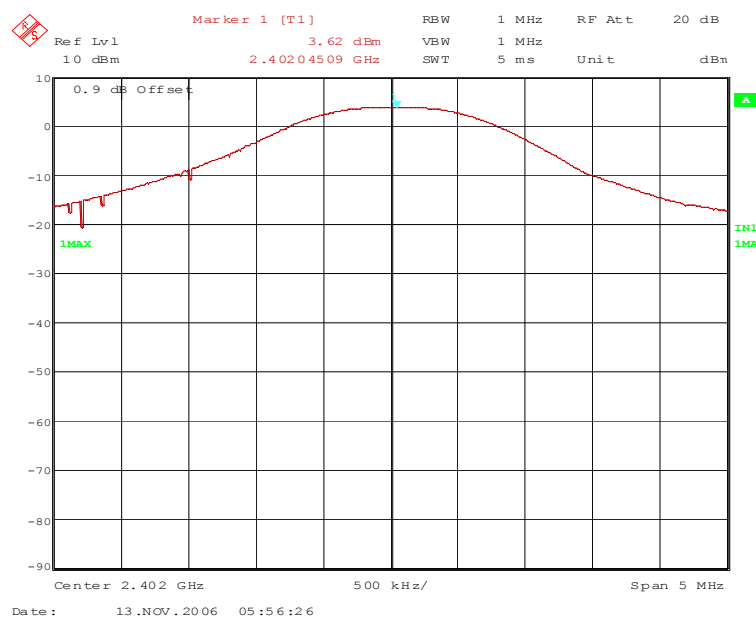


62162\_45.wmf (maximum peak output power at the middle of the assigned frequency band):

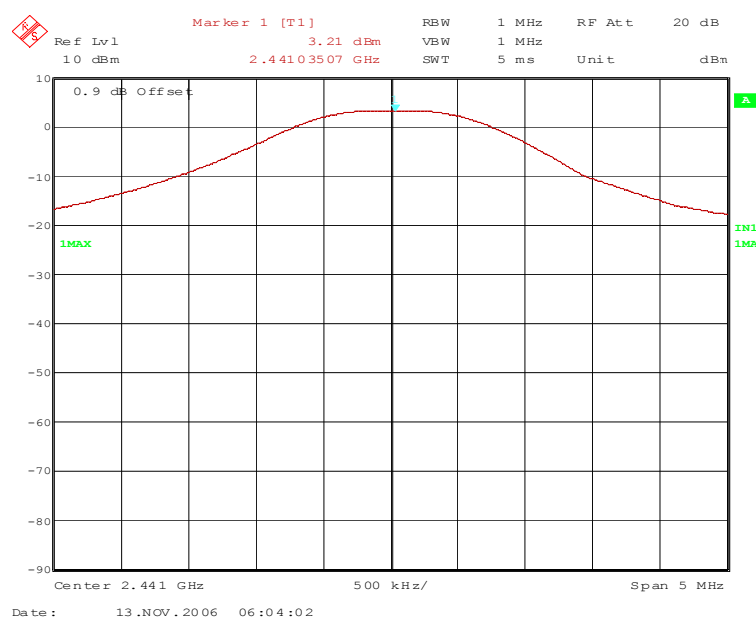


TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_46.wmf (maximum peak output power at the upper end of the assigned frequency band):

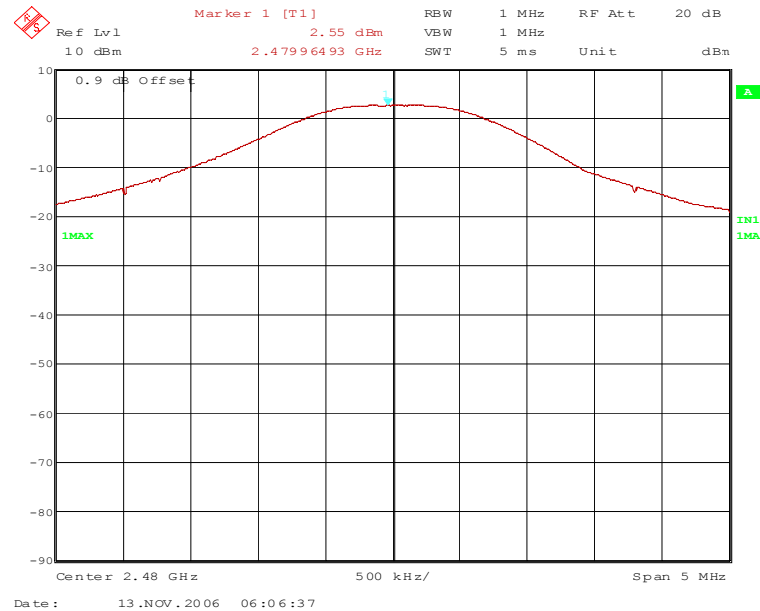


62162\_47.wmf (maximum peak inquiry mode):

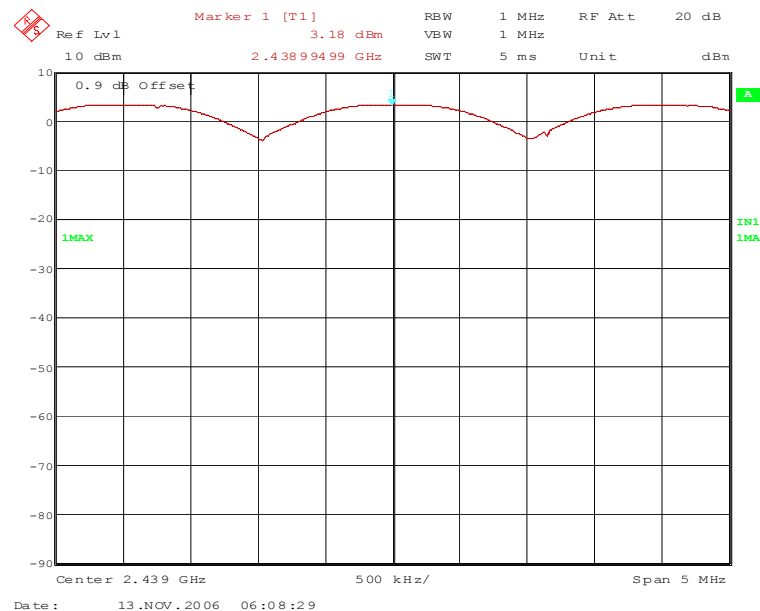

TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_48.wmf (maximum peak paging mode):

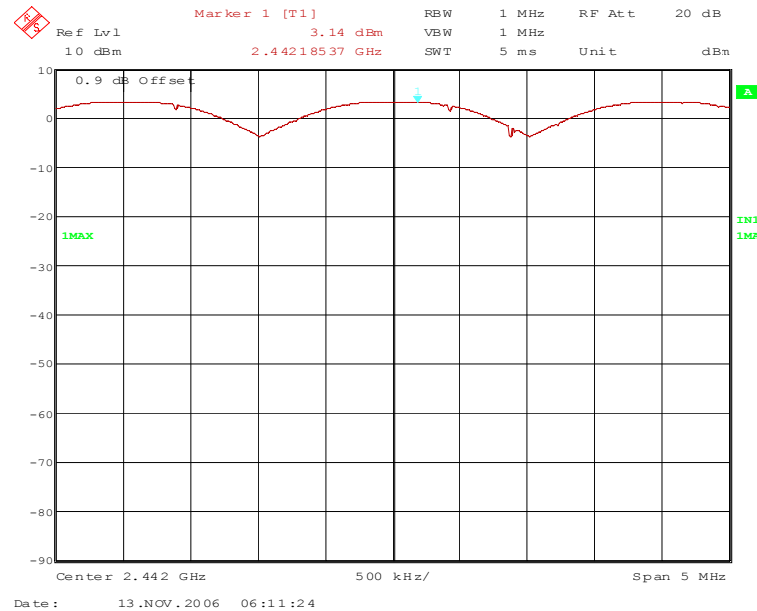

| Channel number | Channel frequency [MHz] | Maximum peak output power [dBm] | Antenna gain [dBi] | Calculated EIRP [dBm] | Peak power limit [dBm] |
|----------------|-------------------------|---------------------------------|--------------------|-----------------------|------------------------|
| 0              | 2402                    | 3.6                             | 0.0                | 3.6                   | 30.0                   |
| 39             | 2441                    | 3.2                             | 0.0                | 3.2                   | 30.0                   |
| 78             | 2480                    | 2.6                             | 0.0                | 2.6                   | 30.0                   |
| 38 (inquiry)   | 2439                    | 3.2                             | 0.0                | 3.2                   | 30.0                   |
| 40 (paging)    | 2442                    | 3.1                             | 0.0                | 3.1                   | 30.0                   |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R62162\_A Edition 1

---

## 5.6 BAND-EDGE COMPLIANCE

### 5.6.1 METHOD OF MEASUREMENT (BAND-EDGE COMPLIANCE)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disenabled.

The following spectrum analyser settings shall be used:

- Span: Wide enough to capture the peak level of the emission on the channel closest to the band-edge, as well as any modulation products, which fall outside the assigned frequency band.
- Resolution bandwidth:  $\geq 1\%$  of the span, but not below 30 kHz.
- Video bandwidth:  $\geq$  the resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency line shall be set on the edge of the assigned frequency band. Set the second marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is higher than that at the band-edge. After this the difference between this emission level and the signal peak will be calculated. With the value of measured field strength of the signal peak and the calculated difference to the emission level, the level of the field strength of the emission will be calculated.

The measurement will be performed at the upper and lower end of the assigned frequency band and with hopping on and off.

Test set-up:




TEST REPORT REFERENCE: R62162\_A Edition 1


## 5.6.2 TEST RESULT (BAND-EDGE COMPLIANCE)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 21 °C | Relative humidity | 40 % |
|---------------------|-------|-------------------|------|

62162\_49.wmf (band-edge compliance, lower band edge, hopping off):

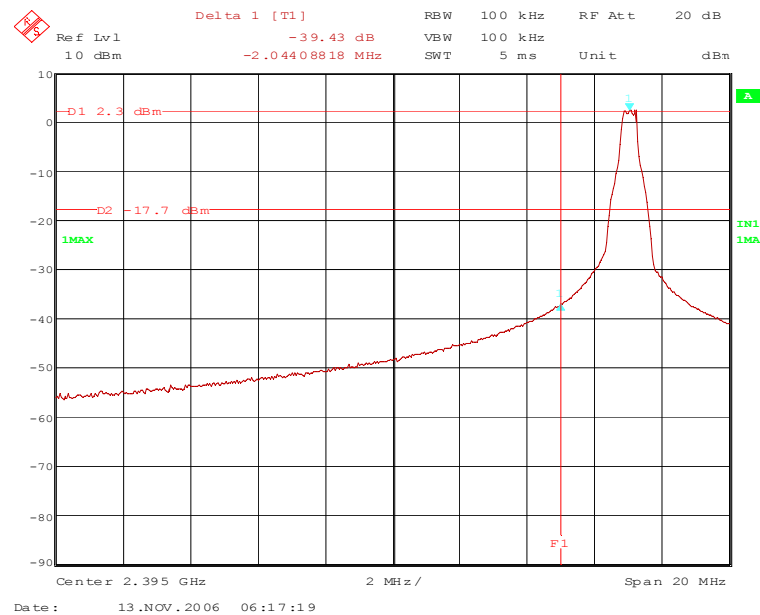


62162\_52.wmf (band-edge compliance, upper band edge, hopping off):

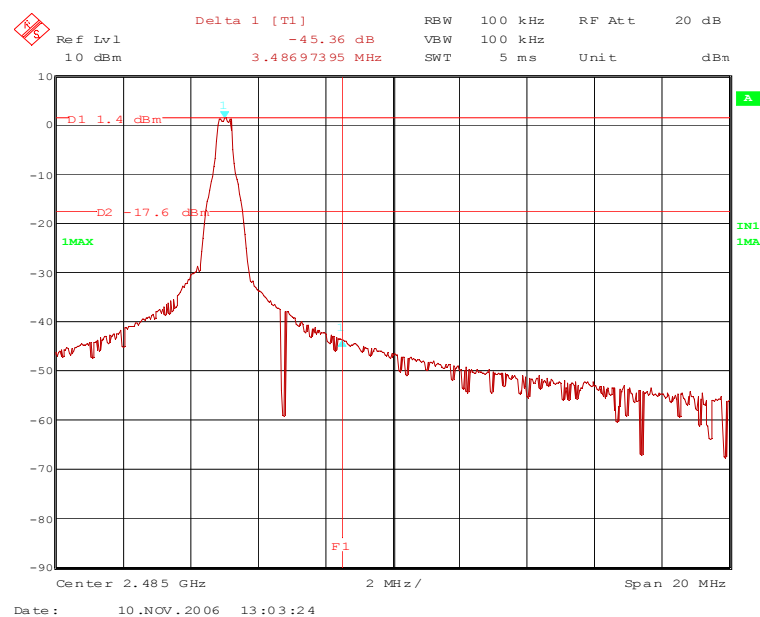


TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_50.wmf (band-edge compliance, lower band edge, hopping on):

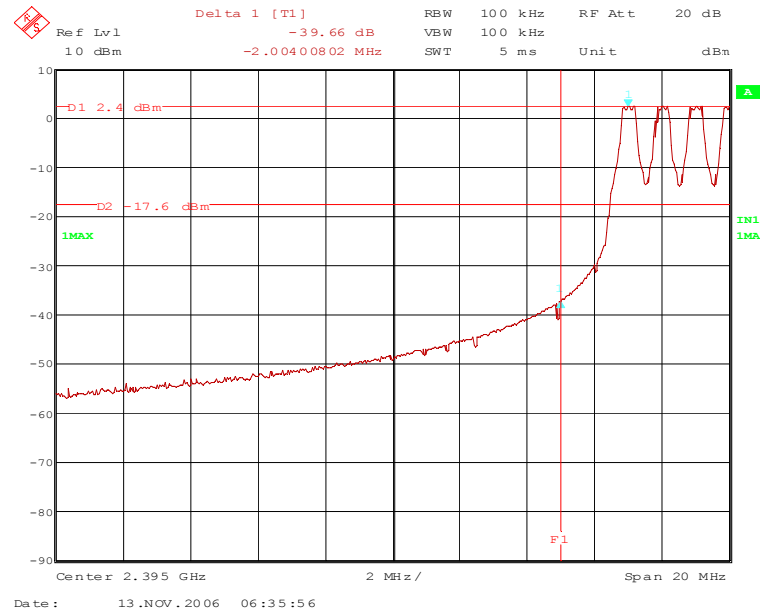

62162\_51.wmf (band-edge compliance, upper band edge, hopping on):

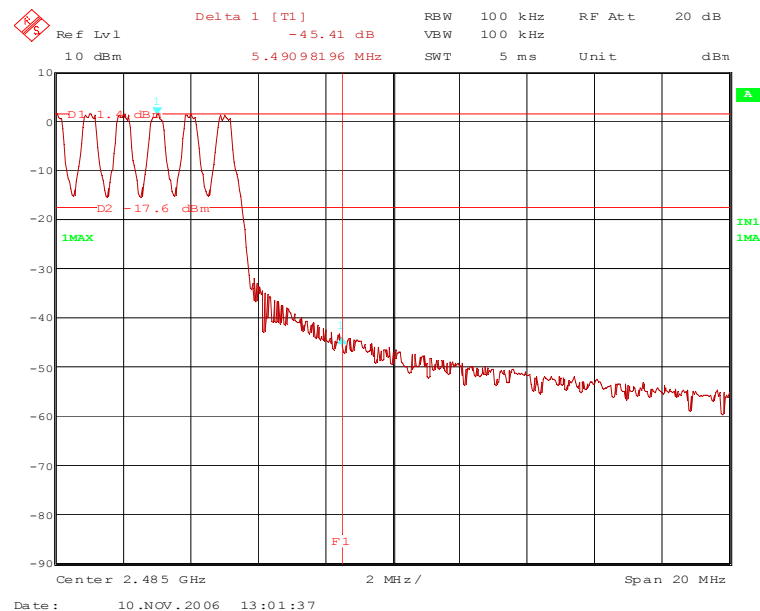

TEST REPORT REFERENCE: R62162\_A Edition 1

The plots on the two pages before are showing the band-edge compliance for the upper and lower band-edge, with and without hopping. The display line 1 (D1) in these plots represents the highest level within the assigned frequency band. The display line 2 (D2) represents the 20 dB offset to this highest level and shows the compliance with FCC 47 CFR Part 15.247 (d). The frequency line 1 (F1) shows the edge of the assigned frequency.

| Band-edge compliance (hopping disenabled) |                                    |                                             |                                          |                |
|-------------------------------------------|------------------------------------|---------------------------------------------|------------------------------------------|----------------|
| Band-edge                                 | Difference to the signal peak [dB] | Field strength of this signal peak [dBμV/m] | Field strength at the band edge [dBμV/m] | Limit [dBμV/m] |
| Upper                                     | 45.4                               | 91.9                                        | 46.5                                     | 54.0           |
| Lower                                     | 39.4                               | 90.9                                        | 51.5                                     | 70.9           |

| Band-edge compliance (hopping enabled) |                                    |                                             |                                          |                |
|----------------------------------------|------------------------------------|---------------------------------------------|------------------------------------------|----------------|
| Band-edge                              | Difference to the signal peak [dB] | Field strength of this signal peak [dBμV/m] | Field strength at the band edge [dBμV/m] | Limit [dBμV/m] |
| Upper                                  | 45.4                               | 91.9                                        | 46.5                                     | 54.0           |
| Lower                                  | 39.7                               | 90.9                                        | 51.2                                     | 70.9           |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R62162\_A Edition 1

---

## 5.7 CONDUCTED EMISSIONS (TRANSMITTER)

### 5.7.1 METHOD OF MEASUREMENT (CONDUCTED EMISSIONS)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disabled.

The following spectrum analyser settings shall be used:

In the frequency range from 9 kHz to 150 kHz:

- Start frequency: 9 kHz.
- Stop frequency: 150 kHz.
- Resolution bandwidth: 100 Hz.
- Video bandwidth: 100 Hz.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

In the frequency range from 150 kHz to 30 MHz:

- Start frequency: 150 kHz.
- Stop frequency: 30 MHz.
- Resolution bandwidth: 10 kHz.
- Video bandwidth: 10 kHz.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

In the frequency range from 30 MHz to 25 GHz:

- Start frequency: 30 MHz.
- Stop frequency: 25 GHz.
- Resolution bandwidth: 100 kHz.
- Video bandwidth: 100 kHz.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

The resolution bandwidth settings below 30 MHz were chosen in accordance to the ANSI C63.4 [1] in regarding a good engineering practice.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set 20 dB below the peak marker. Every emission has to be below the display line.

The measurement will be performed with the EUT operates at the middle, the upper and lower end of the assigned frequency band and with hopping off.

Test set-up:




TEST REPORT REFERENCE: R62162\_A Edition 1


## 5.7.2 TEST RESULTS (CONDUCTED EMISSIONS)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 21 °C | Relative humidity | 40 % |
|---------------------|-------|-------------------|------|

62162\_53.wmf (conducted emissions from 9 kHz to 150 kHz, transmitter at 2402 MHz):

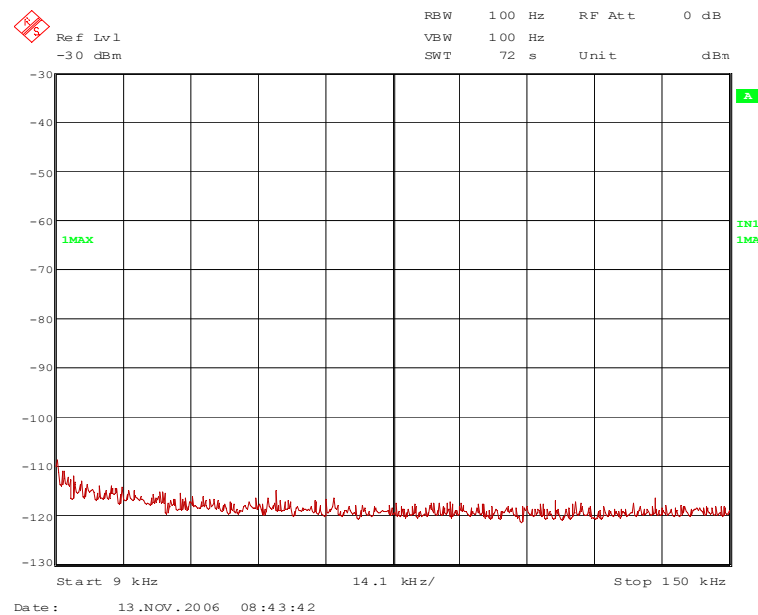


62162\_54.wmf (conducted emissions from 9 kHz to 150 kHz, transmitter at 2441 MHz):

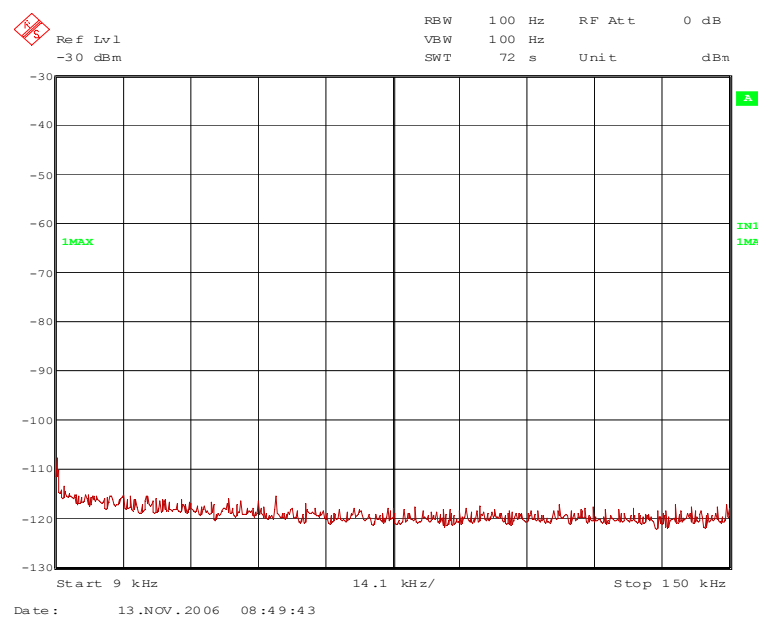


TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_55.wmf (conducted emissions from 9 kHz to 150 kHz, transmitter at 2480 MHz):

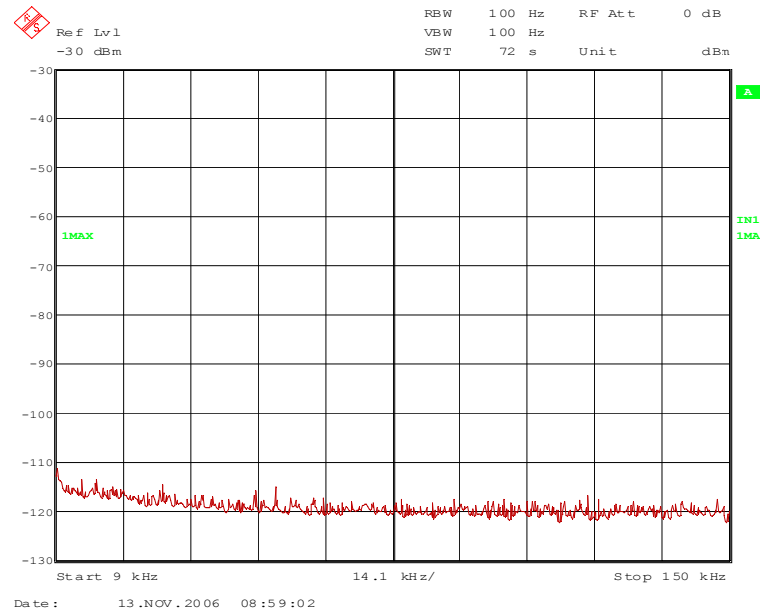


62162\_58.wmf (conducted emissions from 150 kHz to 30 MHz, transmitter at 2402 MHz):

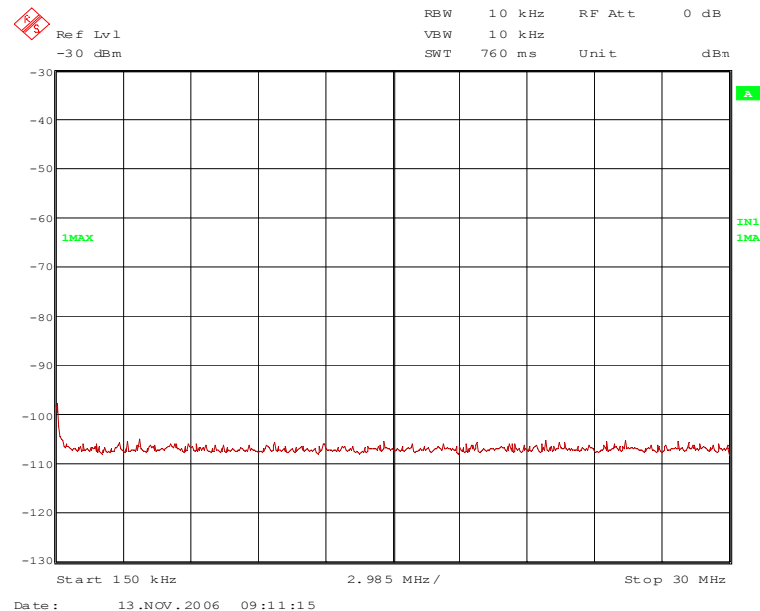


TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_57.wmf (conducted emissions from 150 kHz to 30 MHz, transmitter at 2441 MHz):

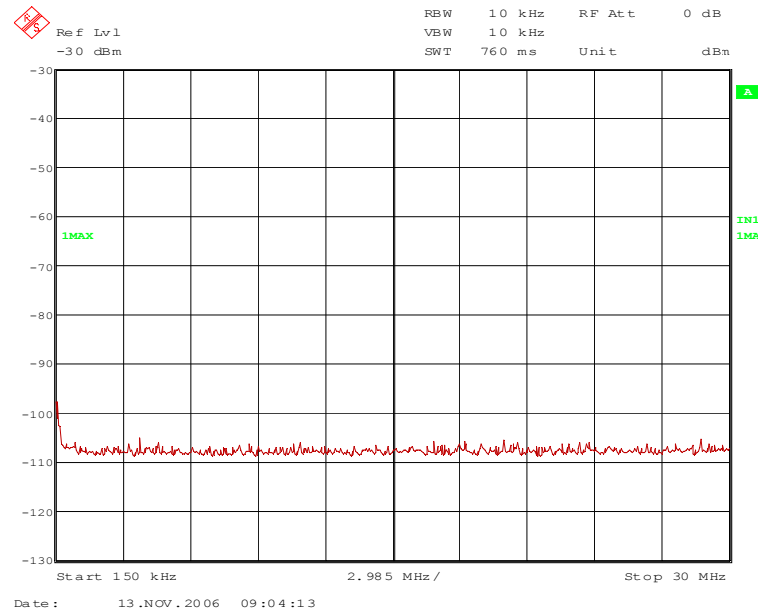


62162\_56.wmf (conducted emissions from 150 kHz to 30 MHz, transmitter at 2480 MHz):

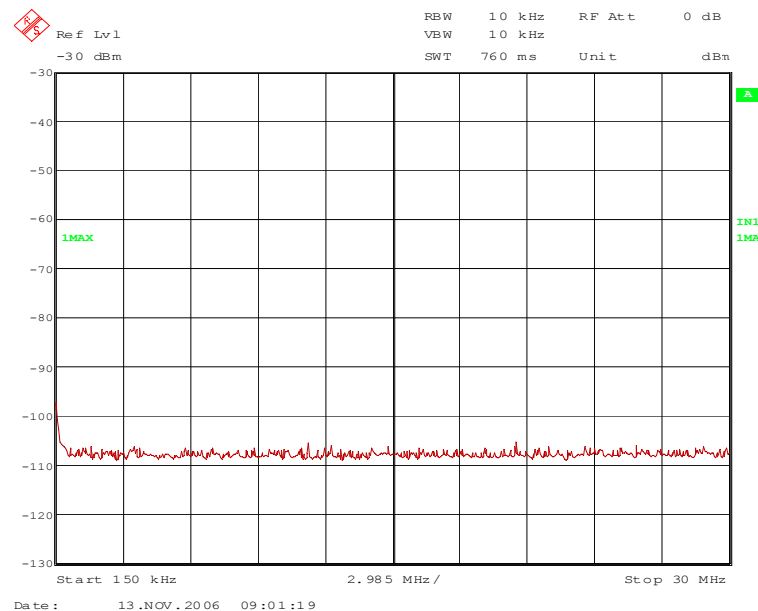


TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_59.wmf (conducted emissions from 30 MHz to 25 GHz, transmitter at 2402 MHz):

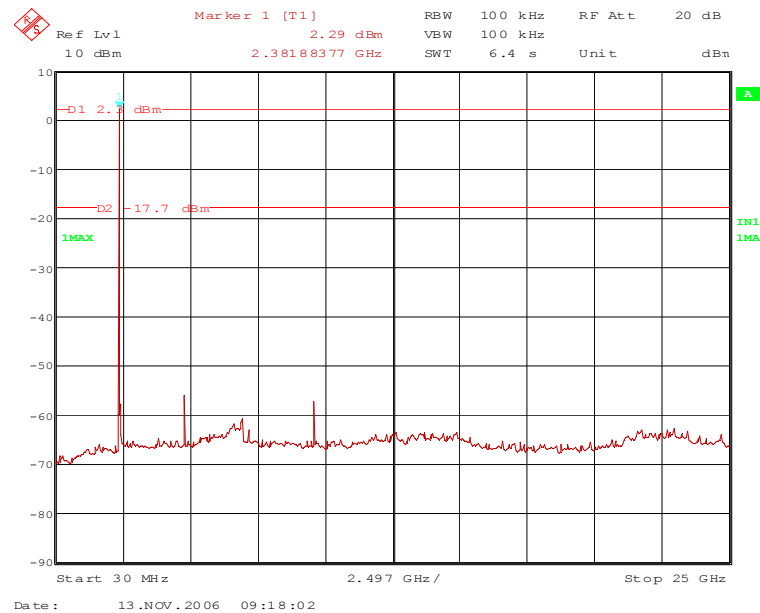


62162\_60.wmf (conducted emissions from 30 MHz to 25 GHz, transmitter at 2441 MHz):

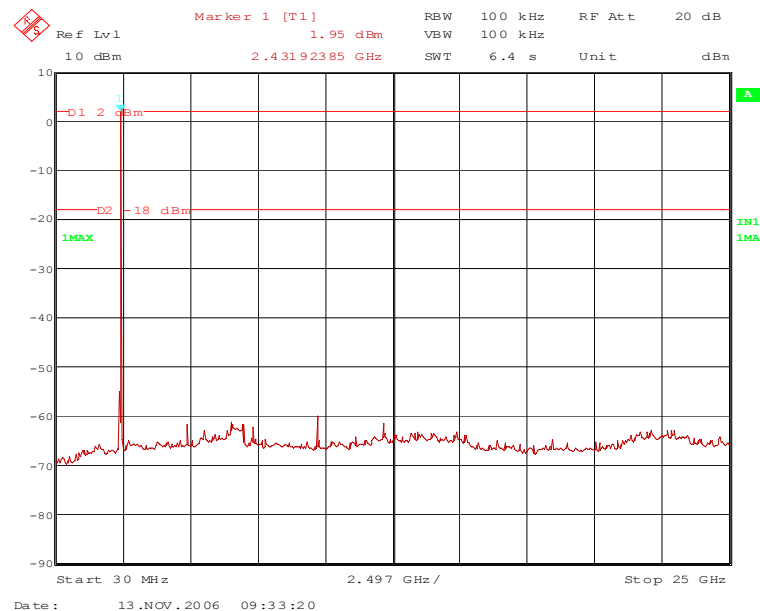

TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_61.wmf (conducted emissions from 30 MHz to 25 GHz, transmitter at 2480 MHz):

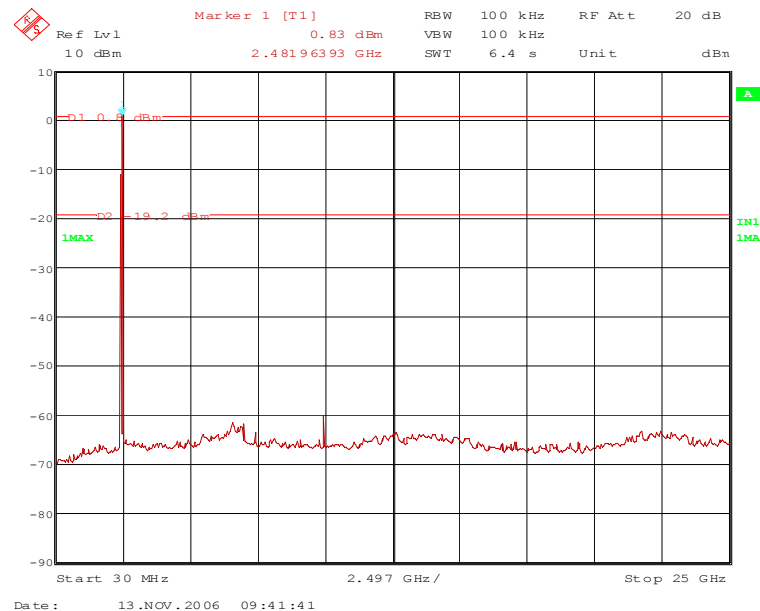

| Conducted emissions with transmitter operates at 2402 MHz |            |           |           |             |               |                       |
|-----------------------------------------------------------|------------|-----------|-----------|-------------|---------------|-----------------------|
| Frequency                                                 | Result dBm | Limit dBm | Margin dB | Reading dBm | Cable loss dB | Reference level [dBm] |
| 4.804 GHz                                                 | -54.4      | -17.7     | 36.7      | -55.5       | 1.1           | 2.3                   |
| 9.608 GHz                                                 | -53.7      | -17.7     | 36.0      | -55.2       | 1.5           | 2.3                   |
| Conducted emissions with transmitter operates at 2441 MHz |            |           |           |             |               |                       |
| Frequency                                                 | Result dBm | Limit dBm | Margin dB | Reading dBm | Cable loss dB | Reference level [dBm] |
| 9.764 GHz                                                 | -56.7      | -18.0     | 38.7      | -58.2       | 1.5           | 2.0                   |
| Conducted emissions with transmitter operates at 2480 MHz |            |           |           |             |               |                       |
| Frequency                                                 | Result dBm | Limit dBm | Margin dB | Reading dBm | Cable loss dB | Reference level [dBm] |
| 9.920 GHz                                                 | -57.6      | -19.2     | 38.4      | -59.1       | 1.5           | 0.8                   |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R62162\_A Edition 1

## 5.8 RADIATED EMISSIONS (TRANSMITTER)

### 5.8.1 METHOD OF MEASUREMENT (RADIATED EMISSIONS)

The radiated emission measurement is subdivided into four stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 9 kHz to 1 GHz.
- A final measurement carried out on an outdoor test side without reflecting ground plane and a fixed antenna height in the frequency range 9 kHz to 30 MHz.
- A final measurement carried out on an open area test side with reflecting ground plane and various antenna height in the frequency range 30 MHz to 1 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 25 GHz.

All measurements will be carried out with the EUT working on the middle and upper and lower edge of the assigned frequency band. For this reason the hopping function of the EUT has to be disabled.


#### Preliminary measurement (9 kHz to 30 MHz):

In the first stage a preliminary measurement will be performed in a shielded room with a measuring distance of 3 meters. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyser while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to found the maximum emissions.

The resolution bandwidth of the spectrum analyser will be set to the following values:

| Frequency range   | Resolution bandwidth |
|-------------------|----------------------|
| 9 kHz to 150 kHz  | 200 Hz               |
| 150 kHz to 30 MHz | 10 kHz               |

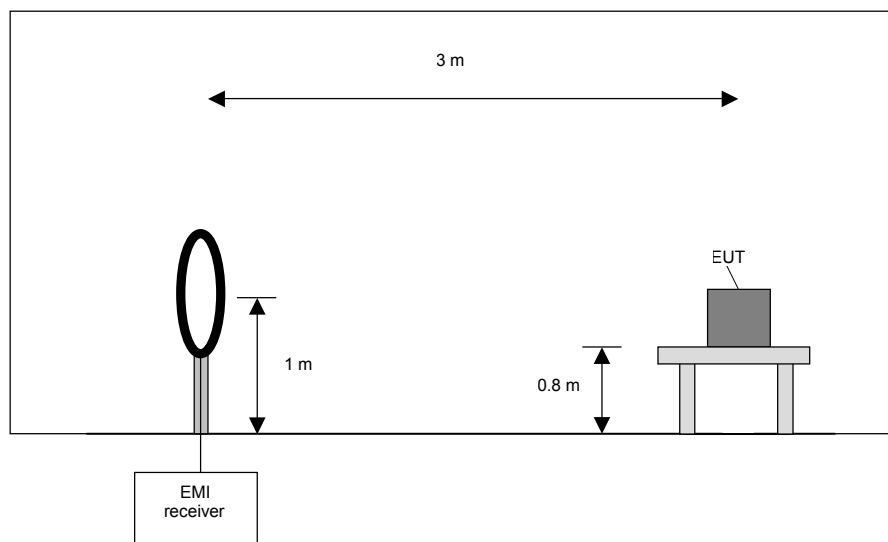

TEST REPORT REFERENCE: R62162\_A Edition 1

Preliminary measurement procedure:

Prescans were performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Manipulate the system cables within the range to produce the maximum level of emission.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Make a hardcopy of the spectrum.
- 5) Measure the frequencies of highest detected emission with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 6) Repeat steps 1) to 5) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
- 7) Rotate the measuring antenna and repeat steps 1) to 5).


**Final measurement (9 kHz to 30 MHz):**

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in a measuring distances of 3 m, 10 m and 30 m. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an average detector will be used according Section 15.209 (d) [2].

On the during the preliminary measurement detected frequencies the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range   | Resolution bandwidth |
|-------------------|----------------------|
| 9 kHz to 150 kHz  | 200 Hz               |
| 150 kHz to 30 MHz | 9 kHz                |

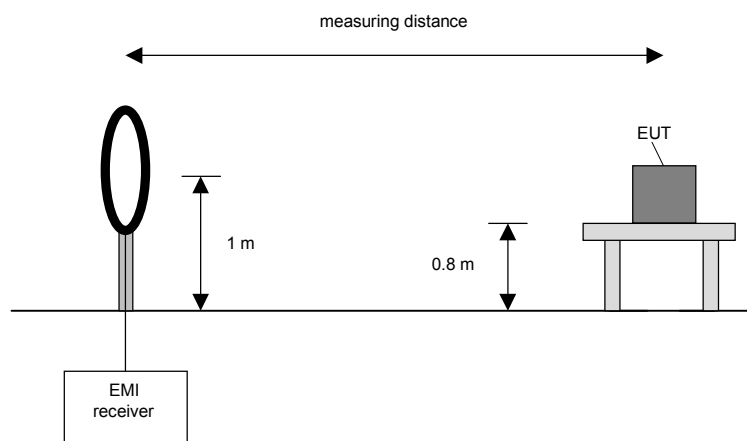

TEST REPORT REFERENCE: R62162\_A Edition 1

Final measurement procedure:

The following procedure will be used:

- 1) Monitor the frequency range with the measuring antenna at vertical orientation parallel to the EUT at an azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals and note the azimuth and orientation.
- 3) Rotate the measuring antenna to find the maximum and note the value.
- 4) Rotate the measuring antenna and repeat steps 1) to 3) until the maximum value is found.
- 5) Repeat steps 1) to 4) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).


**Preliminary measurement (30 MHz to 1 GHz)**

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range   | Resolution bandwidth |
|-------------------|----------------------|
| 30 MHz to 230 MHz | 100 kHz              |
| 230 MHz to 1 GHz  | 100 kHz              |

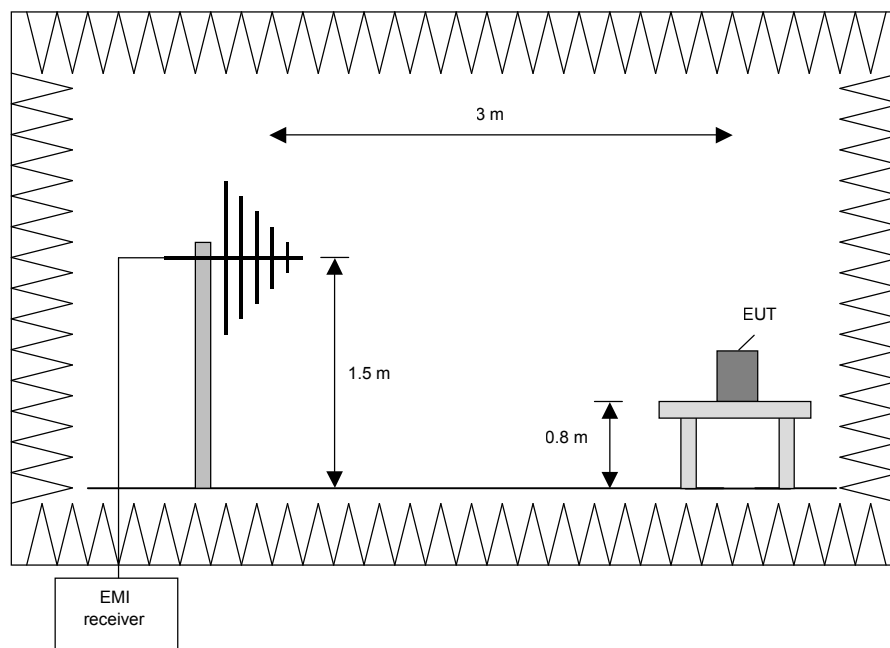

TEST REPORT REFERENCE: R62162\_A Edition 1

**Procedure preliminary measurement:**

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.  
 The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum.
5. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat 1) to 4) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
7. Repeat 1) to 5) with the vertical polarisation of the measuring antenna.

**Final measurement (30 MHz to 1 GHz)**

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range | Resolution bandwidth |
|-----------------|----------------------|
| 30 MHz to 1 GHz | 120 kHz              |

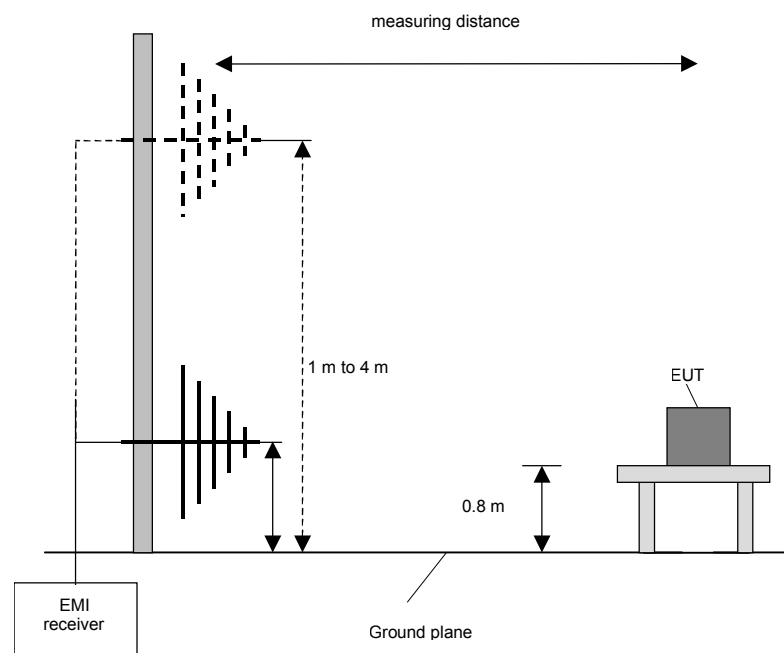

TEST REPORT REFERENCE: R62162\_A Edition 1

---

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).

**Preliminary and final measurement (1 GHz to 25 GHz)**

This measurement will be performed in a fully anechoic chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].


**Preliminary measurement (1 GHz to 25 GHz)**

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna, the antenna close to the EUT and while moving the antenna over all sides of the EUT. With the spectrum analyser in CLEAR / WRITE mode the cone of the emission should be found and than the measuring distance will be set to 3 m with the receiving antenna moving in this cone of emission. At this position the final measurement will be carried out.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range  | Resolution bandwidth |
|------------------|----------------------|
| 1 GHz to 4 GHz   | 100 kHz              |
| 4 GHz to 12 GHz  | 100 kHz              |
| 12 GHz to 18 GHz | 100 kHz              |
| 18 GHz to 25 GHz | 100 kHz              |

TEST REPORT REFERENCE: R62162\_A Edition 1

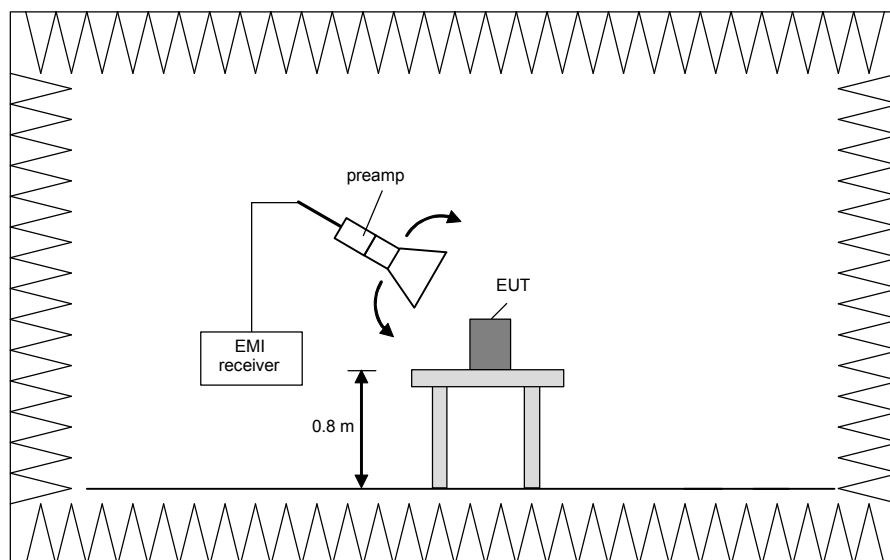


### **Final measurement (1 GHz to 25 GHz)**

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to MAX Hold mode and a resolution bandwidth of 1 MHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 ° in order to have the antenna inside the cone of radiation.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range  | Resolution bandwidth |
|------------------|----------------------|
| 1 GHz to 4 GHz   | 1 MHz                |
| 4 GHz to 12 GHz  | 1 MHz                |
| 12 GHz to 18 GHz | 1 MHz                |
| 18 GHz to 25 GHz | 1 MHz                |

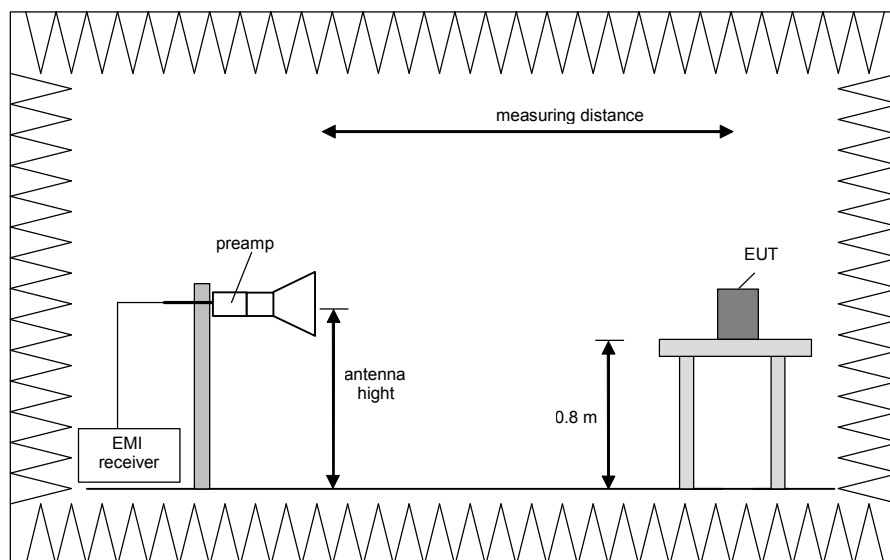

TEST REPORT REFERENCE: R62162\_A Edition 1

---

Procedure of measurement:

The measurements were performed in the frequency range 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz and 18 GHz to 25 GHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and move the antenna over all sides of the EUT (if necessary move the EUT to another orthogonal axis).
- 2) Change the antenna polarisation and repeat 1) with vertical polarisation.
- 3) Make a hardcopy of the spectrum.
- 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 5) Change the analyser mode to Clear / Write and found the cone of emission.
- 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3 m and the antenna will be still inside the cone of emission.
- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarisation and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beam width.

Step 1) to 6) are defined as preliminary measurement.

TEST REPORT REFERENCE: R62162\_A Edition 1


## 5.8.2 TEST RESULTS (RADIATED EMISSIONS)

### 5.8.2.1 PRELIMINARY MEASUREMENT (9 kHz to 25 GHz)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 21 °C | Relative humidity | 39 % |
|---------------------|-------|-------------------|------|

- Position of EUT:** The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m in the range 9 kHz to 1 GHz and 1 m above 1 GHz.
- Cable guide:** The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.
- Test record:** Where not otherwise stated the test was carried out in test mode 2 of the EUT, because there was no difference to the other test modes. All results are shown in the following.
- Supply voltage:** During all measurements the EUT was supplied with 5.0 V DC.

62162\_22.wmf: (9 kHz to 150 kHz):

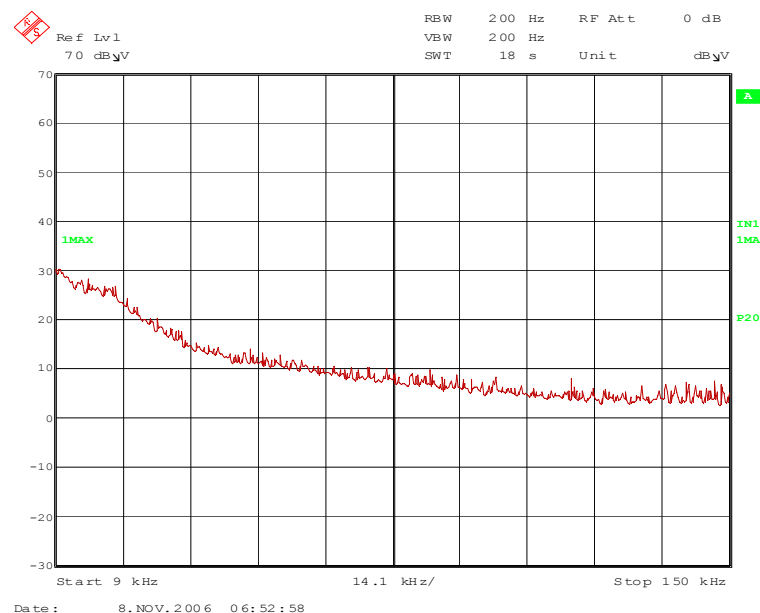


TEST EQUIPMENT USED FOR THE TEST:


29, 31 – 37, 39, 43, 46, 49 – 51, 54

TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_21.wmf: (150 kHz to 1 MHz):

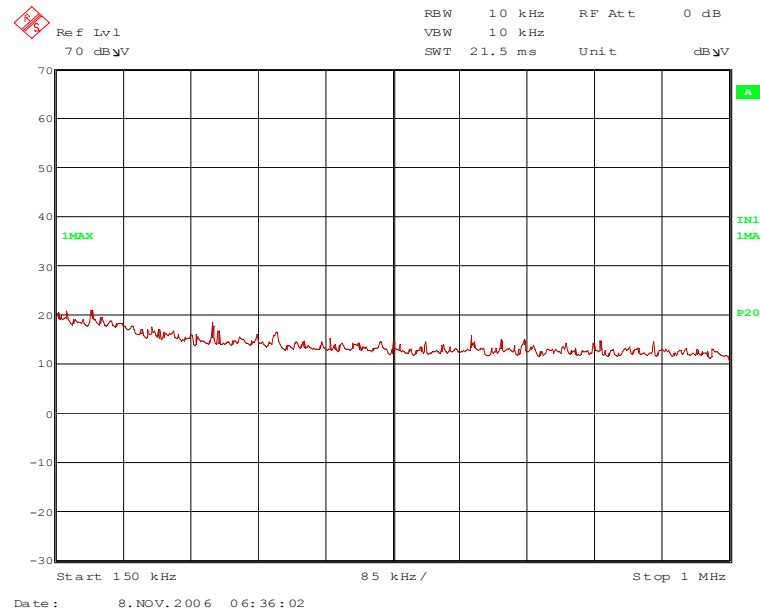


62162\_20.wmf: (1 MHz to 30 MHz)

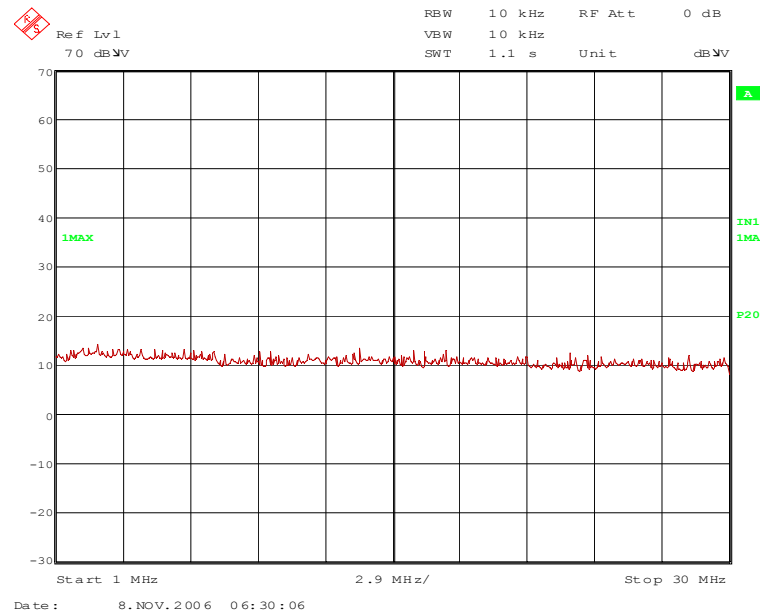


No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test, so no measurements were carried out on the outdoor test site.

TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_18.wmf (30 MHz to 230 MHz):

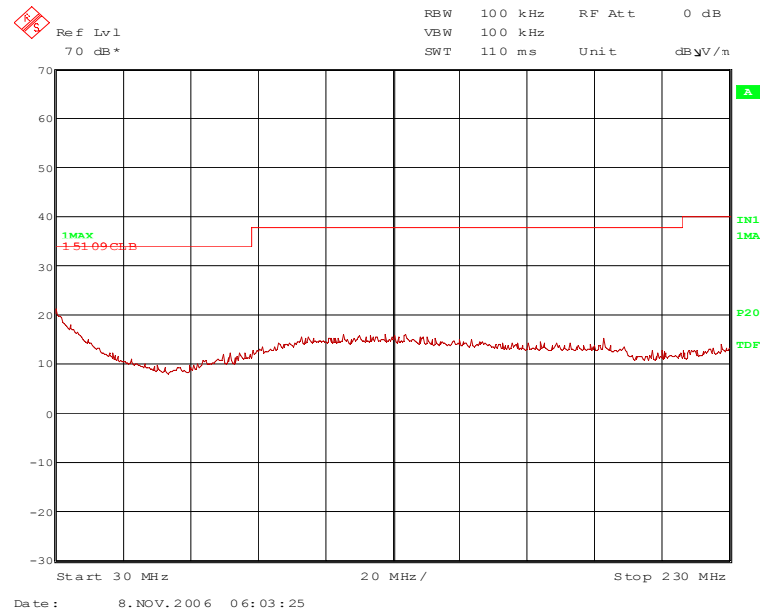

62162\_19.wmf (230 MHz to 1 GHz):

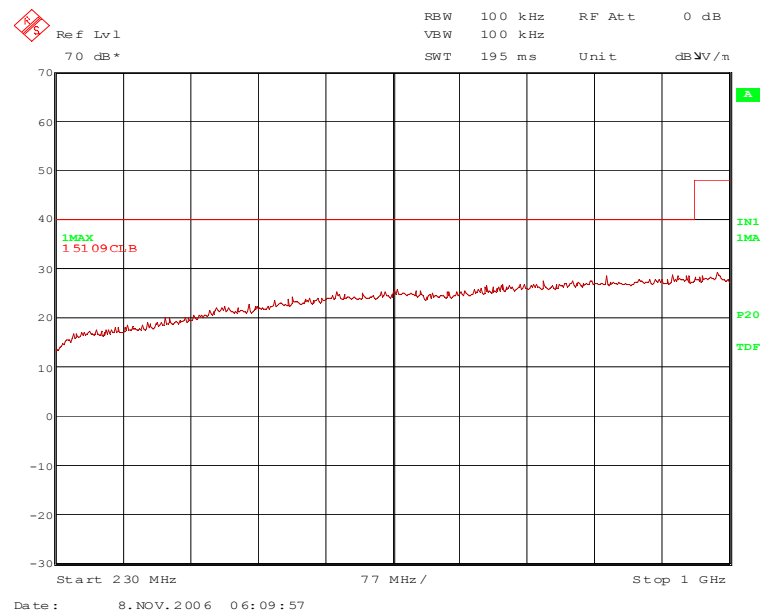


No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test, so no measurements were carried out on the open area test site.


TEST REPORT REFERENCE: R62162\_A Edition 1

**Transmitter operates at the lower end of the assigned frequency band (operation mode 1)**

62162\_2.wmf (1 GHz to 4 GHz):

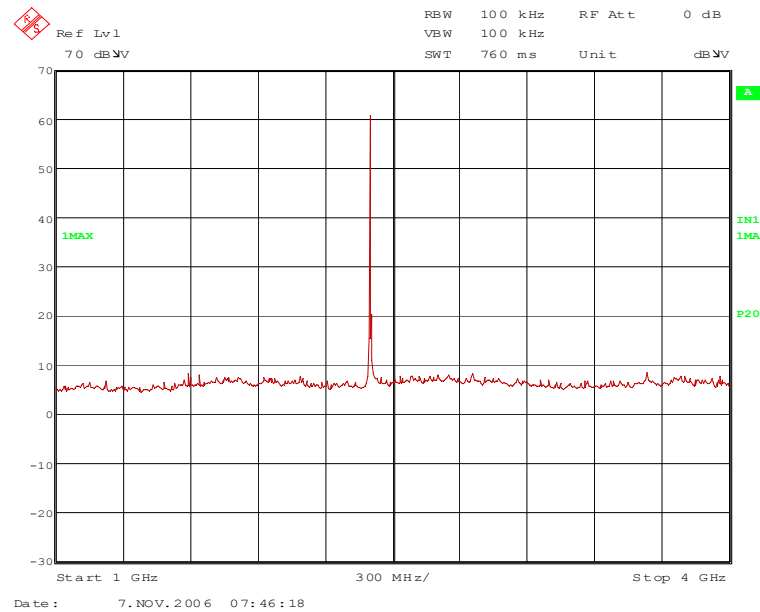


62162\_5.wmf (4 GHz to 12 GHz):

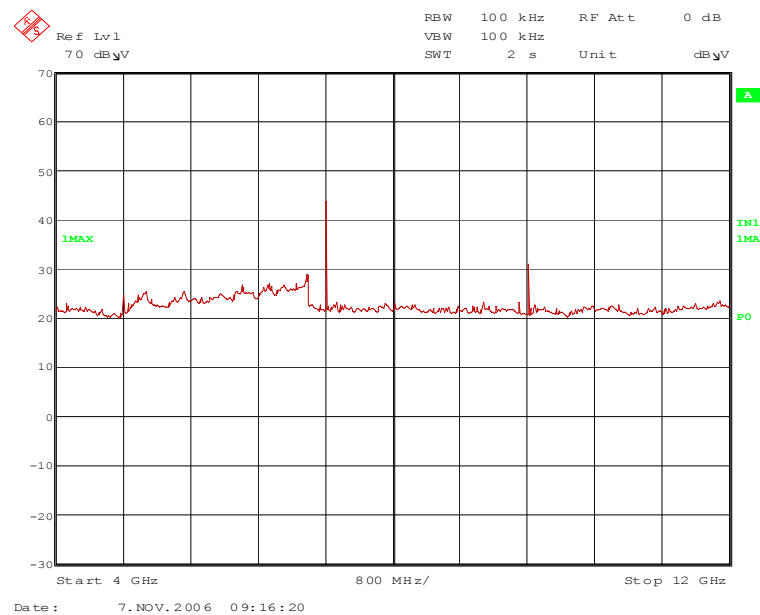


TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_9.wmf (12 GHz to 18 GHz):

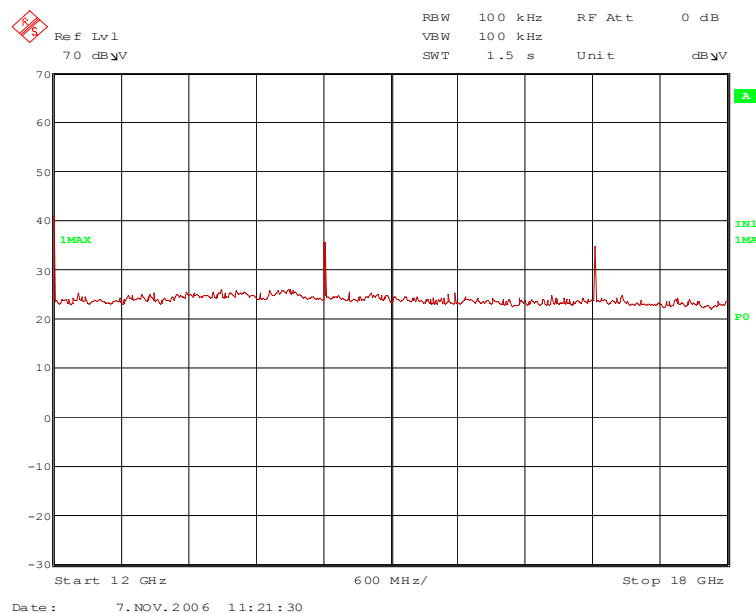

62162\_14.wmf (18 GHz to 25 GHz):

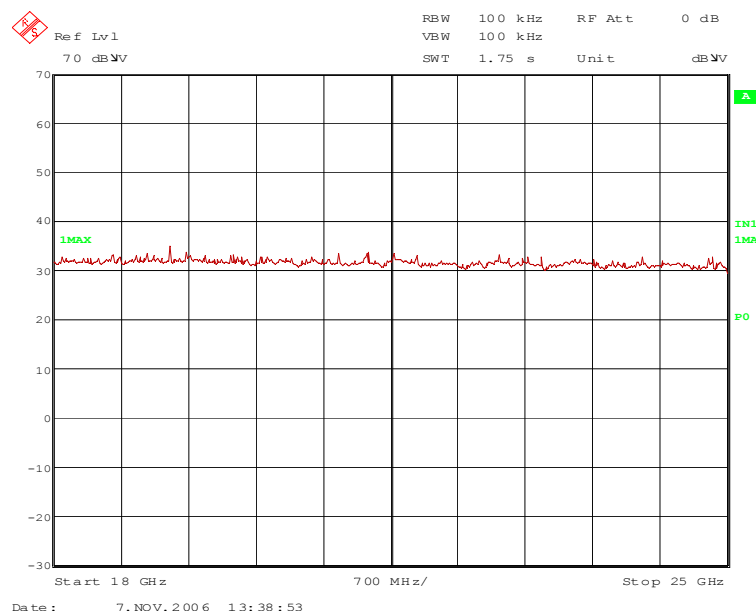

The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 4.804 GHz and 12.010 GHz

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:


- 2.402 GHz, 7.206 GHz, 9.608 GHz, 14.412 GHz and 16.8142 GHz.

These frequencies have to be measured in a final measurement on an open area test site. The results were presented in the following.


TEST REPORT REFERENCE: R62162\_A Edition 1

**Transmitter operates at the middle of the assigned frequency band (operation mode 2)**

62162\_1.wmf (1 GHz to 4 GHz):

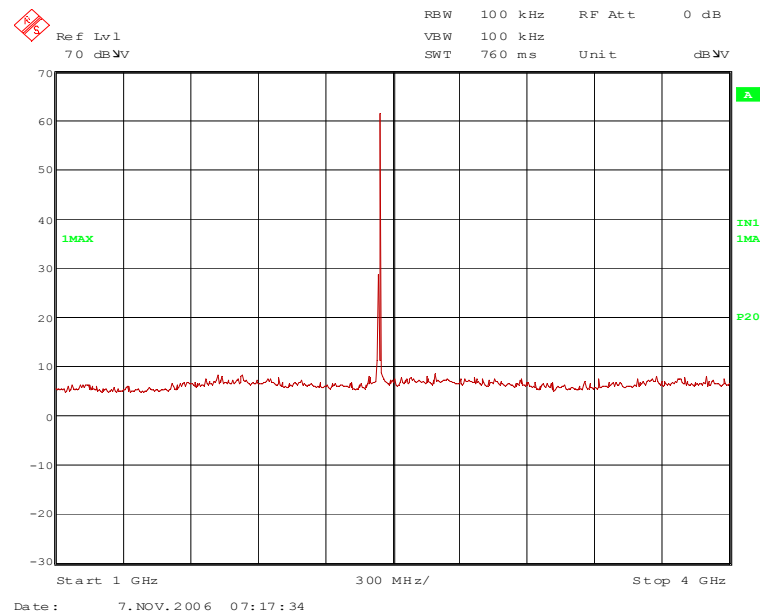


62162\_4.wmf (4 GHz to 12 GHz):

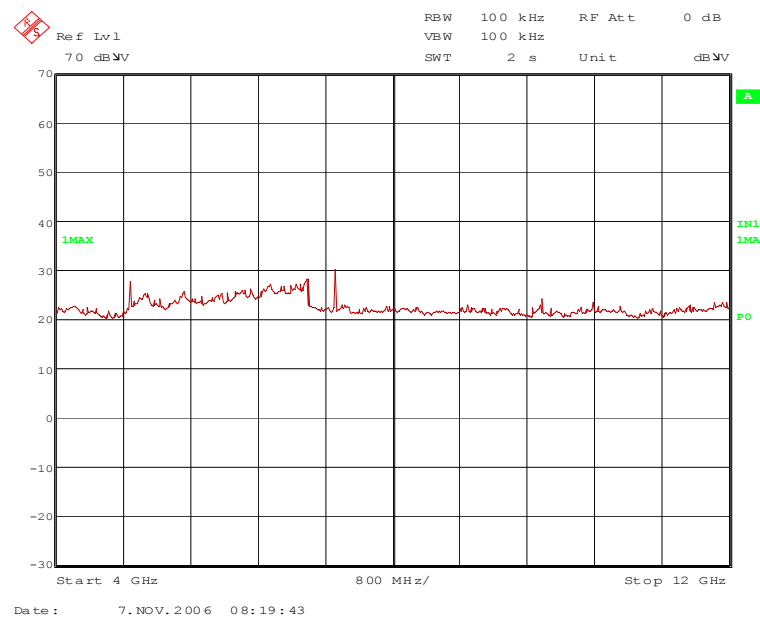


TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_10.wmf (12 GHz to 18 GHz):

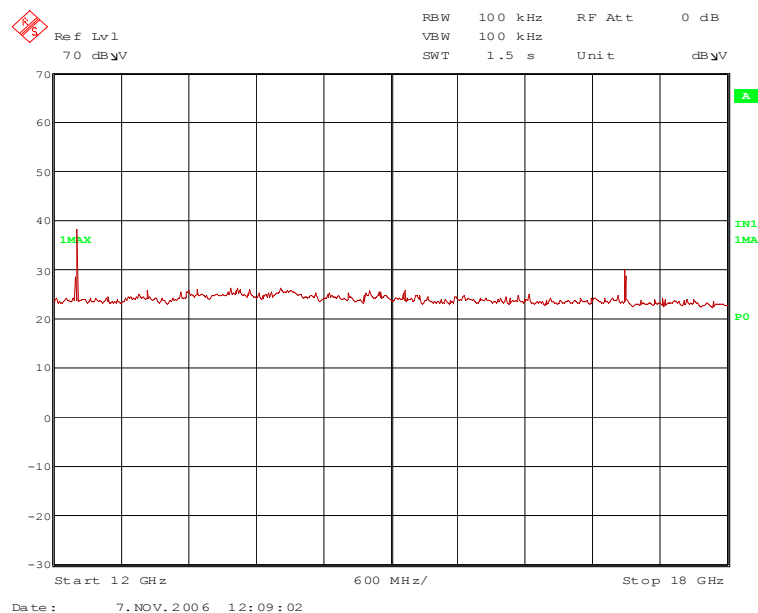

62162\_13.wmf (18 GHz to 25 GHz):

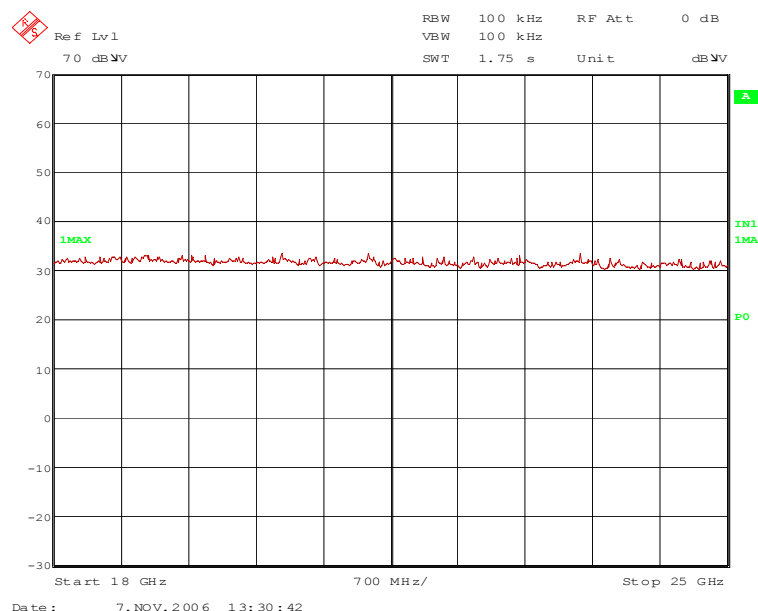

The following frequencies were found inside the restricted bands during the preliminary radiated emission test.

- 4.882 GHz, 7.323 GHz and 12.205 GHz.

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:


- 2.441 GHz and 17.087 GHz.

These frequencies have to be measured in a final measurement. The results were presented in the following.


TEST REPORT REFERENCE: R62162\_A Edition 1

**Transmitter operates at the upper end of the assigned frequency band (operation mode 3)**

**62162\_3.wmf (1 GHz to 4 GHz):**

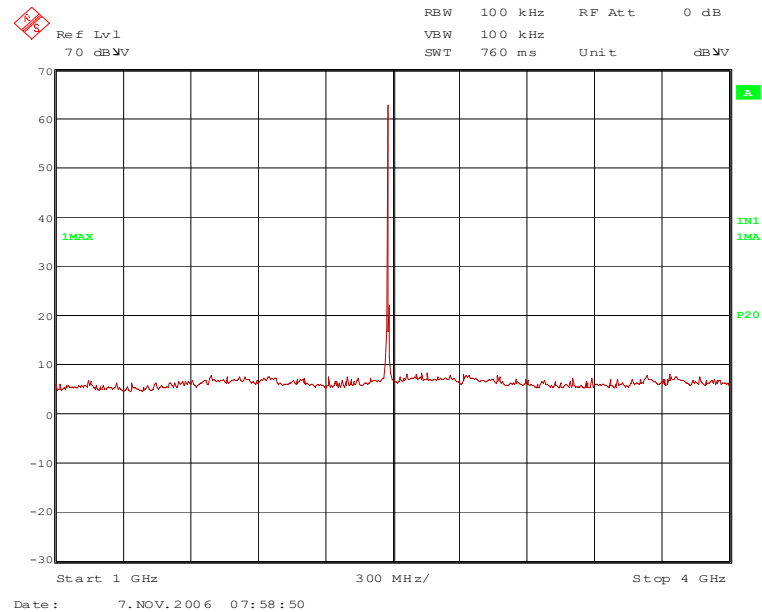


**62162\_6.wmf (4 GHz to 12 GHz):**

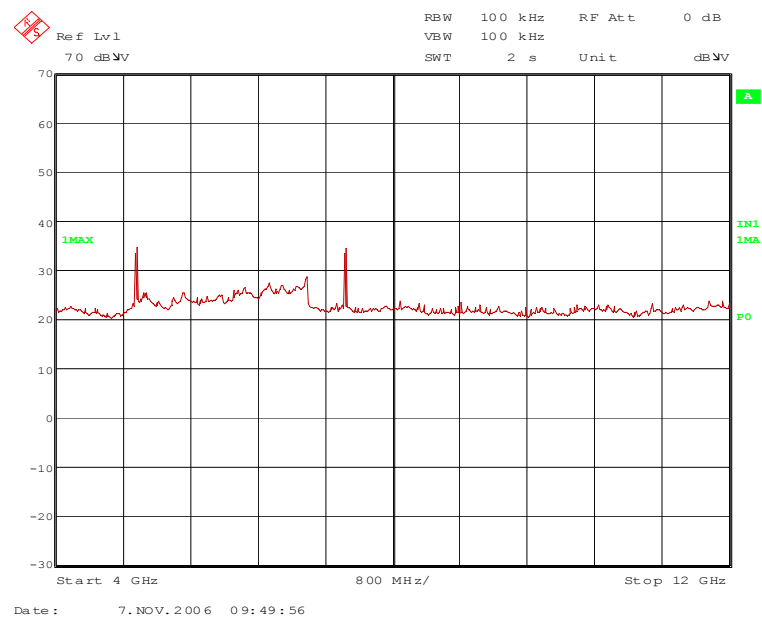


TEST REPORT REFERENCE: R62162\_A Edition 1

62162\_11.wmf (12 GHz to 18 GHz):

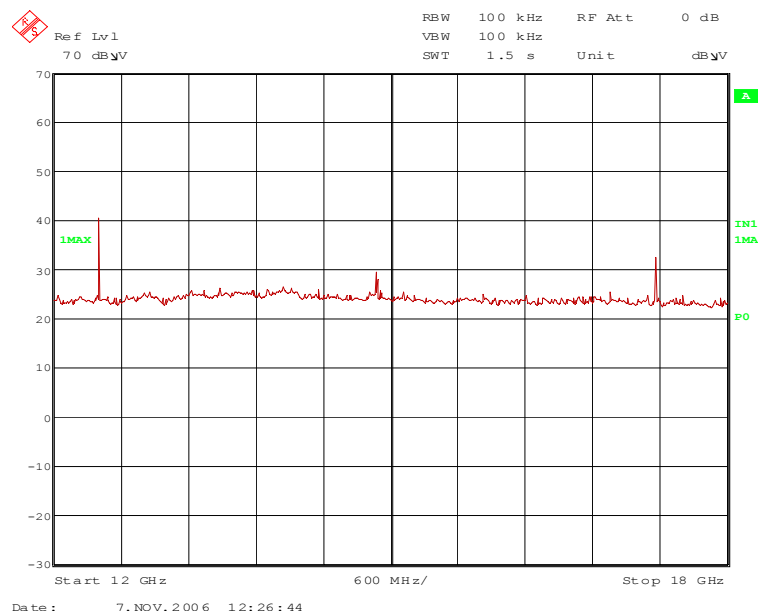

62162\_12.wmf (18 GHz to 25 GHz):

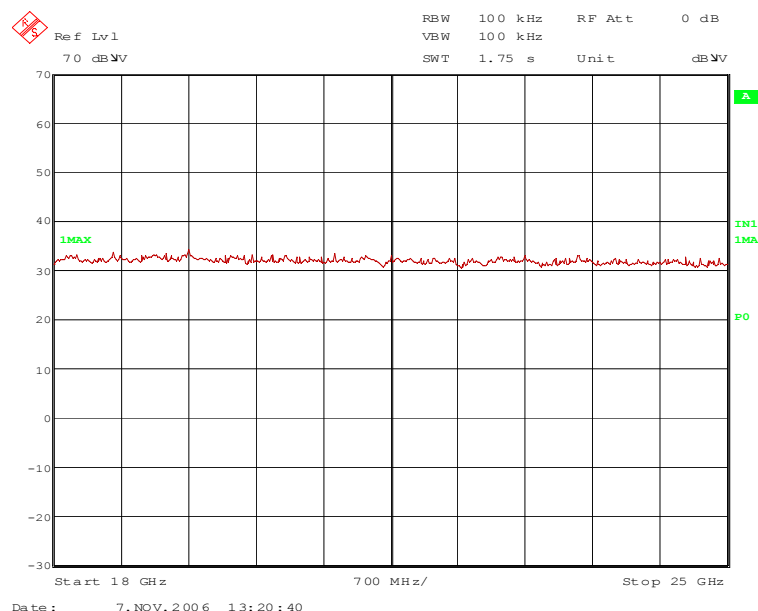

The following frequencies were found inside the restricted bands during the preliminary radiated emission test:

- 4.960 GHz, 7.440 GHz and 12.400 GHz.

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:

- 2.480 GHz, 14.880 GHz and 17.360 GHz.

These frequencies have to be measured in a final measurement. The results were presented in the following.

TEST REPORT REFERENCE: R62162\_A Edition 1

### 5.8.2.2 FINAL MEASUREMENT (1 GHz to 25 GHz)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 21 °C | Relative humidity | 39 % |
|---------------------|-------|-------------------|------|

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cables of the EUT were fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Supply voltage: During all measurements the EUT was supplied with 5.0 V DC.

Resolution bandwidth: For all measurements a resolution bandwidth of 1 MHz was used.

#### Transmitter operates at the lower end of the assigned frequency band (operation mode 1)

##### Result measured with the peak detector:

| Frequency<br>GHz | Corr.<br>value<br>dBμV/m | Limit<br>dBμV/m | Margin<br>dB | Readings<br>dBμV | Antenna<br>factor<br>1/m | Preamp<br>dB | Cable<br>loss<br>dB | Height<br>cm | Pol.  | Restr.<br>Band | Pos. |
|------------------|--------------------------|-----------------|--------------|------------------|--------------------------|--------------|---------------------|--------------|-------|----------------|------|
| 2.402            | 93.6                     | -               | -            | 62.3             | 28.5                     | 0.0          | 2.8                 | 150          | Vert. | -              | 1    |
| 4.804            | 48.2                     | 74.0            | 25.8         | 37.0             | 33.1                     | 25.7         | 3.8                 | 150          | Hor.  | Yes            | 3    |
| 7.206            | 62.3                     | 74.0            | 11.7         | 45.7             | 36.3                     | 24.6         | 4.9                 | 150          | Hor.  | No             | 3    |
| 9.608            | 54.9                     | 74.0            | 19.1         | 35.2             | 37.9                     | 23.9         | 5.7                 | 150          | Hor.  | No             | 3    |
| 12.010           | 55.7                     | 74.0            | 18.3         | 47.0             | 33.6                     | 25.9         | 1.0                 | 100          | Hor.  | Yes            | 3    |
| 14.412           | 50.6                     | 74.0            | 23.4         | 42.1             | 33.6                     | 26.3         | 1.2                 | 100          | Hor.  | No             | 3    |
| 16.814           | 51.4                     | 74.0            | 22.6         | 42.9             | 33.8                     | 26.7         | 1.4                 | 100          | Vert. | No             | 3    |

##### Result measured with the average detector:

| Frequency<br>GHz | Corr.<br>value<br>dBμV/m | Limit<br>dBμV/m | Margin<br>dB | Readings<br>dBμV | Antenna<br>factor<br>1/m | Preamp<br>dB | Cable<br>loss<br>dB | Height<br>cm | Pol.  | Restr.<br>Band | Pos. |
|------------------|--------------------------|-----------------|--------------|------------------|--------------------------|--------------|---------------------|--------------|-------|----------------|------|
| 2.402            | 90.9                     | -               | -            | 59.6             | 28.5                     | 0.0          | 2.8                 | 150          | Vert. | -              | 1    |
| 4.804            | 35.2                     | 54.0            | 18.8         | 24.0             | 33.1                     | 25.7         | 3.8                 | 150          | Hor.  | Yes            | 3    |
| 7.206            | 55.5                     | 70.9            | 15.4         | 38.9             | 36.3                     | 24.6         | 4.9                 | 150          | Hor.  | No             | 3    |
| 9.608            | 43.8                     | 70.9            | 27.1         | 24.1             | 37.9                     | 23.9         | 5.7                 | 150          | Hor.  | No             | 3    |
| 12.010           | 44.6                     | 54.0            | 9.4          | 35.9             | 33.6                     | 25.9         | 1.0                 | 100          | Hor.  | Yes            | 3    |
| 14.412           | 37.0                     | 70.9            | 33.9         | 28.5             | 33.6                     | 26.3         | 1.2                 | 100          | Hor.  | No             | 3    |
| 16.814           | 40.4                     | 70.9            | 30.5         | 31.9             | 33.8                     | 26.7         | 1.4                 | 100          | Vert. | No             | 3    |

TEST REPORT REFERENCE: R62162\_A Edition 1

**Transmitter operates at the middle of the assigned frequency band (operation mode 2)**

**Result measured with the peak detector:**

| Frequency<br>GHz | Corr.<br>value<br>dB $\mu$ V/m | Limit<br>dB $\mu$ V/m | Margin<br>dB | Readings<br>dB $\mu$ V | Antenna<br>factor<br>1/m | Preamp<br>dB | Cable<br>loss<br>dB | Height<br>cm | Pol.  | Restr.<br>Band | Pos. |
|------------------|--------------------------------|-----------------------|--------------|------------------------|--------------------------|--------------|---------------------|--------------|-------|----------------|------|
| 2.441            | 94.2                           | -                     | -            | 62.7                   | 28.7                     | 0.0          | 2.8                 | 150          | Vert. | -              | 1    |
| 4.882            | 50.6                           | 74.0                  | 23.4         | 39.1                   | 33.4                     | 25.7         | 3.8                 | 150          | Hor.  | Yes            | 3    |
| 7.323            | 54.0                           | 74.0                  | 20.0         | 37.4                   | 36.3                     | 24.6         | 4.9                 | 150          | Hor.  | Yes            | 3    |
| 12.205           | 51.7                           | 74.0                  | 22.3         | 42.9                   | 33.6                     | 25.8         | 1.0                 | 100          | Hor.  | Yes            | 3    |
| 17.087           | 47.6                           | 74.2                  | 26.6         | 39.1                   | 33.8                     | 26.7         | 1.4                 | 100          | Hor.  | No             | 3    |

**Result measured with the average detector:**

| Frequency<br>GHz | Corr.<br>value<br>dB $\mu$ V/m | Limit<br>dB $\mu$ V/m | Margin<br>dB | Readings<br>dB $\mu$ V | Antenna<br>factor<br>1/m | Preamp<br>dB | Cable<br>loss<br>dB | Height<br>cm | Pol.  | Restr.<br>Band | Pos. |
|------------------|--------------------------------|-----------------------|--------------|------------------------|--------------------------|--------------|---------------------|--------------|-------|----------------|------|
| 2.441            | 91.2                           | -                     | -            | 59.7                   | 28.7                     | 0.0          | 2.8                 | 150          | Vert. | -              | 1    |
| 4.882            | 38.3                           | 54.0                  | 15.7         | 26.8                   | 33.4                     | 25.7         | 3.8                 | 150          | Hor.  | Yes            | 3    |
| 7.323            | 45.1                           | 54.0                  | 8.9          | 28.5                   | 36.3                     | 24.6         | 4.9                 | 150          | Hor.  | Yes            | 3    |
| 12.205           | 39.7                           | 54.0                  | 14.3         | 30.9                   | 33.6                     | 25.8         | 1.0                 | 100          | Hor.  | Yes            | 3    |
| 17.087           | 34.2                           | 71.2                  | 37.0         | 25.7                   | 33.8                     | 26.7         | 1.4                 | 100          | Hor.  | No             | 3    |

TEST REPORT REFERENCE: R62162\_A Edition 1

**Transmitter operates at the upper end of the assigned frequency band (operation mode 3)**

**Result measured with the peak detector:**

| Frequency<br>GHz | Corr.<br>value<br>dBµV/m | Limit<br>dBµV/m | Margin<br>dB | Readings<br>dBµV | Antenna<br>factor<br>1/m | Preamp<br>dB | Cable<br>loss<br>dB | Height<br>cm | Pol.  | Restr.<br>Band | Pos. |
|------------------|--------------------------|-----------------|--------------|------------------|--------------------------|--------------|---------------------|--------------|-------|----------------|------|
| 2.480            | 94.7                     | -               | -            | 63.2             | 28.7                     | 0.0          | 2.8                 | 150          | Vert. | -              | 1    |
| 4.960            | 52.4                     | 74.0            | 21.6         | 40.7             | 33.5                     | 25.6         | 3.8                 | 150          | Hor.  | Yes            | 3    |
| 7.440            | 55.4                     | 74.0            | 18.6         | 38.6             | 36.3                     | 24.5         | 5.0                 | 150          | Hor.  | Yes            | 3    |
| 12.400           | 51.9                     | 74.0            | 22.1         | 43.0             | 33.7                     | 25.8         | 1.0                 | 100          | Hor.  | Yes            | 3    |
| 14.880           | 47.5                     | 74.7            | 27.2         | 39.5             | 33.7                     | 26.9         | 1.2                 | 100          | Hor.  | No             | 3    |
| 17.360           | 49.0                     | 74.7            | 25.7         | 40.2             | 33.8                     | 26.7         | 1.4                 | 100          | Hor.  | No             | 3    |

**Result measured with the average detector:**

| Frequency<br>GHz | Corr.<br>value<br>dBµV/m | Limit<br>dBµV/m | Margin<br>dB | Readings<br>dBµV | Antenna<br>factor<br>1/m | Preamp<br>dB | Cable<br>loss<br>dB | Height<br>cm | Pol.  | Restr.<br>Band | Pos. |
|------------------|--------------------------|-----------------|--------------|------------------|--------------------------|--------------|---------------------|--------------|-------|----------------|------|
| 2.480            | 91.9                     | -               | -            | 60.4             | 28.7                     | 0.0          | 2.8                 | 150          | Vert. | -              | 1    |
| 4.960            | 45.3                     | 54.0            | 8.7          | 33.6             | 33.5                     | 25.6         | 3.8                 | 150          | Hor.  | Yes            | 3    |
| 7.440            | 46.4                     | 54.0            | 7.6          | 29.6             | 36.3                     | 24.5         | 5.0                 | 150          | Hor.  | Yes            | 3    |
| 12.400           | 39.9                     | 54.0            | 14.1         | 31.0             | 33.7                     | 25.8         | 1.0                 | 100          | Hor.  | Yes            | 3    |
| 14.880           | 33.4                     | 71.9            | 38.5         | 25.4             | 33.7                     | 26.9         | 1.2                 | 100          | Hor.  | No             | 3    |
| 17.360           | 36.6                     | 71.9            | 35.3         | 27.8             | 33.8                     | 26.7         | 1.4                 | 100          | Hor.  | No             | 3    |

Test: Passed

**TEST EQUIPMENT USED FOR THE TEST:**

29, 31 – 37, 39, 43, 46, 49 – 51, 54

TEST REPORT REFERENCE: R62162\_A Edition 1


## 5.9 CONDUCTED EMISSIONS ON POWER SUPPLY LINES (150 kHz to 30 MHz)

### 5.9.1 METHOD OF MEASUREMENT

This test will be carried out in a shielded chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm above the ground plane. Floor-standing devices will be placed directly on the ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 150 kHz to 30 MHz will be measured with an EMI Receiver set to MAX Hold mode with peak and average detector and a resolution bandwidth of 9 kHz. A scan will be carried out on the phase (or plus pole in case of DC powered devices) of the AC mains network. If levels detected 10 dB below the appropriate limit, this emission will be measured with the average and quasi-peak detector on all lines.

| Frequency range   | Resolution bandwidth |
|-------------------|----------------------|
| 150 kHz to 30 MHz | 9 kHz                |

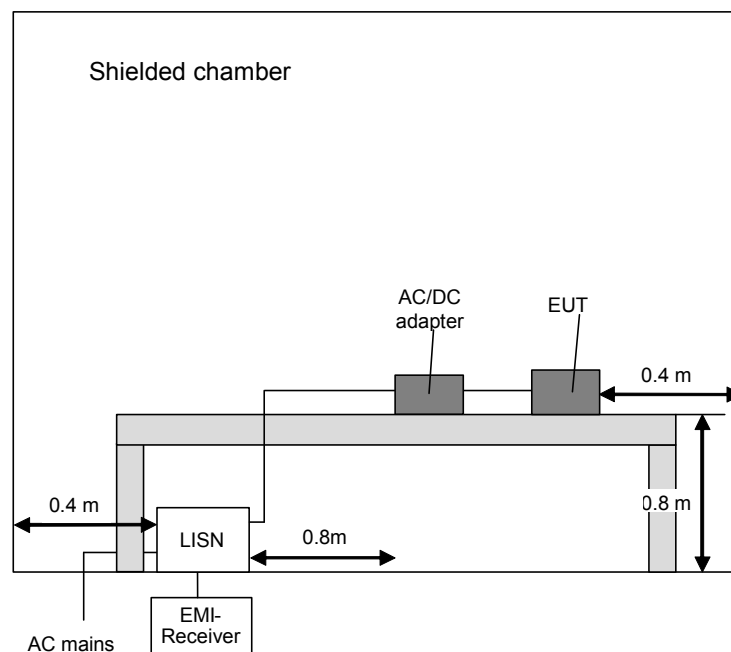

TEST REPORT REFERENCE: R62162\_A Edition 1

## 5.9.2 TEST RESULTS (CONDUCTED EMISSIONS ON POWER SUPPLY LINES)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 19 °C | Relative humidity | 42 % |
|---------------------|-------|-------------------|------|

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied with 5.0 V DC via the carrier board.

Title: AC Powerline Conducted Emission Test with protective ground conductor simulating network

EUT: cB-0907-01 with mascot power supply type 2121


Manufacturer: connectBlue AB

Operating Condition: Operation mode 2

Test site: PHOENIX TESTLAB Blomberg M4

Operator: Th. KÜHN

Test Specification:

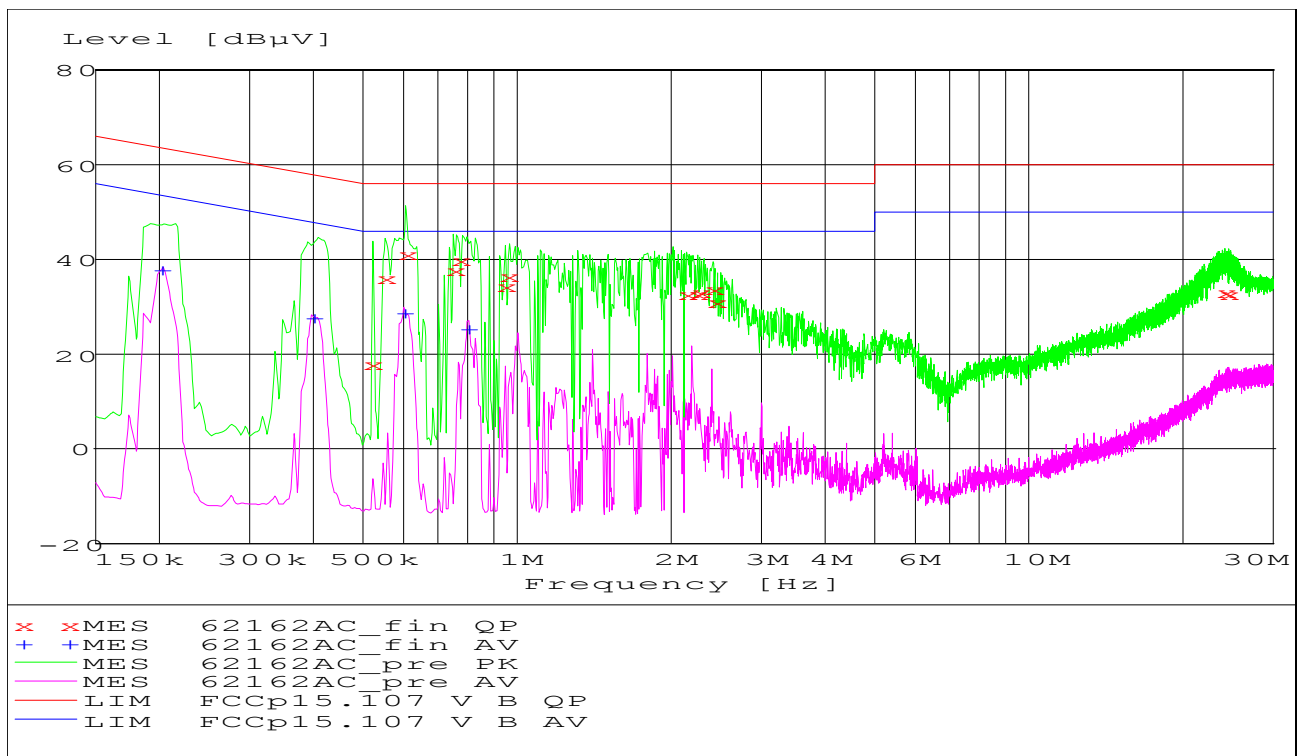

Data record name: 62162AC

TEST REPORT REFERENCE: R62162\_A Edition 1

### Result measured with the quasipeak detector:

(These values are marked in the above diagram by x)

| Frequency<br>MHz | Level<br>dBµV | Transducer<br>dB | Limit<br>dBµV | Margin<br>dB | Line | PE  |
|------------------|---------------|------------------|---------------|--------------|------|-----|
| 0.520890         | 18.40         | 0.8              | 56.0          | 37.6         | L1   | FLO |
| 0.551490         | 36.40         | 0.9              | 56.0          | 19.6         | N    | FLO |
| 0.609810         | 41.20         | 0.8              | 56.0          | 14.8         | N    | FLO |
| 0.753540         | 37.60         | 0.8              | 56.0          | 18.4         | N    | FLO |
| 0.779820         | 40.30         | 0.8              | 56.0          | 15.7         | N    | FLO |
| 0.951810         | 34.70         | 0.8              | 56.0          | 21.3         | N    | FLO |
| 0.961710         | 36.60         | 0.8              | 56.0          | 19.4         | N    | FLO |
| 2.138280         | 33.10         | 0.8              | 56.0          | 22.9         | N    | FLO |
| 2.246460         | 32.60         | 0.7              | 56.0          | 23.4         | N    | FLO |
| 2.268870         | 33.30         | 0.7              | 56.0          | 22.7         | N    | FLO |
| 2.413950         | 34.10         | 0.7              | 56.0          | 21.9         | N    | FLO |
| 2.439330         | 31.40         | 0.7              | 56.0          | 24.6         | N    | FLO |
| 24.125370        | 33.40         | 2.8              | 60.0          | 26.6         | N    | FLO |
| 24.537660        | 33.00         | 2.8              | 60.0          | 27.0         | N    | FLO |

Data record name: 62162AC\_fin QP

### Result measured with the average detector:

(These values are marked in the above diagram by +)

| Frequency<br>MHz | Level<br>dBµV | Transducer<br>dB | Limit<br>dBµV | Margin<br>dB | Line | PE  |
|------------------|---------------|------------------|---------------|--------------|------|-----|
| 0.201570         | 38.10         | 1.0              | 53.5          | 15.4         | N    | FLO |
| 0.400470         | 27.70         | 0.8              | 47.8          | 20.2         | N    | FLO |
| 0.599550         | 28.80         | 0.8              | 46.0          | 17.2         | N    | FLO |
| 0.799800         | 25.60         | 0.7              | 46.0          | 20.4         | N    | FLO |

Data record name: 62162AC\_fin AV

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

1 – 3, 5, 6

TEST REPORT REFERENCE: R62162\_A Edition 1

---

## **6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

TEST REPORT REFERENCE: R62162\_A Edition 1

| Emission measurement at AC mains and DC in / out ports at M4 |                     |                |                 |                          |                  |
|--------------------------------------------------------------|---------------------|----------------|-----------------|--------------------------|------------------|
| No.                                                          | Test equipment      | Type           | Manufacturer    | Serial No.               | PM-No            |
| 1                                                            | Shielded chamber M4 | -              | Siemens         | B83117S1-X158            | 480088           |
| 2                                                            | Measuring receiver  | ESAI           | Rohde & Schwarz | 831953/001<br>833181/018 | 480025<br>480026 |
| 3                                                            | LISN                | NSLK8128       | Schwarzbeck     | 8128155                  | 480058           |
| 4                                                            | DC-filter           | B84266-A21-E13 | Siemens         | 940164525                | 480099           |
| 5                                                            | AC-filter           | B84299-D87-E3  | Siemens         | 930262292                | 480097           |
| 6                                                            | EMI-Software        | ES-K1          | Rohde & Schwarz | -                        | 480111           |

| Radiated emission measurement at M5 |                           |          |                 |                |        |
|-------------------------------------|---------------------------|----------|-----------------|----------------|--------|
| No.                                 | Test equipment            | Type     | Manufacturer    | Serial No.     | PM-No  |
| 7                                   | Fully anechoic chamber M5 | -        | Siemens         | B83177-S1-X156 | 480073 |
| 8                                   | Measuring receiver        | ESVS30   | Rohde & Schwarz | 829673/012     | 480024 |
| 9                                   | Controller                | HD100    | Deisel          | 100/324        | 480067 |
| 10                                  | Antenna support           | MA240    | Deisel          | 228/314        | 480069 |
| 11                                  | Turntable                 | DS412    | Deisel          | 412/317        | 480070 |
| 12                                  | Antenna                   | CBL6112C | Chase           | 2689           | 480327 |
| 13                                  | EMI Software              | ES-K1    | Rohde & Schwarz | -              | 480111 |

| Radiated emission measurement at M6 |                     |           |                  |            |        |
|-------------------------------------|---------------------|-----------|------------------|------------|--------|
| No.                                 | Test equipment      | Type      | Manufacturer     | Serial No. | PM-No  |
| 14                                  | Open area test site | -         | Phoenix Test-Lab | -          | 480085 |
| 15                                  | Measuring receiver  | ESVS30    | Rohde & Schwarz  | 829673/012 | 480024 |
| 16                                  | Controller          | HD100     | Deisel           | 100/670    | 480139 |
| 17                                  | Turntable           | DS420HE   | Deisel           | 420/620/80 | 480087 |
| 18                                  | Antenna support     | AS615P    | Deisel           | 615/310    | 480086 |
| 19                                  | Antenna             | CBL6111 A | Chase            | 1643       | 480147 |
| 20                                  | EMI Software        | ES-K1     | Rohde & Schwarz  | -          | 480111 |

TEST REPORT REFERENCE: R62162\_A Edition 1

| Radiated emission measurement at M8 |                           |           |                 |                          |                  |
|-------------------------------------|---------------------------|-----------|-----------------|--------------------------|------------------|
| No.                                 | Test equipment            | Type      | Manufacturer    | Serial No.               | PM-No            |
| 21                                  | Fully anechoic chamber M8 | -         | Siemens         | B83117-E7019-T231        | 480190           |
| 22                                  | Measuring receiver        | ESMI      | Rohde & Schwarz | 843977/001<br>843530/018 | 480179<br>480180 |
| 23                                  | Measuring receiver        | ESCS 30   | Rohde & Schwarz | 828985/014               | 480270           |
| 24                                  | Controller                | HD100     | Deisel          | 100/427                  | 480181           |
| 25                                  | Turntable                 | DS420     | Deisel          | 420/435/97               | 480186           |
| 26                                  | Antenna support           | AS615P    | Deisel          | 615/310                  | 480187           |
| 27                                  | Antenna                   | CBL6112 A | Chase           | 2034                     | 480185           |
| 28                                  | EMI Software              | ES-K1     | Rohde & Schwarz | -                        | 480111           |

| Radiated emission measurement at M20 |                                           |           |                    |                          |                  |
|--------------------------------------|-------------------------------------------|-----------|--------------------|--------------------------|------------------|
| No.                                  | Test equipment                            | Type      | Manufacturer       | Serial No.               | PM-No            |
| 29                                   | Fully anechoic chamber M20                | -         | Albatross Projects | B83107-E2439-T232        | 480303           |
| 30                                   | Measuring receiver                        | ESMI      | Rohde & Schwarz    | 843977/001<br>843530/018 | 480179<br>480180 |
| 31                                   | Measuring receiver                        | ESI 40    | Rohde & Schwarz    | 100064                   | 480355           |
| 32                                   | Controller                                | HD100     | Deisel             | 100/670                  | 480326           |
| 33                                   | Turntable                                 | DS420HE   | Deisel             | 420/620/80               | 480315           |
| 34                                   | Antenna support                           | AS615P    | Deisel             | 615/310                  | 480187           |
| 35                                   | Antenna                                   | CBL6112 B | Chase              | 2688                     | 480328           |
| 36                                   | Antenna                                   | 3115 A    | EMCO               | 9609-4918                | 480183           |
| 37                                   | Standard Gain Horn<br>11.9 GHz – 18 GHz   | 18240-20  | Flann Microwave    | 483                      | 480294           |
| 38                                   | Standard Gain Horn<br>11.9 GHz – 18 GHz   | 18240-20  | Flann Microwave    | 482                      | 480295           |
| 39                                   | Standard Gain Horn<br>17.9 GHz – 26.7 GHz | 20240-20  | Flann Microwave    | 411                      | 480297           |
| 40                                   | Standard Gain Horn<br>17.9 GHz – 26.7 GHz | 20240-20  | Flann Microwave    | 410                      | 480296           |
| 41                                   | Standard Gain Horn<br>26.4 GHz – 40.1 GHz | 22240-20  | Flann Microwave    | 469                      | 480299           |

TEST REPORT REFERENCE: R62162\_A Edition 1

| No. | Test equipment                            | Type                       | Manufacturer    | Serial No. | PM-No  |
|-----|-------------------------------------------|----------------------------|-----------------|------------|--------|
| 42  | Standard Gain Horn<br>26.4 GHz – 40.1 GHz | 22240-20                   | Flann Microwave | 468        | 480298 |
| 43  | RF-cable No. 30                           | RTK 081                    | Rosenberger     | -          | 410141 |
| 44  | RF-cable No. 31                           | RTK 081                    | Rosenberger     | -          | 410142 |
| 45  | RF-cable 1m                               | KPS-1533-<br>400-KPS       | Insulated Wire  | -          | 480300 |
| 46  | RF-cable 1m                               | KPS-1533-<br>400-KPS       | Insulated Wire  | -          | 480301 |
| 47  | RF-cable 2m                               | KPS-1533-<br>400-KPS       | Insulated Wire  | -          | 480302 |
| 48  | RF-cable No. 5                            | RTK 081                    | Rosenberger     |            | 410097 |
| 49  | Preamplifier                              | JS3-<br>00101200-<br>23-5A | Miteq           | 681851     | 480337 |
| 50  | Preamplifier                              | JS3-<br>12001800-<br>16-5A | Miteq           | 571667     | 480343 |
| 51  | Preamplifier                              | JS3-<br>18002600-<br>20-5A | Miteq           | 658697     | 480342 |
| 52  | Preamplifier                              | JS3-<br>26004000-<br>25-5A | Miteq           | 563593     | 480344 |
| 53  | EMI Software                              | ES-K1                      | Rohde & Schwarz | -          | 480111 |

| Ancillary equipment used for testing |                |          |                 |            |        |
|--------------------------------------|----------------|----------|-----------------|------------|--------|
| No.                                  | Test equipment | Type     | Manufacturer    | Serial No. | PM-No  |
| 54                                   | Power supply   | TOE 8852 | Toellner        | 51712      | 480233 |
| 55                                   | Audio analyser | UPL      | Rohde & Schwarz | 845646/019 | 480226 |
| -                                    | -              | -        | -               | -          | -      |
| -                                    | -              | -        | -               | -          | -      |

All used measurement equipment was calibrated (if necessary). The calibration intervals and the calibration history will be given out on request.

TEST REPORT REFERENCE: R62162\_A Edition 1

---

## 7 LIST OF ANNEXES

|                |                                                                                                                                     |                |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------|----------------|
| <b>ANNEX A</b> | <b>PHOTOGRAPHS OF THE TEST SET-UPS:</b>                                                                                             | <b>5 pages</b> |
|                | cB-0907-01, test set-up fully anechoic chamber                                                                                      | 62162_2.jpg    |
|                | cB-0907-01, test set-up fully anechoic chamber                                                                                      | 62162_10.jpg   |
|                | cB-0907-01, test set-up fully anechoic chamber                                                                                      | 62162_12.jpg   |
|                | cB-0907-01, test set-up fully anechoic chamber                                                                                      | 62162_7.jpg    |
|                | cB-0907-01, test set-up shielded chamber                                                                                            | 62162_14.jpg   |
| <b>ANNEX B</b> | <b>INTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:</b>                                                                                     | <b>5 pages</b> |
|                | cB-0907-01, top view                                                                                                                | 62162_d.jpg    |
|                | cB-0907-01 with temporary antenna connector, top view                                                                               | 62162_e.jpg    |
|                | cB-0907-01, bottom view                                                                                                             | 62162_f.jpg    |
|                | cB-0903-03, carrier board, top view                                                                                                 | 62162_i.jpg    |
|                | cB-0903-03, carrier board, bottom view                                                                                              | 62162_h.jpg    |
| <b>ANNEX C</b> | <b>EXTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:</b>                                                                                     | <b>- pages</b> |
|                | Because the EUT is a module, which is intended to be implemented inside a final application, no external photographs were available |                |