

# SGS KES Co., Ltd. EMC Laboratory

705, Dongchun-Ri Sooji-Eub, Yongin-Shi Kyungki-Do, KOREA  
TEL.82-31-263-0409 FAX.82-31-263-0454

## FCC Part 15 Report

### Manufacture :

AILINTEC CO., LTD.  
The Third Factory(CHUNAN) 72-15 Busong-ri,  
Jiksan-Up, Chunan-Si, Chungnam, Korea  
Attn : Hang-Su, Cho

Dates of Tests : July 20 to August 16, 2002  
Test Report No. : 2002KESEMC-II-0251.FCC  
Test Site : SGS KES Co., Ltd., EMC Site,  
Korea

TYPE of EUT  
MODEL No.

**TFT-LCD DUAL MONITOR  
TM150AV**

APPLICANT

**TOPHEAD CO., LTD.**  
2F. ILDONG Pharmaceutical Building. 60  
Yangjae-Dong, Seocho-Gu, Seoul, Korea

CONTACT PERSON

Hang-Su, Cho  
Tel. / Fax. : 82-2-3462-7247/82-2-3462-8710

FCC Rule Part(s) : Part 2 & Part 15  
Classification : FCC Class B Device

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Kew - Seung, Lim  
EMC Lab. Manager

## TABLE OF CONTENTS

---

|                                                 |    |
|-------------------------------------------------|----|
| SCOPE                                           | 3  |
| INTRODUCTION (SITE DESCRIPTION)                 | 4  |
| PRODUCT INFORMATION                             | 5  |
| DESCRIPTION OF TEST (CONDUCTED)                 | 6  |
| DESCRIPTION OF TEST (RADIATED)                  | 7  |
| SUPPORT EQUIPMENT USED                          | 8  |
| TEST DATA OF CONDUCTED EMISSIONS                | 9  |
| TEST DATA OF RADIATED EMISSIONS                 | 11 |
| TEST DATA OF CONDUCTED EMISSIONS (ANT TERMINAL) | 13 |
| TEST DATA OF RADIATED EMISSIONS (TV Mode)       | 15 |
| PLOTS OF EMISSIONS                              | 17 |
| SAMPLE CALCULATIONS                             | 18 |
| ACCURACY OF MEASUREMENT                         | 19 |
| TEST EQUIPMENT                                  | 20 |
| CONCLUSION                                      | 21 |
| APPENDIX A – SAMPLE LABEL                       | 22 |

## SCOPE

---

*Scope - Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15.*

|                             |                                                    |
|-----------------------------|----------------------------------------------------|
| <b>Responsible Party* :</b> | <b>TOPHEAD CO., LTD.</b>                           |
| <b>Contact Person :</b>     | <b>Hang-Su, Cho</b>                                |
|                             | <b>Tel./Fax. : 82-2-3462-7247 / 82-2-3462-8710</b> |
| <b>Manufacturer :</b>       | <b>AILINTEC CO., LTD.</b>                          |
|                             | <b>The Third Factory(CHUNAN) 72-15 Busong-ri,</b>  |
|                             | <b>Jiksan-Up, Chunan-Si, Chungnam, Korea</b>       |

- Trade / Model : **TM150AV**
- Brand Name : **-**
- EUT Type : **TFT-LCD DUAL MONITOR**
- Classification : **FCC Class B**
- Rule Part(s) : **FCC Part 2 & Part 15 Subpart B**
- Test Procedure(s): **ANSI C63.4 (1992)**
- Dates of Test: **July 10 to August 16 2002**
- Place of Tests: **SGS KES Co., Ltd. EMC Site**
- Test Report No.: **2002KESEMC-II-0251.FCC**
- Order No. : **SKI-02-0121/E**

## INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated emissions emanating from **TOPHEAD CO., LTD.**

Model : **TM150AV**

These measurement tests were conducted at **SGS KES Co., Ltd. EMC Laboratory**.

The site address is 705, Dongchun-Ri, Sooji-Eub, Yongin-Shi, Kyungki-Do, Korea.

The area of SGS KES Co., Ltd. EMC Test Site is located in a mountain area at 45 kilometers (28 miles) southeast from Seoul National Airport (Kimpo Airport), 23 kilometers (14 miles) southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

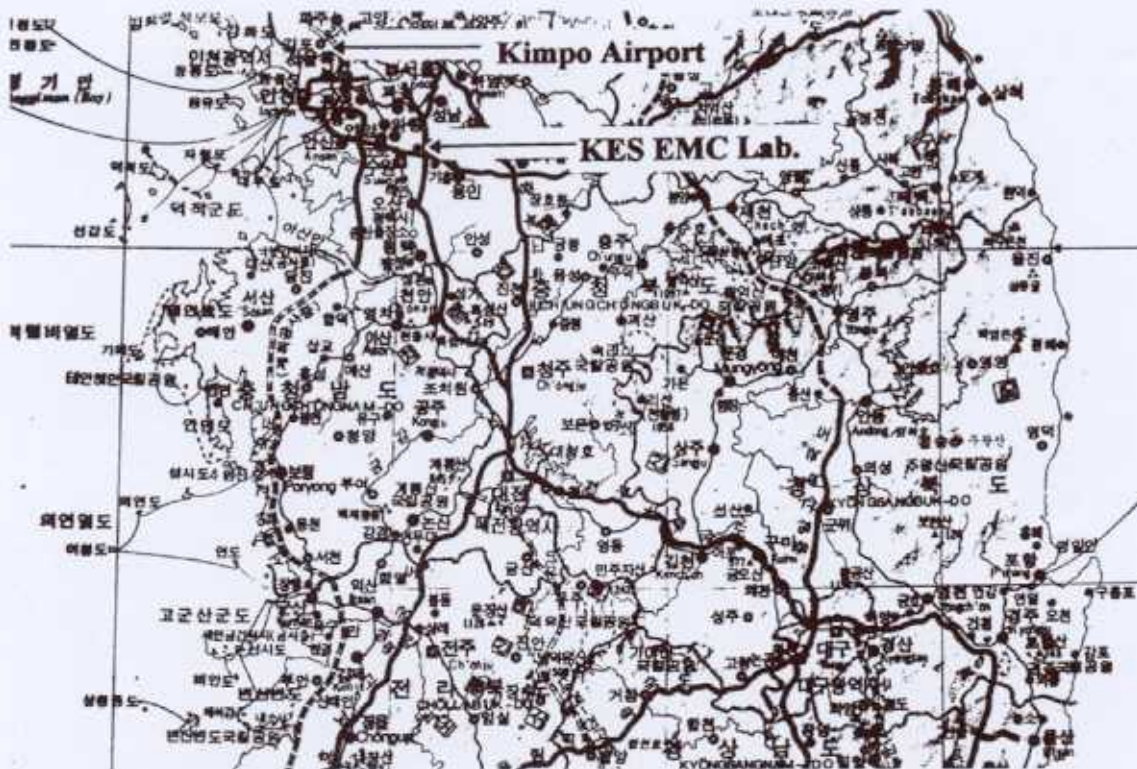


Fig. 1. The map above shows the Seoul in Korea vicinity area.  
The map also shows SGS KES Co., Ltd. EMC Lab and Kimpo Airport.

## PRODUCT INFORMATION

---

### Equipment Description:

The Equipment Under Test (EUT) is the **TOPHEAD CO., LTD.**

Model : **TM150AV**

|                  |                                                          |                                 |
|------------------|----------------------------------------------------------|---------------------------------|
| Clock :          | 12MHz, 14.31818MHz, 20.25MHz                             |                                 |
| Chipset :        | PT2313L, U207, EMH1A, AD9883A                            |                                 |
| Port(s) :        | DC IN, RGB, Audio IN, Audio Out, AV IN(L, R, V), Antenna |                                 |
| Power            |                                                          |                                 |
| Consumption :    | AC 110V, 60Hz                                            |                                 |
| Main Board :     | Model : TM150AV-15<br>(N/A)                              | S/N : N/A                       |
| SUB Board :      | Model : TM150AV_64A<br>(N/A)                             | S/N : N/A                       |
| Remote           | Model : N/A                                              | S/N : N/A                       |
| Controller :     | (N/A)                                                    |                                 |
| Main LCD Panel : | Model : M150X3-L01<br>(CHI MEI OPTOELECTRONICS)          | S/N : 12C120C23S40004           |
| SUB LCD Panel :  | Model : P64CN1<br>(PROME VIEW)                           | S/N : P64CN1AP06C300<br>000361A |
| Inverter :       | AT-0150XH<br>(N/A)                                       | S/N : N/A                       |
| Power Supply :   | Model : DTA-SXGA03<br>(Display Technology Co., Ltd.)     | S/N : 000048                    |
| I/O Board :      | Model : TM150AV_IO_R<br>(N/A)                            | S/N : N/A                       |
| OSD Board :      | Model : TM150AV_KEY<br>(N/A)                             | S/N : N/A                       |

EUT operating mode :

- Display " H " Pattern.

EMI suppression device(s) added and/or modified during testing:

- none

## DESCRIPTION OF TESTS

### Conducted Emissions

The line-conducted facility is located inside a 3.0x6.0x2.5 shielded enclosure. It is manufactured by Daeil EMC Engineering. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1mx1.5m. wooden table 0.8m. height is placed 0.4m. away from the vertical wall and 1.5m away from the side wall of the shielded room. PMM L3-25, L1-150 and EMCO Model 3825-2 (10kHz-30MHz) 50 $\Omega$  /50  $\mu$ H Line Impedance Stabilization Networks (LISNs) are bonded to the shielded room. The EUT is powered from the PMM LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Sangshin power line filters (100dB 14kHz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the PMM LISN. LISN schematic diagram is shown in Figure 2. All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 450 kHz to 30 MHz with 20 msec sweep time. The frequency producing the maximum level was reexamined using EMI/Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode. The bandwidth of the receiver was set to 10 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; which ever determined the worst-case emission. Photographs of the worst-case emission can be seen in Appendix C. Each EME reported was calibrated using the R/S SMG signal generator.

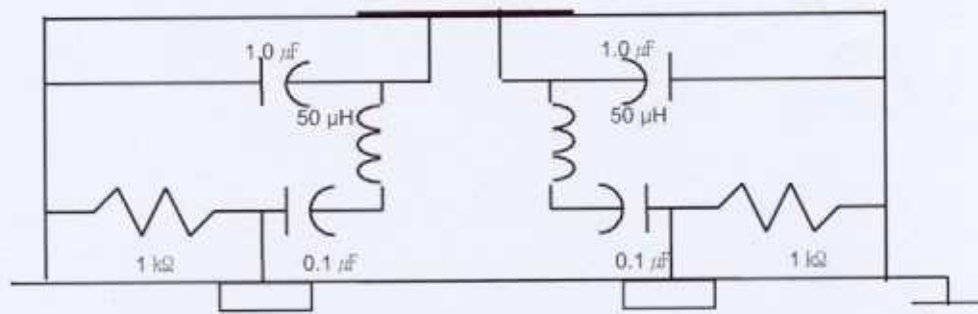


Fig. 2. LISN Schematic Diagram

### **Radiated Emissions**

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were note for each frequency found. The spectrum was scanned from 30 to 300 MHz using biconical antenna and 300 to 1000 MHz using log-periodic antenna.

Final measurements were made outdoors at 3 meter test range. The test equipment was placed on a wooden and plastic bench situated on a 1.5x2 meter area adjacent to measurement area. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was reexamined and investigated using EMI/Field Intensity Meter. The detector function was set to average mode and the bandwidth of the receiver was set to 100 kHz or 1 MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1x1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Appendix C. Each EME reported was calibrated using the R/S SMG signal generator.

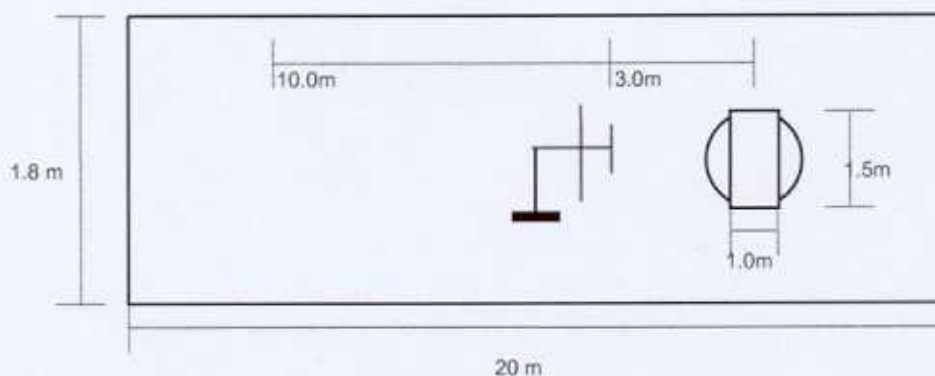


Fig. 3. Dimensions of Outdoor Test Site


## SUPPORT EQUIPMENT USED

|                 |                                                     |                    |
|-----------------|-----------------------------------------------------|--------------------|
| Printer :       | Model : BJC-2100SP<br>(CANON)                       | S/N : CME010503120 |
| PS/2 Mouse :    | Model : M-S34<br>(LOGITECH)                         | S/N : LZB84212596  |
| Keyboard :      | Model : SEM-DT35<br>(SAMSUNG Electronics Co., Ltd.) | S/N : 94040111     |
| MIC/HEADPHONE : | Model : CD-2MV5<br>(Hi-Sonic)                       | S/N : N/A          |
| DVD Player :    | Model : DVD-5100<br>(SANYO ELECTRIC (She Kou) Ltd.) | S/N : P060022      |

### ● User Interface Cable List

| Start |                | END                    |          | Cable Spec. |            |
|-------|----------------|------------------------|----------|-------------|------------|
| Type  | I/O Port       | Type                   | I/O Port | Length(m)   | Shield     |
| EUT   | DC IN          | Adapter                | -        | 1.2         | Unshielded |
|       | RGB            | PC                     | -        | 1.8         | Shielded   |
|       | Audio In       | PC                     | Speaker  | 2.0         | Unshielded |
|       | Audio Out      | Headset                | -        | 2.0         | Unshielded |
|       | AV IN(L, R, V) | DVD Player             | -        | 1.8         | Shielded   |
|       | Antenna        | TV Patten<br>Generator | -        | 2.5         | Unshielded |
| PC    | Video          | EUT                    | -        | 1.8         | Shielded   |
|       | Parallel       | Printer                | -        | 1.8         | Shielded   |
|       | Keyboard       | Keyboard               | -        | 1.7         | Shielded   |
|       | PS/2 Mouse     | PS/2 Mouse             | -        | 1.7         | Shielded   |
|       | Speaker        | EUT                    | Line In  | 2.0         | Unshielded |
|       | MIC            | EUT                    | Line Out | 2.0         | Unshielded |

### ● Test set-up for test

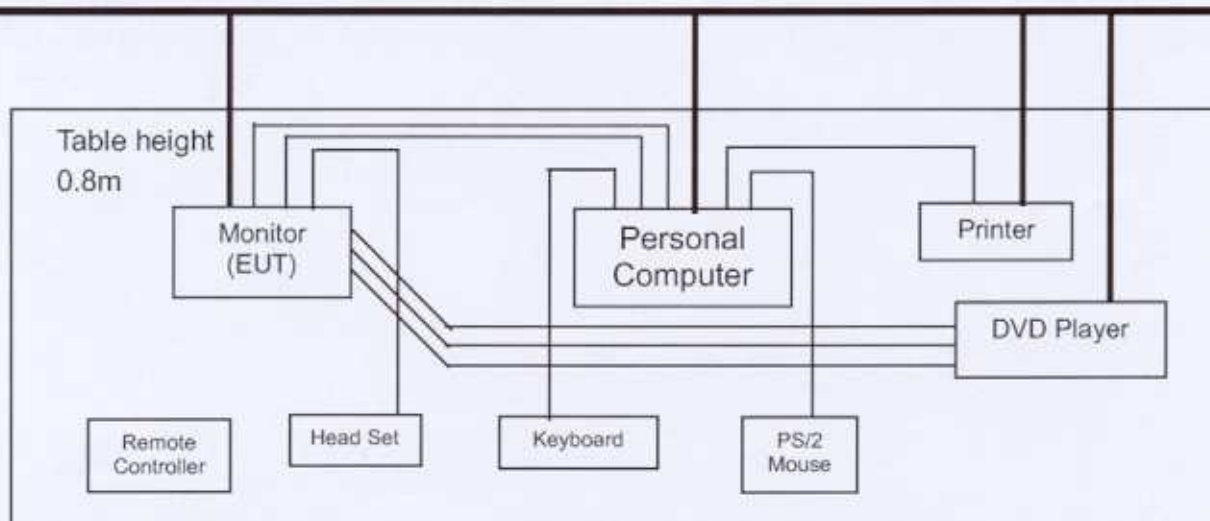

## TEST DATA

### Conducted Emissions

Company : TOPHEAD CO., LTD.

Model No. : TM150AV

Date of Test : 30 July 2002

Measure Bandwidth : 9kHz

Mode : RGB

| FREQ (MHz) | LEVEL(dB $\mu$ V) | LINE | LIMIT( $\mu$ V) | ( $\mu$ V) | MARGIN*(dB) |
|------------|-------------------|------|-----------------|------------|-------------|
| 0.48       | 36.5              | N    | 250             | 66.83      | 11.5        |
| 1.77       | 36.0              | N    | 250             | 63.10      | 12.0        |
| 2.25       | 36.0              | H    | 250             | 63.10      | 12.0        |
| 2.32       | 39.0              | H    | 250             | 89.13      | 9.0         |
| 2.45       | 38.5              | H    | 250             | 84.14      | 9.5         |
| 2.67       | 37.0              | H    | 250             | 70.79      | 11.0        |

Table 1. Line Conducted Emissions Tabulated Data

#### NOTES:

1. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
2. The limit for Class B digital device is 250  $\mu$ V from 450 kHz to 30MHz.
3. Line H = Hot                      Line N = Neutral

\* Measurements using CISPR quasi-peak mode



Tested by See - Ho, Lee

# TEST DATA

## Conducted Emissions

Company : TOPHEAD CO., LTD.

Model No. : TM150AV

Date of Test : 30 July 2002

Measure Bandwidth : 9kHz

Mode : Video


| FREQ (MHz) | LEVEL(dB $\mu$ V) | LINE | LIMIT( $\mu$ V) | ( $\mu$ V) | MARGIN*(dB) |
|------------|-------------------|------|-----------------|------------|-------------|
| 2.38       | 38.0              | N    | 250             | 79.43      | 10.0        |
| 2.44       | 37.0              | N    | 250             | 70.79      | 11.0        |
| 2.51       | 37.5              | N    | 250             | 74.99      | 10.5        |
| 6.90       | 38.0              | H    | 250             | 79.43      | 10.0        |
| 7.58       | 38.0              | H    | 250             | 79.43      | 10.0        |
| 11.64      | 37.5              | H    | 250             | 74.99      | 10.5        |

Table 2. Line Conducted Emissions Tabulated Data

### NOTES:

1. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
2. The limit for Class B digital device is 250  $\mu$ V from 450 kHz to 30MHz.
3. Line H = Hot                      Line N = Neutral

\* Measurements using CISPR quasi-peak mode

  
 Tested by See - Ho, Lee

## TEST DATA

### Radiated Emissions

Company : TOPHEAD CO., LTD.

Model No. : TM150AV

Date of Test : 12 August 2002

Measure Bandwidth : 120kHz

Mode : RGB

| Freq.<br>(MHz) | Level<br>(dB $\mu$ V) | AF*<br>(dB) | CL**<br>(dB) | POL<br>(H/V) | Limit<br>( $\mu$ V/m) | F/S<br>( $\mu$ V/m) | Margin***<br>(dB) |
|----------------|-----------------------|-------------|--------------|--------------|-----------------------|---------------------|-------------------|
| 62.92          | 25.30                 | 5.21        | 1.72         | V            | 100.00                | 40.88               | 7.77              |
| 71.05          | 27.40                 | 5.88        | 2.20         | V            | 100.00                | 59.41               | 4.52              |
| 74.25          | 20.10                 | 6.32        | 2.20         | V            | 100.00                | 26.97               | 11.38             |
| 114.64         | 16.40                 | 11.08       | 2.02         | V            | 150.00                | 46.00               | 14.00             |
| 141.68         | 15.80                 | 11.47       | 2.70         | V            | 150.00                | 31.52               | 13.53             |
| 865.00         | 9.60                  | 23.17       | 9.12         | V            | 200.00                | 124.28              | 4.11              |

Table 3. Radiated Measurements at 3meters.

\* AF = Antenna Factor.

\*\* CL = Cable Loss.

\*\*\* Margin=Each Frequency Limit Level(dBuV) - (Level+AF+CL)

Note : Not Detectable 1GHz above



Tested by See - Ho, Lee

**TEST DATA****Radiated Emissions**

Company : TOPHEAD CO., LTD.

Model No. : TM150AV

Date of Test : 12 August 2002

Measure Bandwidth : 120kHz

Mode : Video

| Freq.<br>(MHz) | Level<br>(dB $\mu$ V) | AF*<br>(dB) | CL**<br>(dB) | POL<br>(H/V) | Limit<br>( $\mu$ V/m) | F/S<br>( $\mu$ V/m) | Margin***<br>(dB) |
|----------------|-----------------------|-------------|--------------|--------------|-----------------------|---------------------|-------------------|
| 62.99          | 25.00                 | 5.21        | 1.72         | V            | 100.00                | 39.49               | 8.07              |
| 71.05          | 27.30                 | 5.88        | 2.20         | V            | 100.00                | 58.73               | 4.62              |
| 74.25          | 20.30                 | 6.32        | 2.20         | V            | 100.00                | 27.60               | 11.18             |
| 141.68         | 15.20                 | 11.47       | 2.70         | V            | 150.00                | 46.00               | 14.13             |
| 314.90         | 12.60                 | 13.32       | 4.63         | V            | 200.00                | 33.69               | 15.45             |
| 865.00         | 9.10                  | 23.17       | 9.12         | V            | 200.00                | 117.33              | 4.61              |

Table 4. Radiated Measurements at 3meters.

\* AF = Antenna Factor.

\*\* CL = Cable Loss.

\*\*\* Margin=Each Frequency Limit Level(dBuV) - (Level+AF+CL)

Note : Not Detectable 1GHz above



Tested by See - Ho, Lee

# TEST DATA

## Conducted Emission (Antenna Terminal)

Company : TOPHEAD Co., Ltd.

Model No. : TM150AV

Date of Test : 16 August 2002

Measurement Bandwidth : 120kHz

| Channel  | Freq.<br>(MHz) | Level<br>(dB $\mu$ V) | Correction<br>Factor*<br>(dB) | Result<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V) | Margin**<br>(dB) |
|----------|----------------|-----------------------|-------------------------------|--------------------------|-----------------------|------------------|
| CH2      | 101.00         | -                     | 13.41                         | 13.41                    | 50                    | 36.59            |
| (55.25)  | 202.00         | -                     | 14.41                         | 14.41                    | 50                    | 35.59            |
|          | 303.00         | -                     | 15.59                         | 15.59                    | 50                    | 34.41            |
|          | 404.00         | -                     | 18.62                         | 18.62                    | 50                    | 31.38            |
| CH3      | 107.00         | -                     | 13.47                         | 13.47                    | 50                    | 36.53            |
| (61.25)  | 214.00         | -                     | 14.51                         | 14.51                    | 50                    | 35.49            |
|          | 321.00         | -                     | 16.72                         | 16.72                    | 50                    | 33.28            |
|          | 428.00         | -                     | 19.34                         | 19.34                    | 50                    | 30.66            |
| CH4      | 113.00         | -                     | 13.50                         | 13.50                    | 50                    | 36.50            |
| (67.25)  | 226.00         | -                     | 14.60                         | 14.60                    | 50                    | 35.40            |
|          | 339.00         | -                     | 16.41                         | 16.41                    | 50                    | 33.59            |
|          | 678.00         | -                     | 29.64                         | 29.64                    | 50                    | 20.36            |
| CH5      | 123.00         | -                     | 13.50                         | 13.50                    | 50                    | 36.50            |
| (77.25)  | 246.00         | 11.3                  | 14.60                         | 25.90                    | 50                    | 24.10            |
|          | 369.00         | 2.4                   | 17.33                         | 19.73                    | 50                    | 30.27            |
|          | 492.00         | -                     | 21.14                         | 21.14                    | 50                    | 28.86            |
| CH6      | 129.00         | -                     | 13.50                         | 13.50                    | 50                    | 36.50            |
| (83.25)  | 258.00         | -                     | 14.72                         | 14.72                    | 50                    | 35.28            |
|          | 387.00         | -                     | 18.39                         | 18.39                    | 50                    | 31.61            |
| CH7      | 221.00         | -                     | 14.56                         | 14.56                    | 50                    | 35.44            |
| (175.25) | 442.00         | -                     | 19.45                         | 19.45                    | 50                    | 30.55            |
|          | 663.00         | -                     | 27.90                         | 27.90                    | 50                    | 22.10            |
| CH8      | 227.00         | -                     | 14.60                         | 14.60                    | 50                    | 35.40            |
| (181.25) | 454.00         | -                     | 20.11                         | 20.11                    | 50                    | 29.89            |
|          | 681.00         | -                     | 29.90                         | 29.90                    | 50                    | 20.10            |
| CH9      | 233.00         | -                     | 14.60                         | 14.60                    | 50                    | 35.40            |
| (187.25) | 466.00         | -                     | 20.40                         | 20.40                    | 50                    | 29.60            |
|          | 699.00         | -                     | 32.08                         | 32.08                    | 50                    | 17.92            |

| Channel  | Freq.<br>(MHz) | Level<br>(dB $\mu$ V) | Correction<br>Factor*<br>(dB) | Result<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V) | Margin**<br>(dB) |
|----------|----------------|-----------------------|-------------------------------|--------------------------|-----------------------|------------------|
| CH10     | 239.00         | 11.2                  | 14.60                         | 25.80                    | 50                    | 24.20            |
| (193.25) | 478.00         | -                     | 20.78                         | 20.78                    | 50                    | 29.22            |
|          | 717.00         | -                     | 36.82                         | 36.82                    | 50                    | 13.18            |
| CH11     | 245.00         | 12.3                  | 14.60                         | 26.90                    | 50                    | 23.10            |
| (199.25) | 490.00         | 5.6                   | 21.12                         | 26.72                    | 50                    | 23.28            |
|          | 735.00         | -                     | 41.72                         | 41.72                    | 50                    | 8.28             |
| CH12     | 248.00         | 6.9                   | 15.24                         | 22.14                    | 50                    | 27.86            |
| (205.25) | 496.00         | 4.3                   | 21.28                         | 25.58                    | 50                    | 24.42            |
|          | 744.00         | -                     | 44.16                         | 44.16                    | 50                    | 5.84             |
| CH21     | 559.00         | -                     | 22.16                         | 22.16                    | 50                    | 27.84            |
| (513.25) |                |                       |                               |                          |                       |                  |
| CH26     | 589.00         | -                     | 6.91                          | 6.91                     | 50                    | 43.09            |
| (243.25) |                |                       |                               |                          |                       |                  |
| CH31     | 619.00         | -                     | 7.15                          | 7.15                     | 50                    | 42.85            |
| (573.25) |                | -                     |                               |                          |                       |                  |
| CH36     | 649.00         | -                     | 7.39                          | 7.39                     | 50                    | 42.61            |
| (603.25) |                |                       |                               |                          |                       |                  |
| CH46     | 709.00         | -                     | 7.87                          | 7.87                     | 50                    | 42.13            |
| (663.25) |                |                       |                               |                          |                       |                  |
| CH51     | 739.00         | -                     | 8.11                          | 8.11                     | 50                    | 41.89            |
| (693.25) |                | -                     |                               |                          |                       |                  |
| CH61     | 799.00         | -                     | 8.59                          | 8.59                     | 50                    | 41.41            |
| (753.25) |                |                       |                               |                          |                       |                  |
| CH69     | 847.00         | -                     | 8.98                          | 8.98                     | 50                    | 41.02            |
| (801.25) |                |                       |                               |                          |                       |                  |

Table 5. Antenna Terminal Conducted Emission Data

\* Correction Factor : Matching Pad Loss + 3 Way Splitter

\*\*Margin : Limit Level(dB  $\mu$ V)-(Level +MPL)


Tested by See - Ho, Lee

# TEST DATA

## Radiated Emissions (TV Mode)

Company : TOPHEAD Co., Ltd.

Model No. : TM150AV

Date of Test : 16 August 2002

|          | Freq.<br>(MHz) | Level<br>(dB $\mu$ N) | AF*<br>(dB) | CL**<br>(dB) | Result<br>(dB $\mu$ N /m) | Limit<br>( $\mu$ N /m) | Margin<br>(dB) |
|----------|----------------|-----------------------|-------------|--------------|---------------------------|------------------------|----------------|
| CH2      | 101.00         | -                     | 9.94        | 2.28         | 12.22                     | 43.5                   | 31.28          |
| (55.25)  | 202.00         | -                     | 8.63        | 3.42         | 12.06                     | 43.5                   | 31.44          |
|          | 303.00         | -                     | 13.11       | 4.53         | 17.64                     | 46.0                   | 28.36          |
|          | 404.00         | -                     | 15.78       | 5.43         | 21.21                     | 46.0                   | 24.79          |
| CH3      | 107.00         | -                     | 10.47       | 2.16         | 12.63                     | 43.5                   | 30.87          |
| (61.25)  | 214.00         | -                     | 9.13        | 3.57         | 12.69                     | 43.5                   | 30.81          |
|          | 321.00         | -                     | 13.46       | 4.69         | 18.15                     | 46.0                   | 27.80          |
|          | 428.00         | -                     | 16.57       | 5.62         | 22.20                     | 46.0                   | 23.80          |
| CH4      | 113.00         | -                     | 10.99       | 2.04         | 13.03                     | 43.5                   | 30.47          |
| (67.25)  | 226.00         | -                     | 9.69        | 3.71         | 13.40                     | 46.0                   | 32.60          |
|          | 339.00         | -                     | 13.97       | 4.85         | 18.82                     | 46.0                   | 27.18          |
|          | 678.00         | -                     | 20.38       | 7.62         | 28.00                     | 46.0                   | 18.00          |
| CH5      | 123.00         | 5.6                   | 11.71       | 2.32         | 19.63                     | 43.5                   | 23.87          |
| (77.25)  | 246.00         | -                     | 11.95       | 3.95         | 15.90                     | 46.0                   | 30.10          |
|          | 369.00         | -                     | 14.63       | 5.12         | 19.75                     | 46.0                   | 26.25          |
|          | 492.00         | -                     | 17.51       | 6.14         | 23.64                     | 46.0                   | 22.36          |
| CH6      | 129.00         | 5.9                   | 11.71       | 2.60         | 20.21                     | 43.5                   | 23.29          |
| (83.25)  | 258.00         | 4.3                   | 13.33       | 4.08         | 21.71                     | 46.0                   | 24.29          |
|          | 387.00         |                       | 15.16       | 5.28         | 20.45                     | 46.0                   | 25.55          |
| CH7      | 221.00         | 7.3                   | 9.42        | 3.65         | 20.37                     | 46.0                   | 25.63          |
| (175.25) | 442.00         |                       | 16.73       | 5.74         | 22.47                     | 46.0                   | 23.53          |
|          | 663.00         |                       | 20.38       | 7.50         | 27.89                     | 46.0                   | 18.11          |
| CH8      | 227.00         | -                     | 9.81        | 3.72         | 13.53                     | 46.0                   | 32.47          |
| (181.25) | 454.00         | -                     | 16.80       | 5.83         | 22.72                     | 46.0                   | 23.28          |
|          | 681.00         | -                     | 20.42       | 7.65         | 28.06                     | 46.0                   | 17.94          |
| CH9      | 233.00         | 3.6                   | 10.48       | 3.80         | 17.88                     | 46.0                   | 28.12          |
| (187.25) | 466.00         | -                     | 17.08       | 5.93         | 23.00                     | 46.0                   | 23.00          |
|          | 699.00         | -                     | 20.65       | 7.79         | 28.44                     | 46.0                   | 17.56          |
| CH10     | 239.00         | 5.9                   | 11.16       | 3.87         | 20.93                     | 46.0                   | 25.07          |
| (193.25) | 478.00         |                       | 17.27       | 6.02         | 23.29                     | 46.0                   | 22.71          |
|          | 717.00         | -                     | 21.46       | 7.94         | 29.40                     | 46.0                   | 16.60          |
| CH11     | 245.00         | 3.6                   | 11.84       | 3.94         | 19.38                     | 46.0                   | 26.62          |
| (199.25) | 490.00         | 2.1                   | 17.47       | 6.12         | 25.69                     | 46.0                   | 20.31          |
|          | 735.00         | -                     | 22.06       | 8.08         | 30.14                     | 46.0                   | 15.86          |

|          | Freq.<br>(MHz) | Level<br>(dB $\mu$ V) | AF*<br>(dB) | CL**<br>(dB) | Result<br>(dB $\mu$ V/m) | Limit<br>( $\mu$ V/m) | Margin***<br>(dB) |
|----------|----------------|-----------------------|-------------|--------------|--------------------------|-----------------------|-------------------|
| CH12     | 248.00         | -                     | 12.17       | 3.98         | 16.15                    | 46.0                  | 29.85             |
| (205.25) | 496.00         | -                     | 17.57       | 6.17         | 23.74                    | 46.0                  | 22.26             |
|          | 744.00         | -                     | 22.25       | 8.15         | 30.40                    | 46.0                  | 15.60             |
| CH21     | 559.00         | 2.9                   | 20.06       | 6.67         | 29.63                    | 46.0                  | 16.37             |
| (61.25)  | 1118.00        | 11.3                  | 24.37       | 3.22         | 38.89                    | 54.0                  | 15.11             |
| CH26     | 589.00         | 3.6                   | 19.78       | 6.91         | 30.30                    | 46.0                  | 15.70             |
| (243.25) | 1178.00        | 12.3                  | 24.37       | 3.22         | 39.89                    | 54.0                  | 14.11             |
| CH31     | 619.00         | 2.6                   | 20.41       | 7.15         | 30.16                    | 46.0                  | 15.84             |
| (573.25) | 1238.00        | 10.9                  | 24.90       | 3.35         | 39.15                    | 54.0                  | 14.85             |
| CH36     | 649.00         | 3.1                   | 20.44       | 7.39         | 30.93                    | 46.0                  | 15.07             |
| (603.25) | 1298.00        | 10.6                  | 24.90       | 3.35         | 38.85                    | 54.0                  | 15.15             |
| CH46     | 709.00         | 12.4                  | 21.08       | 7.87         | 41.36                    | 46.0                  | 3.64              |
| (663.25) | 1418.00        | -                     | 25.76       | 3.60         | 29.36                    | 54.0                  | 24.64             |
| CH51     | 739.00         | -                     | 22.14       | 8.11         | 30.25                    | 46.0                  | 15.75             |
| (693.25) | 1464.00        | 14.3                  | 25.76       | 3.60         | 43.66                    | 54.0                  | 10.34             |
| CH61     | 799.00         | 3.2                   | 21.98       | 8.59         | 33.77                    | 46.0                  | 12.23             |
| (753.25) | 1584.30        | 12.6                  | 25.28       | 3.72         | 41.60                    | 54.0                  | 12.40             |
| CH69     | 847.00         | 3.0                   | 23.30       | 8.98         | 35.27                    | 46.0                  | 10.73             |
| (801.25) | 1680.00        | 11.9                  | 24.80       | 3.97         | 40.67                    | 54.0                  | 13.33             |

Table 6. Radiated Measurements at 3meters

\* AF = Antenna Factor.

\*\* CL = Cable Loss.

\*\*\* Margin=Each Frequency Limit Level(dBuV) - (Level+AF+CL)



Tested by See - Ho, Lee

## PLOTS OF EMISSIONS

---

P M M 8 0 1 0 for Windows

Name:

Date: 02-07-30

Time: 14:02

MHz

.45

1

10

30

120

dBμV

100

80

60

40

20

0

Limit : Fcc\_15\_b

Detector: Peak

Input None

MODEL: TM150AV

LINE: NEUTRAL

MODE: VIDEO

OPERATOR: S.H.LEE


P M M 8 0 1 0 for Windows

Name :

Date: 02-07-30

Time: 13:44

MHz

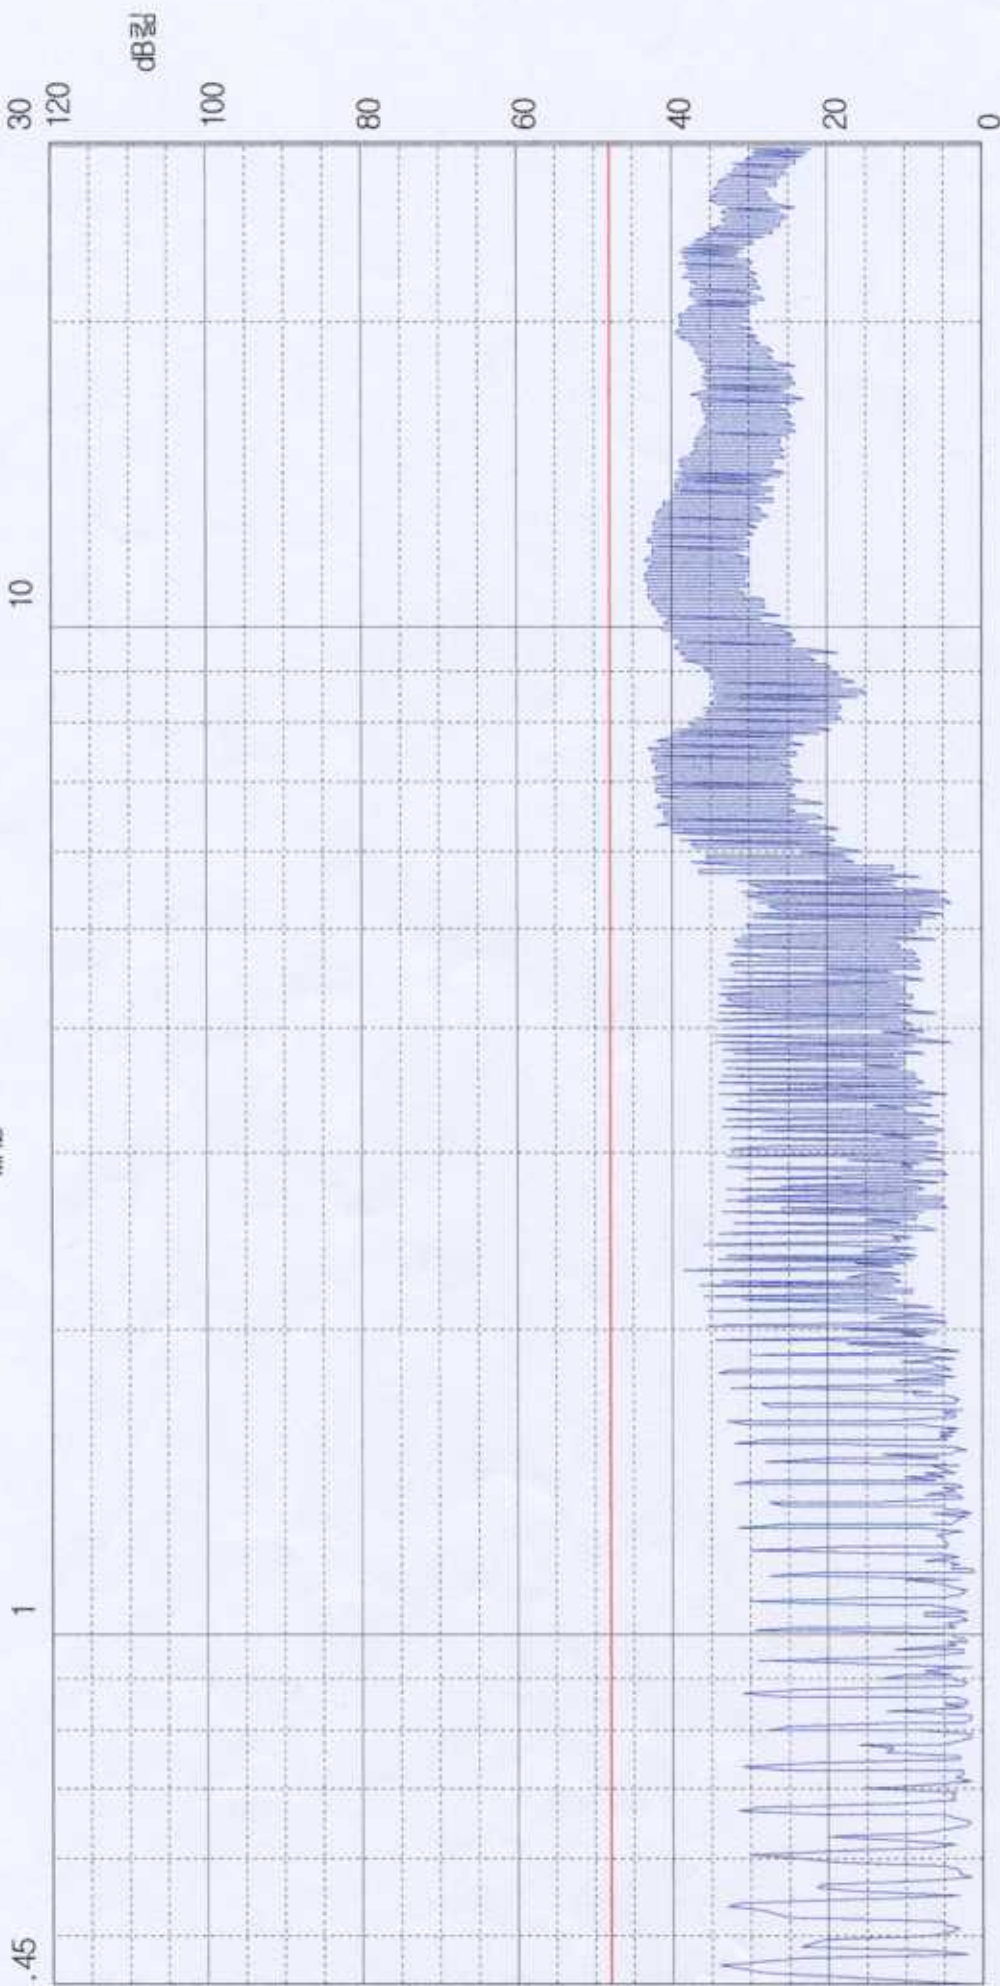

Limit : Fcc\_15\_b

Detector: Peak

Input None

MODEL: TM150AV

LINE: HOT

MODE: VIDEO

OPERATOR: S.H.LEE


P M M 8 0 1 0 for Windows

Name:

Date: 02-07-30

Time: 13:26

MHz

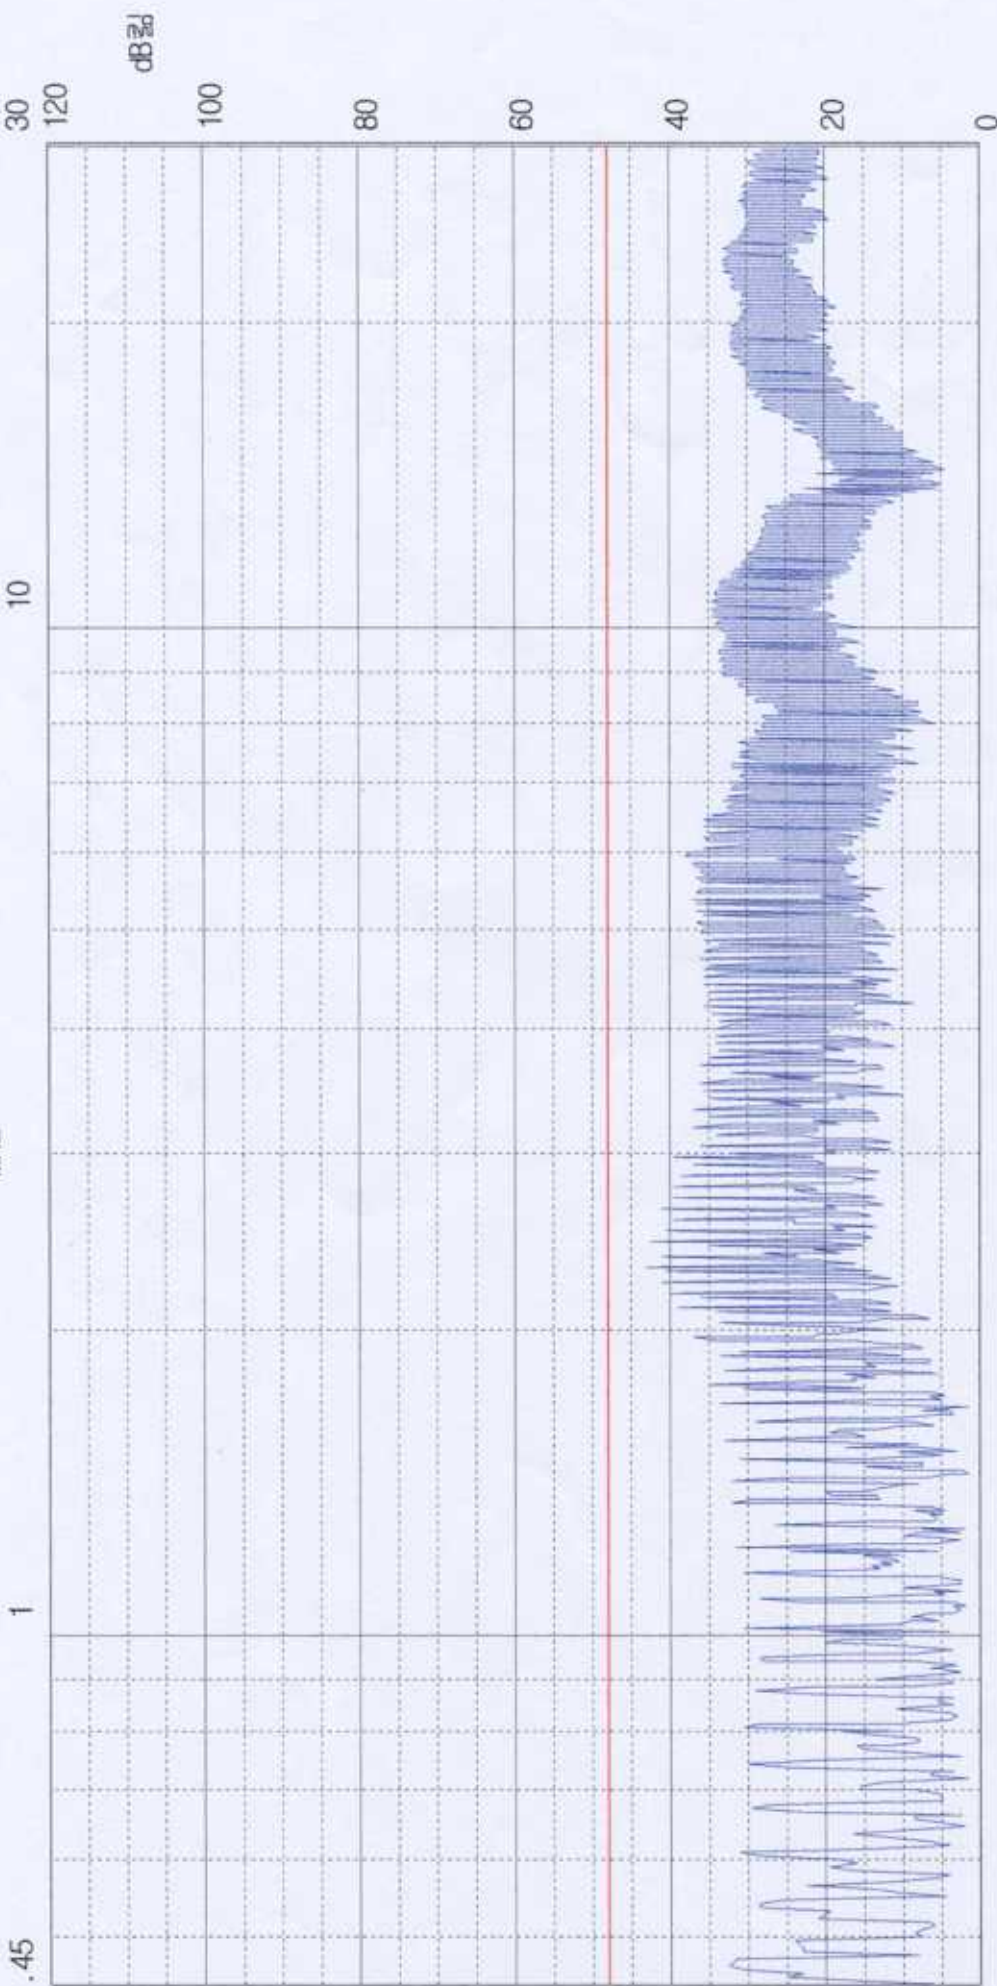

Limit : Fcc\_15\_b

Detector: Peak

Input None

MODEL: TM150AV

LINE: HOT

MODE: RGB

OPERATOR: S.H.LEE


P M M 8 0 1 0 for Windows

Name:

Date: 02-07-30

Time: 13:13

MHz

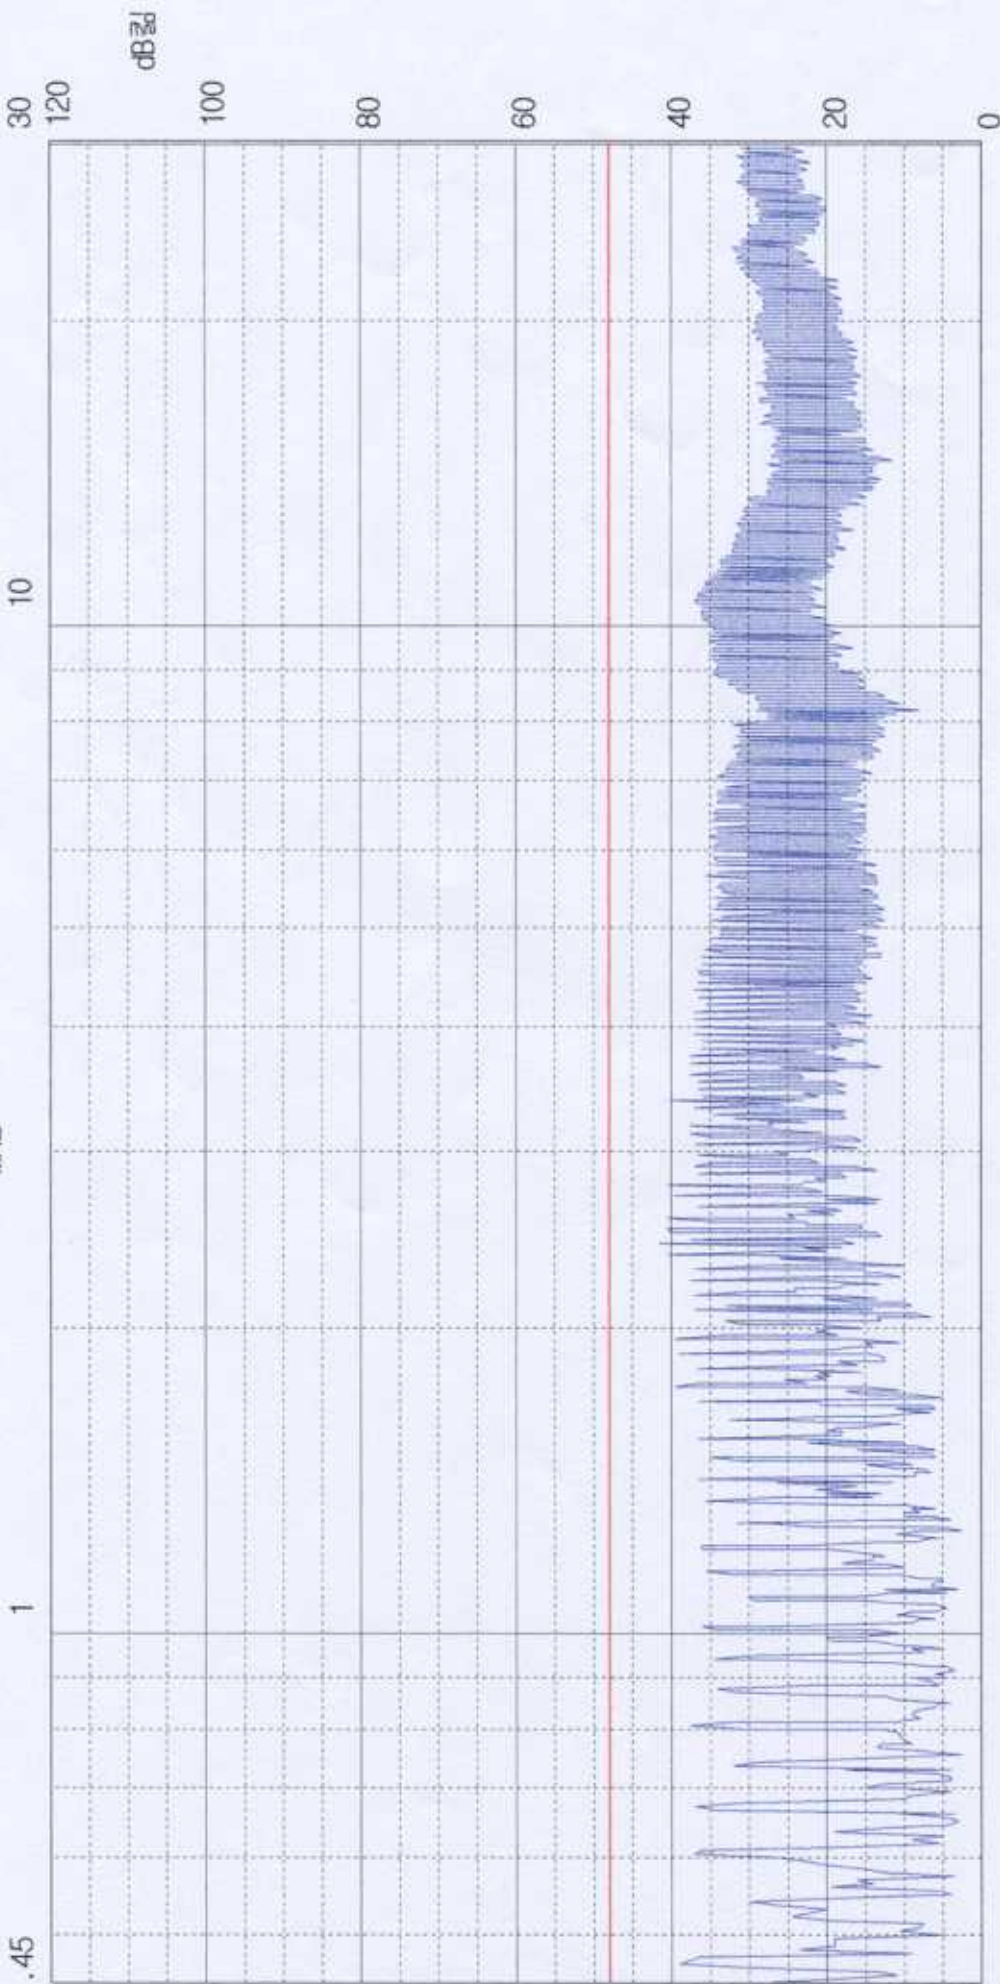

Input None

Detector: Peak

Limit : Fcc\_15\_b

MODEL: TM150AV

LINE: NEUTRAL

MODE: RGB

OPERATOR: S.H.LEE

## SAMPLE CALCULATIONS

---

$$\text{dB } \mu\text{V} = 20 \log_{10} (\mu\text{V}/\text{m})$$

$$\mu\text{V} = 10^{(\text{dB } \mu\text{V}/20)}$$

### EX. 1.

@20.3 MHz

Class B limit =  $250 \mu\text{V} = 48.0 \text{ dB } \mu\text{V}$

Reading =  $40.8 \text{ dB } \mu\text{V}$  (calibrated level)

$$10^{(40.8/20)} = 109.64 \mu\text{V}$$

$$\text{Margin} = 48.0 - 40.8 = 7.2$$

7.2 dB below limit

### EX. 2.

@57.7 MHz

Class B limit =  $100 \mu\text{V}/\text{m} = 40.0 \text{ dB } \mu\text{V}/\text{m}$

Reading =  $19.1 \text{ dB } \mu\text{V}$  (calibrated level)

Antenna factor + Cable Loss =  $10.12 \text{ dB}$

Total =  $29.22 \text{ dB } \mu\text{V}/\text{m}$

$$\text{Margin} = 40.0 - 29.22 = 10.78$$

10.78 dB below the limit

## ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 with the confidence level of 95%

| Contribution                                      | Distribution  | Uncertainties |          |
|---------------------------------------------------|---------------|---------------|----------|
|                                                   |               | 3 m           | 10 m     |
| Field Strength Monitor                            | Gaussian (2s) | +/- 0.5       | +/- 0.5  |
| Field Strength Variation                          | Rectangular   | +/- 1.2       | +/- 1.5  |
| Random                                            | Gaussian (1s) | +/- 0.7       | +/- 0.7  |
| Total Uncertainty@95% min. confidence probability |               | +/- 1.91      | +/- 2.11 |

Measurement Uncertainty Calculations:

$$U = 2 \sqrt{S^2_{s1} + S^2_{s2} + \dots + S^2_{sr}}$$

## TEST EQUIPMENT

---

### Conducted Emission

| Equipment       | Manufactory | Model  | Cal. Date |
|-----------------|-------------|--------|-----------|
| Signal Analyzer | PMM         | 8010   | Sep. 2001 |
| LISN            | PMM         | 3825/2 | Apr. 2002 |
| LISN            | PMM         | 3825/2 | Apr. 2002 |
| Pulse Limiter   | PMM         | PL-01  | Jul. 2002 |
| Shielded Room   | Daeil       | N/A    | -         |

### Radiated Emission

| Equipment         | Manufactory | Model    | Cal. Date |
|-------------------|-------------|----------|-----------|
| Test Receiver     | R & S       | ESVS30   | Nov. 2001 |
| Spectrum Analyzer | H.P         | E4411A   | Dec. 2001 |
| RF Amplifier      | H.P         | 8447F    | May. 2002 |
| Bilog Antenna     | SCHAFFNER   | CBL6111C | Apr. 2002 |
| RF Select s/w     | DAIWA       | CS201    | Apr. 2002 |

## CONCLUSION

---

The test results collected show that the EUT

**Company : TOPHEAD CO., LTD.                      Model : TM150AV**

complies with § 15.107 and 15.109 of the FCC Rules.

**Mode : RGB**

The highest emission observed was at 2.32MHz for conducted emissions with a margin of 9.0dB and at 865.0MHz for radiated emissions with a margin of 4.11dB.

**Mode : Video**

The highest emission observed was at 2.38MHz & 6.90MHz & 7.58MHz for conducted emissions with a margin of 9.0dB and at 865.0MHz for radiated emissions with a margin of 4.61dB.

## APPENDIX A – SAMPLE LABEL

---

### Labelling Requirements

The sample label shown shall be *permanently affixed* at a conspicuous location on the unit and be readily visible to the user at the time of purchase.

**TFT-LCD DUAL MONITOR**

**Model : TM150AV**

**TOPHEAD CO., LTD.**

**FCC ID : PVPTM150AV**

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES.  
OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:  
(1)THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE AND  
(2)THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED,  
INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE  
OPERATION.