

TEST REPORT

PINEAPPLE TECHNOLOGY INC. UTX5KW TV TRANSMITTER TECHNICAL REPORT

INTRODUCTION

The following information is provided to support the technical performance of the Pineapple Technology UTX5KW TV Transmitter. The information is supplied for broadcast TV service according to applicable portions of Part 73 and 74.

1. Power Output Measurements as indicated by FCC Rule Part 2.1046.
2. Frequency Measurements as identified by FCC Rule Part 2.1055.
3. Visual Frequency response measurements of the transmitter to be within the window specified by FCC Rule Part 74.750.
4. Occupied BW of aural signal specified by FCC Rule Part 2.1079.
5. Aural frequency response as identified by FCC Rule Part 73.687
6. Measurement of conducted harmonics and spurs +/- 3 MHz outside of channel as specified by FCC Rule Part 74.750 and Part 2 Rule 2.1051.
7. Measurement of cabinet radiation of spurs and harmonics as specified in FCC Rule 2.1053 and 2.1057.
8. Measurements of voltage and current to final amp stage as outlined in FCC Rule 2.1033.

Measurements were conducted at transmitter output visual power output levels of 4700 watts peak of sync and 1340 watts peak of sync and constitute the range of power for which type certification is sought. The corresponding aural power levels are 470 watts and 134 watts.

The test equipment used for the measurements on the next few pages is listed at the back of this exhibit. All test equipment was calibrated prior to the use of the equipment by the supplier of the test equipment.

RF POWER OUTPUT

The equipment was configured as below shown in Figure 1. The loss through the RF output cable and directional coupler and attenuator was calibrated at the frequency of 577 MHz. The TSG-90 video generator was configured to produce a signal with 0 IRE video and sync. The audio generator and aural carrier were not energized. The visual portion of the transmitter was energized and the power was increased to the desired output power. The power was read on the Bird Calorimeter and a reference level was established on the HP8595E Spectrum Analyzer. The TV demodulator and VM-700 were used to verify that sync compression was not causing distortion of the measurement. The aural carrier was energized and its output level was then raised to meet the precise 10 dB Visual/aural power ratio as observed on the spectrum analyzer. Pictures were also taken of demodulated video of the horizontal sync, and 2 fields of video to verify no signal distortions were present over the 1340 watt to 4.70 kwatt power level range where certification is being sought.

POWER OUTPUT

Calorimeter reading at high power.




Peak of sync power = 2.80×1.68
= 4.70 kwatts

Calorimeter reading at low power.




Peak of sync power = 0.80×1.68
= 1.34 kwatts

TEST EQUIPMENT CONFIGURATION

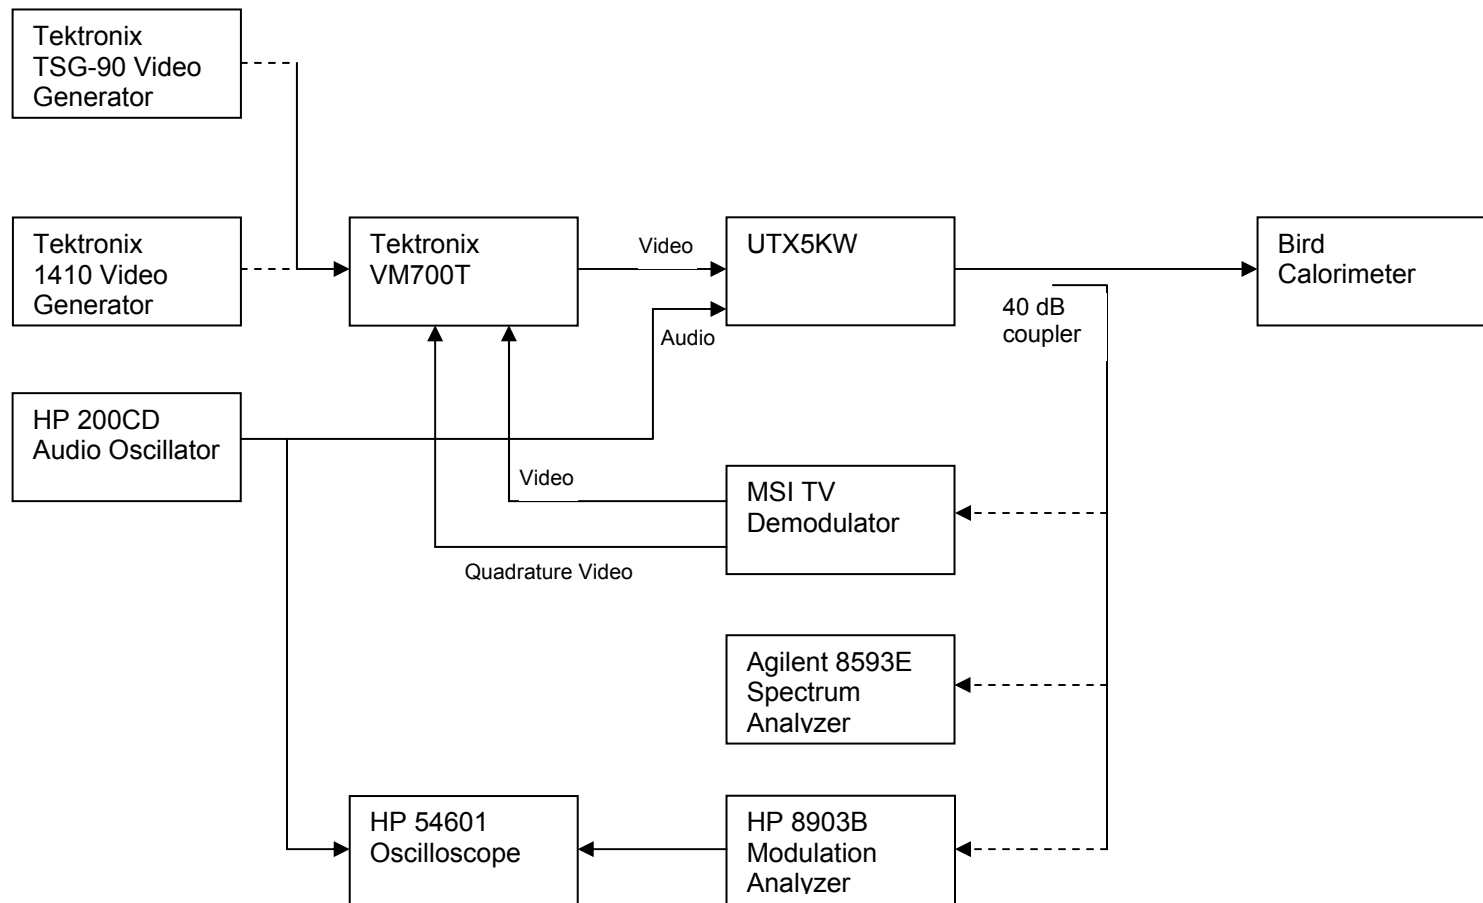


Dashed line indicates only one instrument connected at a time.

POWER OUTPUT ON SPECTRUM ANALYZER (showing 10 dB V/A Ratio)

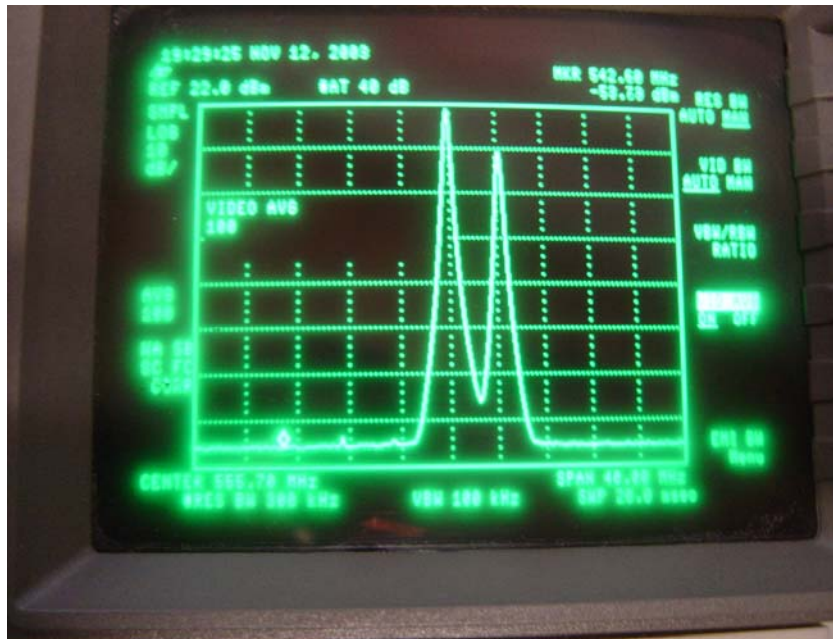

**TWO HORIZONTAL LINES AND TWO FIELDS SHOWING
CORRECT MODULATION DEPTH FOR REFERENCE WHITE
AND SYNC LEVELS AT 4.7 KW**

Power Output = 4.70 kwatts

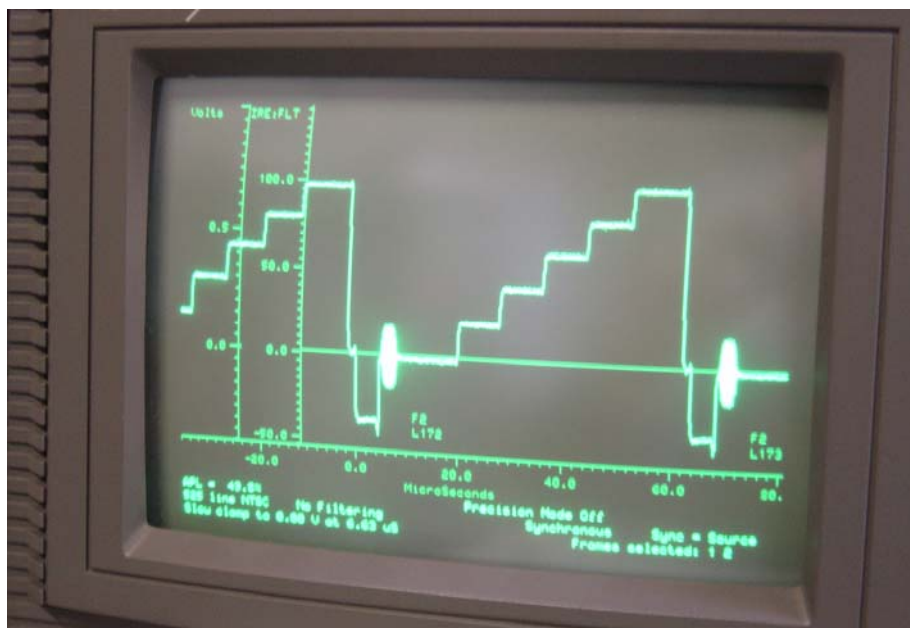

Power Output = 4.70 kwatts

