

TABLE OF CONTENTS LIST

APPLICANT: INNO TELECOM CO., LTD.

FCC ID: PWF400

TEST REPORT:

PAGE 1.....	COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.
PAGE 2.....	TECHNICAL DESCRIPTION CONTINUED & RF POWER OUTPUT
PAGE 3.....	MODULATION CHARACTERISTICS & OCCUPIED BANDWIDTH
PAGE 4.....	AUDIO FREQUENCY RESPONSE GRAPH
PAGE 5.....	MODULATION LIMITING PLOT - 300 Hz
PAGE 6.....	MODULATION LIMITING PLOT - 1000 Hz
PAGE 7.....	MODULATION LIMITING PLOT - 3000 Hz
PAGE 8.....	AUDIO LOW PASS FILTER GRAPH
PAGE 9.....	OCCUPIED BANDWIDTH PLOTS
PAGE 10.....	UNWANTED RADIATION
PAGE 11.....	METHOD OF MEASURING SPURIOUS EMISSIONS
PAGE 12.....	FREQUENCY STABILITY
PAGE 13.....	LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT 1.....	FCC ID LABEL SAMPLE
EXHIBIT 2.....	SKETCH OF LABEL LOCATION
EXHIBIT 3A.....	EXTERNAL PHOTOGRAPHS
EXHIBIT 3B-3C.....	INTERNAL COMPONENT VIEW PHOTOGRAPH
EXHIBIT 3D-3E.....	INTERNAL COPPER VIEW PHOTOGRAPH
EXHIBIT 4.....	BLOCK DIAGRAM
EXHIBIT 5.....	SCHEMATICS
EXHIBIT 6.....	USER'S MANUAL
EXHIBIT 7.....	CIRCUIT DESCRIPTION
EXHIBIT 8.....	TEST SET UP PHOTO

APPLICANT: INNO TELECOM CO., LTD.

FCC ID: PWF400

REPORT #: I\INNO\832XAK1\832XAK1TESTREPORT.doc

PAGE #: TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED
FOR CERTIFICATION

2.1033(c)(1)(2) INNO TELECOM CO., LTD. will manufacture the
FCCID: PWF400 GMRS CHANNELS
TRANSCIVER in quantity, for use under FCC RULES
PART 95.

INNO TELECOM CO., LTD.
503 5F SAMYOUNG B/D 2nd
604-19 GURU-DONG, GURU-GU, SEOUL, KOREA

2.1033 (c) TECHNICAL DESCRIPTION

2.1033(c)(3) Instruction book. A draft copy of the instruction
manual is included as EXHIBIT 6.

2.1033(c) (4) Type of Emission: 9K5F3E
95.631

$B_n = 2M + 2DK$

$M = 3000$

$D = 1.75K$

$B_n = 2(3.0) + 2(1.75) = 9.5K$

Authorized Bandwidth 20.0KHz

2.1033(c)(5) Frequency Range: 462.5625 - 462.7250 MHz
95.621

2.10311c)(6)(7) The Maximum Output Power Rating:
2.0 Watts

2.1033(c)(8) DC Voltages and Current into Final Amplifier:
FINAL AMPLIFIER ONLY

INPUT POWER: $(6.0V)(.890A) = 5.34$ Watts

2.1033(c)(9) Tune-up procedure. The tune-up procedure is included
in the users manual.


APPLICANT: INNO TELECOM CO., LTD.

FCC ID: PWF400

REPORT #: I\INNO\832XAK1\832XAK1TESTREPORT.doc

PAGE #: 1 OF 13

- 2.1033(c)(10) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 5 of this report. The block diagrams are included as EXHIBIT 4 of this report.
- 2.1033(c)(11) A photograph or a drawing of the equipment identification label is included as exhibit No. 1.
- 2.1033(c)(12) Photographs(8"X10") of the equipment of sufficient clarity to reveal equipment construction and layout, including meters, labels for controls, including any view under shields. See exhibits 3A-3E.
- 2.1033(c)(13) Digital modulation is not allowed.
- 2.1033(c)(14) The data required by 2.1046 through 2.1057 is submitted below.
- 95.639 Power Output shall not exceed 50.0 Watts effective radiated power. There can be no provisions for
- 95.649 increasing the power or varying the power. RF power output.
- 2.1046(a) RF power is measured by connecting a 50 ohm, resistive watt meter to the RF output connector. With a nominal battery voltage of 6.0 V, and the transmitter properly adjusted the RF output measures:
- OUTPUT POWER: 2.0 Watts
- 2.1046(a) RF power output. The test procedure used was TIA/EIA-603 S2.2.1.

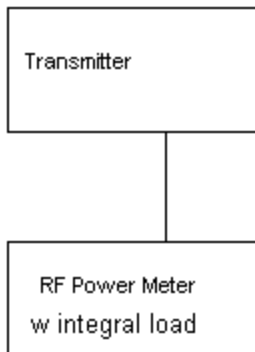

2.1047(a)(b) Modulation characteristics:

AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured. See page 4.

2.1047(b)

Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are on the following pages. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz. See pages 5-7.

95.637

Post Limiter Filter Each GMRS transmitter, except a mobile station transmitter with a power of 2.5Watts or less, must be equipped with an audio low pass filter. At any frequency between 3 & 20KHz the filter must have an attenuation of $60\log(f/3)$ greater than the attenuation at 1KHz. See page 8


2.1049


Occupied bandwidth:

95.635(b)(1)(3)(7)

At least 25dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. At least 35 dB on any frequency removed from the center of the authorized BW by more than 100% up to and including 250% of the authorized BW. At least $43 + \log_{10}(T)$ on any frequency removed from the center of the authorized bandwidth by more than 250%. See page 9.

Occupied BW Test Equipment Setup

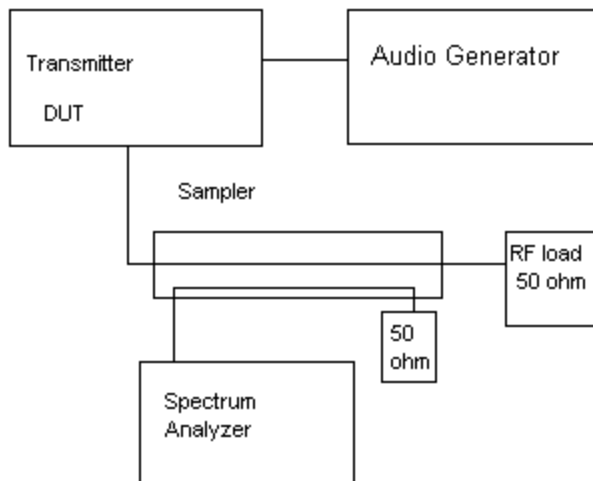

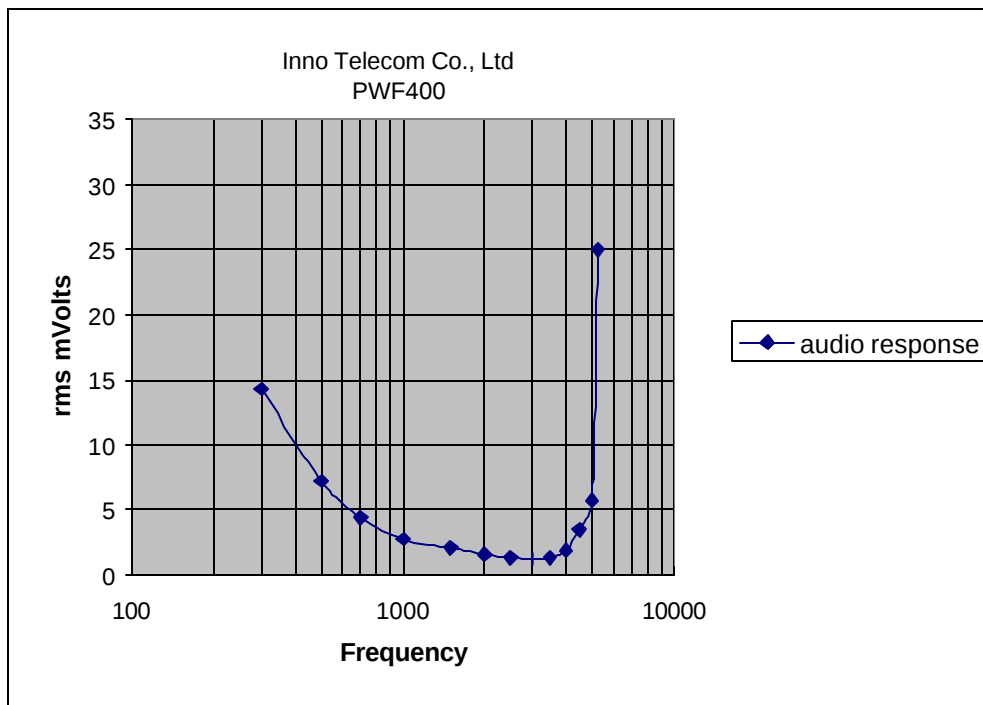


APPLICANT: INNO TELECOM CO., LTD.

FCC ID: PWF400

REPORT #: I\INNO\832XAK1\832XAK1TESTREPORT.doc

PAGE #: 4 OF 13

Modulation Limiting
Inno Telecom Co., Ltd
PWF400

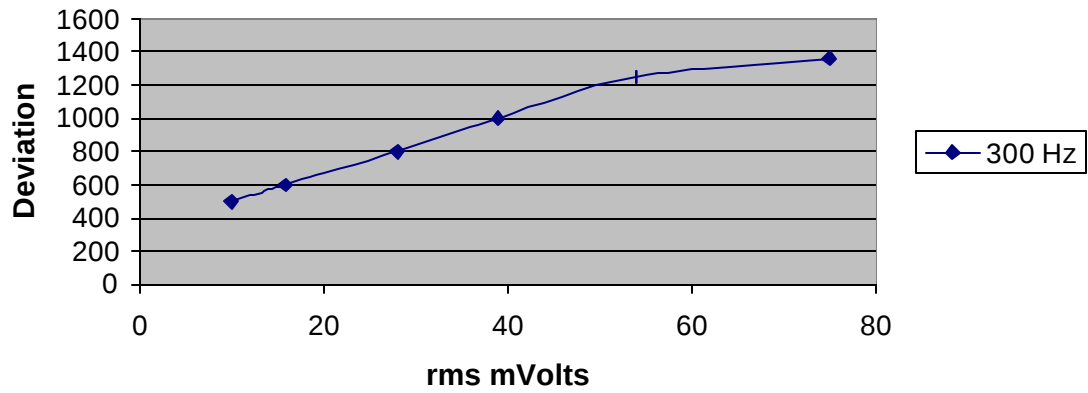


APPLICANT: INNO TELECOM CO., LTD.

FCC ID: PWF400

REPORT #: I\INNO\832XAK1\832XAK1TESTREPORT.doc

PAGE #: 5 OF 13

Modulation Limiting
Inno Telecom Co., Ltd
PWF400

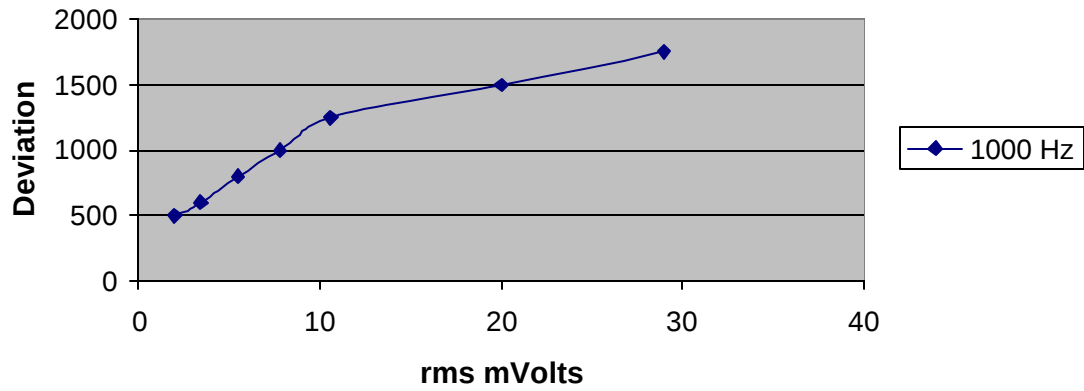


APPLICANT: INNO TELECOM CO., LTD.

FCC ID: PWF400

REPORT #: I\INNO\832XAK1\832XAK1TESTREPORT.doc

PAGE #: 6 OF 13

Modulation Limiting
Inno Telecom Co., Ltd
PWF400

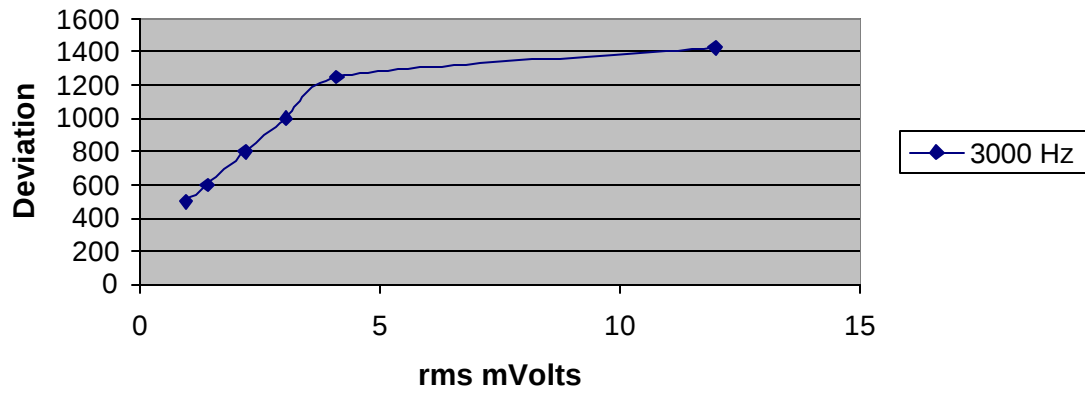


APPLICANT: INNO TELECOM CO., LTD.

FCC ID: PWF400

REPORT #: I\INNO\832XAK1\832XAK1TESTREPORT.doc

PAGE #: 7 OF 13

* Audio Low Pass Filter Graph

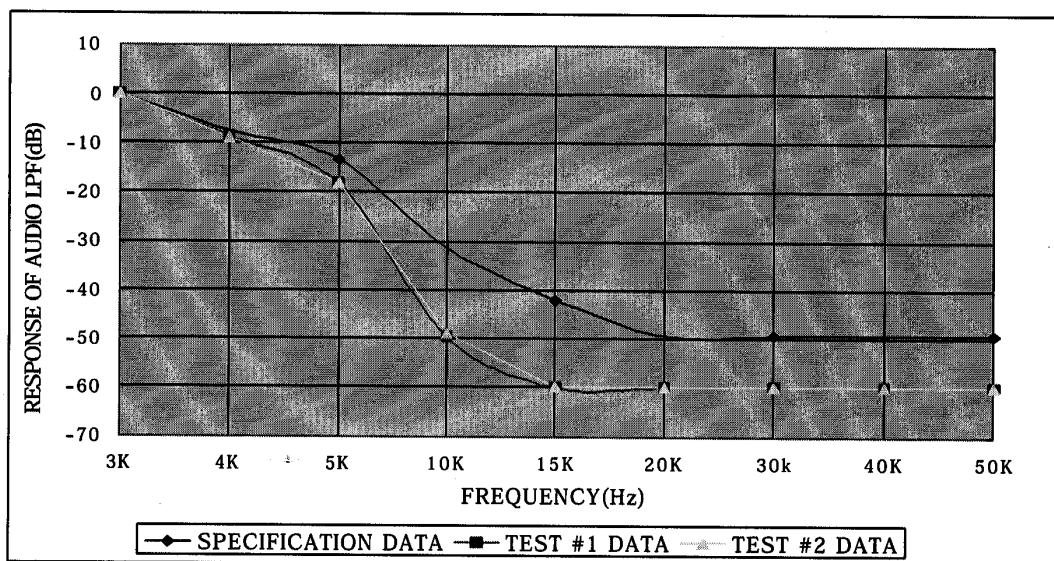


APPLICANT: INNO TELECOM CO., LTD.

FCC ID: PWF400


REPORT #: I\INNO\832XAK1\832XAK1TESTREPORT.doc

PAGE #: 8 OF 13

Occupied Bandwidth - CW

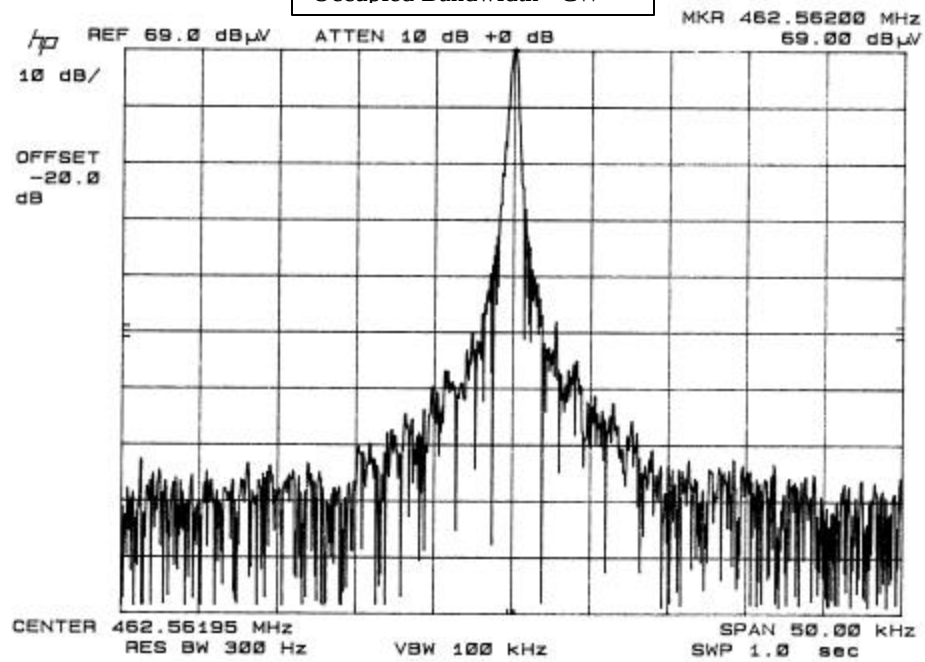

Occupied Bandwidth

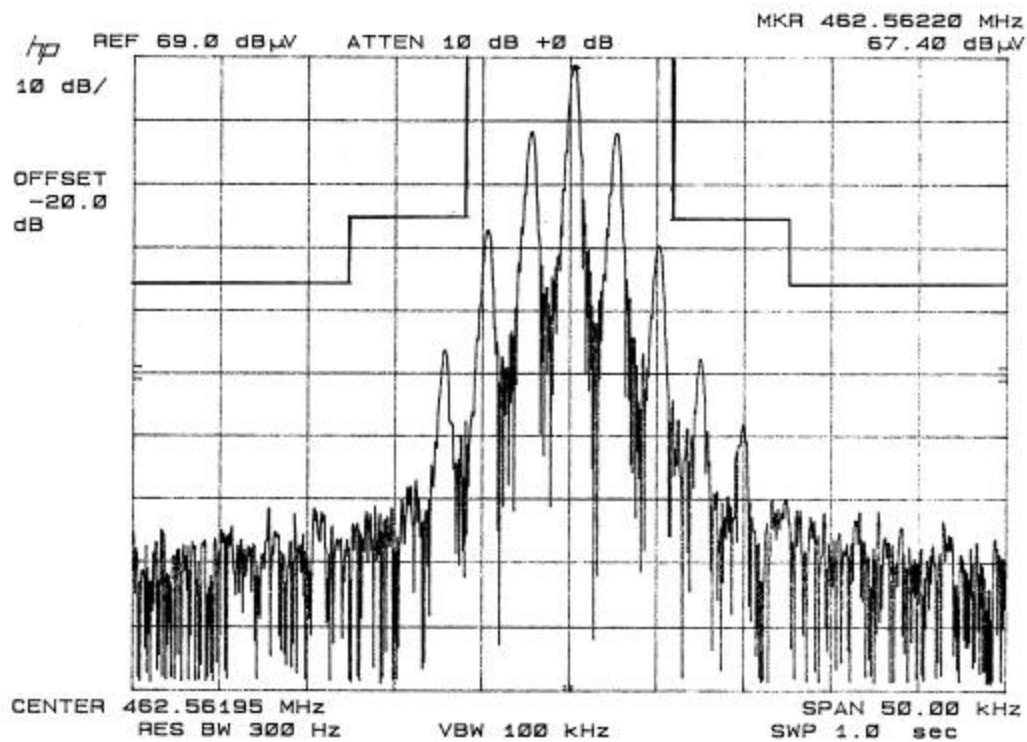

APPLICANT: INNO TELECOM CO., LTD.

FCC ID: PWF400

REPORT #: I\INNO\832XAK1\832XAK1TESTREPORT.doc

PAGE #: 9 OF 13

2.1053
95.635(b)

UNWANTED RADIATION:

The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the 10th harmonic of the fundamental. This test was conducted per ANSI C63.4-1992.

REQUIREMENTS: HIGH POWER: $43 + 10\log(2.0) = 46.00$ dB

TEST DATA:

Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Field Strength dBuV/m	Attn dB	Margin dB
462.60	109.5	V	3.10	17.81	130.41	0.00	0.00
925.30	35.4	V	1.95	24.61	61.96	68.45	22.45
1,388.00	29.9	V	3.00	27.26	60.16	70.25	24.25
1,850.70	25.5	V	3.00	28.45	56.95	73.40	27.46
2,313.40	14.9	V	3.80	28.82	47.52	82.89	37.54
2,776.00	15.4	H	3.80	29.97	49.17	81.24	35.24
3,238.70	25.5	H	4.80	30.89	61.19	69.22	23.22
3,701.40	18.1	H	4.80	31.91	54.81	75.60	29.60
4,164.10	12.3	H	6.20	33.33	51.83	78.58	32.58
4,626.80	8.6	H	6.20	33.64	48.44	81.97	35.97

METHOD OF MEASUREMENT: The procedure used was TIA/EIA 603. The measurements were made at the test site located at TIMCO ENGINEERING INC. 849 NW State Road 45 Newberry, Florida 32669.

APPLICANT: INNO TELECOM CO., LTD.

FCC ID: PWF400


REPORT #: I\INNO\832XAK1\832XAK1TESTREPORT.doc

PAGE #: 10 OF 13

APPLICANT : INNO TELECOM CO., LTD.

FCC ID : PWF400

Method of Measuring Radiated Spurious Emissions

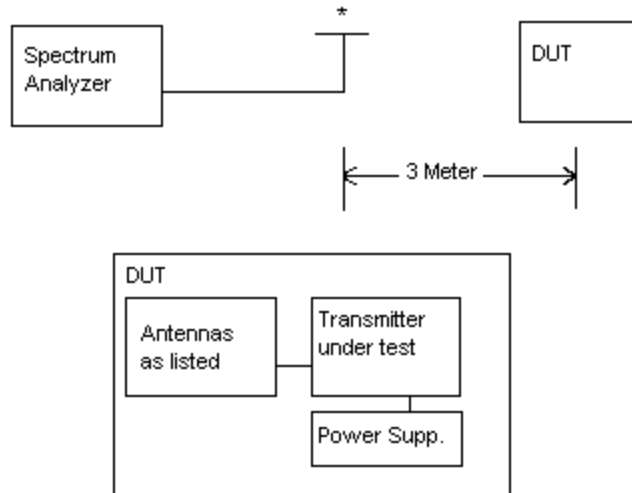

Equipment placed 80cm above ground
on a rotatable platform.

* Appropriate antenna raised from 1 to 4 M.

2.1055

Frequency stability:

95.621(b)

Temperature and voltage tests were performed to verify that the frequency remains within the 0.0005%, 5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus and minus 15% of the battery voltage of 6.0 VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 462.587 500

TEMPERATURE	CFREQUENCY_MHz	PPM
REFERENCE_____	462.587500	00.00
-30C_____	462.587481	-0.04
-20C_____	462.588866	2.96
-10C_____	462.589533	4.40
0C_____	462.589665	4.69
10C_____	462.589184	3.65
20C_____	462.588328	1.79
30C_____	462.587450	-0.11
40C_____	462.586893	-1.31
50C_____	462.586551	-2.05

BATT. %	BATT. DATA	VOLTS	BATT. PPM
-15%	462.587564	5.1	0.14
+15%	462.587634	6.9	0.29

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -2.05 to +4.69 ppm. The maximum frequency variation with voltage was 0.29 ppm.

APPLICANT: INNO TELECOM CO., LTD.

FCC ID: PWF400

REPORT #: I\INNO\832XAK1\832XAK1TESTREPORT.doc

PAGE #: 12 OF 13

APPLICANT: INNO TELECOM CO., LTD.
FCC ID: PWF400

TEST EQUIPMENT LIST

1. Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372
2. Biconnical Antenna: Eaton Model 94455-1, S/N 1057
3. Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171
4. Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
5. Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409
6. Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,
1-18 GHz, S/N 2319
7. 18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20
8. Horn 40-60GHz: ATM Part #19-443-6R
9. Line Impedance Stabilization Network: Electro-Metrics Model
ANS-25/2, S/N 2604
10. Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
11. Frequency Counter: HP Model 5385A, S/N 3242A07460
12. Peak Power Meter: HP Model 8900C, S/N 2131A00545
13. Open Area Test Site #1-3meters
14. Signal Generator: HP 8640B, S/N 2308A21464
15. Signal Generator: HP 8614A, S/N 2015A07428
16. Passive Loop Antenna: EMC0 Model 6512, 9KHz to 30MHz, S/N
9706-1211
17. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
18. AC Voltmeter: HP Model 400FL, S/N 2213A14499
19. Digital Multimeter: Fluke Model 8012A, S/N 4810047
20. Digital Multimeter: Fluke Model 77, S/N 43850817
21. Oscilloscope: Tektronix Model 2230, S/N 300572

APPLICANT: INNO TELECOM CO., LTD.

FCC ID: PWF400

REPORT #: I\INNO\832XAK1\832XAK1TESTREPORT.doc

PAGE #: 13 OF 13