



WILSON ELECTRONICS TEST REPORT

FOR THE

BIDIRECTIONAL AMPLIFIER REPEATER, 804003

FCC PART 90 AND RSS 131

COMPLIANCE

DATE OF ISSUE: FEBRUARY 3, 2004

PREPARED FOR:

Wilson Electronics
3301 East Deseret Drive
St. George, UT 84790

W.O. No.: 81775

PREPARED BY:

Mary Ellen Clayton
CKC Laboratories, Inc.
5473A Clouds Rest
Mariposa, CA 95338

Date of test: January 27-29, 2004

Report No.: FC04-010

This report contains a total of 38 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc. The results in this report apply only to the items tested, as identified herein.

TABLE OF CONTENTS

Administrative Information	3
Summary of Results	4
Comparison Matrix	4
Conditions for Compliance	4
Approvals	4
Equipment Under Test (EUT) Description	5
Equipment Under Test	5
Peripheral Devices	5
Measurement Uncertainty	5
Temperature and Humidity During Testing	6
FCC 2.1033(c)(3) User's Manual	6
FCC 2.1033(c)(4) Type of Emissions	6
FCC 2.1033(c)(5) Frequency Range	6
FCC 2.1033(c)(6) Operating Power	6
FCC 2.1033(c)(7) Maximum Power Rating	6
FCC 2.1033(c)(8) DC Voltages	6
FCC 2.1033(c)(9) Tune-Up Procedure	6
FCC 2.1033(c)(10) Schematics and Circuitry Description	6
FCC 2.1033(c)(11) Label and Placement	6
FCC 2.1033(c)(12) Submittal Photos	6
FCC 2.1033(c)(13) Modulation Information	6
FCC 2.1033(c)(14)/2.1046/90.205 - RF Power Output	7
FCC 2.1033(c)(14)/2.1047(b) - Audio Frequency Response	8
FCC 2.1033(c)(14)/2.1047(b) - Modulation Limiting Response	8
FCC 2.1033(c)(14)/2.1049(i)/90.210 - EMISSIONS MASK	9
FCC 2.1051 - Intermodulation Attenuation	13
FCC 2.1033(c)(14)/2.1051/90.210 - Spurious Emissions at Antenna Terminal	16
FCC 2.1033(c)(14)/2.1053/90.210 - Field Strength of Spurious Radiation	26
Output Plot	30
Input Plot	32
RSS 131 - Downlink Passband Gain	34
RSS 131 - Downlink Passbandwidth 20Db	35
RSS 131 - Uplink Passband Gain	36
RSS 131 - Uplink Passbandwidth 20dB	37

ADMINISTRATIVE INFORMATION

DATE OF TEST: January 27-29, 2004

DATE OF RECEIPT: January 27, 2004

PURPOSE OF TEST: To demonstrate the compliance of the Bidirectional Amplifier Repeater, 804003 with the requirements for FCC Part 90 and RSS 131 devices.

TEST METHOD: FCC Part 90, RSS 131 and TIA/EIA 603

FREQUENCY RANGE TESTED: 30 MHz - 10 GHz

MANUFACTURER: Wilson Electronics
3301 East Deseret Drive
St. George, UT 84790

REPRESENTATIVE: Patrick Cook

TEST LOCATION: CKC Laboratories, Inc.
5473A Clouds Rest
Mariposa, CA 95338

SUMMARY OF RESULTS

As received, the Wilson Electronics Bidirectional Amplifier Repeater, 804003 was found to be fully compliant with the following standards and specifications:

United States

➤ FCC Part 90

Canada

RSS-131 using:

➤ FCC Part 90

COMPARISON MATRIX

Canadian Standard	Canadian Section	FCC Standard	FCC Section	Test Description
RSS 131	5.4	N/A	N/A	External Controls
RSS 131	5.5	47 CFR	1.1307	RF Exposure
RSS 131	6.1	N/A	N/A	Passband Gain and Bandwidth
RSS 131	6.2	47 CFR	90.205	RF Power Output
RSS 131	6.3	TIA/EIA	603	Non-Linearity (Intermodulation Attenuation)
RSS 131	6.4	47 CFR	90.210	Spurious Emissions Limitations
RSS 131	6.5	N/A	N/A	Frequency Stability (Band Translators)

CONDITIONS FOR COMPLIANCE

No modifications to the EUT were necessary to comply.

APPROVALS

Steve Behm, Director of Engineering Services

QUALITY ASSURANCE:



Joyce Walker, Quality Assurance Administrative Manager

TEST PERSONNEL:



Randy Clark, EMC Engineer



Mike Wilkinson, Lab Manager

EQUIPMENT UNDER TEST (EUT) DESCRIPTION

The EUT tested by CKC Laboratories was a production unit

EQUIPMENT UNDER TEST

Amplifier Power Supply

Manuf: Wilson Electronics
Model: JOD-48U-36
Serial: NA
FCC ID: NA

Bidirectional Amplifier Repeater

Manuf: Wilson Electronics
Model: 804003
Serial: NB5-008909
FCC ID: pending

PERIPHERAL DEVICES

The EUT was tested with the following peripheral device(s):

Signal Generator

Manuf: HP
Model: E4432B
Serial: US40052283
FCC ID: DoC

Signal Generator

Manuf: HP
Model: E4432B
Serial: US38330168
FCC ID: DoC

RF Combiner

Manuf: Motorola
Model: NA
Serial: P1314
FCC ID: DoC

Preamp Driver

Manuf: Wilson Electronics
Model: Prototpye
Serial: NA
FCC ID: DoC

MEASUREMENT UNCERTAINTY

TEST	HIGHEST UNCERTAINTY
Radiated Emissions	+/- 2.94 dB
Conducted Emissions	+/- 1.56 dB

Note: Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2. Statements of compliance are based on the nominal values only.

TEMPERATURE AND HUMIDITY DURING TESTING

The temperature during testing was within +15°C and + 35°C.
The relative humidity was between 20% and 75%.

FCC 2.1033(c)(3) USER'S MANUAL

The necessary information is contained in a separate document.

FCC 2.1033 (c)(4) TYPE OF EMISSIONS

GXW

FCC 2.1033 (c)(5) FREQUENCY RANGE

Downlink 851-866 MHz, Uplink 806-821 MHz.

FCC 2.1033 (c)(6) OPERATING POWER

Downlink 11.7 mW, Uplink 1.48 Watts.

FCC 2.1033 (c)(7) MAXIMUM POWER RATING

Subject to secondary licensing.

FCC 2.1033 (c)(8) DC VOLTAGES

The necessary information is contained in a separate document.

FCC 2.1033 (c)(9) TUNE-UP PROCEDURE

The necessary information is contained in a separate document.

FCC 2.1033(c)(10) SCHEMATICS AND CIRCUITRY DESCRIPTION

The necessary information is contained in a separate document.

FCC 2.1033(c)(11) LABEL AND PLACEMENT

The necessary information is contained in a separate document.

FCC 2.1033(c)(12) SUBMITTAL PHOTOS

The necessary information is contained in a separate document.

FCC 2.1033 (c)(13) MODULATION INFORMATION

iDEN

FCC 2.1033(c)(14)/2.1046/90.205 - RF POWER OUTPUT

Test Conditions: EUT is a bi-directional amplifier repeater for the iDEN band. Uplink frequency range 806 - 821MHz. Downlink frequency range 851 - 866MHz.

Only one signal is input to the amplifier. The input from the signal generator is set such that the maximum output is provided at the antenna terminals. The internal ALC of the amplifier limits the maximum power output to a factory set level. Power output is continuously variable and directly proportional to the supplied RF input. Minimum RF output power of 0.00 Watts is achieved with a 0.00 Watt RF input signal.

RF power output of the amplifier is routed to a spectrum analyzer through suitable attenuation. RBW=VBW=300kHz.

Downlink

<i>Frequency (MHz)</i>	<i>Modulation</i>	<i>Power Output (milliWatts)</i>
851	iDEN	11.7
866	iDEN	11.2

Uplink

<i>Frequency (MHz)</i>	<i>Modulation</i>	<i>Power Output (Watts)</i>
806	iDEN	1.48
821	iDEN	1.26

Test Equipment

Function	S/N	Calibration Date	Cal Due Date	Asset #
HP 8596E Spectrum Analyzer	3346A00225	06/24/2003	06/24/2004	00783
30 dB attenuator, Bird 25-A-MFN-30	9724	05/08/2003	05/08/2005	1577

DIRECT CONNECT TEST SETUP



FCC 2.1033(c)(14)/2.1047(a) - MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE

Not applicable to this unit.


FCC 2.1033(c)(14)/2.1047(b) MODULATION CHARACTERISTICS– Modulation Limiting Response

Not applicable to this unit.


FCC 2.1033(c)(14)/2.1049(i)/90.210 - EMISSIONS MASK

Test Conditions: EUT is a bidirectional amplifier repeater for the iDEN band. Uplink frequency range 806 - 821MHz. Downlink frequency range 851 - 866MHz.


LOW CHANNEL

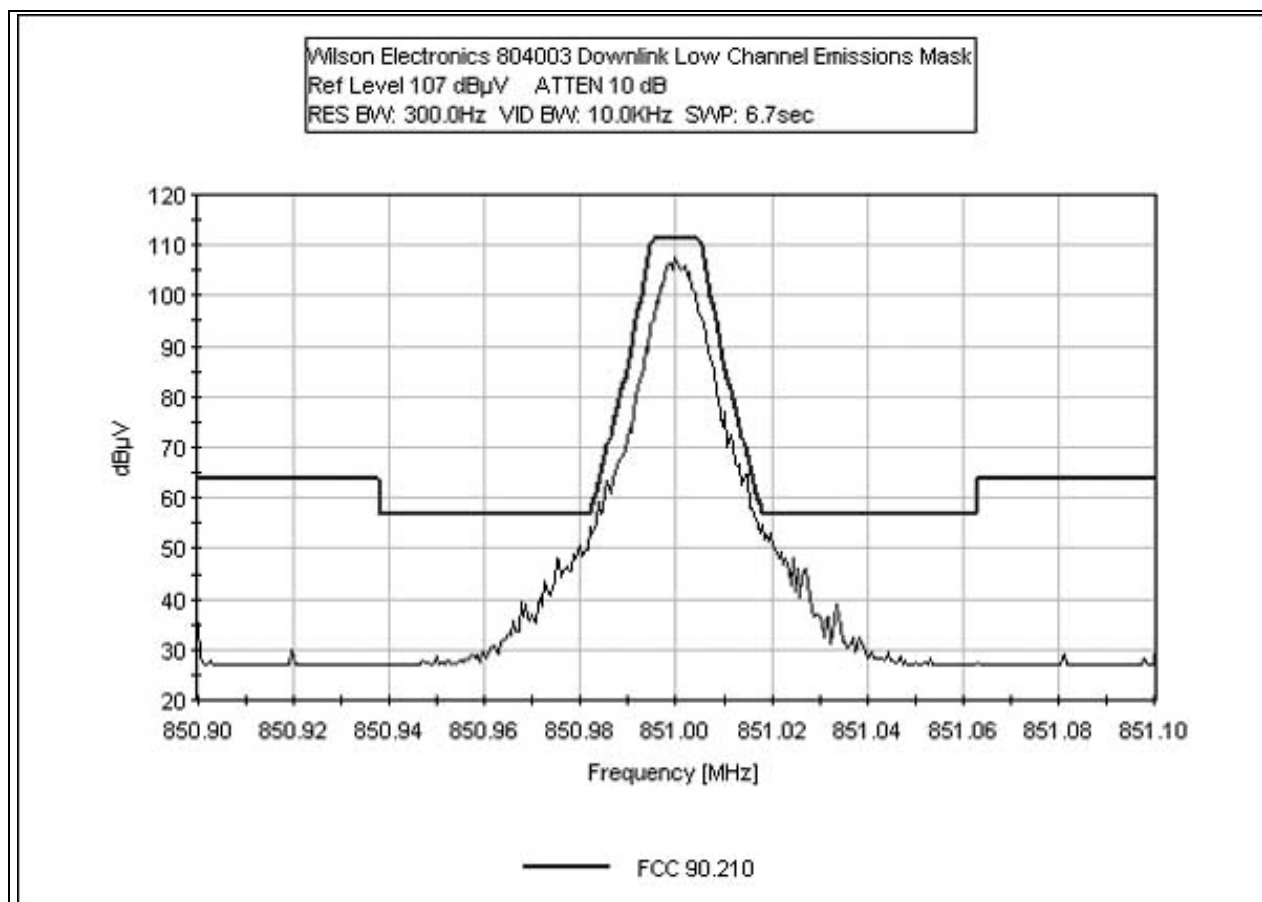


FCC 90.210 DOWNLINK EMISSIONS MASK HIGH CHANNEL

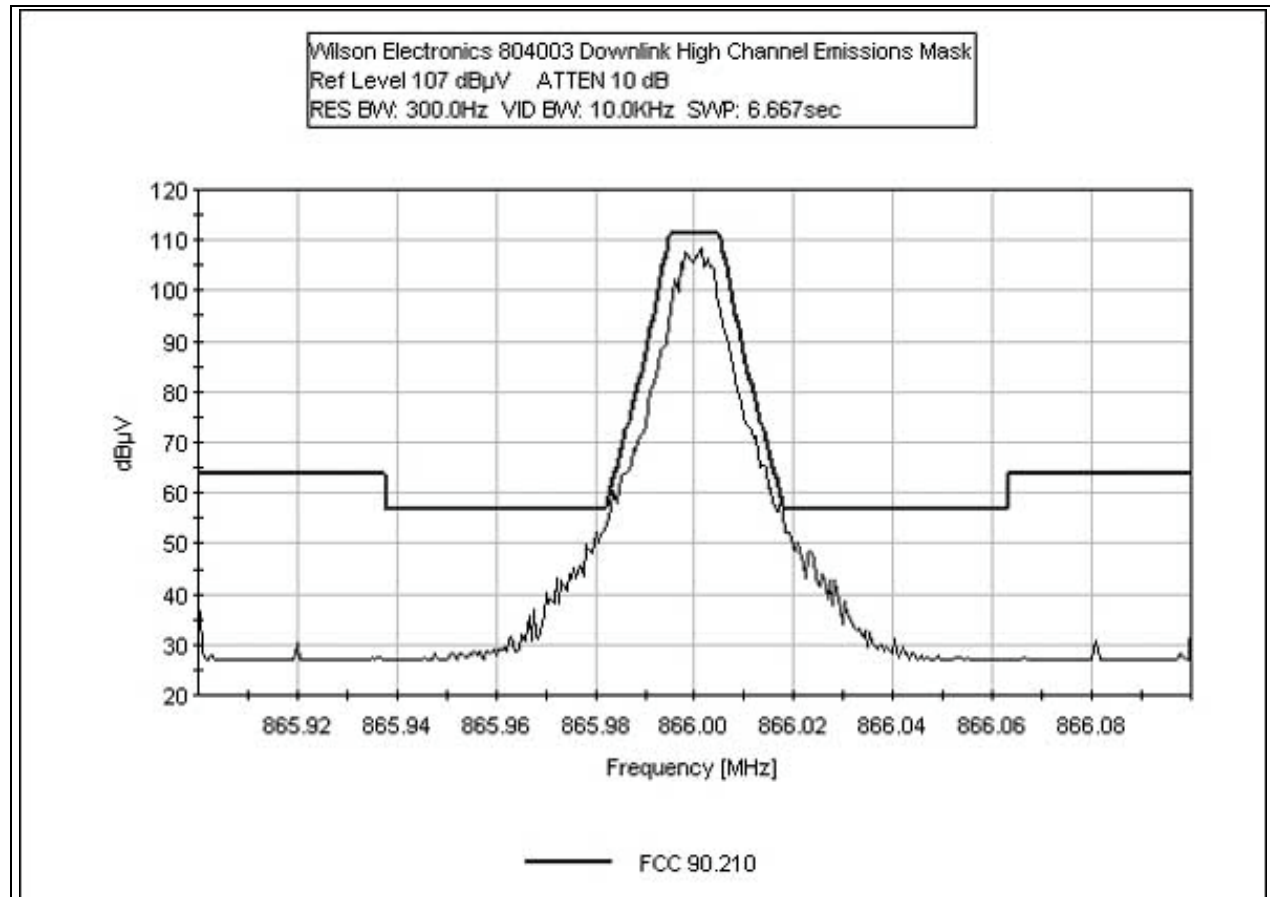

FCC 90.210 UPLINK EMISSIONS MASK LOW CHANNEL

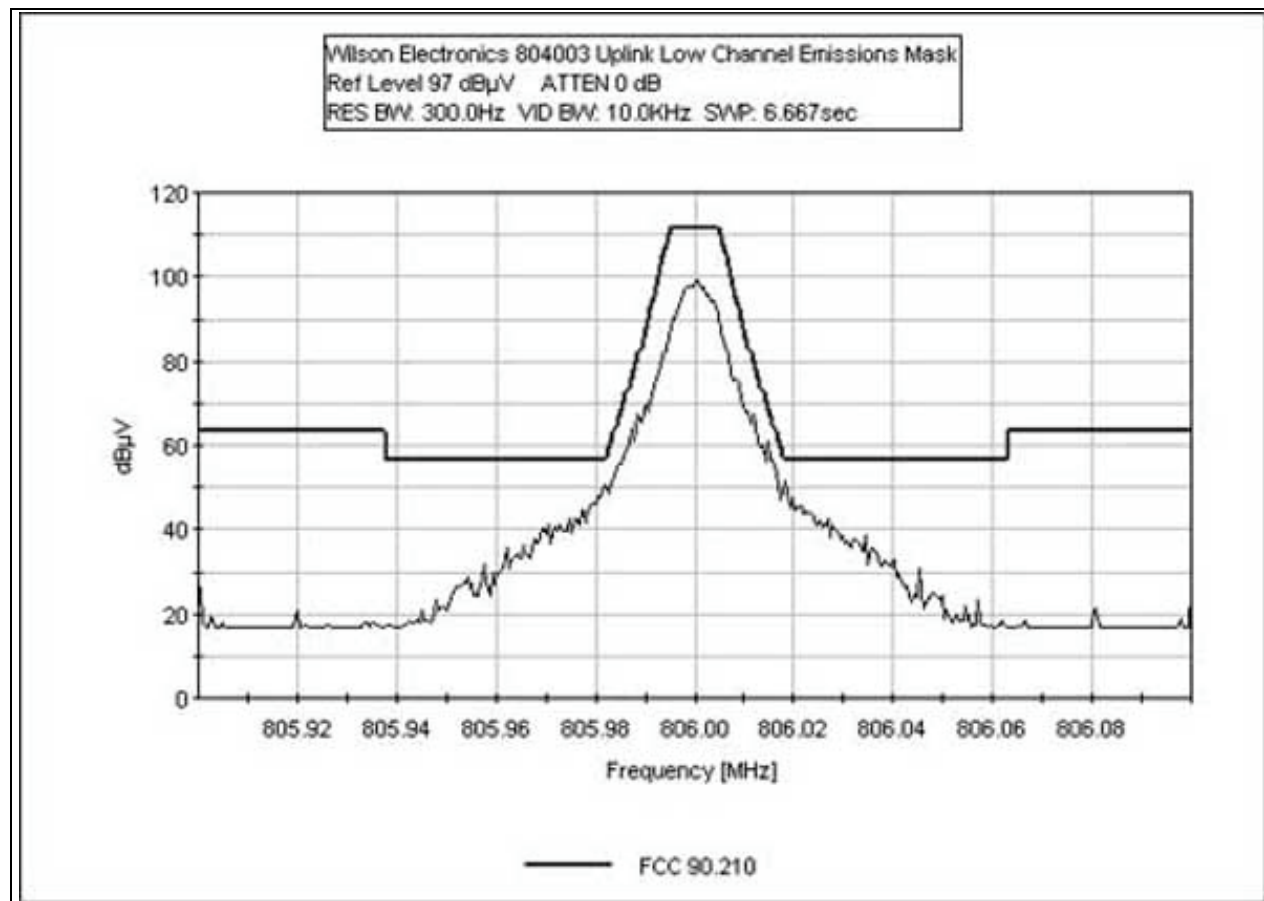


FCC 90.210 UPLINK EMISSIONS MASK HIGH CHANNEL

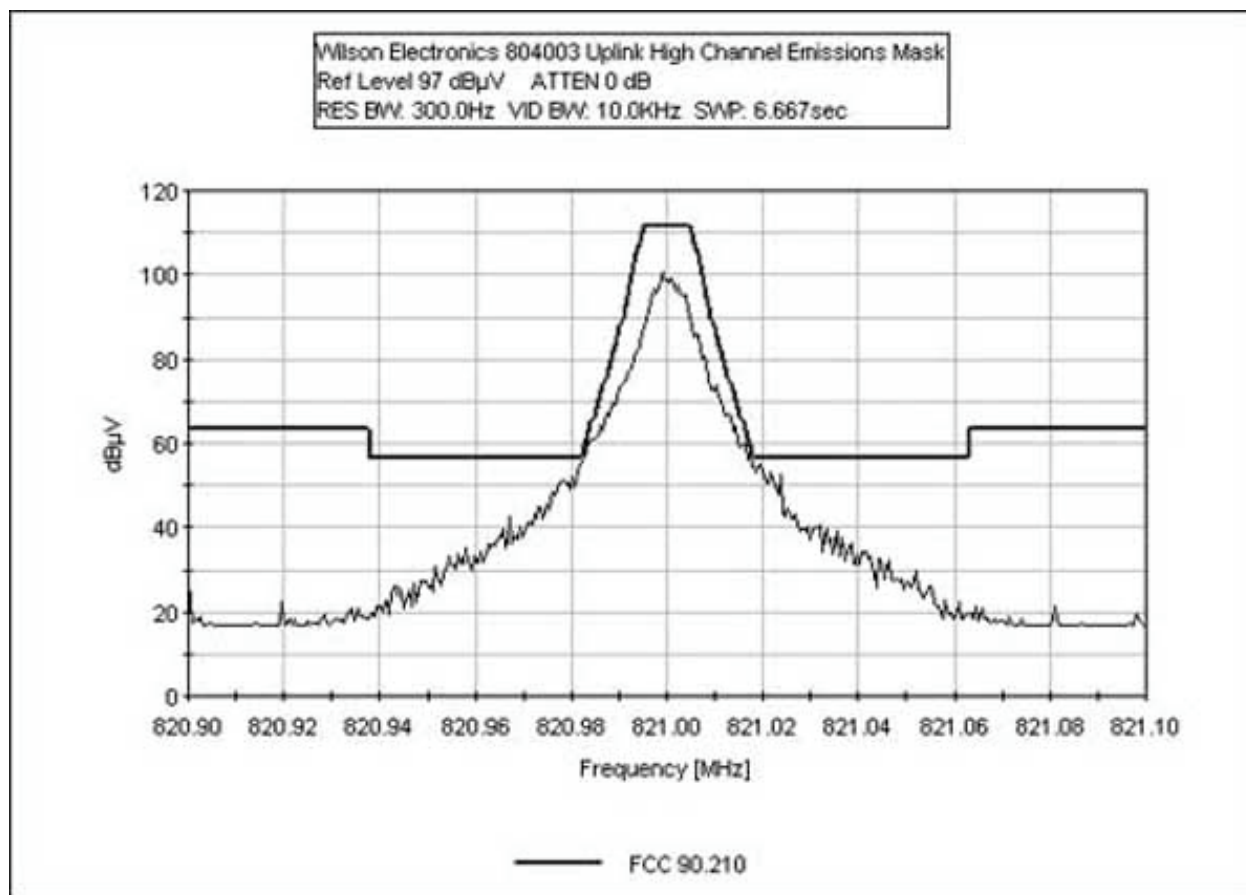


FCC 2.1051 DOWNLINK INTERMODULATION ATTENUATION TONES CLOSE

Test Conditions: Two signals are input to the amplifier through a combining network. The input signals are set such that the maximum output per channel is provided at the antenna terminals. The internal ALC of the amplifier limits the combined maximum power output to a factory set level. Power output is continuously variable and directly proportional to the supplied RF input. Test setup is in accordance with TIA/EIA 603.

The tabular data taken from the supplied plots are located in the spurious emissions data tables.

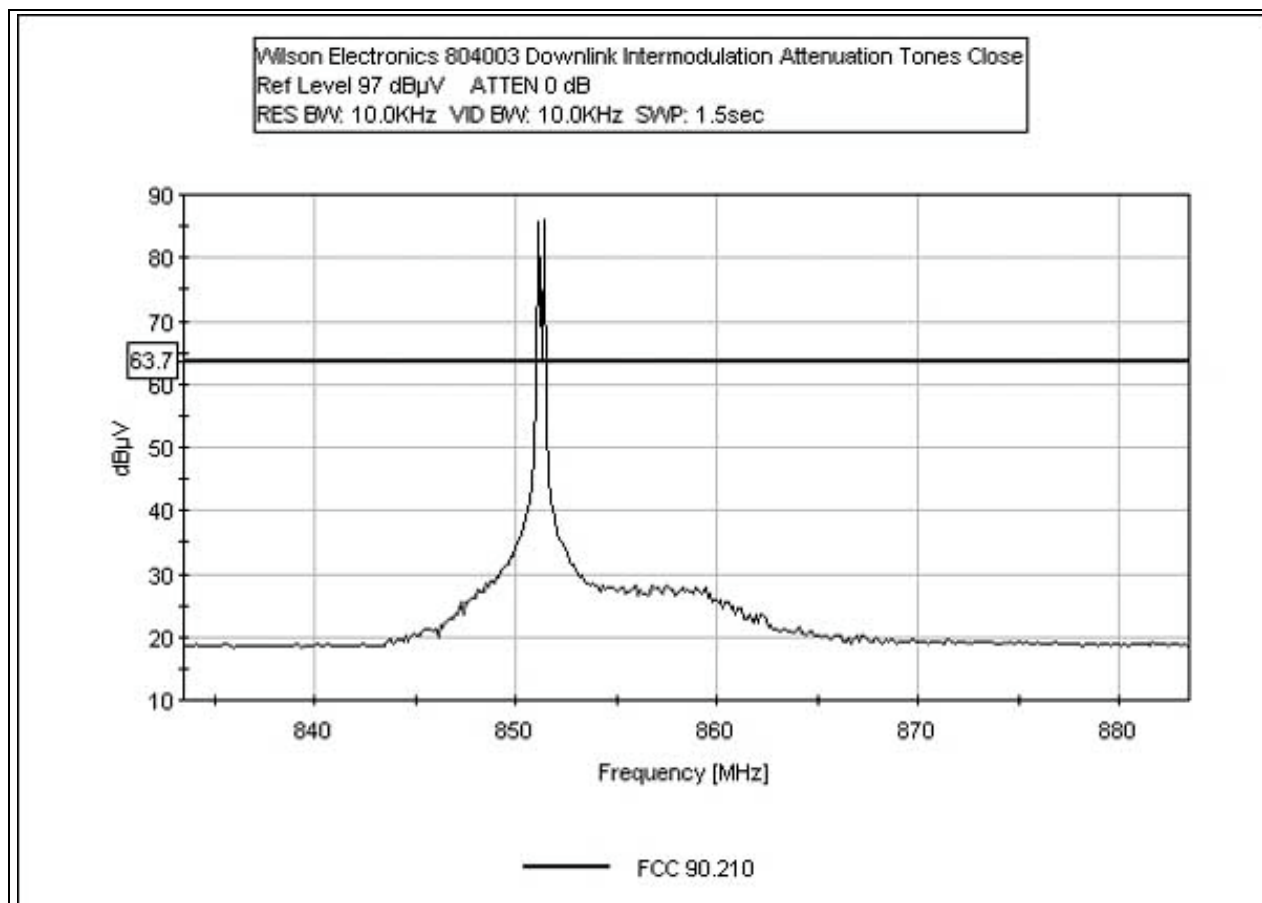

FCC 2.1051 DOWNLINK INTERMODULATION ATTENUATION TONES SEPARATED

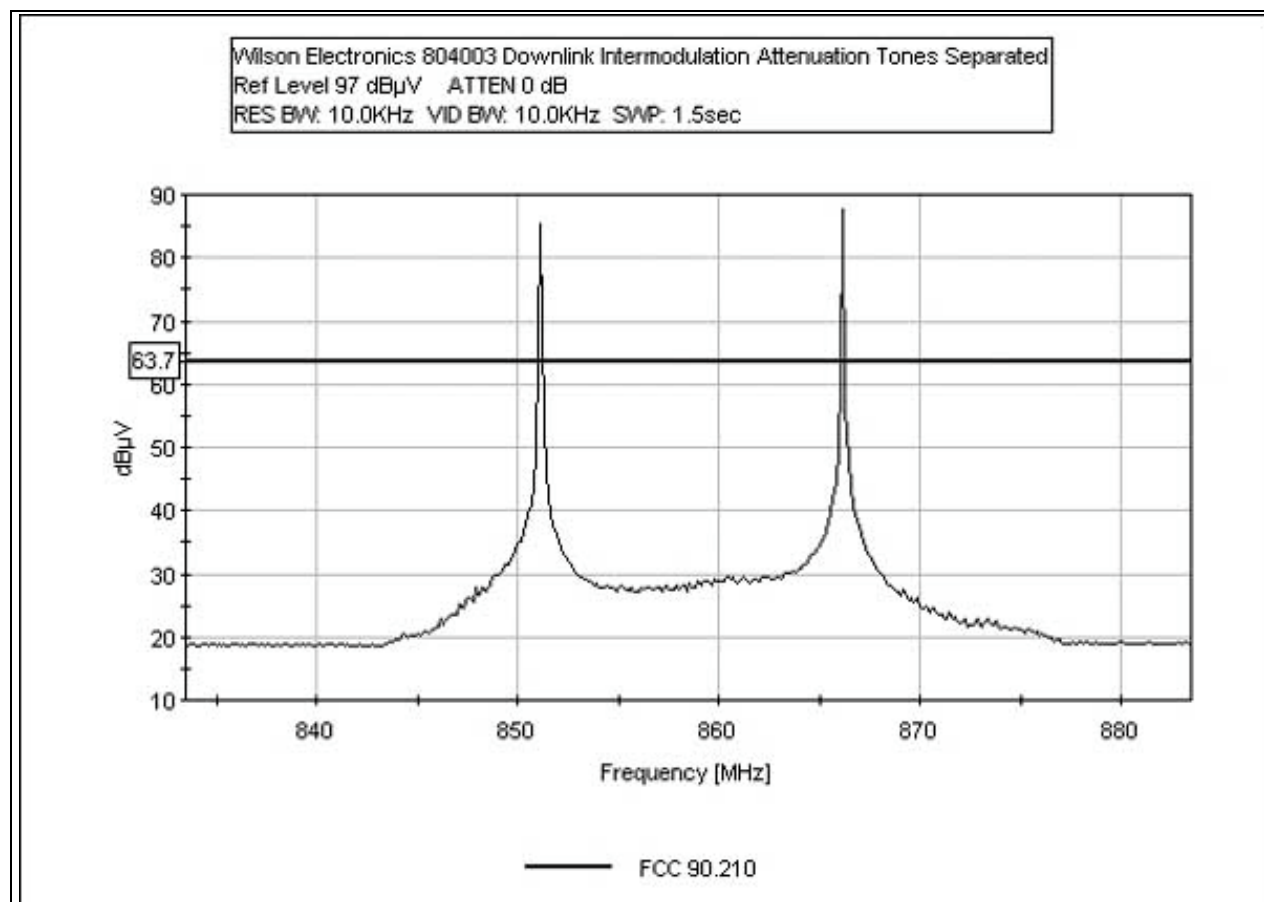

Test Equipment

Function	S/N	Calibration Date	Cal Due Date	Asset #
HP 8596E Spectrum Analyzer	3346A00225	06/24/2003	06/24/2004	00783
30 dB attenuator, Bird 25-A-MFN-30	9724	05/08/2003	05/08/2005	1577

DIRECT CONNECT TEST SETUP



FCC 2.1033(c)(14)/2.1051/90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINAL

Bandwidth settings used: 300 Hz.

Test Location: CKC Laboratories, Inc. • 5473A Clouds Rest • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 90.210**

Work Order #: **81776**

Test Type: **RF Port Conducted**

Equipment: **Bidirectional Amplifier Repeater**

Manufacturer: Wilson Electronics

Model: 804003

S/N: NB5-008909

Date: 01/27/2004

Time: 10:04:26 AM

Sequence#: 9

Tested By: Mike Wilkinson

12VDC

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Amplifier Power Supply	Wilson Electronics	JOD-48U-36	NA
Bidirectional Amplifier Repeater*	Wilson Electronics	804003	NB5-008909

Support Devices:

Function	Manufacturer	Model #	S/N
Signal Generator	HP	E4432B	US40052283
Signal Generator	HP	E4432B	US38330168
RF Combiner	Motorola	None	P1314

Test Conditions / Notes:

EUT is a bidirectional amplifier repeater for the iDEN band. Uplink frequency range 806 - 821MHz. Downlink frequency range 851 - 866MHz. Intermodulation Attenuation and Spurious Emissions Test: Two signals are input to the amplifier through a combining network. The input signals are set such that the maximum output per channel is provided at the antenna terminals. The internal ALC of the amplifier limits the combined maximum power output to a factory set level. Power output is continuously variable and directly proportional to the supplied RF input. Test setup is in accordance with TIA/EIA 603. Two input frequency configurations were investigated as follows, 851 & 851.250 MHz and then 851 & 866 MHz. Amplifier Gain: 50dB, Input Modulation: iDEN. Frequencies Tested: Downlink. Frequency Range Investigated: 30 MHz to 10 GHz. **No EUT Emissions detected within 20dBc of the limit**

Transducer Legend:

T1=Pad 30dB

Measurement Data:

Reading listed by margin.

Test Lead: RF Output

#	Freq MHz	Rdng dBμV	T1 dB	dB	dB	dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	851.000M	87.1	+30.3				+0.0	117.4	141.8	-24.4	RF Ou
									Fundamental		
2	6514.076M	38.7	+27.2				+0.0	65.9	94.0	-28.1	RF Ou
3	2322.234M	34.9	+30.2				+0.0	65.1	94.0	-28.9	RF Ou
4	2896.958M	35.4	+29.5				+0.0	64.9	94.0	-29.1	RF Ou

5	8212.592M	40.8	+24.0	+0.0	64.8	94.0	-29.2	RF Ou
6	1521.132M	34.5	+30.2	+0.0	64.7	94.0	-29.3	RF Ou
7	557.439M	33.2	+30.4	+0.0	63.6	94.0	-30.4	RF Ou
8	232.252M	33.1	+30.4	+0.0	63.5	94.0	-30.5	RF Ou
9	506.890M	33.0	+30.4	+0.0	63.4	94.0	-30.6	RF Ou
10	1151.203M	33.1	+30.3	+0.0	63.4	94.0	-30.6	RF Ou
11	147.785M	32.8	+30.5	+0.0	63.3	94.0	-30.7	RF Ou
12	380.667M	33.0	+30.3	+0.0	63.3	94.0	-30.7	RF Ou
13	991.011M	32.9	+30.4	+0.0	63.3	94.0	-30.7	RF Ou
14	88.786M	32.7	+30.5	+0.0	63.2	94.0	-30.8	RF Ou
15	206.860M	32.8	+30.4	+0.0	63.2	94.0	-30.8	RF Ou
16	39.021M	32.2	+30.5	+0.0	62.7	94.0	-31.3	RF Ou
17	61.377M	32.2	+30.5	+0.0	62.7	94.0	-31.3	RF Ou
18	102.757M	32.2	+30.5	+0.0	62.7	94.0	-31.3	RF Ou
19	45.566M	32.1	+30.5	+0.0	62.6	94.0	-31.4	RF Ou
20	3295.653M	32.9	+29.6	+0.0	62.5	94.0	-31.5	RF Ou
21	4511.085M	32.2	+28.7	+0.0	60.9	94.0	-33.1	RF Ou

Test Location: CKC Laboratories, Inc. • 5473A Clouds Rest • Mariposa, CA 95338 • 1-800-500-4EMC (4362)
 Customer: **Wilson Electronics**
 Specification: **FCC 90.210**
 Work Order #: **81775**
 Test Type: **RF Port Conducted**
 Equipment: **Bidirectional Amplifier Repeater**
 Manufacturer: Wilson Electronics
 Model: 804003
 S/N: NB5-008909

Date: 01/27/2004
 Time: 16:51:06
 Sequence#: 6
 Tested By: Randal Clark
 12VDC

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Amplifier Power Supply	Wilson Electronics	JOD-48U-36	NA
Bidirectional Amplifier Repeater*	Wilson Electronics	804003	NB5-008909

Support Devices:

Function	Manufacturer	Model #	S/N
Signal Generator	HP	E4432B	US40052283
Signal Generator	HP	E4432B	US38330168

Test Conditions / Notes:

EUT is a bidirectional amplifier repeater for the iDEN band. Uplink frequency range 806 - 821MHz. Downlink frequency range 851 - 866MHz. Intermodulation Attenuation and Spurious Emissions Test: Two signals are input to the amplifier through a combining network. The input signals are set such that the maximum output per channel is provided at the antenna terminals. The internal ALC of the amplifier limits the combined maximum power output to a factory set level. Power output is continuously variable and directly proportional to the supplied RF input. Test setup is in accordance with TIA/EIA 603. Amplifier Gain: 50dB, Input Modulation: iDEN. Frequencies Tested: Downlink. Frequency Range Investigated: 30 MHz to 10 GHz.

Transducer Legend:

T1=Pad 30dB

Measurement Data: Reading listed by margin.

Test Lead: RF Output

#	Freq MHz	Rdng dBμV	T1 dB	dB	dB	dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	866.000M	87.5	+30.3				+0.0	117.8	117.0	+0.8	RF Ou
									Fundamental		
2	851.000M	86.3	+30.3				+0.0	116.6	117.0	-0.4	RF Ou
									Fundamental		
3	866.017M	58.9	+30.3				+0.0	89.2	90.6	-1.4	RF Ou
4	850.983M	59.3	+30.3				+0.0	89.6	92.2	-2.6	RF Ou
5	865.983M	56.9	+30.3				+0.0	87.2	90.6	-3.4	RF Ou
6	851.015M	64.5	+30.3				+0.0	94.8	99.7	-4.9	RF Ou
7	865.985M	62.8	+30.3				+0.0	93.1	98.3	-5.2	RF Ou
8	851.020M	50.7	+30.3				+0.0	81.0	87.0	-6.0	RF Ou
9	851.017M	55.8	+30.3				+0.0	86.1	92.2	-6.1	RF Ou

10	866.012M	71.4	+30.3	+0.0	101.7	109.3	-7.6	RF Ou
11	850.977M	46.4	+30.3	+0.0	76.7	87.0	-10.3	RF Ou
12	851.023M	45.5	+30.3	+0.0	75.8	87.0	-11.2	RF Ou
13	850.988M	68.1	+30.3	+0.0	98.4	110.9	-12.5	RF Ou
14	844.293M	36.3	+30.4	+0.0	66.7	94.0	-27.3	RF Ou
15	6687.806M	38.5	+27.2	+0.0	65.7	94.0	-28.3	RF Ou
16	2915.129M	35.9	+29.5	+0.0	65.4	94.0	-28.6	RF Ou
17	1808.813M	35.1	+30.3	+0.0	65.4	94.0	-28.6	RF Ou
18	1596.802M	35.0	+30.2	+0.0	65.2	94.0	-28.8	RF Ou
19	8254.021M	40.7	+23.9	+0.0	64.6	94.0	-29.4	RF Ou
20	1132.619M	33.9	+30.3	+0.0	64.2	94.0	-29.8	RF Ou
21	79.277M	32.9	+30.5	+0.0	63.4	94.0	-30.6	RF Ou
22	286.645M	32.8	+30.5	+0.0	63.3	94.0	-30.7	RF Ou
23	70.482M	32.7	+30.5	+0.0	63.2	94.0	-30.8	RF Ou
24	127.214M	32.7	+30.5	+0.0	63.2	94.0	-30.8	RF Ou
25	145.727M	32.7	+30.5	+0.0	63.2	94.0	-30.8	RF Ou
26	174.430M	32.7	+30.4	+0.0	63.1	94.0	-30.9	RF Ou
27	401.630M	32.8	+30.3	+0.0	63.1	94.0	-30.9	RF Ou
28	982.023M	32.7	+30.4	+0.0	63.1	94.0	-30.9	RF Ou
29	38.084M	32.2	+30.5	+0.0	62.7	94.0	-31.3	RF Ou
30	42.856M	32.1	+30.5	+0.0	62.6	94.0	-31.4	RF Ou
31	513.119M	32.2	+30.4	+0.0	62.6	94.0	-31.4	RF Ou
32	574.557M	32.2	+30.4	+0.0	62.6	94.0	-31.4	RF Ou
33	3201.170M	32.9	+29.6	+0.0	62.5	94.0	-31.5	RF Ou
34	4525.523M	32.3	+28.7	+0.0	61.0	94.0	-33.0	RF Ou

Test Location: CKC Laboratories, Inc. • 5473A Clouds Rest • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 90.210**

Work Order #: **81775**

Date: 01/28/2004

Test Type: **RF Port Conducted**

Time: 10:26:35

Equipment: **Bidirectional Amplifier Repeater**

Sequence#: 7

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 804003

12VDC

S/N: NB5-008909

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Amplifier Power Supply	Wilson Electronics	JOD-48U-36	NA
Bidirectional Amplifier Repeater*	Wilson Electronics	804003	NB5-008909

Support Devices:

Function	Manufacturer	Model #	S/N
Signal Generator	HP	E4432B	US40052283
Signal Generator	HP	E4432B	US38330168

Test Conditions / Notes:

EUT is a bidirectional amplifier repeater for the iDEN band. Uplink frequency range 806 - 821MHz. Downlink frequency range 851 - 866MHz. Intermodulation Attenuation and Spurious Emissions Test: Two signals are input to the amplifier through a combining network. The input signals are set such that the maximum output per channel is provided at the antenna terminals. The internal ALC of the amplifier limits the combined maximum power output to a factory set level. Power output is continuously variable and directly proportional to the supplied RF input. Test setup is in accordance with TIA/EIA 603. Amplifier Gain: 50dB, Input Modulation: iDEN. Frequencies Tested: Uplink. Frequency Range Investigated: 30 MHz to 10 GHz.

Transducer Legend:

T1=Pad 30dB

Measurement Data:

Reading listed by margin.

Test Lead: RF Output

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	806.000M	108.2	+30.4				+0.0	138.6	94.0	+44.6	RF Ou
									Fundamental		
2	1612.614M	55.1	+30.2				+0.0	85.3	94.0	-8.7	RF Ou
3	2416.434M	40.5	+30.1				+0.0	70.6	94.0	-23.4	RF Ou
4	6736.063M	38.9	+27.2				+0.0	66.1	94.0	-27.9	RF Ou
5	2905.034M	36.2	+29.5				+0.0	65.7	94.0	-28.3	RF Ou
6	2068.544M	34.6	+30.3				+0.0	64.9	94.0	-29.1	RF Ou
7	7975.849M	40.2	+24.5				+0.0	64.7	94.0	-29.3	RF Ou
8	58.342M	33.4	+30.5				+0.0	63.9	94.0	-30.1	RF Ou

9	1216.245M	33.4	+30.3	+0.0	63.7	94.0	-30.3	RF Ou
10	38.540M	33.1	+30.5	+0.0	63.6	94.0	-30.4	RF Ou
11	44.414M	33.0	+30.5	+0.0	63.5	94.0	-30.5	RF Ou
12	87.999M	32.9	+30.5	+0.0	63.4	94.0	-30.6	RF Ou
13	96.926M	32.9	+30.5	+0.0	63.4	94.0	-30.6	RF Ou
14	337.963M	32.9	+30.4	+0.0	63.3	94.0	-30.7	RF Ou
15	987.719M	32.9	+30.4	+0.0	63.3	94.0	-30.7	RF Ou
16	201.937M	32.8	+30.4	+0.0	63.2	94.0	-30.8	RF Ou
17	299.227M	32.7	+30.5	+0.0	63.2	94.0	-30.8	RF Ou
18	146.485M	32.4	+30.5	+0.0	62.9	94.0	-31.1	RF Ou
19	539.764M	32.3	+30.4	+0.0	62.7	94.0	-31.3	RF Ou
20	691.612M	32.3	+30.4	+0.0	62.7	94.0	-31.3	RF Ou
21	3352.342M	32.9	+29.7	+0.0	62.6	94.0	-31.4	RF Ou
22	4366.712M	32.0	+28.9	+0.0	60.9	94.0	-33.1	RF Ou

Test Location: CKC Laboratories, Inc. • 5473A Clouds Rest • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 90.210**

Work Order #: **81775**

Date: 01/28/2004

Test Type: **RF Port Conducted**

Time: 10:50:35

Equipment: **Bidirectional Amplifier Repeater**

Sequence#: 8

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 804003

12VDC

S/N: NB5-008909

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Amplifier Power Supply	Wilson Electronics	JOD-48U-36	NA
Bidirectional Amplifier Repeater*	Wilson Electronics	804003	NB5-008909

Support Devices:

Function	Manufacturer	Model #	S/N
Signal Generator	HP	E4432B	US40052283
Signal Generator	HP	E4432B	US38330168
Preamp Driver	Wilson Electronics	Prototype	N/A

Test Conditions / Notes:

EUT is a bidirectional amplifier repeater for the iDEN band. Uplink frequency range 806 - 821MHz. Downlink frequency range 851 - 866MHz. Intermodulation Attenuation and Spurious Emissions Test: Two signals are input to the amplifier through a combining network. The input signals are set such that the maximum output per channel is provided at the antenna terminals. The internal ALC of the amplifier limits the combined maximum power output to a factory set level. Power output is continuously variable and directly proportional to the supplied RF input. Test setup is in accordance with TIA/EIA 603. Amplifier Gain: 50dB, Input Modulation: iDEN. Frequencies Tested: Uplink. Frequency Range Investigated: 30 MHz to 10 GHz.

Transducer Legend:

T1=Pad 30dB

Measurement Data:

Reading listed by margin.

Test Lead: RF Output

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	821.000M	107.0	+30.4				+0.0	137.4	94.0	+43.4	RF Ou
									Fundamental		
2	806.000M	108.2	+30.4				+0.0	138.6	141.8	-3.2	RF Ou
									Fundamental		
3	821.017M	55.6	+30.4				+0.0	86.0	90.6	-4.6	RF Ou
4	806.018M	53.2	+30.4				+0.0	83.6	89.0	-5.4	RF Ou
5	805.982M	47.7	+30.4				+0.0	78.1	87.0	-8.9	RF Ou
6	820.983M	48.2	+30.4				+0.0	78.6	89.0	-10.4	RF Ou
7	1612.614M	53.3	+30.2				+0.0	83.5	94.0	-10.5	RF Ou

8	806.019M	46.0	+30.4	+0.0	76.4	87.0	-10.6	RF Ou
9	806.012M	68.1	+30.4	+0.0	98.5	109.3	-10.8	RF Ou
10	1643.108M	52.6	+30.2	+0.0	82.8	94.0	-11.2	RF Ou
11	806.015M	56.3	+30.4	+0.0	86.7	98.3	-11.6	RF Ou
12	820.984M	52.3	+30.4	+0.0	82.7	94.5	-11.9	RF Ou
13	821.022M	43.8	+30.4	+0.0	74.2	87.0	-12.8	RF Ou
14	821.014M	60.5	+30.4	+0.0	90.9	103.8	-12.9	RF Ou
15	820.986M	58.4	+30.4	+0.0	88.8	101.8	-13.0	RF Ou
16	820.988M	65.5	+30.4	+0.0	95.9	109.5	-13.6	RF Ou
17	805.987M	58.3	+30.4	+0.0	88.7	103.8	-15.1	RF Ou
18	821.013M	61.9	+30.4	+0.0	92.3	107.7	-15.4	RF Ou
19	805.974M	40.3	+30.4	+0.0	70.7	87.0	-16.3	RF Ou
20	821.011M	66.1	+30.4	+0.0	96.5	114.9	-18.4	RF Ou
21	806.011M	64.1	+30.4	+0.0	94.5	114.9	-20.4	RF Ou
22	821.009M	70.5	+30.4	+0.0	100.9	121.6	-20.7	RF Ou
23	2462.871M	40.8	+30.1	+0.0	70.9	94.0	-23.1	RF Ou
24	2416.434M	37.3	+30.1	+0.0	67.4	94.0	-26.6	RF Ou
25	6750.541M	39.3	+27.1	+0.0	66.4	94.0	-27.6	RF Ou
26	2160.657M	35.0	+30.2	+0.0	65.2	94.0	-28.8	RF Ou
27	996.969M	34.0	+30.3	+0.0	64.3	94.0	-29.7	RF Ou
28	8987.925M	39.1	+25.2	+0.0	64.3	94.0	-29.7	RF Ou
29	1324.368M	33.7	+30.2	+0.0	63.9	94.0	-30.1	RF Ou
30	64.457M	33.2	+30.5	+0.0	63.7	94.0	-30.3	RF Ou
31	89.816M	32.9	+30.5	+0.0	63.4	94.0	-30.6	RF Ou
32	844.912M	33.0	+30.4	+0.0	63.4	94.0	-30.6	RF Ou

33	98.384M	32.8	+30.5	+0.0	63.3	94.0	-30.7	RF Ou
34	358.151M	32.9	+30.4	+0.0	63.3	94.0	-30.7	RF Ou
35	3600.696M	33.4	+29.8	+0.0	63.2	94.0	-30.8	RF Ou
36	301.162M	32.6	+30.5	+0.0	63.1	94.0	-30.9	RF Ou
37	462.251M	32.6	+30.4	+0.0	63.0	94.0	-31.0	RF Ou
38	640.256M	32.6	+30.4	+0.0	63.0	94.0	-31.0	RF Ou
39	133.925M	32.4	+30.5	+0.0	62.9	94.0	-31.1	RF Ou
40	172.982M	32.3	+30.5	+0.0	62.8	94.0	-31.2	RF Ou
41	35.322M	31.9	+30.5	+0.0	62.4	94.0	-31.6	RF Ou
42	51.258M	31.9	+30.5	+0.0	62.4	94.0	-31.6	RF Ou
43	5644.415M	34.1	+27.9	+0.0	62.0	94.0	-32.0	RF Ou

Test Equipment

Function	S/N	Calibration Date	Cal Due Date	Asset #
HP 8596E Spectrum Analyzer	3346A00225	06/24/2003	06/24/2004	00783
30 dB attenuator, Bird 25-A-MFN-30	9724	05/08/2003	05/08/2005	1577

DIRECT CONNECT TEST SETUP



FCC 2.1033(c)(14)/2.1053/90.210 - FIELD STRENGTH OF SPURIOUS RADIATION

Test Location: CKC Laboratories, Inc. • 5473A Clouds Rest • Mariposa, CA 95338 • 1-800-500-4EMC (4362)
 Customer: **Wilson Electronics**
 Specification: **FCC 90.210**
 Work Order #: **81775** Date: 01/27/2004
 Test Type: **Maximized Emissions** Time: 10:04:26 AM
 Equipment: **Bidirectional Amplifier Repeater** Sequence#: 5
 Manufacturer: Wilson Electronics Tested By: Randal Clark
 Model: 804003
 S/N: NB5-008909

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
HP 8566B SA	2209A01404	02/26/2003	02/26/2004	00490
HP 8566B SA Display	2403A08241	02/26/2003	02/26/2004	00489
HP 85650A QPA	2811A01267	02/26/2003	02/26/2004	00478
HP 8447D Preamp	1937A02604	03/07/2003	03/07/2004	00099
HP 8449B Preamp	3008A00301	10/21/2002	10/18/2004	2010
Chase CBL6111C Bilog	2456	12/13/2002	12/13/2004	01991
EMCO 3115 Horn Antenna	9006-3413	04/15/2003	04/25/2005	327

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Amplifier Power Supply	Wilson Electronics	JOD-48U-36	NA
Bidirectional Amplifier Repeater*	Wilson Electronics	804003	NB5-008909

Support Devices:

Function	Manufacturer	Model #	S/N
Signal Generator	HP	E4432B	US40052283
Signal Generator	HP	E4432B	US38330168
RF Combiner	Motorola	None	P1314

Test Conditions / Notes:

EUT is a bidirectional amplifier repeater for the iDEN band. Uplink frequency range 806 - 821MHz. Downlink frequency range 851 - 866MHz. Radiated Intermodulation /Spurious Emissions Test: Two signals are input to the amplifier through a combining network. The input signals are set such that the maximum output per channel is provided at the antenna terminals. The internal ALC of the amplifier limits the combined maximum power output to a factory set level. Power output is continuously variable and directly proportional to the supplied RF input. Test setup is in accordance with TIA/EIA 603. Two input frequency configurations were investigated as follows, 851 & 851.250 MHz and then 851 & 866 MHz. Amplifier Gain: 50dB, Input Modulation: iDEN. Frequencies Tested: Downlink. Frequency Range Investigated: 30 MHz to 10 GHz. Measurement Bandwidth Settings: 10 MHz to 1000 MHz - RBW=VBW=10kHz, 1000 MHz to 10000 MHz - RBW=VBW=1MHz. **No EUT Emissions detected within 20dBc of the limit.**

Transducer Legend:

--

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	dB	dB	dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
---	-------------	--------------	----	----	----	----	---------------	----------------	----------------	--------------	--------------

Test Location: CKC Laboratories, Inc. • 5473A Clouds Rest • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 90.210**

Work Order #: **81775**

Date: 01/29/2004

Test Type: **Maximized Emissions**

Time: 15:16:54

Equipment: **Bidirectional Amplifier Repeater**

Sequence#: 10

Manufacturer: Wilson Electronics

Tested By: Mike Wilkinson

Model: 804003

S/N: NB5-008909

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
HP 8566B SA	2209A01404	02/26/2003	02/26/2004	00490
HP 8566B SA	2403A08241	02/26/2003	02/26/2004	00489
Display				
HP 85650A QPA	2811A01267	02/26/2003	02/26/2004	00478
HP 8447D Preamp	1937A02604	03/07/2003	03/07/2004	00099
HP 8449B Preamp	3008A00301	10/21/2002	10/18/2004	2010
Chase CBL6111C	2456	12/13/2002	12/13/2004	01991
Bilog				
EMCO 3115 Horn	9006-3413	04/15/2003	04/25/2005	327
Antenna				

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Amplifier Power Supply	Wilson Electronics	JOD-48U-36	NA
Bidirectional Amplifier Repeater*	Wilson Electronics	804003	NB5-008909

Support Devices:

Function	Manufacturer	Model #	S/N
Signal Generator	HP	E4432B	US40052283
Signal Generator	HP	E4432B	US38330168
RF Combiner	Motorola	None	P1314

Test Conditions / Notes:

EUT is a bidirectional amplifier repeater for the iDEN band. Uplink frequency range 806 - 821MHz. Downlink frequency range 851 - 866MHz. Radiated Intermodulation /Spurious Emissions Test: Two signals are input to the amplifier through a combining network. The input signals are set such that the maximum output per channel is provided at the antenna terminals. The internal ALC of the amplifier limits the combined maximum power output to a factory set level. Power output is continuously variable and directly proportional to the supplied RF input. Test setup is in accordance with TIA/EIA 603. Two input frequency configurations were investigated as follows, 806 & 806.250 MHz and then 806 & 821 MHz. Amplifier Gain: 50dB, Input Modulation: iDEN. Frequencies Tested: Uplink. Frequency Range Investigated: 30 MHz to 10 GHz. Measurement Bandwidth Settings: 10 MHz to 1000 MHz - RBW=VBW=10kHz, 1000 MHz to 10000 MHz - RBW=VBW=1MHz. **No EUT Emissions detected within 20dBc of the limit.**

Transducer Legend:

--

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	dB	dB	dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
---	-------------	--------------	----	----	----	----	---------------	----------------	----------------	--------------	--------------

PHOTOGRAPH SHOWING RADIATED EMISSIONS



Radiated Emissions - Front View

PHOTOGRAPH SHOWING RADIATED EMISSIONS




Radiated Emissions - Back View


Test Conditions: EUT is a bidirectional amplifier repeater for the iDEN band. Uplink frequency range 806 - 821MHz. Downlink frequency range 851 - 866MHz.

One signal is input to the amplifier. The input signal is set such that the maximum output per channel before compression is provided at the antenna terminals. The internal ALC of the amplifier limits the combined maximum power output to a factory set level. The input plot is taken with a different level than that used during testing; the input plot supplied more clearly shows the spectral purity of the input signal. The input and output plots are not intended to be used to determine amplifier gain.


DOWNLINK OUTPUT PLOT

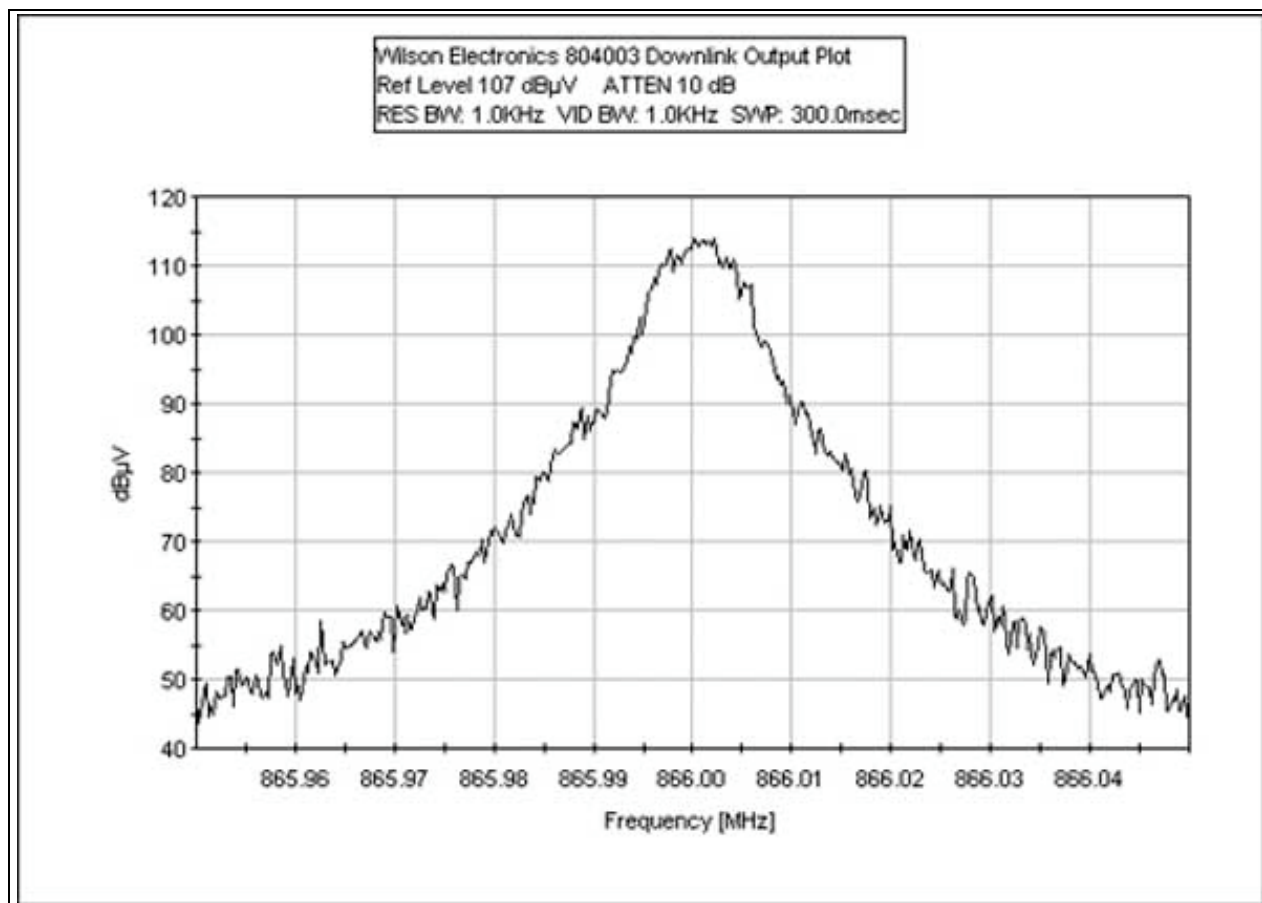

UPLINK OUTPUT PLOT

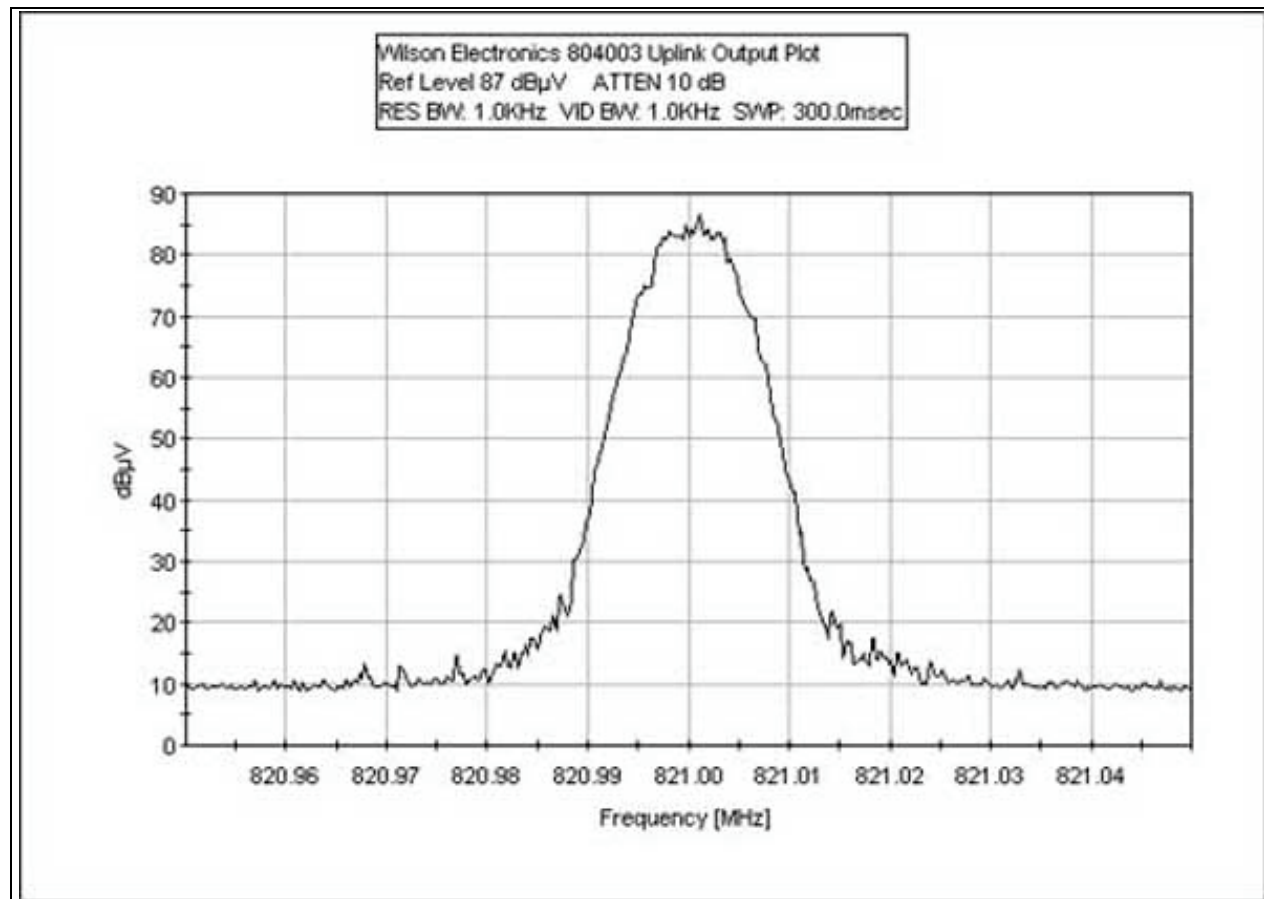

INPUT PLOT

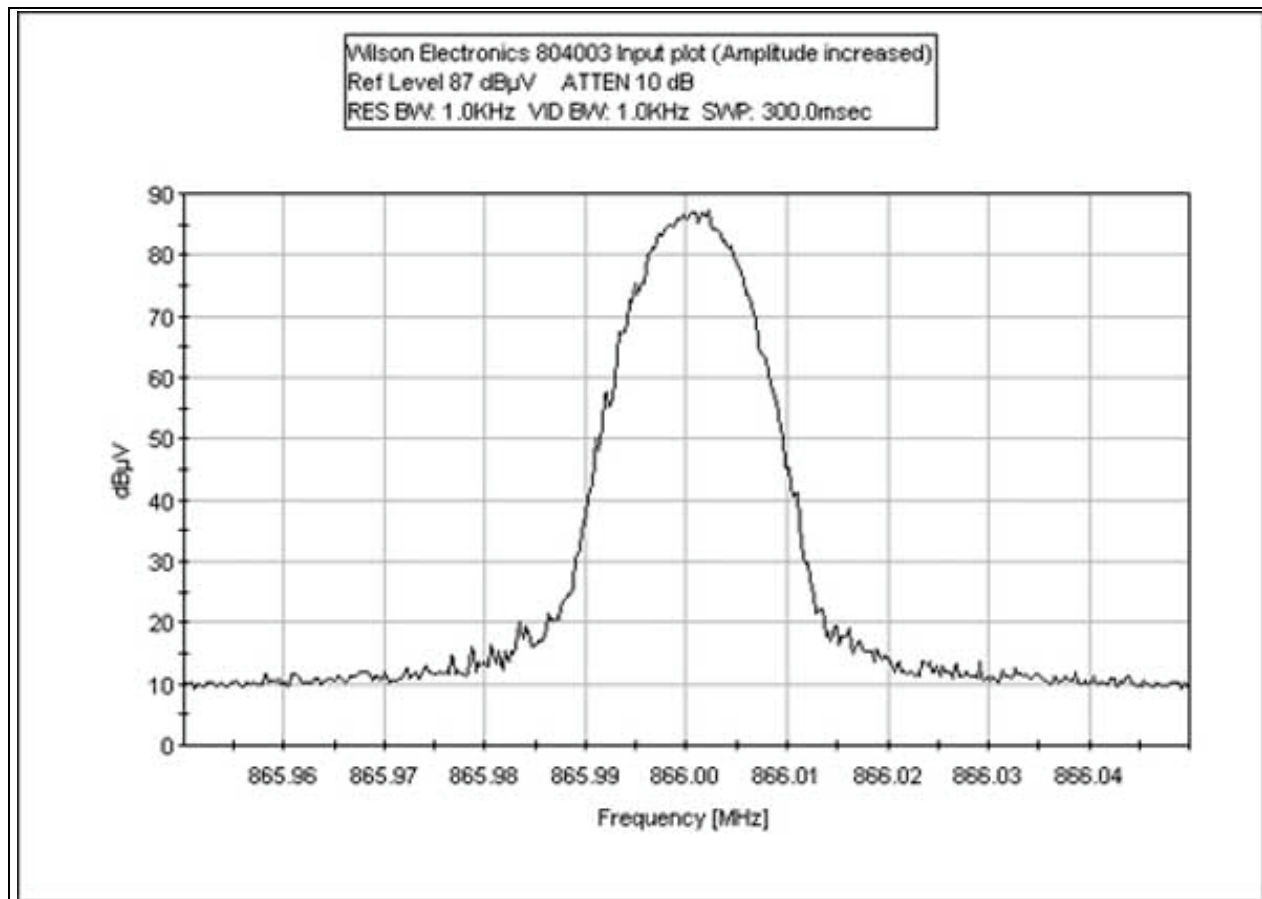


Test Equipment

Function	S/N	Calibration Date	Cal Due Date	Asset #
HP 8596E Spectrum Analyzer	3346A00225	06/24/2003	06/24/2004	00783
30 dB attenuator, Bird 25-A-MFN-30	9724	05/08/2003	05/08/2005	1577


DIRECT CONNECT TEST SETUP




RSS 131 - DOWNLINK PASSBAND GAIN

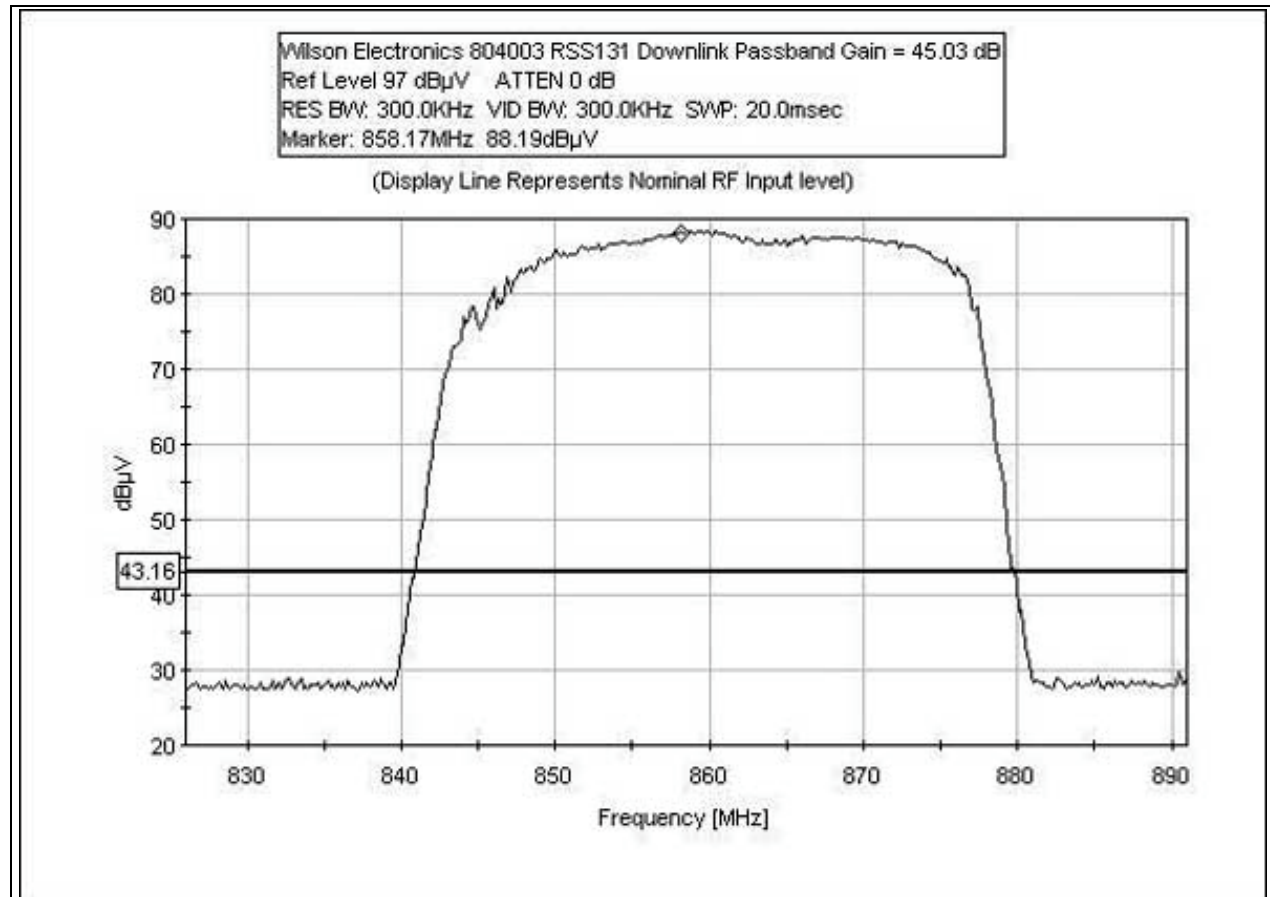


RSS 131 - DOWNLINK PASSBANDWIDTH 20dB

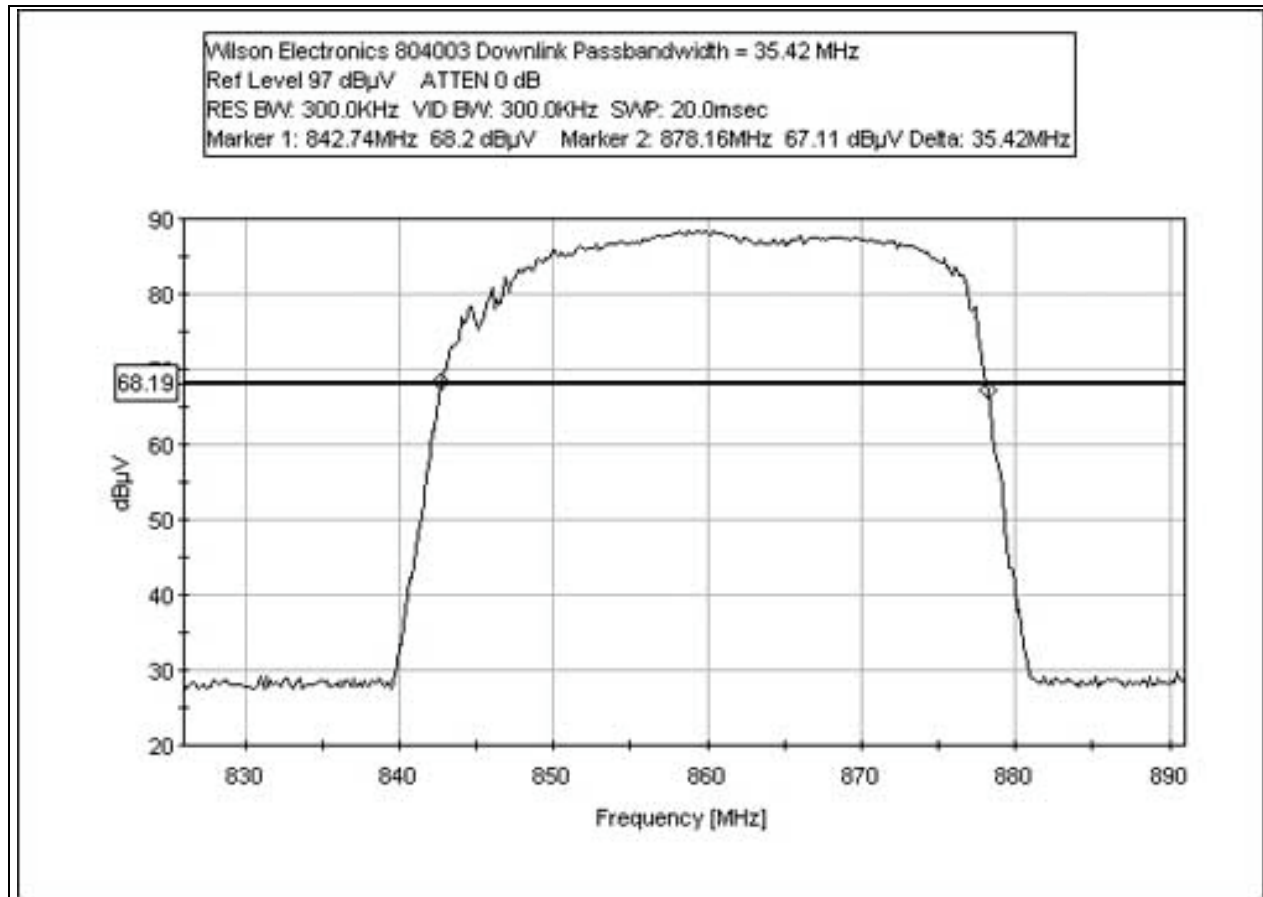

RSS 131 - UPLINK PASSBAND GAIN

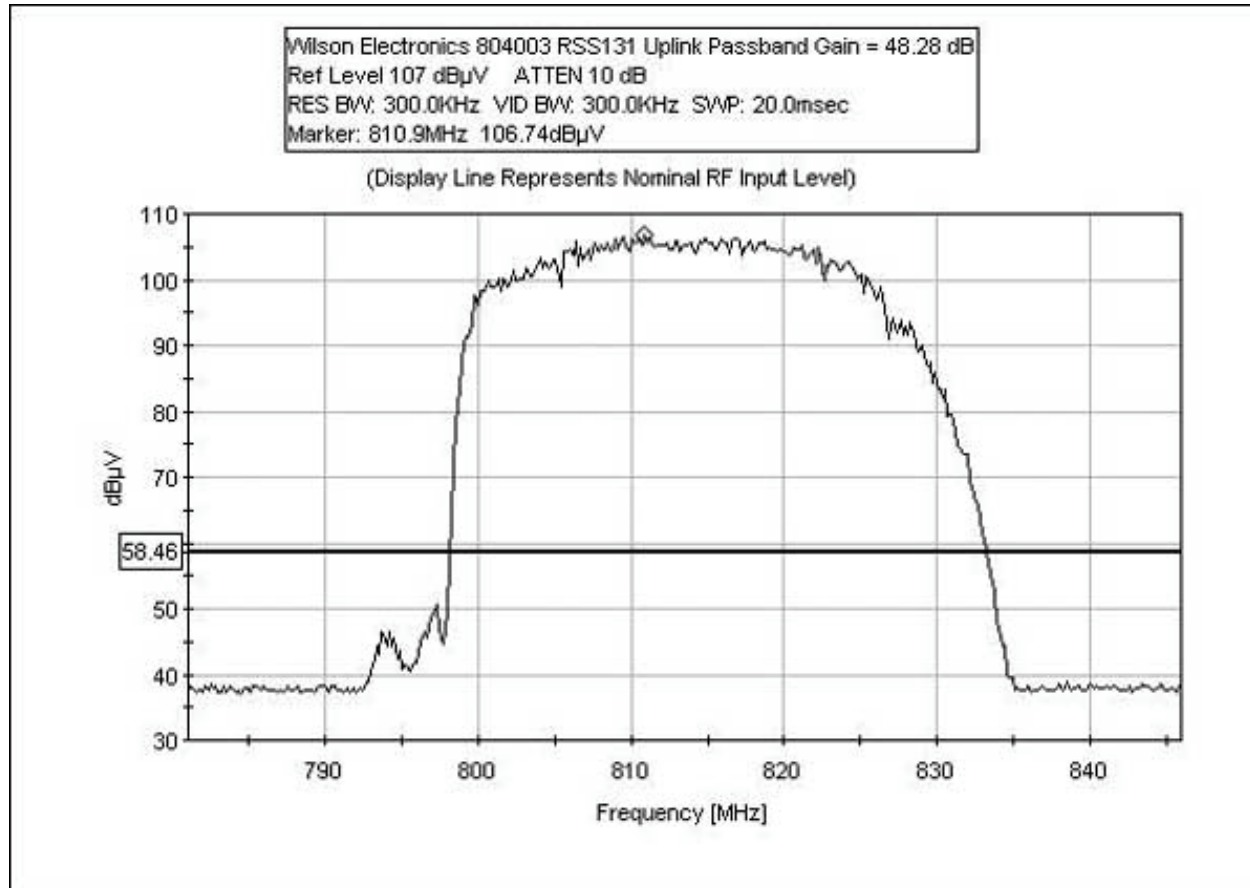

RSS 131 - UPLINK PASSBANDWIDTH 20dB

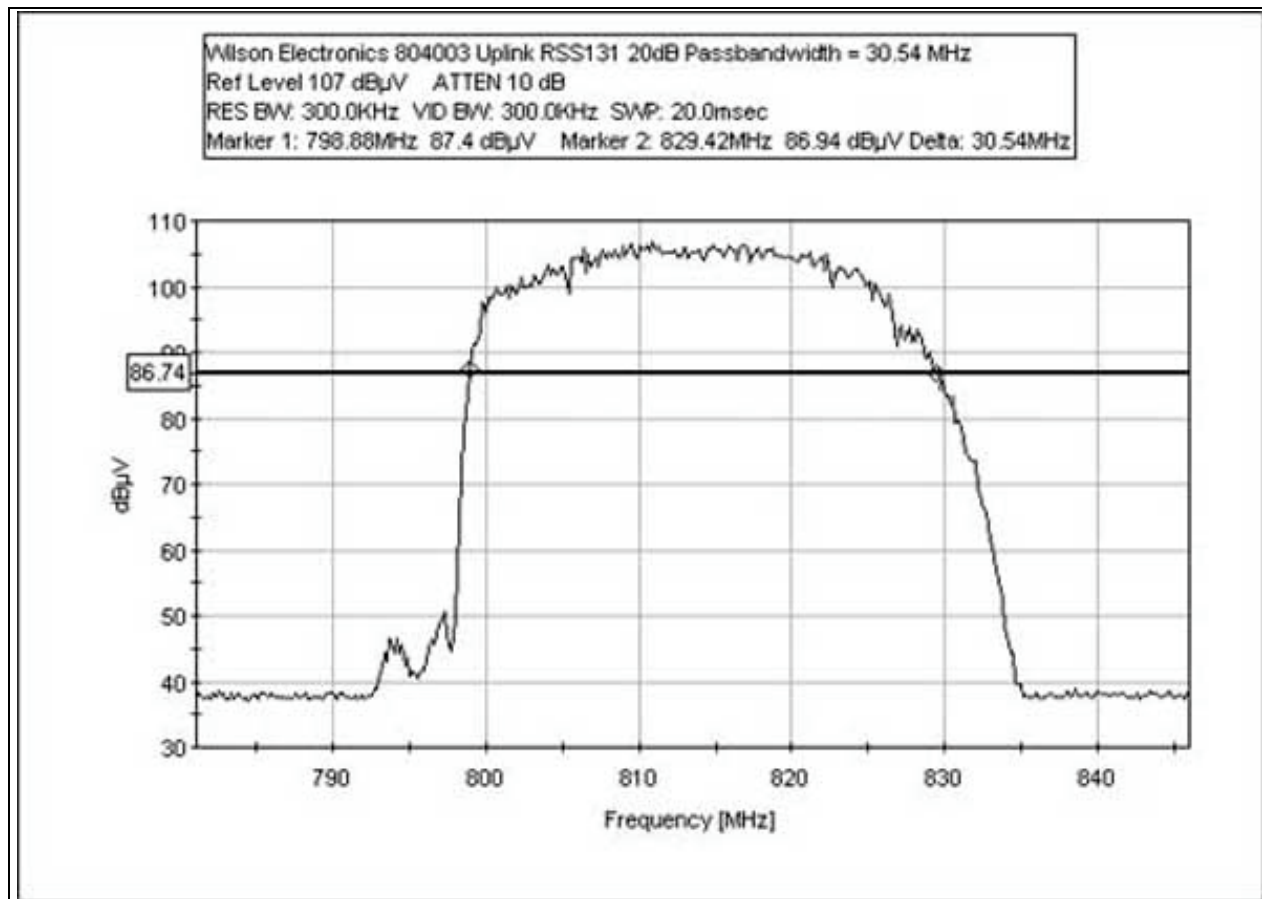

Test Equipment

Function	S/N	Calibration Date	Cal Due Date	Asset #
HP 8596E Spectrum Analyzer	3346A00225	06/24/2003	06/24/2004	00783
30 dB attenuator, Bird 25-A-MFN-30	9724	05/08/2003	05/08/2005	1577

DIRECT CONNECT TEST SETUP

