



ADDENDUM B TO WILSON ELECTRONICS TEST REPORT FC04-021A

FOR THE

BIDIRECTIONAL CELLULAR AMPLIFIER REPEATER, 811210

FCC PART 22H AND RSS-131

COMPLIANCE

DATE OF ISSUE: NOVEMBER 8, 2006

PREPARED FOR:

Wilson Electronics
3301 East Deseret Drive
St. George, UT 84790

P.O. No.: DBP811210-1
W.O. No.: 85466

PREPARED BY:

Mary Ellen Clayton
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Date of test: August 30 - September 6, 2006

Report No.: FC04-021B

This report contains a total of 85 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc. The results in this report apply only to the items tested, as identified herein.

TABLE OF CONTENTS

Administrative Information	3
FCC to Canada Standard Correlation Matrix.....	4
Conditions for Compliance	4
Approvals.....	5
Equipment Under Test (EUT) Description	6
Equipment Under Test	6
Peripheral Devices	6
Temperature and Humidity During Testing.....	7
FCC 2.1033(c)(3) User's Manual	7
FCC 2.1033(c)(4) Type of Emissions.....	7
FCC 2.1033(c)(5) Frequency Range.....	7
FCC 2.1033(c)(6) Operating Power.....	7
FCC 2.1033(c)(7) Maximum Operating Power Allowed by Part 22.913.....	7
FCC 2.1033(c)(8) DC Voltages	7
FCC 2.1033(c)(9) Tune-Up Procedure	7
FCC 2.1033(c)(10) Schematics and Circuitry Description.....	7
FCC 2.1033(c)(11) Label and Placement	7
FCC 2.1033(c)(12) Submittal Photos	7
FCC 2.1033(c)(13) Modulation Information	7
FCC 2.1033(c)(14)/2.1046/22.913 - RF Power Output	8
RSS-131 Power Output.....	12
FCC 2.1033(c)(14)/2.1047(b) - Audio Frequency Response.....	14
FCC 2.1033(c)(14)/2.1047(b) - Modulation Limiting Response.....	14
FCC 2.1033(c)(14)/2.1049(i) - Downlink Occupied Bandwidth.....	14
FCC 2.1033(c)(14)/2.1051/22.917 - Spurious Emissions at Antenna Terminal.....	20
FCC 2.1033(c)(14)/2.1053/22.917 - Field Strength of Spurious Radiation	45
Downlink Block Edge.....	47
Downlink Intermodulation Attenuation.....	58
Downlink Input Vs Output Plots	70
Downlink Out Of Band Rejection.....	76
Uplink Out Of Band Rejection	78
RSS-131 Downlink Passband Gain	80
RSS-131 Downlink Passband Width	83

ADMINISTRATIVE INFORMATION

DATE OF TEST: August 30 - September 6, 2006

DATE OF RECEIPT: August 30, 2006

FREQUENCY RANGE TESTED: 30 MHz-20 GHz

MANUFACTURER: Wilson Electronics
3301 East Deseret Drive
St. George, UT 84790

REPRESENTATIVE: Riki Kline

TEST LOCATION: CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

TEST METHOD: FCC Part 22H, RSS-131 and RSS GEN

PURPOSE OF TEST: **Original Report:** To demonstrate the compliance of the Dual Band Bidirectional Amplifier, 811201 with the requirements for FCC Part 22H and RSS 131 devices.
Addendum A: The EUT, 811210, is a derivative of the originally tested EUT, 811201. Refer to page 6 for further *EUT Description*. This addendum is to demonstrate the compliance of the Bidirectional Cellular Amplifier Repeater, 811210 with the requirements for FCC Part 22H and RSS-131 devices. Compliance is partially based upon the original compliance testing as explained on page 4 of this document under *Testing Justifications*.
Addendum B is to revise the data sheet on page 22 with no new testing.

FCC TO CANADA STANDARD CORRELATION MATRIX

Canadian Standard	Canadian Section	FCC Standard	FCC Section	Test Description
RSS 131	5.4	NA	NA	External Controls
RSS 131	5.5	47 CFR	1.1307	RF Exposure
RSS 131	6.1	NA	NA	Passband Gain and Bandwidth
RSS 131	6.2	NA	NA	RF Power Output
NA	NA	47 CFR	22.913	RF Power Output
RSS 131	6.3	TIA/EIA	603	Non-Linearity (Intermodulation Attenuation)
RSS 131	6.4	47 CFR	22.917	Spurious Emissions Limitations
RSS 131	6.5	N/A	N/A	Frequency Stability (Band Translators)
	3082A-1		784962	Site File No.

CONDITIONS FOR COMPLIANCE

No modifications to the EUT were necessary to comply.

Testing Justification: The following tests were performed at the uplink output port: RF Output Power and out of band rejection. Based on the scope of changes to the equipment, the manufacturer declares that the changes to the uplink path represent a Class I permissive change and as such limited testing was performed to ensure compliance with the relevant regulations. It was determined during testing that the power output measured was comparable to that previously measured and thus all previous reported measurements are representative of the modified product.

The following tests were performed at the downlink output port: All tests performed. Based on the scope of changes to the equipment, the manufacturer declares that these changes are significant enough to warrant re-testing in order to determine compliance. Since the output power has been reduced below the $\pm 0.5\text{dB}$ tolerance allowed by the FCC for a Class II permissive change, the manufacturer is required to file an application for a new FCC ID.

APPROVALS

Steve Behm, Director of Engineering Services

QUALITY ASSURANCE:




Joyce Walker, Quality Assurance Administrative Manager



Mike Wilkinson, Lab Manager

TEST PERSONNEL:



Randy Clark, EMC Engineer

EQUIPMENT UNDER TEST (EUT) DESCRIPTION

The customer declares the EUT tested by CKC Laboratories was representative of a production unit. The EUT is a dual-band (800 MHz and 1900 MHz), bi-directional cell phone amplifier. Coupling to the cell phone is by means of a small inductive coupler that is attached to the cell phone. This amplifier is a derivative of the previously certified model 811201, FCC ID: PWO819D, IC: 4762A-819D.

The EUT is identical to the previously certified amplifier (811201) except for the following changes:

One low-level MMIC (monolithic microwave integrated circuit) has been added to increase the downlink gain. The attenuation of passive attenuators has been reduced to increase the uplink gain. Both the layout of the circuit board and the external case have been changed to afford more efficient manufacturing.

Note: The above modifications in gain compensate for the additional losses incurred by using the inductive coupler. These low level changes are not expected to worsen the electrical characteristics relative to those already reported in the certification tests for the 811201 certificated amplifier.

EQUIPMENT UNDER TEST

Bidirectional Cellular Amplifier Repeater

Manuf: Wilson Electronics
Model: 811210
Serial: 8112100110000
FCC ID: PWO8119DA (pending)
IC ID: 4762A-819DA

PERIPHERAL DEVICES

The EUT was tested with the following peripheral device(s):

DC Power Supply

Manuf: Topward Electric Instruments Co., Ltd.
Model: TPS-2000
Serial: 920035

Digital Signal Generator

Manuf: Agilent
Model: E4432B
Serial: MY41000108

TEMPERATURE AND HUMIDITY DURING TESTING

The temperature during testing was within +15°C and + 35°C.
The relative humidity was between 20% and 75%.

FCC 2.1033(c)(3) USER'S MANUAL

The necessary information is contained in a separate document.

FCC 2.1033 (c)(4) TYPE OF EMISSIONS

F9W, GXW, G7W, F1D

FCC 2.1033 (c)(5) FREQUENCY RANGE

824 to 894 MHz band. Uplink frequency range 824 - 849 MHz.
Downlink frequency range 869 - 894 MHz.

FCC 2.1033 (c)(6) OPERATING POWER

Downlink 3.24 milliwatts, Uplink 2.69 Watts

FCC 2.1033 (c)(7) MAXIMUM OPERATING POWER ALLOWED BY PART 22.913

Mobile: 7 Watts ERP

Fixed: 500 Watts ERP

FCC 2.1033 (c)(8) DC VOLTAGES

The necessary information is contained in a separate document.

FCC 2.1033 (c)(9) TUNE-UP PROCEDURE

The necessary information is contained in a separate document.

FCC 2.1033(c)(10) SCHEMATICS AND CIRCUITRY DESCRIPTION

The necessary information is contained in a separate document.

FCC 2.1033(c)(11) LABEL AND PLACEMENT

The necessary information is contained in a separate document.

FCC 2.1033(c)(12) SUBMITTAL PHOTOS

The necessary information is contained in a separate document.

FCC 2.1033 (c)(13) MODULATION INFORMATION

AMPS, CDMA, EDGE, GSM.

FCC 2.1033(c)(14)/2.1046/22.913 - RF POWER OUTPUT

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1046**

Work Order #: **81892**

Equipment: **Bidirectional Cellular Amplifier
Repeater**

Manufacturer: Wilson Electronics

Model: 811210

S/N: 8112100110000

Tested By: Randal Clark

12VDC

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202
Attenuator 30dB, Bird	9724	05/18/2005	05/18/2007	P01577
25A-MFN-30				

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric	TPS-2000	920035
Digital Signal Generator	Instruments Co., Ltd.	E4432B	MY41000108

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Antenna port is terminated into spectrum analyzer through suitable attenuation. Peak detection used for all modulations.

CDMA – RBW=8MHz, VBW=8MHz

GSM and EDGE – RBW=1MHz, VBW=3MHz

AMPS – RBW=300kHz, VBW=910kHz

Frequency Range Investigated: Carrier

Temperature: 79°F

Relative Humidity: 35%

Test Conditions: Only one signal is input to the amplifier. The input from the signal generator is set such that the maximum output is provided at the antenna terminals. The internal ALC of the amplifier limits the maximum power output to a factory set level. Power output is continuously variable and directly proportional to the supplied RF input. Minimum RF output power of 0.00 Watts is achieved with a 0.00 Watt RF input signal.

Uplink Output Ratings:

CDMA, AMPS and TDMA (EDGE & GSM) formats: 3Watts

Downlink Output Ratings:

All: <10mW

RF power output of the amplifier is routed to a spectrum analyzer through suitable attenuation.

Downlink - Conducted Power

<i>Frequency (MHz)</i>	<i>Modulation</i>	<i>Power Output (milliWatts)</i>
870.25	CDMA	3.16
881.5	CDMA	3.24
892.75	CDMA	3.16
869.28	GSM	1.62
881.5	GSM	2.04
893.72	GSM	2.09
869.28	EDGE	1.58
881.5	EDGE	2.04
893.72	EDGE	2.09
869.03	AMPS	1.58
881.5	AMPS	2.04
893.97	AMPS	2.09

Uplink – Conducted Power

<i>Frequency (MHz)</i>	<i>Modulation</i>	<i>Power Output (Watts)</i>
825.25	CDMA	2.00
836.5	CDMA	2.00
847.75	CDMA	1.48
824.28	GSM	2.51
836.5	GSM	2.69
848.72	GSM	1.78
824.28	EDGE	2.57
836.5	EDGE	2.57
848.72	EDGE	1.70
824.03	AMPS	1.02
836.5	AMPS	0.81
848.97	AMPS	0.91

Uplink – ERP Power

<i>Frequency (MHz)</i>	<i>Modulation</i>	<i>Power Output (Watts)</i>
825.25	CDMA	1.58
836.5	CDMA	1.58
847.75	CDMA	1.17
824.28	GSM	1.99
836.5	GSM	2.13
848.72	GSM	1.41
824.28	EDGE	2.03
836.5	EDGE	2.03
848.72	EDGE	1.34
824.03	AMPS	0.81
836.5	AMPS	0.64
848.97	AMPS	0.72

Note:

EIRP calculated using highest gain mobile antenna sold with equipment. Antenna consists of a 5.12 dBi gain antenna and 4.0 dB cable loss as declared by the manufacturer.

PHOTOGRAPH SHOWING DIRECT CONNECT TEST SETUP



RSS-131 POWER OUTPUT

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202
Attenuator 30dB, Bird	9724	05/18/2005	05/18/2007	P01577
25A-MFN-30				

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

EUT is an In Vehicle Wireless Dual Band Amplifier / Repeater
824 to 894 MHz AMPS band.

Uplink frequency range 824 - 849 MHz.

Downlink frequency range 869 - 894 MHz.

1850 to 1990 MHz PCS band.

Uplink frequency range 1850-1910 MHz

Downlink frequency range 1930-1990 MHz.

Test Conditions: Two Signal generators are connected to a signal combiner. The output of the signal combiner is connected to the Indoor/Outdoor antenna port of the EUT. The mean power (p mean) is evaluated at the Outdoor/Indoor antenna port of the EUT with a spectrum analyzer via a directional coupler. Coupling Loss: 30.7 for 800MHz band.

Injection Frequencies (MHz)	Highest Measured Output Power (P dBm)	Mean Output Power (P + 3dB dBm)	Mean Output Power (Watts)
825	30.1	N/A	1.02
836.5	29.1	N/A	0.81
848	29.6	N/A	0.91
870 & 871	-2.3	0.7	0.001175
891 & 892	-2.0	1.0	0.001259

PHOTOGRAPH SHOWING DIRECT CONNECT TEST SETUP



**FCC 2.1033(c)(14)/2.1047(a) - MODULATION CHARACTERISTICS - AUDIO
FREQUENCY RESPONSE**

Not applicable to this unit.

**FCC 2.1033(c)(14)/2.1047(b) MODULATION CHARACTERISTICS– Modulation
Limiting Response**

Not applicable to this unit.

FCC 2.1033(c)(14)/2.1049(i)- DOWNLINK OCCUPIED BANDWIDTH

Test Location: KCRC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**
Specification: **FCC 2.1049 / RSS 131**
Work Order #: **81892**
Test Type: **Antenna Conducted**
Equipment: **Bidirectional Cellular Amplifier
Repeater**

Manufacturer: Wilson Electronics
Model: 811210
S/N: 8112100110000

Tested By: Randal Clark
12VDC

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36" NA		02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000


Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108


Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Antenna port is terminated into spectrum analyzer.
Frequency Range Investigated: Carrier
Temperature: 79°F
Relative Humidity: 35%


DOWNLINK OCCUPIED BANDWIDTH - AMPS

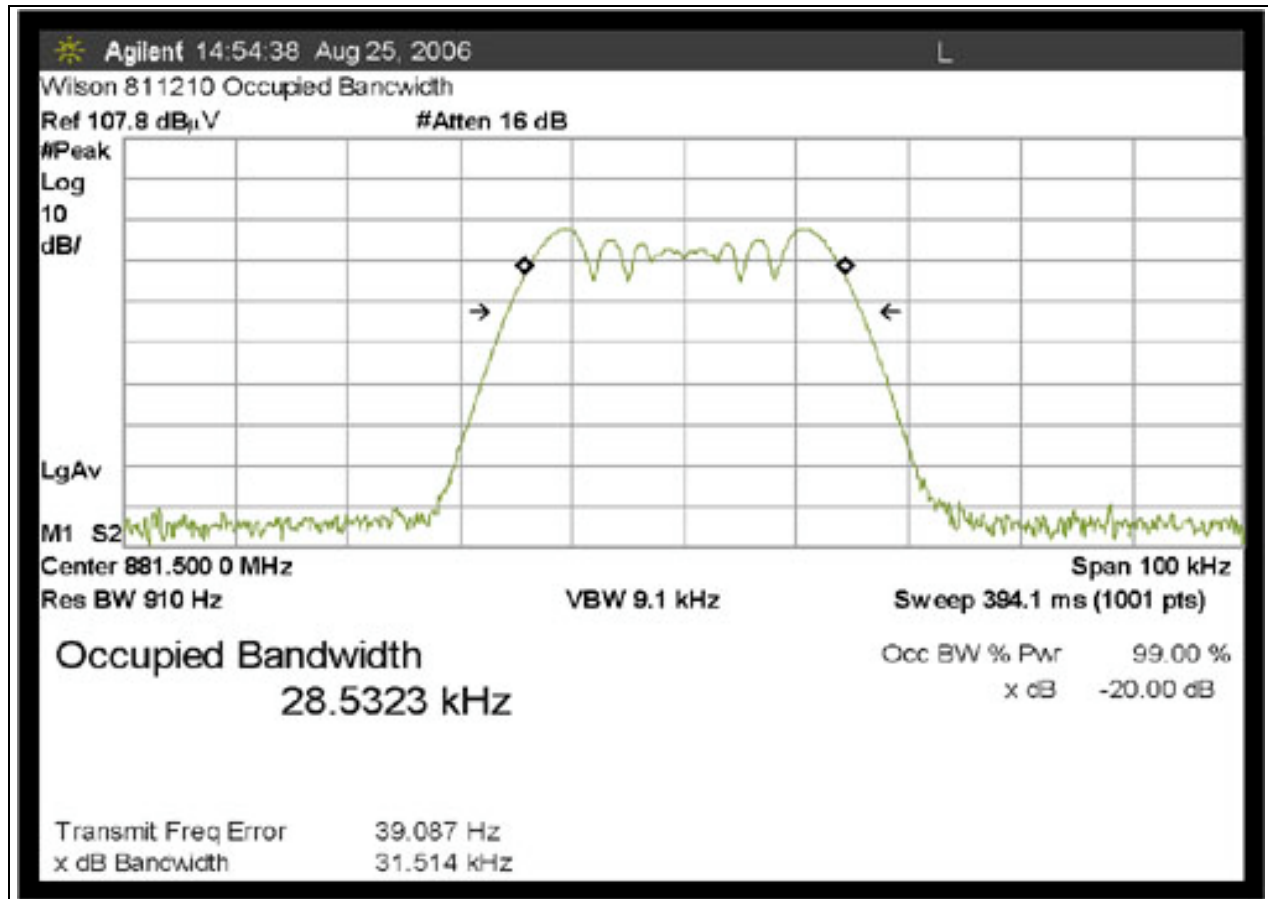


DOWNLINK OCCUPIED BANDWIDTH - CDMA

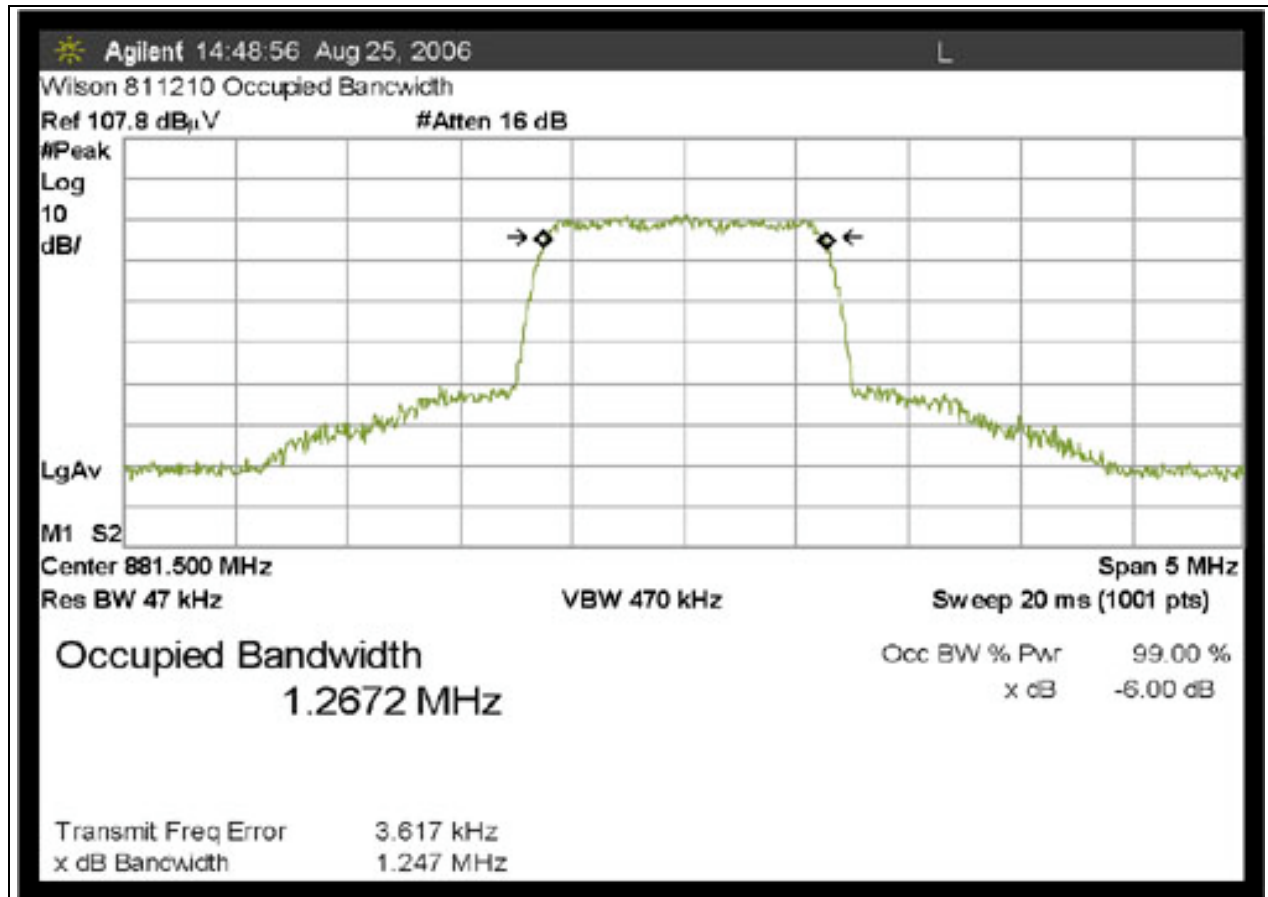

DOWNLINK OCCUPIED BANDWIDTH - EDGE

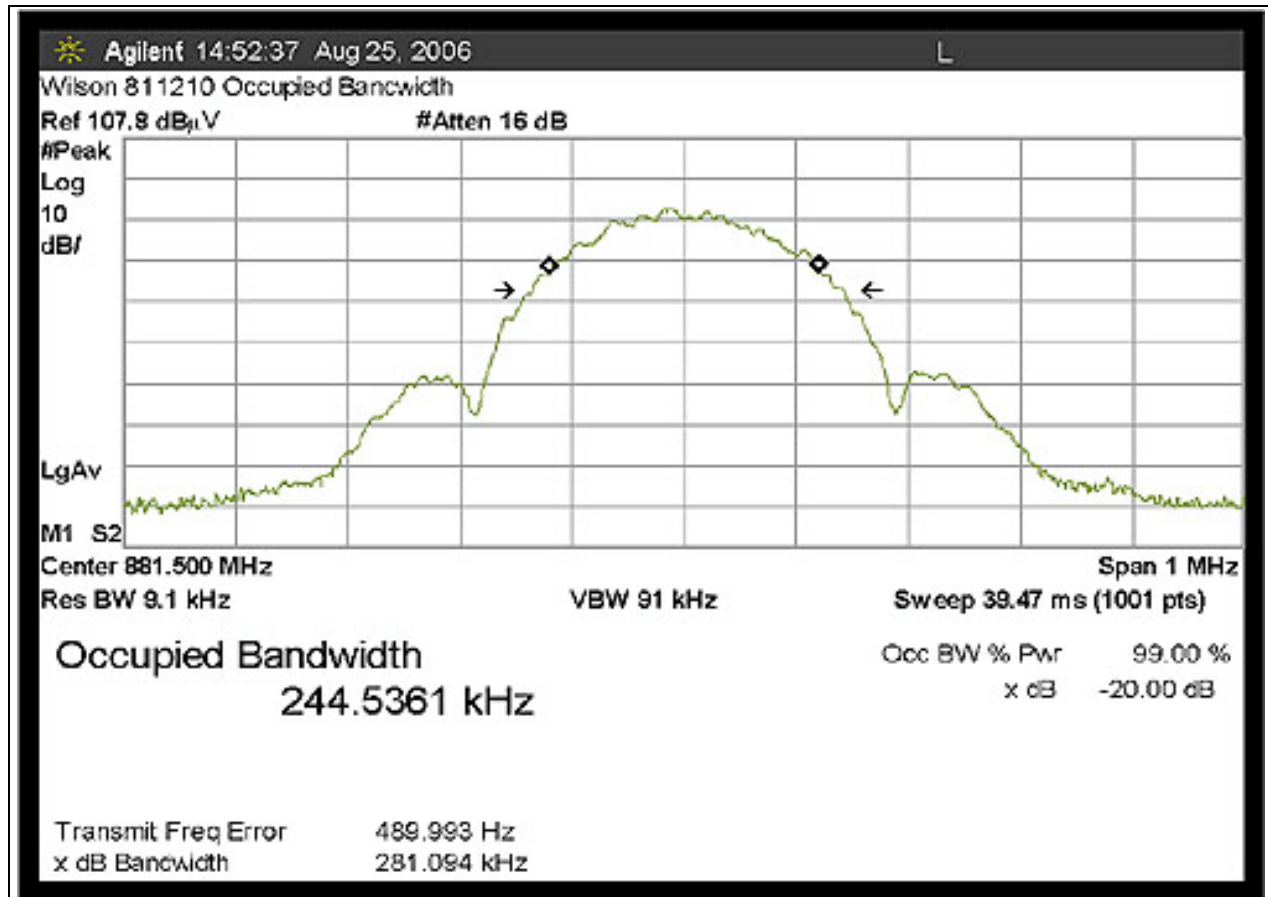

DOWNLINK OCCUPIED BANDWIDTH - GSM

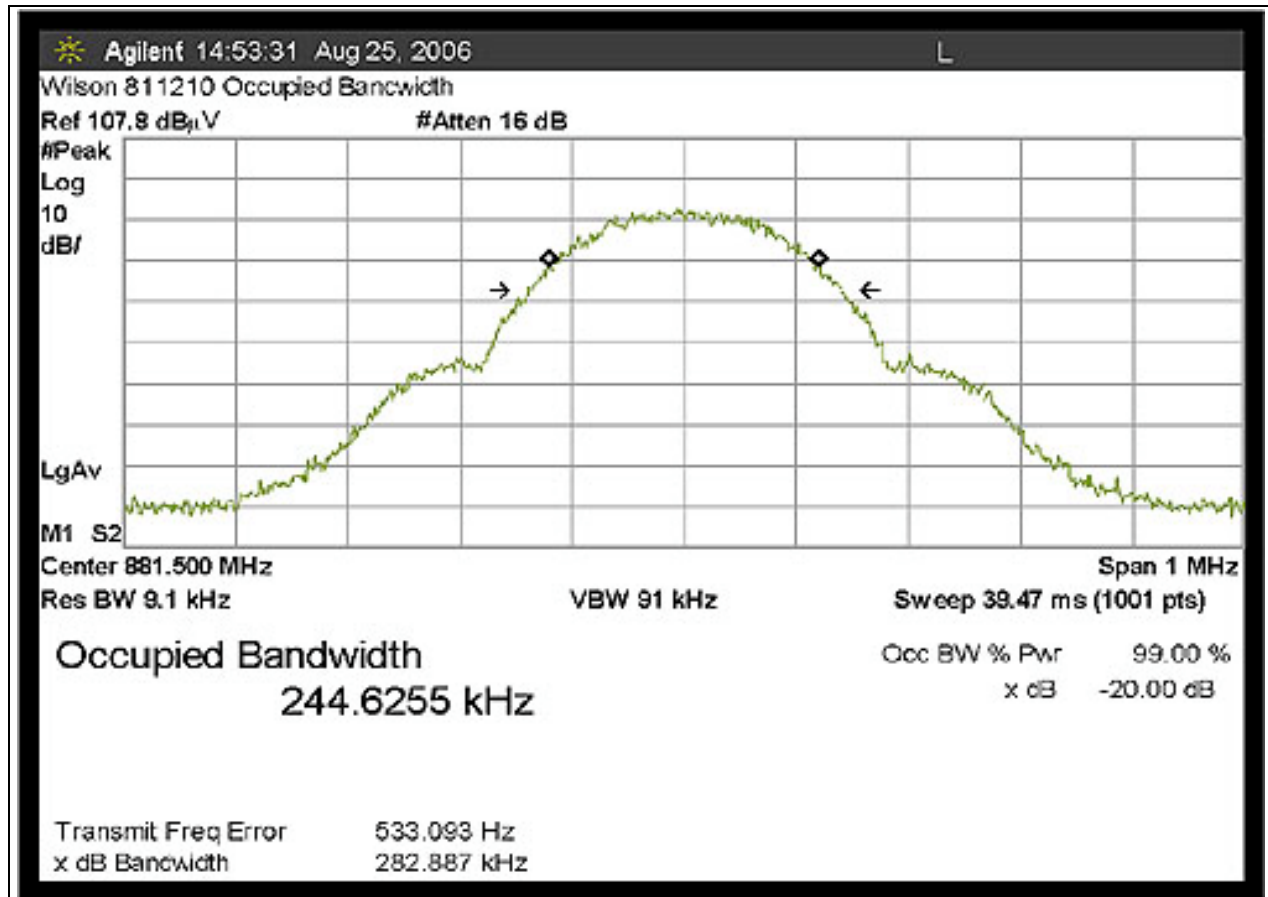

PHOTOGRAPH SHOWING DIRECT CONNECT TEST SETUP



FCC 2.1033(c)(14)/2.1051/22.917 - SPURIOUS EMISSIONS AT ANTENNA TERMINAL

Bandwidth settings used: 100 kHz.

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**
Specification: **FCC 2.1051**
Work Order #: **81892** Date: 8/31/2006
Test Type: **Antenna Conducted** Time: 11:29:13
Equipment: **Bidirectional Cellular Amplifier Repeater** Sequence#: 7
Manufacturer: Wilson Electronics Tested By: Randal Clark
Model: 811210 12VDC
S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Frequency Range Investigated: 30 MHz - 20 GHz. Carrier Frequency: 881.5 MHz. Modulation Type: AMPS. Temperature: 79°F, Relative Humidity: 35%.


Transducer Legend:

T1=Cable 40 GHz 36"

Measurement Data:			Reading listed by margin.					Test Lead: RF Output Downlink			
#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	881.505M	108.4	+0.6				+0.0	109.0	109.0	+0.0	RF Ou
									Carrier		
2	4407.545M	84.9	+1.4				+0.0	86.3	94.0	-7.7	RF Ou
3	2644.459M	76.2	+1.1				+0.0	77.3	94.0	-16.7	RF Ou
4	3525.906M	63.4	+1.2				+0.0	64.6	94.0	-29.4	RF Ou

5	1763.032M	61.1	+0.9	+0.0	62.0	94.0	-32.0	RF Ou
6	6170.544M	55.2	+1.7	+0.0	56.9	94.0	-37.1	RF Ou
7	5288.994M	52.4	+1.6	+0.0	54.0	94.0	-40.0	RF Ou

CKC Laboratories Date: 8/31/2006 Time: 11:29:13 Wilson Electronics WVO#: 81892
FCC 2.1051 Test Lead: RF Output Downlink 12VDC Sequence#: 7
Wilson Electronics M/N 811210 800 MHz AMPS Downlink Mid Channel

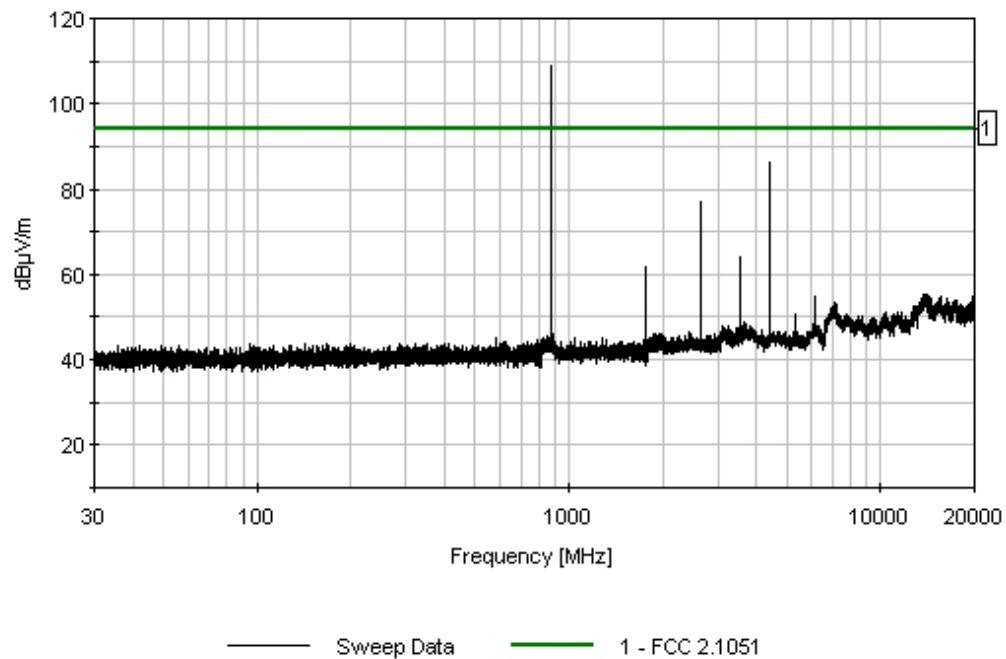

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1051**

Work Order #: **81892**

Date: 8/31/2006

Test Type: **Antenna Conducted**

Time: 11:11:09

Equipment: **Bidirectional Cellular Amplifier Repeater**

Sequence#: 6

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Frequency Range Investigated: 30 MHz - 20 GHz. Carrier Frequency: 869.03 MHz. Modulation Type: AMPS. Temperature: 79°F, Relative Humidity: 35%.

Transducer Legend:

T1=Cable 40 GHz 36"


Measurement Data: Reading listed by margin.

Test Lead: RF Output Downlink

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	869.030M	107.4	+0.6				+0.0	108.0	108.0 Carrier	+0.0	RF Ou
2	4345.265M	85.1	+1.4				+0.0	86.5	94.0	-7.5	RF Ou
3	2607.159M	84.1	+1.1				+0.0	85.2	94.0	-8.8	RF Ou
4	3476.212M	68.9	+1.2				+0.0	70.1	94.0	-23.9	RF Ou

5	1738.106M	60.9	+0.9	+0.0	61.8	94.0	-32.2	RF Ou
6	6083.362M	56.9	+1.6	+0.0	58.5	94.0	-35.5	RF Ou
7	5214.308M	53.6	+1.6	+0.0	55.2	94.0	-38.8	RF Ou

CKC Laboratories Date: 8/31/2006 Time: 11:11:09 Wilson Electronics WVO#: 81892
FCC 2.1051 Test Lead: RF Output Downlink 12VDC Sequence#: 6
Wilson Electronics M/N 811210 800 MHz AMPS Downlink Low Channel

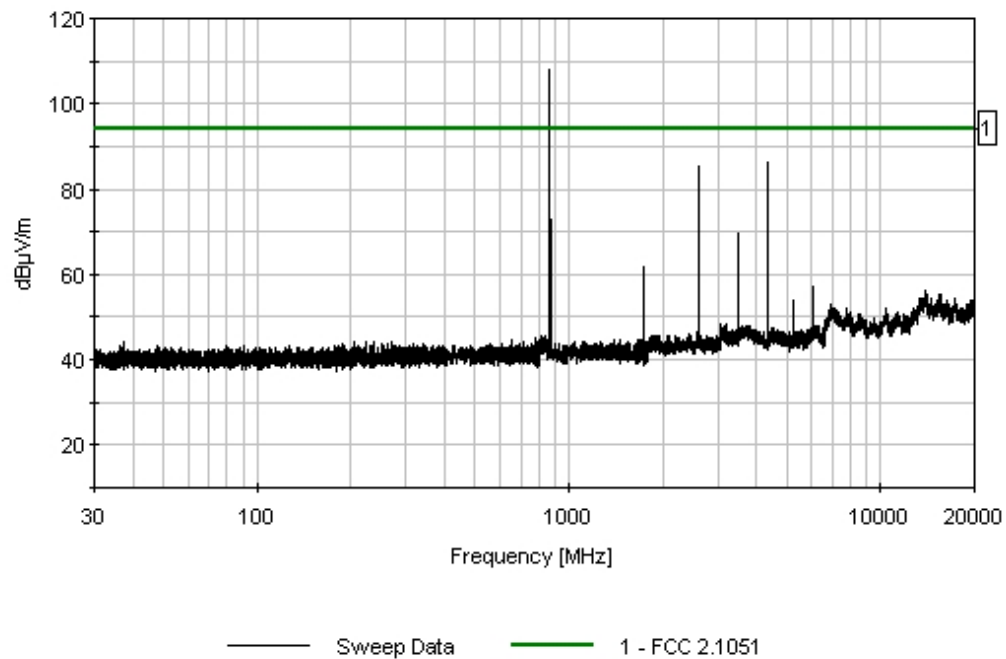

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1051**

Work Order #: **81892**

Date: 8/31/2006

Test Type: **Antenna Conducted**

Time: 11:24:56

Equipment: **Bidirectional Cellular Amplifier Repeater**

Sequence#: 8

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Frequency Range Investigated: 30 MHz - 20 GHz. Carrier Frequency: 893.97 MHz. Modulation Type: AMPS. Temperature: 79°F, Relative Humidity: 35%.

Transducer Legend:


T1=Cable 40 GHz 36"

Measurement Data: Reading listed by margin. Test Lead: RF Output Downlink

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	893.957M	108.5	+0.6				+0.0	109.1	109.1 Carrier	+0.0	RF Ou
2	4469.852M	84.3	+1.4				+0.0	85.7	94.0	-8.3	RF Ou
3	2681.923M	76.3	+1.1				+0.0	77.4	94.0	-16.6	RF Ou
4	1787.925M	60.6	+0.9				+0.0	61.5	94.0	-32.5	RF Ou

5	5363.805M	53.5	+1.6	+0.0	55.1	94.0	-38.9	RF Ou
6	6257.879M	50.9	+1.7	+0.0	52.6	94.0	-41.4	RF Ou
7	3575.793M	51.3	+1.3	+0.0	52.6	94.0	-41.4	RF Ou

CKC Laboratories Date: 8/31/2006 Time: 11:24:56 Wilson Electronics WVO#: 81892
FCC 2.1051 Test Lead: RF Output Downlink 12VDC Sequence#: 8
Wilson Electronics M/N 811210 800 MHz AMPS Downlink High Channel

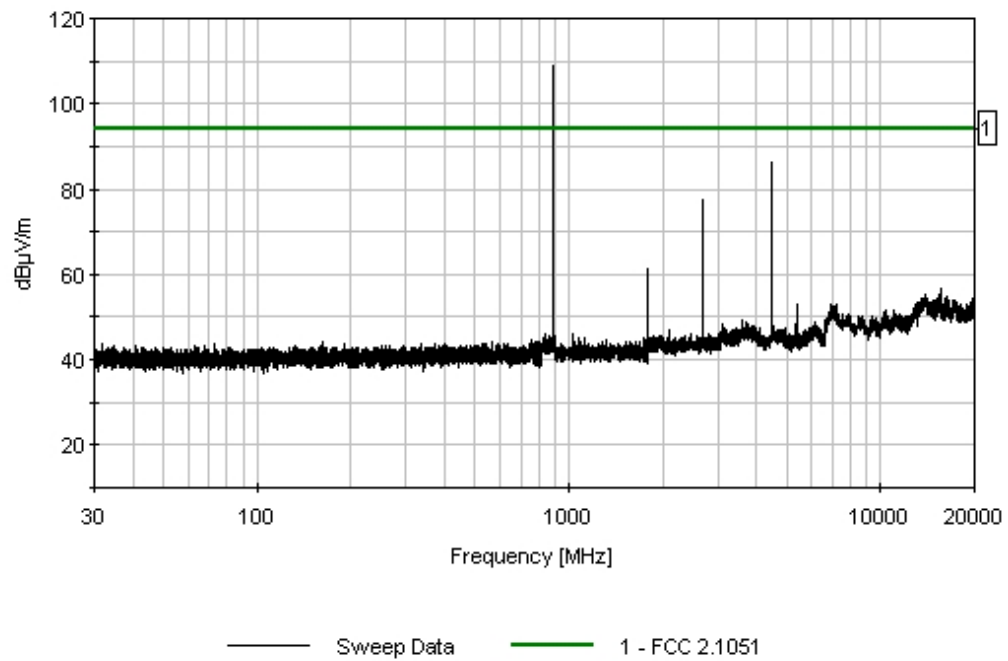

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1051**

Work Order #: **81892**

Date: 8/31/2006

Test Type: **Antenna Conducted**

Time: 11:38:08

Equipment: **Bidirectional Cellular Amplifier Repeater**

Sequence#: 9

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Frequency Range Investigated: 30 MHz - 20 GHz. Carrier Frequency: 870.25 MHz. Modulation Type: CDMA. Temperature: 79°F, Relative Humidity: 35%.

Transducer Legend:


T1=Cable 40 GHz 36"

Measurement Data: Reading listed by margin.

Test Lead: RF Output Downlink

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	870.250M	103.1	+0.6				+0.0	103.7	103.7 Carrier	+0.0	RF Ou
2	4350.983M	82.0	+1.4				+0.0	83.4	94.0	-10.6	RF Ou
3	2609.970M	79.2	+1.1				+0.0	80.3	94.0	-13.7	RF Ou
4	3481.009M	68.7	+1.2				+0.0	69.9	94.0	-24.1	RF Ou
5	6091.978M	56.3	+1.6				+0.0	57.9	94.0	-36.1	RF Ou
6	1740.368M	54.6	+0.9				+0.0	55.5	94.0	-38.5	RF Ou

CKC Laboratories Date: 8/31/2006 Time: 11:38:08 Wilson Electronics W/O#: 81892
FCC 2.1051 Test Lead: RF Output Downlink 12VDC Sequence#: 9
Wilson Electronics M/N 811210 800MHz CDMA Downlink Low Channel

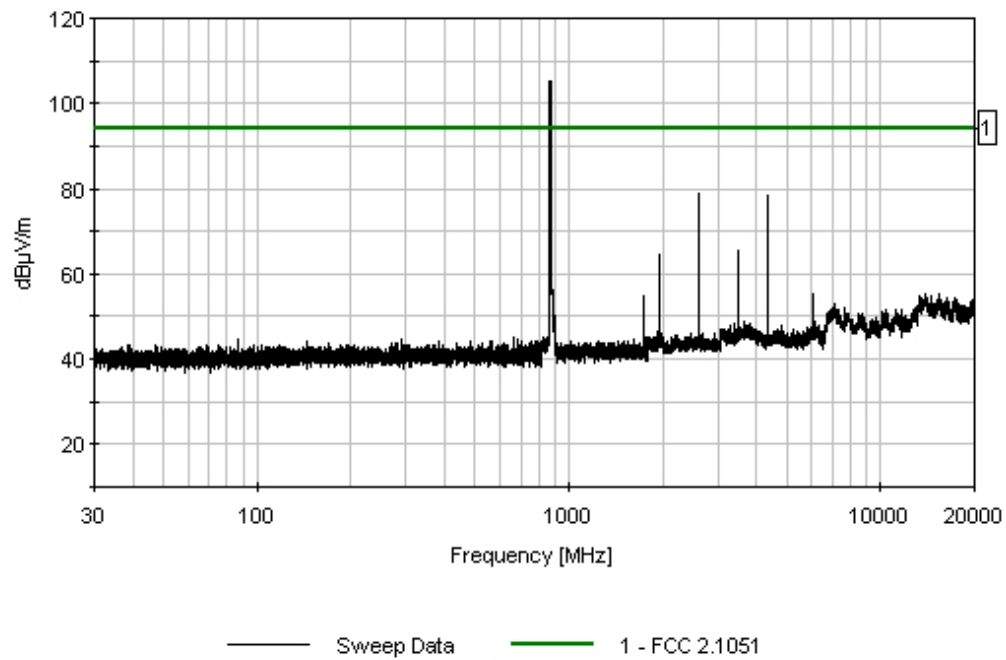

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1051**

Work Order #: **81892**

Date: 8/31/2006

Test Type: **Antenna Conducted**

Time: 11:46:19

Equipment: **Bidirectional Cellular Amplifier Repeater**

Sequence#: 10

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Frequency Range Investigated: 30 MHz - 20 GHz. Carrier Frequency: 881.5 MHz. Modulation Type: CDMA. Temperature: 79°F, Relative Humidity: 35%.

Transducer Legend:

T1=Cable 40 GHz 36"


Measurement Data: Reading listed by margin.

Test Lead: RF Output Downlink

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	881.260M	105.7	+0.6				+0.0	106.3	106.3 Carrier	+0.0	RF Ou
2	4407.465M	80.8	+1.4				+0.0	82.2	94.0	-11.8	RF Ou
3	2643.720M	72.3	+1.1				+0.0	73.4	94.0	-20.6	RF Ou
4	1940.880M	66.6	+0.9				+0.0	67.5	94.0	-26.5	RF Ou

5	3525.995M	60.9	+1.2	+0.0	62.1	94.0	-31.9	RF Ou
6	1762.907M	56.8	+0.9	+0.0	57.7	94.0	-36.3	RF Ou
7	6170.425M	50.4	+1.7	+0.0	52.1	94.0	-41.9	RF Ou

CKC Laboratories Date: 8/31/2006 Time: 11:46:19 Wilson Electronics WO#: 81892
FCC 2.1051 Test Lead: RF Output Downlink 12VDC Sequence#: 10
Wilson Electronics M/N 811210 800MHz CDMA Downlink Mid Channel

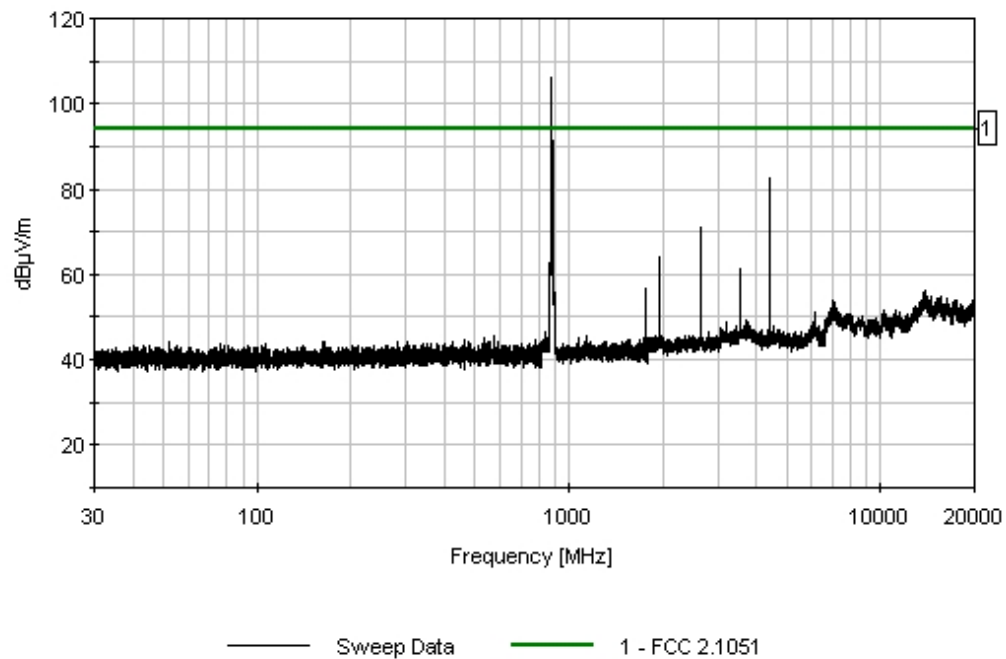

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1051**

Work Order #: **81892**

Date: 8/31/2006

Test Type: **Antenna Conducted**

Time: 11:50:58

Equipment: **Bidirectional Cellular Amplifier Repeater**

Sequence#: 10

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Frequency Range Investigated: 30 MHz - 20 GHz. Carrier Frequency: 892.75 MHz. Modulation Type: CDMA. Temperature: 79°F, Relative Humidity: 35%.

Transducer Legend:


T1=Cable 40 GHz 36"

Measurement Data: Reading listed by margin.

Test Lead: RF Output Downlink

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	892.792M	106.2	+0.6				+0.0	106.8	106.8 Carrier	+0.0	RF Ou
2	4463.801M	84.0	+1.4				+0.0	85.4	94.0	-8.6	RF Ou
3	2678.121M	73.4	+1.1				+0.0	74.5	94.0	-19.5	RF Ou
4	1940.200M	63.0	+0.9				+0.0	63.9	94.0	-30.1	RF Ou
5	1785.506M	58.5	+0.9				+0.0	59.4	94.0	-34.6	RF Ou
6	3570.991M	49.2	+1.3				+0.0	50.5	94.0	-43.5	RF Ou

CKC Laboratories Date: 8/31/2006 Time: 11:50:58 Wilson Electronics W/O#: 81892
FCC 2.1051 Test Lead: RF Output Downlink 12VDC Sequence#: 10
Wilson Electronics M/N 811210 800MHz CDMA Downlink High Channel

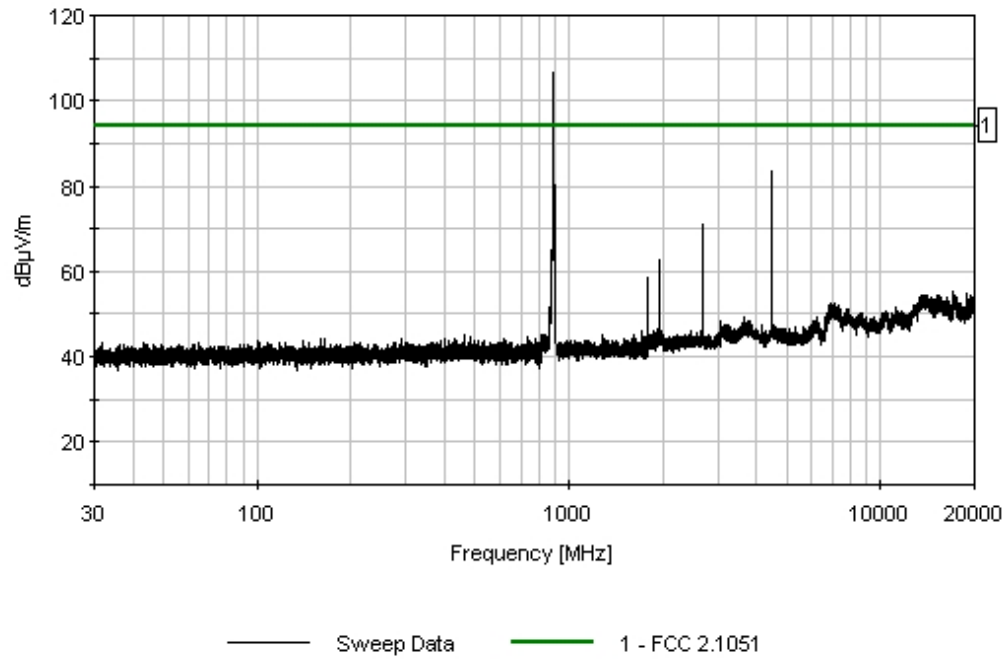

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1051**

Work Order #: **81892**

Date: 9/1/2006

Test Type: **Antenna Conducted**

Time: 08:50:54

Equipment: **Bidirectional Cellular Amplifier Repeater**

Sequence#: 21

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Frequency Range Investigated: 30 MHz - 20 GHz. Carrier Frequency: 869.28 MHz. Modulation Type: EDGE. Temperature: 79°F, Relative Humidity: 35%.

Transducer Legend:

T1=Cable 40 GHz 36"


Measurement Data: Reading listed by margin.

Test Lead: RF Output Downlink

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	869.280M	107.8	+0.6				+0.0	108.4	108.4 Carrier	+0.0	RF Ou
2	4346.340M	80.6	+1.4				+0.0	82.0	94.0	-12.0	RF Ou
3	3477.063M	76.1	+1.2				+0.0	77.3	94.0	-16.7	RF Ou
4	2607.804M	73.2	+1.1				+0.0	74.3	94.0	-19.7	RF Ou

5	6084.876M	61.2	+1.6	+0.0	62.8	94.0	-31.2	RF Ou
6	1738.734M	59.5	+0.9	+0.0	60.4	94.0	-33.6	RF Ou
7	5215.590M	55.1	+1.6	+0.0	56.7	94.0	-37.3	RF Ou
8	8692.668M	52.0	+2.0	+0.0	54.0	94.0	-40.0	RF Ou

CKC Laboratories Date: 9/1/2006 Time: 08:50:54 Wilson Electronics WVO#: 81892
FCC 2.1051 Test Lead: RF Output Downlink 12VDC Sequence#: 21
Wilson Electronics MN 811210 800MHz EDGE Downlink Low Channel

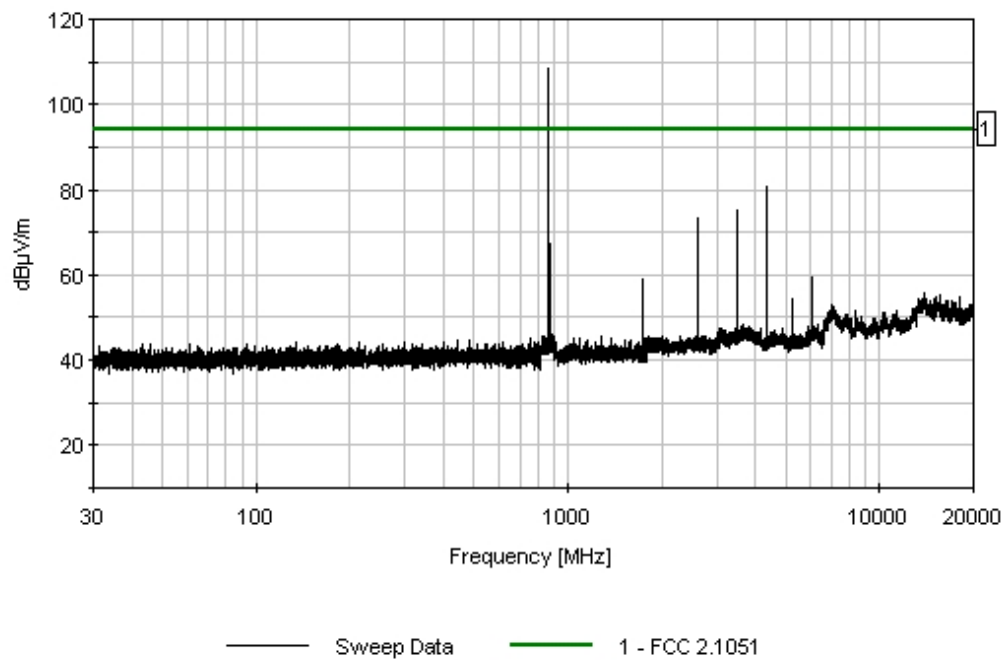

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1051**

Work Order #: **81892**

Date: 9/1/2006

Test Type: **Antenna Conducted**

Time: 09:15:41

Equipment: **Bidirectional Cellular Amplifier Repeater**

Sequence#: 22

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Frequency Range Investigated: 30 MHz - 20 GHz. Carrier Frequency: 881.5 MHz. Modulation Type: EDGE. Temperature: 79°F, Relative Humidity: 35%.

Transducer Legend:

T1=Cable 40 GHz 36"


Measurement Data: Reading listed by margin.

Test Lead: RF Output Downlink

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	881.496M	107.9	+0.6				+0.0	108.5	108.5 Carrier	+0.0	RF Ou
2	4407.438M	81.0	+1.4				+0.0	82.4	94.0	-11.6	RF Ou
3	3525.681M	65.1	+1.2				+0.0	66.3	94.0	-27.7	RF Ou
4	1762.980M	59.5	+0.9				+0.0	60.4	94.0	-33.6	RF Ou
5	2644.461M	56.8	+1.1				+0.0	57.9	94.0	-36.1	RF Ou

6	1940.090M	53.4	+0.9	+0.0	54.3	94.0	-39.7	RF Ou
7	5288.994M	49.1	+1.6	+0.0	50.7	94.0	-43.3	RF Ou
8	6170.463M	48.7	+1.7	+0.0	50.4	94.0	-43.6	RF Ou

CKC Laboratories Date: 9/1/2006 Time: 09:15:41 Wilson Electronics WVO#: 81892
FCC 2.1051 Test Lead: RF Output Downlink 12VDC Sequence#: 22
Wilson Electronics MN 811210 800MHz EDGE Downlink Mid Channel

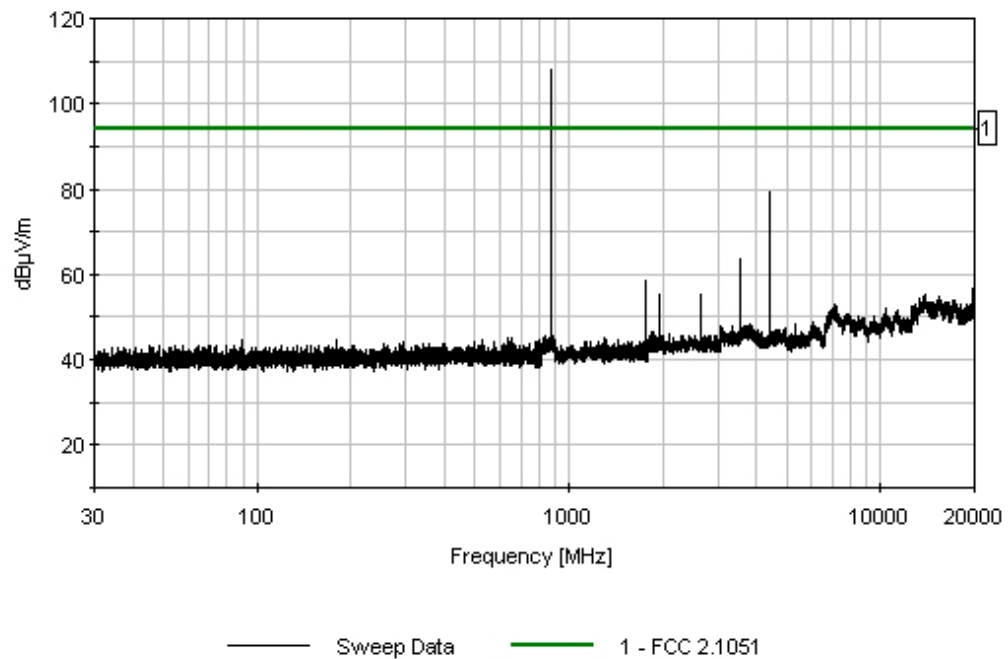

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1051**

Work Order #: **81892**

Date: 9/1/2006

Test Type: **Antenna Conducted**

Time: 09:19:49

Equipment: **Bidirectional Cellular Amplifier Repeater**

Sequence#: 23

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Frequency Range Investigated: 30 MHz - 20 GHz. Carrier Frequency: 893.72 MHz. Modulation Type: EDGE. Temperature: 79°F, Relative Humidity: 35%.


Transducer Legend:

T1=Cable 40 GHz 36"

Measurement Data: Reading listed by margin. Test Lead: RF Output Downlink

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	893.710M	107.9	+0.6				+0.0	108.5	108.5 Carrier	+0.0	RF Ou
2	4468.544M	81.0	+1.4				+0.0	82.4	94.0	-11.6	RF Ou
3	2681.130M	64.9	+1.1				+0.0	66.0	94.0	-28.0	RF Ou
4	1787.414M	59.2	+0.9				+0.0	60.1	94.0	-33.9	RF Ou
5	5362.260M	52.3	+1.6				+0.0	53.9	94.0	-40.1	RF Ou
6	3574.510M	51.2	+1.3				+0.0	52.5	94.0	-41.5	RF Ou

CKC Laboratories Date: 9/1/2006 Time: 09:19:49 Wilson Electronics WVO#: 81892
FCC 2.1051 Test Lead: RF Output Downlink 12VDC Sequence#: 23
Wilson Electronics MN 811210 800MHz EDGE Downlink High Channel

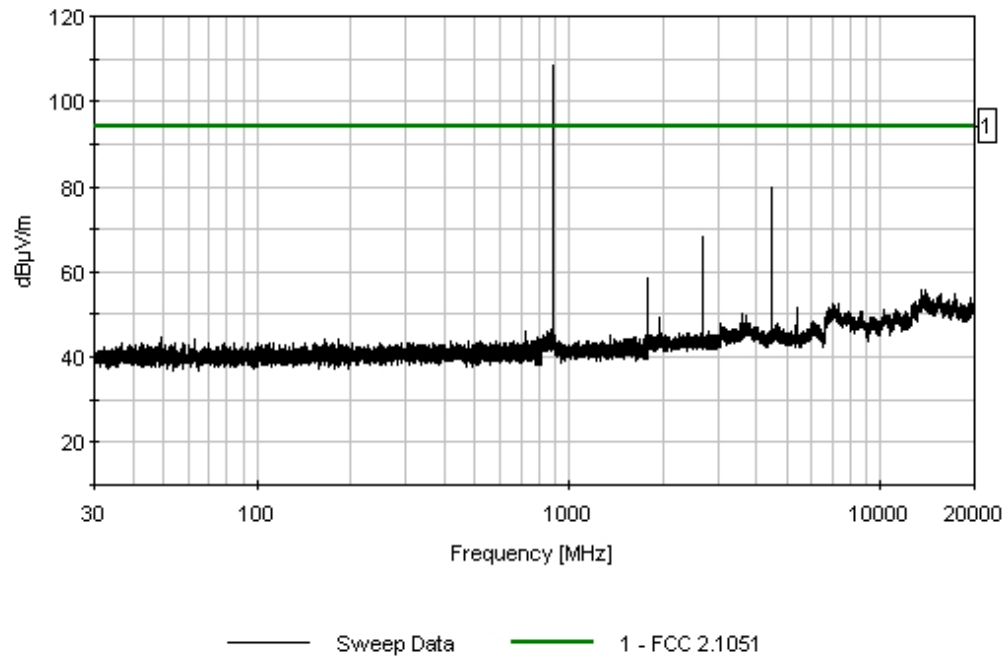

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1051**

Work Order #: **81892**

Date: 9/1/2006

Test Type: **Antenna Conducted**

Time: 10:07:58

Equipment: **Bidirectional Cellular Amplifier Repeater**

Sequence#: 26

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Frequency Range Investigated: 30 MHz - 20 GHz. Carrier Frequency: 869.28 MHz. Modulation Type: GSM. Temperature: 79°F, Relative Humidity: 35%.

Transducer Legend:

T1=Cable 40 GHz 36"


Measurement Data: Reading listed by margin.

Test Lead: RF Output Downlink

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	869.348M	106.4	+0.6				+0.0	107.0	107.0	+0.0	RF Ou
									Carrier		
2	4346.743M	80.2	+1.4				+0.0	81.6	94.0	-12.4	RF Ou
3	2607.639M	69.9	+1.1				+0.0	71.0	94.0	-23.0	RF Ou
4	3476.858M	66.8	+1.2				+0.0	68.0	94.0	-26.0	RF Ou

5	1738.699M	61.5	+0.9	+0.0	62.4	94.0	-31.6	RF Ou
6	5215.290M	52.2	+1.6	+0.0	53.8	94.0	-40.2	RF Ou
7	6084.497M	51.6	+1.6	+0.0	53.2	94.0	-40.8	RF Ou

CKC Laboratories Date: 9/1/2006 Time: 10:07:58 Wilson Electronics WVO#: 81892
FCC 2.1051 Test Lead: RF Output Downlink 12VDC Sequence#: 26
Wilson Electronics MN 811210 800MHz GSM Downlink Low Channel

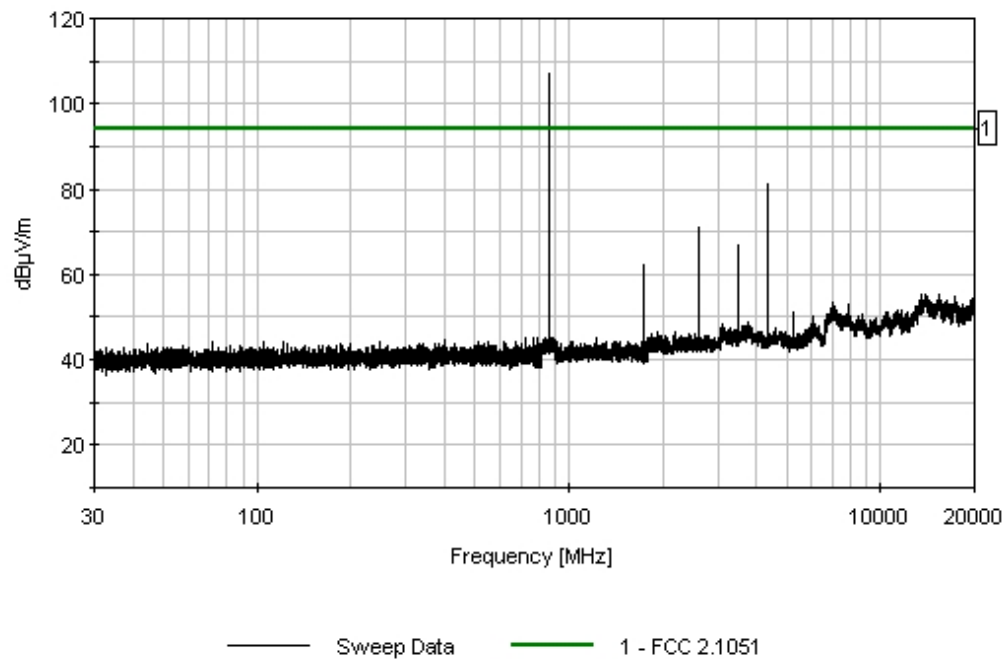

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1051**

Work Order #: **81892**

Date: 9/1/2006

Test Type: **Antenna Conducted**

Time: 10:04:57

Equipment: **Bidirectional Cellular Amplifier Repeater**

Sequence#: 25

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Frequency Range Investigated: 30 MHz - 20 GHz. Carrier Frequency: 881.5 MHz. Modulation Type: GSM. Temperature: 79°F, Relative Humidity: 35%.

Transducer Legend:

T1=Cable 40 GHz 36"


Measurement Data: Reading listed by margin.

Test Lead: RF Output Downlink

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	881.570M	107.6	+0.6				+0.0	108.2	108.2 Carrier	+0.0	RF Ou
2	4407.166M	82.0	+1.4				+0.0	83.4	94.0	-10.6	RF Ou
3	2644.305M	67.2	+1.1				+0.0	68.3	94.0	-25.7	RF Ou
4	3526.283M	61.9	+1.2				+0.0	63.1	94.0	-30.9	RF Ou

5	1763.131M	61.0	+0.9	+0.0	61.9	94.0	-32.1	RF Ou
6	5288.607M	52.8	+1.6	+0.0	54.4	94.0	-39.6	RF Ou
7	6170.993M	49.8	+1.7	+0.0	51.5	94.0	-42.5	RF Ou

CKC Laboratories Date: 9/1/2006 Time: 10:04:57 Wilson Electronics WVO#: 81892
FCC 2.1051 Test Lead: RF Output Downlink 12VDC Sequence#: 25
Wilson Electronics MN 811210 800MHz GSM Downlink Mid Channel

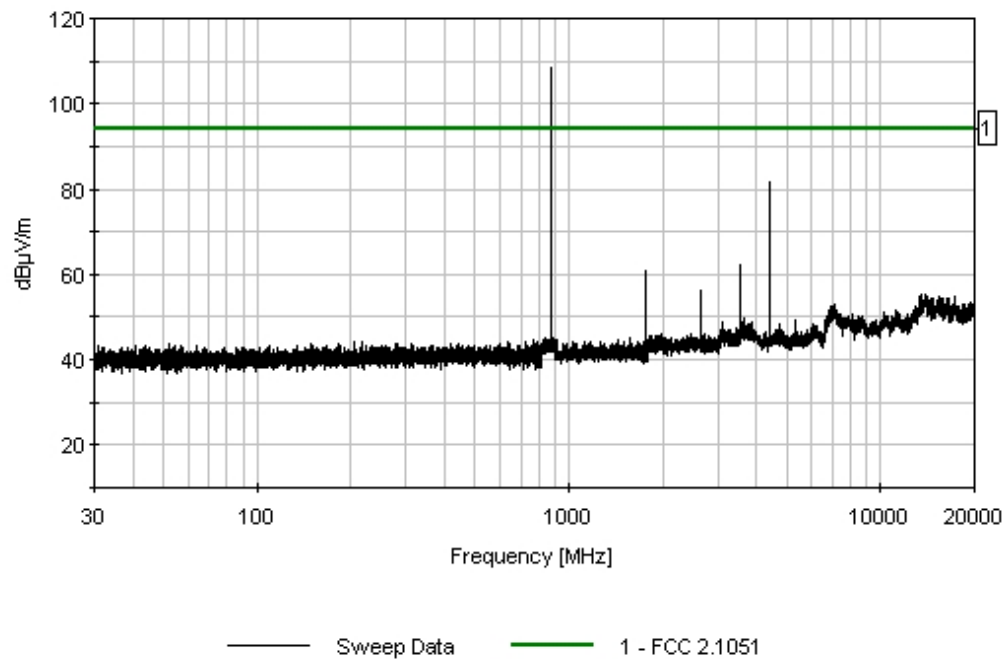

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1051**

Work Order #: **81892**

Date: 9/1/2006

Test Type: **Antenna Conducted**

Time: 09:25:57

Equipment: **Bidirectional Cellular Amplifier Repeater**

Sequence#: 24

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Frequency Range Investigated: 30 MHz - 20 GHz. Carrier Frequency: 893.72 MHz. Modulation Type: GSM. Temperature: 79°F, Relative Humidity: 35%.

Transducer Legend:

T1=Cable 40 GHz 36"


Measurement Data: Reading listed by margin.

Test Lead: RF Output Downlink

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	893.791M	107.4	+0.6				+0.0	108.0	108.0 Carrier	+0.0	RF Ou
2	4468.946M	82.1	+1.4				+0.0	83.5	94.0	-10.5	RF Ou
3	1787.591M	60.0	+0.9				+0.0	60.9	94.0	-33.1	RF Ou
4	2680.962M	59.2	+1.1				+0.0	60.3	94.0	-33.7	RF Ou

5	5361.909M	53.5	+1.6	+0.0	55.1	94.0	-38.9	RF Ou
6	3575.173M	49.4	+1.3	+0.0	50.7	94.0	-43.3	RF Ou
7	6256.513M	47.1	+1.7	+0.0	48.8	94.0	-45.2	RF Ou

CKC Laboratories Date: 9/1/2006 Time: 09:25:57 Wilson Electronics WVO#: 81892
FCC 2.1051 Test Lead: RF Output Downlink 12VDC Sequence#: 24
Wilson Electronics MN 811210 800MHz GSM Downlink High Channel

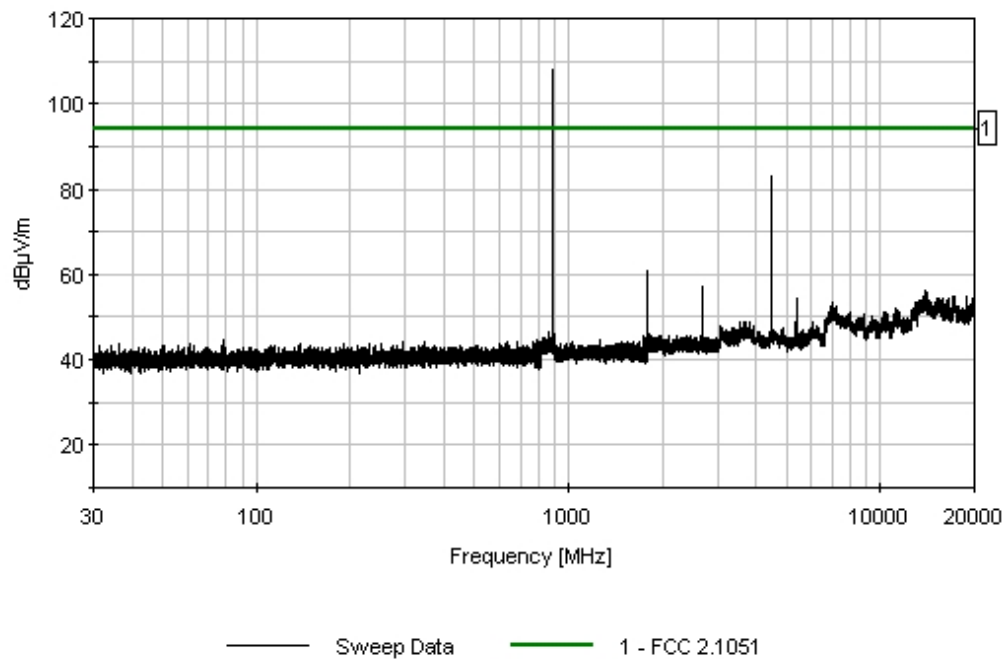

PHOTOGRAPH SHOWING DIRECT CONNECT TEST SETUP



FCC 2.1033(c)(14)/2.1053/22.917 - FIELD STRENGTH OF SPURIOUS RADIATION

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1053**

Work Order #: **81892**

Date: 9/6/2006

Test Type: **Maximized Emissions**

Time: 08:39:44

Equipment: **Bidirectional Cellular Amplifier Repeater**

Sequence#: 29

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
EMCO Loop Antenna	1074	05/13/2005	05/13/2007	00226
Chase CBL6111C Bilog	2456	06/07/2005	06/07/2007	01991
EMCO 3115 Horn Antenna	9307-4085	04/29/2005	04/29/2007	00656
ARA MWH-1826/B Horn Antenna	1005	11/05/2004	11/05/2006	02046
HP 8447D Preamp	1937A02604	03/11/2005	03/11/2007	00099
HP 8449B Preamp	3008A00301	12/14/2004	12/14/2006	2010
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202
Cable, Pasternack 48"	NA	02/08/2005	02/08/2007	P05203
Cable, Andrews Hardline	NA	05/27/2005	05/27/2007	P01012

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Signal generator is input to the amplifier while output is terminated in a shielded characteristic load. Frequency Range Investigated: 30 MHz - 20 GHz. Carrier Frequency: Downlink Signal generator is set to worst case configuration for output power. Temperature: 79°F, Relative Humidity: 35%. **No EUT emissions detected within 20 dB of the limit.**

Transducer Legend:

Measurement Data: Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	dB	dB	dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
---	-------------	--------------	----	----	----	----	---------------	----------------	----------------	--------------	--------------

PHOTOGRAPH SHOWING RADIATED EMISSIONS



DOWNLINK BLOCK EDGE

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1051**

Work Order #: **81892**

Date: 8/31/2006

Test Type: **Antenna Conducted**

Time: 11:29:13

Equipment: **Bidirectional Cellular Amplifier Repeater**

Sequence#: 7

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000


Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108


Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Frequency Range Investigated: Block Edges. Modulation Type: AMPS. Temperature: 79°F, Relative Humidity: 35%.


DOWNLINK BLOCK EDGE AMPS LOW

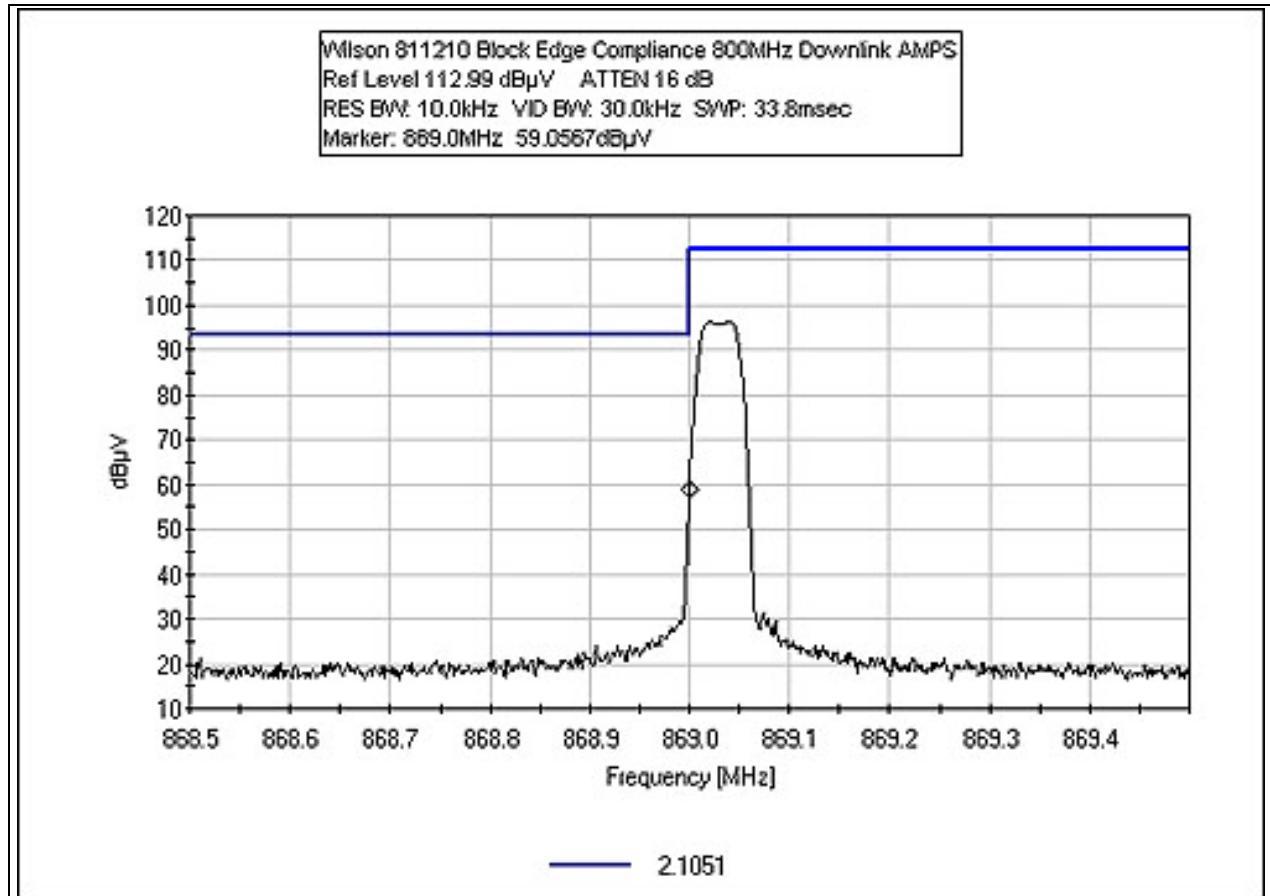


DOWNLINK BLOCK EDGE AMPS HIGH

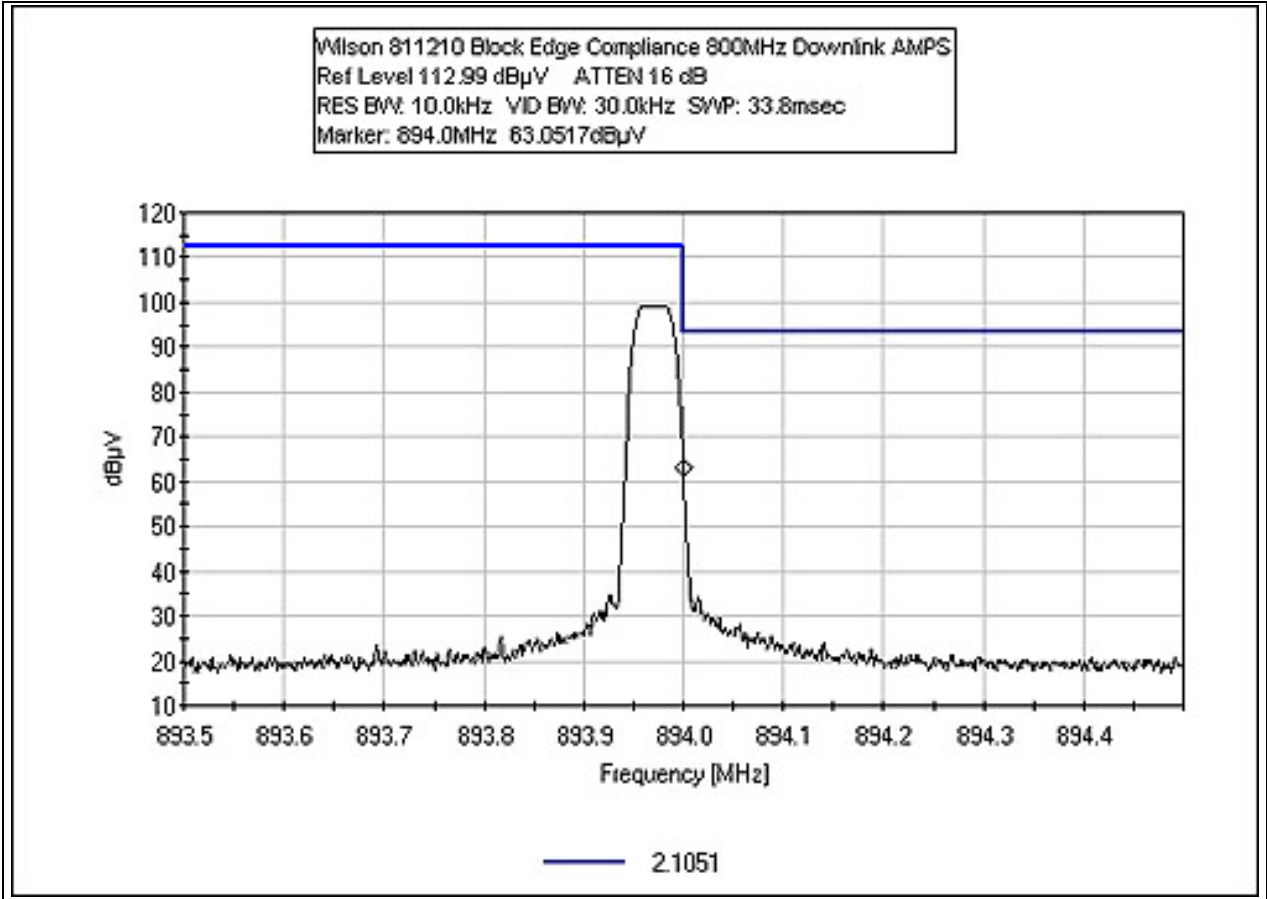


DOWNLINK BLOCK EDGE CDMA

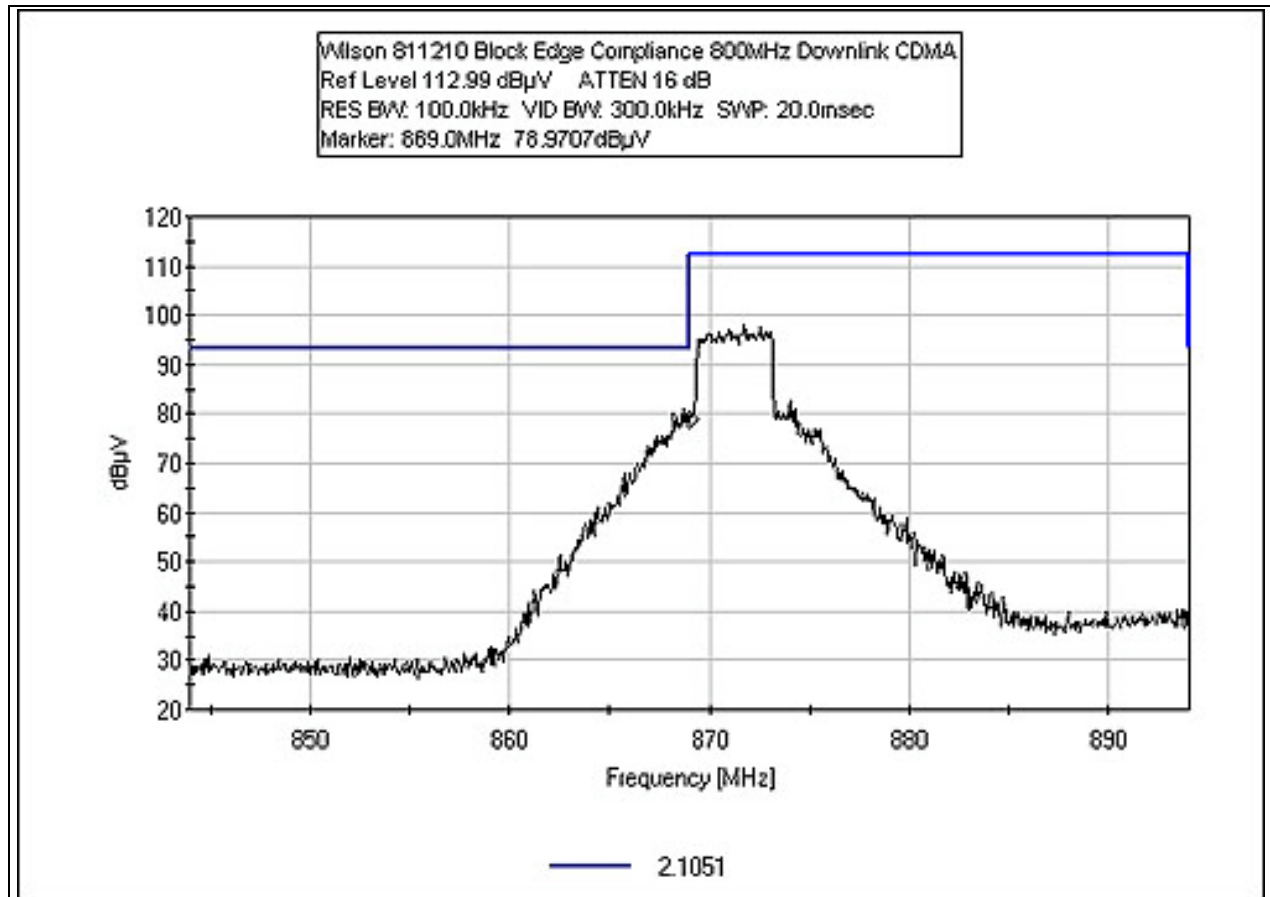


DOWNLINK BLOCK EDGE CDMA LOW

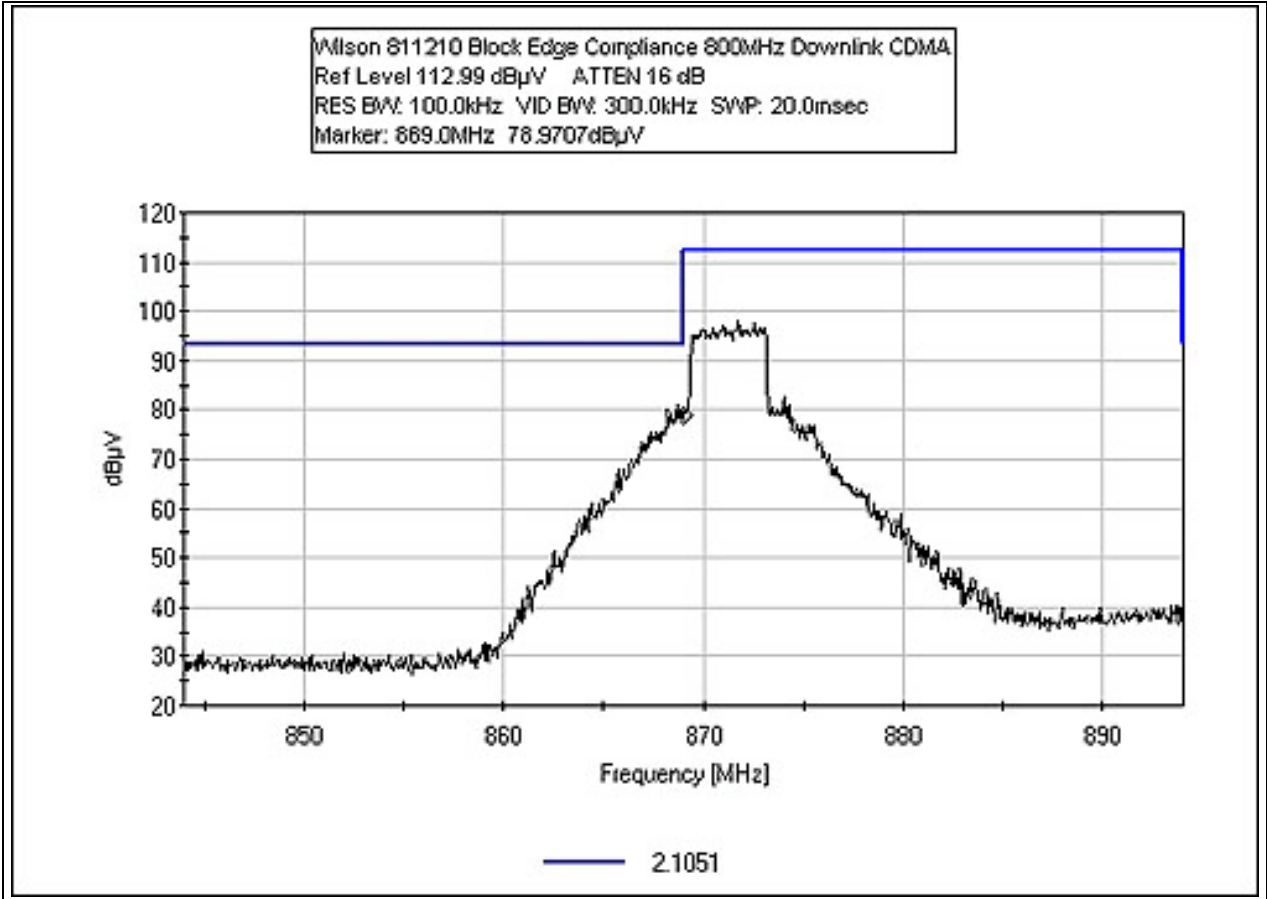


DOWNLINK BLOCK EDGE CDMA HIGH

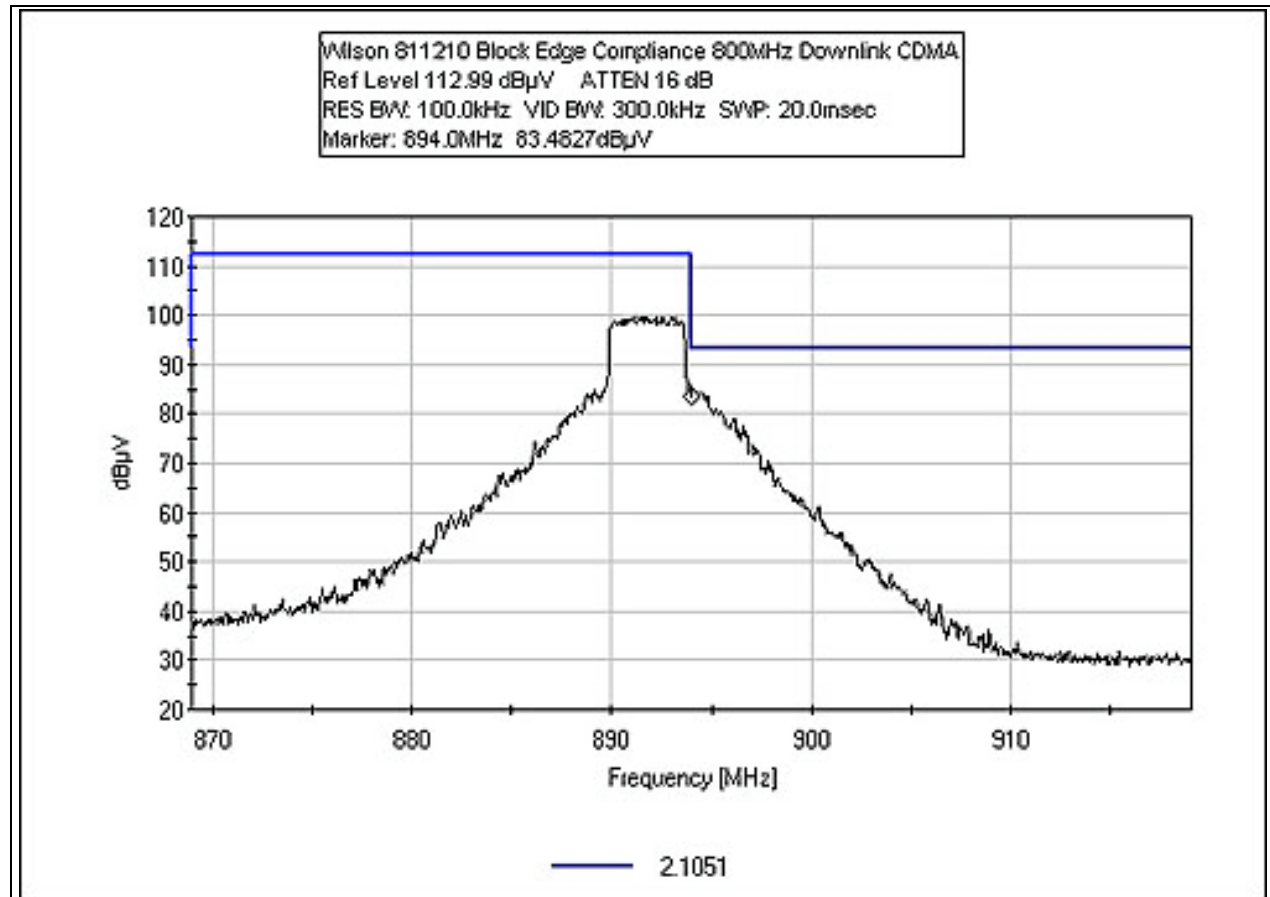


DOWNLINK BLOCK EDGE LOW

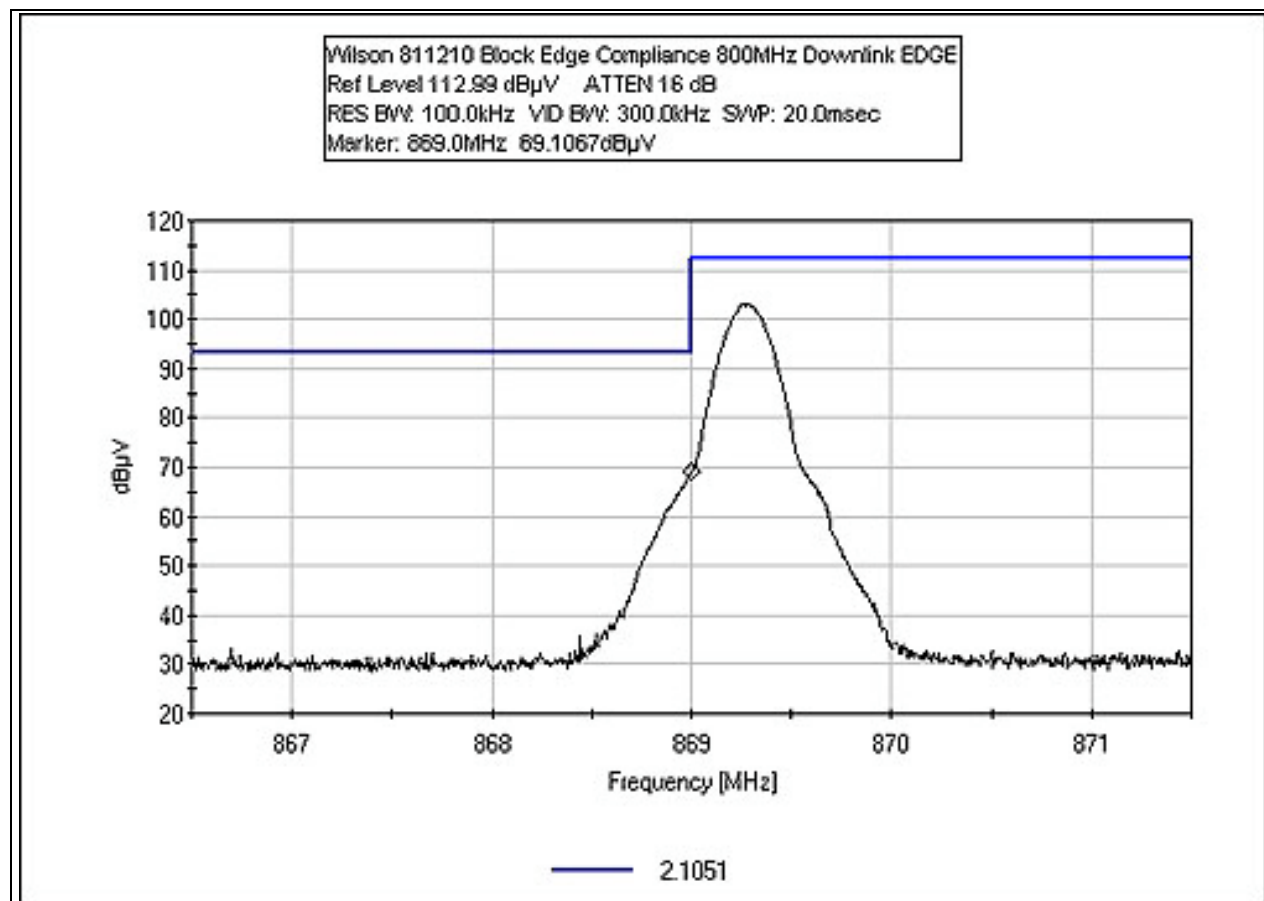


DOWNLINK BLOCK EDGE HIGH

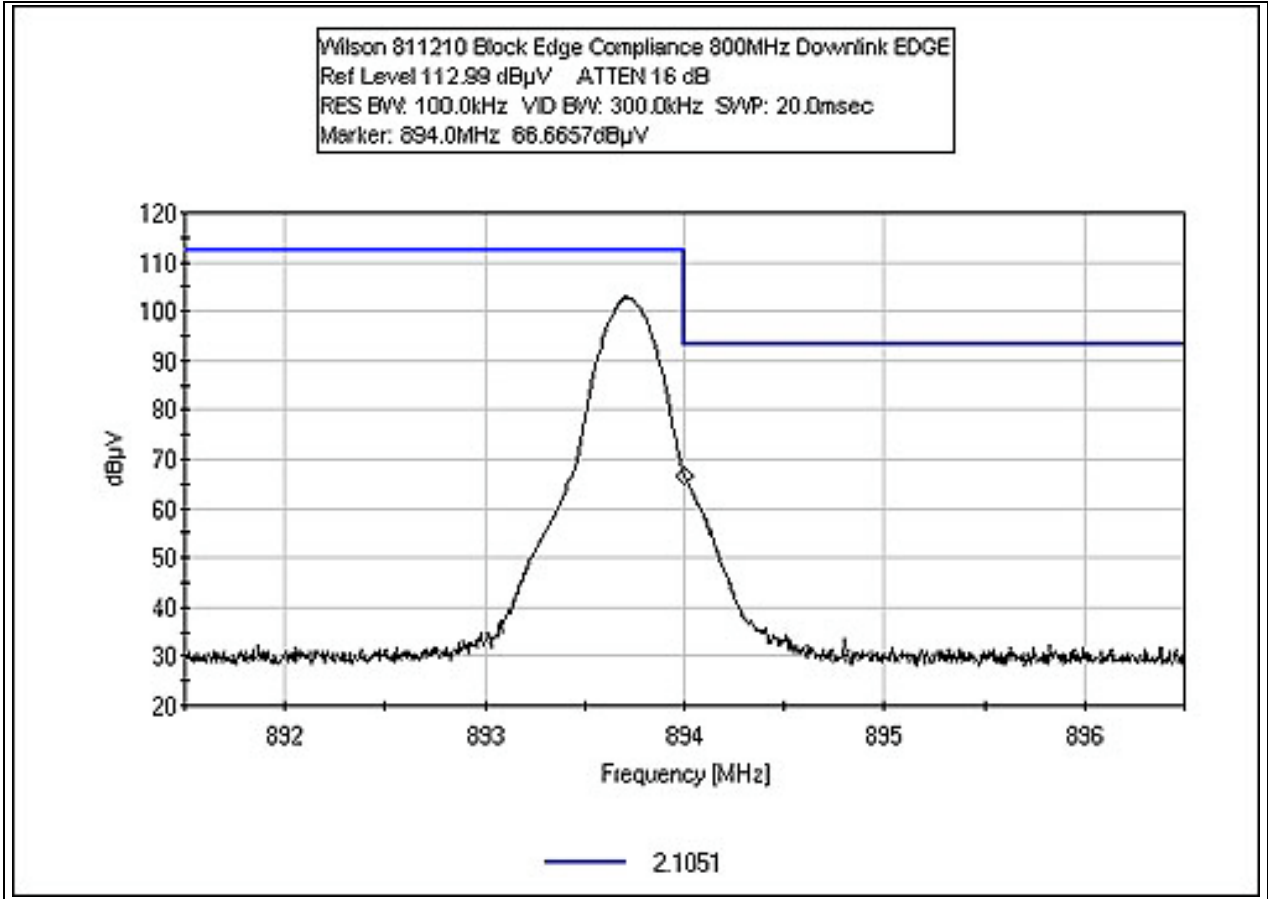

DOWNLINK BLOCK GSM LOW

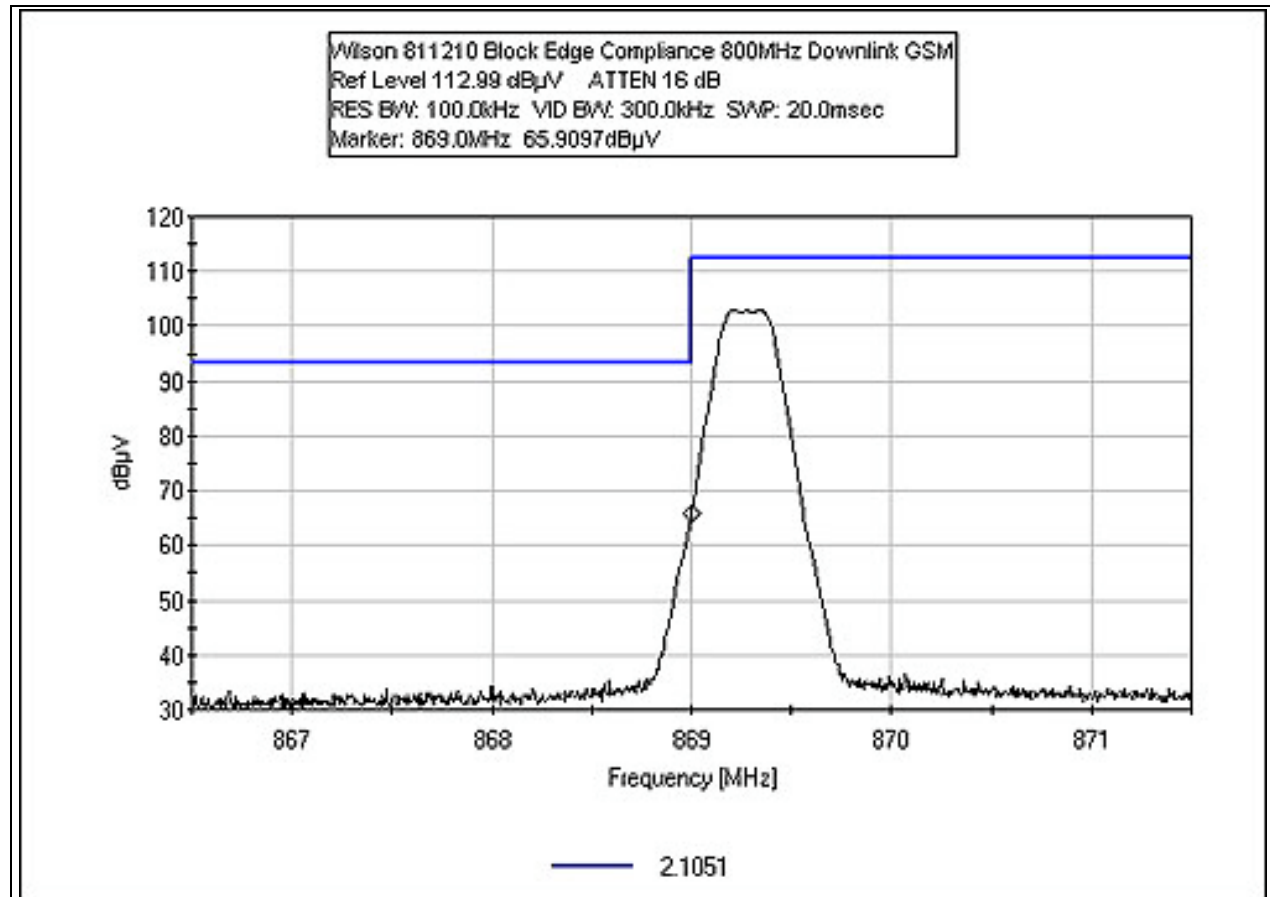

DOWNLINK BLOCK GSM HIGH

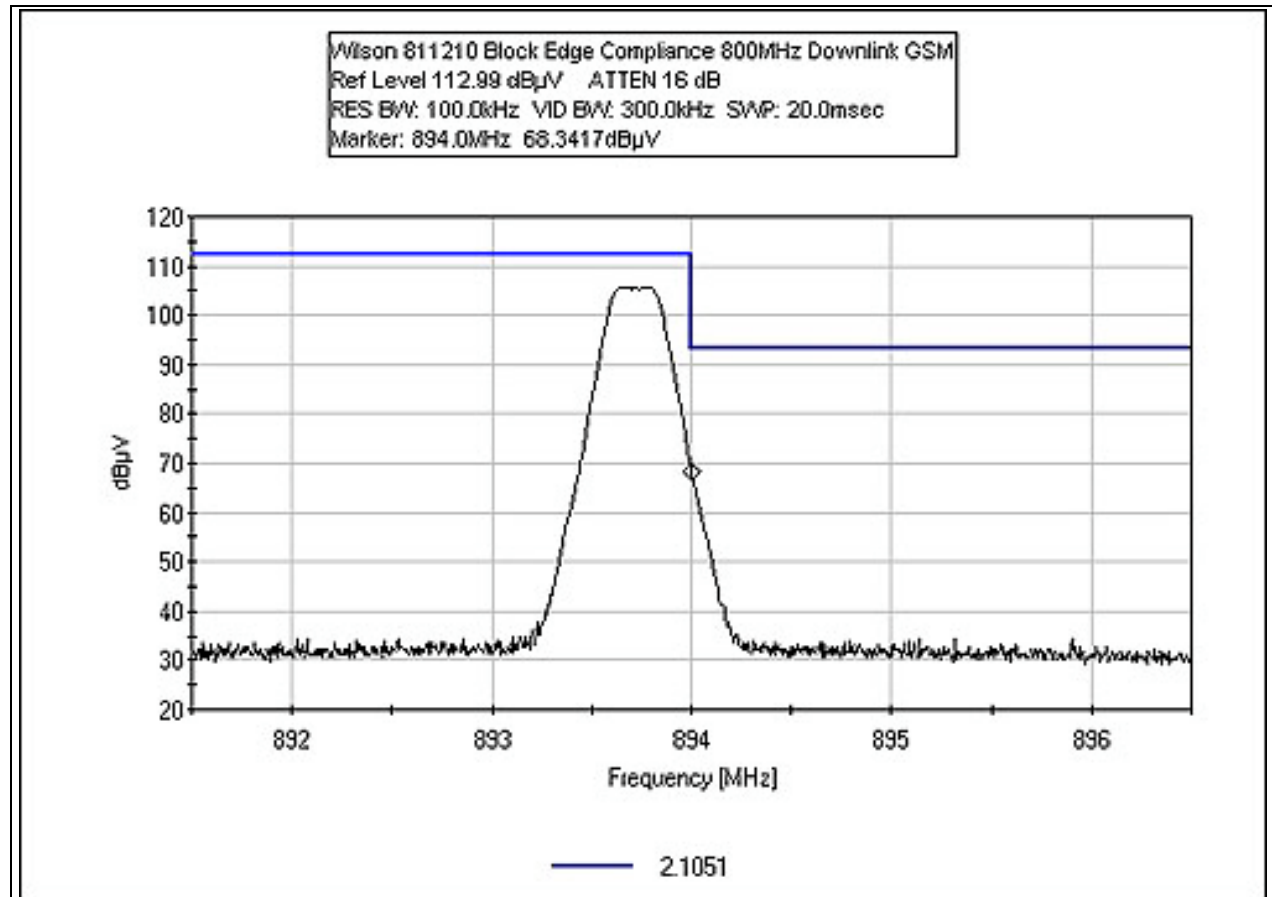

PHOTOGRAPH SHOWING DIRECT CONNECT TEST SETUP



DOWNLINK INTERMODULATION ATTENUATION

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1051**

Work Order #: **81892**

Date: 9/1/2006

Test Type: **Antenna Conducted**

Time: 12:40:26

Equipment: **Bidirectional Cellular Amplifier Repeater**

Sequence#: 27

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108
Digital Signal Generator	Agilent	E4432B	MY41000111

Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 – 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 – 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Frequency Range Investigated: 30 MHz - 20 GHz. Carrier Frequency: 800 MHz Band As Listed. Modulation Type: As Listed. Temperature: 79°F, Relative Humidity: 35%. Intermodulation Attenuation.

Transducer Legend:

T1=Cable 40 GHz 36"

Measurement Data:

Reading listed by margin.


Test Lead: RF Output Downlink

#	Freq MHz	Rdng dBμV	T1 dB	dB	dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	894.200M	90.3	+0.6				+0.0	90.9	94.0	-3.1	RF Ou
									AMPS High		
2	868.680M	87.8	+0.6				+0.0	88.4	94.0	-5.6	RF Ou
									AMPS Low		
3	868.740M	82.9	+0.6				+0.0	83.5	94.0	-10.5	RF Ou
									EDGE Low		
4	894.250M	82.4	+0.6				+0.0	83.0	94.0	-11.0	RF Ou
									EDGE High		


5	868.790M	80.6	+0.6	+0.0	81.2	94.0 GSM Low	-12.8	RF Ou
6	895.420M	79.9	+0.6	+0.0	80.5	94.0 CDMA High	-13.5	RF Ou
7	867.880M	77.9	+0.6	+0.0	78.5	94.0 CDMA Low	-15.5	RF Ou
8	2608.100M	77.0	+1.1	+0.0	78.1	94.0 AMPS Low	-15.9	RF Ou
9	894.205M	77.2	+0.6	+0.0	77.8	94.0 GSM High	-16.2	RF Ou
10	4467.500M	74.2	+1.4	+0.0	75.6	94.0 AMPS High	-18.4	RF Ou
11	4347.500M	74.2	+1.4	+0.0	75.6	94.0 AMPS Low	-18.4	RF Ou
12	2608.395M	70.9	+1.1	+0.0	72.0	94.0 EDGE Low	-22.0	RF Ou
13	2680.600M	69.0	+1.1	+0.0	70.1	94.0 AMPS High	-23.9	RF Ou
14	2609.010M	68.0	+1.1	+0.0	69.1	94.0 GSM Low	-24.9	RF Ou
15	3477.800M	66.7	+1.2	+0.0	67.9	94.0 AMPS Low	-26.1	RF Ou
16	4347.530M	65.3	+1.4	+0.0	66.7	94.0 EDGE Low	-27.3	RF Ou
17	2610.980M	65.0	+1.1	+0.0	66.1	94.0 CDMA Low	-27.9	RF Ou
18	4458.780M	62.3	+1.4	+0.0	63.7	94.0 CDMA High	-30.3	RF Ou
19	4359.540M	62.2	+1.4	+0.0	63.6	94.0 CDMA Low	-30.4	RF Ou
20	3478.265M	61.9	+1.2	+0.0	63.1	94.0 EDGE Low	-30.9	RF Ou
21	4467.395M	60.4	+1.4	+0.0	61.8	94.0 EDGE High	-32.2	RF Ou
22	4348.420M	60.2	+1.4	+0.0	61.6	94.0 GSM Low	-32.4	RF Ou
23	2680.585M	60.0	+1.1	+0.0	61.1	94.0 EDGE High	-32.9	RF Ou
24	3478.230M	59.7	+1.2	+0.0	60.9	94.0 GSM Low	-33.1	RF Ou
25	2675.320M	58.6	+1.1	+0.0	59.7	94.0 CDMA High	-34.3	RF Ou
26	3488.460M	56.7	+1.2	+0.0	57.9	94.0 CDMA Low	-36.1	RF Ou
27	1739.110M	56.9	+0.9	+0.0	57.8	94.0 GSM Low	-36.2	RF Ou
28	1739.115M	56.3	+0.9	+0.0	57.2	94.0 EDGE Low	-36.8	RF Ou
29	1786.895M	55.1	+0.9	+0.0	56.0	94.0 EDGE High	-38.0	RF Ou

30	2680.665M	54.8	+1.1	+0.0	55.9	94.0 GSM High	-38.1	RF Ou
31	1786.890M	55.0	+0.9	+0.0	55.9	94.0 GSM High	-38.1	RF Ou
32	1786.830M	54.9	+0.9	+0.0	55.8	94.0 GSM High	-38.2	RF Ou
33	1786.400M	54.3	+0.9	+0.0	55.2	94.0 AMPS High	-38.8	RF Ou
34	1738.880M	52.5	+0.9	+0.0	53.4	94.0 AMPS Low	-40.6	RF Ou
35	1745.520M	51.5	+0.9	+0.0	52.4	94.0 CDMA Low	-41.6	RF Ou
36	4467.650M	51.0	+1.4	+0.0	52.4	94.0 GSM High	-41.6	RF Ou
37	6085.860M	50.6	+1.6	+0.0	52.2	94.0 AMPS Low	-41.8	RF Ou
38	3573.820M	50.3	+1.3	+0.0	51.6	94.0 AMPS High	-42.4	RF Ou
39	1785.060M	49.8	+0.9	+0.0	50.7	94.0 CDMA High	-43.3	RF Ou
40	5360.700M	49.0	+1.6	+0.0	50.6	94.0 AMPS High	-43.4	RF Ou


DOWNLINK INTERMODULATION ATTENUATION - AMPS LOW BAND EDGE

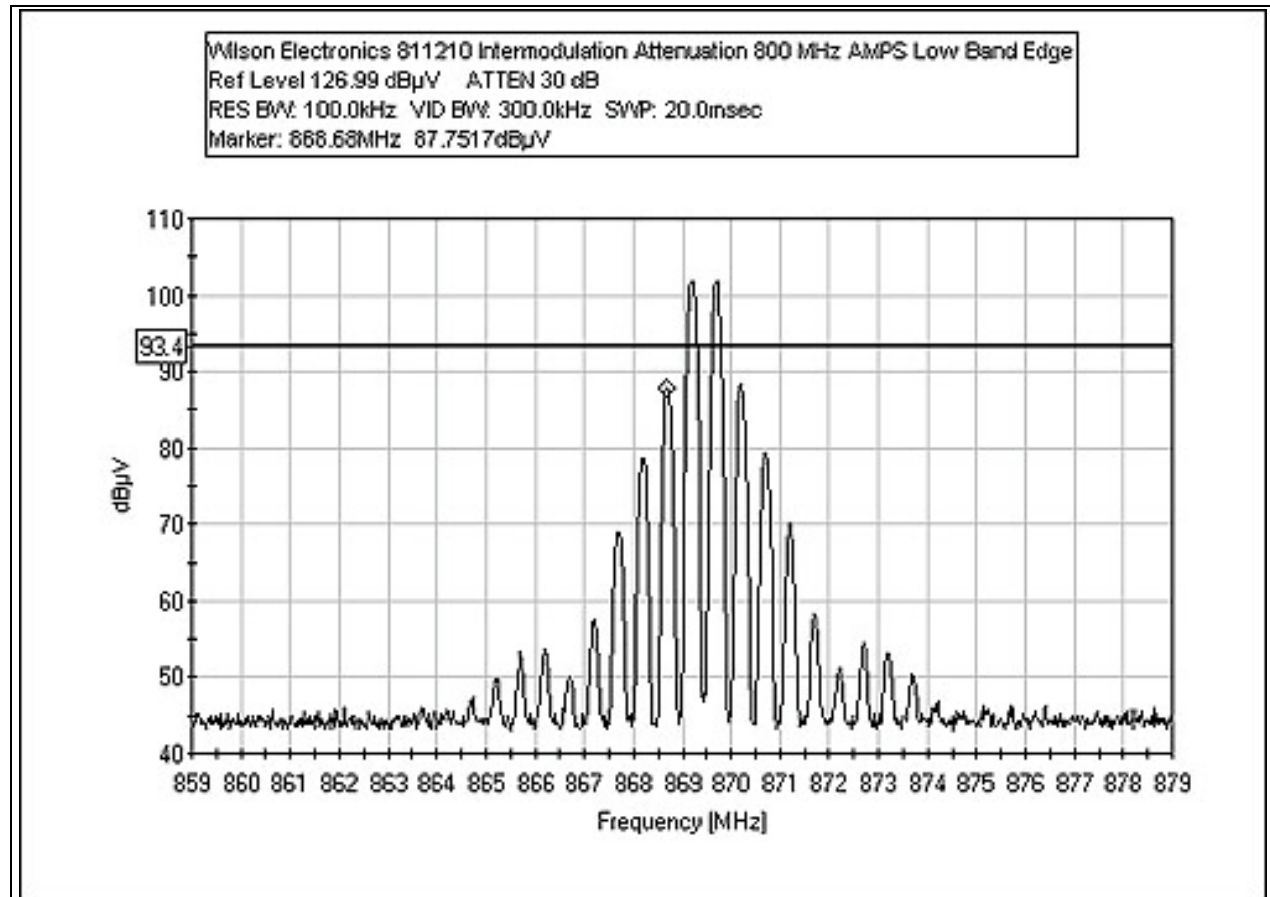


DOWNLINK INTERMODULATION ATTENUATION - AMPS HIGH BAND EDGE

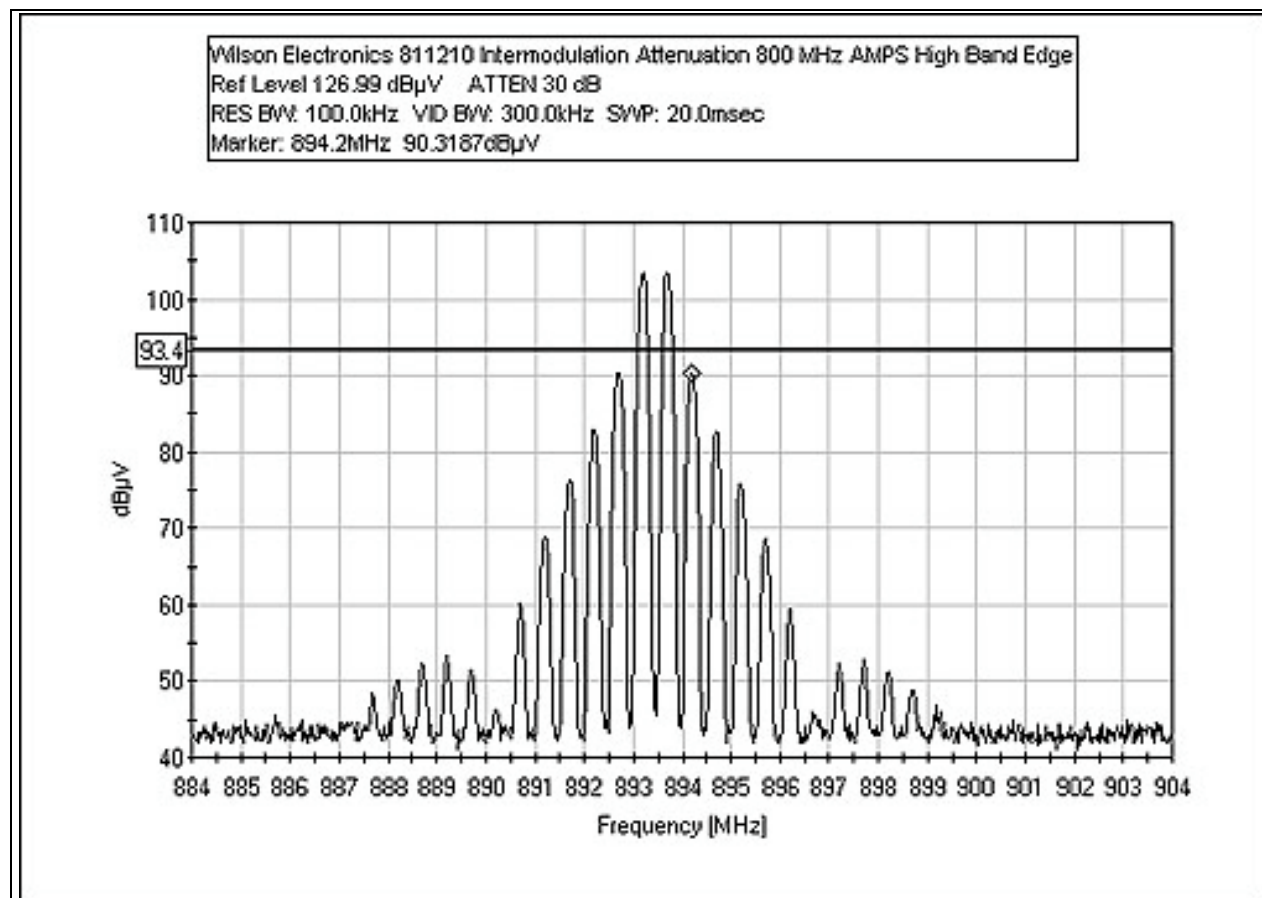


DOWNLINK INTERMODULATION ATTENUATION - CDMA LOW BAND EDGE

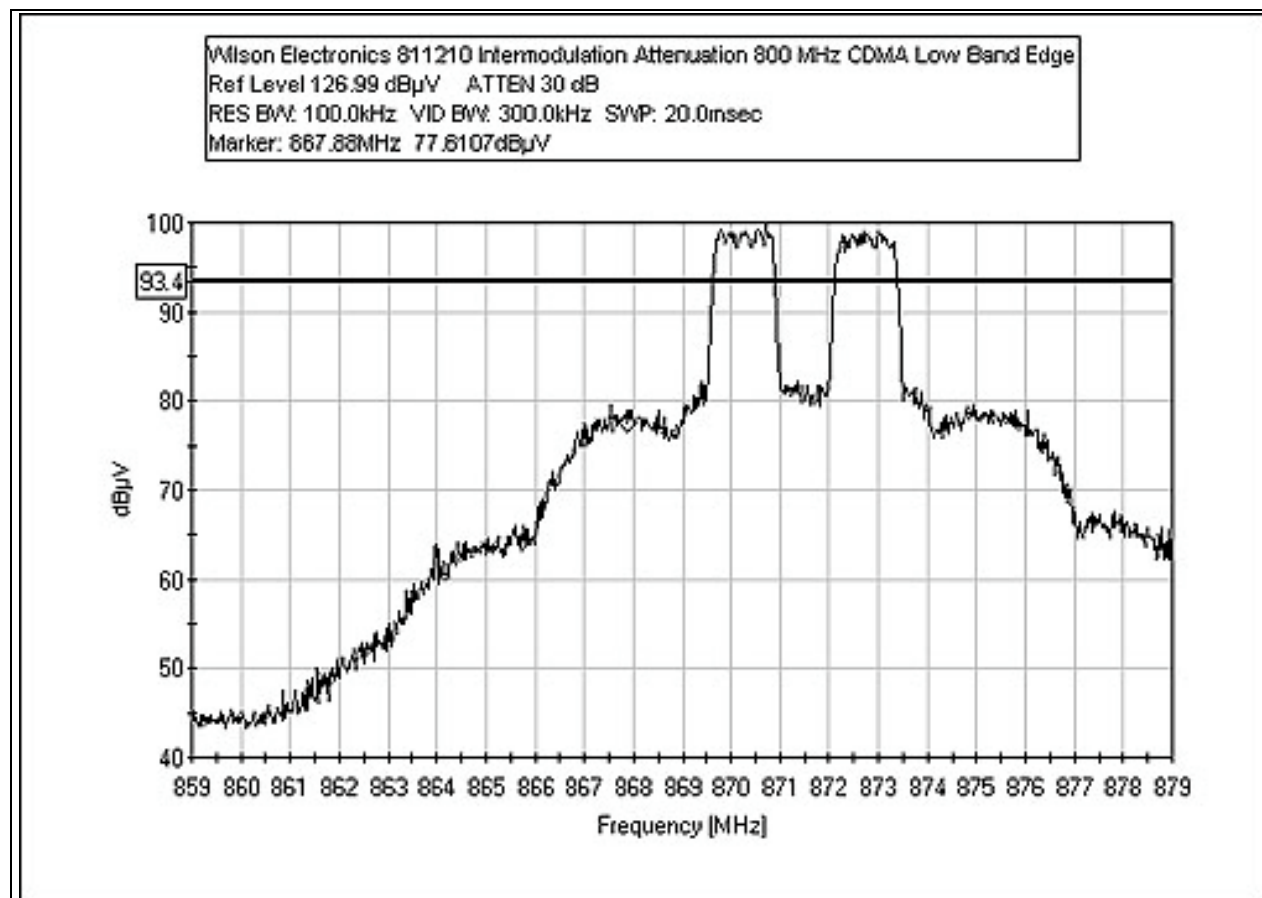


DOWNLINK INTERMODULATION ATTENUATION - CDMA HIGH BAND EDGE

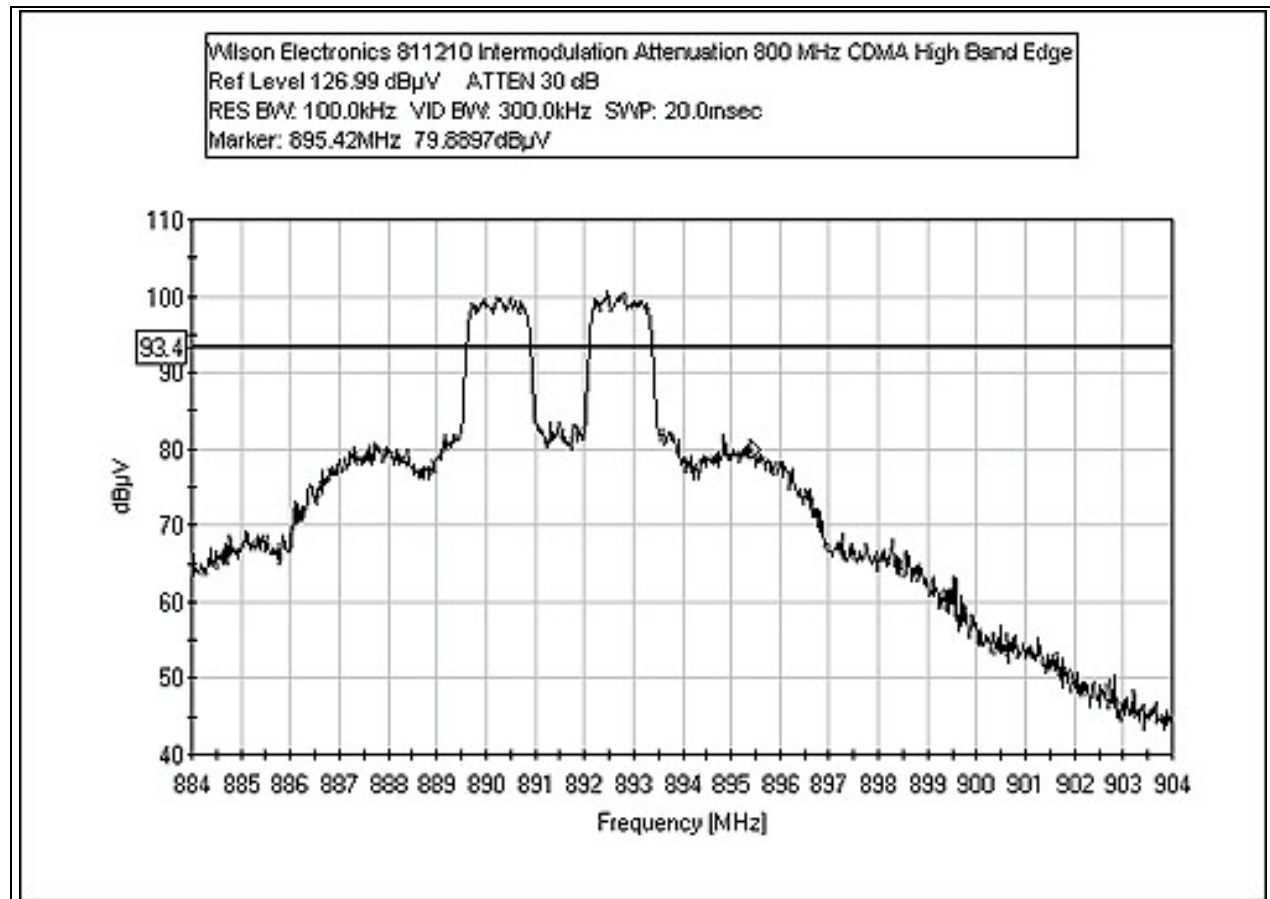


DOWNLINK INTERMODULATION ATTENUATION - EDGE LOW BAND EDGE

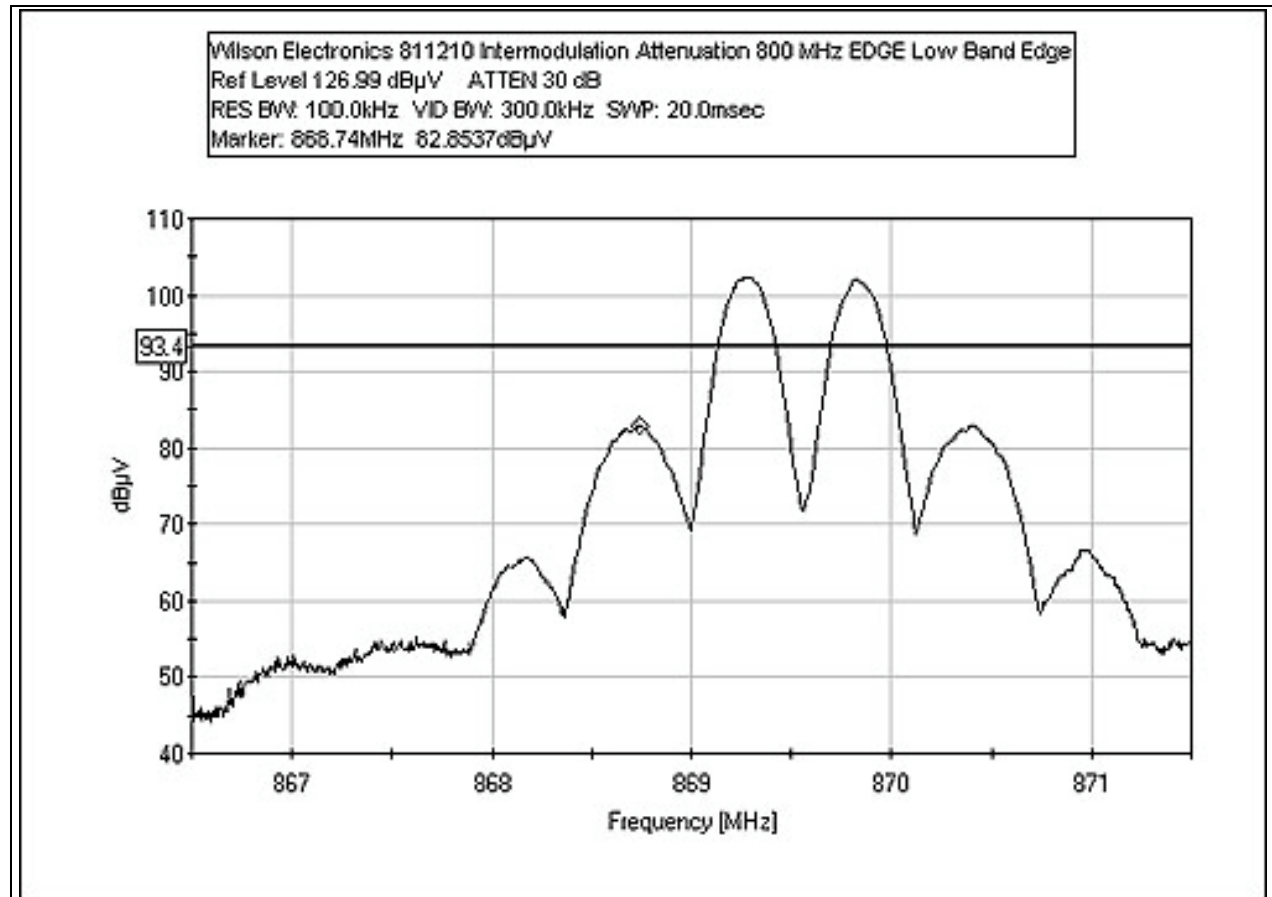


DOWNLINK INTERMODULATION ATTENUATION - EDGE HIGH BAND EDGE

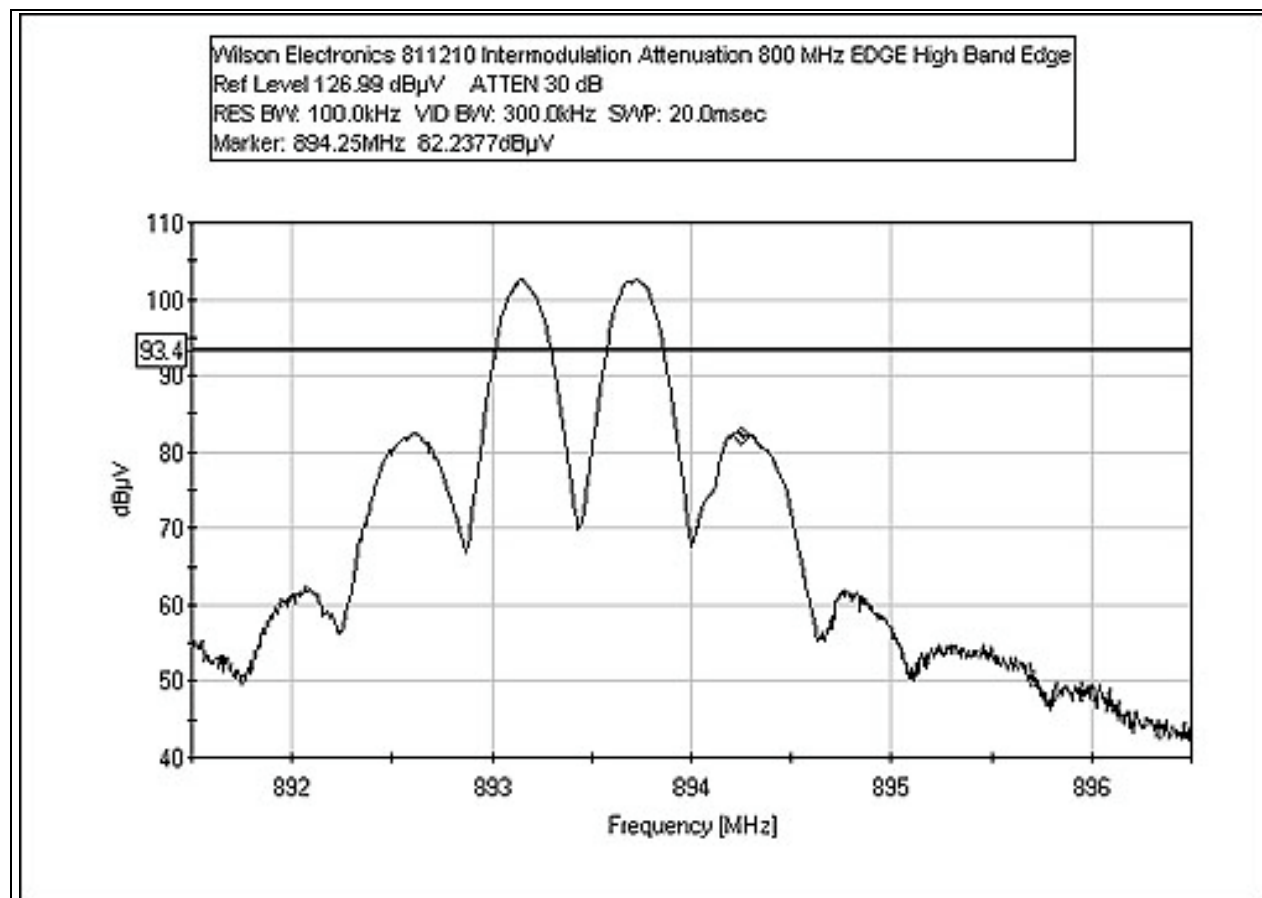

DOWNLINK INTERMODULATION ATTENUATION - GSM LOW BAND EDGE

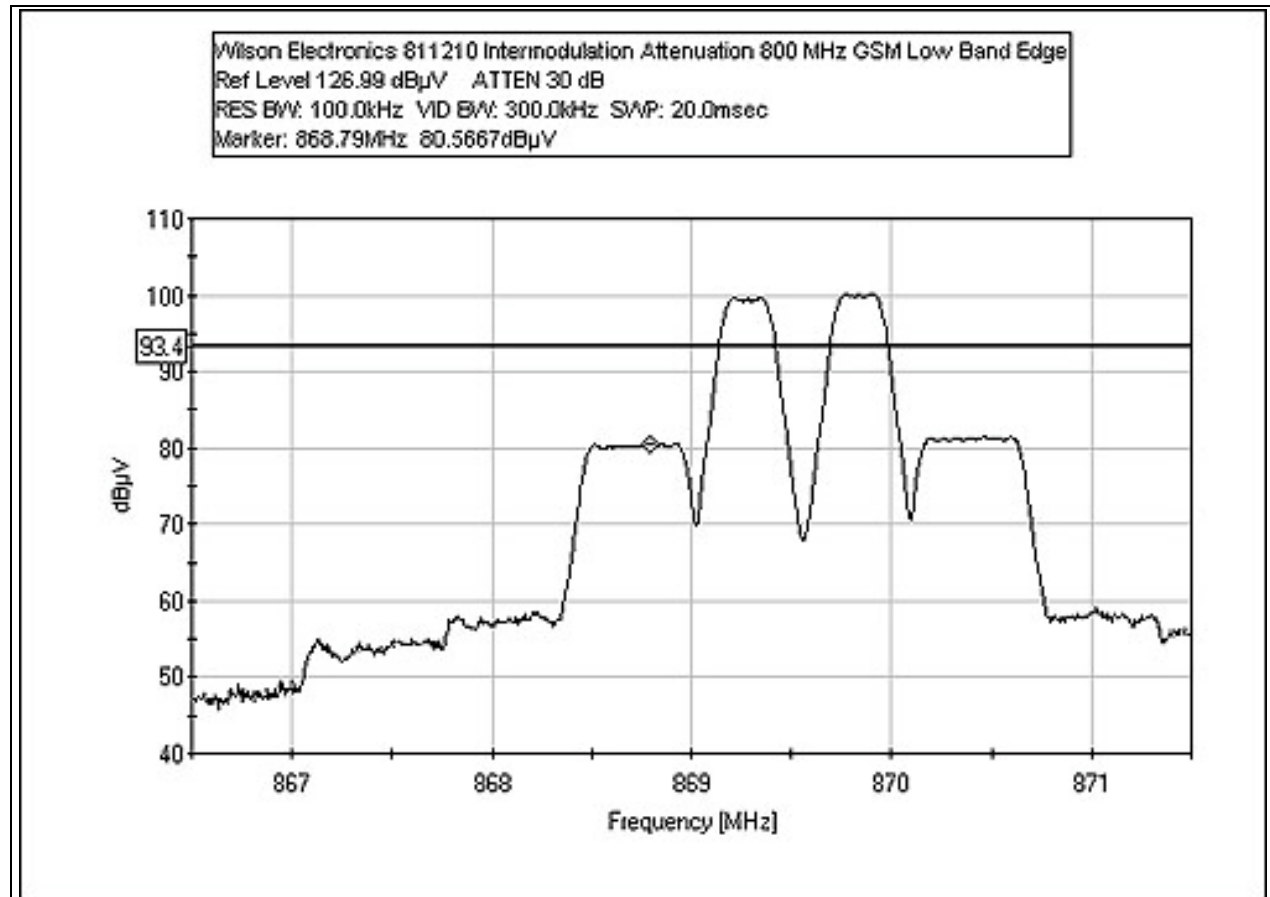

DOWNLINK INTERMODULATION ATTENUATION - GSM HIGH BAND EDGE

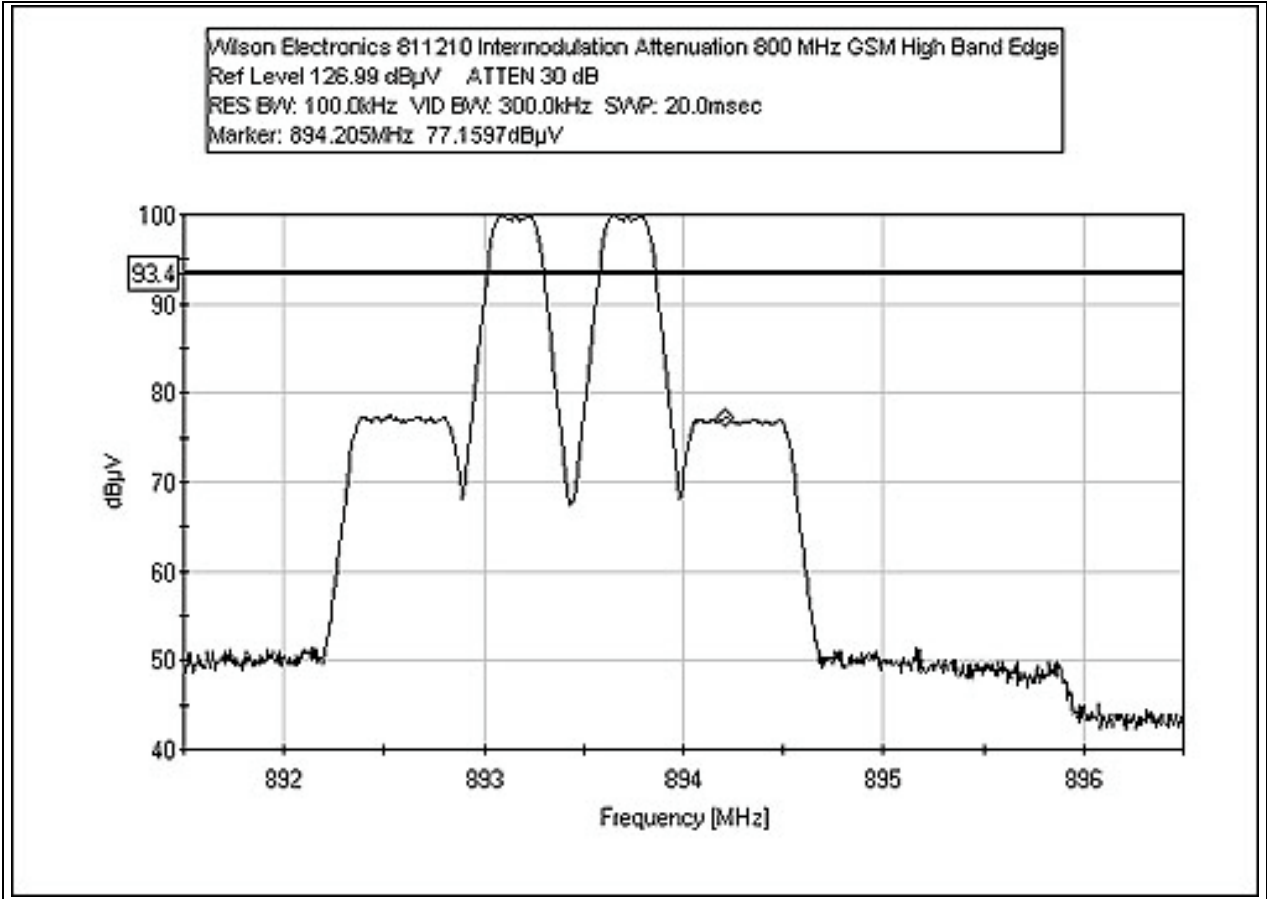

INTERMODULATION ATTENUATION



DOWNLINK INPUT VS OUTPUT

Test Location: KCRC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**
Specification: **FCC 2.1049 / RSS 131**
Work Order #: **81892**
Test Type: **Antenna Conducted**
Equipment: **Bidirectional Cellular Amplifier Repeater**

Manufacturer: Wilson Electronics
Model: 811210
S/N: 8112100110000

Tested By: Randal Clark
12VDC

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36" NA		02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:


Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Antenna port is terminated into spectrum analyzer. Signal generator levels are adjusted to show close comparison of modulation waveforms – plots do not represent amplifier gain.

Frequency Range Investigated: Carrier


Temperature: 79°F

Relative Humidity: 35%


DOWNLINK INPUT VS OUTPUT PLOT – AMPS

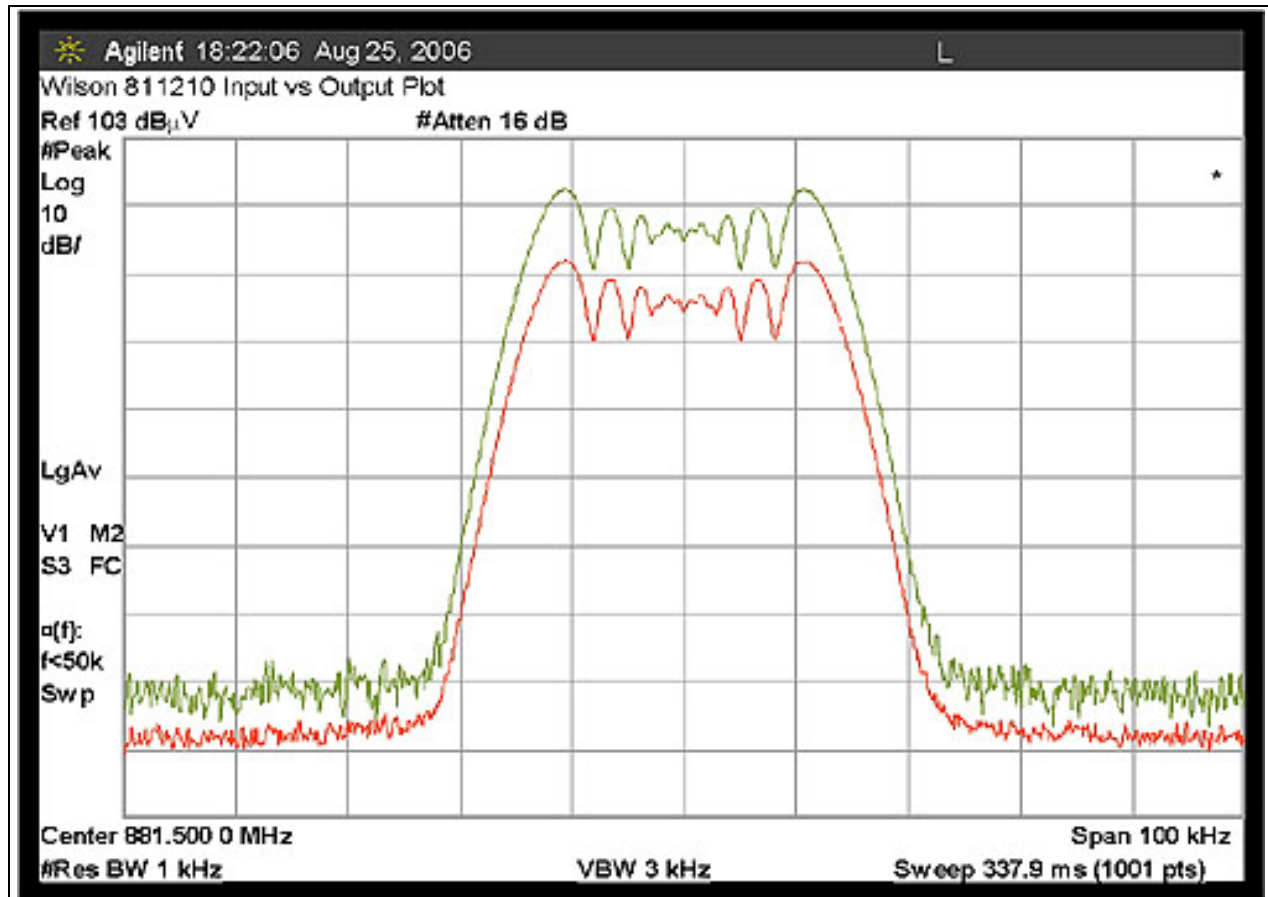


DOWNLINK INPUT VS OUTPUT PLOT - CDMA

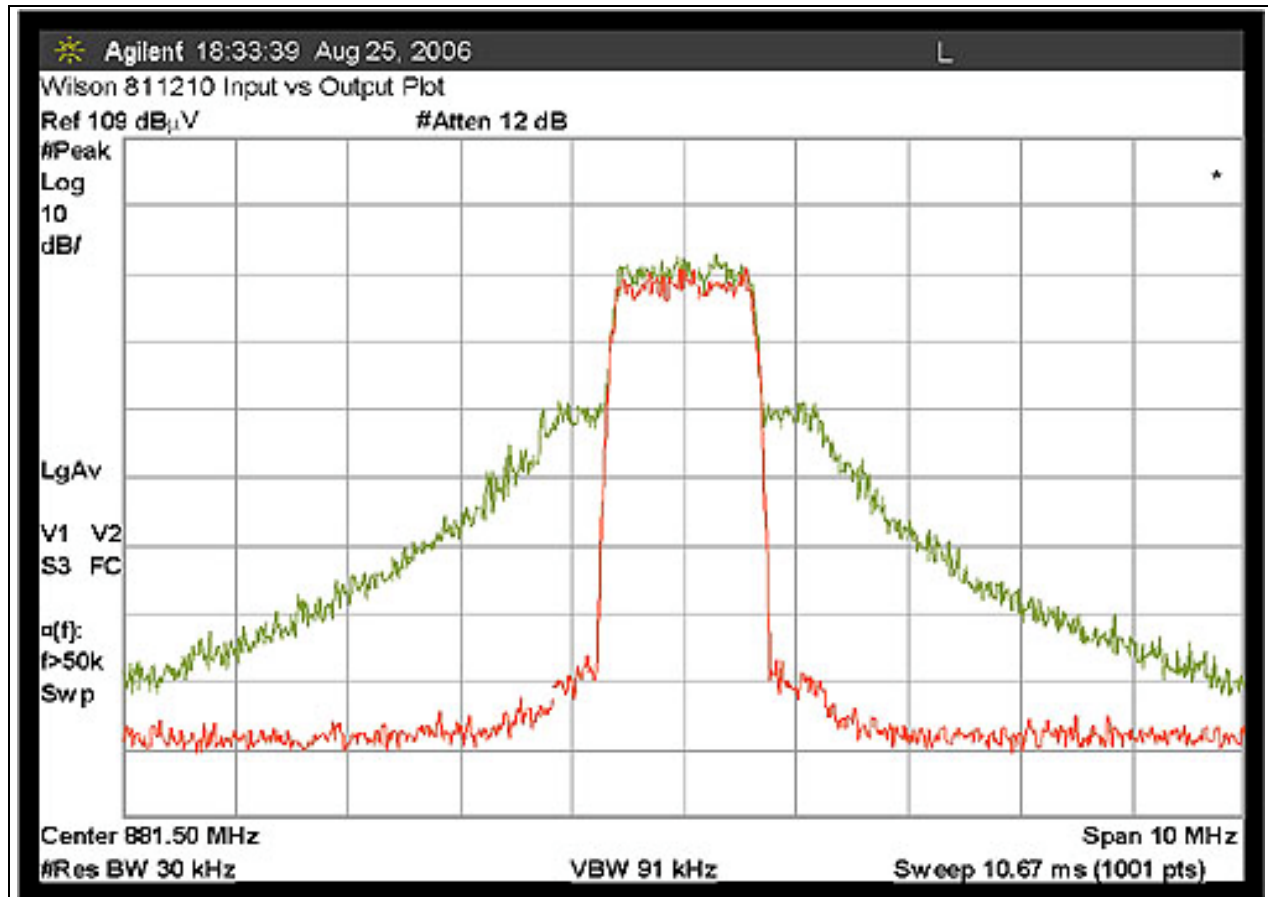

DOWNLINK INPUT VS OUTPUT PLOT - EDGE

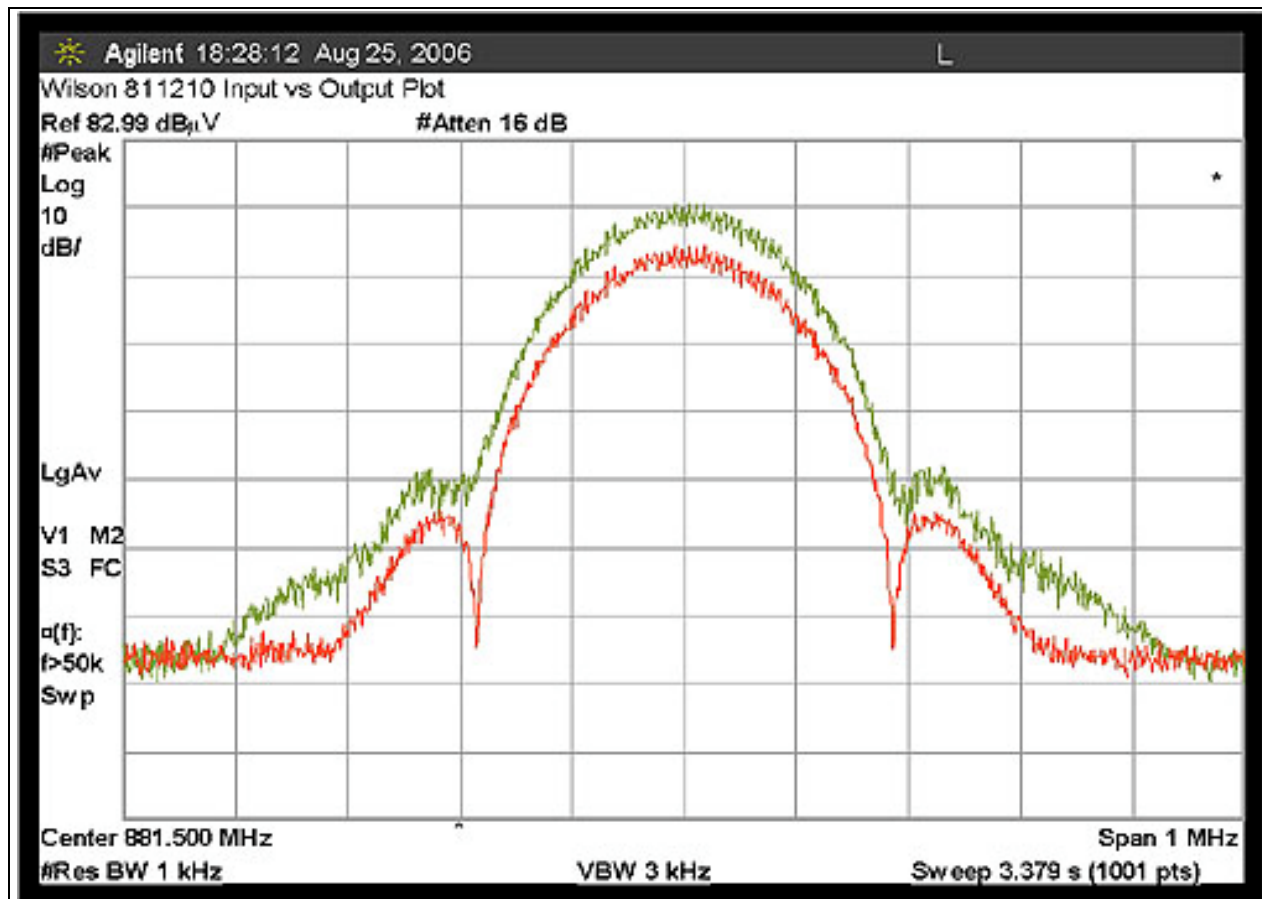

DOWNLINK INPUT VS OUTPUT PLOT - GSM

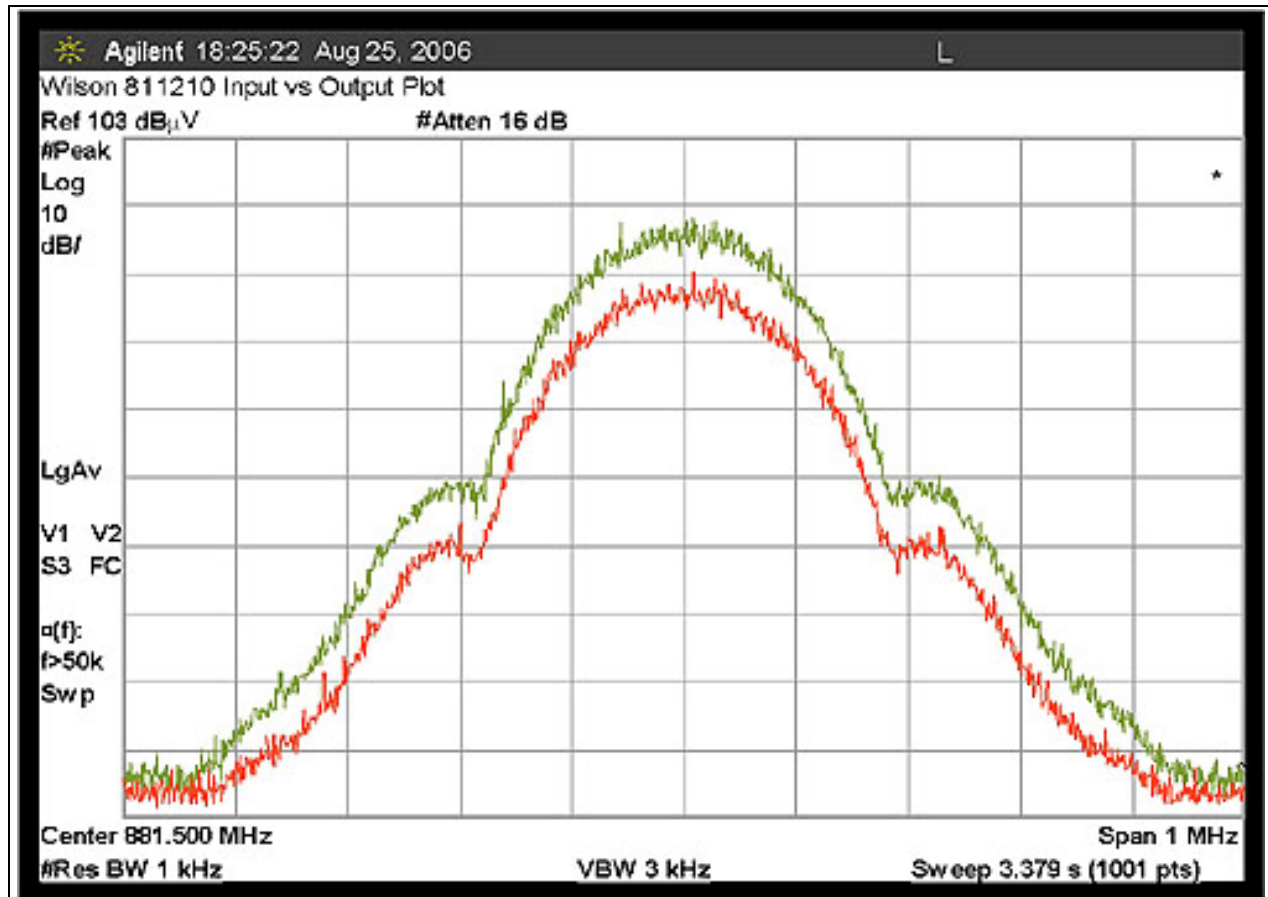

PHOTOGRAPH SHOWING DIRECT CONNECT TEST SETUP



OUT OF BAND REJECTION

Test Location: KC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **FCC 2.1051**

Work Order #: **81892**

Test Type: **Antenna Conducted**

Equipment: **Bidirectional Cellular Amplifier
Repeater**

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108

Test Conditions / Notes:


Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Antenna port is terminated into spectrum analyzer. Input to amplifier is set at the 1 dB compression point of the amplifier's operating output range. The signal generator input is swept across a 1 GHz frequency range while a spectrum analyzer monitors the amplifier output.

Frequency Range Investigated: Carrier


Temperature: 79°F

Relative Humidity: 35%

DOWNLINK OUT OF BAND REJECTION

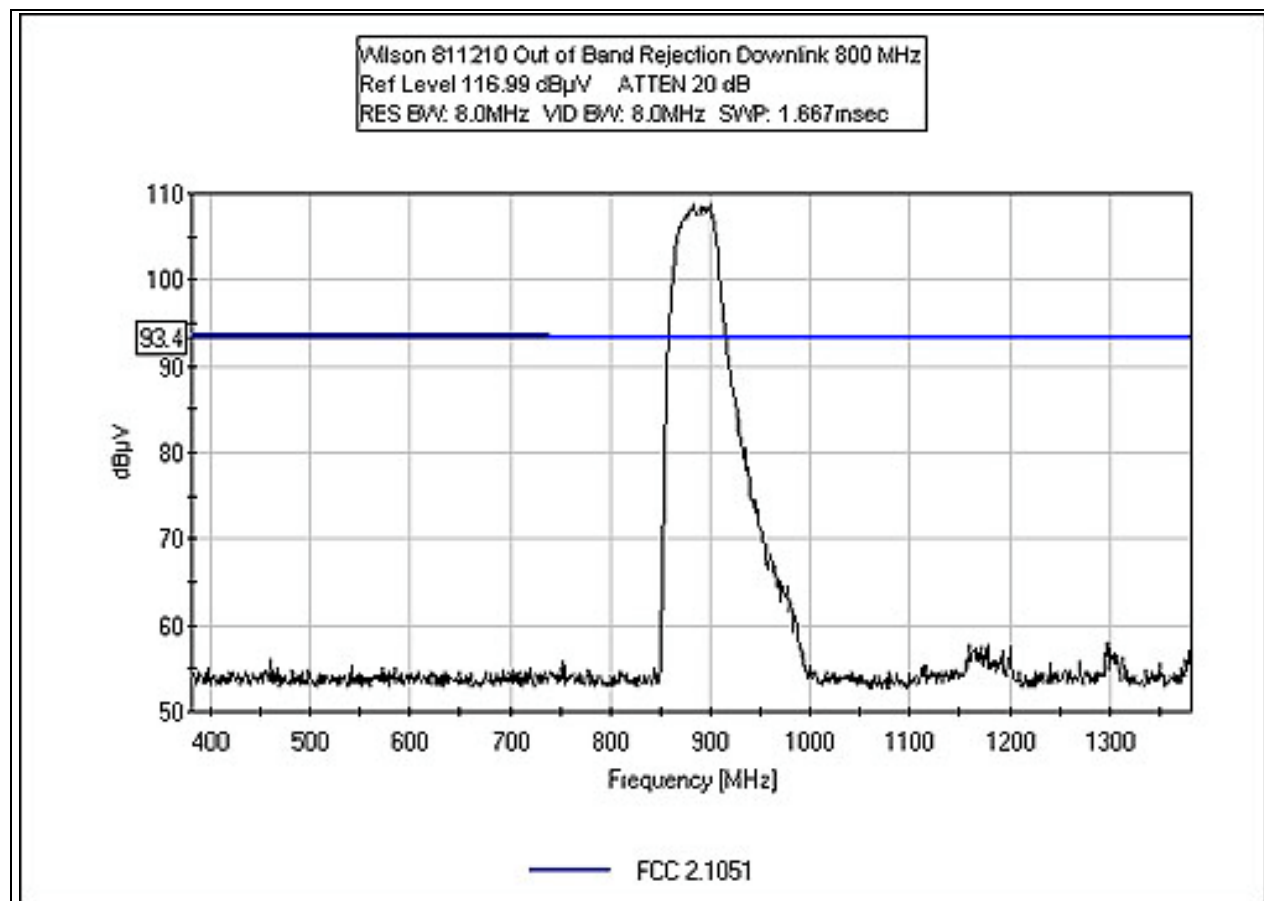

UPLINK OUT OF BAND REJECTION

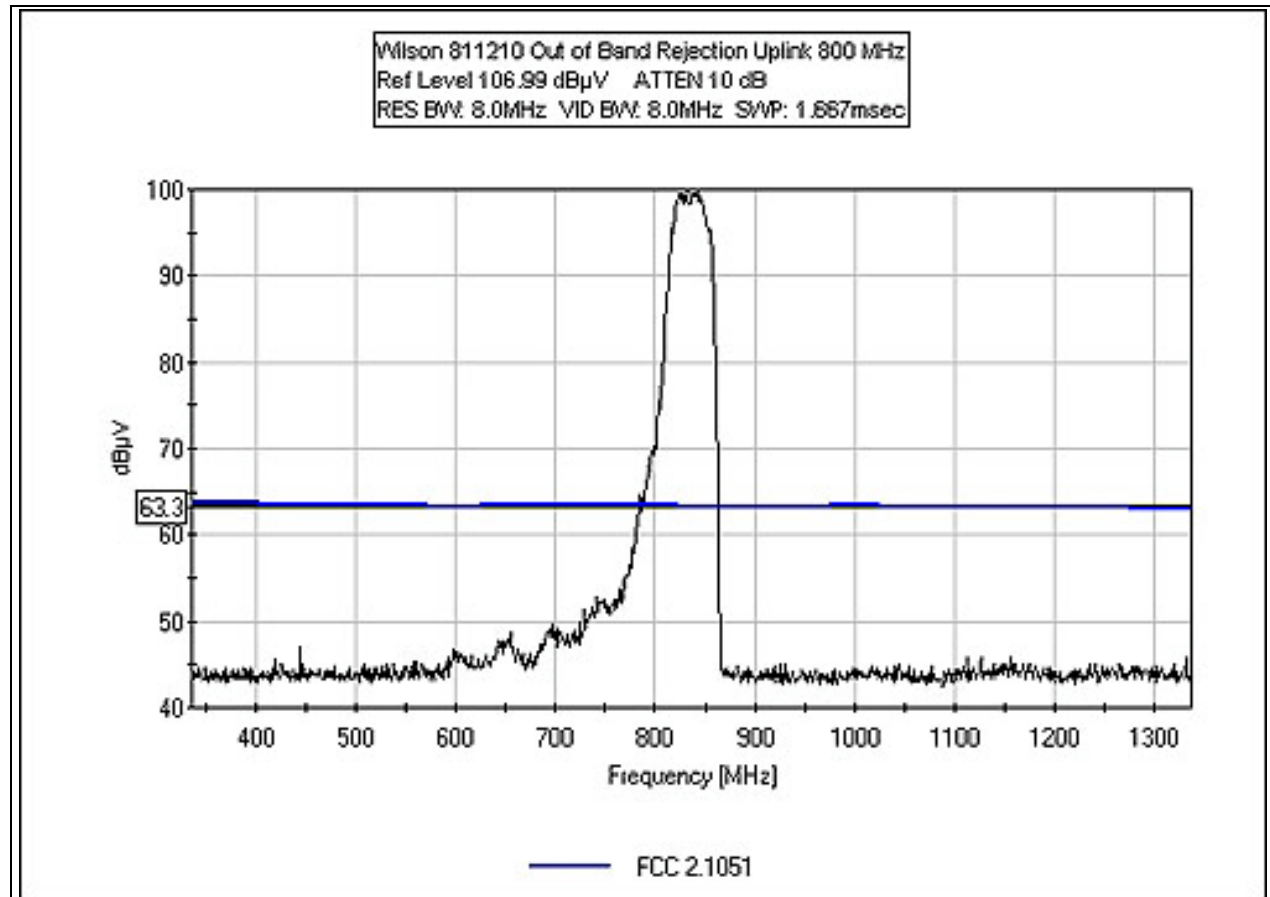

PHOTOGRAPH SHOWING DIRECT CONNECT TEST SETUP



RSS-131 DOWNLINK PASSBAND GAIN

Test Location: KKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**
Specification: **RSS 131**
Work Order #: **81892**
Test Type: **Antenna Conducted**
Equipment: **Bidirectional Cellular Amplifier Repeater**

Manufacturer: Wilson Electronics
Model: 811210
S/N: 8112100110000

Tested By: Randal Clark
12VDC

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108


Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Antenna port is terminated into spectrum analyzer. Input to amplifier is set within the linear range of the amplifier's operating output range.

Frequency Range Investigated: Carrier

Temperature: 79°F

Relative Humidity: 35%

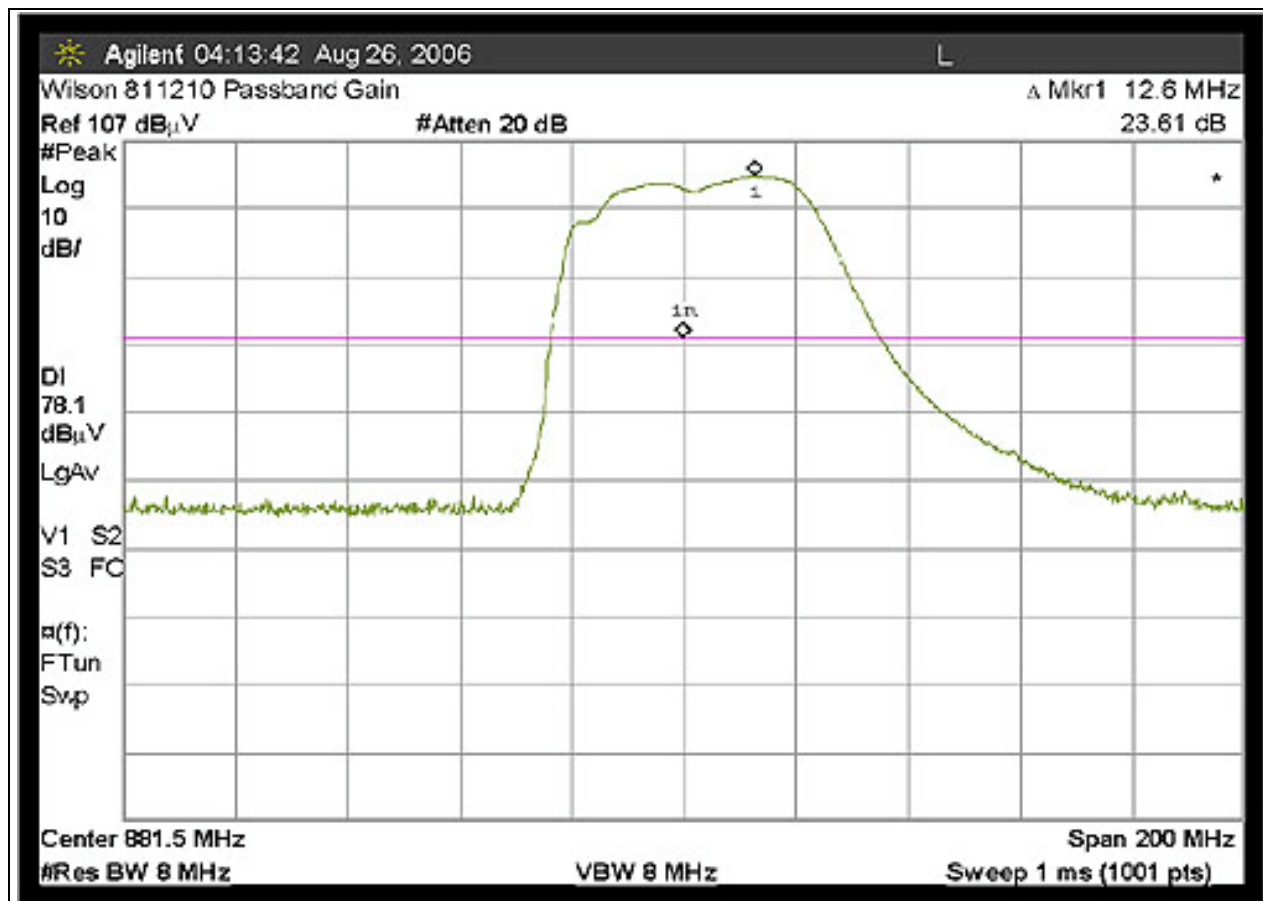

PHOTOGRAPH SHOWING DIRECT CONNECT TEST SETUP



RSS-131 DOWNLINK PASSBAND WIDTH

Test Location: KCRC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Wilson Electronics**

Specification: **RSS 131**

Work Order #: **81892**

Test Type: **Antenna Conducted**

Equipment: **Bidirectional Cellular Amplifier
Repeater**

Manufacturer: Wilson Electronics

Tested By: Randal Clark

Model: 811210

12VDC

S/N: 8112100110000

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Bidirectional Cellular Amplifier Repeater*	Wilson Electronics	811210	8112100110000

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035
Digital Signal Generator	Agilent	E4432B	MY41000108


Test Conditions / Notes:

Equipment is a bi-directional cellular amplifier repeater operating on frequency range of 824 to 894 MHz and 1850-1990 MHz. Uplink frequency range 824 - 849 MHz and 1850 - 1910 MHz. Downlink frequency range 869 - 894 MHz and 1930-1990 MHz. Equipment is powered via 12VDC support power supply. Antenna port is terminated into spectrum analyzer. Input to amplifier is set within the linear range of the amplifier's operating output range.

Frequency Range Investigated: Carrier

Temperature: 79°F

Relative Humidity: 35%

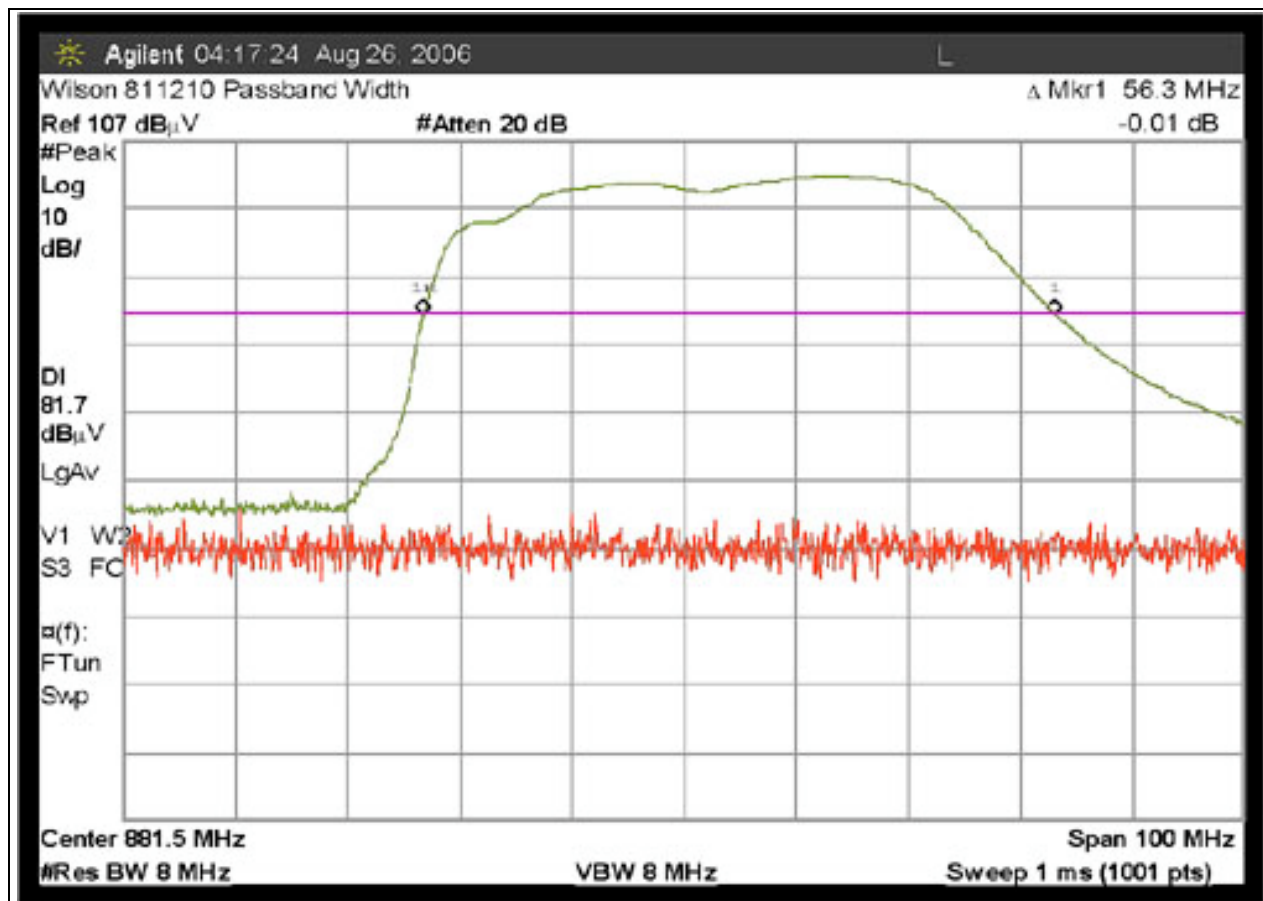

PHOTOGRAPH SHOWING DIRECT CONNECT TEST SETUP

