


White label with black lettering

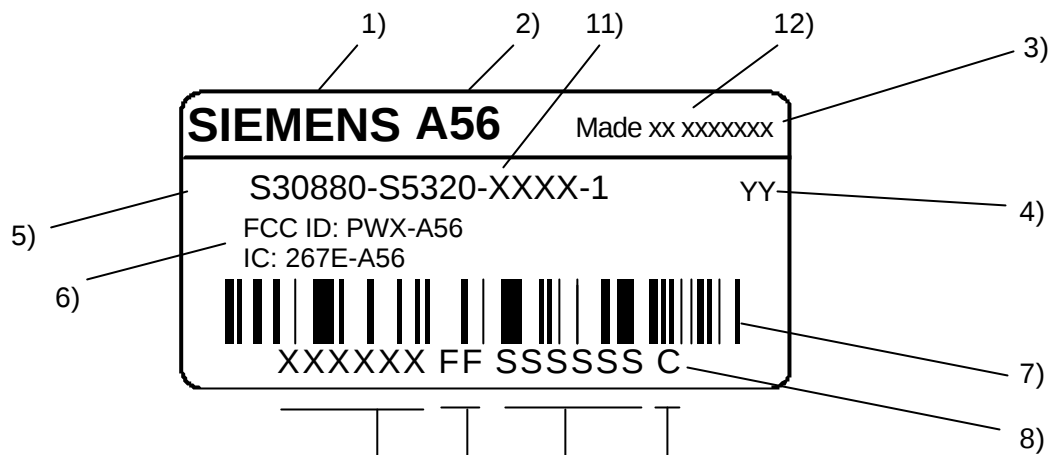

Barcode:

Typ 128, table **C** and **B**

Characteristic:

IMEI-No. has 15 digits
Digit 1-14 is generated as Barcode with table **C**.
Digit 15 is printed with table **B**.

CHECK DIGIT
15. digit

Current serial number (6 digits)

Assigned by PICS 10)

Final-Assembly Code: 10)
FAC

Typ-Approval Code: 10)
TAC

Ink ribbon:

TTR-Band Ricoh 110-A

Font:

Title blocks concentric

1) Corporate logo:

1.5 SN 66324

2) Product name:

Internal font B, size 3

3) Made xx xxxxxxxx

Internal font B, size 3

4) Code of date:

Internal font D, size 4

e.g. F3 — March

+—- 1995

5) Code number:

Internal font D, size 4

6) Canada FCC and US FCC

font: A2.1 height 1,2mm

7) Barcode IMEI-No.:

Code: 128 Size: 2 Ratio: 3.0 Height: 3 mm

8) IMEI-No. (plain writing):

Internal font D, size 4, space between TAC, FAC, serial no. and 15.digit

10) Document for IMEI-No. allocation:

DIS 20213 000 xx BOM

Valid is the highest level in the digital archive

Corresponding to the number of the transceiver unit part list

Depending on final assembly code

11) Code number:

12) "Made in Germany" or

"Made in China" or

"Made in Denmark" or

"Made in Brazil"

				Date	06.08.2002	Approval label Standard IMEI-Label A56	
				Name	Buttermann		
					ICM MP PO2		
1		06.08.02	Bu			LETTERING PLAN	
Version		Date	Token	SIEMENS AG		DIS 20210	Page 1
							From 1