


White label with black lettering

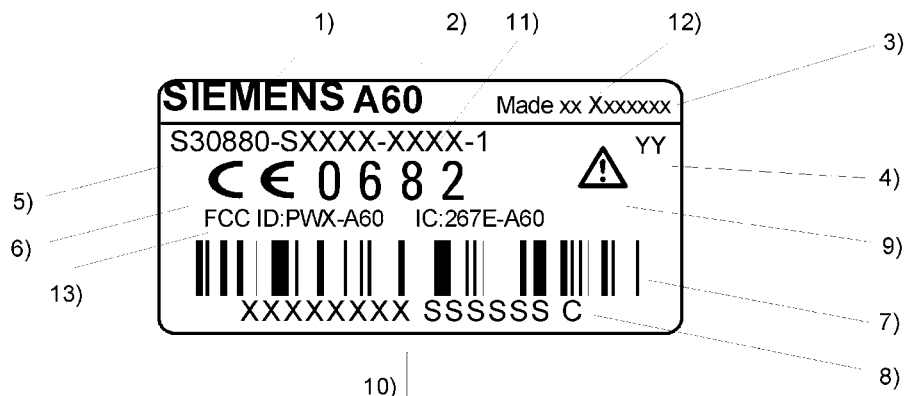

Barcode:

Typ 128, table C and B

XXXXXXXXX
SSSSSS
C

Typ-Approval Code TAC
Current serial number (6 digits), Assigned by PICS
CHECK DIGIT 15. digit

Characteristic:

IMEI-No. has 15 digits
Digit 1-14 is generated as Barcode
with table C.
Digit 15 is printed with table B.

Ink ribbon:

TTR-Band Ricoh 110-A

Font:

Title blocks concentric

- 1) Corporate logo:
- 2) Product name:
- 3) Made xx XXXXXXX
- 4) Code of date:

1.5 SN 66324
Internal font D, size 4
Bitmap
Internal font D, size 4
e.g. F3 — March
1995
Internal font D, size 4
Height: 5 mm
according to BABT-Document 556 26/93
Code: 128 Size: 2 Ratio: 3.0 Height: 3 mm

- 5) Code number:
- 6) CE-identification:

- 7) Barcode IMEI-No.:
- 8) IMEI-No.

(plain writing):

Internal font D, size 4, space between TAC, serial no.
and 15.digit
XXXXXXXXX Typ-Approval Code TAC
SSSSSS Current serial number (6 digits),
Assigned by PICS
C CHECK DIGIT 15. digit
Height: 4 mm
DIS 43007 BOM 000 xx
Valid is the highest level in the system
Corresponding to the number of the transceiver unit part list
Internal font B, size 3 / Depending on production location

- 9) Triangle:
- 10) Document for IMEI-No. allocation:

- 11) Code number:
- 12) Made xx XXXXXXX

				Date	25.06.03	Approval label Standard IMEI-Label/A60		
				Name	Li Long Jun			
					RD MP VC BJ			
1		25.08.03	Li			LETTERING PLAN		
Version		Date	Token	SIEMENS AG		DIS 43006		Page 1
								From 1



A60 Open battery cover
(Final label: see extra exhibit)