
Appendix for the Report

Dosimetric Assessment of the Siemens A76 (FCC ID: PWX-A71)

According to the FCC Requirements

SAR Distribution Plots

July 05, 2005
IMST GmbH
Carl-Friedrich-Gauß-Str. 2
D-47475 Kamp-Lintfort

Customer
Siemens Communication Inc.
16475 West Bernado Drive, Suite 400
San Diego CA 92127

The test results only relate to the items tested.
This report shall not be reproduced except in full without the written
approval of the testing laboratory.

Table of Contents

1	SAR DISTRIBUTION PLOTS, GSM 850 HEAD.....	3
2	SAR DISTRIBUTION PLOTS, PCS 1900 HEAD	11
3	SAR DISTRIBUTION PLOTS, GSM 850 BODY WITH HEADSET IN GSM MODE.....	15
4	SAR DISTRIBUTION PLOTS, GSM 850 BODY WITH DATA CABLE IN GPRS MODE.....	17
5	SAR DISTRIBUTION PLOTS, PCS 1900 BODY WITH HEADSET IN GSM MODE	18
6	SAR DISTRIBUTION PLOTS, PCS 1900 BODY WITH DATA CABLE IN GPRS MODE	20
7	SAR Z-AXIS SCANS (VALIDATION)	21
8	SAR Z-AXIS SCANS (MEASUREMENTS).....	23

1 SAR Distribution Plots, GSM 850 Head

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [746yalm_1.da4](#)

DUT: Siemens; Type: A71; Serial: 004400002004792;

Program Name: Cheek Left

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(9.88, 9.88, 9.88); Calibrated: 27.08.2004

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn906; Calibrated: 16.12.2004

- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Left/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.892 mW/g;

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm; Reference Value = 28.1 V/m; Power Drift = -0.103 dB; Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.832 mW/g; SAR(10 g) = 0.580 mW/g

Maximum value of SAR (measured) = 0.885 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm; Reference Value = 28.1 V/m; Power Drift = -0.103 dB; Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.740 mW/g; SAR(10 g) = 0.517 mW/g

Maximum value of SAR (measured) = 0.850 mW/g

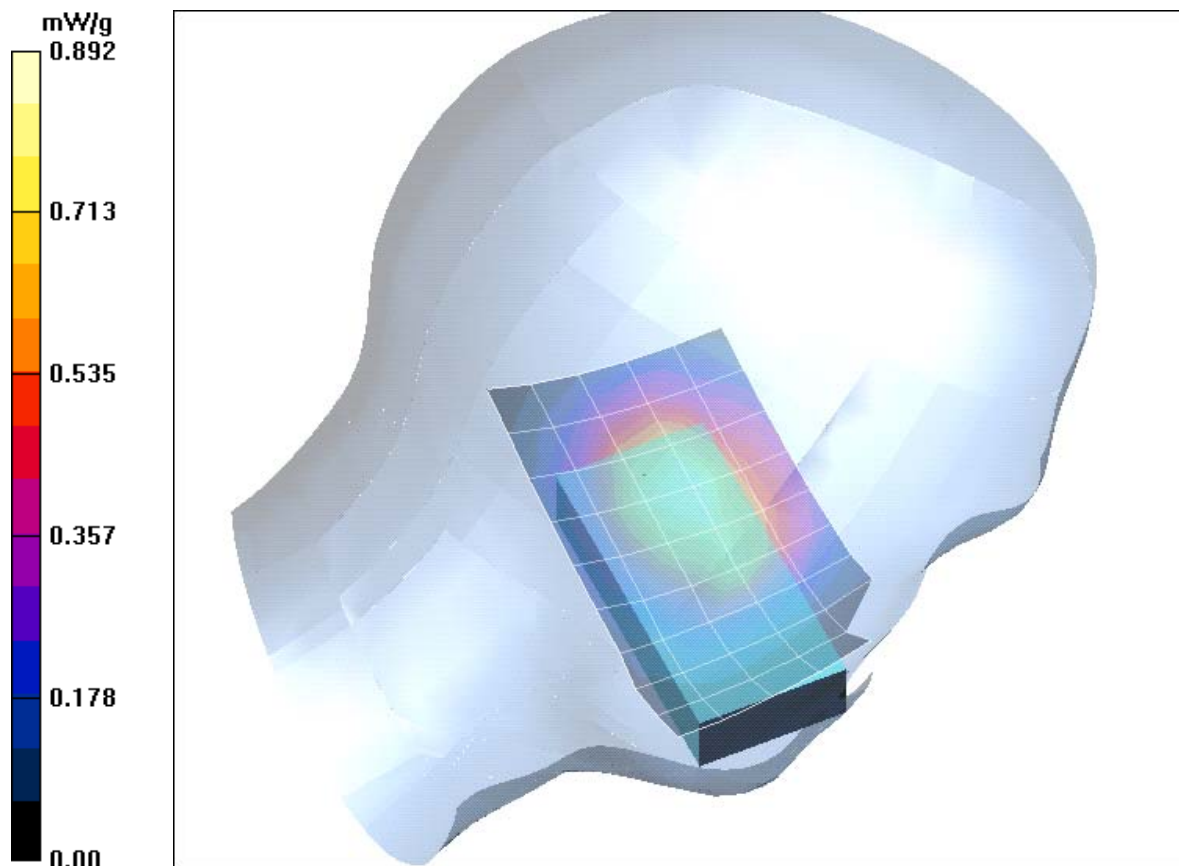


Fig. 1: SAR distribution for GSM 850, channel 190, cheek position, left side of head (July 01, 2005; Ambient Temperature: 22° C; Liquid Temperature: 21.8° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [792yalm 2.da4](#)

DUT: Siemens; **Type:** A71; **Serial:** 004400002004792

Program Name: Tilted Left

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(9.88, 9.88, 9.88); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn906; Calibrated: 16.12.2004
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Left/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.691 mW/g

Tilted Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.7 V/m; Power Drift = 0.012 dB; Peak SAR (extrapolated) = 0.850 W/kg

SAR(1 g) = 0.642 mW/g; SAR(10 g) = 0.446 mW/g

Maximum value of SAR (measured) = 0.685 mW/g

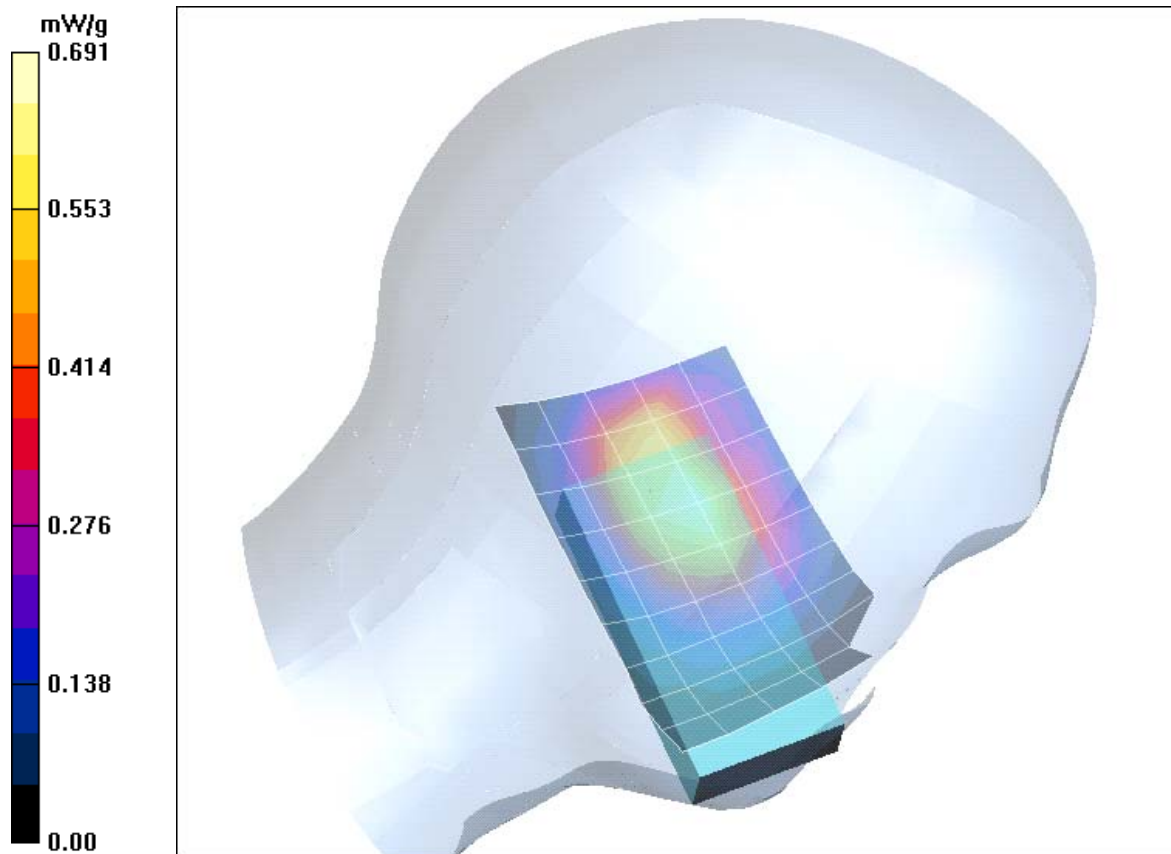


Fig. 2: SAR distribution for GSM 850, channel 190, tilted position, left side of head (July 01, 2005; Ambient Temperature: 22° C; Liquid Temperature : 21.8° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [792yarm_1.da4](#)

DUT: Siemens; **Type:** A71; **Serial:** 004400002004792

Program Name: Cheek Right

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(9.88, 9.88, 9.88); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn906; Calibrated: 16.12.2004
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Right/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.819 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.823 mW/g; SAR(10 g) = 0.570 mW/g

Maximum value of SAR (measured) = 0.881 mW/g

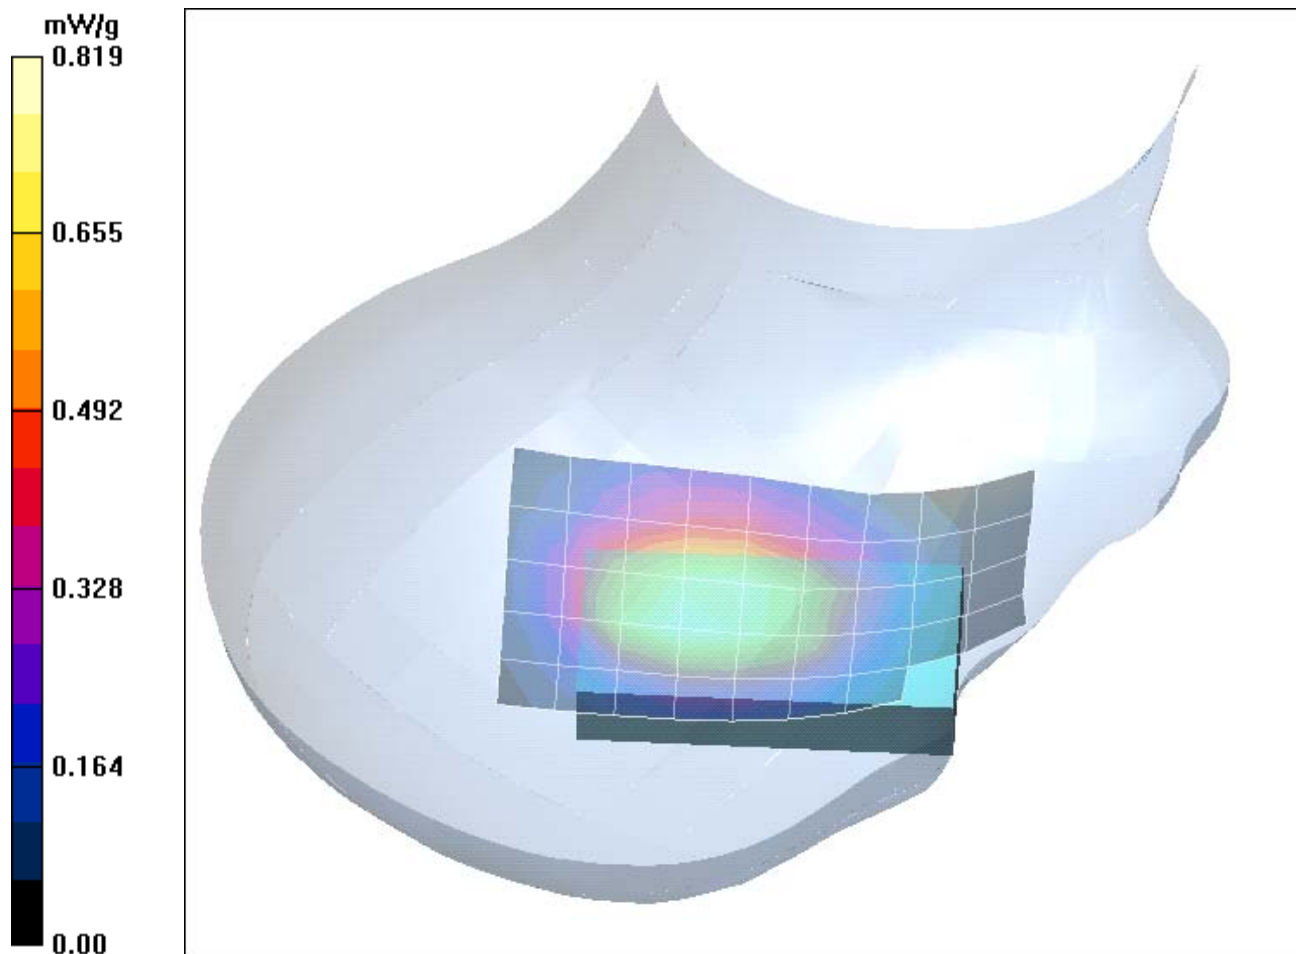


Fig. 3: SAR distribution for GSM 850, channel 190, cheek position, right side of head (July 01, 2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.7° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [792yarm_2.da4](#)

DUT: Siemens; Type: A71; Serial: 004400002004792

Program Name: Tilted Right

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(9.88, 9.88, 9.88); Calibrated: 27.08.2004

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn906; Calibrated: 16.12.2004

- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Right/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.658 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm; Reference

Value = 26.5 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.872 W/kg

SAR(1 g) = 0.645 mW/g; SAR(10 g) = 0.445 mW/g

Maximum value of SAR (measured) = 0.685 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm; Reference

Value = 26.5 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.617 mW/g; SAR(10 g) = 0.400 mW/g

Maximum value of SAR (measured) = 0.676 mW/g

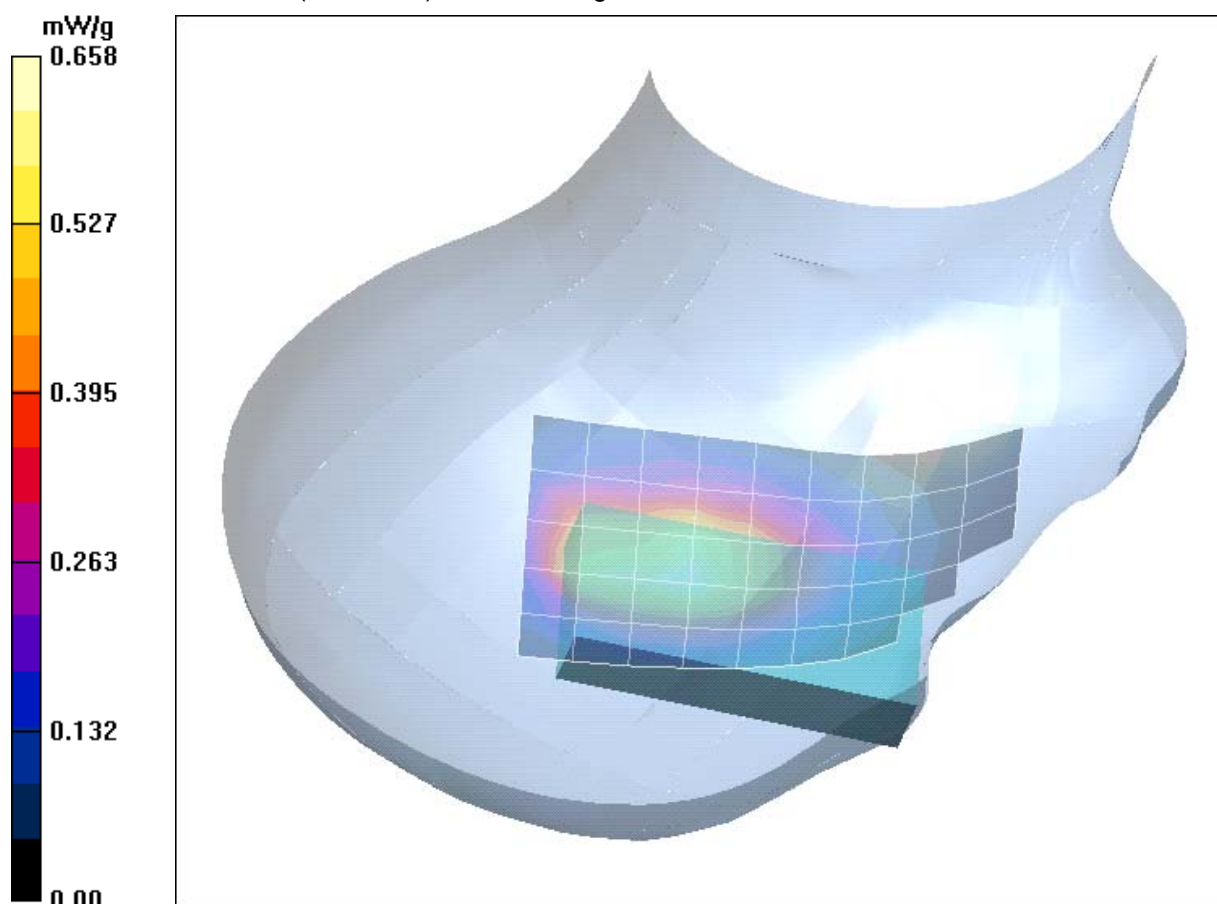


Fig. 4: SAR distribution for GSM 850, channel 190, tilted position, right side of head (July 01, 2005; Ambient Temperature: 22° C; Liquid Temperature : 21.8° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [792yall_1.da4](#)

DUT: Siemens; **Type:** A71; **Serial:** 004400002004792

Program Name: Cheek Left

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(9.88, 9.88, 9.88); Calibrated: 27.08.2004

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn906; Calibrated: 16.12.2004

- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Left/Area Scan (6x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.901 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm; Reference

Value = 29.0 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.848 mW/g; SAR(10 g) = 0.588 mW/g

Maximum value of SAR (measured) = 0.894 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm; Reference

Value = 29.0 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.757 mW/g; SAR(10 g) = 0.527 mW/g

Maximum value of SAR (measured) = 0.851 mW/g

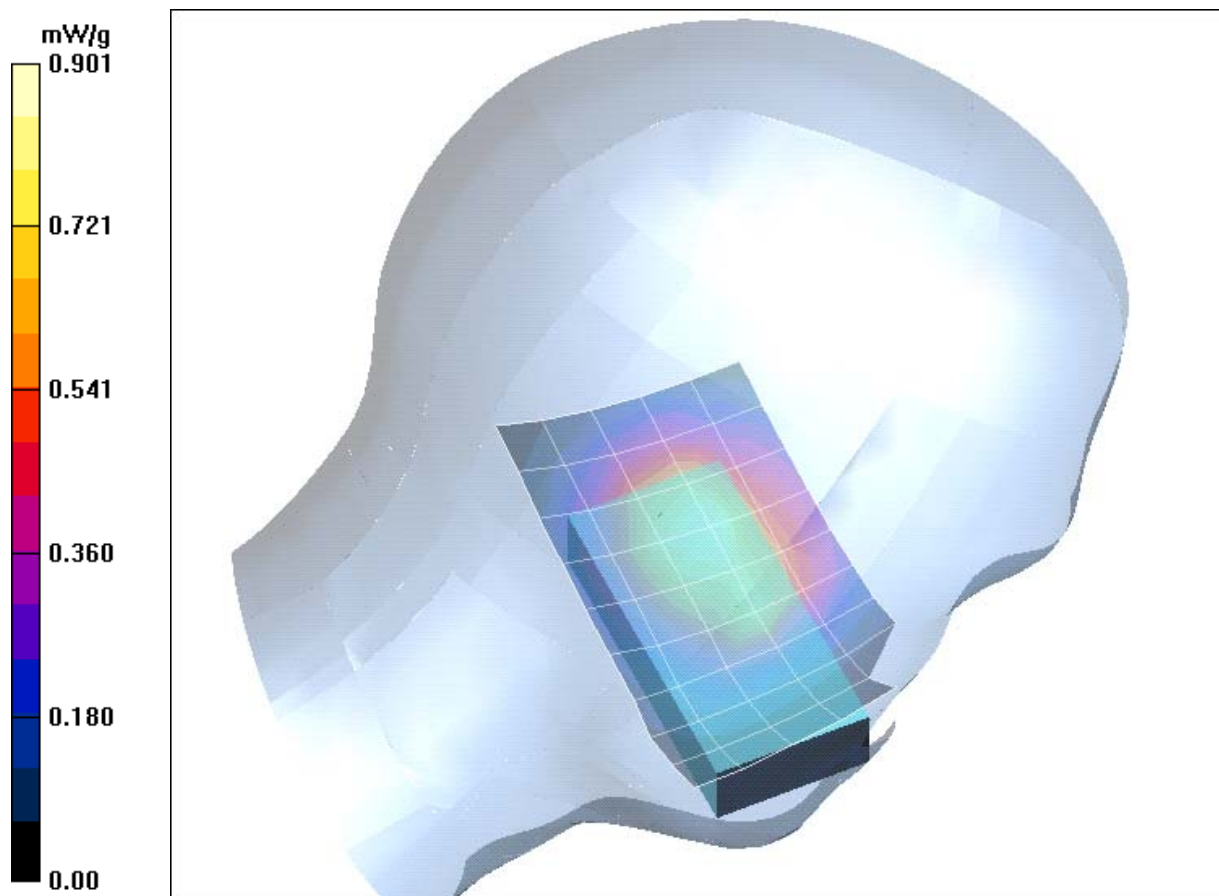


Fig. 5: SAR distribution for GSM 850, channel 128, cheek position, left side of head (July 01, 2005; Ambient Temperature: 22° C; Liquid Temperature : 21.7° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [792yalh_1.da4](#)

DUT: Siemens; **Type:** A71; **Serial:** 004400002004792

Program Name: Cheek Left

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(9.88, 9.88, 9.88); Calibrated: 27.08.2004

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn906; Calibrated: 16.12.2004

- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Left/Area Scan (6x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.697 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm; Reference

Value = 24.7 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.669 mW/g; SAR(10 g) = 0.467 mW/g

Maximum value of SAR (measured) = 0.709 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm; Reference

Value = 24.7 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.952 W/kg

SAR(1 g) = 0.605 mW/g; SAR(10 g) = 0.425 mW/g

Maximum value of SAR (measured) = 0.677 mW/g

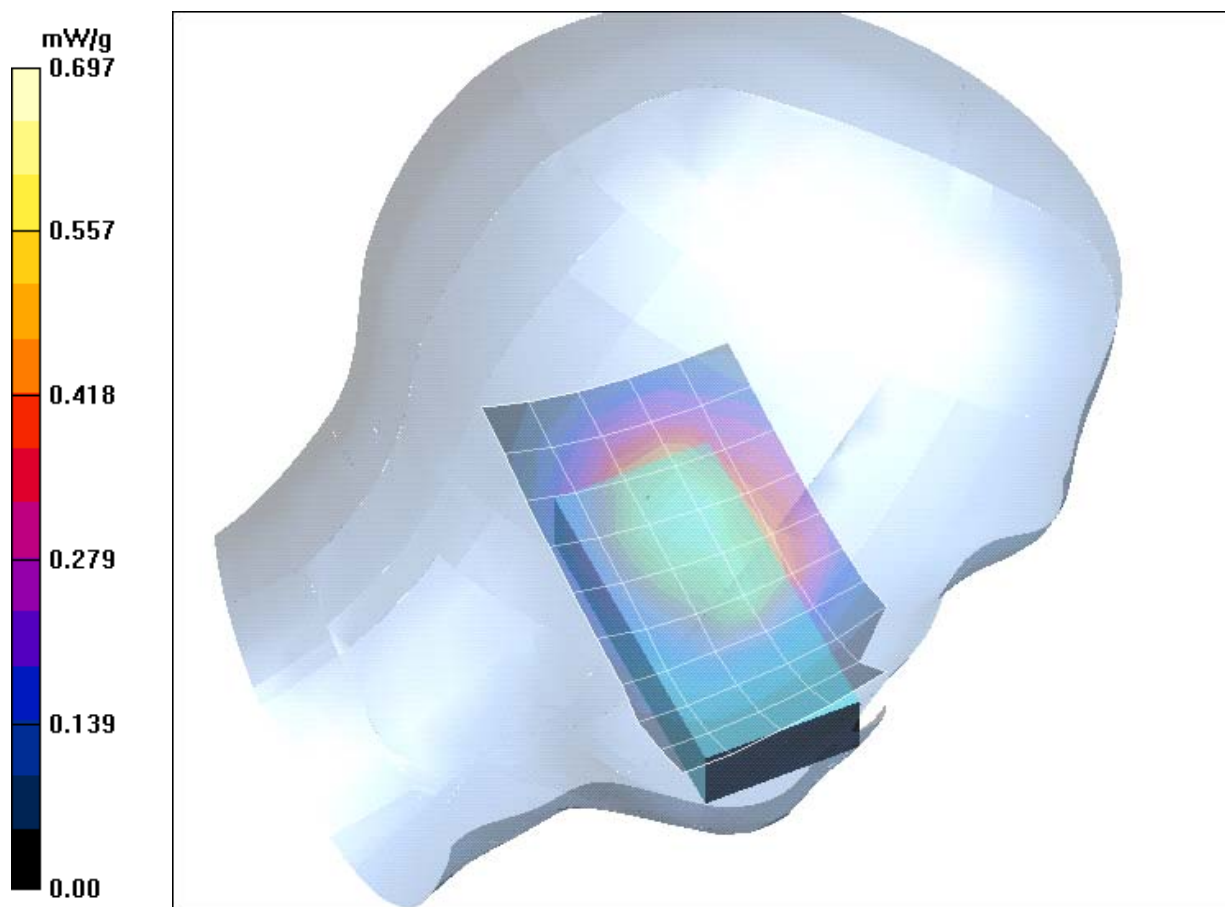


Fig. 6: SAR distribution for GSM 850, channel 251, cheek position, left side of head (July 01, 2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.7° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [792yarl_1.da4](#)

DUT: Siemens; **Type:** A71; **Serial:** 004400002004792

Program Name: Cheek Right

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(9.88, 9.88, 9.88); Calibrated: 27.08.2004

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn906; Calibrated: 16.12.2004

- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Right/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.879 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.1 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.861 mW/g; SAR(10 g) = 0.594 mW/g

Maximum value of SAR (measured) = 0.915 mW/g

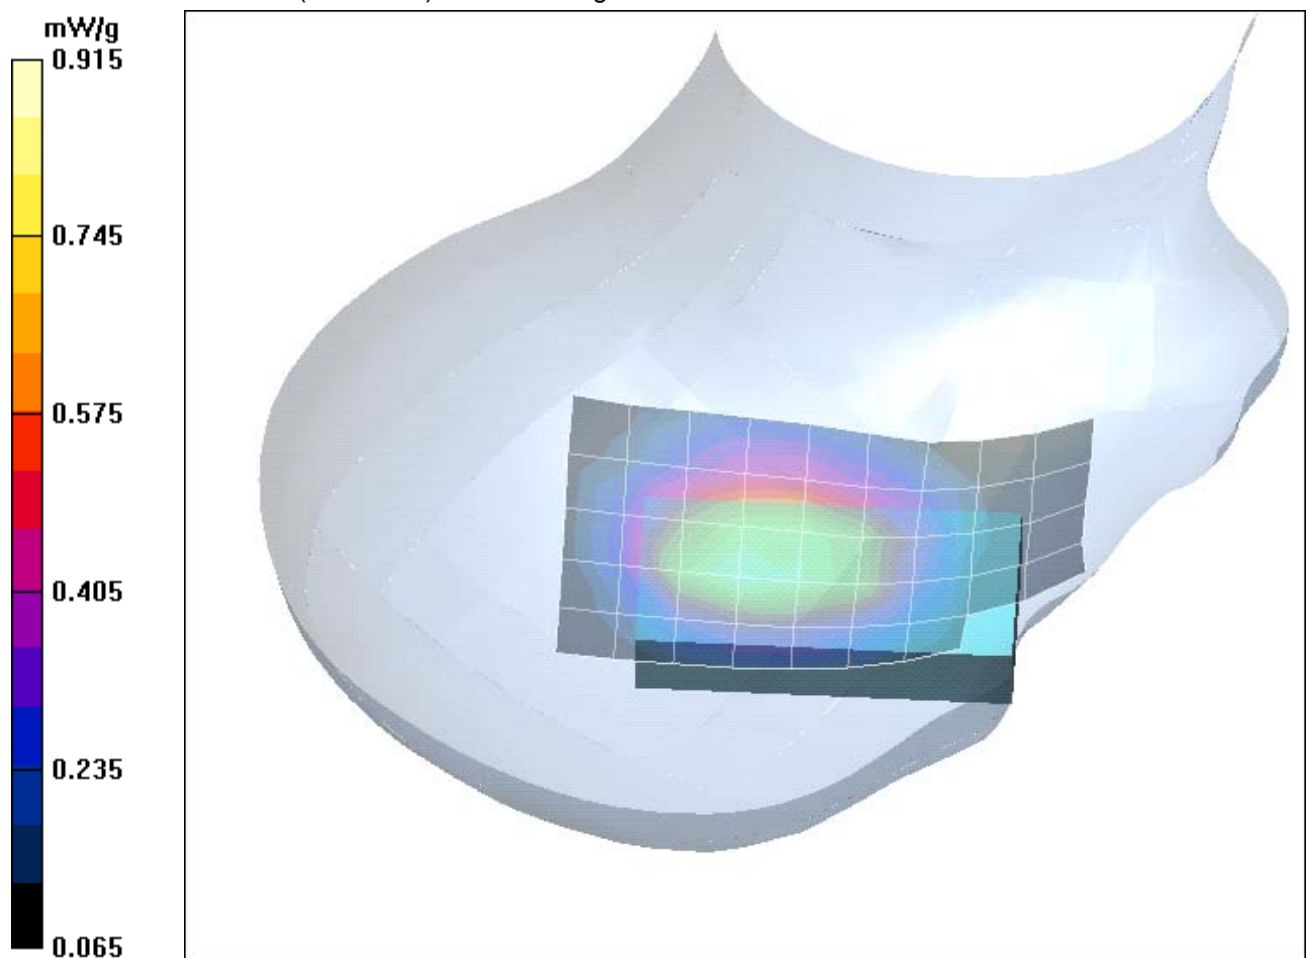


Fig. 7: SAR distribution for GSM 850, channel 128, cheek position, right side of head (July 01, 2005; Ambient Temperature: 22° C; Liquid Temperature : 21.8° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [792yarh_1.da4](#)

DUT: Siemens; **Type:** A71; **Serial:** 004400002004792

Program Name: Cheek Right

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(9.88, 9.88, 9.88); Calibrated: 27.08.2004

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn906; Calibrated: 16.12.2004

- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Right/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.646 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.0 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.974 W/kg

SAR(1 g) = 0.638 mW/g; SAR(10 g) = 0.439 mW/g

Maximum value of SAR (measured) = 0.678 mW/g

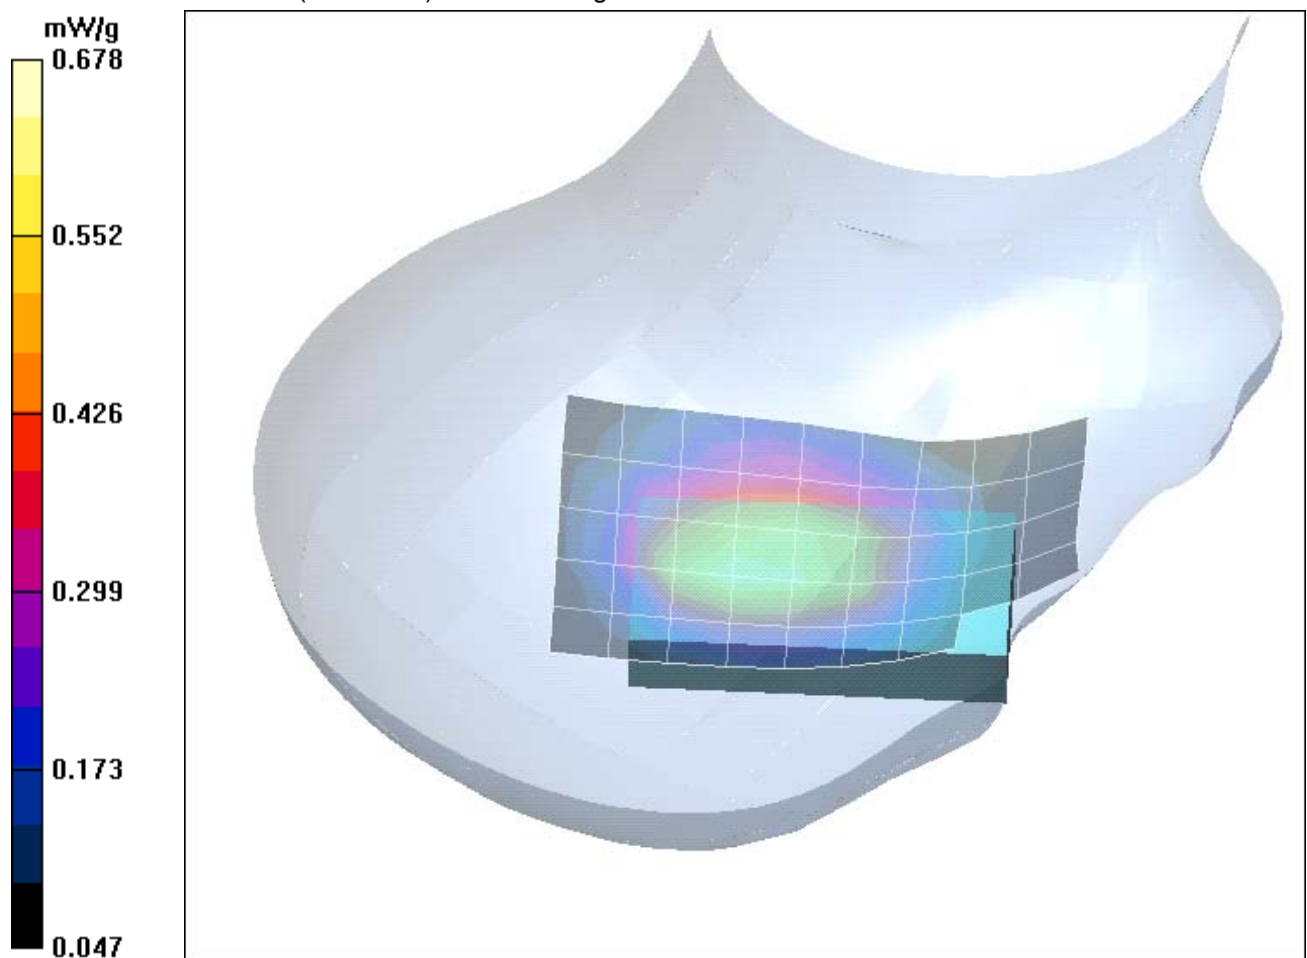


Fig. 8: SAR distribution for GSM 850, channel 251, cheek position, right side of head (July 01, 2005; Ambient Temperature: 22° C; Liquid Temperature : 21.8° C).

2 SAR Distribution Plots, PCS 1900 Head

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [792bplm_1.da4](#)

DUT: Siemens; Type: A71; Serial: 004400002004792

Program Name: Cheek Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(5.11, 5.11, 5.11); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Left/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.314 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.0 V/m; Power Drift = 0.024 dB; Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.181 mW/g

Maximum value of SAR (measured) = 0.329 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.0 V/m; Power Drift = 0.024 dB; Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.222 mW/g

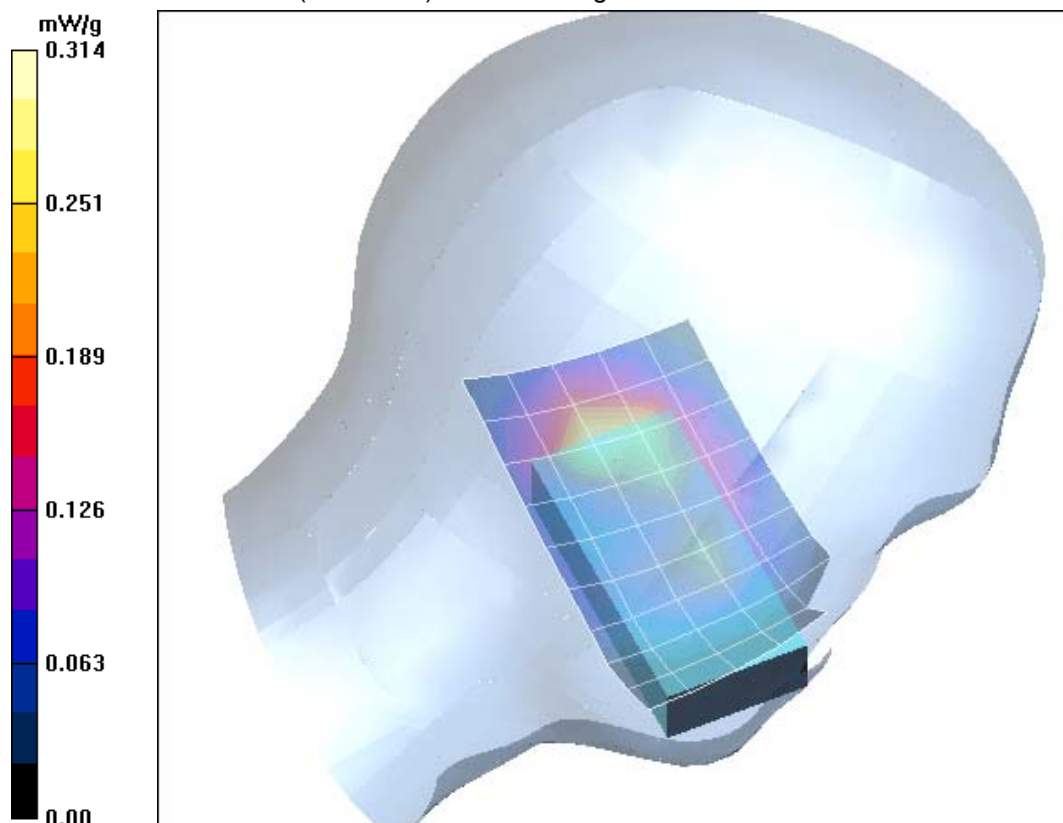


Fig. 9: SAR distribution for PCS 1900, channel 661, cheek position, left side of head (July 04, 2005; Ambient Temperature: 22° C; Liquid Temperature : 21.8° C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [792bplm_2.da4](#)

DUT: Siemens; **Type:** A71; **Serial:** 004400002004792

Program Name: Tilted Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(5.11, 5.11, 5.11); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Left/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.330 mW/g

Tilted Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 0.365 mW/g

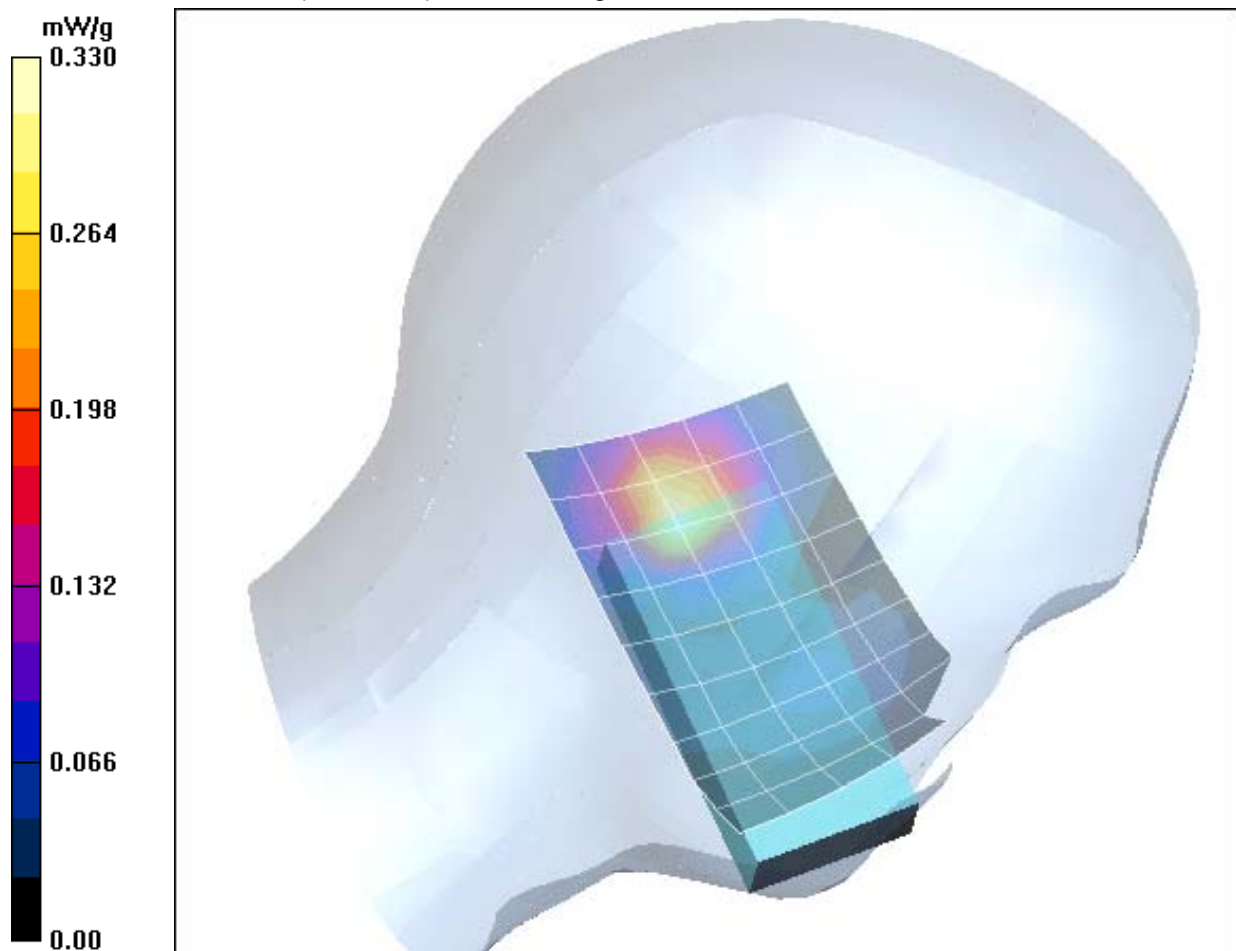


Fig. 10: SAR distribution for PCS 1900, channel 661, tilted position, left side of head (July 04, 2005; Ambient Temperature: 22° C; Liquid Temperature : 21.8° C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [792bprm_1.da4](#)

DUT: Siemens; **Type:** A71; **Serial:** 004400002004792

Program Name: Cheek Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(5.11, 5.11, 5.11); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Right/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.424 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.814 W/kg

SAR(1 g) = 0.456 mW/g; SAR(10 g) = 0.250 mW/g

Maximum value of SAR (measured) = 0.507 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.310 W/kg

SAR(1 g) = 0.233 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.262 mW/g

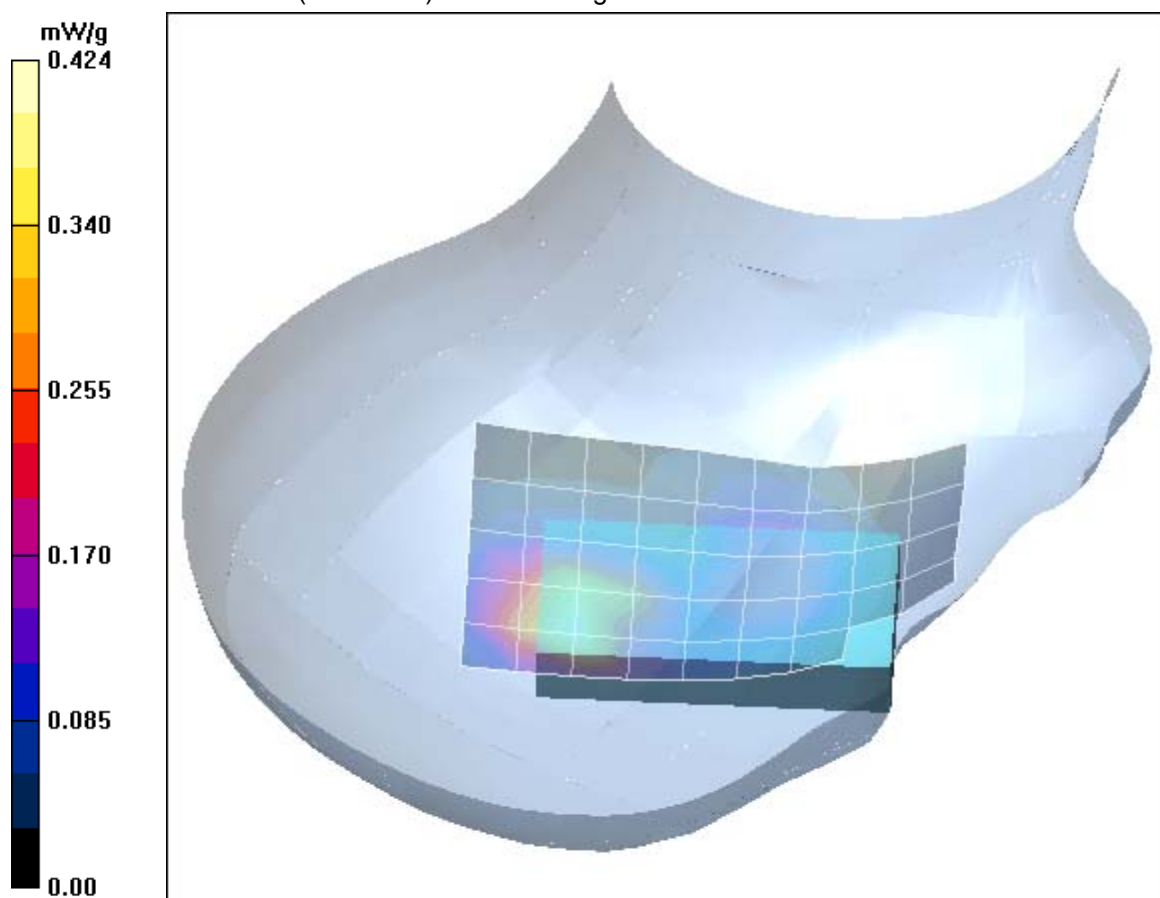


Fig. 11: SAR distribution for PCS 1900, channel 661, cheek position, right side of head (July 04, 2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.9° C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [792bprm_2.da4](#)

DUT: Siemens; **Type:** A71; **Serial:** 004400002004792

Program Name: Tilted Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(5.11, 5.11, 5.11); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Right/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.426 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 0.842 W/kg

SAR(1 g) = 0.467 mW/g; SAR(10 g) = 0.247 mW/g

Maximum value of SAR (measured) = 0.527 mW/g

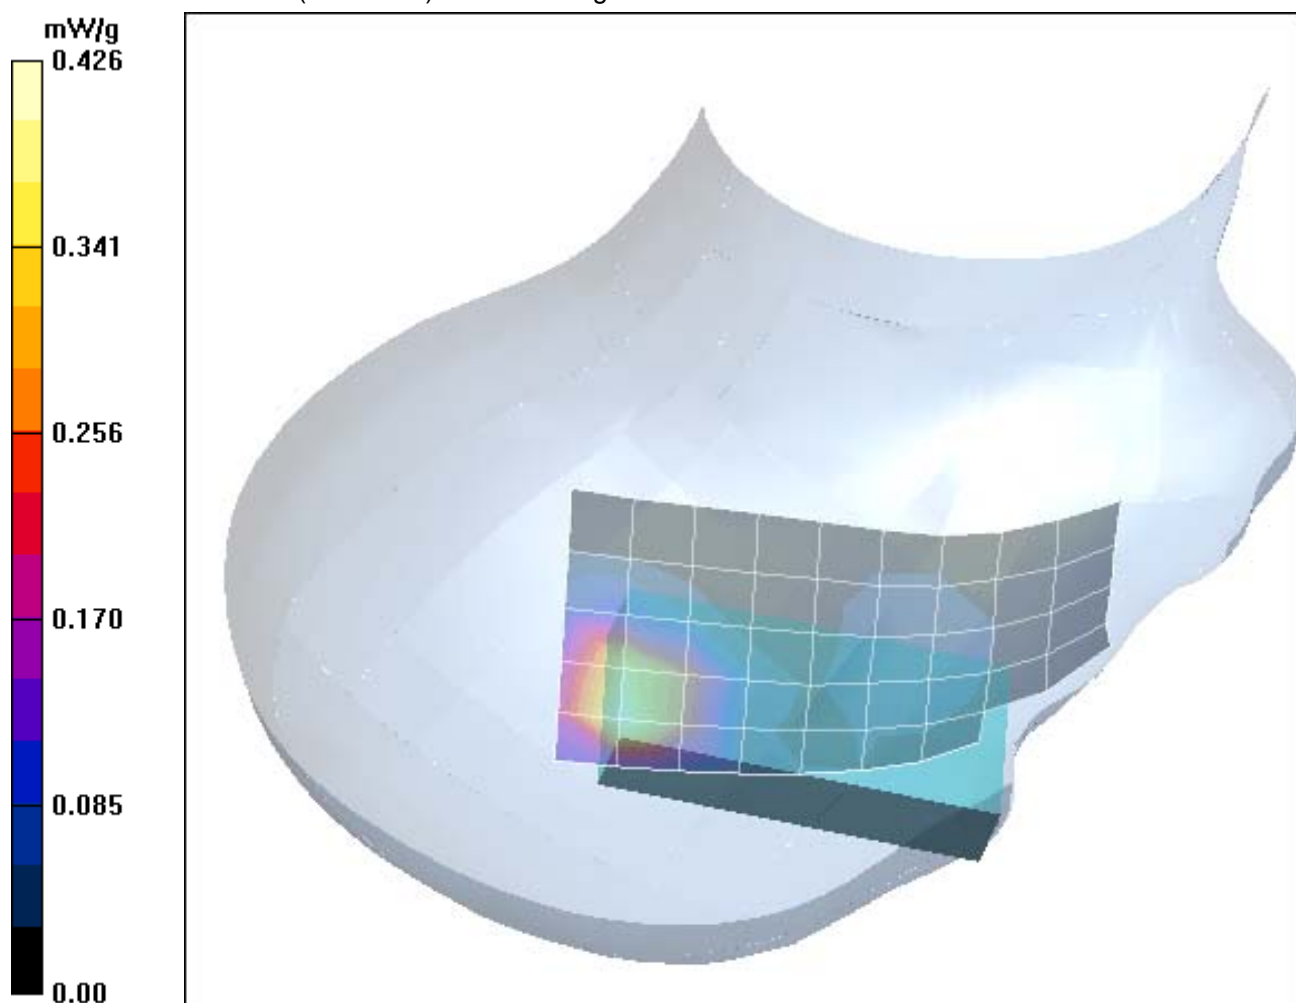


Fig. 12: SAR distribution for PCS 1900, channel 661, tilted position, right side of head (July 04, 2005; Ambient Temperature: 21.9 °C; Liquid Temperature : 21.8° C)

3 SAR Distribution Plots, GSM 850 Body with headset in GSM mode

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [792bahm_7.da4](#)

DUT: Siemens; Type: A71; Serial: 004400002004792

Program Name: Body Worn

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.554 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.5 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.802 W/kg

SAR(1 g) = 0.539 mW/g; SAR(10 g) = 0.362 mW/g

Maximum value of SAR (measured) = 0.574 mW/g

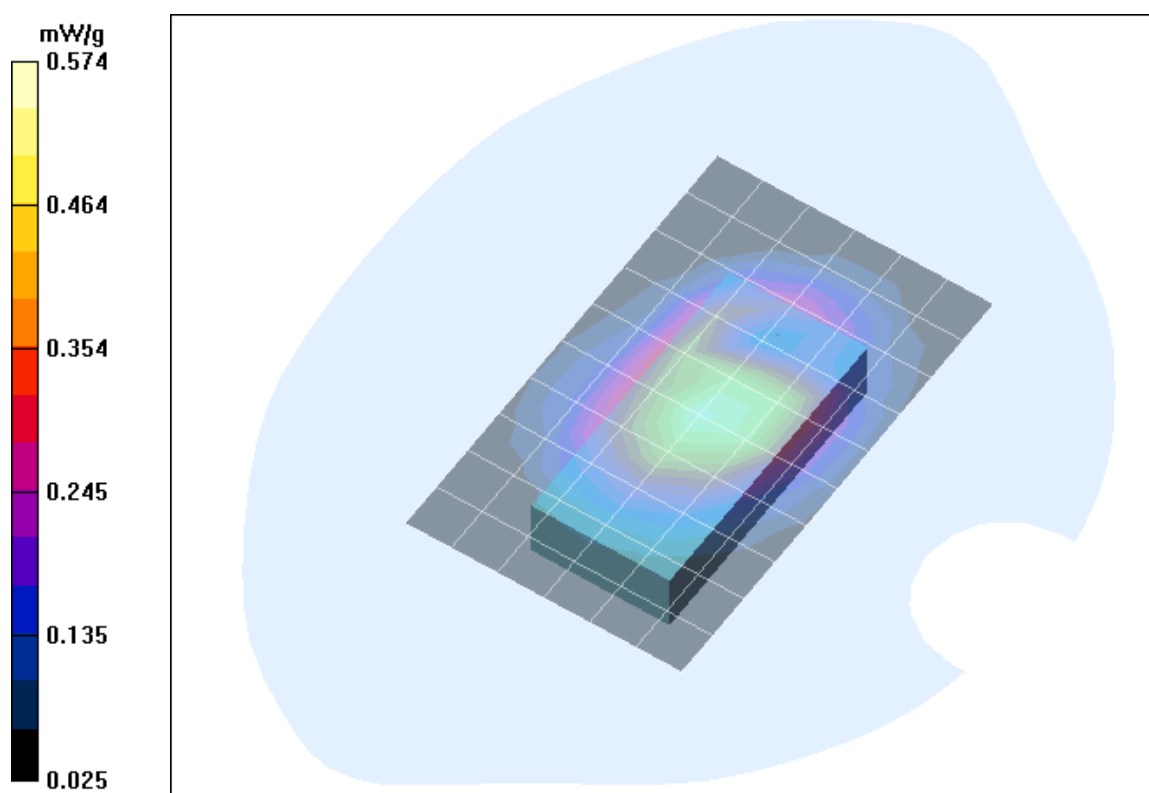


Fig. 13: SAR distribution for GSM 850, channel 190, body worn configuration, antenna towards the phantom, with headset and FCT 650 carry case with 10 mm distance (July 05, 2005; Ambient Temperature: 22.1° C; Liquid Temperature: 21.3° C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [792bahm_8.da4](#)

DUT: Siemens; **Type:** A71; **Serial:** 004400002004792

Program Name: Body Worn

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.353 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.7 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.483 W/kg

SAR(1 g) = 0.337 mW/g; SAR(10 g) = 0.226 mW/g

Maximum value of SAR (measured) = 0.361 mW/g

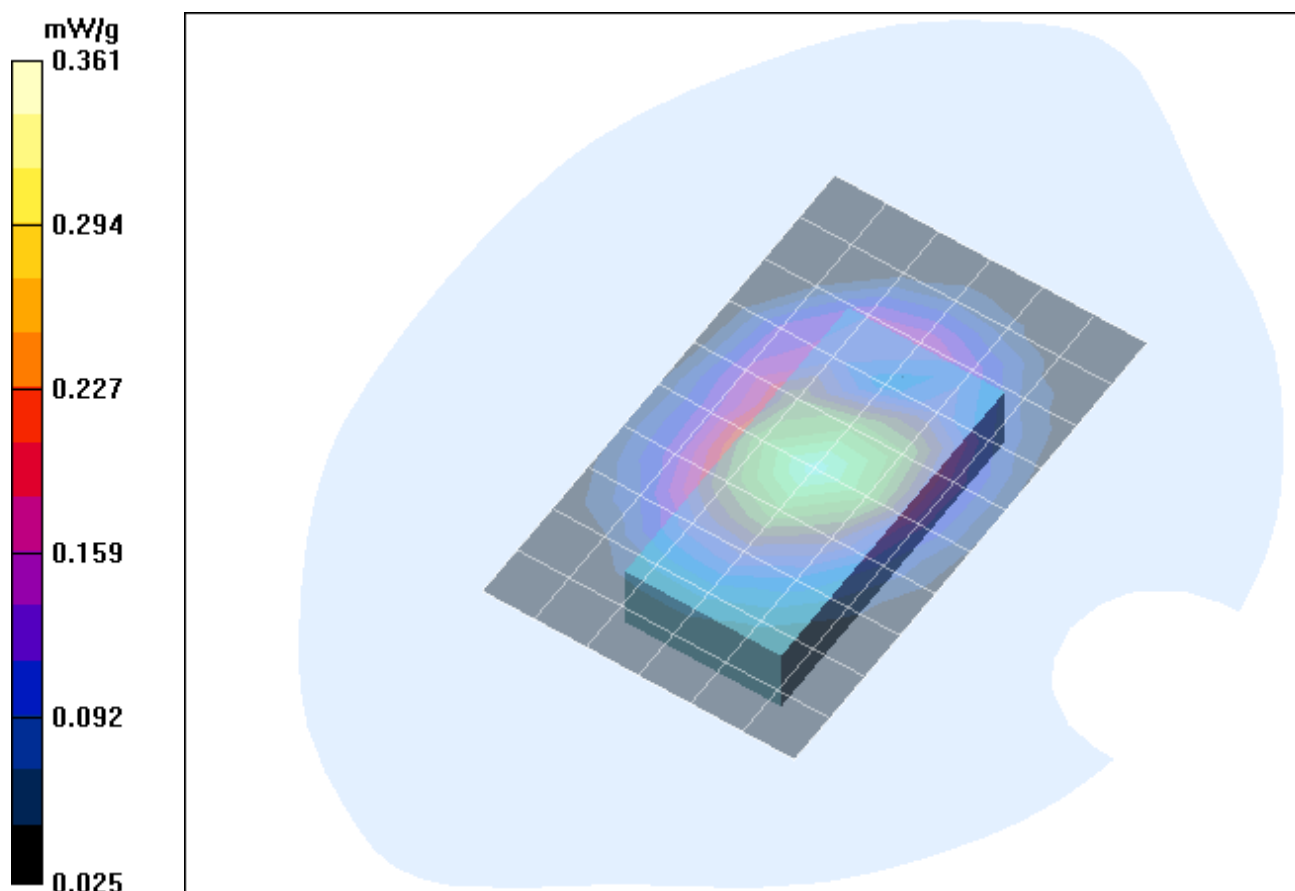


Fig. 14: SAR distribution for GSM 850, channel 190, body worn configuration, antenna towards the phantom, with headset and FCL 600 carry case with 13 mm distance (July 05, 2005; Ambient Temperature: 22.1° C; Liquid Temperature: 21.3° C).

4 SAR Distribution Plots, GSM 850 Body with data cable in GPRS mode

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [792bahm_9.da4](#)

DUT: Siemens; Type: A71; Serial: 004400002004792

Program Name: Body Worn; Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ;DASY4 Configuration:- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39);

Calibrated: 13.01.2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn335; Calibrated: 17.03.2005

- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.291 mW/g;

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.0 V/m; Power Drift = -0.01 dB; Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.193 mW/g

Maximum value of SAR (measured) = 0.296 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.0 V/m; Power Drift = -0.01 dB; Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.101 mW/g

Maximum value of SAR (measured) = 0.209 mW/g

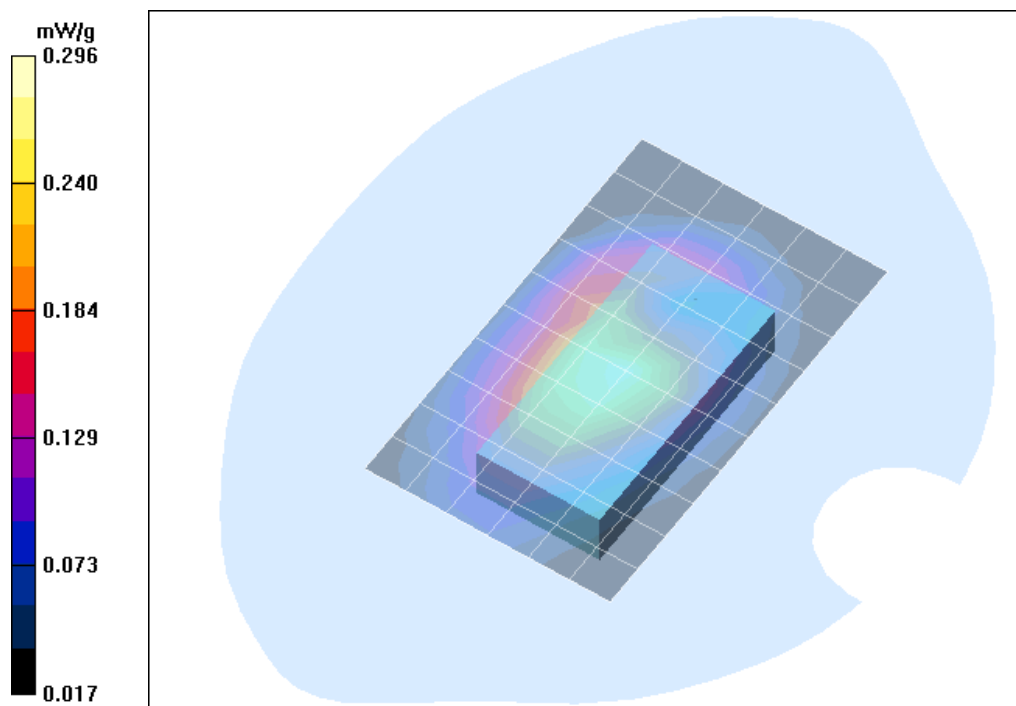


Fig. 15: SAR distribution for GPRS 850, channel 190, body worn configuration, antenna towards the phantom, with data cable and FCL 600 carry case with 13 mm distance (July 05, 2005; Ambient Temperature: 22.0° C; Liquid Temperature: 21.2° C).

5 SAR Distribution Plots, PCS 1900 Body with headset in GSM mode

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [792yphm_7.da4](#)

DUT: Siemens; Type: A71; Serial: 004400002004792

Program Name: Body Worn

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(7.54, 7.54, 7.54); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn906; Calibrated: 16.12.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.715 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = 0.2 dB

Peak SAR (extrapolated) = 0.962 W/kg

SAR(1 g) = 0.658 mW/g; SAR(10 g) = 0.410 mW/g

Maximum value of SAR (measured) = 0.708 mW/g

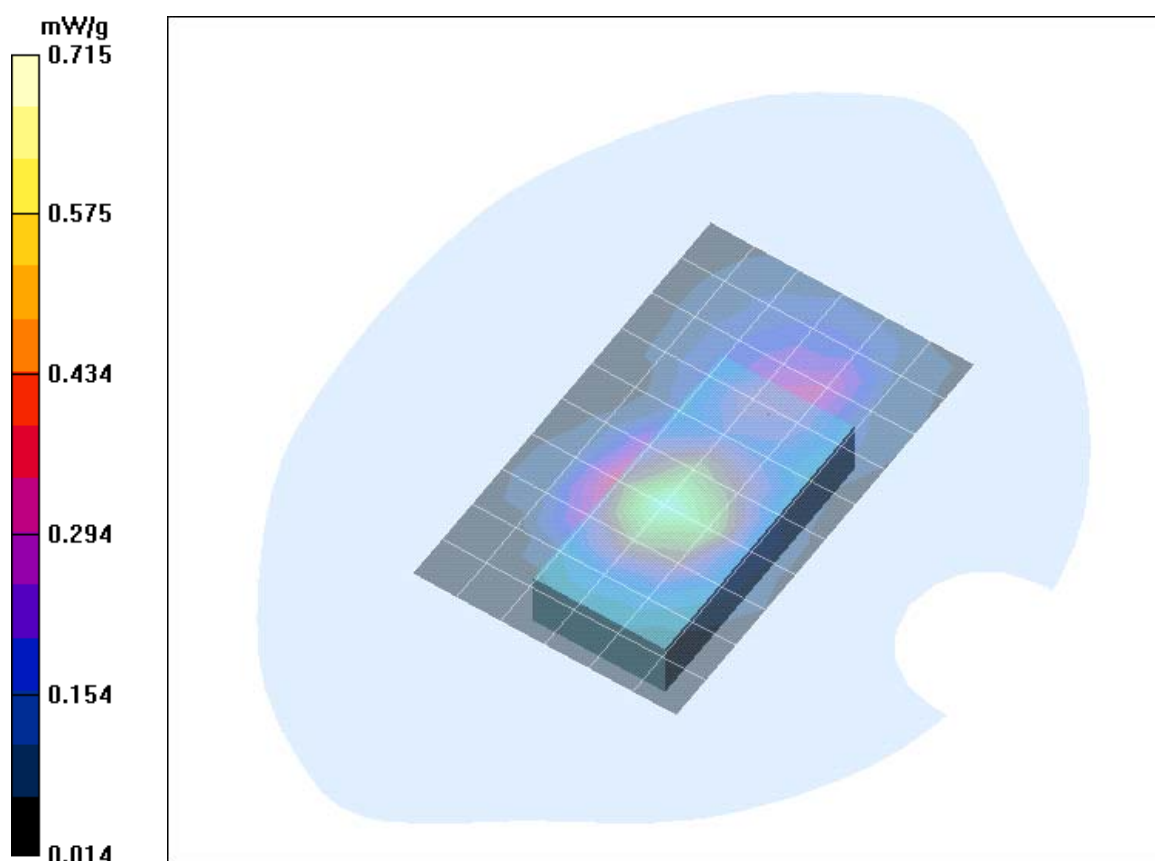


Fig. 16: SAR distribution for PCS 1900, channel 661, body worn configuration, antenna towards the phantom, with headset and FCT 650 carry case with 10 mm distance (July 07, 2005; Ambient Temperature: 22° C; Liquid Temperature: 21.1° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [792yphm_8.da4](#)

DUT: Siemens; Type: A71; Serial: 004400002004792

Program Name: Body Worn

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(7.54, 7.54, 7.54); Calibrated: 27.08.2004

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn906; Calibrated: 16.12.2004

- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.392 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm; Reference Value = 13.2

V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.564 W/kg

SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.246 mW/g

Maximum value of SAR (measured) = 0.420 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm; Reference Value = 13.2

V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.298 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 0.323 mW/g

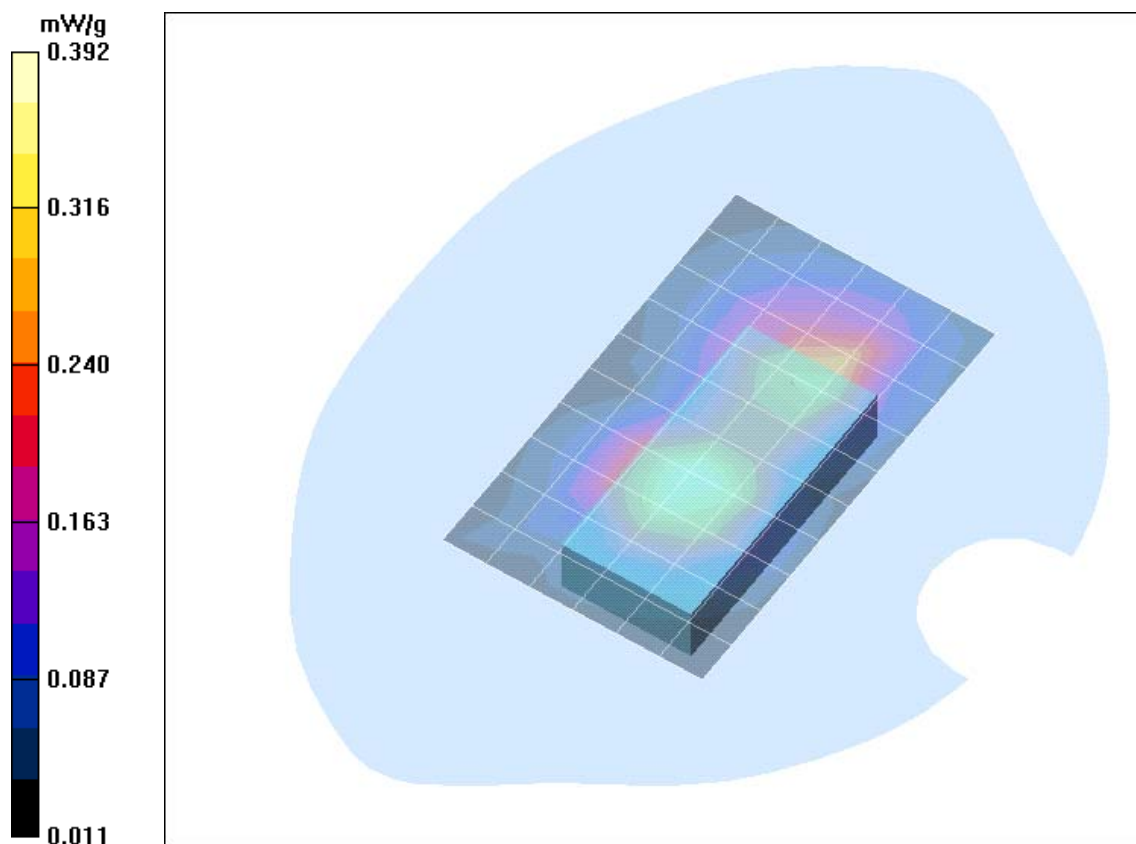


Fig. 17: SAR distribution for PCS 1900, channel 661, body worn configuration, antenna towards the phantom, with headset and FCL 600 carry case with 13 mm distance (July 07, 2005; Ambient Temperature: 22 ° C; Liquid Temperature: 21.1° C).

6 SAR Distribution Plots, PCS 1900 Body with data cable in GPRS mode

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [792yphm_9.da4](#)

DUT: Siemens; Type: A71; Serial: 004400002004792

Program Name: Body Worn

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(7.54, 7.54, 7.54); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn906; Calibrated: 16.12.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.377 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm; Reference Value = 14.5 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 0.517 W/kg

SAR(1 g) = 0.351 mW/g; SAR(10 g) = 0.224 mW/g

Maximum value of SAR (measured) = 0.384 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm; Reference Value = 14.5 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 0.408 W/kg

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.178 mW/g

Maximum value of SAR (measured) = 0.314 mW/g

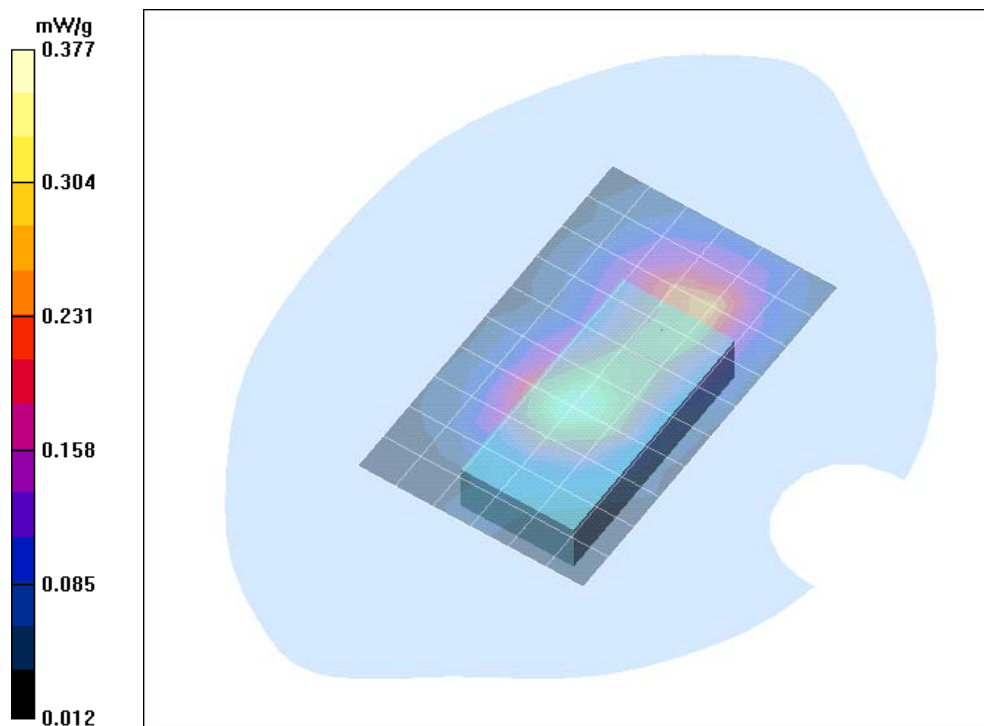


Fig. 18: SAR distribution for GPRS 1900, channel 661, body worn configuration, antenna towards the phantom, with data cable and FCL 600 carry case with 13 mm distance (July 07, 2005; Ambient Temperature: 22.0° C; Liquid Temperature: 21.1° C).

7 SAR z-axis scans (Validation)

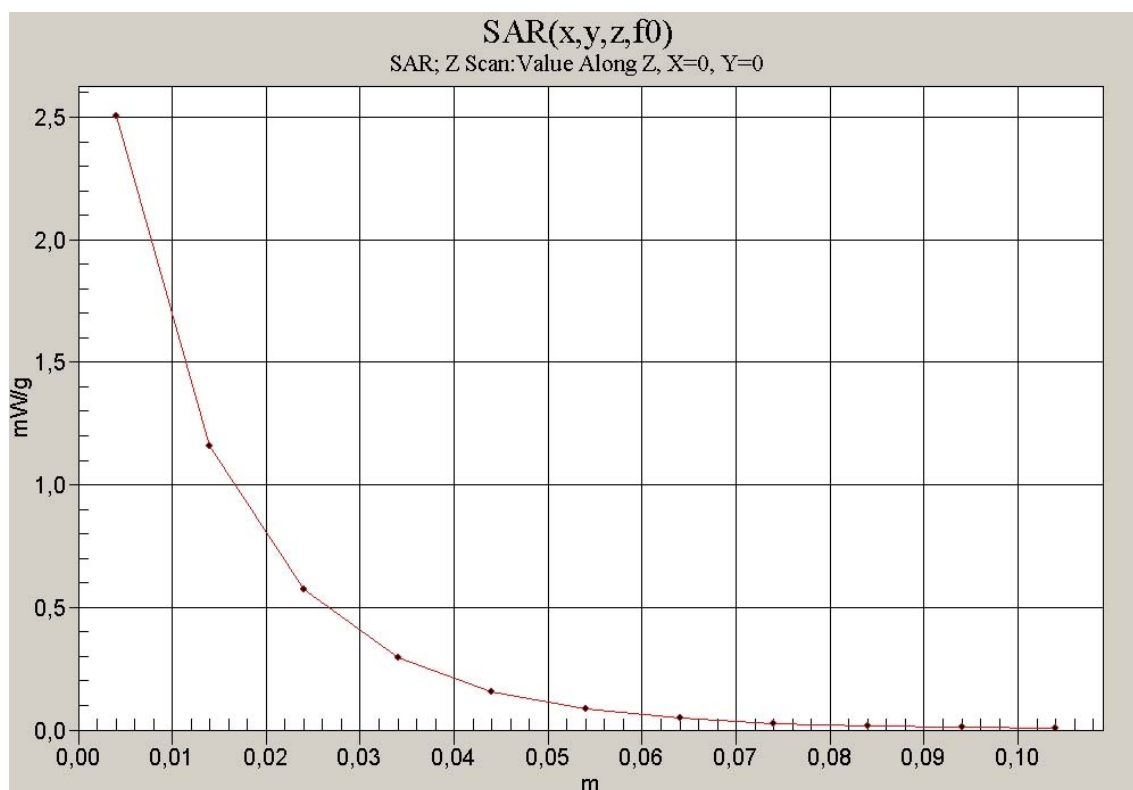


Fig. 19: SAR versus liquid depth, 835 MHz, head (July 01, 2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.8° C).

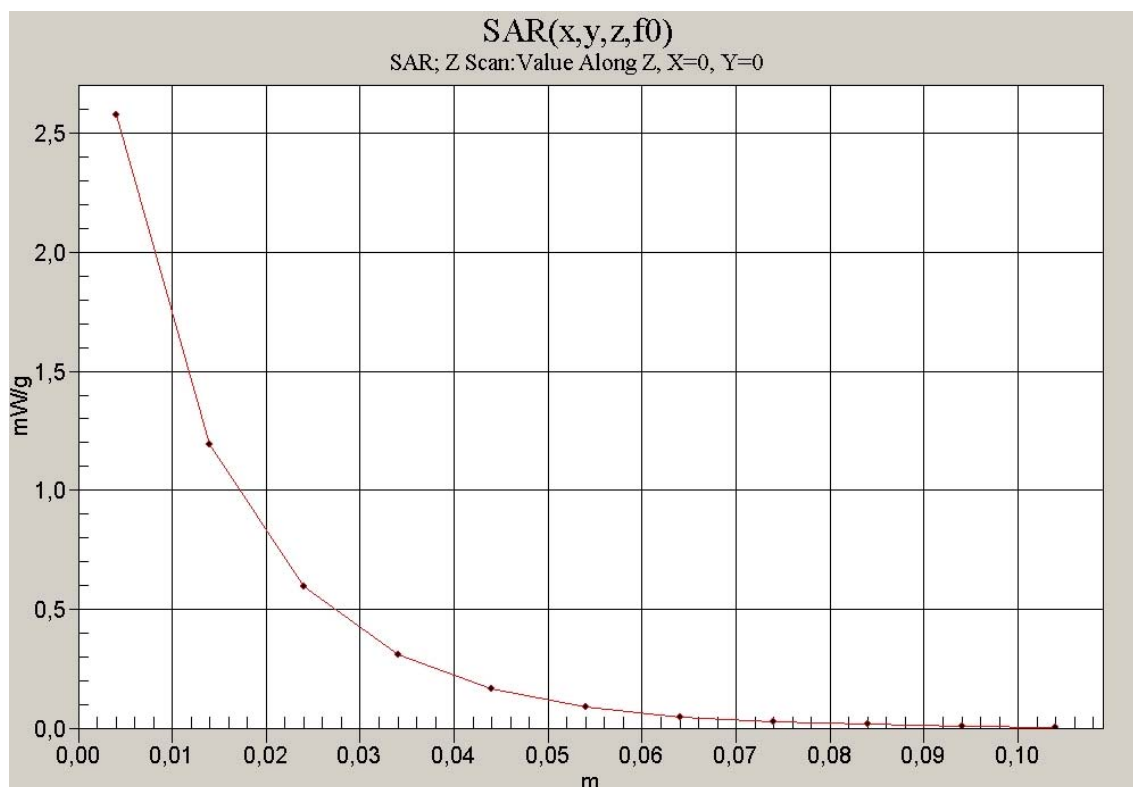


Fig. 20: SAR versus liquid depth, 835 MHz, body (July 05, 2005; Ambient Temperature: 22.5° C; Liquid Temperature : 21.9° C).

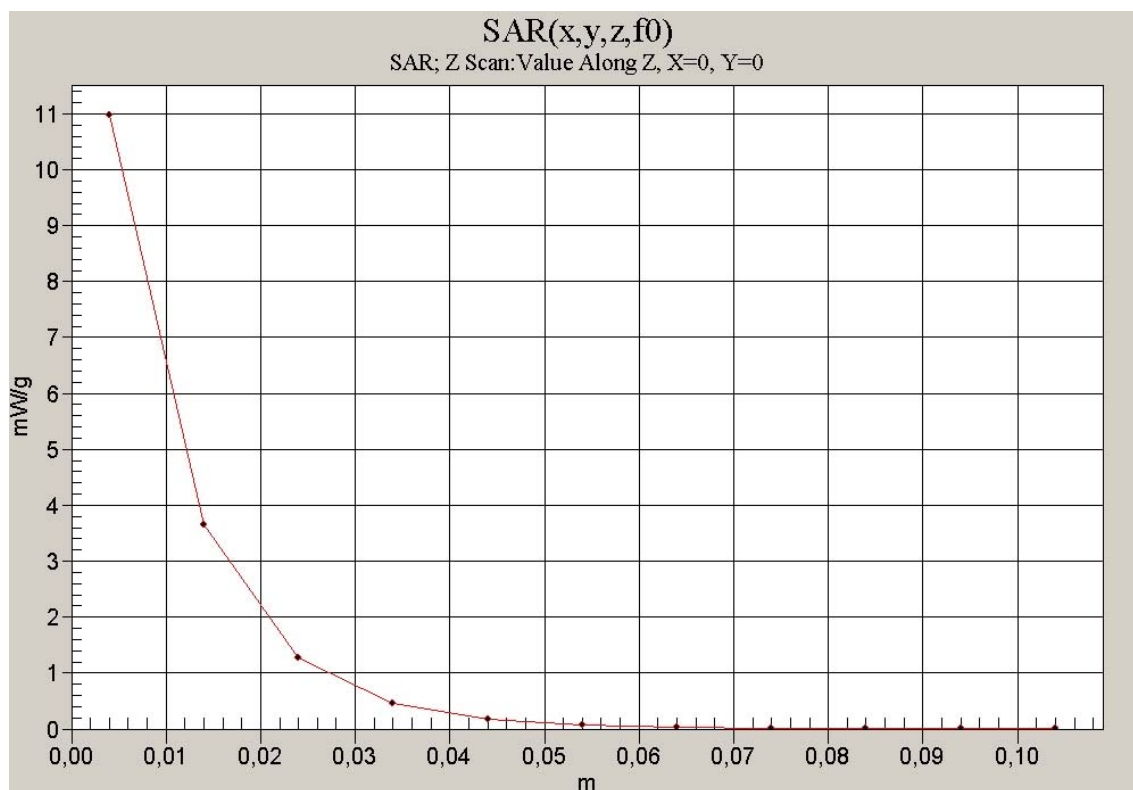


Fig. 21: SAR versus liquid depth, 1900 MHz, head (July 04, 2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.8° C).

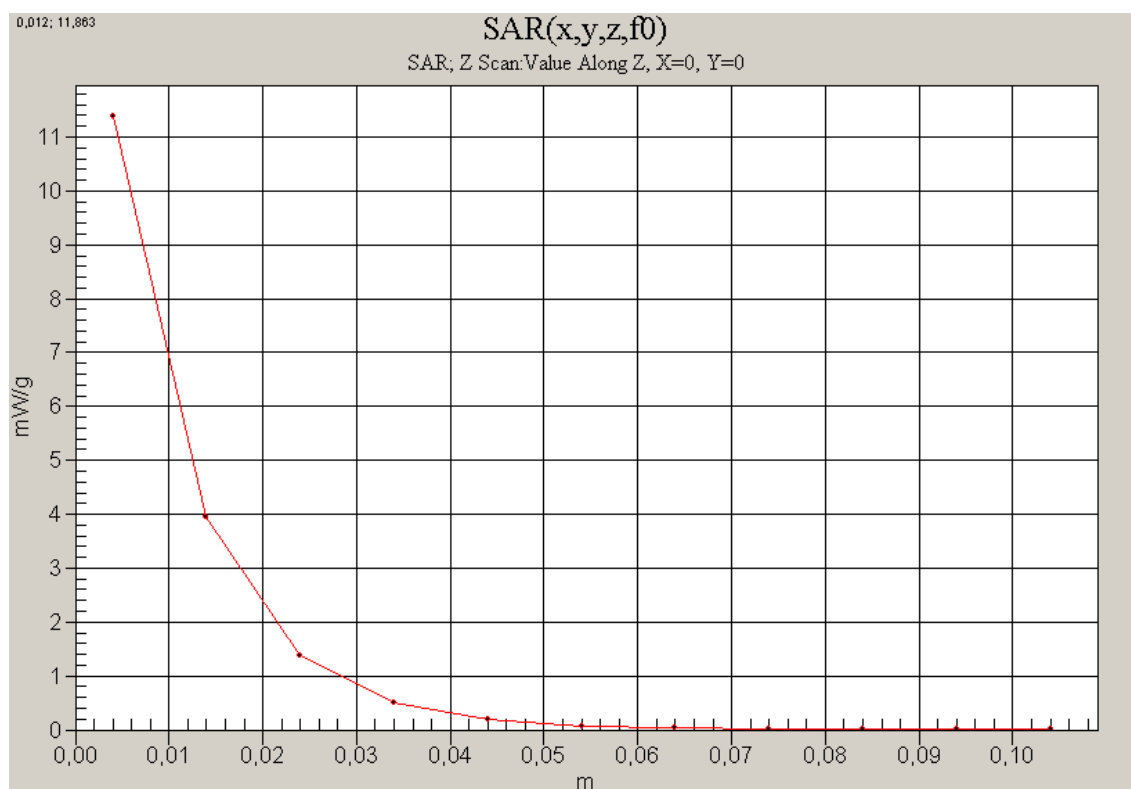


Fig. 22: SAR versus liquid depth, 1900 MHz, body (July 07, 2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.0° C).

8 SAR z-axis scans (Measurements)

The following pictures show the plots of SAR versus liquid depth for the worst case values.

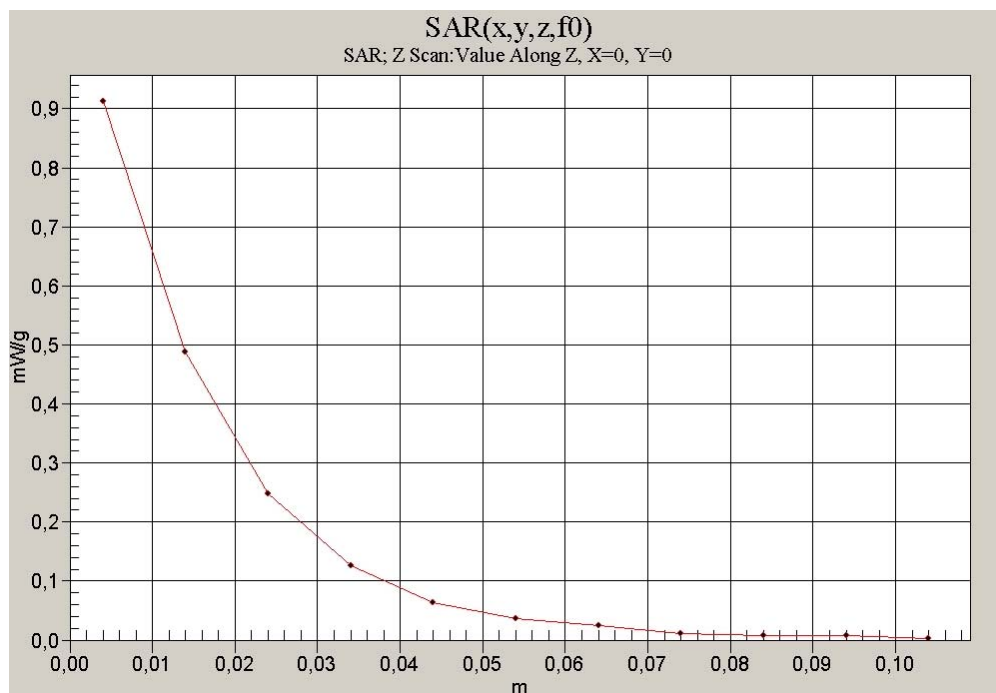


Fig. 23: SAR versus liquid depth, head: GSM 850, channel 128, cheek position, right side of head (July 01, 2005; Ambient Temperature: 22° C; Liquid Temperature : 21.8° C).

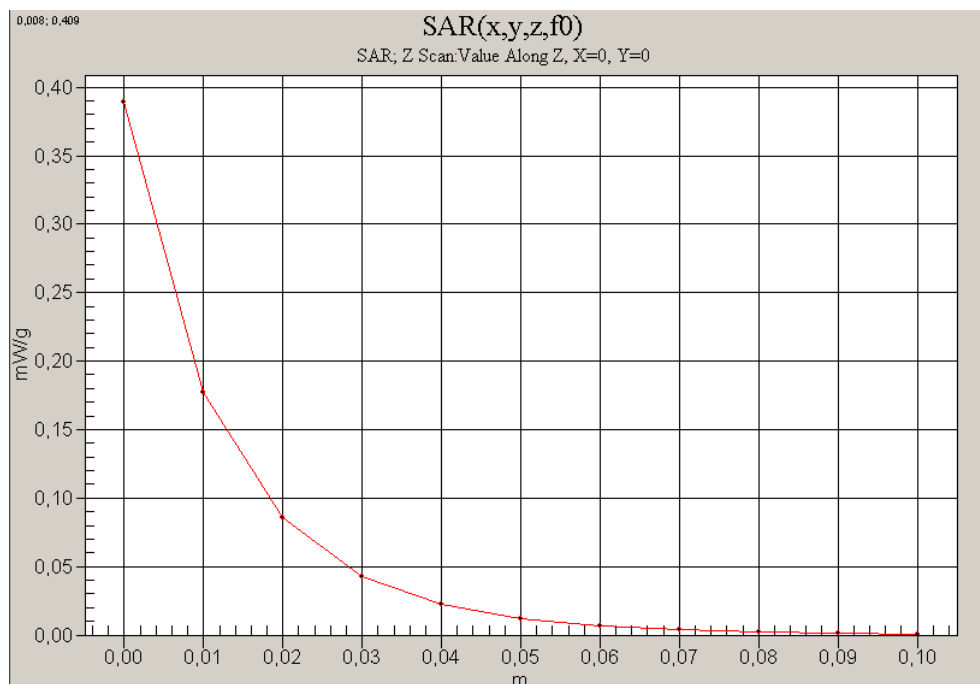


Fig. 24: SAR versus liquid depth, body: GSM 850, channel 190, headset and FCT 650 carry case (July 05, 2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.3° C).

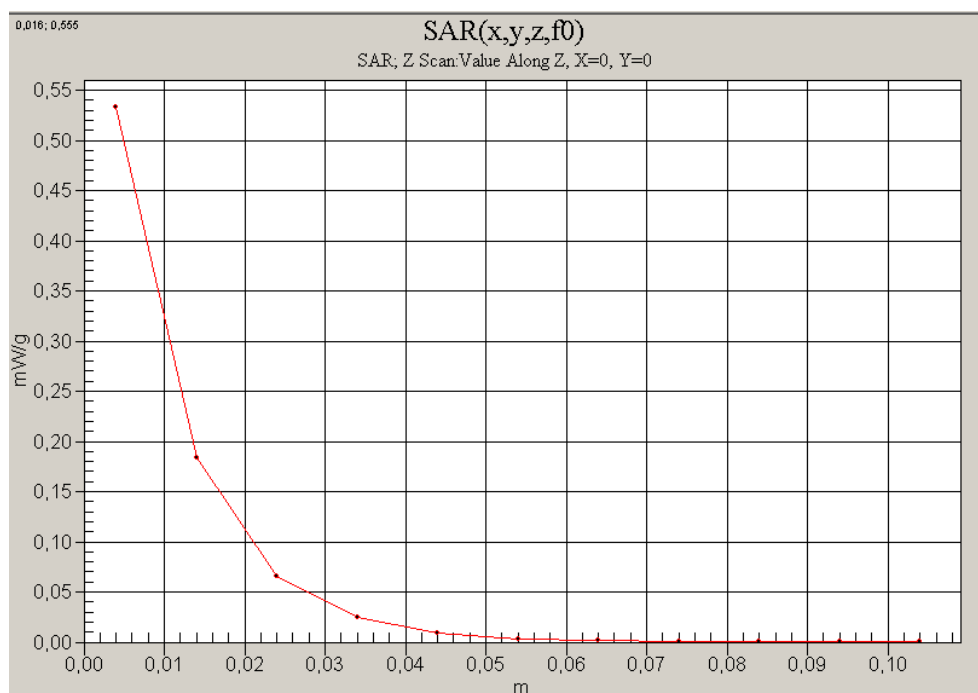


Fig. 25: SAR versus liquid depth, head: PCS 1900, channel 661, tilted position, right side of head (July 04, 2005; Ambient Temperature: 22° C; Liquid Temperature : 21.9° C).

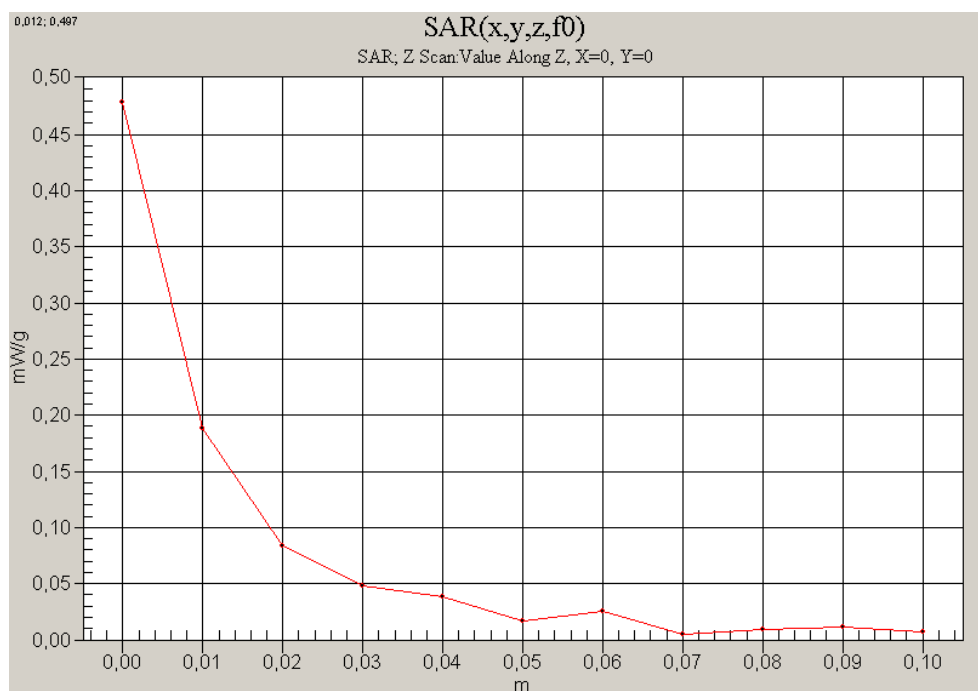


Fig. 26: SAR versus liquid depth, body: PCS 1900, channel 661, headset and FCT 650 carry case (July 07, 2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.1° C).