

Test Report

Conducted Output power GSM 1900

Report No: EMC_C65
Issue date: May 06, 2004

Test Site:

Siemens Mobile Phones
ICM MP PD HW 1 AAL 1
DK-9400 Noerresundby
Denmark

Tel.: +45 72 19 50 00
Fax.: +45 72 19 50 02

Arne Bisgaard Kristensen
Part Project Leader EMC & Antenna



Morten Christensen
Line Group Manager EMC & Antenna



Contents

1	Objective and Method	3
2	Results.....	3
2.1	GSM 1900	3
3	Minutes of Test	3
3.1	Description of device under test	3
3.2	Measurement Set-up	3
4	Calibration Certificate	5

1 Objective and Method

FCC approval for mobile phones requires reporting output power at RF output terminal pursuant to title 47 CFR part 2.1046. SIEMENS devices feature a special 50 Ohm RF connector suitable for such measurements. Using a special adapter and connecting the phone to an appropriate load in terms of the input port of the measurement equipment used, we hereby report the values for highest power setting.

2 Results

2.1 GSM 1900

Device	Average Power during burst at connector		
	Ch. 512 1850.2 MHz	Ch. 661 1880.0 MHz	Ch. 810 1909.8 MHz
Siemens C65, "FCC Sample 1" IMEI: 004400005165434	+ 29.3 dBm	+ 29.2 dBm	+ 29.0 dBm
Siemens C65, "FCC Sample 2" IMEI: 004400005165616	+ 29.3 dBm	+ 29.3 dBm	+ 29.2 dBm
Siemens C65, "FCC Sample 3" IMEI: 004400005181845	+ 29.3 dBm	+ 29.3 dBm	+ 29.2 dBm
Siemens C65, "FCC Sample 4" IMEI: 004400005166655	+ 29.2 dBm	+ 29.1 dBm	+ 29.1 dBm

Table 2: Results of power measurements at connector in the GSM 1900 Band

3 Minutes of Test

3.1 Description of device under test

Mobile phone: Siemens C65
Frequency range GSM 1900: 1850 – 1990 MHz
Siemens Part number: L36880-N7800-Axxx
Siemens Part number: L36880-N7810-Axxx
Siemens Part number: L36880-N7820-Axxx
FCC ID: PWX-C65

3.2 Measurement Set-up

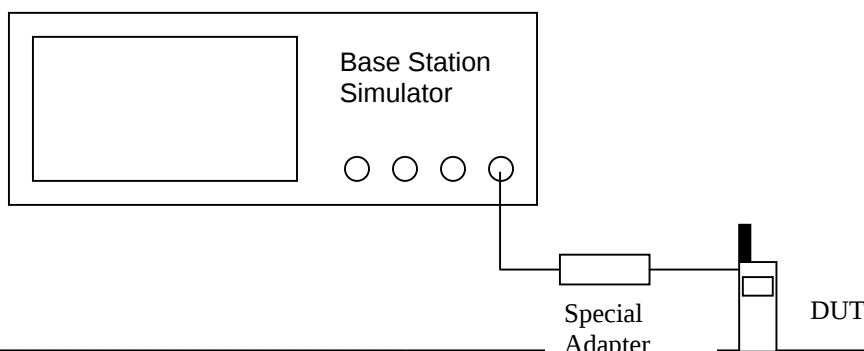


Figure 1: Block Diagram of set-up for conducted power measurement



Figure 2: Set-up for conducted power measurement

4 Calibration Certificate



Kalibreringscertifikat Certificate of Calibration

Certifikat nr.: C0049/04
Certificate no.

Side: 1 Af 15
Page of

Kunde: Siemens Mobile Phones A/S
Client: Siemens kaj 1
9400 Nørresundby

Udstyr: Rohde & Schwarz
Equipment: Universal radio comm. tester
CMU200

Kundes Inst.nr.: 508-0170
Equipment no.

Serie nr.: 832221/063
Serial no.

Modtaget: 23 mar 04
Received

Kalibreret: 23 mar 04
Calibrated

Procedure: CMU200/01-0481/2004
Procedure

Udført af: Claus Stenberg Hansen
Performed by

Bemærkninger: Kalibreringen er udført i henhold til DANAK akkreditering nr 291 som
Remarks: beskrevet i den anførte kalibreringsprocedure.


Instrumentet overholder anførte specifikationer med følgende bemærkninger:

- Kalibrering er udført 'on site' hos kunden.
- Målinger mærket med ?) kan på grund af målesikkerheden ikke konstateres at være inden for specifikation med et konfidensniveau på 95 %.
- Målinger mærket med *) er ikke omfattet af akkreditering.

Måleresultater er gengivet i:

- Annex A - Test Report.

Godkendt den: 21 apr 04
Approved

Af:  Carl Aage Dahl
Winther
By Carl Aage Dahl Winther
Kalibreringschef

Digitally signed by Carl
Aage Dahl Winther
DN: cn=Carl Aage
Dahl, o=Rohde & Schwarz
Danmark A/S, email=carl.aage.dahl@rs.dk, c=DK

Prøvningsrapporten må kun gengives i uddrag, hvis rapporten er offentlig tilgængelig, eller Rohde & Schwarz Danmark A/S har godkendt uddraget. Kalibreringsresultaterne gælder alene for de kalibrerede emner.
The Test Report may only be issued in parts if the complete Report is accessible to the public, or if Rohde & Schwarz Danmark A/S has approved the issued part. The Calibration Results are only valid for the calibrated items.

Laboratorie: Rohde & Schwarz Danmark A/S, Ejby Industrivej 40, 2600 Glostrup, A/S reg.: 185 377