
Appendix for the Report

Dosimetric Assessment of the Siemens CX75 (FCC ID: PWX-CX75)

According to the FCC Requirements

SAR Distribution Plots

April 25, 2005
IMST GmbH
Carl-Friedrich-Gauß-Str. 2
D-47475 Kamp-Lintfort

Customer
Siemens Information & Communication Mobile LLC
16475 West Bernado Drive, Suite 400
CA 92127 San Diego

The test results only relate to the items tested.
This report shall not be reproduced except in full without the written
approval of the testing laboratory.

Table of Contents

1	SAR DISTRIBUTION PLOTS, PCS 1900 HEAD, WITHOUT FLASH	3
2	SAR DISTRIBUTION PLOTS, PCS 1900 HEAD, WITH FLASH.....	7
3	SAR DISTRIBUTION PLOTS, PCS 1900 HEAD WORST CASE WITH BLUETOOTH	11
4	SAR DISTRIBUTION PLOTS, PCS 1900 BODY WORN (GAP = 22 MM)	12
5	SAR DISTRIBUTION PLOTS, PCS 1900 BODY WORN, PTT (GAP = 25 MM).....	16
6	SAR Z-AXIS SCANS (VALIDATION)	17
7	SAR Z-AXIS SCANS (MEASUREMENTS).....	18

1 SAR Distribution Plots, PCS 1900 head, without flash

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [696yplm_1.da4](#)

DUT: Siemens; Type: Cx75 ; Serial: 004400009966696

Program Name: Cheek Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(8.19, 8.19, 8.19); Calibrated: 27.08.2004

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn631; Calibrated: 23.07.2004

- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Left/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.563 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.8 V/m; Power Drift = -0.136 dB

Peak SAR (extrapolated) = 0.871 W/kg

SAR(1 g) = 0.580 mW/g; SAR(10 g) = 0.351 mW/g

Maximum value of SAR (measured) = 0.646 mW/g

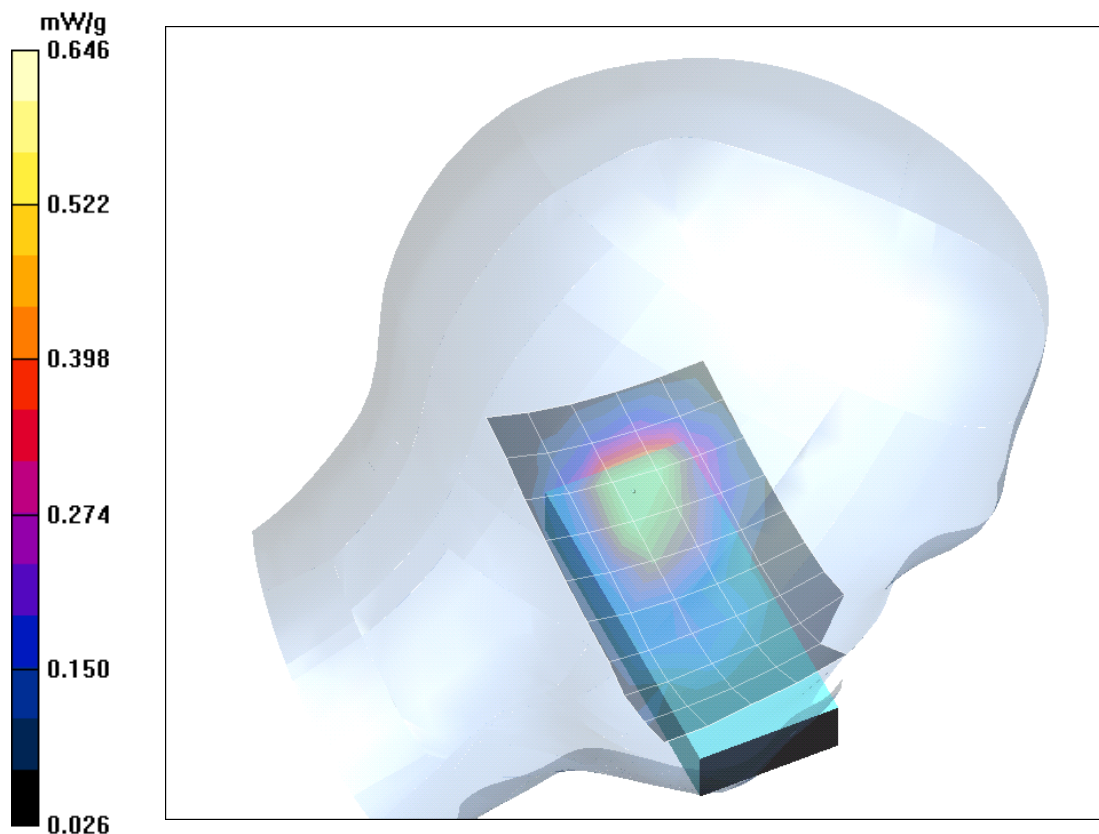


Fig. 1: SAR distribution for PCS 1900, channel 661, cheek position, left side of head (04.15.2005; Ambient Temperature: 22.0° C; Liquid Temperature: 21.3° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [696yp1m_2.da4](#)

DUT: Siemens; **Type:** Cx75 ; **Serial:** 004400009966696

Program Name: Tilted Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(8.19, 8.19, 8.19); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Left/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.706 mW/g

Tilted Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.8 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.722 mW/g; SAR(10 g) = 0.414 mW/g

Maximum value of SAR (measured) = 0.792 mW/g

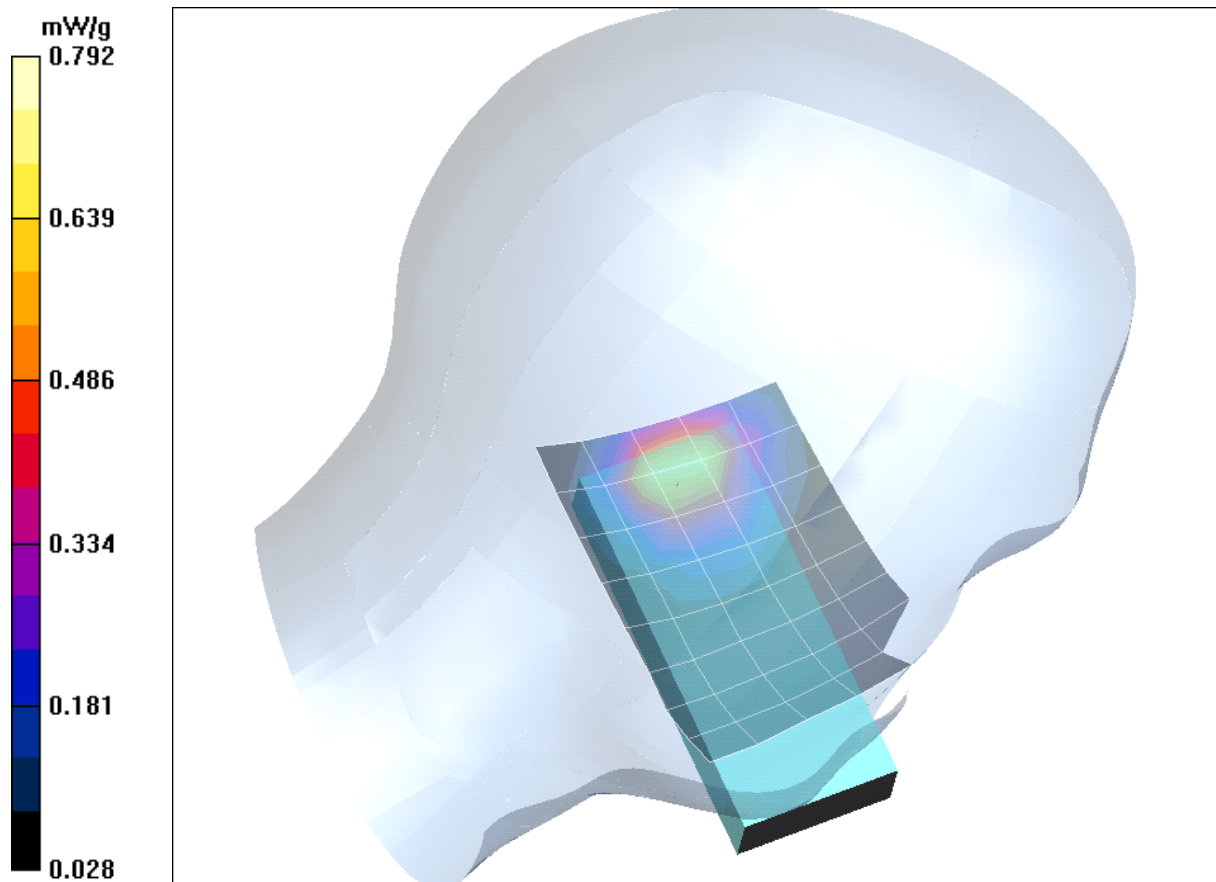


Fig. 2: SAR distribution for PCS 1900, channel 661, tilted position, left side of head (04.15.2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.3° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [696yprm_1.da4](#)

DUT: Siemens; **Type:** Cx75 ; **Serial:** 004400009966696

Program Name: Cheek Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(8.19, 8.19, 8.19); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Right/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.714 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 0.958 W/kg

SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.385 mW/g

Maximum value of SAR (measured) = 0.667 mW/g

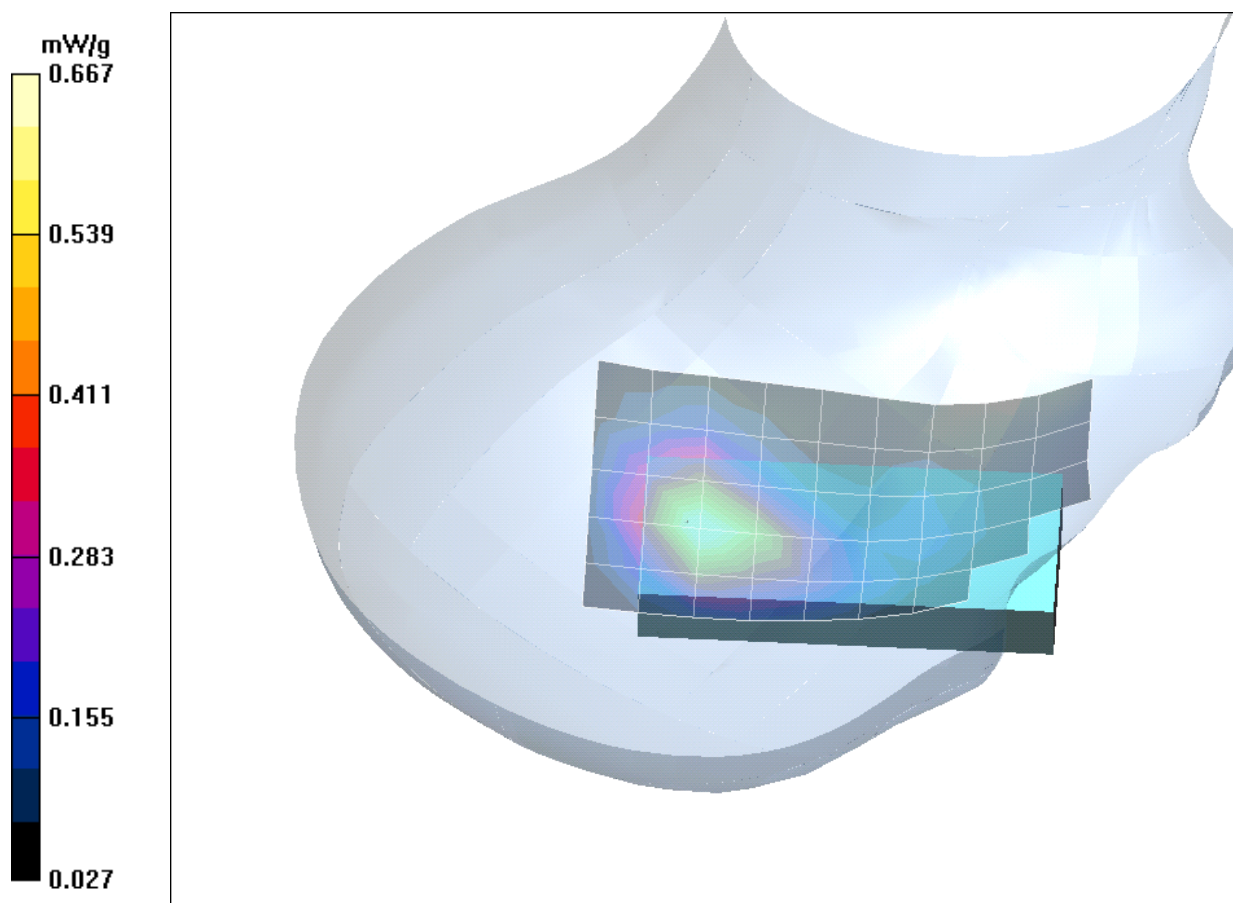


Fig. 3: SAR distribution for PCS 1900, channel 661, cheek position, right side of head (15.04.2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.3° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [696yprm_2.da4](#)

DUT: Siemens; **Type:** Cx75 ; **Serial:** 004400009966696

Program Name: Tilted Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(8.19, 8.19, 8.19); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Right/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.686 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.6 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.735 mW/g; SAR(10 g) = 0.422 mW/g

Maximum value of SAR (measured) = 0.803 mW/g

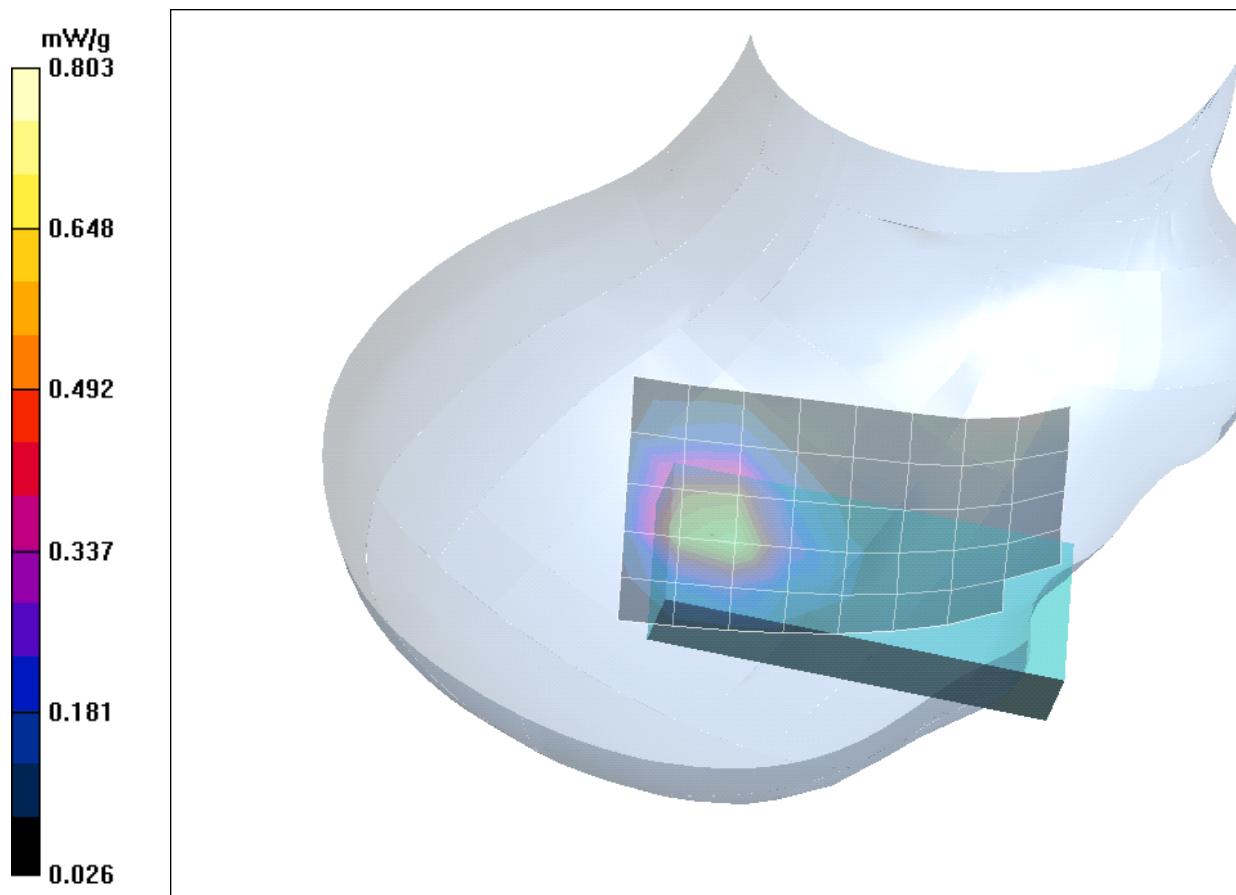


Fig. 4: SAR distribution for PCS 1900, channel 661, tilted position, right side of head (15.04.2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.3° C).

2 SAR Distribution Plots, PCS 1900 head, with flash

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [696yplm_1_flash.da4](#)

DUT: Siemens; Type: Cx75 flash; Serial: 004400009966696

Program Name: Cheek Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(8.19, 8.19, 8.19); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Left/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.548 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.3 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 0.858 W/kg

SAR(1 g) = 0.547 mW/g; SAR(10 g) = 0.320 mW/g

Maximum value of SAR (measured) = 0.602 mW/g

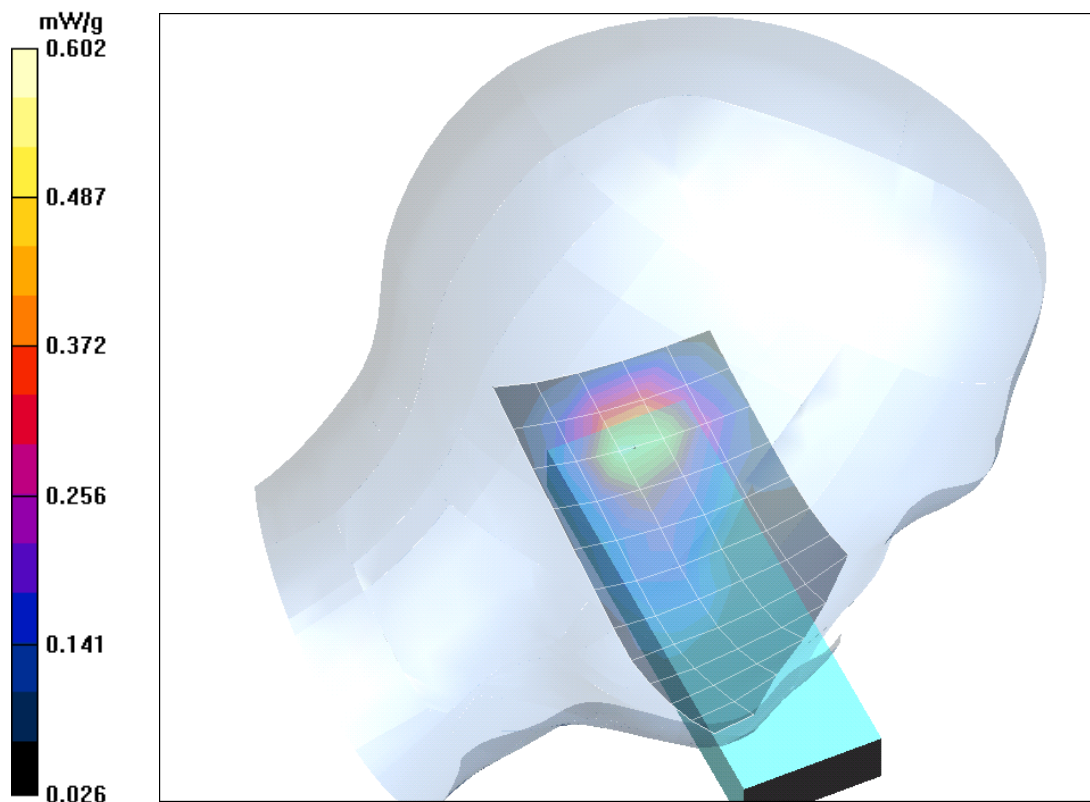


Fig. 5: SAR distribution for PCS 1900, channel 661, cheek position, left side of head (04.15.2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.3° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [696yp1m_2_flash.da4](#)

DUT: Siemens; **Type:** Cx75 flash; **Serial:** 004400009966696

Program Name: Tilted Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(8.19, 8.19, 8.19); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Left/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.668 mW/g

Tilted Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.5 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.655 mW/g; SAR(10 g) = 0.368 mW/g

Maximum value of SAR (measured) = 0.735 mW/g

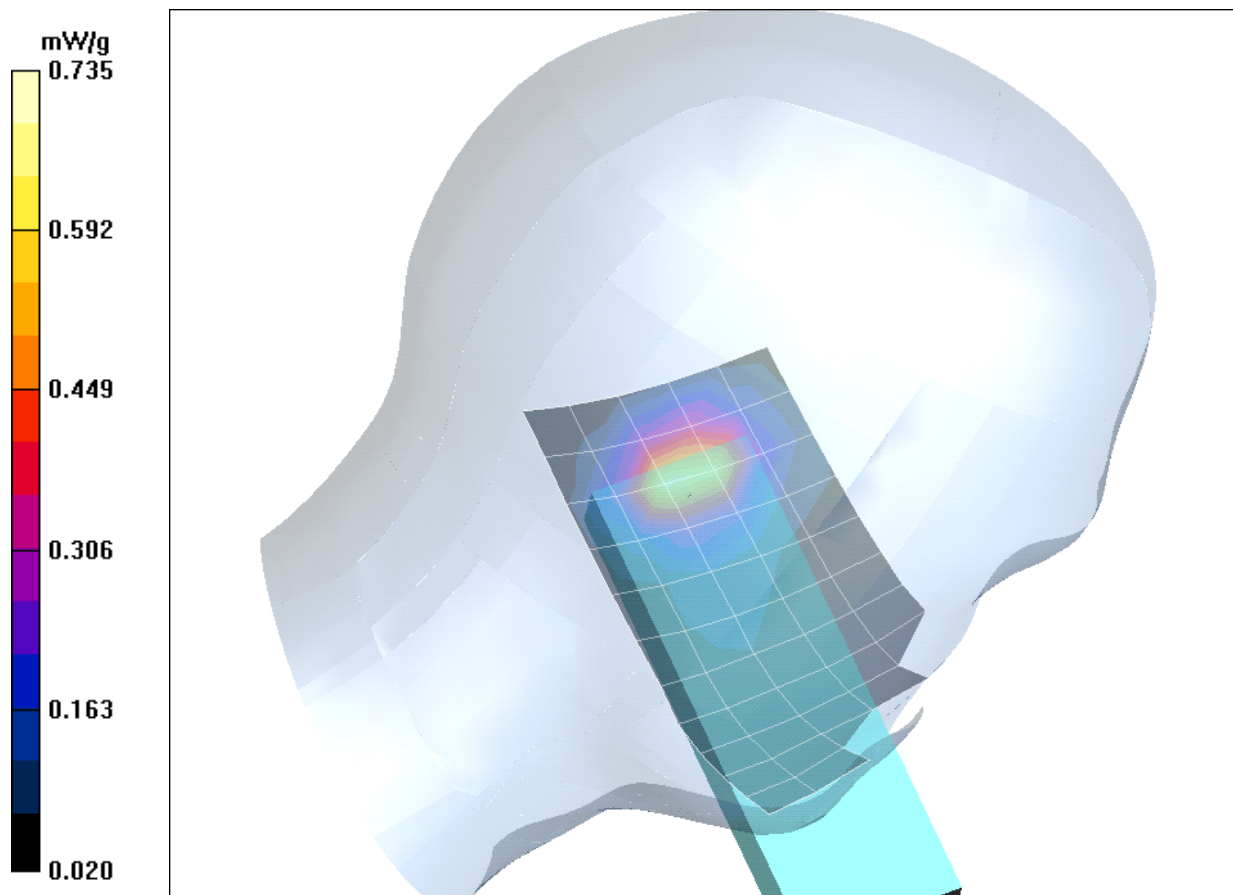


Fig. 6: SAR distribution for PCS 1900, channel 661, tilted position, left side of head (04.15.2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.3° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [696yprm_1_flash.da4](#)

DUT: Siemens; **Type:** Cx75 flash; **Serial:** 004400009966696

Program Name: Cheek Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(8.19, 8.19, 8.19); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Right/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.498 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.0 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.888 W/kg

SAR(1 g) = 0.539 mW/g; SAR(10 g) = 0.325 mW/g

Maximum value of SAR (measured) = 0.611 mW/g

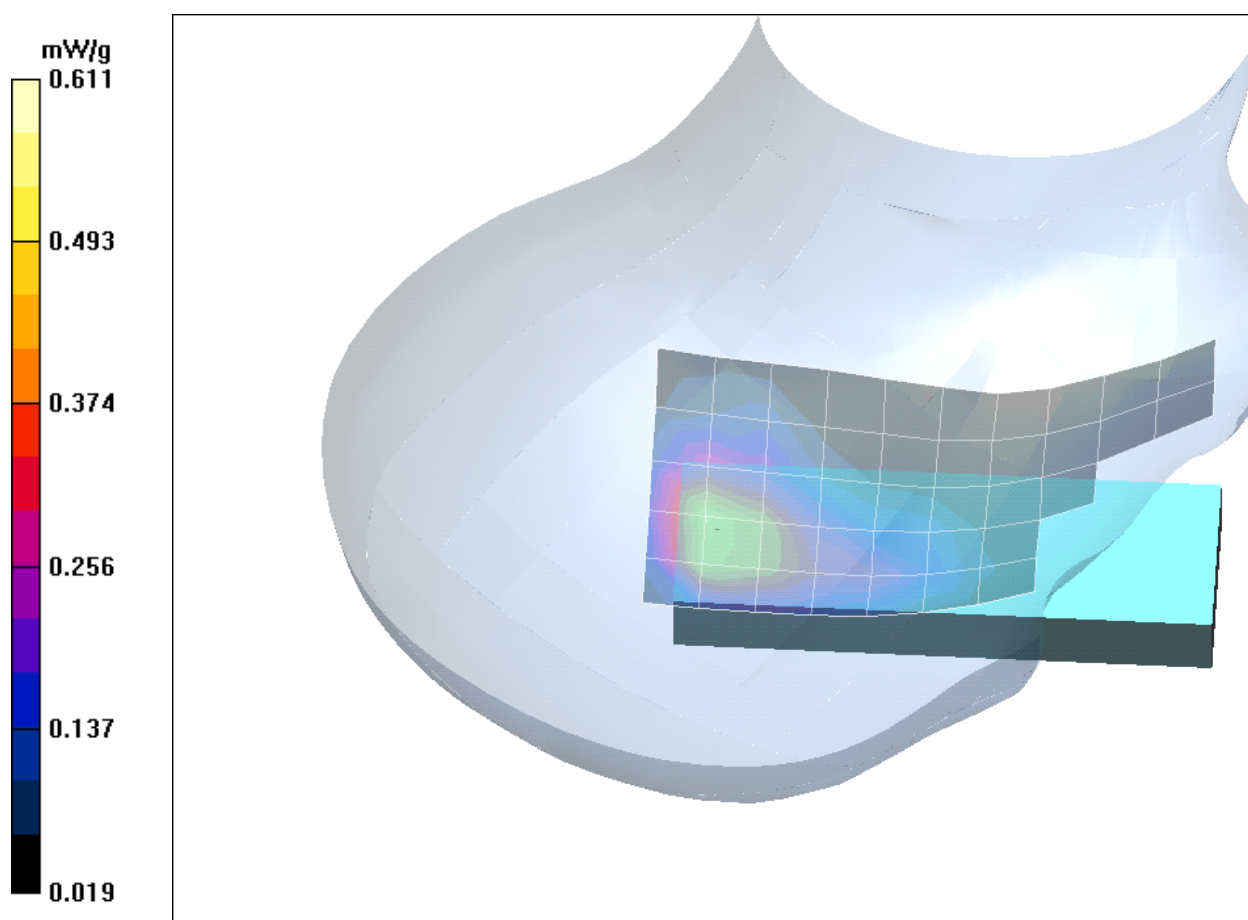


Fig. 7: SAR distribution for PCS 1900, channel 661, cheek position, right side of head (04.15.2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.3° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [696yprm_2_flash.da4](#)

DUT: Siemens; **Type:** Cx75 flash; **Serial:** 004400009966696

Program Name: Tilted Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(8.19, 8.19, 8.19); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Right/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.437 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.0 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 0.834 W/kg

SAR(1 g) = 0.490 mW/g; SAR(10 g) = 0.279 mW/g

Maximum value of SAR (measured) = 0.546 mW/g

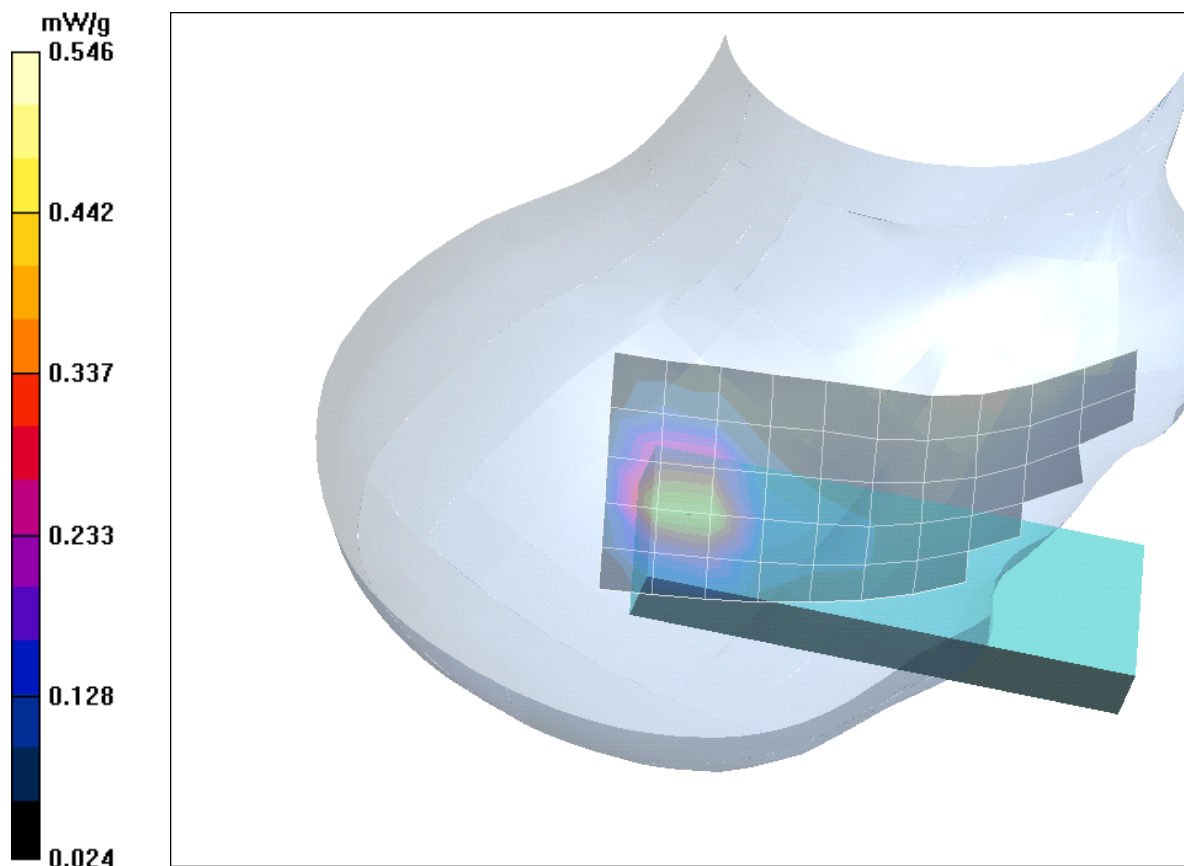


Fig. 8: SAR distribution for PCS 1900, channel 661, tilted position, right side of head (04.15.2005; Ambient Temperature: 22.1 °C; Liquid Temperature : 21.3° C)

3 SAR Distribution Plots, PCS 1900 head worst case with Bluetooth

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [696yprm_2 Headset.da4](#)

DUT: Siemens; Type: Cx75 ; Serial: 004400009966696

Program Name: Tilted Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(8.19, 8.19, 8.19); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Right/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.769 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.1 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.781 mW/g; SAR(10 g) = 0.449 mW/g

Maximum value of SAR (measured) = 0.831 mW/g

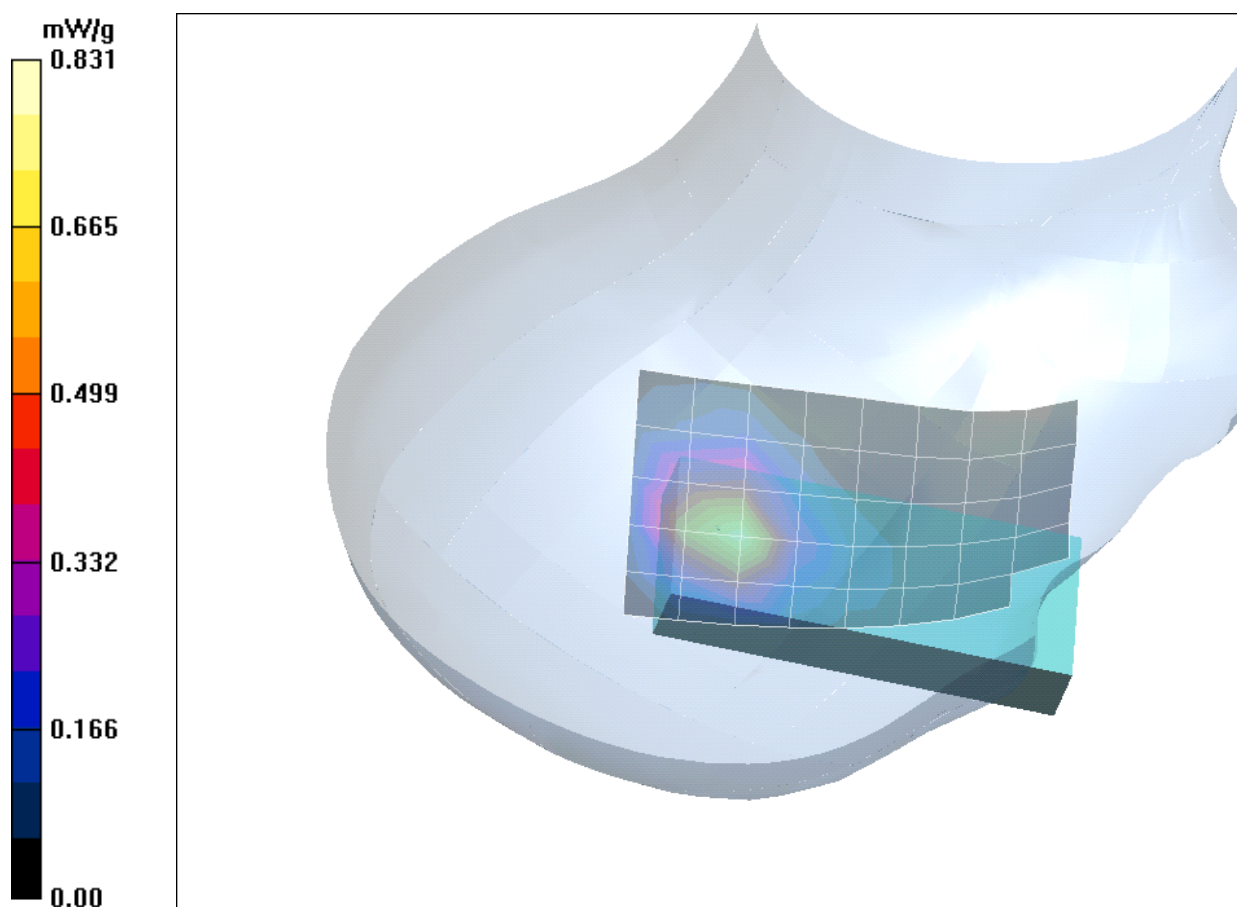


Fig. 9: SAR distribution for PCS 1900, channel 661, tilted position, right side of head (04.15.2005; Ambient Temperature: 22.1 °C; Liquid Temperature : 21.3° C)

4 SAR Distribution Plots, PCS 1900 Body worn (gap = 22 mm)

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [696yphm_1.da4](#)

DUT: Siemens; Type: Cx75 ; Serial: 004400009966696

Program Name: Body Worn

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(7.54, 7.54, 7.54); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Body Worn/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.197 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.41 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.109 mW/g

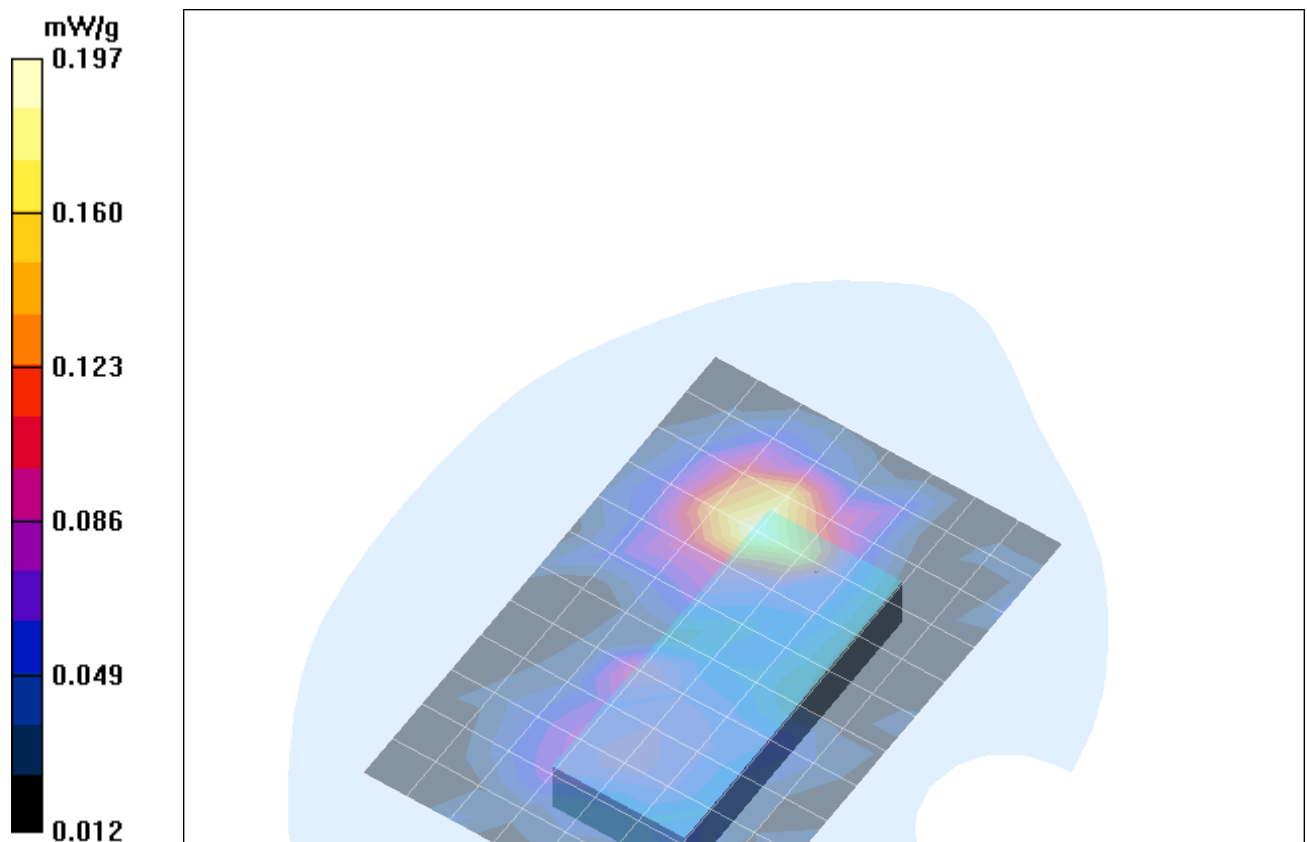


Fig. 10: SAR distribution for PCS 1900, channel 661, antenna towards the phantom, GSM with headset, (04.15.2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.3° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [696yphm_4_wdh.da4](#)

DUT: Siemens; **Type:** Cx75 ; **Serial:** 004400009966696

Program Name: Body Worn

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(7.54, 7.54, 7.54); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.254 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.62 V/m; Power Drift = 0.064 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.093 mW/g

Maximum value of SAR (measured) = 0.226 mW/g

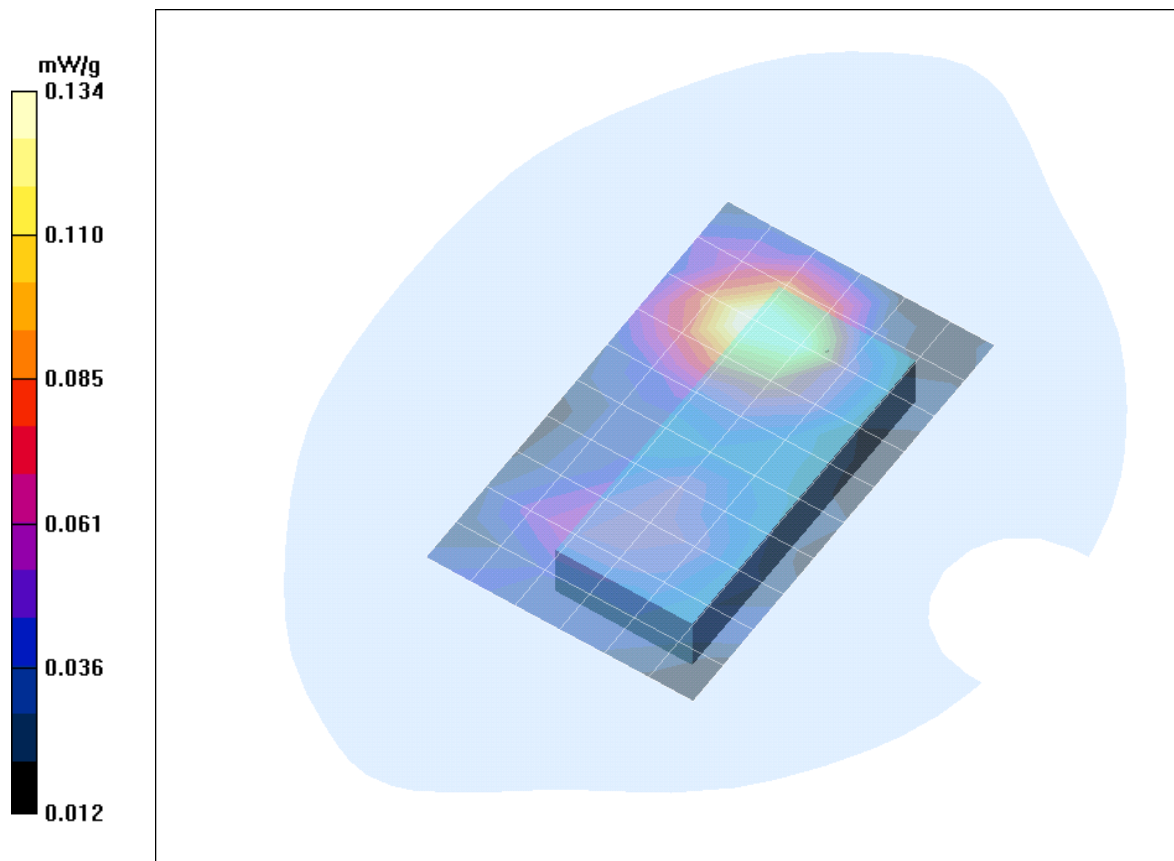


Fig. 11: SAR distribution for PCS 1900, channel 661, antenna towards the phantom, GSM, (04.15.2005; Ambient Temperature: 22.2° C; Liquid Temperature: 21.3° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [696yphm_4.da4](#)

DUT: Siemens; **Type:** Cx75 ; **Serial:** 004400009966696

Program Name: Body Worn

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(7.54, 7.54, 7.54); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.175 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.19 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 0.394 W/kg

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.107 mW/g

Maximum value of SAR (measured) = 0.204 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.19 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.134 mW/g

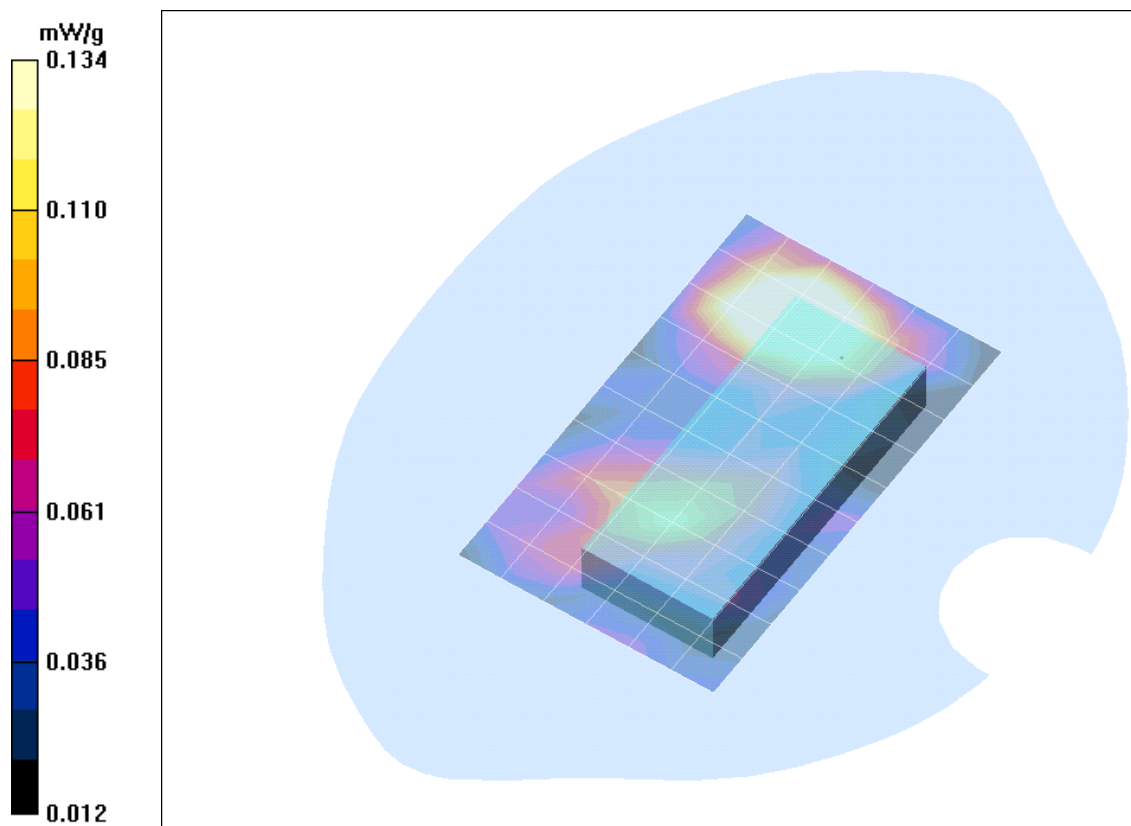


Fig. 12: SAR distribution for PCS 1900, channel 661, antenna towards the phantom, GSM with activated Bluetooth, (04.15.2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.3° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [696yphm_2.da4](#)

DUT: Siemens; **Type:** Cx75 ; **Serial:** 004400009966696, **Program Name:** Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(7.54, 7.54, 7.54); Calibrated: 27.08.2004

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn631; Calibrated: 23.07.2004

- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146 **Body Worn/Area Scan**

(7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.296 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.63 V/m; Power Drift = -0.177 dB

Peak SAR (extrapolated) = 0.498 W/kg

SAR(1 g) = 0.293 mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 0.321 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.63 V/m; Power Drift = -0.177 dB

Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.233 mW/g

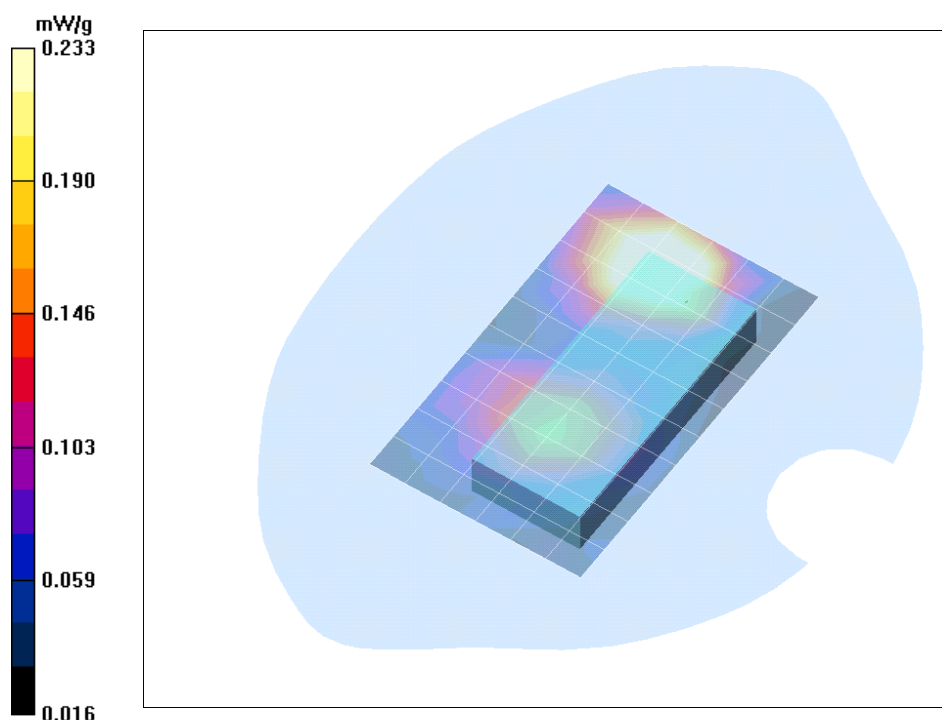


Fig. 13: SAR distribution for PCS 1900, channel 661, antenna towards the phantom, GPRS Class 10, (04.15.2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.3° C).

5 SAR Distribution Plots, PCS 1900 Body worn, PTT (gap = 25 mm)

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [696yphm_5.da4](#)

DUT: Siemens; Type: Cx75 ; Serial: 004400009966696

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(7.54, 7.54, 7.54); Calibrated: 27.08.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.197 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.18 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 0.377 W/kg

SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.221 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.18 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.136 mW/g; SAR(10 g) = 0.062 mW/g

Maximum value of SAR (measured) = 0.180 mW/g

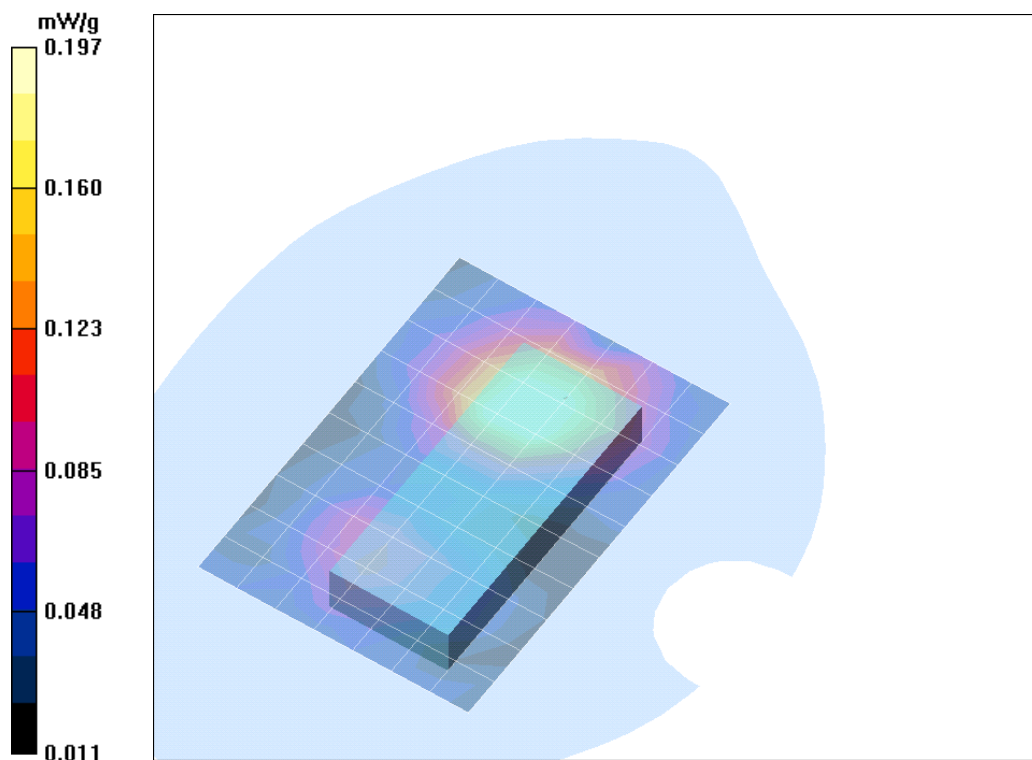


Fig. 14: SAR distribution for PCS 1900, channel 661, display towards the phantom, GPRS Class 10 (04.15.2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.2° C).

6 SAR z-axis scans (Validation)

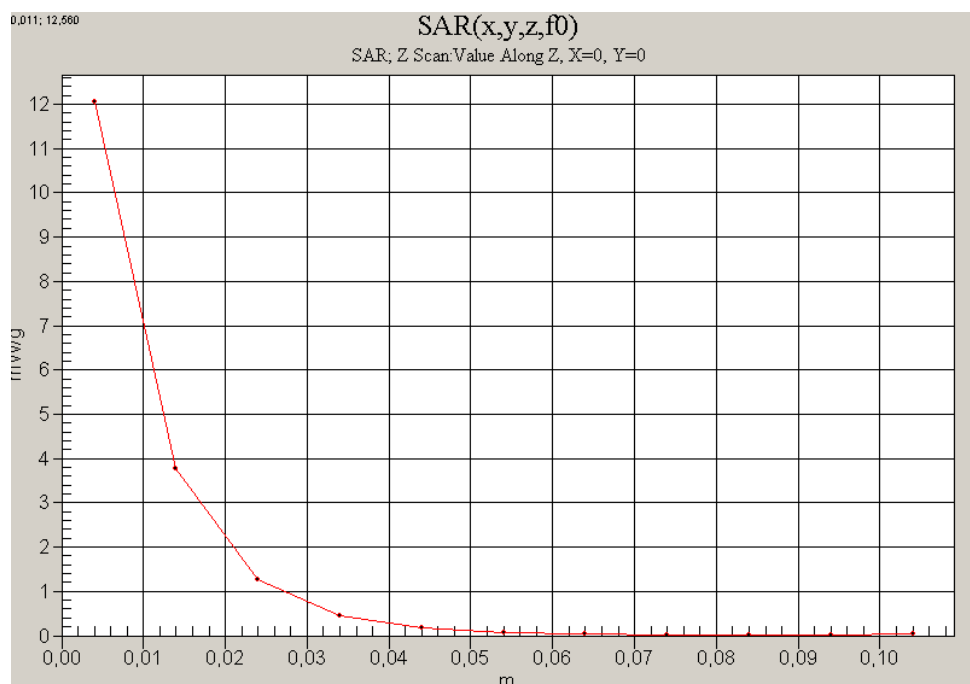


Fig. 15: SAR versus liquid depth, 1900 MHz, head (04.15.2005; Ambient Temperature: 22.4° C; Liquid Temperature : 21.2° C).

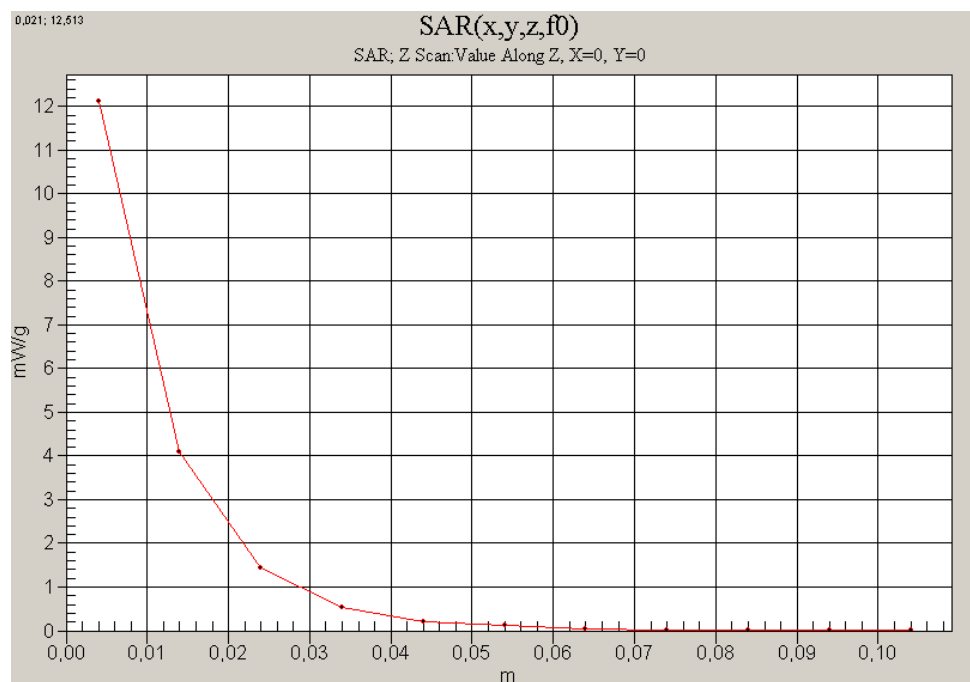


Fig. 16: SAR versus liquid depth, 1900 MHz, body (04.19.2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.0° C).

7 SAR z-axis scans (Measurements)

The following pictures show the plots of SAR versus liquid depth for the worst case values.

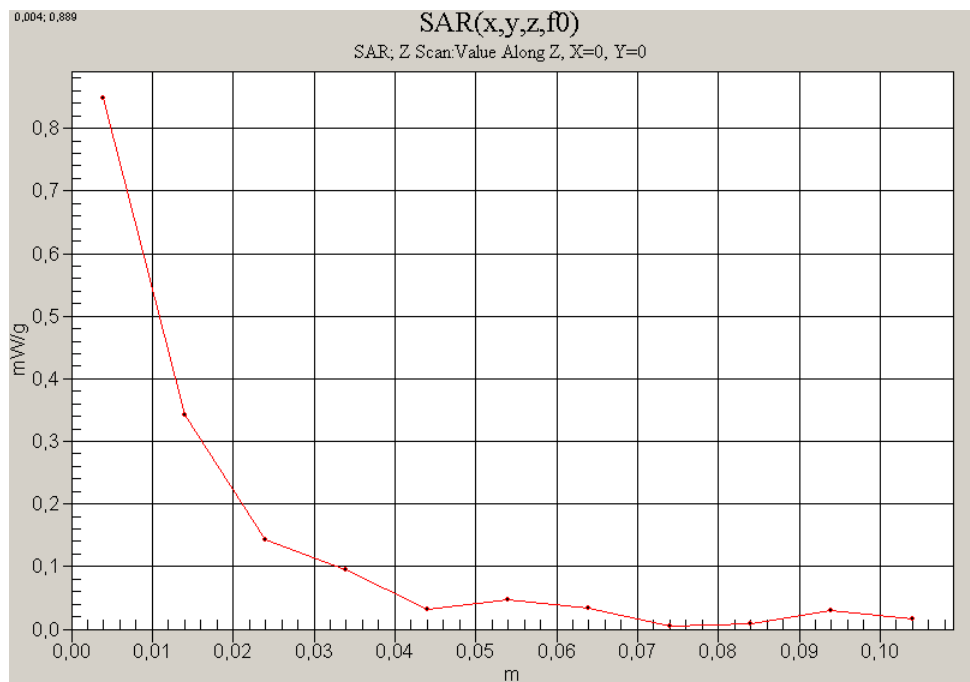


Fig. 17: SAR versus liquid depth, head: PCS 1900, channel 661, tilted position, right side of head without flash, with headset (04.15.2005, Ambient Temperature: 22.1° C; Liquid Temperature : 21.3° C).

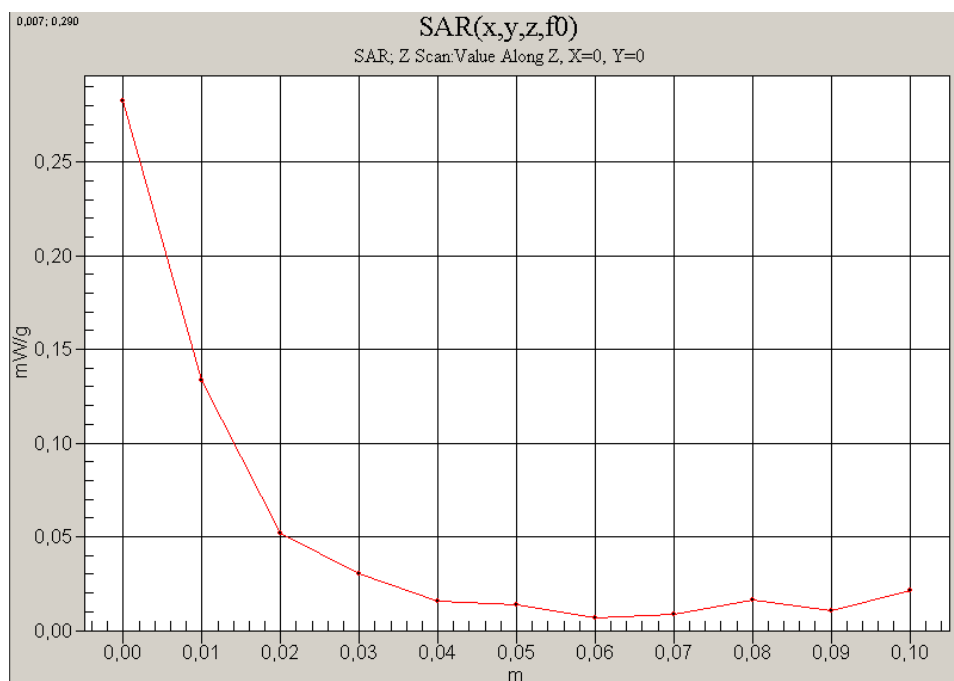


Fig. 18: SAR versus liquid depth, body: PCS 1900, channel 661, antenna towards the phantom, GPRS Class 10, (04.19.2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.3° C).