


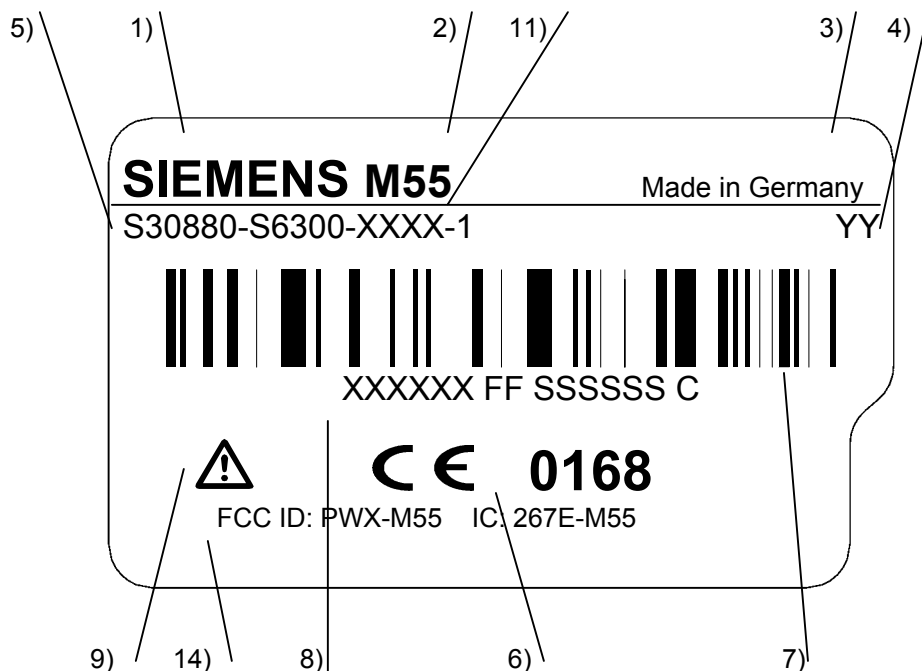

XXXXXX	Typ-Approval Code TAC	10)
FF	Final-Assembly Code FAC	10)
SSSSSS	Current serial number (6 digits), Assigned by PICS10)	
C	CHECK DIGIT 15. digit	
	space between TAC, FAC, serial no. and 15.digit	

Ink ribbon:	TTR-Band Ricoh 110-C
Font:	Title blocks concentric
1) Corporate logo:	1.5 SN 66324
2) Product name:	Internal font D, size 4
3) Made xx Xxxxxxx	Bitmap
4) Code of date:	Internal font D, size 4
	e.g. F3 — March
	└─1995
5) Code number:	Internal font D, size 4
6) CE- identification:	Height: 5 mm
	according to BABT-Document 556 26/93
7) Barcode IMEI-No.:	Code: 128 Size: 2 Ratio: 3.0 Height: 3 mm
	Typ 128, table C and B
	<u>Characteristic:</u> IMEI-No. has 15 digits
	Digit 1-14 is generated as Barcode with table C .
	Digit 15 is printed with table B .
8) IMEI-No. (plain writing):	Internal font D, size 4, space between TAC, FAC, serial no. and 15.digit
9) Triangle:	Height: 4 mm
10) Document for IMEI-No. allocation:	DIS xxxxx BOM 000 xx
	Valid is the highest level in the system
11) Code number:	Corresponding to the number of the transceiver unit part list
14) Canada IC and US FCC	font: B3

				Date 13.02.2003	Approval label Standard IMEI-Label/M55	
				Name Buttermann		
				UC RD ED KLF		
1		13.02.03	Bu	SIEMENS AG	LETTERING PLAN	
Version		Date	Token		DIS 26669	Page 1
						From 1