




- 10) XXXXXXX Typ-Approval Code TAC
 10) SSSSSS Current serial number (6 digits), Assigned by PICS
 10) C CHECK DIGIT 15. digit
 space between TAC, serial no. and 15.digit

- Ink ribbon: TTR-Band Ricoh 110-C
- Font: Title blocks concentric
- 1) Corporate logo: 1.5 SN 66324
- 2) Product name: Internal font D, size 4
- 3) Made xx XXXXXXX: Internal font B, size 3 / Depending on production location
- 4) Code of date: Internal font D, size 4
 e.g. F3 — March
 —1995
- 5) Code number: Internal font D, size 4
- 7) Barcode IMEI-No.: Corresponding to the number of the transceiver unit part list
 Code: 128 Size: 2 Ratio: 3.0 Height: 3 mm
 Typ 128, table **C** and **B**
Characteristic: IMEI-No. has 15 digits
 Digit 1-14 is generated as Barcode with table **C**.
 Digit 15 is printed with table **B**.
- 8) IMEI-No. (plain writing): Internal font D, size 4, space between TAC, serial no. and 15.digit
- 10) Document for IMEI-No. allocation: DIS 33995 BOM 000 xx
 Valid is the highest level in the system
- 14) Canada IC and US FCC: Internal font B, size 3

				Date	03.03.2003	Approval label Standard IMEI-Label/M56	
				Name	Pieper		
2		17.06.03	Pie	UC RD ED KLF			
1		03.03.03	Pie			LETTERING PLAN	
Version		Date	Token			SIEMENS AG	DIS 33927
							From 1

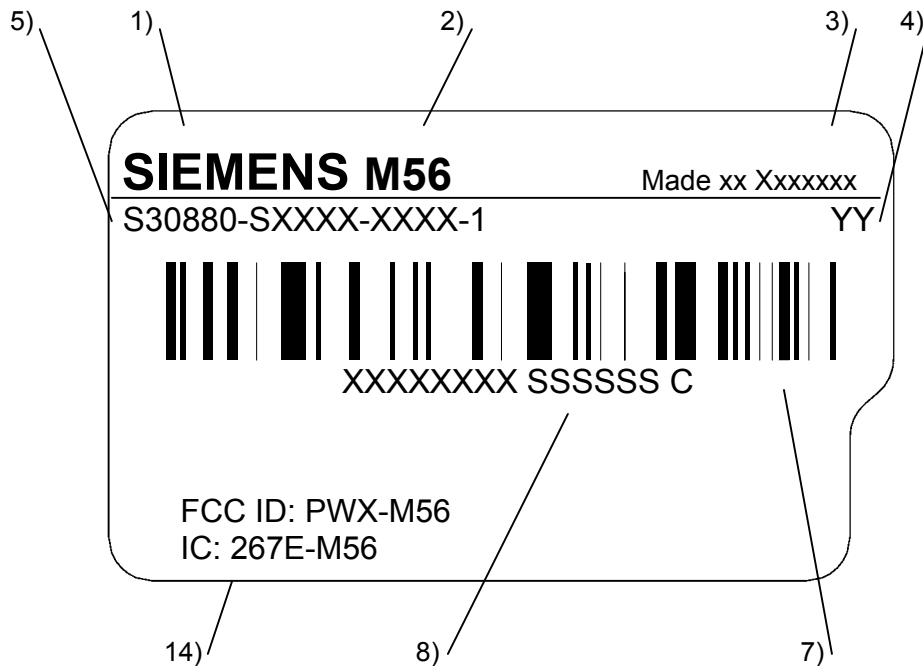

M56 Open battery cover