


## White label with black lettering

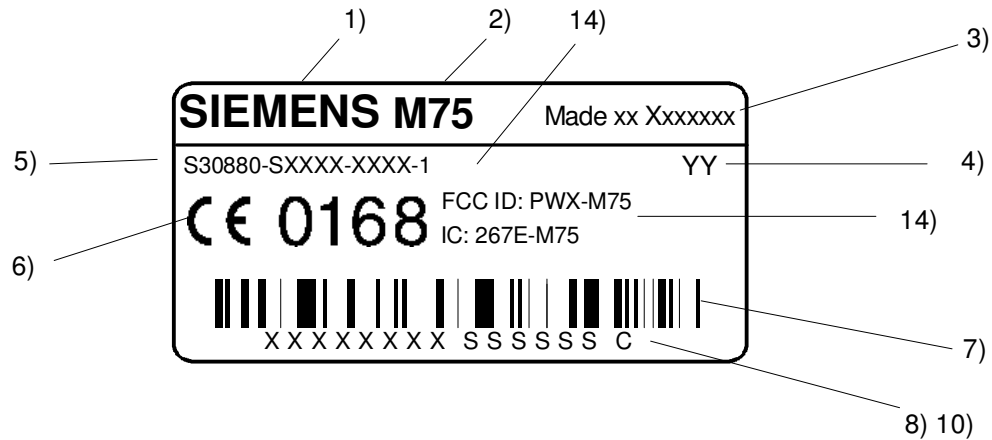

- 10) XXXXXXXX Typ-Approval Code TAC  
 10) SSSSSS Current serial number (6 digits), Assigned by PICS  
 10) C CHECK DIGIT 15. digit  
 space between TAC, serial no. and 15.digit

Ink ribbon:

TTR-Band Ricoh 110-C

Font:

Title blocks concentric

- 1) Corporate logo:
- 2) Product name:
- 3) Made xx Xxxxxxx
- 4) Code of date:

1.5 SN 66324  
 Internal font D, size 4  
 Internal font B, size 3 / Depending on production location  
 Internal font D, size 4  
 e.g. F3 — March  
 — 1995

- 5) Code number:
- 6) CE-identification:
- 7) Barcode IMEI-No.:

Internal font D, size 4  
 Corresponding to the number of the transceiver unit part list  
 Height: 5 mm  
 according to BABT-Document 556 26/93  
 Code: 128 Size: 2 Ratio: 3.0 Height: 3 mm  
 Typ 128, table **C** and **B**  
Characteristic: IMEI-No. has 15 digits  
 Digit 1-14 is generated as Barcode with table **C**.  
 Digit 15 is printed with table **B**.

- 8) IMEI-No. (plain writing):

Internal font D, size 4, space between TAC, serial no. and 15.digit

- 10) Document for IMEI-No. allocation:

DIS 70344 BOM 000 xx  
 Valid is the highest level in the system

- 14) Canada IC and US FCC:

Internal font B, size 3

|             |                   |            |       |            |
|-------------|-------------------|------------|-------|------------|
| Department: | COM MD PD HW1 Ulm | M 75       | Date: | 02.05.2005 |
| Author:     | Brunel            | IMEI label | Page: | 1/2        |

