

TEST REPORT

Application No.: GZCR2604000824AT

Applicant: Comba Telecom Network Systems Limited

Address of Applicant: Flat/Rm 10, 3/F, Bio-Informatics Ctr, 2 Science Park West Avenue, HK Science Park, Pak Shek Kok, N.T. Hong Kong

Manufacturer: Comba Telecom Technology (Guangzhou) Ltd.

Address of Manufacturer: No. 6 Jinbi Road, Economics and Technology Development District, Guangzhou, Guangdong, China

Factory: Comba Telecom Technology (Guangzhou) Ltd.

Address of Factory: No. 6 Jinbi Road, Economics and Technology Development District, Guangzhou, Guangdong, China

Product Name: Beam Donor Antenna - 1900/2100
Beam Active Remote Unit - 1900/2100

Model No.: Beam-Donor, Beam-ARU

FCC ID: PX8BEAM-DONOR for Beam-Donor
PX8BEAM-ARU for Beam-ARU

Trade Mark: Comba

Standard(s) : 47 CFR Part 2
47 CFR Part 20
47 CFR Part 24
47 CFR Part 27

Date of Receipt: 2026-04-29

Date of Test: 2026-05-11 to 2026-06-03

Date of Issue: 2026-07-07

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Revision Record			
Version	Report No.	Date	Remark
01	GZCR260400082402	2026-07-07	Original

Authorized for issue by:			
		Kevin Zhang	
		Kevin Zhang/Project Engineer	
Approved By		Vico Cui	
		Vico Cui/Reviewer	



2 Test Summary

Item (FCC Rule 47 CFR)	Item & Method (KDB 935210 D04 v02r04 Subclause)	Result
20.21(e)(3) Frequency Bands	7.1.1 Authorized frequency band verification	PASS
	7.1.2 Authorized CMRS provider test	PASS
20.21(e)(9)(i)(D) Power Limits 20.21(e)(9)(i)(B) Bidirectional Capability	7.2 Maximum power	PASS
20.21(e)(9)(i)(C)(2) Booster Gain Limits 20.21(e)(9)(i)(B) Bidirectional Capability	7.3 Maximum booster gain computation	PASS
20.21(e)(9)(i)(G) Intermodulation Limits	7.4 Intermodulation product	PASS
20.21(e)(9)(i)(F) Out of Band Emission Limits	7.5 Out-of-band emissions	PASS
2.1051 Spurious emissions at antenna terminals	7.6 Conducted spurious emissions	PASS
20.21(e)(9)(i)(A) Noise Limits 20.21(e)(9)(i)(I) Transmit Power Off Mode	7.7 Noise	PASS
20.21(e)(9)(i)(J) Uplink Inactivity	7.8 Uplink inactivity	PASS
20.21(e)(9)(i)(C)(1) Booster Gain Limits 20.21(e)(9)(i)(I) Transmit Power Off Mode	7.9 Variable booster gain	PASS
2.1049 Occupied bandwidth	7.10 Occupied bandwidth	PASS
20.21(e)(9)(ii)(A) Anti-Oscillation 20.21(e)(5) Anti-Oscillation	7.11 Oscillation detection	PASS
2.1053 Field strength of spurious radiation	7.13 Radiated spurious emissions (below 1GHz)	PASS
2.1053 Field strength of spurious radiation	7.13 Radiated spurious emissions (above 1GHz)	PASS
20.21(e)(9)(i)(B) Bidirectional Capability 20.21(e)(3) Frequency Band	7.14 Spectrum block filtering	N/A



Item (FCC Rule 47 CFR)	Item & Method (KDB 935210 D04 v02r04 Subclause)	Result
20.21(e)(9)(i)(E) Out of Band Gain Limits	7.15 Out of band gain	PASS
2.1055 Frequency stability	7.16 Frequency stability	PASS
20.21(e)(4) Self-monitoring	1	PASS
20.21(e)(9)(i)(H) Booster Antenna Kitting	2	PASS
20.21(e)(9)(i)(I) Transmit Power Off Mode	3	PASS
20.21(e)(9)(ii)(B) Gain Control	4	PASS
20.21(e)(9)(ii)(C) Interference Avoidance for Wireless Subsystems	5	PASS

Note:

E.U.T./ EUT means Equipment Under Test

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

N/A, Not Applicable. Per section 7.14(b) and 7.14 (c) of KDB935210 D04, the EUT is compliant with the uplink transmitted noise power level and uplink variable gain test cases, respectively.

¹ There is no specific test for this functionality but it is instead indirectly addressed by the noise and gain limits tests.

² Generic testing requirements are not established; rather technical documentation is used describing all antennas, cables, and/or coupling devices that may be used with a consumer booster and how those meet the requirements.

³ There is no specific test for this functionality but it is instead addressed through a combination of the variable noise, variable gain, and oscillation detection tests.

⁴ Conformance to the requirement to include AGC circuitry is verified in 7.1 and 7.2.

⁵ 20.21(e)(9)(ii)(C) Consumer boosters using unlicensed (part 15) or other frequency bands for wireless transmissions between donor and server subsystems for its internal operations must employ interference avoidance methods to prevent interference transmitted into authorized CMRS spectrum bands. Before testing please submit a proposed test plan in a KDB inquiry for FCC review and acceptance. This device without any unlicensed (part 15) or other frequency bands for wireless transmissions function, PAG is not required.



The EUT is an in-building distributed antenna solution (DAS) for provider-specific consumer application, Which consists of three separate units: the host Unit (Beam Donor Antenna, model No.: Beam-Donor), the Expansion Unit (Beam Master Unit, model No.: Beam-MU) and the Active Remote Unit (Beam Active Remote Unit, model No.: Beam-ARU).

Beam-Donor receives signals from the base station and transmits the signals to Beam-ARU through Beam-MU. Beam-ARU then radiates the received signals via the server antenna to cover local service areas.

Beam-ARU receives signals emitted by mobile terminals and transmits the signals to Beam-Donor through Beam-MU. Beam-Donor then radiates the received signals via the donor antenna to the base station.

Beam-MU acts as a dedicated relay unit of the DAS system. It serves as an intermediate link to connect Beam-Donor and Beam-ARU via coaxial cable, and subject to Verification, no FCC ID.

Beam-Donor integrates a 6-element array antenna to realize independent directional reception and independent beamforming transmission for multiple operators. Beam-ARU has a single antenna port for connecting an external dedicated antenna of the manufacturer-specified model.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3 Contents

	Page
1 Covers Page	1
2 Test Summary	3
3 Contents	6
4 General Information	8
4.1 Details of EUT	8
4.2 Description of Support Units	9
4.3 Test Environment	9
4.4 Measurement Uncertainty	9
4.5 Test Location	10
4.6 Test Facility	10
4.7 Deviation from Standards	10
4.8 Abnormalities from Standard Conditions	10
5 Equipment List	11
6 Radio Spectrum Matter Test Results	13
6.1 Authorized frequency band verification	13
6.1.1 E.U.T. Operation	13
6.1.2 Test Setup	13
6.1.3 Measurement Record	13
6.2 Authorized CMRS provider test	14
6.2.1 E.U.T. Operation	14
6.2.2 Test Setup	14
6.2.3 Measurement Record	14
6.3 Maximum power	15
6.3.1 E.U.T. Operation	15
6.3.2 Test Setup	15
6.3.3 Measurement Record	15
6.4 Maximum booster gain computation	16
6.4.1 E.U.T. Operation	16
6.4.2 Test Setup	16
6.4.3 Measurement Record	16
6.5 Intermodulation product	17
6.5.1 E.U.T. Operation	17
6.5.2 Test Setup	17
6.5.3 Measurement Record	17
6.6 Out-of-band emissions	18
6.6.1 E.U.T. Operation	18
6.6.2 Test Setup	18
6.6.3 Measurement Record	18
6.7 Conducted spurious emissions	19
6.7.1 E.U.T. Operation	19
6.7.2 Test Setup	19



6.7.3	Measurement Record	19
6.8	Noise	20
6.8.1	E.U.T. Operation	20
6.8.2	Test Setup	21
6.8.3	Measurement Record	21
6.9	Uplink inactivity	22
6.9.1	E.U.T. Operation	22
6.9.2	Test Setup	22
6.9.3	Measurement Record	22
6.10	Variable booster gain	23
6.10.1	E.U.T. Operation	23
6.10.2	Test Setup	23
6.10.3	Measurement Record	23
6.11	Occupied bandwidth	24
6.11.1	E.U.T. Operation	24
6.11.2	Test Setup	24
6.11.3	Measurement Record	24
6.12	Oscillation detection	25
6.12.1	E.U.T. Operation	25
6.12.2	Test Setup	25
6.12.3	Measurement Record	26
6.13	Radiated Spurious emission (below 1GHz)	27
6.13.1	E.U.T. Operation	27
6.13.2	Test Setup	27
6.13.3	Test procedure	28
6.13.4	Measurement Record	28
6.14	Radiated Spurious emission (above 1GHz)	29
6.14.1	E.U.T. Operation	29
6.14.2	Test Setup	29
6.14.3	Test procedure	30
6.14.4	Measurement Record	30
6.15	Out of band gain	31
6.15.1	E.U.T. Operation	31
6.15.2	Test Setup	31
6.15.3	Measurement Record	31
6.16	Frequency Stability	32
6.16.1	E.U.T. Operation	32
6.16.2	Test Setup	32
6.16.3	Measurement Record	32
7	Test Setup Photographs	33
8	EUT Constructional Details (EUT Photos)	34



4 General Information

4.1 Details of EUT

Power Supply:	Beam-MU: AC 100-240V, 50/60Hz Beam-Donor: DC 48V @ PoE from Beam-MU Beam-ARU: DC 48V @ PoE from Beam-MU	
Test Voltage:	AC 120V 60Hz	
Cable:	AC mains (4m, unshielded) for Beam-Donor	
Operating Temperature:	-40 to +55 °C	
Operating Humidity:	≤85%	
Frequency Range:	AWS-1:	Uplink: 1710-1755MHz Downlink: 2110-2155MHz
	Broadband PCS:	Uplink: 1850-1915MHz Downlink: 1930-1995MHz
Interface:	Antenna Port:	1 (N-F)
	Debug Port	1 (RJ45)
Minimum Bandwidth:	5MHz	
Normal Output Power:	Uplink	17dBm
	Downlink	10dBm per channel
Normal System Gain:	Uplink	80dB
	Downlink	80dB
Radio System Type:	LTE	
Antenna Type:	Server antenna	External dedicated antenna
	Donor antenna	Integrated antenna
Antenna Gain with cable loss :	Server antenna	0dBi declared by the manufacturer
	Donor antenna	7dBi declared by the manufacturer
Software Version:	Beam-Donor: DASMU00.02.05 Beam-ARU:DASARU00.01.01 Beam-MU: DASHUB00.01.03	
Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.		



4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	Lenovo Xiaoxinchao 5000	PF0TNMG8
Mathced, attenuator, splitter, coupler and combiner	/	/	/

4.3 Test Environment

Environment Parameter	Selected Values During Test	
Ralative Humidity	Ambient	
Value	Temperature (°C)	Voltage (V)
TNVN	Asmbient	AC 120 V 60 Hz
TLVL	-30	AC 102 V 60 Hz
TLVH	-30	AC 138 V 60 Hz
THVL	+50	AC 102 V 60 Hz
THVH	+50	AC 138 V 60 Hz

VN: Normal Voltage, TN: Normal Teperature

VL: Lower Extreme Voltege, VH: Higher Extreme Voltage

TL: Lower Extreme Teperature, TH: Higher Extreme Teperature

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	RF Output Power	±0.75dB
2	Transmitter unwanted emissions	±0.75dB
3	Radiated Spurious Emissions Below 1GHz	±5.06dB (30MHz-1GHz; 3m); ±4.46dB (30MHz-1GHz; 10m);
4	Radiated Spurious Emissions Above 1GHz	±5.08dB (1GHz-6GHz); ±5.14dB (6GHz-18GHz)
5	Occupied Channel Bandwidth	± 0.274%
6	Frequency Stability	± 7.25×10 ⁻⁸

Remark:

The U_{lab} (lab Uncertainty) is less than U_{CISPR} (CISPR Uncertainty) or U_{ETSI} (ETSI Uncertainty).

Emission decision rule:

– Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit, marked as Pass in the report.



– Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit, marked as Fail in the report.



4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou,
Guangdong, China 510663

Tel: +86 20 82155555

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● ACMA

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

● SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

● FCC Recognized Accredited Test Firm(Registration No.: 486818)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

● ISED (Registration No.: 4620B, CAB identifier: CN0052)

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

● VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

● CBTL (Lab Code: TL129)

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None



5 Equipment List

Radiated Spurious Emissions Below 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2025-08-13	2028-08-12
Amplifier (9kHz-1.3GHz)	HP	8447F	EMC2065	2025-11-25	2026-11-24
EMI Test Receiver (9kHz-7GHz)	Rohde & Schwarz	ESR7	EMC2220	2025-11-18	2026-11-17
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Trilog Broadband Antenna (25MHz-2GHz)	Schwarzbeck Mess-Elektronik	VULB 9168	EMC2174	2025-04-21	2027-04-20
Coaxial Cable	Mirco-COAX UTIFLEX ve	LA2-C125-8000	EMC2239	2024-12-04	2026-12-03
Trilog Broadband Antenna (25MHz-1GHz)	SCHWARZBECK	VULB 9160	EMC2025	2025-05-12	2027-05-11
Active Loop Antenna-RED	ETS-Lindgren	6502	EMC2190	2026-03-28	2028-03-27

Radiated Spurious Emissions Above 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2025-08-11	2026-08-10
Chamber cable (Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2024-08-19	2026-08-18
Horn Antenna (1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2025-05-13	2027-05-12
Horn Antenna (14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2023-06-18	2026-06-17
EXA Signal Analyzer (10Hz-44GHz)	Keysight	N9010A	EMC2138	2025-08-12	2026-08-11
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2023-12-20	2026-12-19
Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	EMC2172	2025-08-12	2026-08-11
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A



RF Conducted Test

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Temperature Chamber	GZ GongWen Co.Ltd.	GDJW-100	EMC0039	2025-11-19	2026-11-18
MI CABLE	SGS-EMC	0.8M	EMC2136	2025-11-02	2026-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2025-11-02	2026-11-01
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2222	2025-11-25	2026-11-24
MXA Signal Analyzer (10Hz-50GHz)	KEYSIGHT	N9020B	SEM004-24	2026-02-03	2027-02-02
Spectrum Analyzer(9kHz-30GHz)	Rohde & Schwarz	FSU43	SEM004-08	2026-02-04	2027-02-03
ESG vector signal generator (250kHz-6GHz)	Agilent Technologies	E4438C	SEM006-03	2025-11-25	2026-11-24
4X4 Power sensor Unit	TST	TSPS2023R	EMC2257	2025-08-12	2026-08-11
Test Software	TST	V2.0	GZE100-82	N/A	N/A

General used equipment

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2026-05-14	2027-05-13



6 Radio Spectrum Matter Test Results

6.1 Authorized frequency band verification

Test Requirement: 47 CFR Part 20.21(e)(3), KDB 935210 D04 clause 7.1.1

Test Method: KDB 935210 D04 clause 7.1.1

Limit: *20.21(e)(3) Frequency Bands:*
Consumer Signal Boosters must be designed and manufactured such that they only operate on the frequencies used for the provision of subscriber-based services under parts 22 (Cellular), 24 (Broadband PCS), 27 (AWS-1, 700 MHz Lower A-E Blocks, and 700 MHz Upper C Block), and 90 (Specialized Mobile Radio).
KDB 935210 D04 clause 7.1.1:
This test is intended to confirm that the signal booster only operates on the CMRS frequency bands authorized for use by the NPS. In addition, this test will identify the frequency at which the maximum gain is realized with each CMRS operational band, which then serves as a basis for subsequent tests.

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1015 mbar

EUT Operation: Set the EUT to maximum gain and drive to maximum output power.

6.1.2 Test Setup

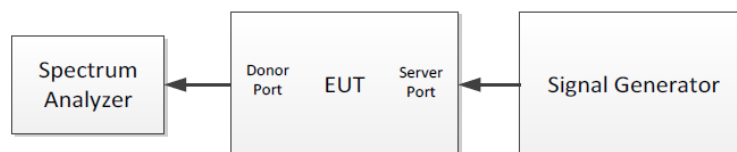


Figure 2 – Uplink test configuration in EUT test mode

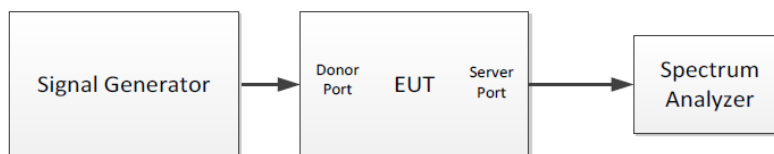


Figure 3 – Downlink test configuration in EUT test mode

6.1.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



6.2 Authorized CMRS provider test

Test Requirement: 47 CFR Part 20.21(e)(3), KDB 935210 D04 clause 7.1.2

Test Method: KDB 935210 D04 clause 7.1.2

Limit: 20.21(e)(3) Frequency Bands:

Consumer Signal Boosters must be designed and manufactured such that they only operate on the frequencies used for the provision of subscriber-based services under parts 22 (Cellular), 24 (Broadband PCS), 27 (AWS-1, 700 MHz Lower A-E Blocks, and 700 MHz Upper C Block), and 90 (Specialized Mobile Radio).

KDB 935210 D04 clause 7.1.2:

This test shall be used to ensure the booster restricts its operation only to the spectrum assigned to the CMRS provider supporting the equipment certification request.

6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1015 mbar

EUT Operation: Set the EUT to maximum gain and drive to maximum output power.

6.2.2 Test Setup

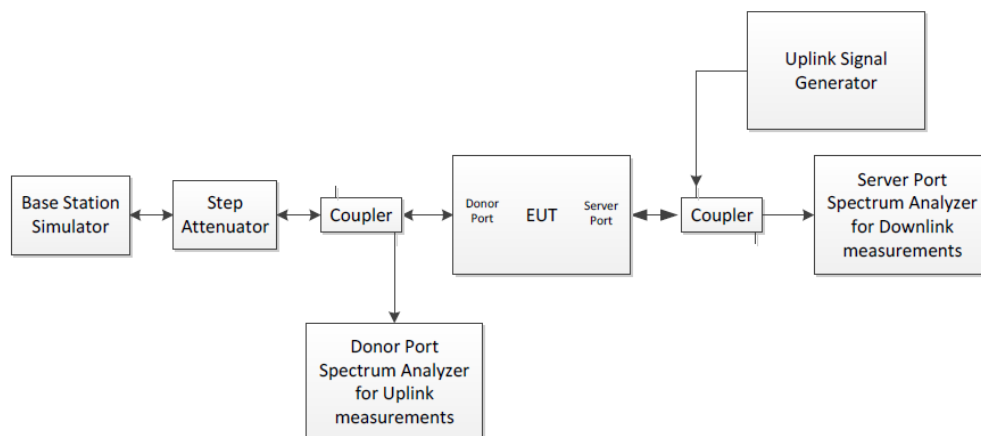


Figure 1 – Test configuration in EUT normal operational mode

6.2.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



6.3 Maximum power

Test Requirement: 47 CFR Part 20.21(e)(9)(i)(D), 20.21(e)(9)(i)(B)

Test Method: KDB 935210 D04 clause 7.2

Limit: *20.21(e)(9)(i)(D) Power Limits:*
A booster's uplink power must not exceed 1 watt composite conducted power and equivalent isotropic radiated power (EIRP) for each band of operation. Downlink power shall not exceed 0.05 watt (17 dBm) composite and 10 dBm per channel conducted and EIRP for each band of operation. Compliance with power limits will use instrumentation calibrated in terms of RMS equivalent voltage.
20.21(e)(9)(i)(B) Bidirectional Capability:
Consumer Boosters must be able to provide equivalent uplink and downlink gain and conducted uplink power output that is at least 0.05 watts.

6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1015 mbar

EUT Operation: Set the EUT to maximum gain and drive to maximum output power.

6.3.2 Test Setup

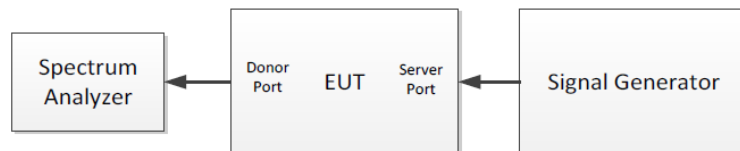


Figure 2 – Uplink test configuration in EUT test mode

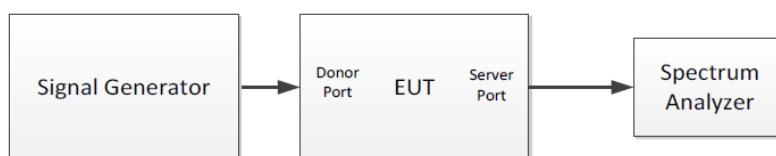


Figure 3 – Downlink test configuration in EUT test mode

6.3.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



6.4 Maximum booster gain computation

Test Requirement: 47 CFR Part 20.21(e)(9)(i)(C)(2), 20.21(e)(9)(i)(B)

Test Method: KDB 935210 D04 clause 7.3

Limit: **20.21(e)(9)(i)(C)(2) Booster Gain Limits:**
The uplink and downlink maximum gain of a Consumer Booster referenced to its input and output ports shall not exceed the following limits:
(i) Fixed Booster maximum gain shall not exceed 19.5 dB + 20 Log10 (Frequency), or 100 dB for systems having automatic gain adjustment based on isolation measurements between booster donor and server antennas.
(ii) Where, Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.
20.21(e)(9)(i)(B) Bidirectional Capability:
Consumer Boosters must be able to provide equivalent uplink and downlink gain and conducted uplink power output that is at least 0.05 watts.

6.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1015 mbar

EUT Operation: Set the EUT to maximum gain and drive to maximum output power.

6.4.2 Test Setup

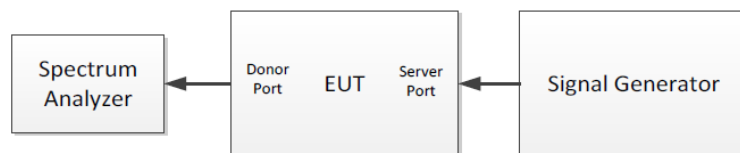


Figure 2 – Uplink test configuration in EUT test mode

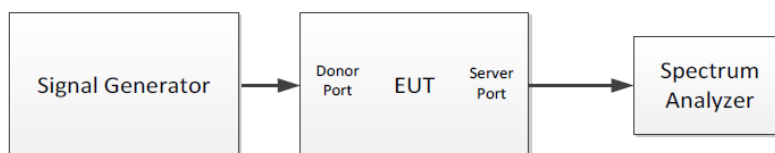


Figure 3 – Downlink test configuration in EUT test mode

6.4.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



6.5 Intermodulation product

Test Requirement: 47 CFR Part 20.21(e)(9)(i)(G)

Test Method: KDB 935210 D04 clause 7.4

Limit: 20.21(e)(9)(i)(G) *Intermodulation Limits:*

The transmitted intermodulation products of a consumer booster at its uplink and downlink ports shall not exceed the power level of -19 dBm for the supported bands of operation. Compliance with intermodulation limits will use boosters operating at maximum gain and maximum rated output power, with two continuous wave (CW) input signals spaced 600 kHz apart and centered in the pass band of the booster, and with a 3 kHz measurement bandwidth.

6.5.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1015 mbar

EUT Operation: Set the EUT to maximum gain and drive to maximum output power.

6.5.2 Test Setup

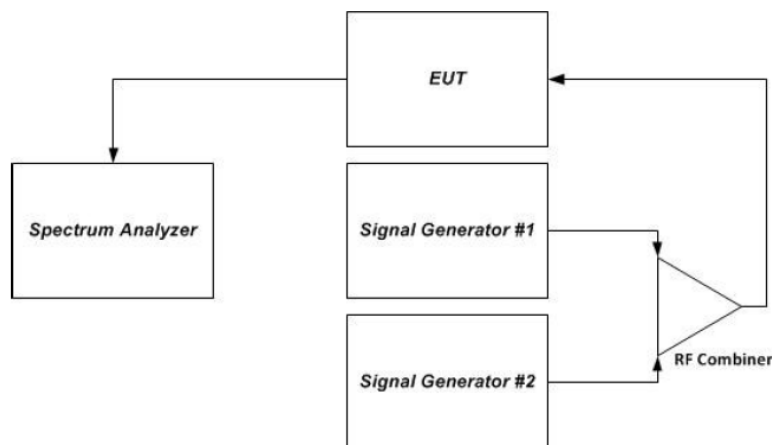


Figure 5 – Intermodulation product instrumentation test setup

6.5.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



6.6 Out-of-band emissions

Test Requirement: 47 CFR Part 20.21(e)(9)(i)(F)

Test Method: KDB 935210 D04 clause 7.5

Limit: *20.21(e)(9)(i)(F) Out of Band Emission Limits:*
 Booster out of band emissions (OOBE) shall meet the FCC's mobile emission limits for the supported bands of operation. Compliance to OOBE limits will utilize high peak-to-average CMRS signal types.
24.238
 The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
27.53(h)
 the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

6.6.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1015 mbar

EUT Operation: Set the EUT to maximum gain and drive to maximum output power.

6.6.2 Test Setup

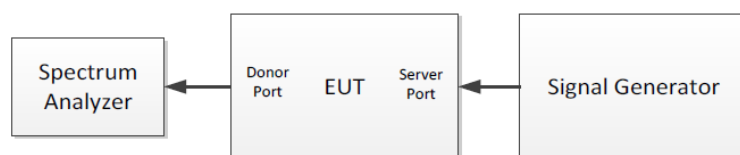


Figure 2 – Uplink test configuration in EUT test mode

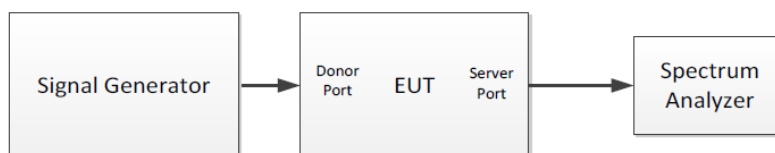


Figure 3 – Downlink test configuration in EUT test mode

6.6.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



6.7 Conducted spurious emissions

Test Requirement: 47 CFR Part 2.1051, 20.21(e)(9)(i)(F)

Test Method: KDB 935210 D04 clause 7.6

Limit: *20.21(e)(9)(i)(F) Out of Band Emission Limits:*
 Booster out of band emissions (OOBE) shall meet the FCC's mobile emission limits for the supported bands of operation. Compliance to OOBE limits will utilize high peak-to-average CMRS signal types.
24.238
 The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
27.53(h)
 the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

6.7.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1015 mbar

EUT Operation: Set the EUT to maximum gain and drive to maximum output power.

6.7.2 Test Setup

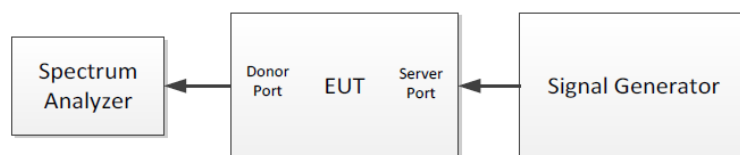


Figure 2 – Uplink test configuration in EUT test mode

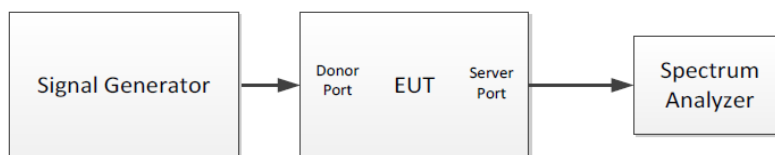


Figure 3 – Downlink test configuration in EUT test mode

6.7.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



6.8 Noise

Test Requirement: 47 CFR Part 20.21(e)(9)(i)(A), 20.21(e)(9)(i)(I)

Test Method: KDB 935210 D04 clause 7.7

Limit:

20.21(e)(9)(i)(A) Noise Limits:

The transmitted noise power in dBm/MHz of frequency selective consumer boosters outside the licensee's spectrum blocks at their uplink and downlink ports shall not exceed the following limits:

(1) -103 dBm/MHz-RSSI

(i) Where RSSI is the downlink composite signal power received in dBm for frequencies in the band of operation outside the licensee's spectrum block as measured after spectrum block filtering is applied and is referenced to the booster's donor port for each band of operation. RSSI is expressed in negative dB units relative to 1 mW.

(ii) Boosters with MSCL less than 40 dB, shall reduce the Noise output in (A) by 40dB-MSCL, where MSCL is the minimum coupling loss in dB between the wireless device and booster's server port. MSCL must be calculated or measured for each band of operation and provided in compliance test reports.

(2)

(i) Fixed booster maximum downlink noise power shall not exceed -102.5 dBm/MHz + 20 Log₁₀ (Frequency), where Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.

(iii) Compliance with Noise limits will use instrumentation calibrated in terms of RMS equivalent voltage, and with booster input ports terminated or without input signals applied within the band of measurement.

20.21(e)(9)(i)(I) Transmit Power Off Mode:

When the consumer booster cannot otherwise meet the noise and gain limits defined herein it must operate in "Transmit Power OFF Mode." In this mode of operation, the uplink and downlink noise power shall not exceed -70 dBm/MHz and uplink gain shall not exceed the lesser of 23 dB or MSCL.

6.8.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1015 mbar

EUT Operation: Set the EUT to maximum gain.



6.8.2 Test Setup

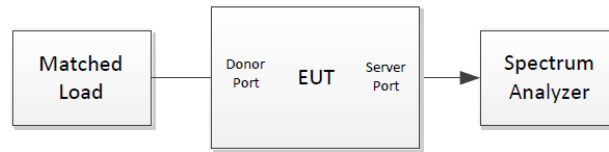


Figure 6 – Maximum downlink noise limit test configuration

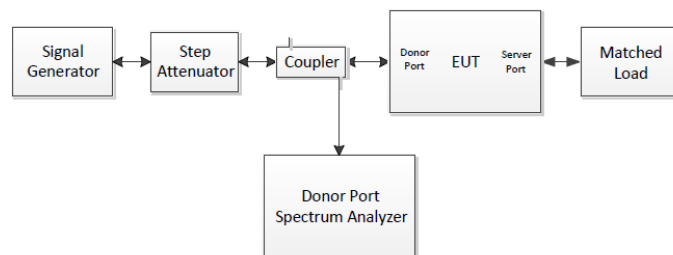


Figure 7 – Uplink RSSI-dependent noise limit test configuration

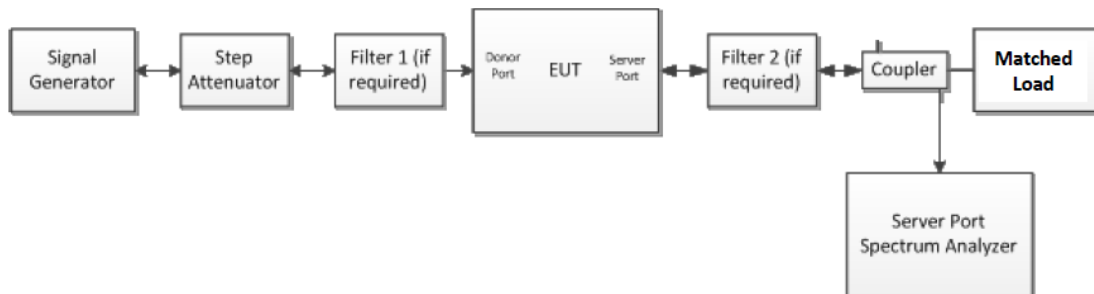


Figure 8 – Downlink RSSI-dependent noise limit test configuration

6.8.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



6.9 Uplink inactivity

Test Requirement: 47 CFR Part 20.21(e)(9)(i)(J)

Test Method: KDB 935210 D04 clause 7.8

Limit: *20.21(e)(9)(i)(C)(2) Uplink inactivity:*
When a consumer booster is not serving an active device connection after 5 seconds the uplink noise power shall not exceed -70 dBm/MHz.

6.9.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1015 mbar

EUT Operation: Set the EUT to maximum gain.

6.9.2 Test Setup

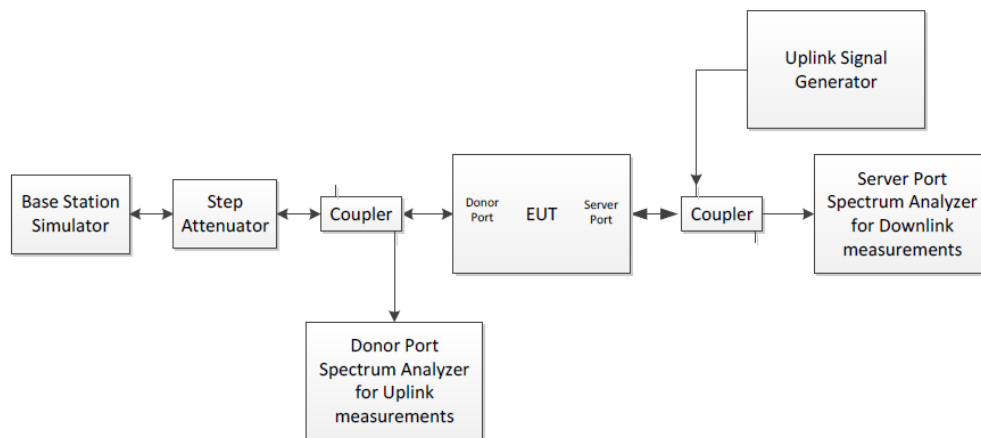


Figure 1 – Test configuration in EUT normal operational mode

6.9.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



6.10 Variable booster gain

Test Requirement: 47 CFR Part 20.21(e)(9)(i)(C)(1), 20.21(e)(9)(i)(I)

Test Method: KDB 935210 D04 clause 7.9

Limit: **20.21(e)(9)(i)(C)(1) Booster Gain Limits:**
The uplink and downlink gain in dB of a frequency selective consumer booster referenced to its input and output ports shall not exceed BSCL-28 dB-(40 dB-MSCL).

20.21(e)(9)(i)(I) Transmit Power Off Mode:
When the consumer booster cannot otherwise meet the noise and gain limits defined herein it must operate in "Transmit Power OFF Mode." In this mode of operation, the uplink and downlink noise power shall not exceed -70 dBm/MHz and uplink gain shall not exceed the lesser of 23 dB or MSCL.

6.10.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1015 mbar

EUT Operation: Set the EUT to maximum gain and drive to maximum output power.

6.10.2 Test Setup

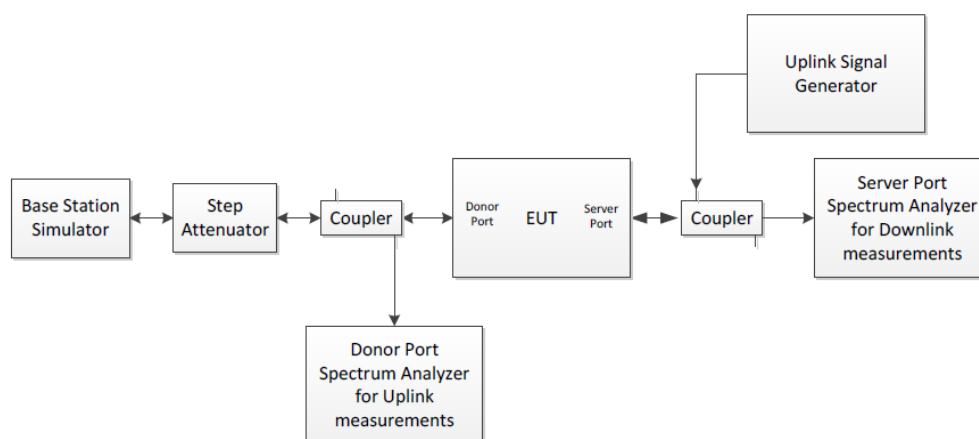


Figure 1 – Test configuration in EUT normal operational mode

6.10.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



6.11 Occupied bandwidth

Test Requirement: 47 CFR Part 2.1049

Test Method: KDB 935210 D04 clause 7.10

Limit: Compare the consistency of the output signal relative to the input signal, and to satisfy the requirements of Section 2.1049.

6.11.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1015 mbar

EUT Operation: Set the EUT to maximum gain and drive to maximum output power.

6.11.2 Test Setup

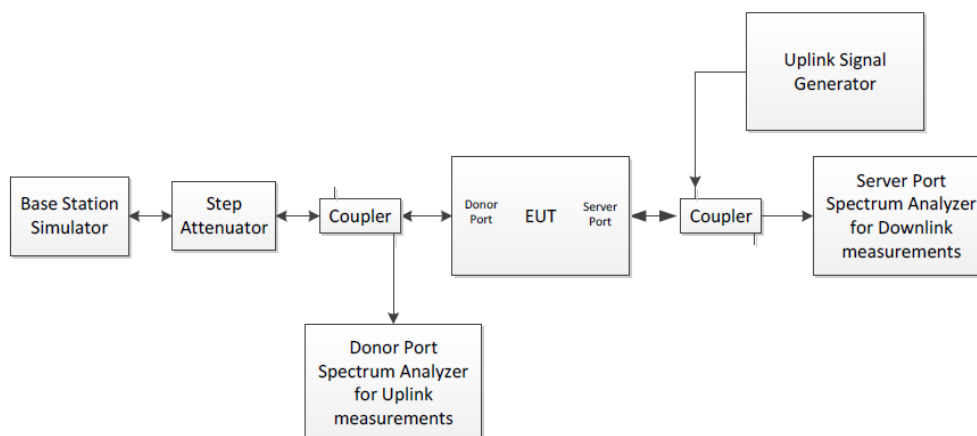


Figure 1 – Test configuration in EUT normal operational mode

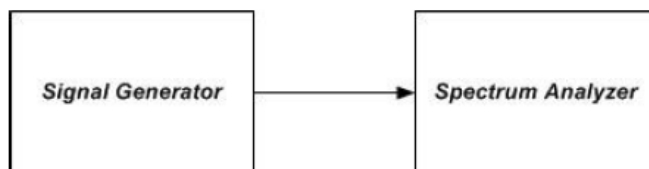


Figure 9 – Test setup for measuring characteristics of test signals used for subsequent EUT occupied bandwidth testing

6.11.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



6.12 Oscillation detection

Test Requirement: 47 CFR Part 20.21(e)(9)(ii)(A), 20.21(e)(5)

Test Method: KDB 935210 D04 clause 7.11

Limit: **20.21(e)(9)(ii)(A) Anti-Oscillation:**
Consumer boosters must be able to detect and mitigate (i.e., by automatic gain reduction or shut down), any oscillations in uplink and downlink bands. Oscillation detection and mitigation must occur automatically within 0.3 seconds in the uplink band and within 1 second in the downlink band. In cases where oscillation is detected, the booster must continue mitigation for at least one minute before restarting. After five such restarts, the booster must not resume operation until manually reset.

20.21(e)(5) Anti-Oscillation:
Consumer Signal Boosters must be able to detect and mitigate any unintended oscillations in uplink and downlink bands (such as may result from insufficient isolation between the antennas).

6.12.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1015 mbar

EUT Operation: Set the EUT to maximum gain and drive to maximum output power.

6.12.2 Test Setup

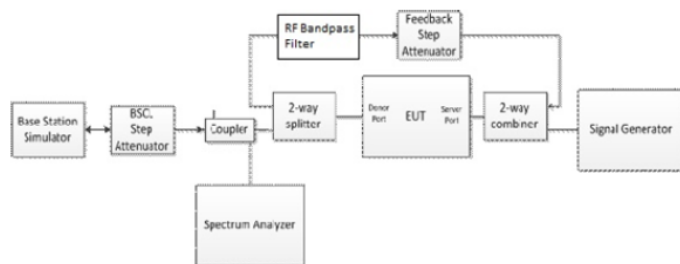


Figure 10 – Uplink oscillation detection test setup

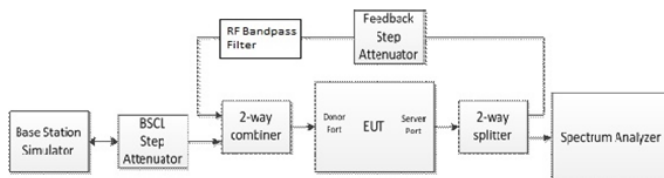


Figure 11 – Downlink oscillation detection test setup



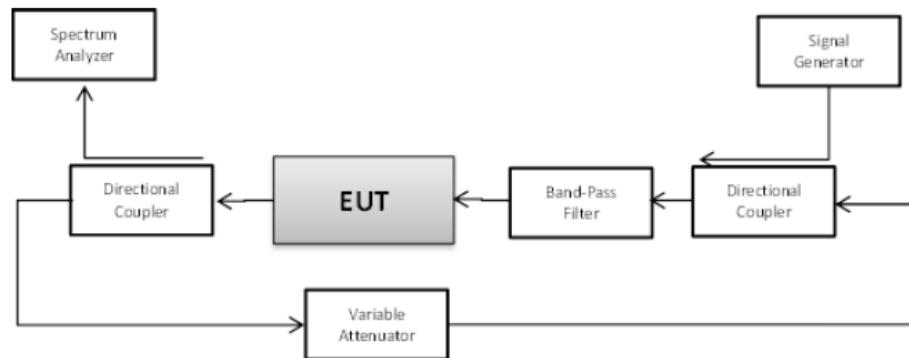


Figure 12 – Downlink oscillation mitigation test setup

6.12.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



6.13 Radiated Spurious emission (below 1GHz)

Test Requirement: 47 CFR Part 2.1053, 20.21(e)(9)(i)(F)

Test Method: KDB 935210 D04 clause 7.13

Limit: 20.21(e)(9)(i)(F) Out of Band Emission Limits:

Booster out of band emissions (OOBE) shall meet the FCC's mobile emission limits for the supported bands of operation. Compliance to OOBE limits will utilize high peak-to-average CMRS signal types.

24.238

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

27.53(h)

the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.


6.13.1 E.U.T. Operation

Operating Environment:

Temperature: 24.6 °C Humidity: 54 % RH Atmospheric Pressure: 1010 mbar

EUT Operation: Set the EUT to maximum gain and drive to maximum output power.

6.13.2 Test Setup

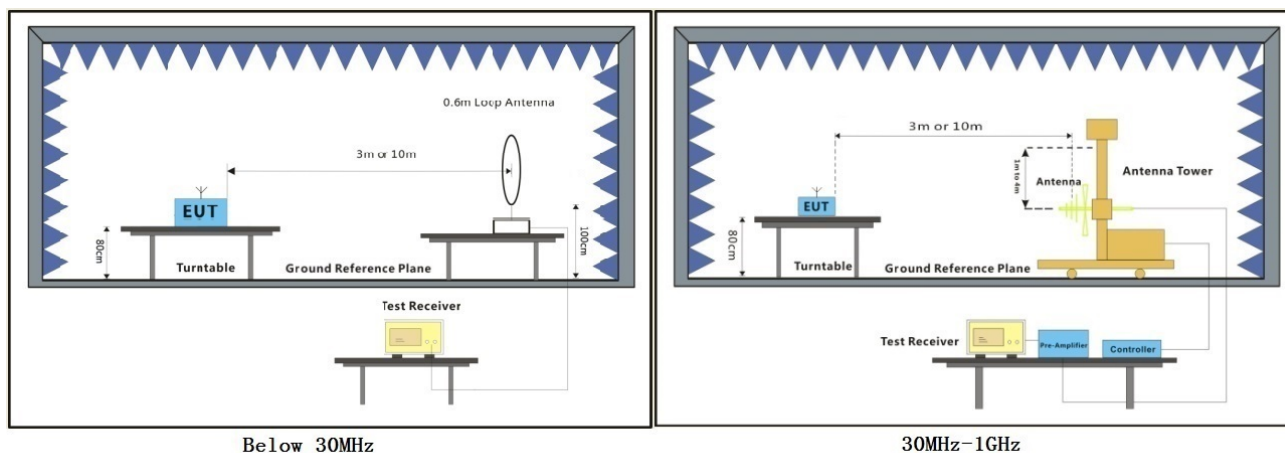

Below 30MHz

30MHz-1GHz



6.13.3 Test procedure

1. Scan from 9kHz to 1GHz, find the maximum radiation frequency to measure.
2. The technique used to find the Spurious Emissions of the transmitter was the antenna substitution method. Substitution method was performed to determine the actual ERP/EIRP emission levels of the EUT.

Below 1GHz test procedure as below:

- 1) The EUT was powered on and placed on a table in the chamber. The antenna of the transmitter was extended to its maximum length. modulation mode and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- 2) Rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3) Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4) The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5) A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6) The output power into the substitution antenna was then measured.
- 7) Steps 5) and 6) were repeated with both antennas vertically polarized.
- 8) Calculate power in dBm by the following formula:
Level (dBm) = Read Level (dBm) + Correction Factor (dB)

6.13.4 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6.14 Radiated Spurious emission (above 1GHz)

Test Requirement: 47 CFR Part 2.1053, 20.21(e)(9)(i)(F)

Test Method: KDB 935210 D04 clause 7.13

Limit: *20.21(e)(9)(i)(F) Out of Band Emission Limits:*
 Booster out of band emissions (OOBE) shall meet the FCC's mobile emission limits for the supported bands of operation. Compliance to OOBE limits will utilize high peak-to-average CMRS signal types.
24.238
 The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
27.53(h)
 the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.


6.14.1 E.U.T. Operation

Operating Environment:

Temperature: 24.6 °C Humidity: 54 % RH Atmospheric Pressure: 1010 mbar

EUT Operation: Set the EUT to maximum gain and drive to maximum output power.

6.14.2 Test Setup

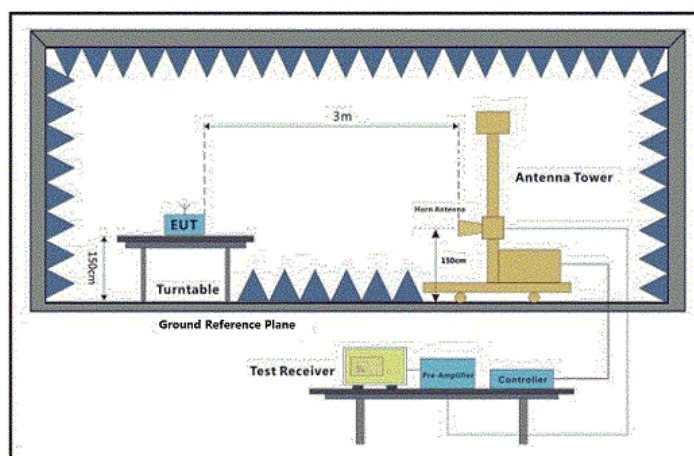

Above 1GHz



6.14.3 Test procedure

1. Scan from 1GHz to 40GHz, find the maximum radiation frequency to measure.
2. The technique used to find the Spurious Emissions of the transmitter was the antenna substitution method. Substitution method was performed to determine the actual ERP/EIRP emission levels of the EUT.
 - 1) The EUT was powered on and placed on a table in the fully Anechoic Chamber. The antenna of the transmitter was extended to its maximum length. modulation mode and the measuring receiver shall be tuned to the frequency of the transmitter under test.
 - 2) Rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
 - 3) Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
 - 4) The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
 - 5) A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
 - 6) The output power into the substitution antenna was then measured.
 - 7) Steps 5) and 6) were repeated with both antennas vertically polarized.
 - 8) Calculate power in dBm by the following formula:

$$\text{Level (dBm)} = \text{Read Level (dBm)} + \text{Correction Factor (dB)}$$

6.14.4 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



6.15 Out of band gain

Test Requirement: 47 CFR Part 20.21(e)(9)(i)(E)

Test Method: KDB 935210 D04 clause 7.15

Limit: *20.21(e)(9)(i)(E) Out of Band Gain Limits:*
 (1) A frequency selective booster shall have the following minimum attenuation referenced to the gain in the center of the pass band of the booster:
 (i) -20 dB at the band edge, where band edge is the end of the licensee's allocated spectrum,
 (ii) -30 dB at 1 MHz offset from band edge,
 (iii) -40 dB at 5 MHz offset from band edge.
 (2) A frequency selective booster having maximum gain greater than 80 dB (referenced to the center of the pass band) shall limit the out of band gain to 60 dB at 0.2 MHz offset from the band edge, and 45 dB at 1 MHz offset from the band edge, where band edge is the end of the licensee's allocated spectrum.

6.15.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1015 mbar

EUT Operation: Set the EUT to maximum output power and maximum gain.

6.15.2 Test Setup

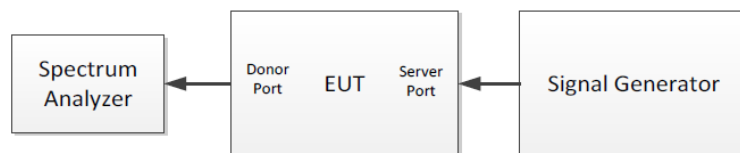


Figure 2 – Uplink test configuration in EUT test mode

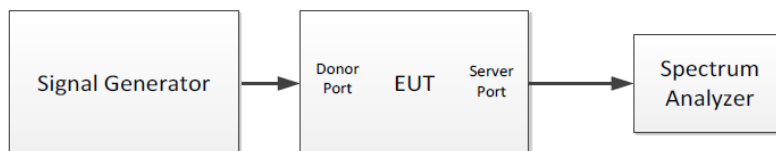


Figure 3 – Downlink test configuration in EUT test mode

6.15.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260400082402.



6.16 Frequency Stability

Test Requirement: 47 CFR Part 2.1055
 Test Method: 47 CFR Part 2.1055
 KDB 935210 D04 clause 7.16

Limit: 22.335 *Frequency tolerance*:
 The carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in below table:

Frequency range (MHz)	Base, fixed (ppm)
25 to 50	20.0
50 to 450	5.0
450 to 512	2.5
821 to 896	1.5
928 to 929	5.0
929 to 960	1.5
2110 to 2220	10.0

24.235 & 27.54 *Frequency stability*:
 The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

6.16.1 E.U.T. Operation

Operating Environment:
 Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1015 mbar
 EUT Operation: Set the EUT to maximum output power and maximum gain.

6.16.2 Test Setup

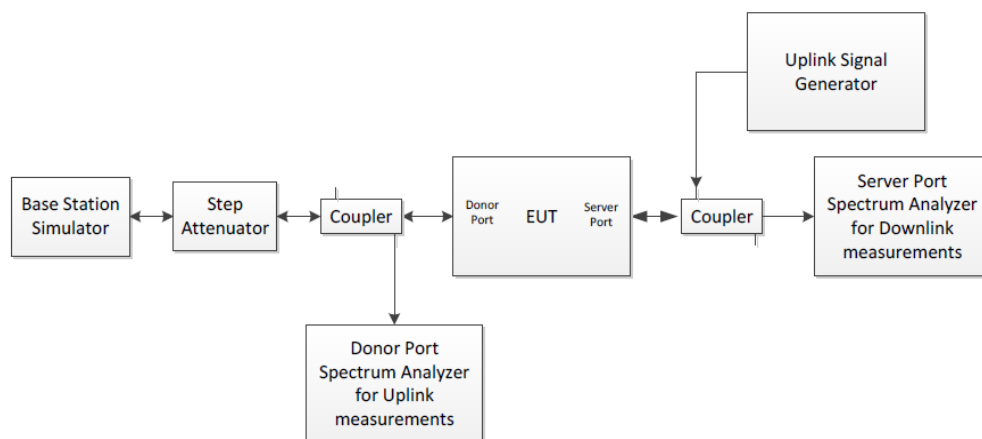


Figure 1 – Test configuration in EUT normal operational mode

6.16.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR230300022302.



7 Test Setup Photographs

Refer to Appendix - Test Setup Photos for GZCR260400082402.



8 EUT Constructional Details (EUT Photos)

Refer to Appendix - External and Internal Photos for GZCR2604000824AT.

- End of the Report -

