



SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

EMC-TRF-01 Rev 2.0

Report No.: GZCR260300055901

Page: 1 of 29

FCC ID: PX8RX78V3-A37

TEST REPORT

Application No.: GZCR2603000559AT
Applicant: Comba Telecom Network Systems Limited
Address of Applicant: Flat/Rm 10, 3/F, Bio-Informatics Ctr, 2 Science Park West Avenue, HK Science Park, Pak Shek Kok, N.T. Hong Kong
Manufacturer: Comba Telecom Technology (Guangzhou) Ltd.
Address of Manufacturer: No. 6 Jinbi Road, Economics and Technology Development District, Guangzhou, Guangdong, China
Factory: Comba Telecom Technology (Guangzhou) Ltd.
Address of Factory: No. 6 Jinbi Road, Economics and Technology Development District, Guangzhou, Guangdong, China
Product Name: Public Safety 700MHz and 800MHz Bi-Direction Amplifier
Model No.: RX78V3-A37
Trade Mark: Comba
Standard(s) : 47 CFR Part 2
47 CFR Part 20
47 CFR Part 90
Date of Receipt: 2026-03-23
Date of Test: 2026-03-30 to 2026-05-20
Date of Issue: 2026-06-16

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Competency Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.198, Kazhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663

t (86-20) 82155555

www.sgsgroup.com.cn

中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555

sgs.china@sgs.com

Revision Record			
Version	Report No.	Date	Remark
01	GZCR260300055901	2026-06-16	Original

Authorized for issue by:			
		Kevin Zhang	
		Ricky Liu/Project Engineer	
Approved By		Vico Cui	
		Vico Cui/Reviewer	



2 Test Summary

Item	Standard	Method	Requirement	Result
Out-of-band rejection	KDB935210 D05 v01r04	KDB935210 D05 v01r04 clause 4.3	KDB935210 D05 v01r04 clause 4.3	Pass
Input-versus-output signal comparison	47 CFR Part 2	KDB935210 D05 v01r04 clause 4.4	Part 2.1049	Pass
Input/output output power and amplifier/booster gain	47 CFR Part 90	KDB935210 D05 v01r04 clause 4.5	Part 90.205(j) Part 90.219(e)(1) Part 90.541(a)	Pass*
Emission Masks		KDB935210 D05 v01r04 clause 4.4	Part 90.210	Pass
Adjacent channel power (ACP)		KDB935210 D05 v01r04 clause 4.4	Part 90.543(a)	Pass
Noise Figure		KDB935210 D05 v01r04 clause 4.6	Part 90.219(e)(2)	Pass
Intermodulation emissions		KDB935210 D05 v01r04 clause 4.7	Part 90.219(d)(6)	Pass
Conducted spurious emissions		KDB935210 D05 v01r04 clause 4.7	Part 90.219(e)(3) Part 90.543(c)	Pass
Noise		KDB935210 D05 v01r04 clause 4.7	Part 90.219(d)(6)	Pass
Frequency stability		47 CFR Part 2.1055 KDB935210 D05 v01r04 clause 4.8 ANSI C63.26-2015 Clause 5.6	Part 90.539	Pass
Radiated spurious emissions below 1GHz		KDB935210 D05 v01r04 clause 4.9 ANSI C63.26-2015 Clause 5.5	Part 90.219(e)(3) Part 90.543(c)	Pass
Radiated spurious emissions above 1GHz		KDB935210 D05 v01r04 clause 4.9 ANSI C63.26-2015 Clause 5.5	Part 90.219(e)(3) Part 90.543(c)	Pass

*: According to KDB 935210 D02 Signal Booster Certification v04r03 clause V.J for device support output power higher than 5W ERP limit of Section 90.219(e)(1), the specific station authorizations are required the conditions.



Note:

E.U.T./ EUT means Equipment Under Test

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

The EUT is a digital dua-band public safety repeater supporting 700MHz and 800MHz frequency bands.

All tests in this report cover only the 700MHz band and refer to another report for the 800MHz band.



3 Contents

	Page
1 Covers Page	1
2 Test Summary	3
3 Contents	5
4 General Information	7
4.1 Details of EUT	7
4.2 Description of Support Units	8
4.3 Test Environment	8
4.4 Measurement Uncertainty	8
4.5 Test Signals	9
4.6 Test Channels	9
4.7 Test Location	10
4.8 Test Facility	10
4.9 Deviation from Standards	10
4.10 Abnormalities from Standard Conditions	10
5 Equipment List	11
6 Radio Spectrum Matter Test Results	13
6.1 Out-of-band rejection	13
6.1.1 E.U.T. Operation	13
6.1.2 Test Setup	13
6.1.3 Measurement Record	13
6.2 Input-versus-output signal comparison	14
6.2.1 E.U.T. Operation	14
6.2.2 Test Setup	14
6.2.3 Measurement Record	14
6.3 Input/output power and amplifier/booster gain	15
6.3.1 E.U.T. Operation	15
6.3.2 Test Setup	15
6.3.3 Measurement Record	15
6.4 Emission Masks	16
6.4.1 E.U.T. Operation	16
6.4.2 Test Setup	16
6.4.3 Measurement Record	16
6.5 Adjacent channel power (ACP)	17
6.5.1 E.U.T. Operation	18
6.5.2 Test Setup	18
6.5.3 Measurement Record	18
6.6 Noise Figure	19
6.6.1 E.U.T. Operation	19
6.6.2 Test Setup	19
6.6.3 Measurement Record	19
6.7 Intermodulation emissions	20



6.7.1	E.U.T. Operation	20
6.7.2	Test Setup	20
6.7.3	Measurement Record	20
6.8	Conducted Spurious emissions	21
6.8.1	E.U.T. Operation	21
6.8.2	Test Setup	21
6.8.3	Measurement Record	21
6.9	Noise	22
6.9.1	E.U.T. Operation	22
6.9.2	Test Setup	22
6.9.3	Measurement Record	22
6.10	Frequency Stability	23
6.10.1	E.U.T. Operation	23
6.10.2	Test Setup	23
6.10.3	Measurement Record	23
6.11	Radiated Spurious emissions below 1GHz	24
6.11.1	E.U.T. Operation	24
6.11.2	Test Setup	24
6.11.3	Test procedure	25
6.11.4	Measurement Record	25
6.12	Radiated Spurious emissions above 1GHz	26
6.12.1	E.U.T. Operation	26
6.12.2	Test Setup	26
6.12.3	Test procedure	27
6.12.4	Measurement Record	27
7	Test Setup Photographs	28
8	EUT Constructional Details (EUT Photos)	28



4 General Information

4.1 Details of EUT

Power Supply:	100-240V AC, 50/60Hz	
Test Voltage:	120V AC, 60Hz	
Cable:	Power supply cable (4m, shielded)	
Operating Temperature:	-40 to +55 °C	
Operating Humidity:	≤95%	
Frequency Range:	700MHz	Uplink (UL): 799-805MHz Downlink (DL): 769-775MHz
	800MHz	Uplink (UL): 806-817MHz Downlink (DL): 851-862MHz
Class Type:	Class A signal booster	
Interface:	MT	1 (N-Female)
	DT	1 (N-Female)
	MT_TEST	1 (SMA-Female)
	DT_TEST	1 (SMA-Female)
	LAN	1 (RJ45)
	OMT	1 (RJ45)
Normal Output Power:	Uplink (UL)	27dBm
	Downlink (DL)	37dBm
Maximum Gain:	Uplink (UL)	90dB
	Downlink (DL)	90dB
Supported Modulation:	FM, P25 Phase 1, P25 Phase 2, DMR, TETRA	
RF output port impedance :	50Ω	
Antenna Type:	External Dedicated Antenna	
Permission Antenna Gain:	0dBi or less (declared by the manufacturer)	
Software Version:	RX78V3_A37AV01.00	
Hardware Version:	RX78V3A37_V1.1	
Series No.:	RX78V3A37_A01	
Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.		



4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	Lenovo Xiaoxinchao 5000	PF0TNMG8
Mathced load and attenuator supplied by the client	/	/	/

4.3 Test Environment

Environment Parameter	Selected Values During Test	
Ralative Humidity	Ambient	
Value	Temperature (°C)	Voltage (V AC)
TNVN	Asmbient	120
TLVL	-30	102
TLVH	-30	138
THVL	+50	102
THVH	+50	138

VN: Normal Voltage, TN: Normal Teperature

VL: Lower Extreme Voltage, VH: Higher Extreme Voltage

TL: Lower Extreme Teperature, TH: Higher Extreme Teperature

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	RF Output Power	$\pm 0.75\text{dB}$
2	Transmitter unwanted emissions	$\pm 0.75\text{dB}$
3	Radiated Spurious Emission	$\pm 5.06\text{dB}$ (30MHz-1GHz; 3m); $\pm 4.46\text{dB}$ (30MHz-1GHz; 10m); $\pm 5.08\text{dB}$ (1GHz-6GHz); $\pm 5.14\text{dB}$ (6GHz-18GHz)
4	Occupied Channel Bandwidth	$\pm 0.274\%$
5	Frequency Stability	$\pm 7.25 \times 10^{-8}$

Remark:

The U_{lab} (lab Uncertainty) is less than U_{CISPR} (CISPR Uncertainty) or U_{ETSI} (ETSI Uncertainty).

Emission decision rule:

- Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit, marked as Pass in the report.



– Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit, marked as Fail in the report.



4.5 Test Signals

Test Signal	Occupied Bandwidth	Channel Bandwidth
CW	/	/
FM	4kHz	6.25kHz
DMR	7.6kHz	12.5kHz
P25 Phase 1 C4FM	8.1kHz	12.5kHz
P25 Phase 2 H-DQPSK	9.8kHz	12.5kHz
TETRA	20kHz	25kHz

4.6 Test Channels

700MHz (DL)					
Test Channel	Centre Frequency (MHz)				
	FM	DMR	P25 Phase 1	P25 Phase 2	TETRA
LCH	769.003125	769.00625	769.00625	769.00625	769.0125
MCH	772	772	772	772	772
HCH	774.996875	774.99375	774.99375	774.99375	774.9875

700MHz (UL)					
Test Channel	Centre Frequency (MHz)				
	FM	DMR	P25 Phase 1	P25 Phase 2	TETRA
LCH	799.003125	799.00625	799.00625	799.00625	799.0125
MCH	802	802	802	802	802
HCH	804.996875	804.99375	804.99375	804.99375	804.9875

LCH: Lowest Channel

MCH: Middle Channel

HCH: Highest Channel

DL: Downlink Path

UL: Uplink Path



4.7 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou,
Guangdong, China 510663
Tel: +86 20 82155555

No tests were sub-contracted.

4.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● ACMA

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

● SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

● FCC Recognized Accredited Test Firm(Registration No.: 486818)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

● ISED (Registration No.: 4620B, CAB identifier: CN0052)

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

● VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

● CBTL (Lab Code: TL129)

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.9 Deviation from Standards

None

4.10 Abnormalities from Standard Conditions

None



5 Equipment List

Radiated Spurious Emissions Below 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2025-08-13	2028-08-12
Amplifier (9kHz-1.3GHz)	HP	8447F	EMC2065	2025-11-25	2026-11-24
EMI Test Receiver (9kHz-7GHz)	Rohde & Schwarz	ESR7	EMC2220	2025-11-18	2026-11-17
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Trilog Broadband Antenna (25MHz-2GHz)	Schwarzbeck Mess-Elektronik	VULB 9168	EMC2174	2025-04-21	2027-04-20
Coaxial Cable	Mirco-COAX UTIFLEX ve	LA2-C125-8000	EMC2239	2024-12-04	2026-12-03
Trilog Broadband Antenna (25MHz-1GHz)	SCHWARZBECK	VULB 9160	EMC2025	2025-05-12	2027-05-11
Active Loop Antenna-RED	ETS-Lindgren	6502	EMC2190	2026-03-28	2028-03-27

Radiated Spurious Emissions Above 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2025-08-11	2026-08-10
Chamber cable (Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2024-08-19	2026-08-18
Horn Antenna (1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2025-05-13	2027-05-12
Horn Antenna (14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2023-06-18	2026-06-17
EXA Signal Analyzer (10Hz-44GHz)	Keysight	N9010A	EMC2138	2025-08-12	2026-08-11
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2023-12-20	2026-12-19
Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	EMC2172	2025-08-12	2026-08-11
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A



RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Temperature Chamber	GZ GongWen Co.Ltd.	GDJW-100	EMC0039	2025-11-19	2026-11-18
MI CABLE	SGS-EMC	0.8M	EMC2136	2025-11-02	2026-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2025-11-02	2026-11-01
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2222	2025-11-25	2026-11-24
MXA Signal Analyzer (10Hz-50GHz)	KEYSIGHT	N9020B	SEM004-24	2026-02-03	2027-02-02
Spectrum Analyzer(9kHz-30GHz)	Rohde & Schwarz	FSU43	SEM004-08	2026-02-04	2027-02-03
ESG vector signal generator (250kHz-6GHz)	Agilent Technologies	E4438C	SEM006-03	2025-11-25	2026-11-24
4X4 Power sensor Unit	TST	TSPS2023R	EMC2257	2025-08-12	2026-08-11
Test Software	TST	V2.0	GZE100-82	N/A	N/A

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2026-05-14	2027-05-13



6 Radio Spectrum Matter Test Results

6.1 Out-of-band rejection

Test Requirement: KDB935210 D05 v01r04 clause 4.3

Test Method: KDB935210 D05 v01r04 clause 4.3

Limit: Within the passband


6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1010 mbar

EUT Operation: Drive the EUT to the maximum output power at maximum gain.

6.1.2 Test Setup

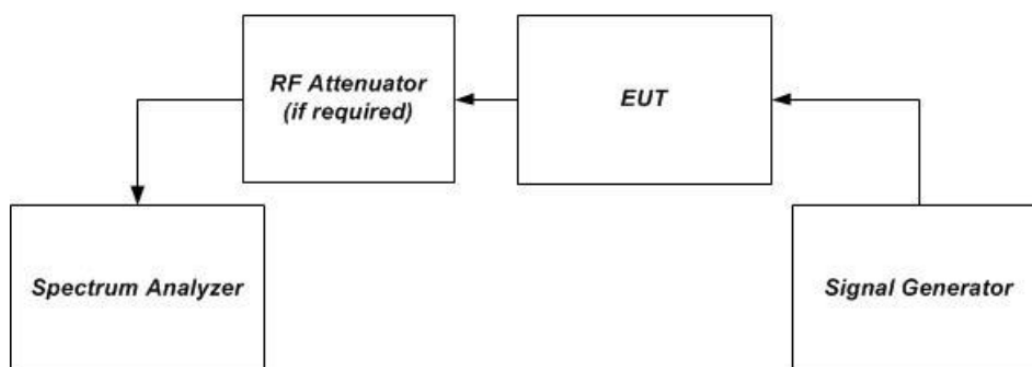

6.1.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260300055901.



6.2 Input-versus-output signal comparison

Test Requirement: Part 2.1049
 Test Method: KDB935210 D05 v01r04 clause 4.4
 Limit: There is no change in the occupied bandwidth of the retransmitted signals


6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1010 mbar

EUT Operation: Drive the EUT to the maximum output power at maximum gain.

6.2.2 Test Setup

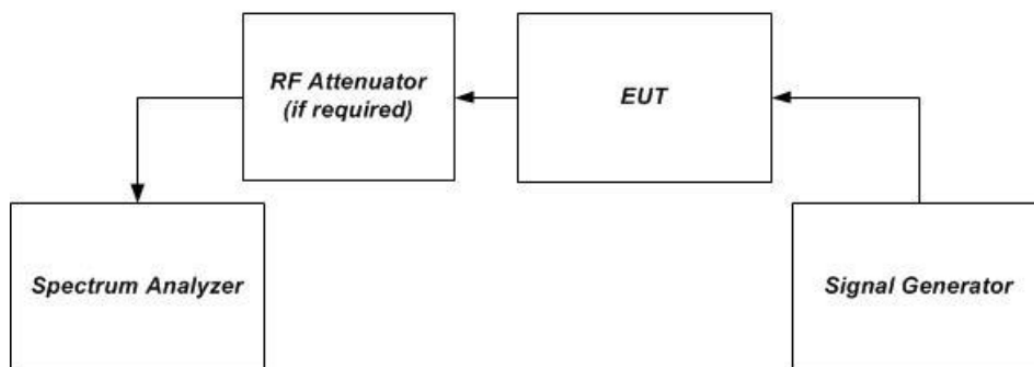

6.2.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260300055901.



6.3 Input/output power and amplifier/booster gain

Test Requirement: Part 90.205(j), 90.219(e)(1), 90.541(a)

Test Method: KDB935210 D05 v01r04 clause 4.5

Limit: 1. The ERP limit is 5W specified in 90.219(e)(1).
2. The ERP limit is 1000W specified in 90.541(a)


6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1010 mbar

EUT Operation: Drive the EUT to the maximum output power at maximum gain.

6.3.2 Test Setup

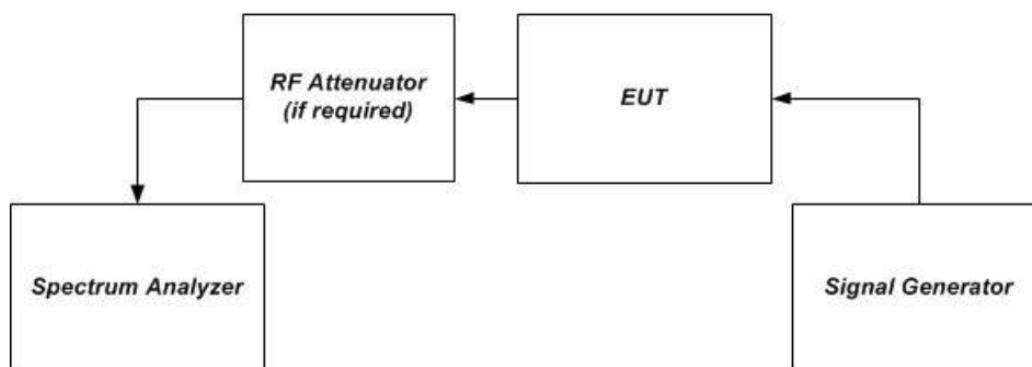

6.3.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260300055901.



6.4 Emission Masks

Test Requirement: Part 90.210

Test Method: KDB935210 D05 v01r04 clause 4.4

Limit: Mask B

For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.

2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.

3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

Remark: The EUT is equipped with an audio low-pass filter declared by the manufacturer.


6.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1010 mbar

EUT Operation: Drive the EUT to the maximum output power at maximum gain.

6.4.2 Test Setup

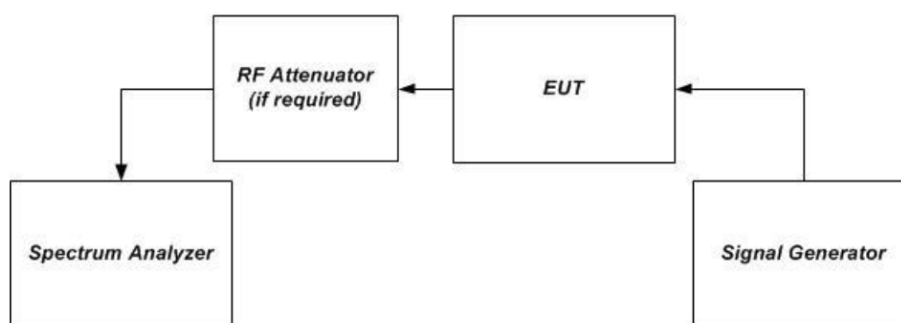

6.4.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260300055901.



6.5 Adjacent channel power (ACP)

Test Requirement: 90.543(a)

Test Method: KDB935210 D05 v01r04 clause 4.4

Limit:

6.25 kHz Base Transmitter ACP Requirements

Offset for center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
6.25	6.25	-40
12.50	6.25	-60
18.75	6.25	-60
25.00	6.25	-65
37.50	25	-65
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
400kHz to 12MHz	30 (s)	-80
12MHz to paired received band	30 (s)	-80
In the paired received band	30 (s)	-85 ¹

12.5 kHz Base Transmitter ACP Requirements

Offset for center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
400kHz to 12MHz	30 (s)	-80
12MHz to paired received band	30 (s)	-80
In the paired received band	30 (s)	-85 ¹

¹ Although we permit individual base transmitters to radiate a maximum ACP of -85 dBc in the paired receive band, licensees deploying these transmitters may not exceed an ACP of -100 dBc in the paired receive band when measured at either the transmitting antenna input port or the output of the transmitter combining network. Consequently, licensees deploying these transmitters may need to use external filters to comply with the more restrictive ACP limit.



25 kHz Base Transmitter ACP Requirements

Offset for center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
400kHz to 12MHz	30 (s)	-80
12MHz to paired received band	30 (s)	-80
In the paired received band	30 (s)	-85 ¹

¹ Although we permit individual base transmitters to radiate a maximum ACP of -85 dBc in the paired receive band, licensees deploying these transmitters may not exceed an ACP of -100 dBc in the paired receive band when measured at either the transmitting antenna input port or the output of the transmitter combining network. Consequently, licensees deploying these transmitters may need to use external filters to comply with the more restrictive ACP limit.


6.5.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1010 mbar

EUT Operation: Drive the EUT to the maximum output power at maximum gain.

6.5.2 Test Setup

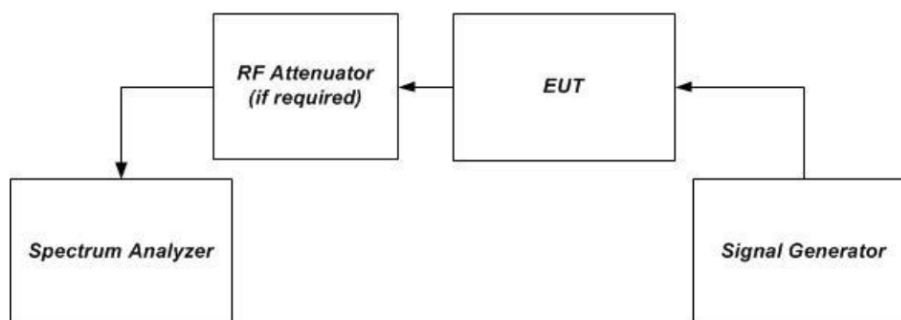

6.5.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260300055901.




6.6 Noise Figure

Test Requirement: Part 90.219(e)(2)
 Test Method: KDB935210 D05 v01r04 clause 4.6
 Limit: The noise figure of a signal shall not exceed 9dB in either direction.

6.6.1 E.U.T. Operation

Operating Environment:
 Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1010 mbar
 EUT Operation: Drive the EUT to the maximum output power at maximum gain.

6.6.2 Test Setup

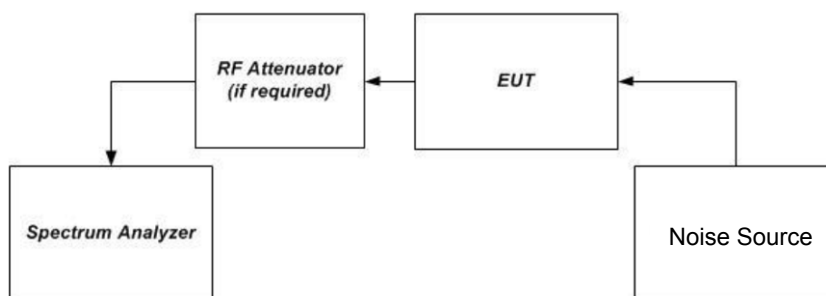

6.6.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260300055901.



6.7 Intermodulation emissions

Test Requirement: Part 90.219(d)(6)

Test Method: KDB935210 D05 v01r04 clause 4.7

Limit: The ERP of intermodulation products should not exceed -30dBm in a 10kHz measurement bandwidth.


6.7.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1010 mbar

EUT Operation: Drive the EUT to the maximum output power at maximum gain.

6.7.2 Test Setup

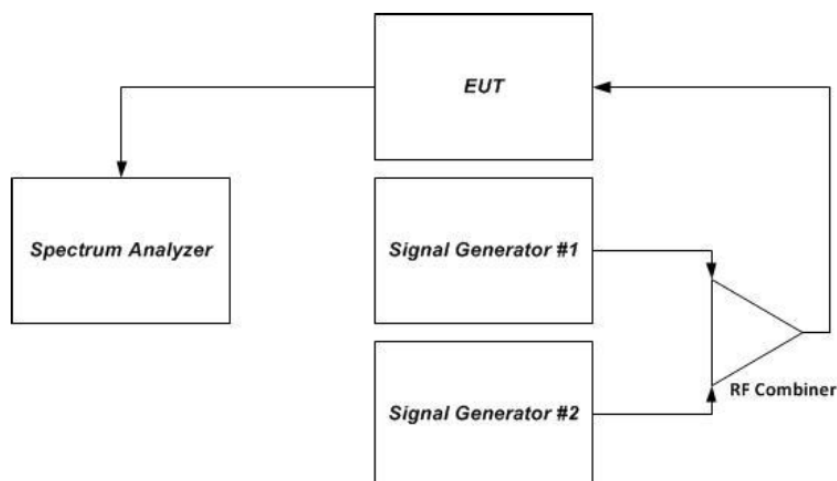

6.7.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260300055901.



6.8 Conducted Spurious emissions

Test Requirement: Part 90.219(e)(3), 90.543(c)
 Test Method: KDB935210 D05 v01r04 clause 4.7
 Limit: Spurious emissions from a signal booster must not exceed -13 dBm within any 100 kHz measurement bandwidth. (specified in 90.219(e)(3))

On any frequency outside of the frequency ranges covered by the ACP tables in this section, the power of any emission must be reduced below the mean output power (P) by at least $43 + 10\log(P)$ dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz. (specified in 90.543(c))


6.8.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1010 mbar

EUT Operation: Drive the EUT to the maximum output power at maximum gain.

6.8.2 Test Setup

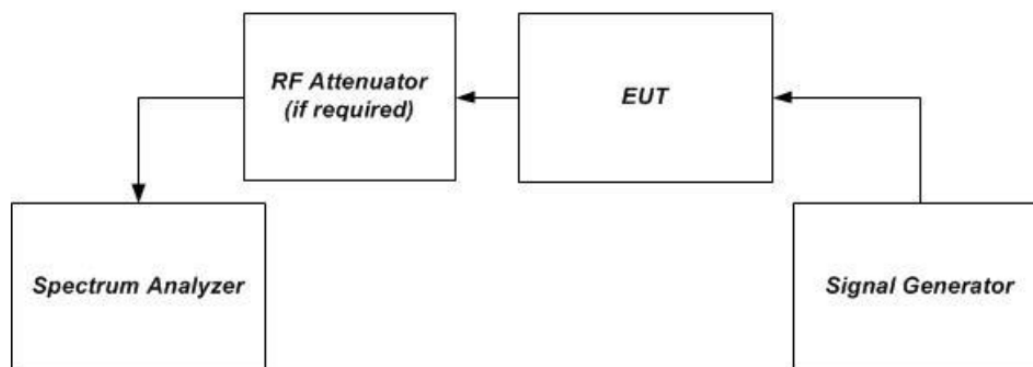

6.8.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260300055901.



6.9 Noise

Test Requirement: Part 90.219(d)(6)

Test Method: KDB935210 D05 v01r04 clause 4.7

Limit:

1. The ERP of noise within the passband should not exceed -43dBm in a 10kHz measurement bandwidth.
2. The ERP of noise in spectrum more than 1MHz outside of the passband should not exceed -70dBm in a 10kHz measurement bandwidth.


6.9.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1010 mbar

EUT Operation: Set the EUT at maximum gain.

6.9.2 Test Setup

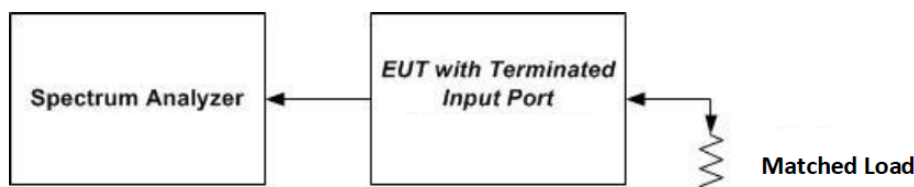

6.9.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260300055901.



6.10 Frequency Stability

Test Requirement: Part 90.539

Test Method: Part 2.1055
KDB935210 D05 v01r04 clause 4.8
ANSI C63.26-2015 Clause 5.6

Limit: The frequency stability of base transmitters operating in the narrowband segment must be 100 parts per billion or better.


6.10.1 E.U.T. Operation

Operating Environment:

Temperature: 22~26 °C Humidity: 45~60 % RH Atmospheric Pressure: 1010 mbar

EUT Operation: Drive the EUT to the maximum output power at maximum gain.

6.10.2 Test Setup

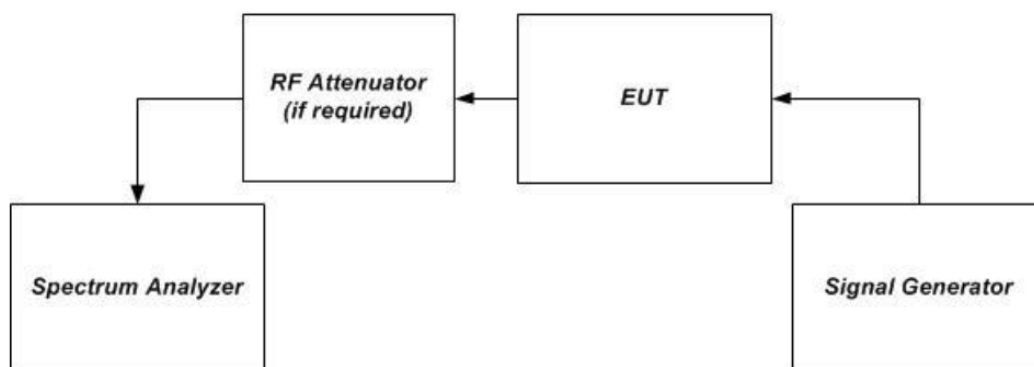

6.10.3 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260300055901.



6.11 Radiated Spurious emissions below 1GHz



Test Requirement:	Part 90.219(e)(3), 90.543(c)
Test Method:	KDB935210 D05 v01r04 clause 4.9 ANSI C63.26-2015 Clause 5.5
Test Distance:	10 m above 30 MHz, 3m below 30 MHz
Limit:	Spurious emissions from a signal booster must not exceed -13 dBm within any 100 kHz measurement bandwidth. (specified in 90.219(e)(3))

On any frequency outside of the frequency ranges covered by the ACP tables in this section, the power of any emission must be reduced below the mean output power (P) by at least $43 + 10\log(P)$ dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz. (specified in 90.543(c))

6.11.1 E.U.T. Operation

Operating Environment:					
Temperature:	23.1 °C	Humidity:	59 % RH	Atmospheric Pressure:	1015 mbar
EUT Operation:	Drive the EUT to the maximum output power at maximum gain.				

6.11.2 Test Setup

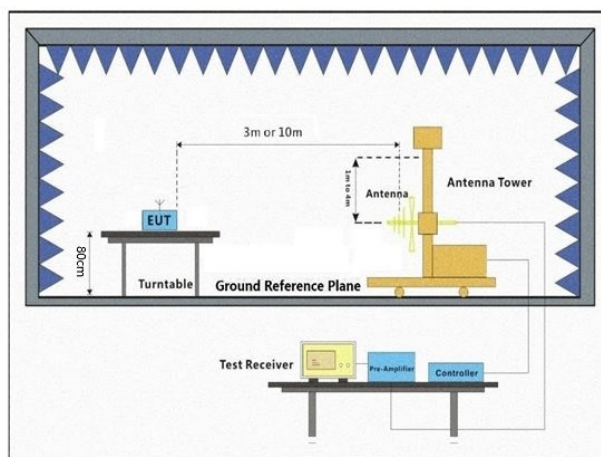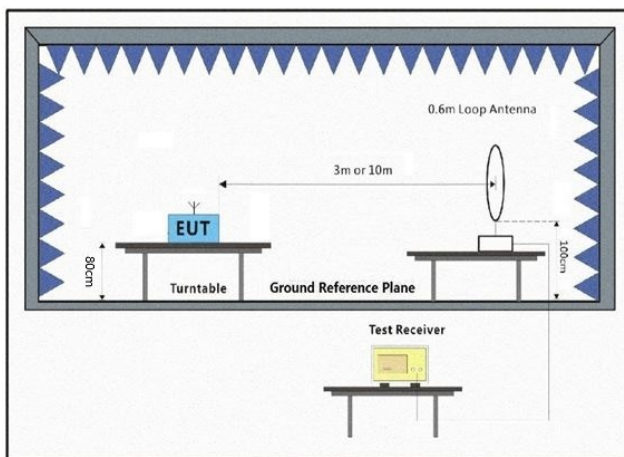

6.11.3 Test procedure

1. Scan from 9kHz to 1GHz, find the maximum radiation frequency to measure.
2. The technique used to find the Spurious Emissions of the transmitter was the antenna substitution method. Substitution method was performed to determine the actual ERP/EIRP emission levels of the EUT.

Below 1GHz test procedure as below:

- 1) The EUT was powered on and placed on a table in the chamber. The antenna of the transmitter was extended to its maximum length. modulation mode and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- 2) Rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3) Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4) The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5) A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6) The output power into the substitution antenna was then measured.
- 7) Steps 5) and 6) were repeated with both antennas vertically polarized.
- 8) Calculate power in dBm by the following formula:
Level (dBm) = Read Level (dBm) + Correction Factor (dB)

6.11.4 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260300055901.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6.12 Radiated Spurious emissions above 1GHz


Test Requirement:	Part 90.219(e)(3), 90.543(c)
Test Method:	KDB935210 D05 v01r04 clause 4.9 ANSI C63.26-2015 Clause 5.5
Test Distance:	3 m
Limit:	Spurious emissions from a signal booster must not exceed -13 dBm within any 100 kHz measurement bandwidth. (specified in 90.219(e)(3))

On any frequency outside of the frequency ranges covered by the ACP tables in this section, the power of any emission must be reduced below the mean output power (P) by at least $43 + 10\log(P)$ dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz. (specified in 90.543(c))

6.12.1 E.U.T. Operation

Operating Environment:					
Temperature:	24.0 °C	Humidity:	57 % RH	Atmospheric Pressure:	1015 mbar
EUT Operation:	Drive the EUT to the maximum output power at maximum gain.				

6.12.2 Test Setup

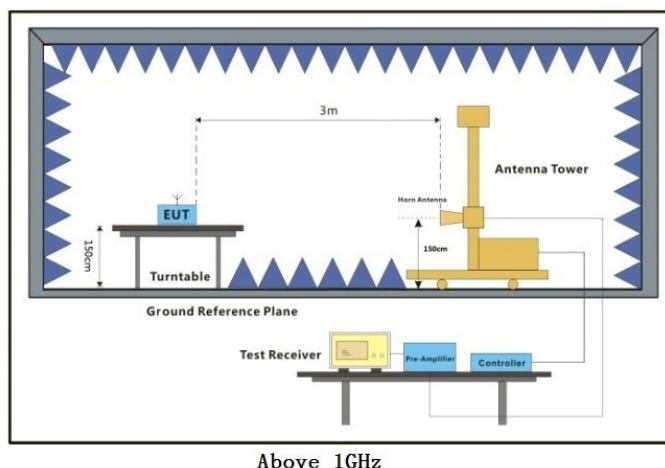

6.12.3 Test procedure

1. Scan from 1GHz to 40GHz, find the maximum radiation frequency to measure.
2. The technique used to find the Spurious Emissions of the transmitter was the antenna substitution method. Substitution method was performed to determine the actual ERP/EIRP emission levels of the EUT.
 - 1) The EUT was powered on and placed on a table in the fully Anechoic Chamber. The antenna of the transmitter was extended to its maximum length. modulation mode and the measuring receiver shall be tuned to the frequency of the transmitter under test.
 - 2) Rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
 - 3) Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
 - 4) The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
 - 5) A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
 - 6) The output power into the substitution antenna was then measured.
 - 7) Steps 5) and 6) were repeated with both antennas vertically polarized.
 - 8) Calculate power in dBm by the following formula:

$$\text{Level (dBm)} = \text{Read Level (dBm)} + \text{Correction Factor (dB)}$$

6.12.4 Measurement Record

Please refer to Appendix - Test Data and Result for report GZCR260300055901.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7 Test Setup Photographs

Refer to Appendix - Test Setup Photos for GZCR260300055901.

8 EUT Constructional Details (EUT Photos)

Refer to Appendix - External and Internal Photos for GZCR2603000559AT.

- End of the Report -

