

Main Antenna Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_18.30.22

EUT Name: Rugged Tablet PC

Temp.(°C): 21.1

Model Number: M101Q9

Humidity (%RH): 42

Sample Number: CC2511399-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11b CH6 P=14


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器+数据线: A01

RE Test case FCC Part 15C FCC 15.247(2.4G)_1GHz-18GHz

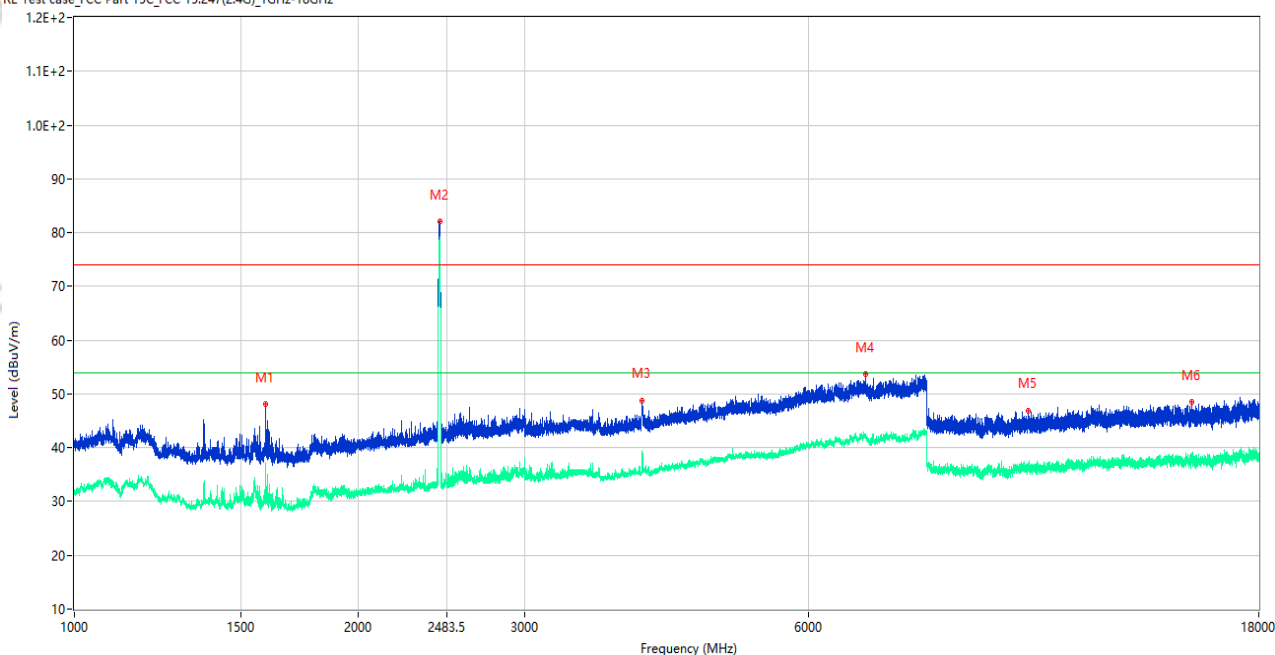

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1594.500	48.07	-16.23	74.0	25.93	Peak	104.00	150	Vertical	Pass
1**	1594.500	35.45	-16.23	54.0	18.55	AV	104.00	150	Vertical	Pass
2	2438.000	82.04	-12.38	74.0	-8.04	Peak	55.00	150	Vertical	N/A
2**	2438.000	78.98	-12.38	54.0	-24.98	AV	55.00	150	Vertical	N/A
3	3992.500	48.82	-4.82	74.0	25.18	Peak	113.00	150	Vertical	Pass
3**	3992.500	38.48	-4.82	54.0	15.52	AV	113.00	150	Vertical	Pass
4	6889.500	53.73	0.61	74.0	20.27	Peak	307.00	150	Vertical	Pass
4**	6889.500	42.09	0.61	54.0	11.91	AV	307.00	150	Vertical	Pass
5	10266.500	46.97	-3.08	74.0	27.03	Peak	10.00	150	Vertical	Pass
5**	10266.500	36.41	-3.08	54.0	17.59	AV	10.00	150	Vertical	Pass
6	15266.500	48.52	-1.02	74.0	25.48	Peak	244.00	150	Vertical	Pass
6**	15266.500	37.75	-1.02	54.0	16.25	AV	244.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_18.24.14

EUT Name: Rugged Tablet PC

Temp.(°C): 21.1

Model Number: M101Q9

Humidity (%RH): 42

Sample Number: CC2511399-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11b CH6 P=14


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器+数据线: A01

RE Test case FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

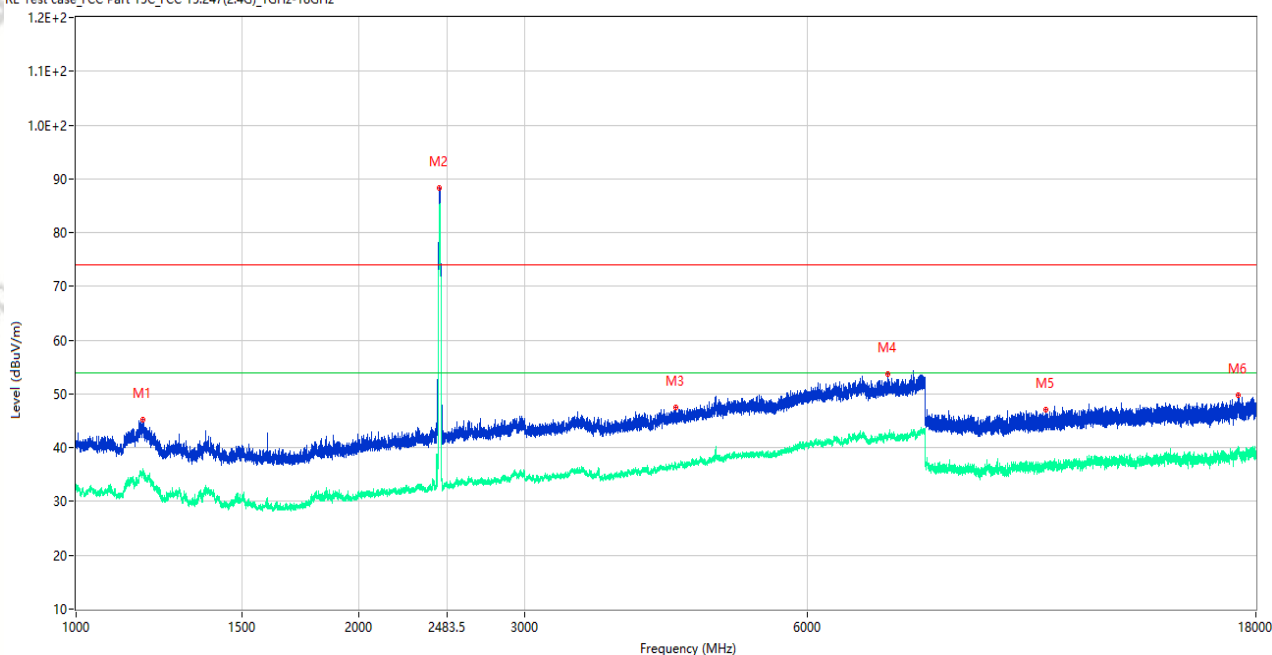


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1177.250	45.12	-15.69	74.0	28.88	Peak	105.00	150	Horizontal	Pass
1**	1177.250	35.21	-15.69	54.0	18.79	AV	105.00	150	Horizontal	Pass
2	2437.000	88.24	-12.37	74.0	-14.24	Peak	83.00	150	Horizontal	N/A
2**	2437.000	83.76	-12.37	54.0	-29.76	AV	83.00	150	Horizontal	N/A
3	4345.000	47.47	-3.13	74.0	26.53	Peak	338.00	150	Horizontal	Pass
3**	4345.000	36.43	-3.13	54.0	17.57	AV	338.00	150	Horizontal	Pass
4	7307.500	53.67	0.55	74.0	20.33	Peak	183.00	150	Horizontal	Pass
4**	7307.500	41.72	0.55	54.0	12.28	AV	183.00	150	Horizontal	Pass
5	10752.500	47.11	-3.43	74.0	26.89	Peak	247.00	150	Horizontal	Pass
5**	10752.500	36.95	-3.43	54.0	17.05	AV	247.00	150	Horizontal	Pass
6	17222.500	49.84	-0.84	74.0	24.16	Peak	330.00	150	Horizontal	Pass
6**	17222.500	38.94	-0.84	54.0	15.06	AV	330.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_19.12.01

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH6 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01

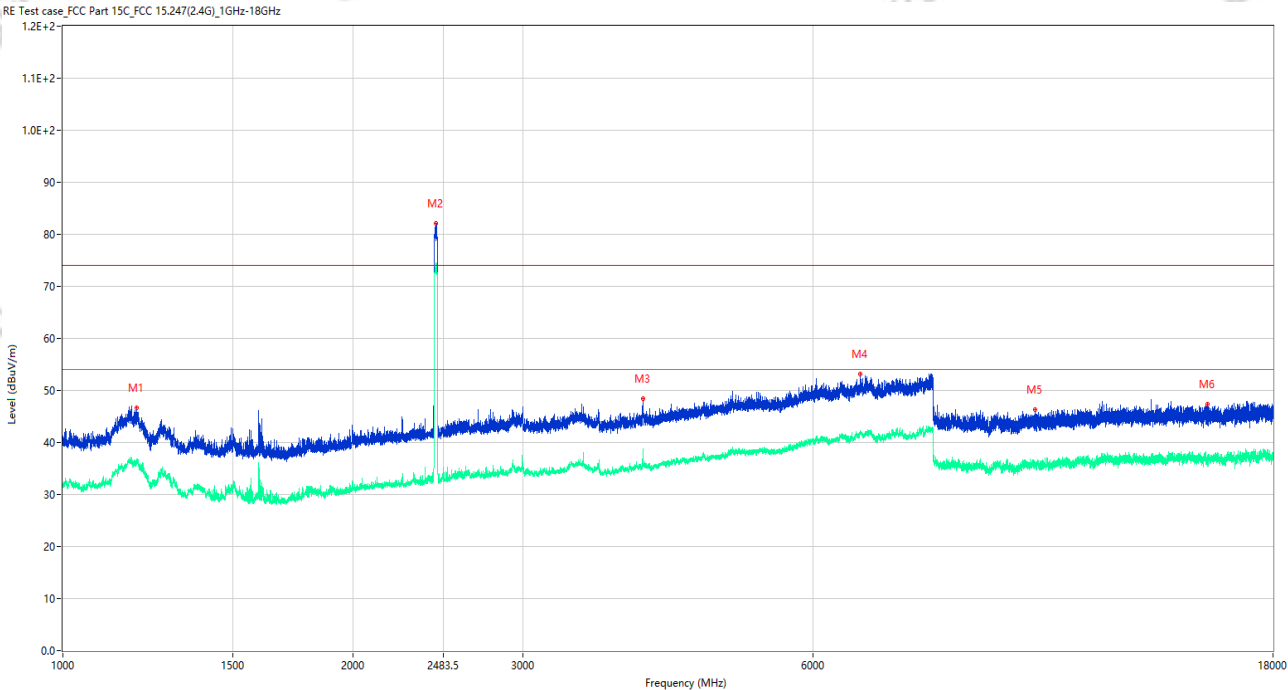


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1192.250	46.72	-15.81	74.0	27.28	Peak	60.00	150	Vertical	Pass
1**	1192.250	36.07	-15.81	54.0	17.93	AV	60.00	150	Vertical	Pass
2	2438.250	82.07	-12.38	74.0	-8.07	Peak	51.00	150	Vertical	N/A
2**	2438.250	74.16	-12.38	54.0	-20.16	AV	51.00	150	Vertical	N/A
3	3995.000	48.38	-4.82	74.0	25.62	Peak	125.00	150	Vertical	Pass
3**	3995.000	35.60	-4.82	54.0	18.40	AV	125.00	150	Vertical	Pass
4	6717.500	53.13	0.43	74.0	20.87	Peak	39.00	150	Vertical	Pass
4**	6717.500	41.78	0.43	54.0	12.22	AV	39.00	150	Vertical	Pass
5	10198.000	46.35	-3.48	74.0	27.65	Peak	134.00	150	Vertical	Pass
5**	10198.000	35.23	-3.48	54.0	18.77	AV	134.00	150	Vertical	Pass
6	15388.500	47.39	-2.31	74.0	26.61	Peak	360.00	150	Vertical	Pass
6**	15388.500	37.11	-2.31	54.0	16.89	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_19.19.12

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH6 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01

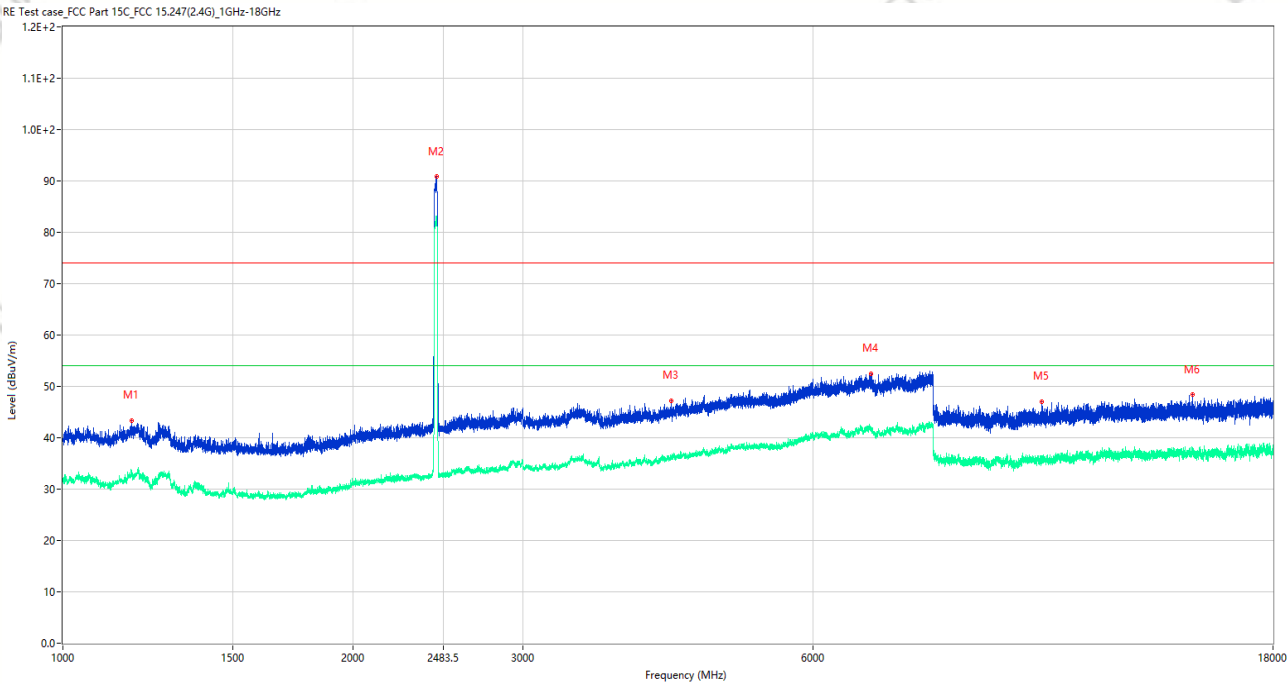


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1177.750	43.37	-15.71	74.0	30.63	Peak	45.00	150	Horizontal	Pass
1**	1177.750	33.30	-15.71	54.0	20.70	AV	45.00	150	Horizontal	Pass
2	2439.750	90.85	-12.37	74.0	-16.85	Peak	84.00	150	Horizontal	N/A
2**	2439.750	83.12	-12.37	54.0	-29.12	AV	84.00	150	Horizontal	N/A
3	4280.000	47.20	-3.45	74.0	26.80	Peak	360.00	150	Horizontal	Pass
3**	4280.000	35.74	-3.45	54.0	18.26	AV	360.00	150	Horizontal	Pass
4	6885.000	52.48	0.62	74.0	21.52	Peak	360.00	150	Horizontal	Pass
4**	6885.000	41.98	0.62	54.0	12.02	AV	360.00	150	Horizontal	Pass
5	10368.500	47.08	-3.31	74.0	26.92	Peak	152.00	150	Horizontal	Pass
5**	10368.500	36.56	-3.31	54.0	17.44	AV	152.00	150	Horizontal	Pass
6	14842.500	48.37	-0.44	74.0	25.63	Peak	236.00	150	Horizontal	Pass
6**	14842.500	37.43	-0.44	54.0	16.57	AV	236.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_20.17.30 .

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH6 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01

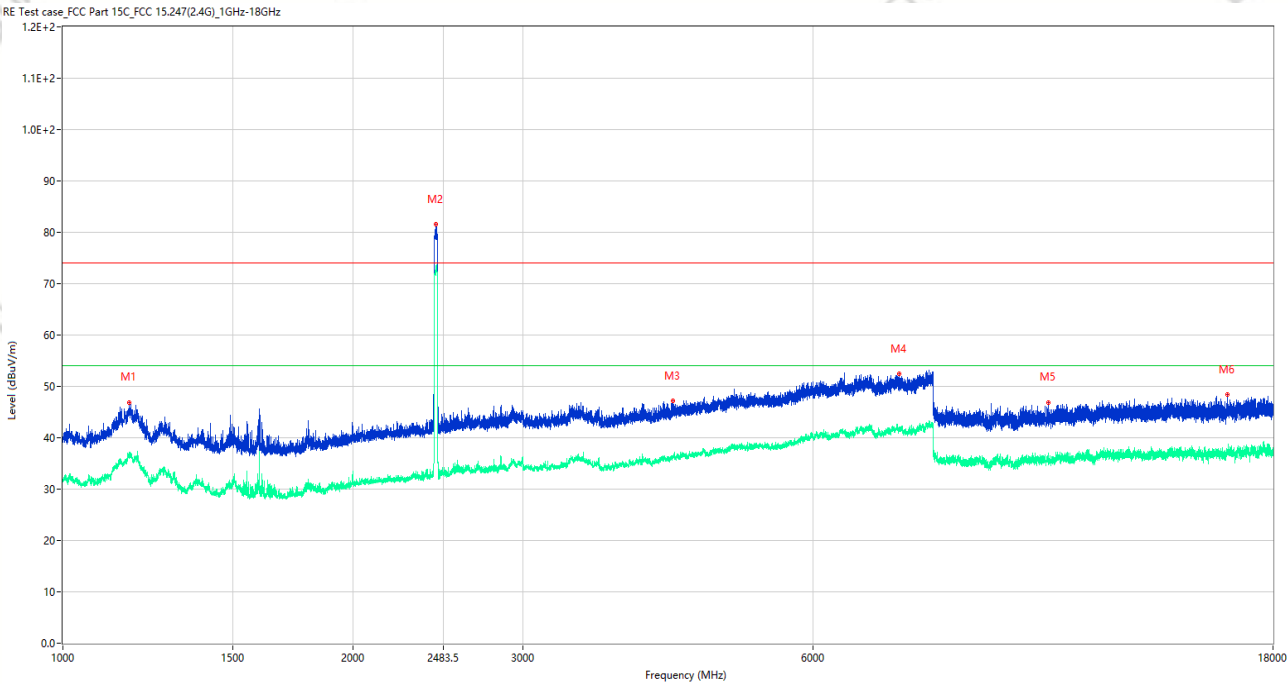


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1171.500	46.90	-15.54	74.0	27.10	Peak	60.00	150	Vertical	Pass
1**	1171.500	36.98	-15.54	54.0	17.02	AV	60.00	150	Vertical	Pass
2	2438.750	81.54	-12.37	74.0	-7.54	Peak	68.00	150	Vertical	N/A
2**	2438.750	72.96	-12.37	54.0	-18.96	AV	68.00	150	Vertical	N/A
3	4292.500	47.11	-3.98	74.0	26.89	Peak	219.00	150	Vertical	Pass
3**	4292.500	36.36	-3.98	54.0	17.64	AV	219.00	150	Vertical	Pass
4	7372.500	52.38	1.00	74.0	21.62	Peak	124.00	150	Vertical	Pass
4**	7372.500	42.11	1.00	54.0	11.89	AV	124.00	150	Vertical	Pass
5	10524.000	46.86	-3.46	74.0	27.14	Peak	64.00	150	Vertical	Pass
5**	10524.000	35.49	-3.46	54.0	18.51	AV	64.00	150	Vertical	Pass
6	16133.000	48.36	-1.54	74.0	25.64	Peak	0.00	150	Vertical	Pass
6**	16133.000	36.97	-1.54	54.0	17.03	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_20.14.05

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH6 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01

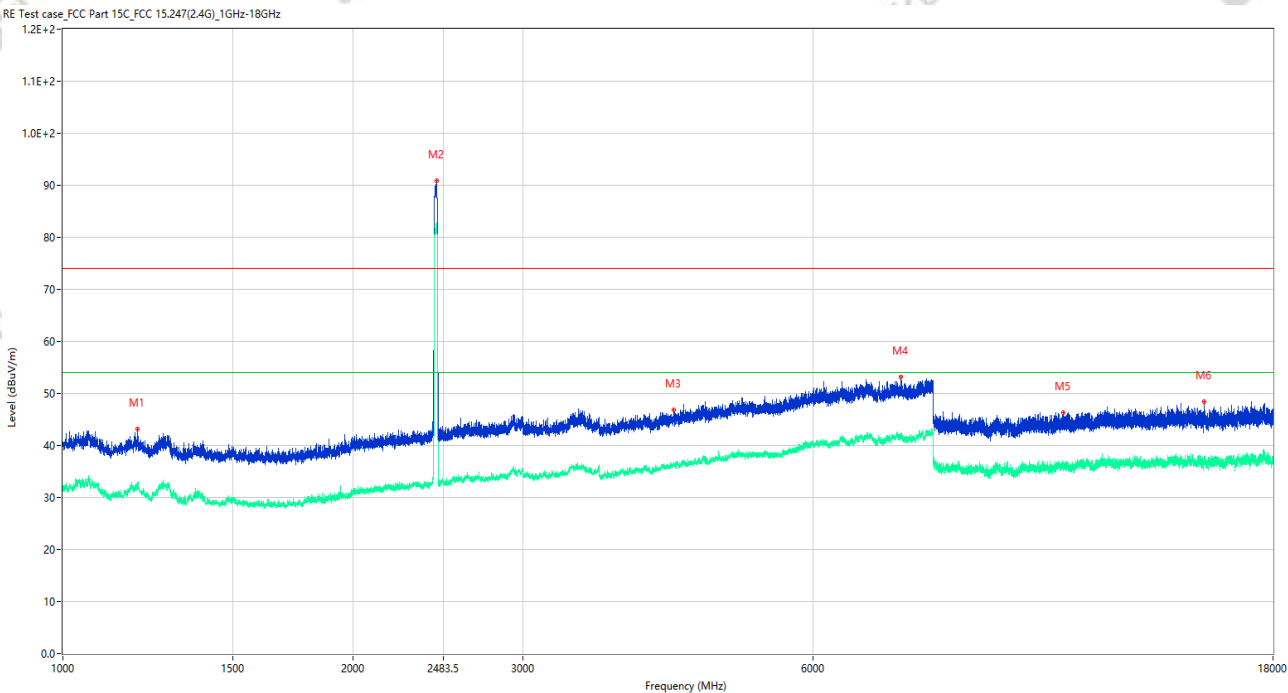

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.000	43.18	-15.73	74.0	30.82	Peak	38.00	150	Horizontal	Pass
1**	1196.000	32.16	-15.73	54.0	21.84	AV	38.00	150	Horizontal	Pass
2	2442.000	90.93	-12.43	74.0	-16.93	Peak	90.00	150	Horizontal	N/A
2**	2442.000	82.04	-12.43	54.0	-28.04	AV	90.00	150	Horizontal	N/A
3	4301.500	46.91	-3.58	74.0	27.09	Peak	77.00	150	Horizontal	Pass
3**	4301.500	36.71	-3.58	54.0	17.29	AV	77.00	150	Horizontal	Pass
4	7399.000	53.21	0.85	74.0	20.79	Peak	313.00	150	Horizontal	Pass
4**	7399.000	41.54	0.85	54.0	12.46	AV	313.00	150	Horizontal	Pass
5	10913.000	46.39	-3.22	74.0	27.61	Peak	68.00	150	Horizontal	Pass
5**	10913.000	36.04	-3.22	54.0	17.96	AV	68.00	150	Horizontal	Pass
6	15258.000	48.45	-1.05	74.0	25.55	Peak	325.00	150	Horizontal	Pass
6**	15258.000	36.79	-1.05	54.0	17.21	AV	325.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_20.24.13

EUT Name: Rugged Tablet PC

Temp.(°C): 21.1

Model Number: M101Q9

Humidity (%RH): 42

Sample Number: CC2511399-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11n40 CH6 P=14


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器+数据线: A01

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

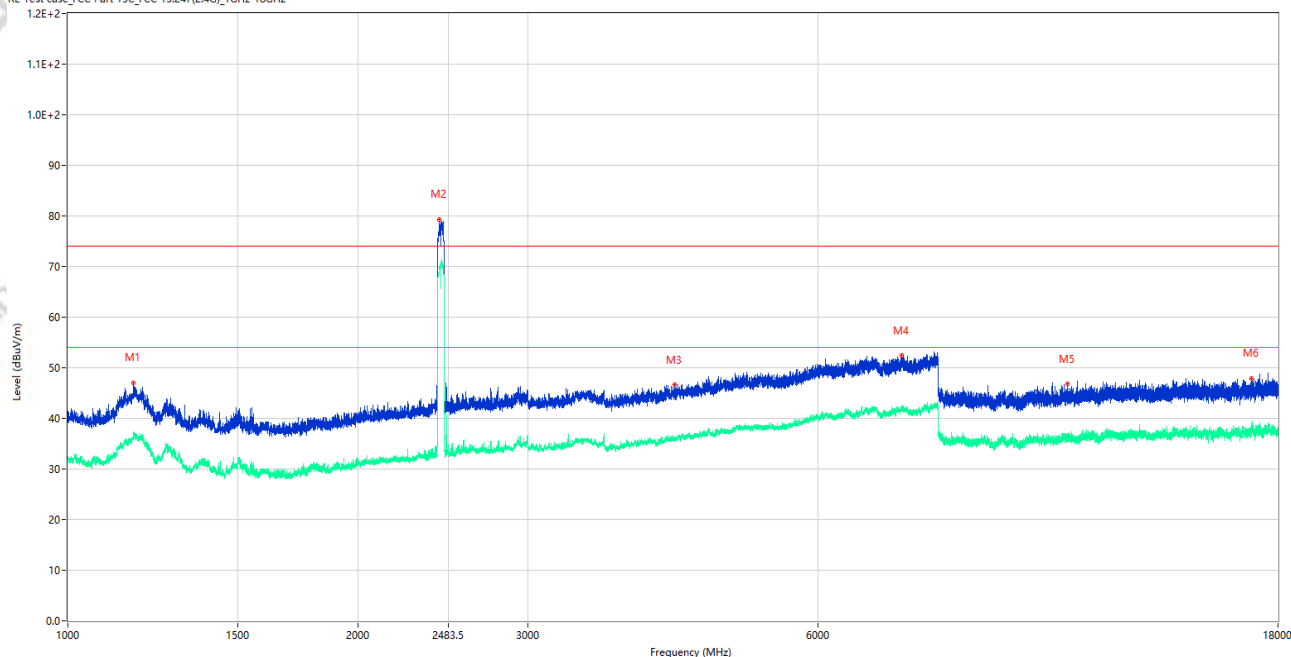


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1168.500	47.09	-15.49	74.0	26.91	Peak	60.00	150	Vertical	Pass
1**	1168.500	37.34	-15.49	54.0	16.66	AV	60.00	150	Vertical	Pass
2	2428.500	79.36	-12.27	74.0	-5.36	Peak	350.00	150	Vertical	N/A
2**	2428.500	69.81	-12.27	54.0	-15.81	AV	350.00	150	Vertical	N/A
3	4257.000	46.60	-4.01	74.0	27.40	Peak	360.00	150	Vertical	Pass
3**	4257.000	35.54	-4.01	54.0	18.46	AV	360.00	150	Vertical	Pass
4	7333.000	52.39	0.98	74.0	21.61	Peak	95.00	150	Vertical	Pass
4**	7333.000	42.17	0.98	54.0	11.83	AV	95.00	150	Vertical	Pass
5	10883.500	46.83	-3.19	74.0	27.17	Peak	0.00	150	Vertical	Pass
5**	10883.500	36.02	-3.19	54.0	17.98	AV	0.00	150	Vertical	Pass
6	16896.000	47.89	-0.49	74.0	26.11	Peak	39.00	150	Vertical	Pass
6**	16896.000	38.26	-0.49	54.0	15.74	AV	39.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_20.29.01

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n40 CH6 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01

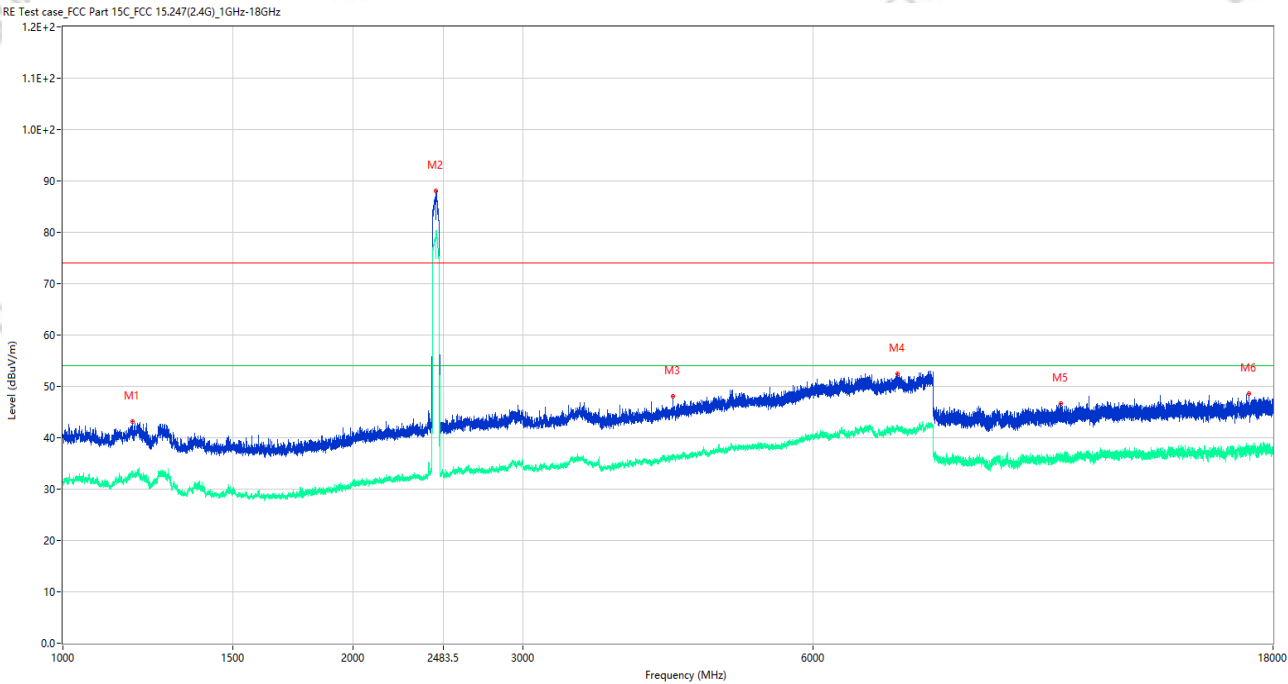

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1180.500	43.22	-15.78	74.0	30.78	Peak	41.00	150	Horizontal	Pass
1**	1180.500	32.69	-15.78	54.0	21.31	AV	41.00	150	Horizontal	Pass
2	2438.750	88.12	-12.37	74.0	-14.12	Peak	86.00	150	Horizontal	N/A
2**	2438.750	80.27	-12.37	54.0	-26.27	AV	86.00	150	Horizontal	N/A
3	4296.000	48.15	-3.86	74.0	25.85	Peak	256.00	150	Horizontal	Pass
3**	4296.000	36.12	-3.86	54.0	17.88	AV	256.00	150	Horizontal	Pass
4	7335.500	52.41	1.03	74.0	21.59	Peak	47.00	150	Horizontal	Pass
4**	7335.500	42.18	1.03	54.0	11.82	AV	47.00	150	Horizontal	Pass
5	10836.000	46.64	-3.38	74.0	27.36	Peak	123.00	150	Horizontal	Pass
5**	10836.000	36.46	-3.38	54.0	17.54	AV	123.00	150	Horizontal	Pass
6	17001.000	48.65	-1.31	74.0	25.35	Peak	350.00	150	Horizontal	Pass
6**	17001.000	37.28	-1.31	54.0	16.72	AV	350.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26010331

Test Time: 2026-03-13_00.10.54

EUT Name:	Rugged Tablet PC	Temp.(°C):	23.2
Model Number:	M101Q9	Humidity (%RH):	51
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	Normal working Link(2.4G WIFI)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器+数据线: A01 ANT0

RE Test case_FCC Part 15C_247(2.4G)_30MHz-1GHz

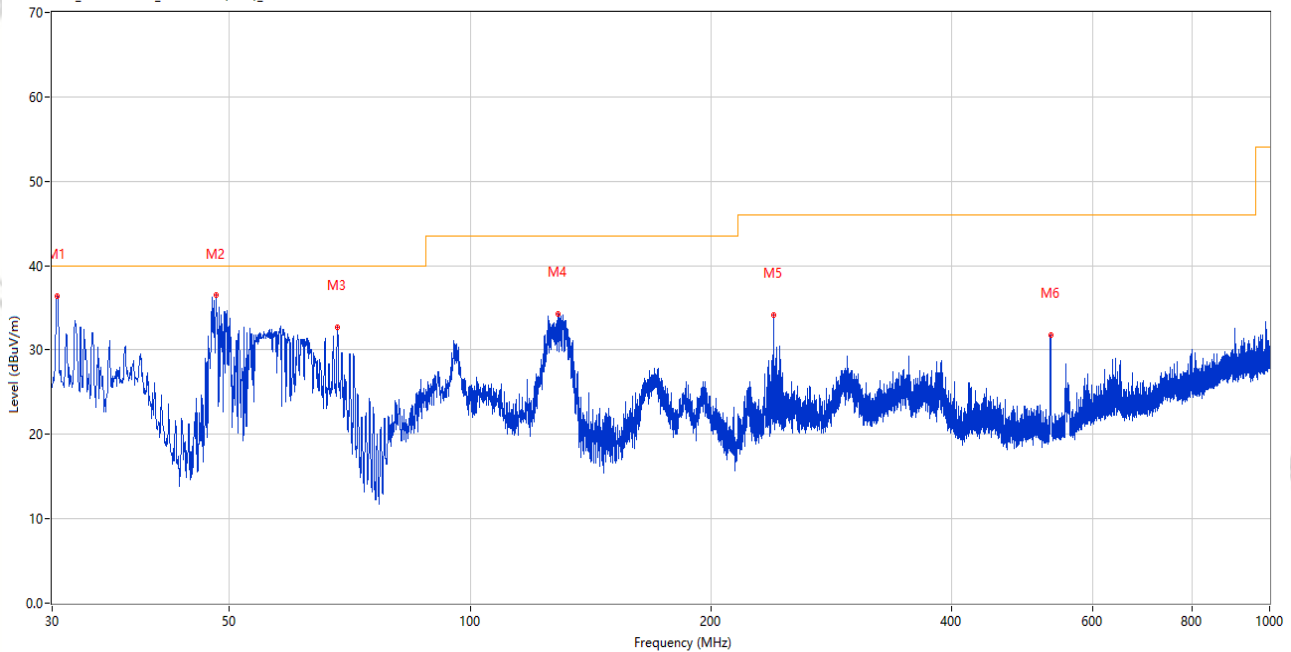

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.436	36.34	-28.97	40.0	3.66	Peak	0.00	100	Vertical	Pass
2	48.090	36.46	-24.52	40.0	3.54	Peak	74.00	200	Vertical	Pass
3	68.218	32.73	-28.39	40.0	7.27	Peak	290.00	100	Vertical	Pass
4	128.746	34.31	-28.98	43.5	9.19	Peak	138.00	200	Vertical	Pass
5	240.005	34.17	-24.48	46.0	11.83	Peak	360.00	200	Vertical	Pass
6	533.236	31.72	-17.34	46.0	14.28	Peak	174.00	100	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-13_00.13.44

EUT Name: Rugged Tablet PC

Temp.(°C): 23.2

Model Number: M101Q9

Humidity (%RH): 51

Sample Number: CC2511399-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: Normal working Link(2.4G WIFI)


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器+数据线: A01 ANT0

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

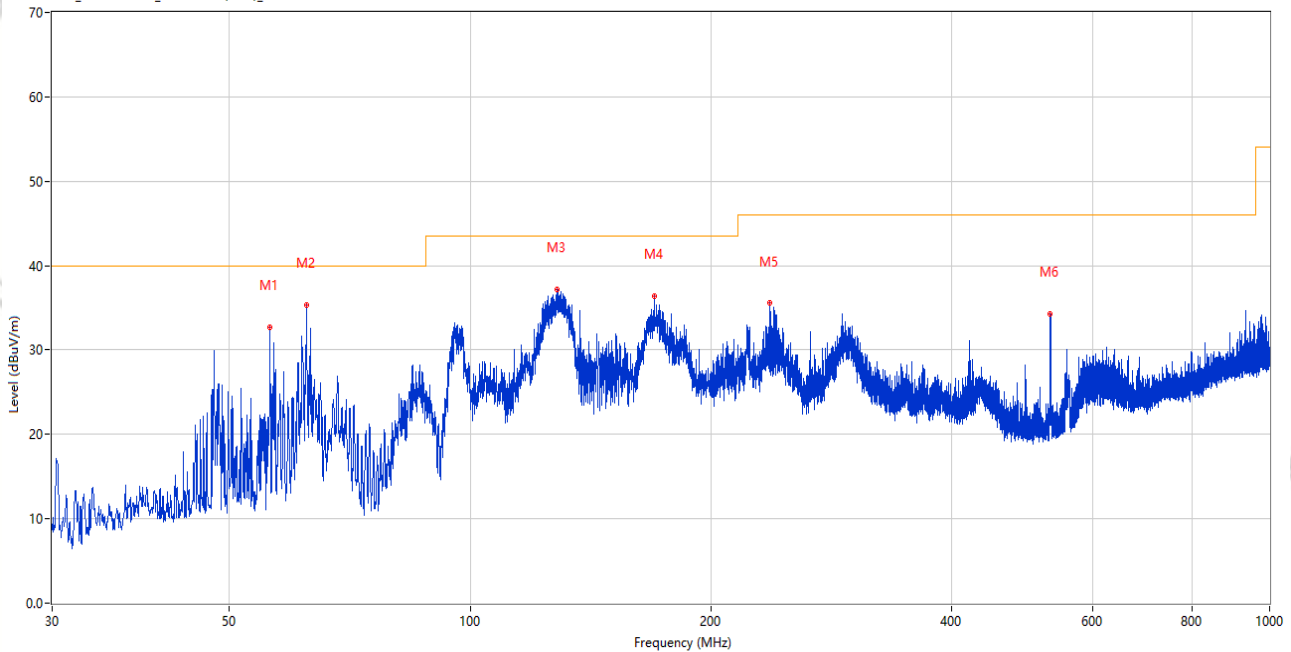


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	56.142	32.66	-25.23	40.0	7.34	Peak	10.00	100	Horizontal	Pass
2	62.398	35.31	-26.61	40.0	4.69	Peak	187.00	200	Horizontal	Pass
3	128.309	37.13	-28.94	43.5	6.37	Peak	123.00	200	Horizontal	Pass
4	169.777	36.36	-28.40	43.5	7.14	Peak	119.00	100	Horizontal	Pass
5	236.852	35.53	-24.68	46.0	10.47	Peak	0.00	100	Horizontal	Pass
6	531.102	34.23	-17.42	46.0	11.77	Peak	273.00	200	Horizontal	Pass

Aux. Antenna Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_21.27.53

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH6 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

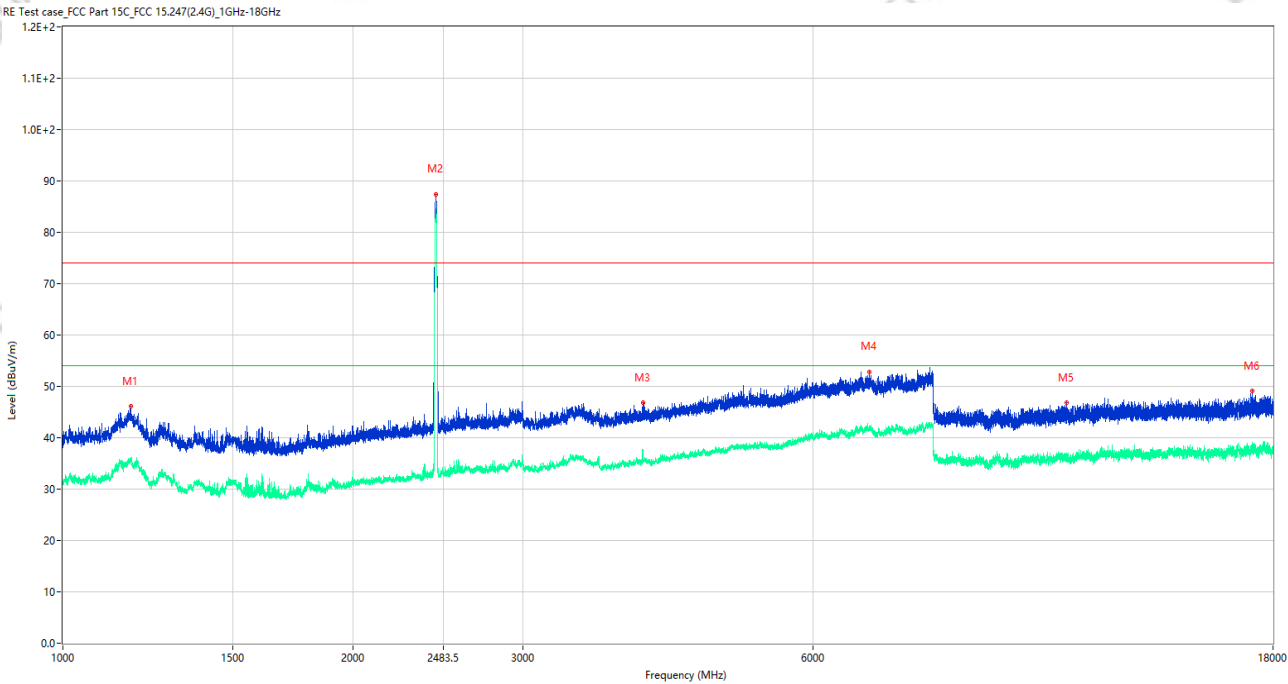


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1176.500	46.07	-15.67	74.0	27.93	Peak	62.00	150	Vertical	Pass
1**	1176.500	35.21	-15.67	54.0	18.79	AV	62.00	150	Vertical	Pass
2	2438.250	87.44	-12.38	74.0	-13.44	Peak	172.00	150	Vertical	N/A
2**	2438.250	84.55	-12.38	54.0	-30.55	AV	172.00	150	Vertical	N/A
3	3994.500	46.83	-4.81	74.0	27.17	Peak	127.00	150	Vertical	Pass
3**	3994.500	37.15	-4.81	54.0	16.85	AV	127.00	150	Vertical	Pass
4	6862.000	52.89	0.94	74.0	21.11	Peak	11.00	150	Vertical	Pass
4**	6862.000	41.72	0.94	54.0	12.28	AV	11.00	150	Vertical	Pass
5	11000.001	46.83	-2.70	74.0	27.17	Peak	178.00	150	Vertical	Pass
5**	11000.001	36.72	-2.70	54.0	17.28	AV	178.00	150	Vertical	Pass
6	17116.000	49.09	-0.17	74.0	24.91	Peak	292.00	150	Vertical	Pass
6**	17116.000	37.30	-0.17	54.0	16.70	AV	292.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_21.23.10

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH6 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

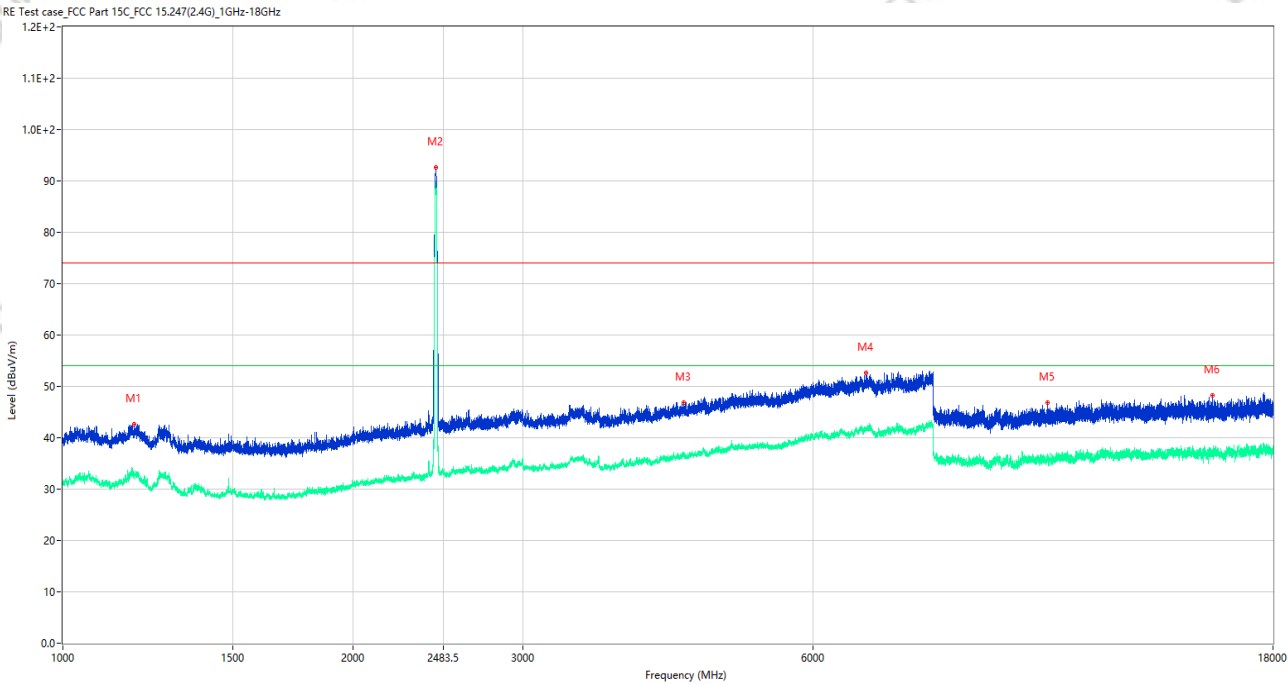


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1186.750	42.71	-15.88	74.0	31.29	Peak	219.00	150	Horizontal	Pass
1**	1186.750	33.28	-15.88	54.0	20.72	AV	219.00	150	Horizontal	Pass
2	2438.250	92.68	-12.38	74.0	-18.68	Peak	45.00	150	Horizontal	N/A
2**	2438.250	89.82	-12.38	54.0	-35.82	AV	45.00	150	Horizontal	N/A
3	4405.500	46.92	-3.02	74.0	27.08	Peak	2.00	150	Horizontal	Pass
3**	4405.500	36.67	-3.02	54.0	17.33	AV	2.00	150	Horizontal	Pass
4	6806.000	52.66	0.40	74.0	21.34	Peak	360.00	150	Horizontal	Pass
4**	6806.000	41.64	0.40	54.0	12.36	AV	360.00	150	Horizontal	Pass
5	10502.000	46.90	-3.25	74.0	27.10	Peak	125.00	150	Horizontal	Pass
5**	10502.000	35.98	-3.25	54.0	18.02	AV	125.00	150	Horizontal	Pass
6	15581.000	48.27	-2.27	74.0	25.73	Peak	349.00	150	Horizontal	Pass
6**	15581.000	37.00	-2.27	54.0	17.00	AV	349.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_21.42.26

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH6 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

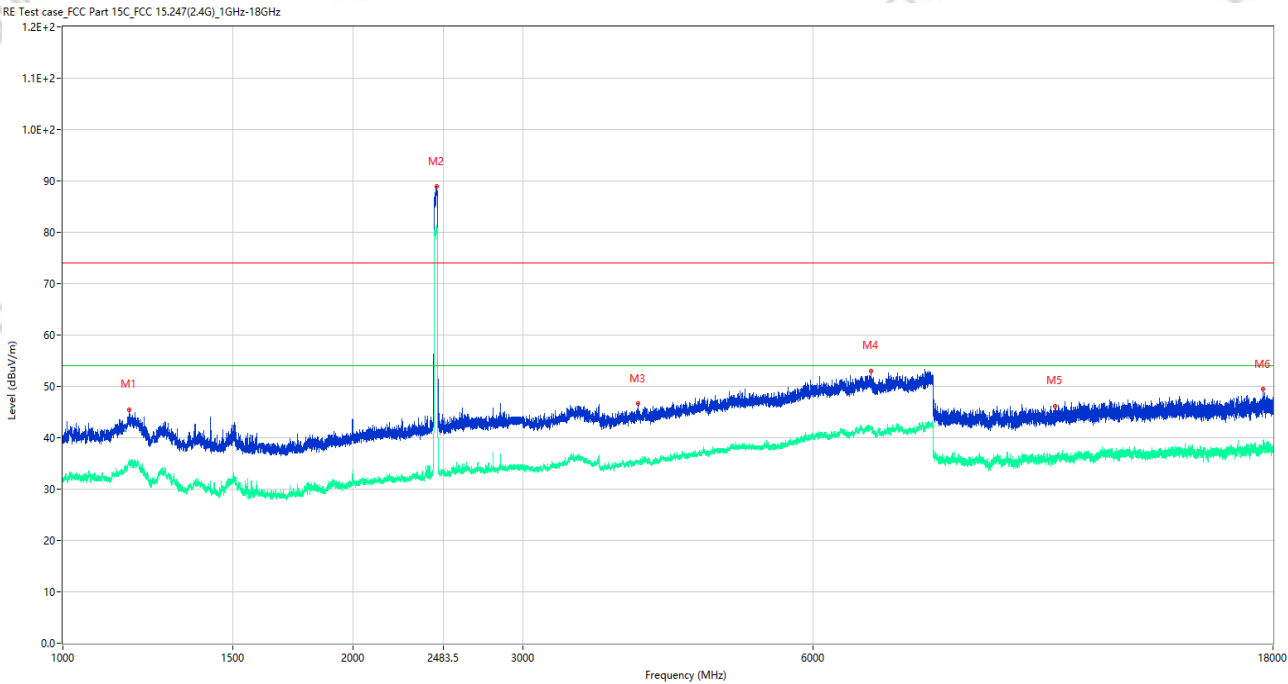


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1171.000	45.47	-15.53	74.0	28.53	Peak	65.00	150	Vertical	Pass
1**	1171.000	35.14	-15.53	54.0	18.86	AV	65.00	150	Vertical	Pass
2	2444.000	88.89	-12.47	74.0	-14.89	Peak	172.00	150	Vertical	N/A
2**	2444.000	81.25	-12.47	54.0	-27.25	AV	172.00	150	Vertical	N/A
3	3947.000	46.73	-4.38	74.0	27.27	Peak	301.00	150	Vertical	Pass
3**	3947.000	35.13	-4.38	54.0	18.87	AV	301.00	150	Vertical	Pass
4	6895.500	53.04	0.64	74.0	20.96	Peak	358.00	150	Vertical	Pass
4**	6895.500	41.82	0.64	54.0	12.18	AV	358.00	150	Vertical	Pass
5	10693.000	46.21	-4.05	74.0	27.79	Peak	265.00	150	Vertical	Pass
5**	10693.000	35.46	-4.05	54.0	18.54	AV	265.00	150	Vertical	Pass
6	17589.000	49.47	0.70	74.0	24.53	Peak	206.00	150	Vertical	Pass
6**	17589.000	38.51	0.70	54.0	15.49	AV	206.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_21.27.53

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH6 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

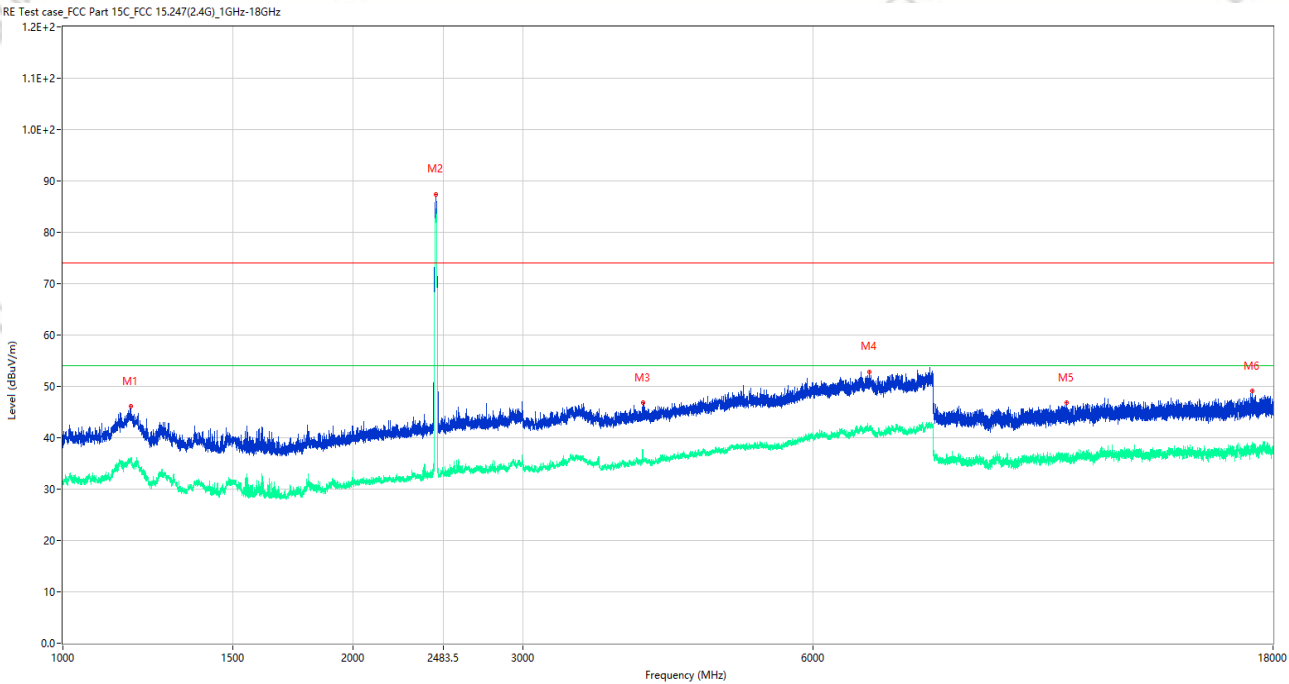

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1176.500	46.07	-15.67	74.0	27.93	Peak	62.00	150	Horizontal	Pass
1**	1176.500	35.21	-15.67	54.0	18.79	AV	62.00	150	Horizontal	Pass
2	2438.250	87.44	-12.38	74.0	-13.44	Peak	172.00	150	Horizontal	N/A
2**	2438.250	84.55	-12.38	54.0	-30.55	AV	172.00	150	Horizontal	N/A
3	3994.500	46.83	-4.81	74.0	27.17	Peak	127.00	150	Horizontal	Pass
3**	3994.500	37.15	-4.81	54.0	16.85	AV	127.00	150	Horizontal	Pass
4	6862.000	52.89	0.94	74.0	21.11	Peak	11.00	150	Horizontal	Pass
4**	6862.000	41.72	0.94	54.0	12.28	AV	11.00	150	Horizontal	Pass
5	11000.001	46.83	-2.70	74.0	27.17	Peak	178.00	150	Horizontal	Pass
5**	11000.001	36.72	-2.70	54.0	17.28	AV	178.00	150	Horizontal	Pass
6	17116.000	49.09	-0.17	74.0	24.91	Peak	292.00	150	Horizontal	Pass
6**	17116.000	37.30	-0.17	54.0	16.70	AV	292.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_22.19.48

EUT Name: Rugged Tablet PC

Temp.(°C): 21.1

Model Number: M101Q9

Humidity (%RH): 42

Sample Number: CC2511399-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11n20 CH6 P=14


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器+数据线: A01 ANT1

RE Test case FCC Part 15C FCC 15.247(2.4G)_1GHz-18GHz

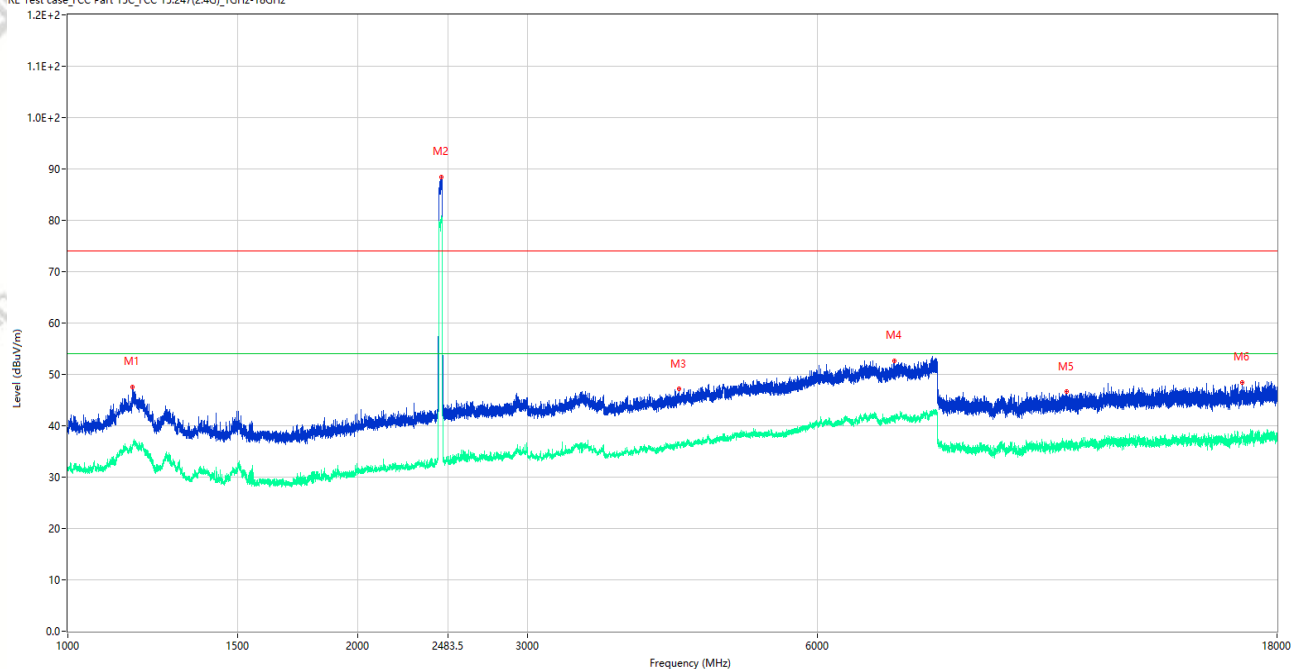


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1166.500	47.58	-15.46	74.0	26.42	Peak	55.00	150	Vertical	Pass
1**	1166.500	35.96	-15.46	54.0	18.04	AV	55.00	150	Vertical	Pass
2	2442.000	88.51	-12.43	74.0	-14.51	Peak	170.00	150	Vertical	N/A
2**	2442.000	80.69	-12.43	54.0	-26.69	AV	170.00	150	Vertical	N/A
3	4307.000	47.20	-3.51	74.0	26.80	Peak	112.00	150	Vertical	Pass
3**	4307.000	36.43	-3.51	54.0	17.57	AV	112.00	150	Vertical	Pass
4	7205.000	52.61	0.79	74.0	21.39	Peak	266.00	150	Vertical	Pass
4**	7205.000	41.40	0.79	54.0	12.60	AV	266.00	150	Vertical	Pass
5	10887.500	46.65	-3.30	74.0	27.35	Peak	94.00	150	Vertical	Pass
5**	10887.500	36.12	-3.30	54.0	17.88	AV	94.00	150	Vertical	Pass
6	16559.000	48.44	-0.94	74.0	25.56	Peak	94.00	150	Vertical	Pass
6**	16559.000	37.92	-0.94	54.0	16.08	AV	94.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_22.23.54

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH6 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

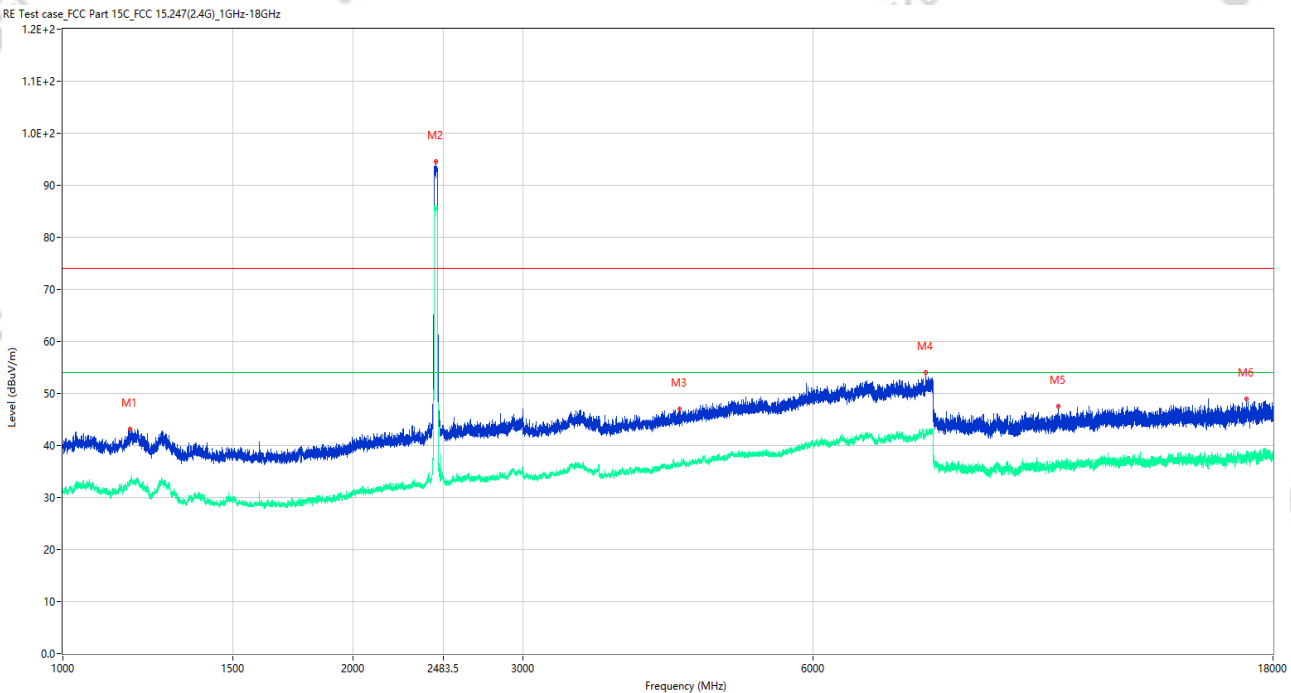


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1175.000	43.18	-15.64	74.0	30.82	Peak	172.00	150	Horizontal	Pass
1**	1175.000	32.46	-15.64	54.0	21.54	AV	172.00	150	Horizontal	Pass
2	2438.500	94.62	-12.37	74.0	-20.62	Peak	81.00	150	Horizontal	N/A
2**	2438.500	85.30	-12.37	54.0	-31.30	AV	81.00	150	Horizontal	N/A
3	4364.500	47.07	-3.34	74.0	26.93	Peak	0.00	150	Horizontal	Pass
3**	4364.500	36.36	-3.34	54.0	17.64	AV	0.00	150	Horizontal	Pass
4	7855.000	54.03	1.56	74.0	19.97	Peak	145.00	150	Horizontal	Pass
4**	7855.000	42.36	1.56	54.0	11.64	AV	145.00	150	Horizontal	Pass
5	10769.000	47.61	-3.33	74.0	26.39	Peak	13.00	150	Horizontal	Pass
5**	10769.000	36.80	-3.33	54.0	17.20	AV	13.00	150	Horizontal	Pass
6	16900.500	49.03	-0.91	74.0	24.97	Peak	237.00	150	Horizontal	Pass
6**	16900.500	38.34	-0.91	54.0	15.66	AV	237.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_22.46.52

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n40 CH6 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

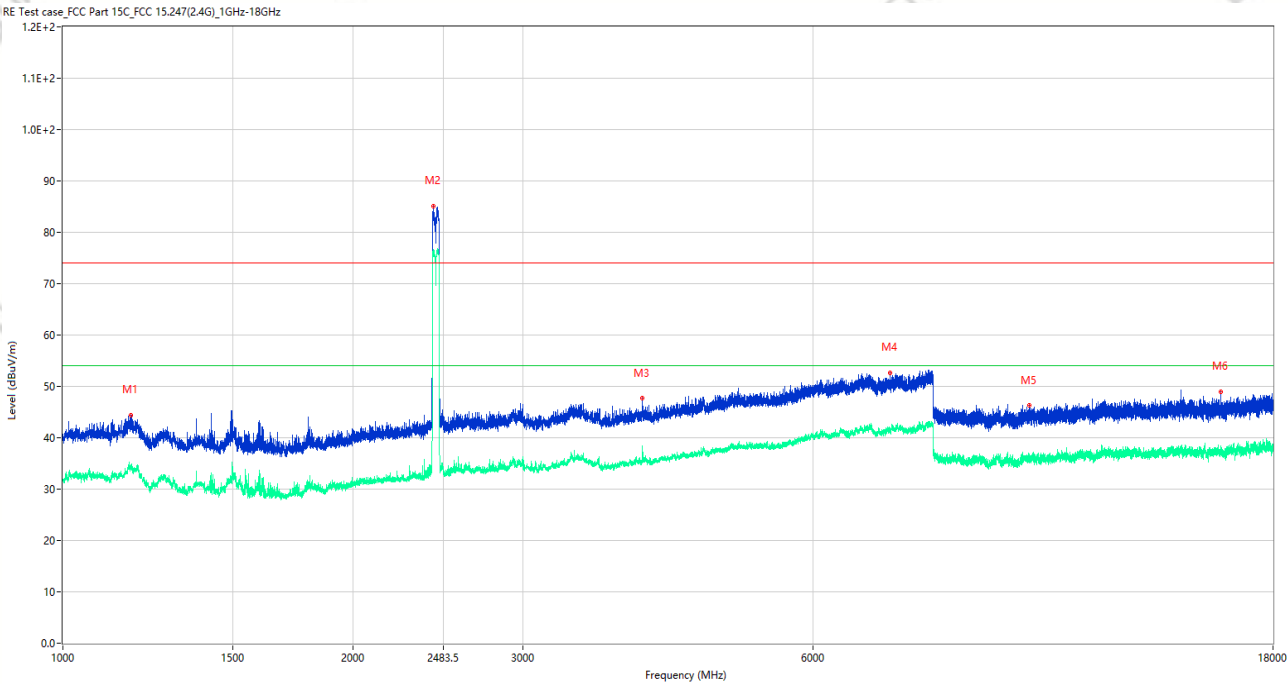


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1176.500	44.47	-15.67	74.0	29.53	Peak	63.00	150	Vertical	Pass
1**	1176.500	34.02	-15.67	54.0	19.98	AV	63.00	150	Vertical	Pass
2	2422.750	85.11	-12.30	74.0	-11.11	Peak	168.00	150	Vertical	N/A
2**	2422.750	76.17	-12.30	54.0	-22.17	AV	168.00	150	Vertical	N/A
3	3993.000	47.73	-4.84	74.0	26.27	Peak	135.00	150	Vertical	Pass
3**	3993.000	35.61	-4.84	54.0	18.39	AV	135.00	150	Vertical	Pass
4	7205.500	52.58	0.80	74.0	21.42	Peak	308.00	150	Vertical	Pass
4**	7205.500	41.36	0.80	54.0	12.64	AV	308.00	150	Vertical	Pass
5	10052.000	46.37	-3.99	74.0	27.63	Peak	349.00	150	Vertical	Pass
5**	10052.000	35.34	-3.99	54.0	18.66	AV	349.00	150	Vertical	Pass
6	15880.500	48.88	-1.44	74.0	25.12	Peak	11.00	150	Vertical	Pass
6**	15880.500	37.09	-1.44	54.0	16.91	AV	11.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_22.42.42

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n40 CH6 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

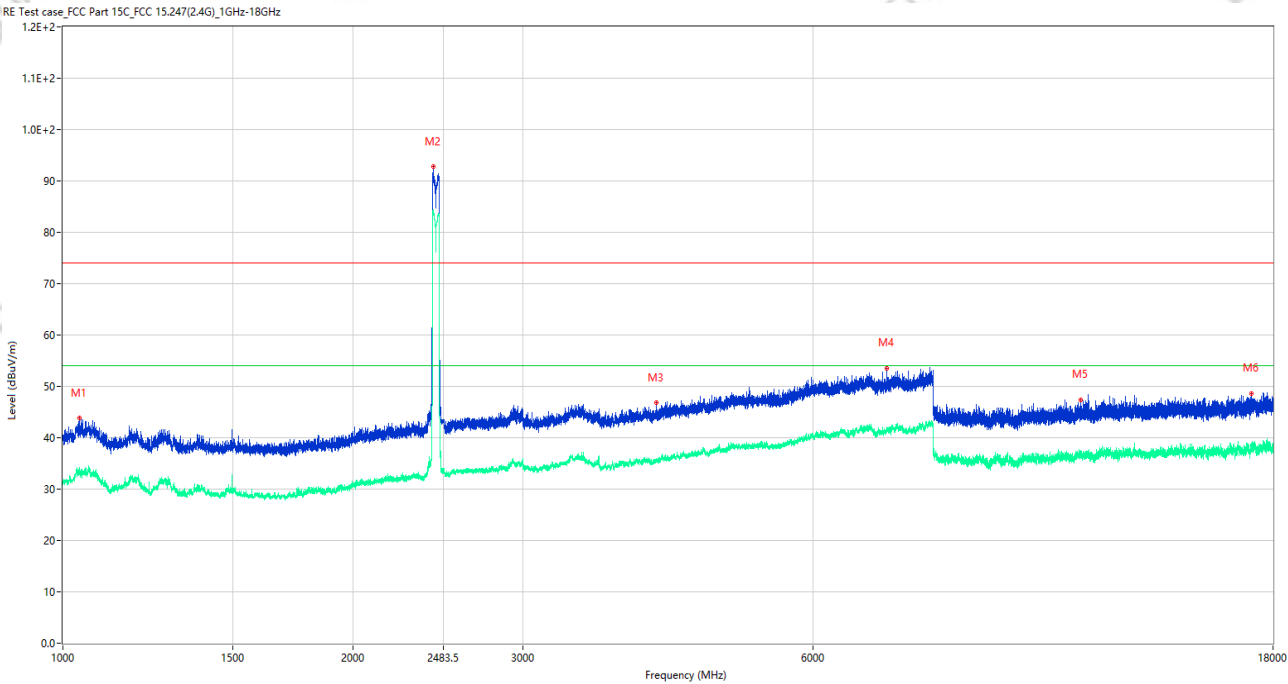

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1040.250	43.84	-15.37	74.0	30.16	Peak	102.00	150	Horizontal	Pass
1**	1040.250	33.54	-15.37	54.0	20.46	AV	102.00	150	Horizontal	Pass
2	2422.000	92.76	-12.32	74.0	-18.76	Peak	50.00	150	Horizontal	N/A
2**	2422.000	83.71	-12.32	54.0	-29.71	AV	50.00	150	Horizontal	N/A
3	4124.500	46.89	-4.51	74.0	27.11	Peak	340.00	150	Horizontal	Pass
3**	4124.500	35.61	-4.51	54.0	18.39	AV	340.00	150	Horizontal	Pass
4	7154.000	53.55	0.13	74.0	20.45	Peak	206.00	150	Horizontal	Pass
4**	7154.000	41.63	0.13	54.0	12.37	AV	206.00	150	Horizontal	Pass
5	11366.500	47.38	-3.72	74.0	26.62	Peak	66.00	150	Horizontal	Pass
5**	11366.500	36.73	-3.72	54.0	17.27	AV	66.00	150	Horizontal	Pass
6	17093.000	48.61	-0.65	74.0	25.39	Peak	10.00	150	Horizontal	Pass
6**	17093.000	38.31	-0.65	54.0	15.69	AV	10.00	150	Horizontal	Pass