

**20140912\_System Check\_Dipole835V2 SN4d015**

Frequency: 835 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 835.3$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 55.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Body/Pin=100mW, d=15mm/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.15 mW/g


**Body/Pin=100mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.9 V/m; Power Drift = 0.054 dB

Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.916 mW/g; SAR(10 g) = 0.614 mW/g**

Maximum value of SAR (measured) = 1.16 mW/g

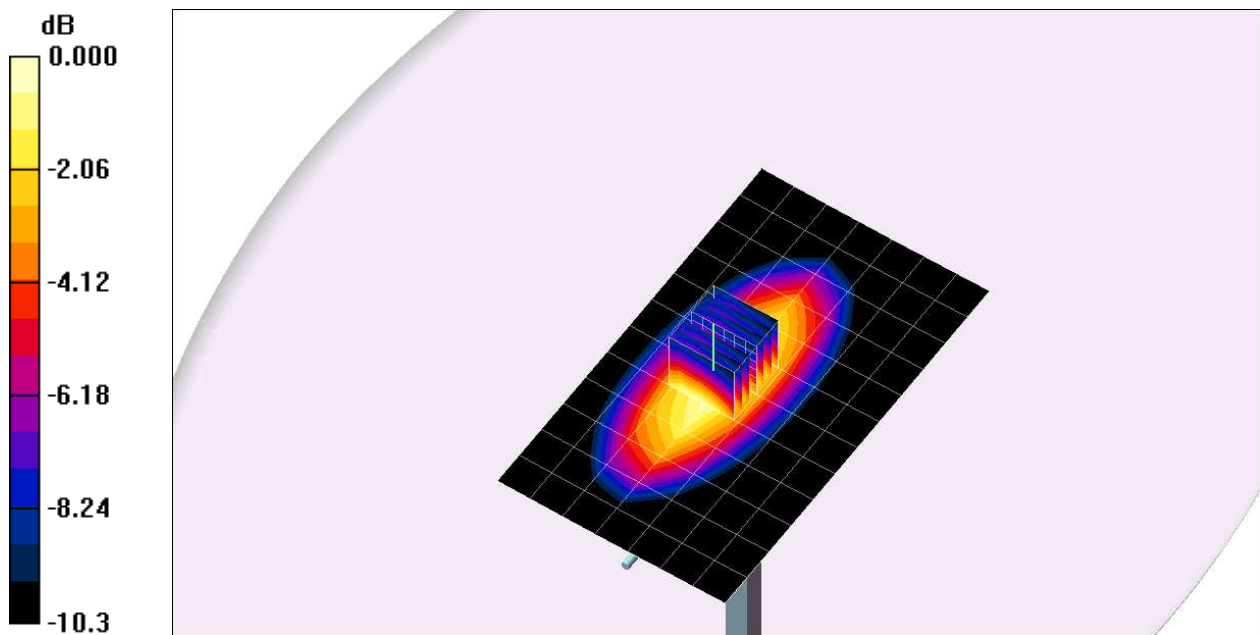


0 dB = 1.16mW/g

**20140912\_System Check\_Dipole835V2 SN4d015**

Frequency: 835 MHz; Duty Cycle: 1:1

**Body/Pin=100mW, d=15mm/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.08 mW/g

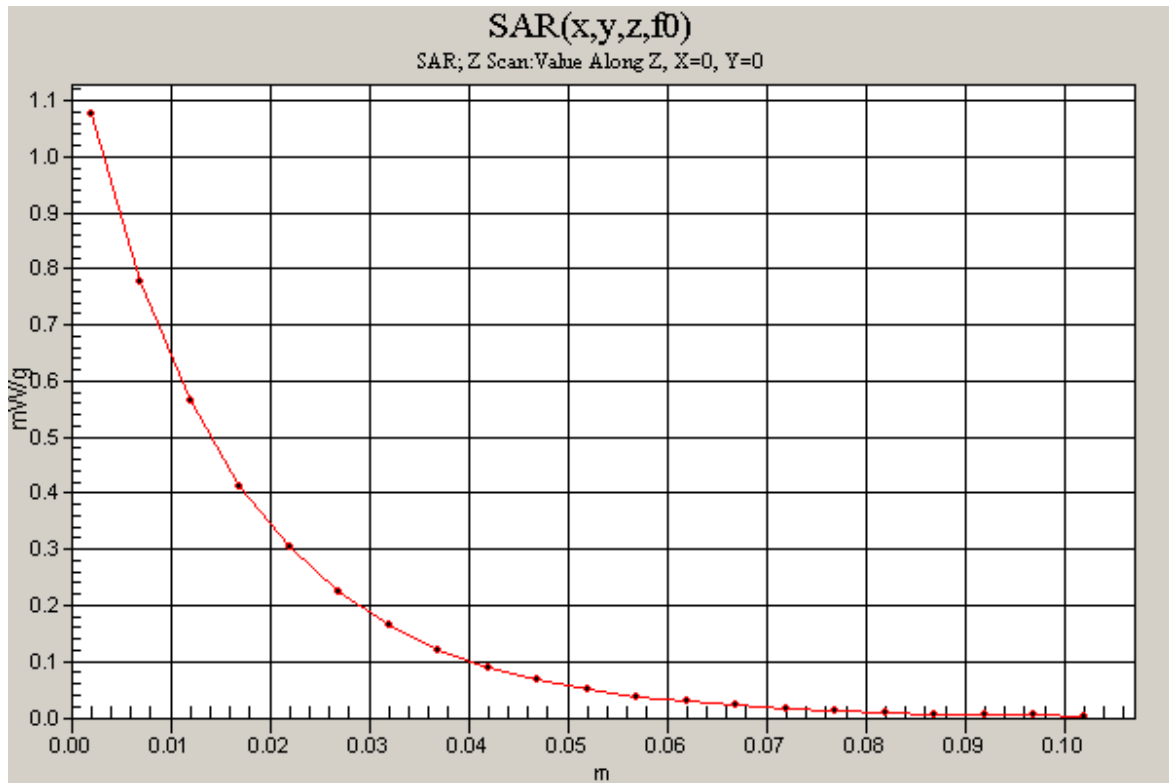

**20140914\_System Check\_Dipole1900V2 SN5d056**

Frequency: 1900 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.57$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Body/Pin=100mW, d=10mm/Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 4.71 mW/g

**Body/Pin=100mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 58.0 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 6.89 W/kg

**SAR(1 g) = 3.91 mW/g; SAR(10 g) = 2.07 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 5.49 mW/g

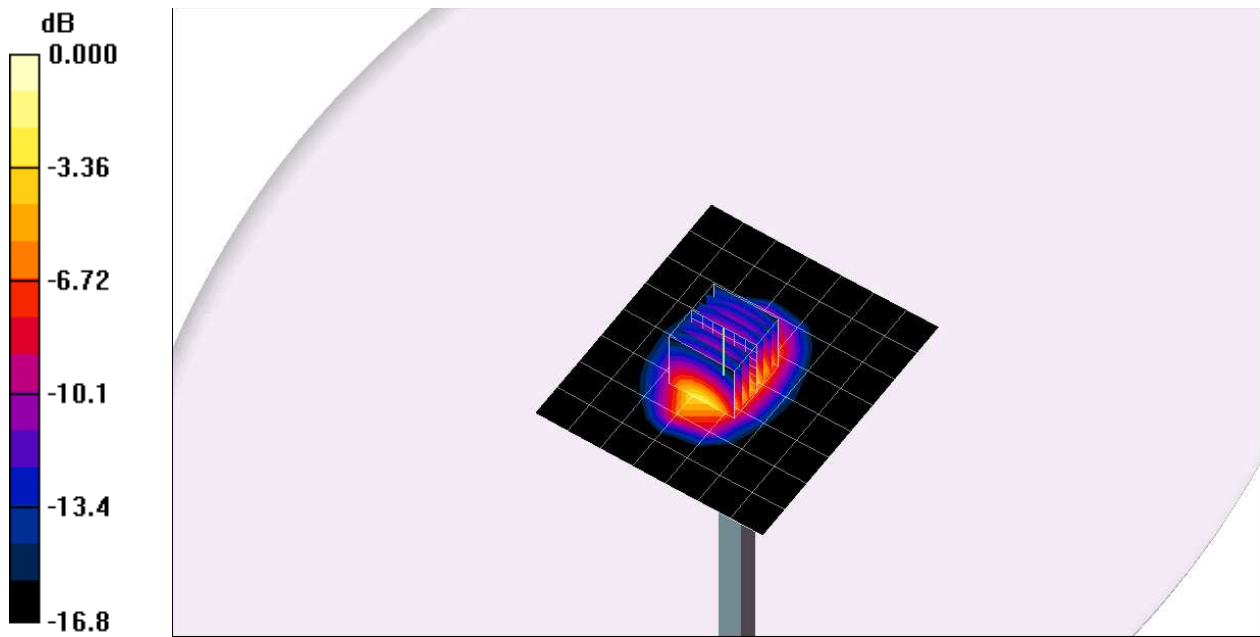


0 dB = 5.49mW/g

**20140914\_System Check\_Dipole1900V2 SN5d056**

Frequency: 1900 MHz; Duty Cycle: 1:1

**Body/Pin=100mW, d=10mm/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 5.35 mW/g

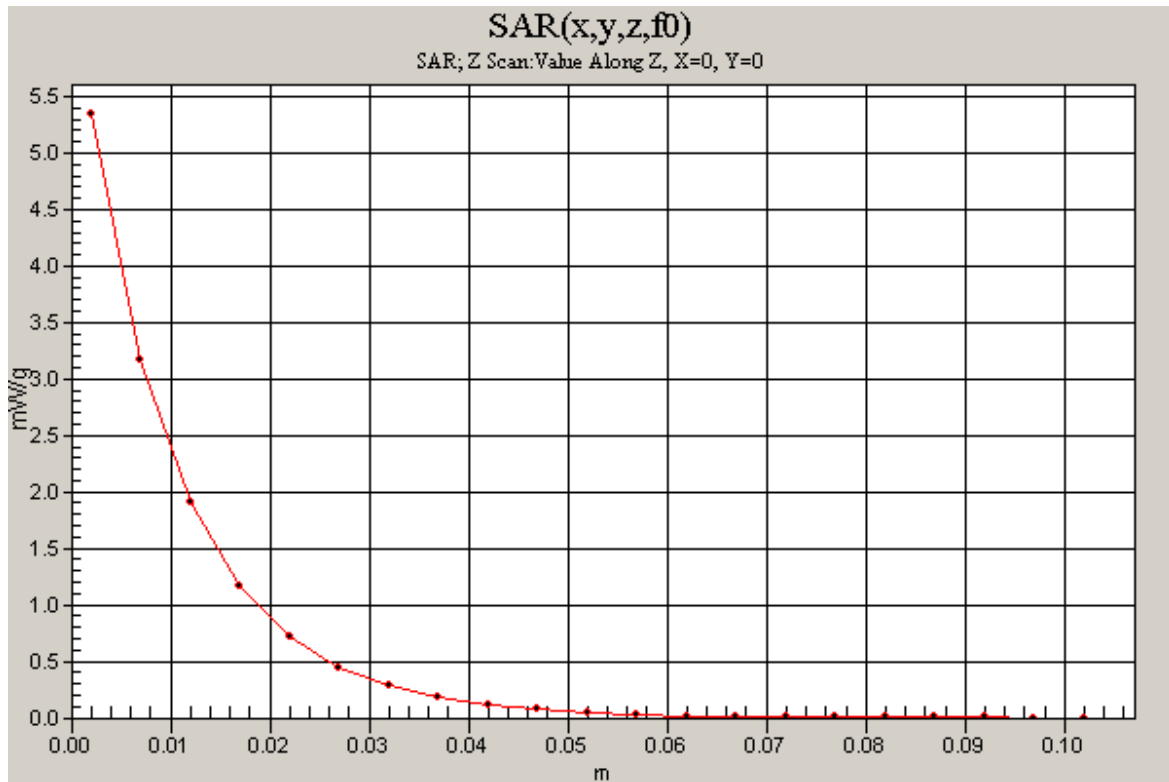

**20140915\_System Check\_Dipole1800V2 SN2d062**

Frequency: 1800 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1800$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 52.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Body/Pin=100mW, d=10mm/Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 5.13 mW/g

**Body/Pin=100mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 55.5 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 6.98 W/kg

**SAR(1 g) = 3.86 mW/g; SAR(10 g) = 2.02 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 5.50 mW/g

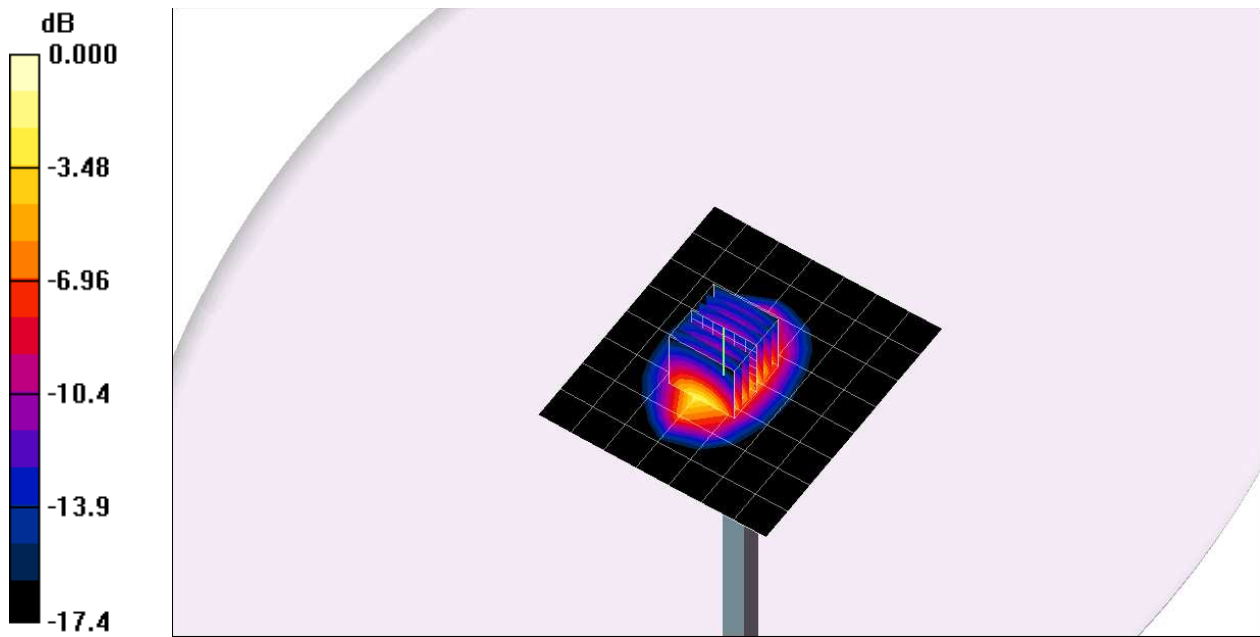


0 dB = 5.50mW/g

**20140915\_System Check\_Dipole1800V2 SN2d062**

Frequency: 1800 MHz; Duty Cycle: 1:1

**Body/Pin=100mW, d=10mm/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 4.36 mW/g

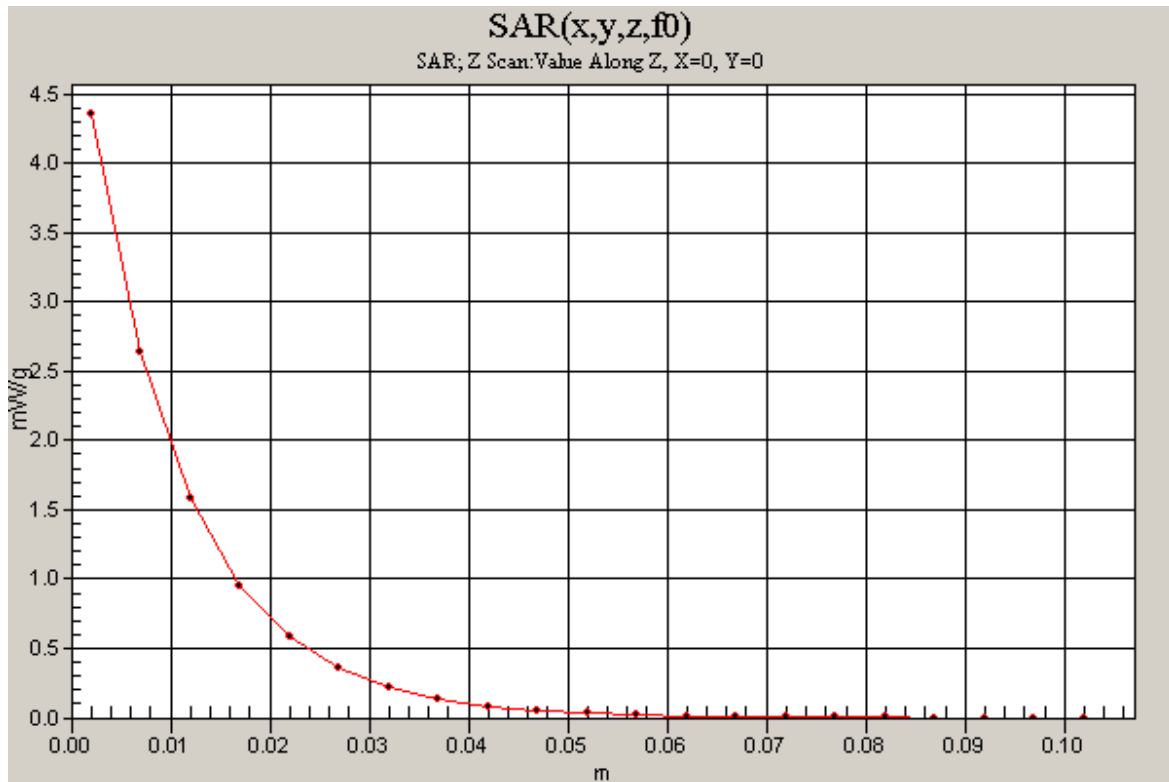

**20140916\_System Check\_Dipole750V2 SN2d062**

Frequency: 750 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 750$  MHz;  $\sigma = 0.954$  mho/m;  $\epsilon_r = 56.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.44, 9.44, 9.44); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Body/Pin=100mW, d=15mm/Area Scan (8x15x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.09 mW/g

**Body/Pin=100mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 34.8 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.897 mW/g; SAR(10 g) = 0.592 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.13 mW/g

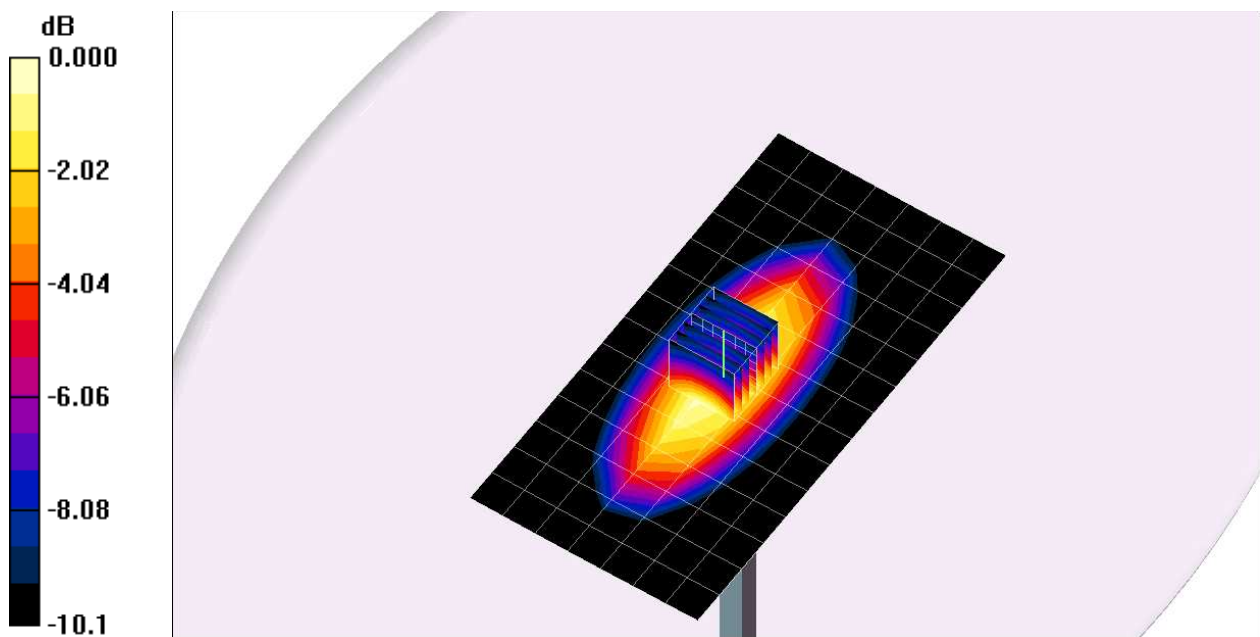


0 dB = 1.13mW/g

**20140916\_System Check\_Dipole750V2 SN2d062**

Frequency: 750 MHz; Duty Cycle: 1:1

**Body/Pin=100mW, d=15mm/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.07 mW/g

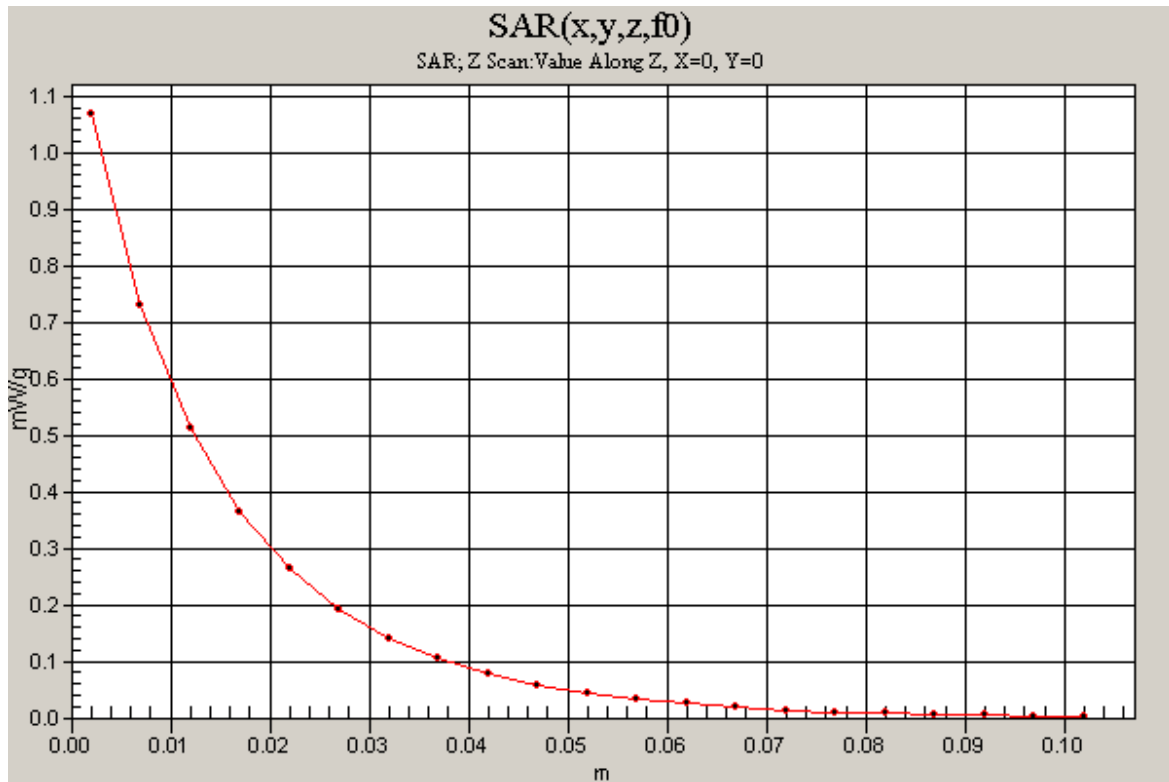

## GSM 850 Band

Frequency: 848.8 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C  
Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.993$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/GPRS 850 2 Slot/CH251/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.390 mW/g

**Rear Side/GPRS 850 2 Slot/CH251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.36 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 0.508 W/kg

**SAR(1 g) = 0.286 mW/g; SAR(10 g) = 0.167 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.399 mW/g

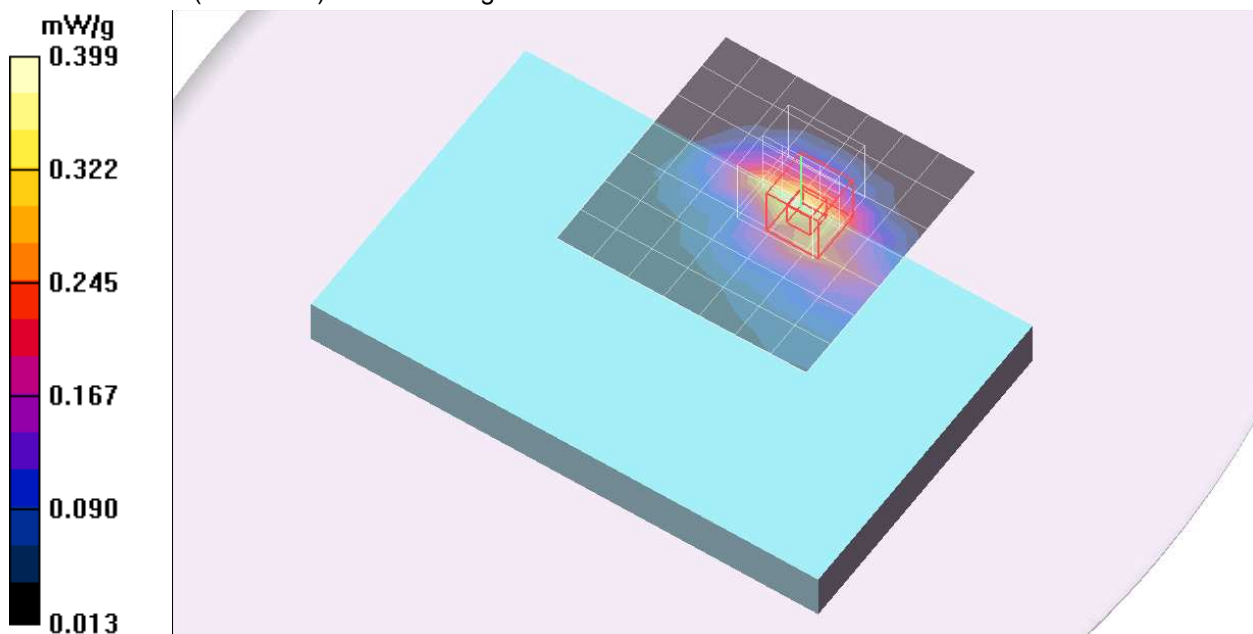

## GSM 850 Band

Frequency: 848.8 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C  
Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.993$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge1 Side/GPRS 850 2 Slot/CH251/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.017 mW/g

**Edge1 Side/GPRS 850 2 Slot/CH251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.25 V/m; Power Drift = -0.097 dB

Peak SAR (extrapolated) = 0.027 W/kg

**SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.0092 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.021 mW/g

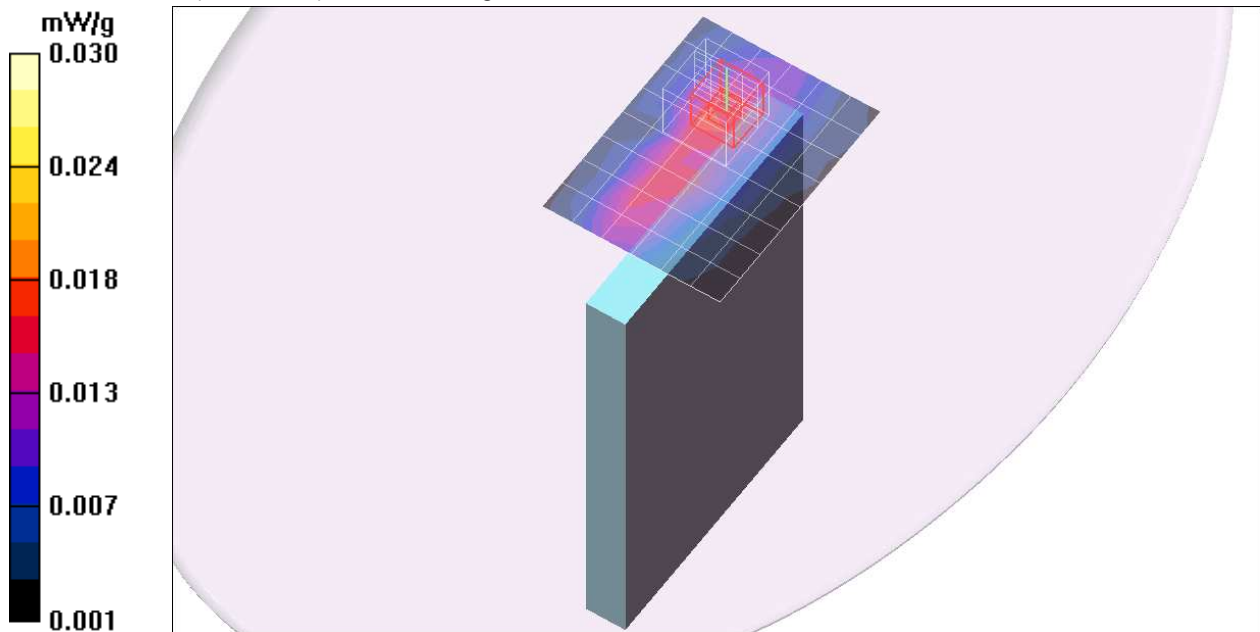

## GSM 850 Band

Frequency: 848.8 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C  
Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.993$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/GPRS 850 2 Slot/CH251/Area Scan (7x7x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.516 mW/g

**Edge2 Side/GPRS 850 2 Slot/CH251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.4 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.546 mW/g; SAR(10 g) = 0.293 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.847 mW/g

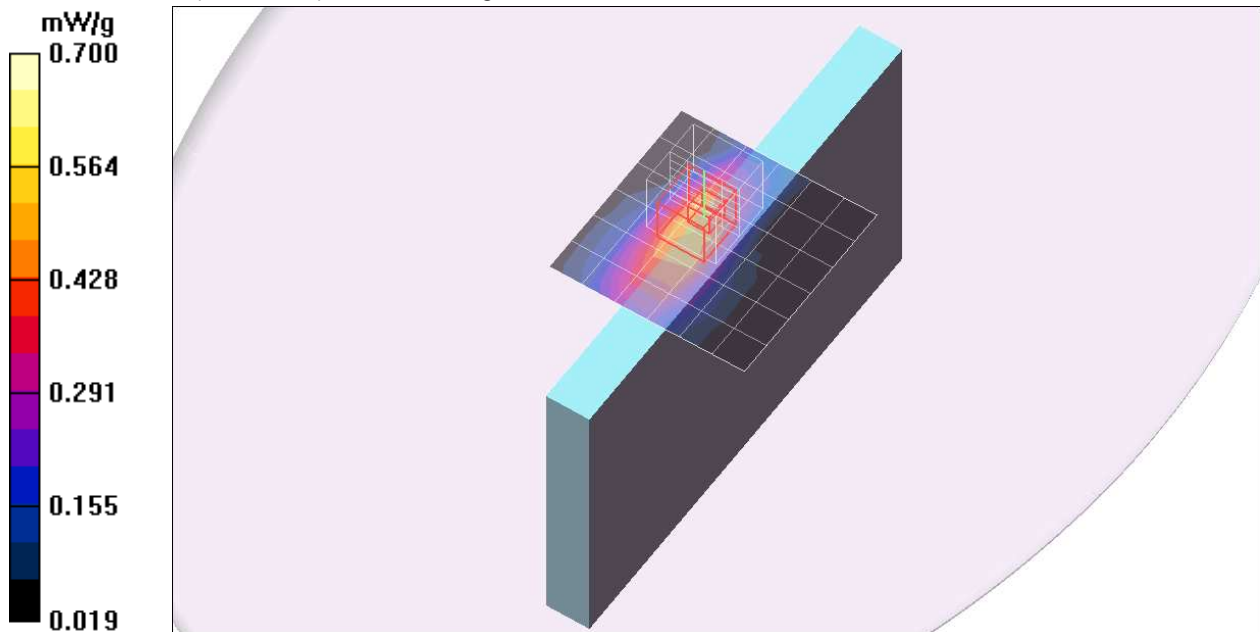


## GSM 850 Band

Frequency: 848.8 MHz; Duty Cycle: 1:4

**Edge2 Side/GPRS 850 2 Slot/CH251/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.691 mW/g

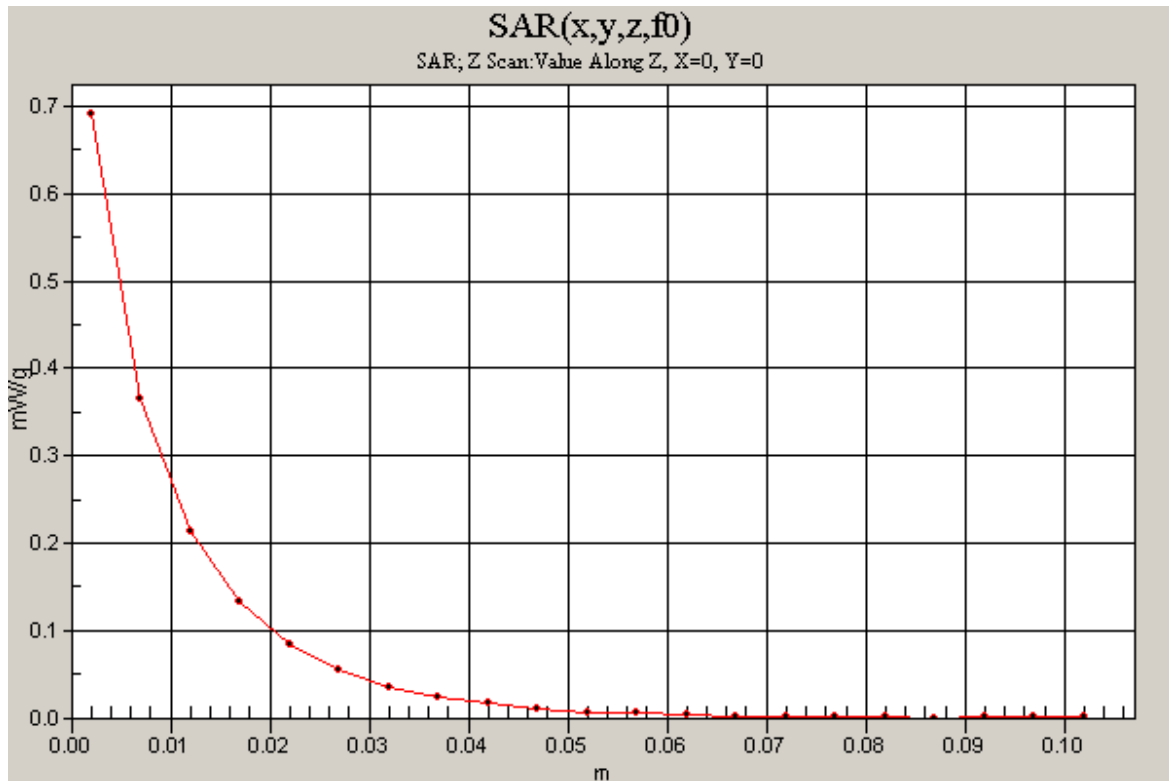

## GSM 850 Band

Frequency: 848.8 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C  
Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.993$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge3 Side/GPRS 850 2 Slot/CH251/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.045 mW/g

**Edge3 Side/GPRS 850 2 Slot/CH251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.16 V/m; Power Drift = -0.197 dB

Peak SAR (extrapolated) = 0.062 W/kg

**SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.027 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.052 mW/g

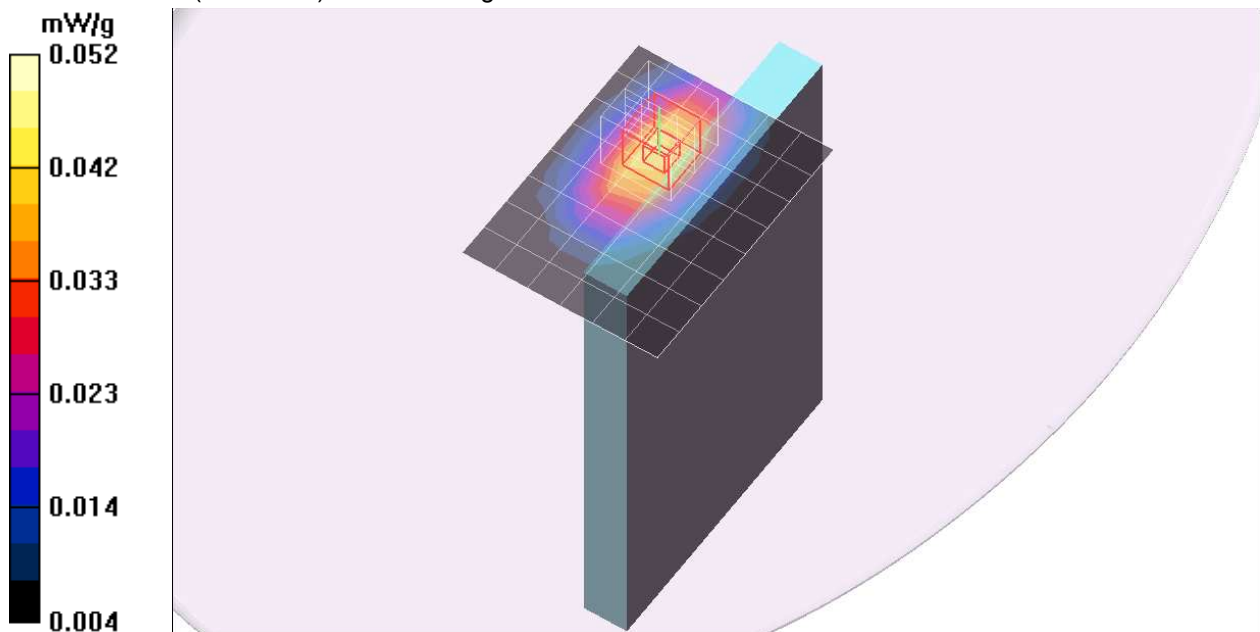

## GSM 850 Band

Frequency: 848.8 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C  
Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.993$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge4 Side/GPRS 850 2 Slot/CH251/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.012 mW/g

### Edge4 Side/GPRS 850 2 Slot/CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.84 V/m; Power Drift = -0.142 dB

Peak SAR (extrapolated) = 0.013 W/kg

**SAR(1 g) = 0.00853 mW/g; SAR(10 g) = 0.00575 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.010 mW/g

### Edge4 Side/GPRS 850 2 Slot/CH251/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 2.84 V/m; Power Drift = -0.142 dB

Peak SAR (extrapolated) = 0.010 W/kg

**SAR(1 g) = 0.00685 mW/g; SAR(10 g) = 0.00407 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.008 mW/g

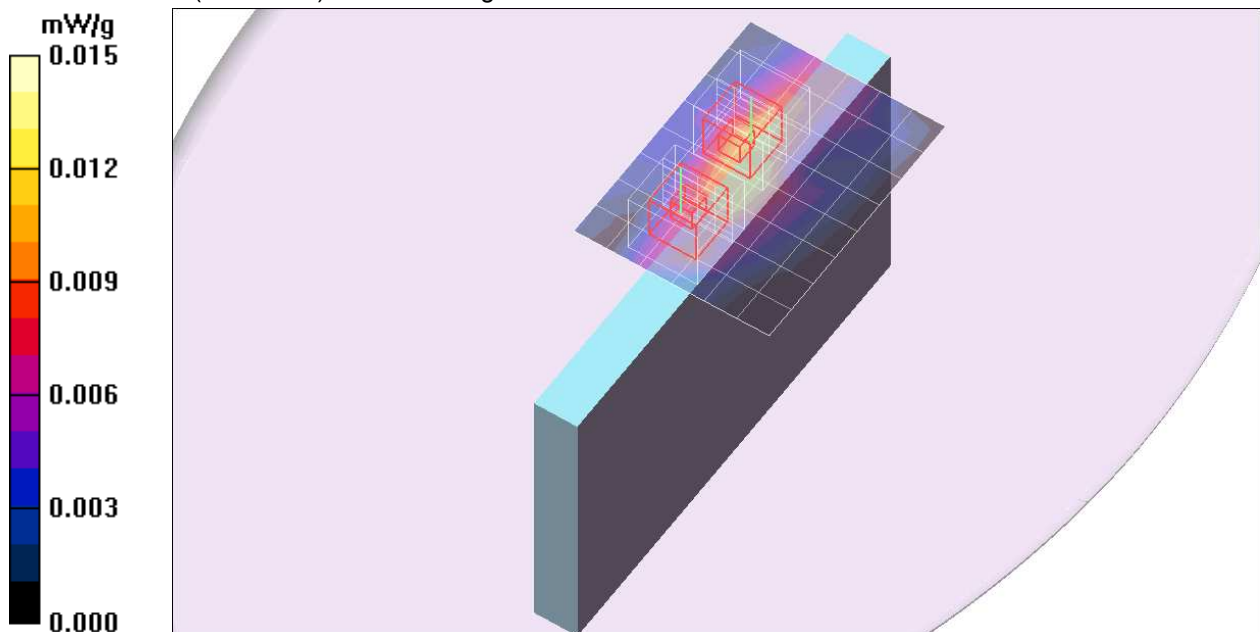

## GPRS 1900 Band

Frequency: 1880 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/GPRS 1900 2 Slot/CH661/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.36 mW/g

**Rear Side/GPRS 1900 2 Slot/CH661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm,

dy=8mm, dz=5mm


Reference Value = 11.1 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.917 mW/g; SAR(10 g) = 0.510 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.22 mW/g

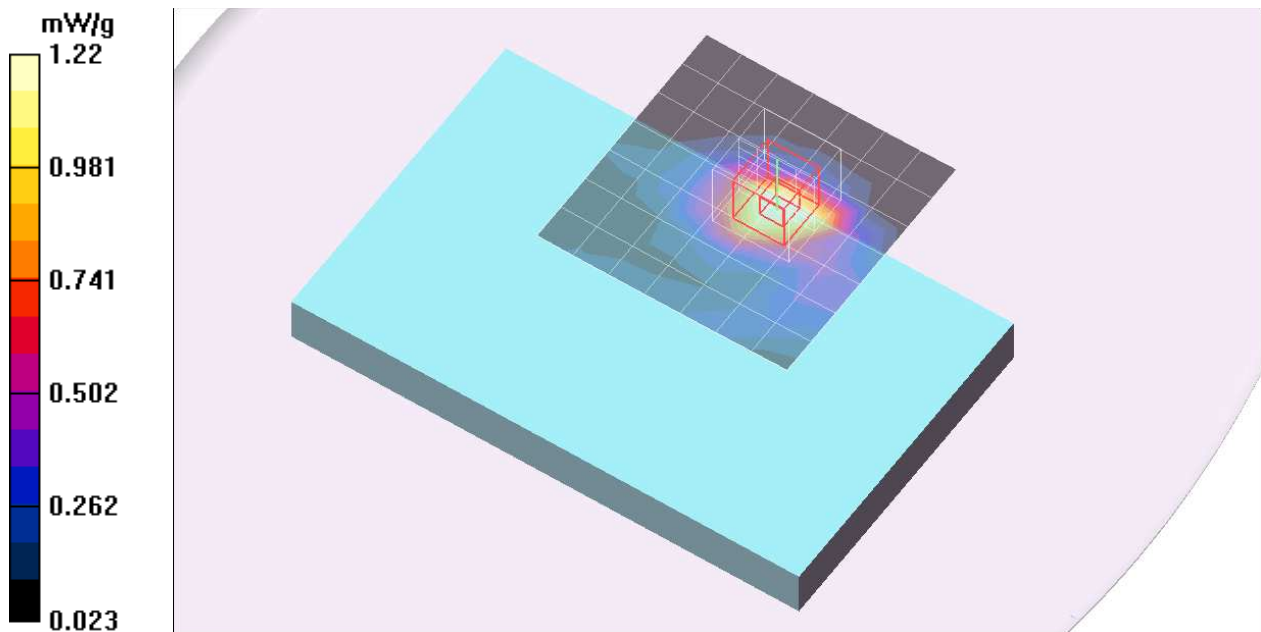

## GPRS 1900 Band

Frequency: 1850.2 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/GPRS 1900 2 Slot/CH512/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.34 mW/g

**Rear Side/GPRS 1900 2 Slot/CH512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.6 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.592 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.46 mW/g

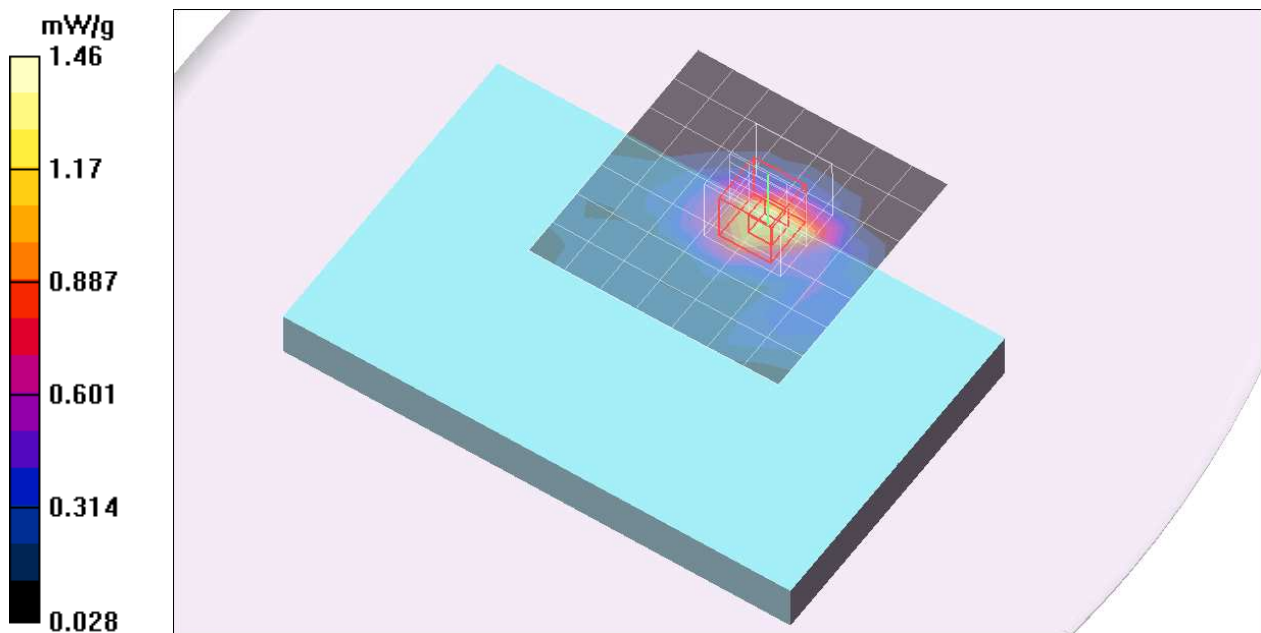

## GPRS 1900 Band

Frequency: 1909.8 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1909.8$  MHz;  $\sigma = 1.58$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/GPRS 1900 2 Slot/CH810/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.23 mW/g

**Rear Side/GPRS 1900 2 Slot/CH810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.65 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 1.70 W/kg

**SAR(1 g) = 0.994 mW/g; SAR(10 g) = 0.543 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.35 mW/g

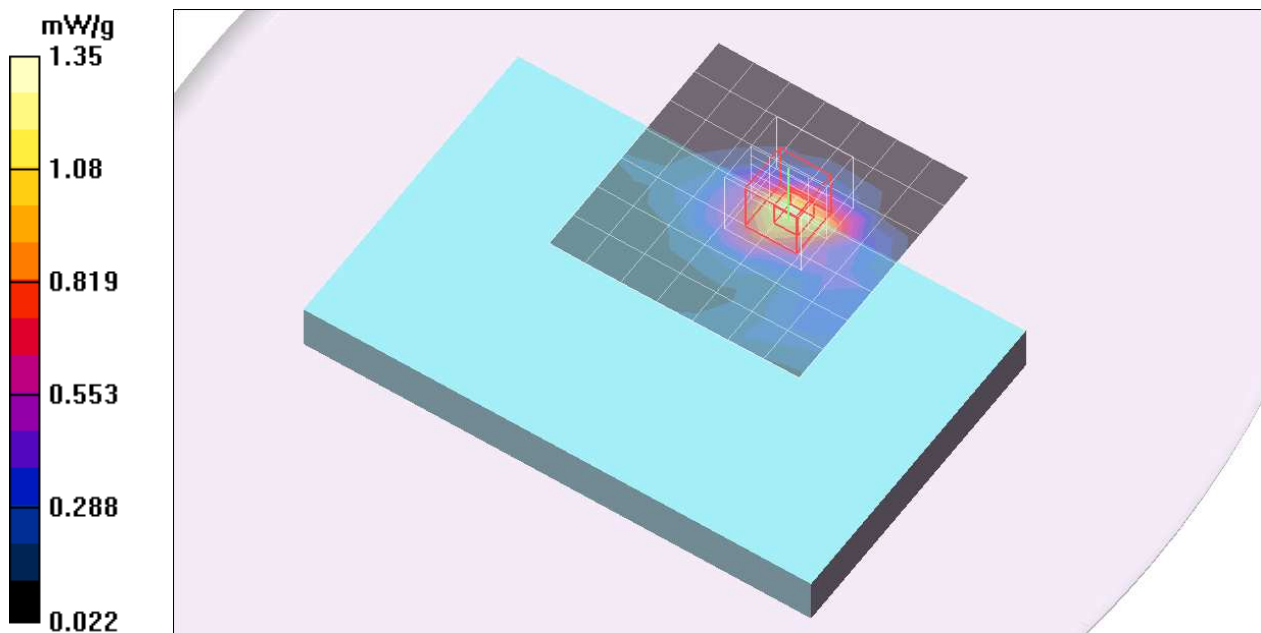

## GSM 1900 Band

Frequency: 1850.2 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/GPRS 1900 2 Slot/CH512\_Repeat/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.35 mW/g

**Rear Side/GPRS 1900 2 Slot/CH512\_Repeat/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.7 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 1.82 W/kg

**SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.615 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.46 mW/g

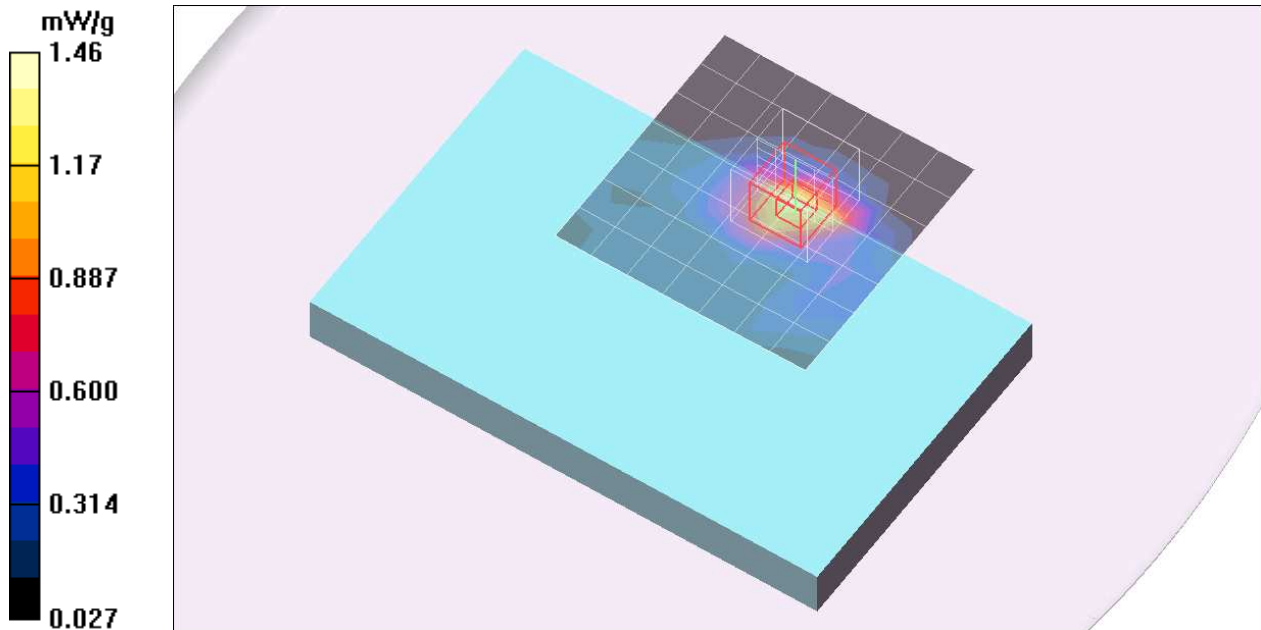

## GPRS 1900 Band

Frequency: 1880 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge1 Side/GPRS 1900 2 Slot/CH661/Area Scan (7x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.118 mW/g

**Edge1 Side/GPRS 1900 2 Slot/CH661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.53 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.169 W/kg

**SAR(1 g) = 0.103 mW/g; SAR(10 g) = 0.059 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.141 mW/g

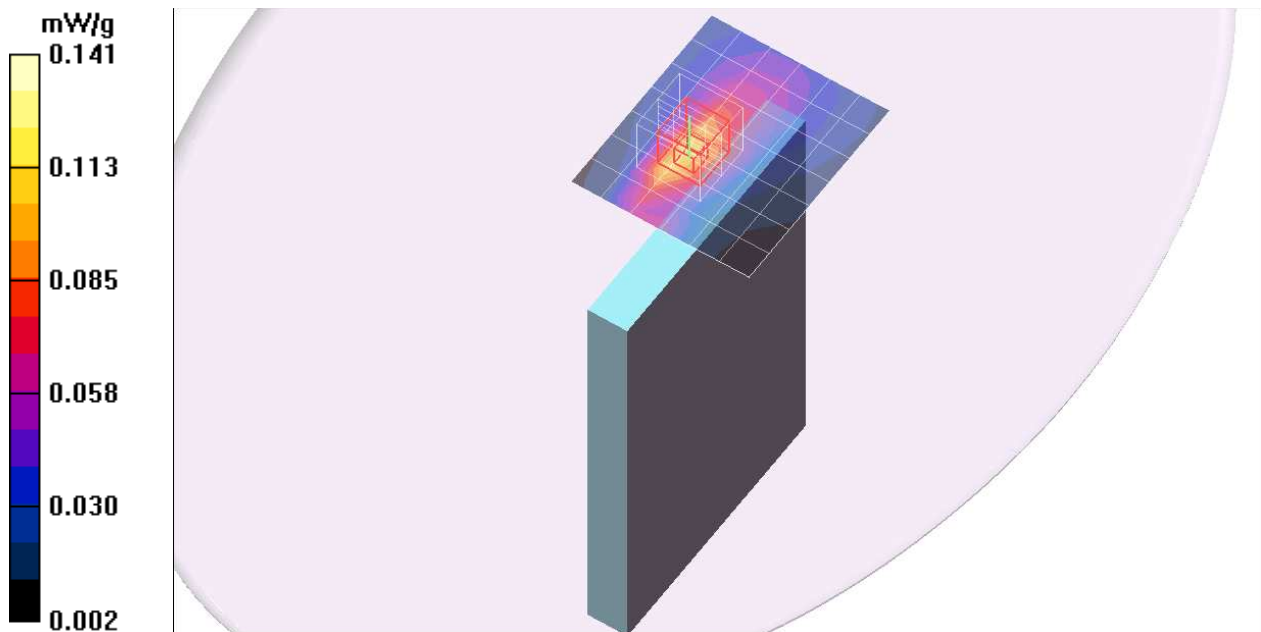

## GPRS 1900 Band

Frequency: 1880 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/GPRS 1900 2 Slot/CH661/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.890 mW/g

**Edge2 Side/GPRS 1900 2 Slot/CH661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.6 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 0.883 mW/g; SAR(10 g) = 0.453 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.30 mW/g

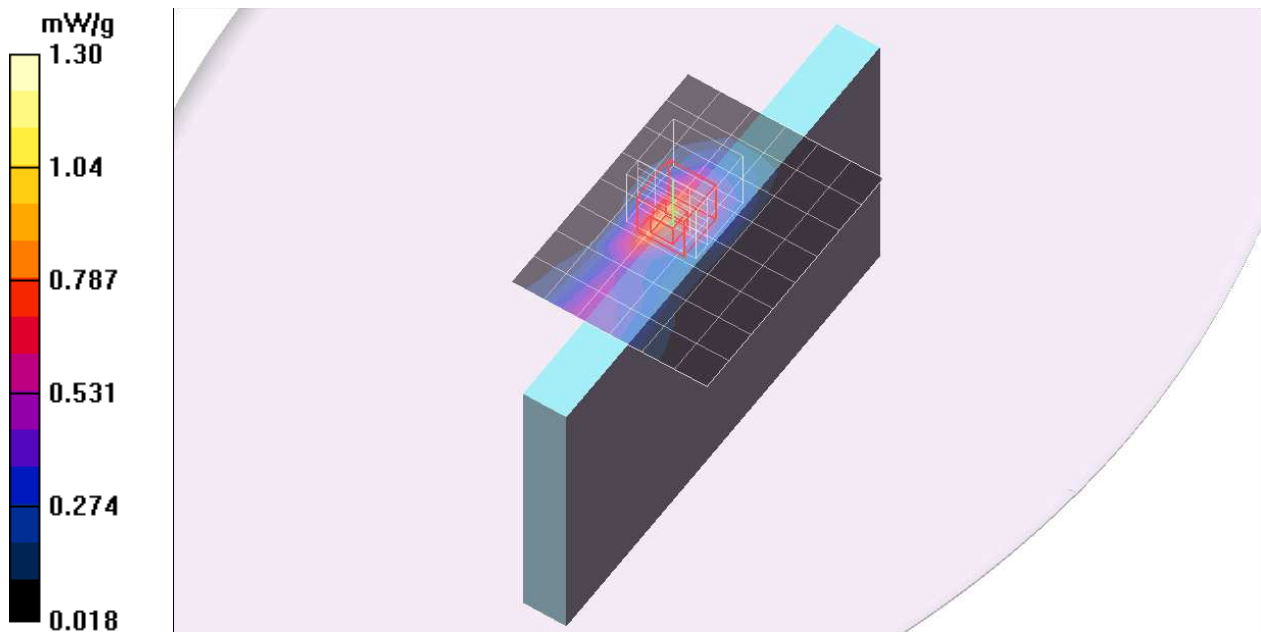

## GPRS 1900 Band

Frequency: 1850.2 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/GPRS 1900 2 Slot/CH512/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.08 mW/g

**Edge2 Side/GPRS 1900 2 Slot/CH512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 27.1 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 1.92 W/kg

**SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.549 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.56 mW/g

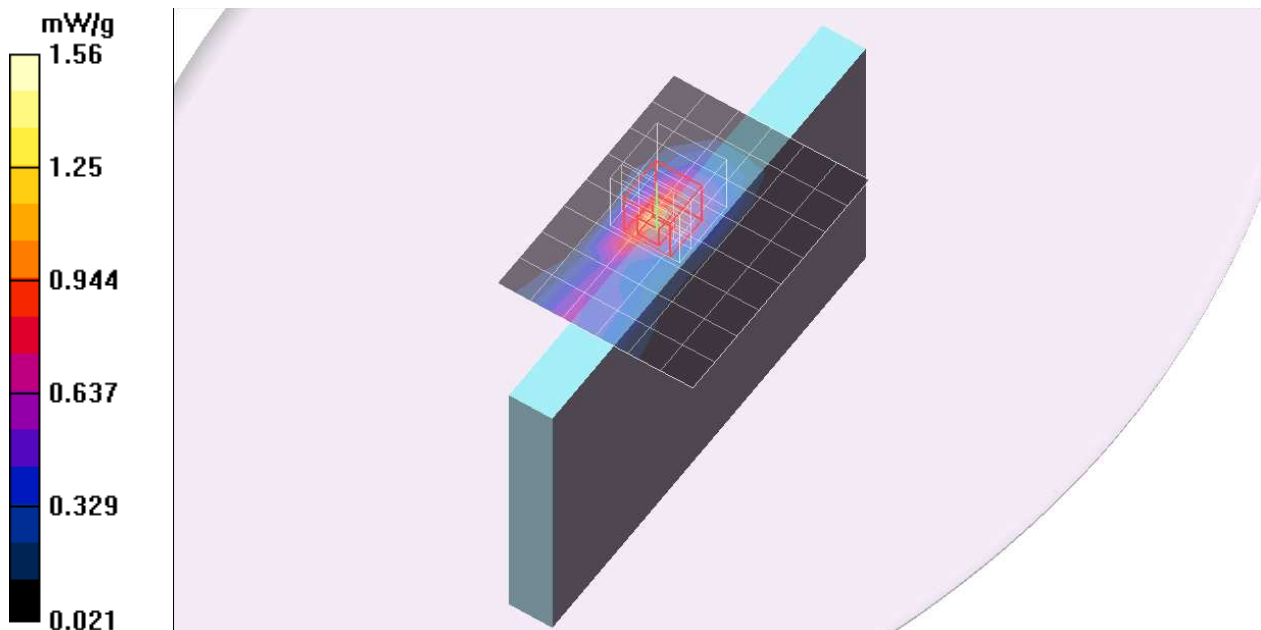

## GPRS 1900 Band

Frequency: 1909.8 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1909.8$  MHz;  $\sigma = 1.58$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/GPRS 1900 2 Slot/CH810/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.896 mW/g

**Edge2 Side/GPRS 1900 2 Slot/CH810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.4 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 1.66 W/kg

**SAR(1 g) = 0.897 mW/g; SAR(10 g) = 0.456 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.35 mW/g

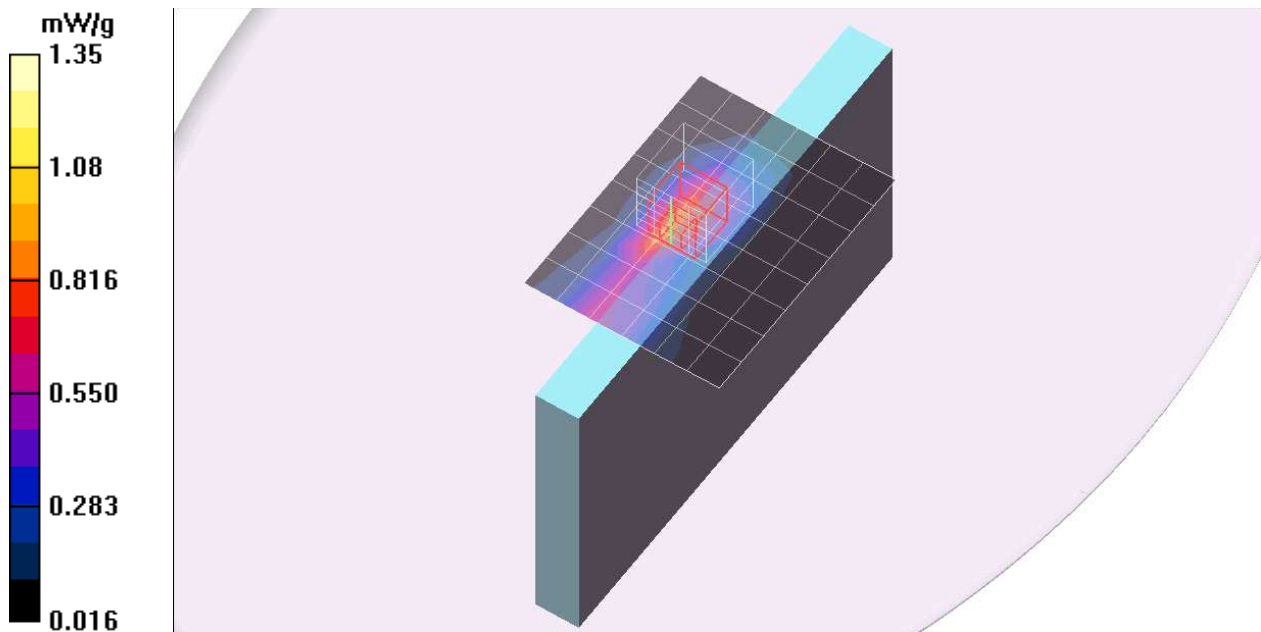

## GPRS 1900 Band

Frequency: 1880 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge3 Side/GPRS 1900 2 Slot/CH661/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.104 mW/g

**Edge3 Side/GPRS 1900 2 Slot/CH661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.41 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 0.136 W/kg

**SAR(1 g) = 0.084 mW/g; SAR(10 g) = 0.048 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.112 mW/g

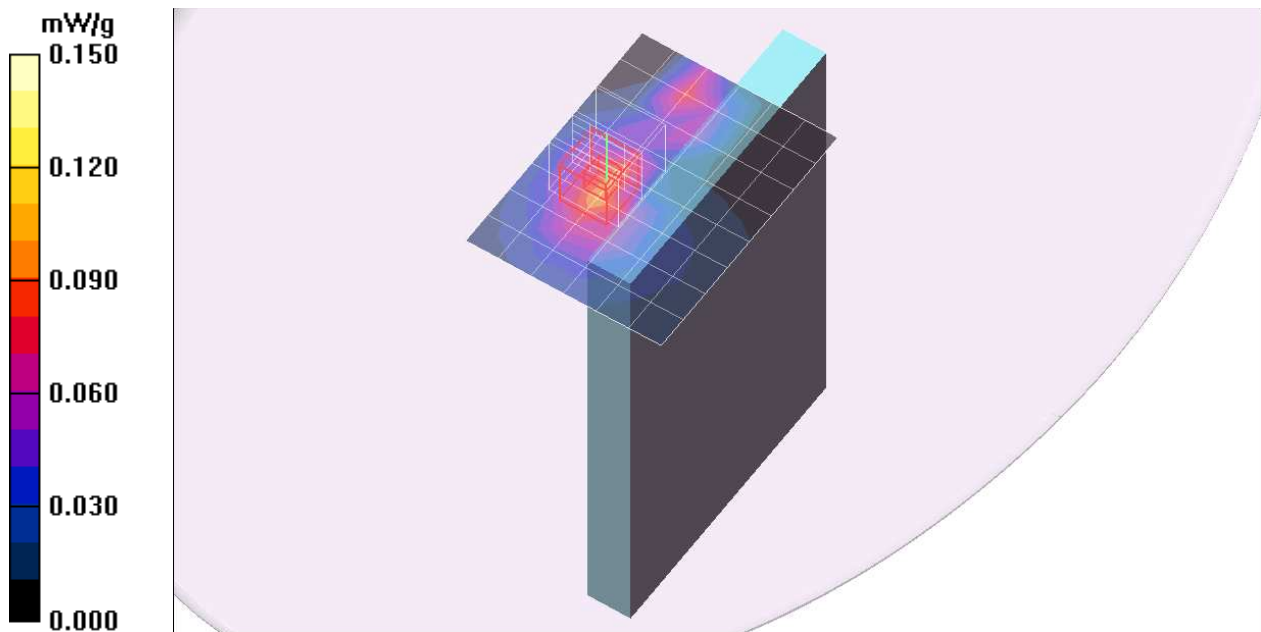

## GPRS 1900 Band

Frequency: 1880 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge4 Side/GPRS 1900 2 Slot/CH661/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.025 mW/g

**Edge4 Side/GPRS 1900 2 Slot/CH661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 2.33 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 0.032 W/kg

**SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.012 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.027 mW/g

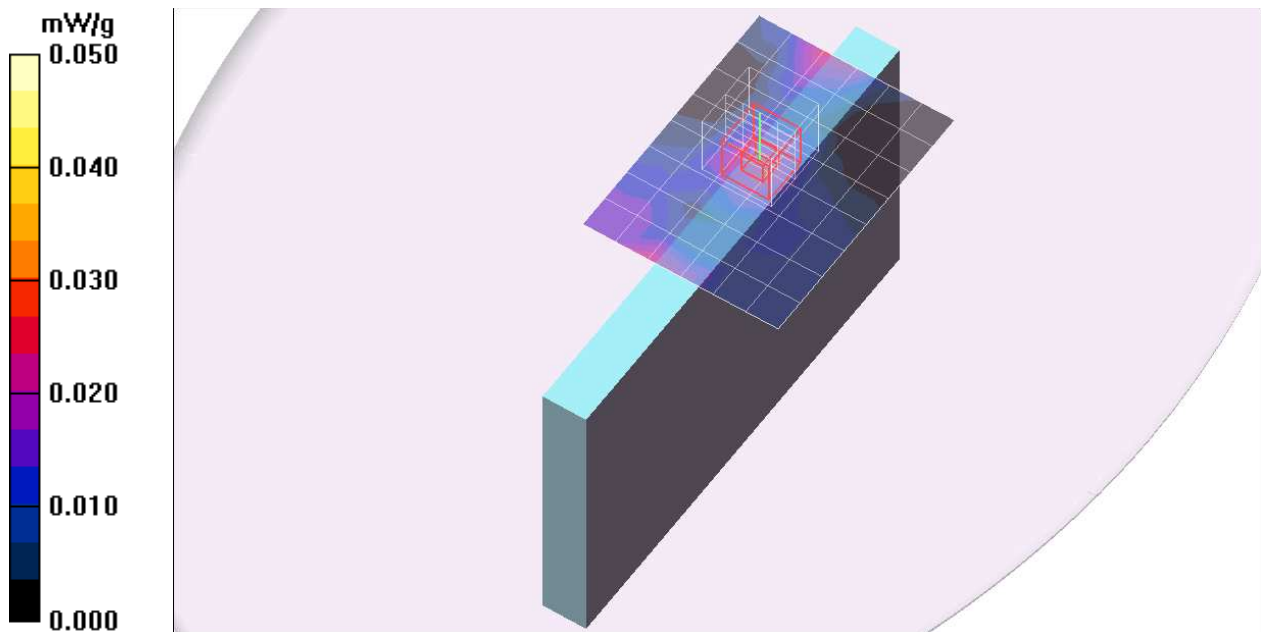

## GPRS 1900 Band

Frequency: 1850.2 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/GPRS 1900 2 Slot/CH512\_Repeat/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.35 mW/g

**Rear Side/GPRS 1900 2 Slot/CH512\_Repeat/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.7 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 1.82 W/kg

**SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.615 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.46 mW/g

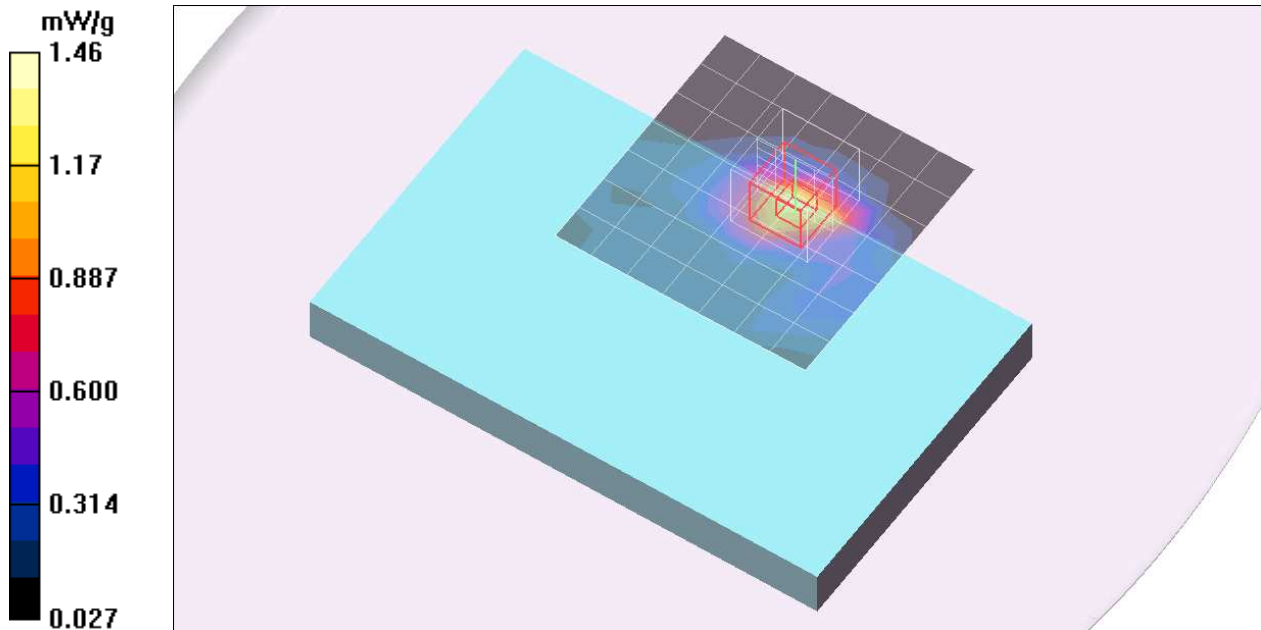


**GPRS 1900 Band**

Frequency: 1850.2 MHz; Duty Cycle: 1:4

**Rear Side/GPRS 1900 2 Slot/CH512\_Repeat/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.164 mW/g

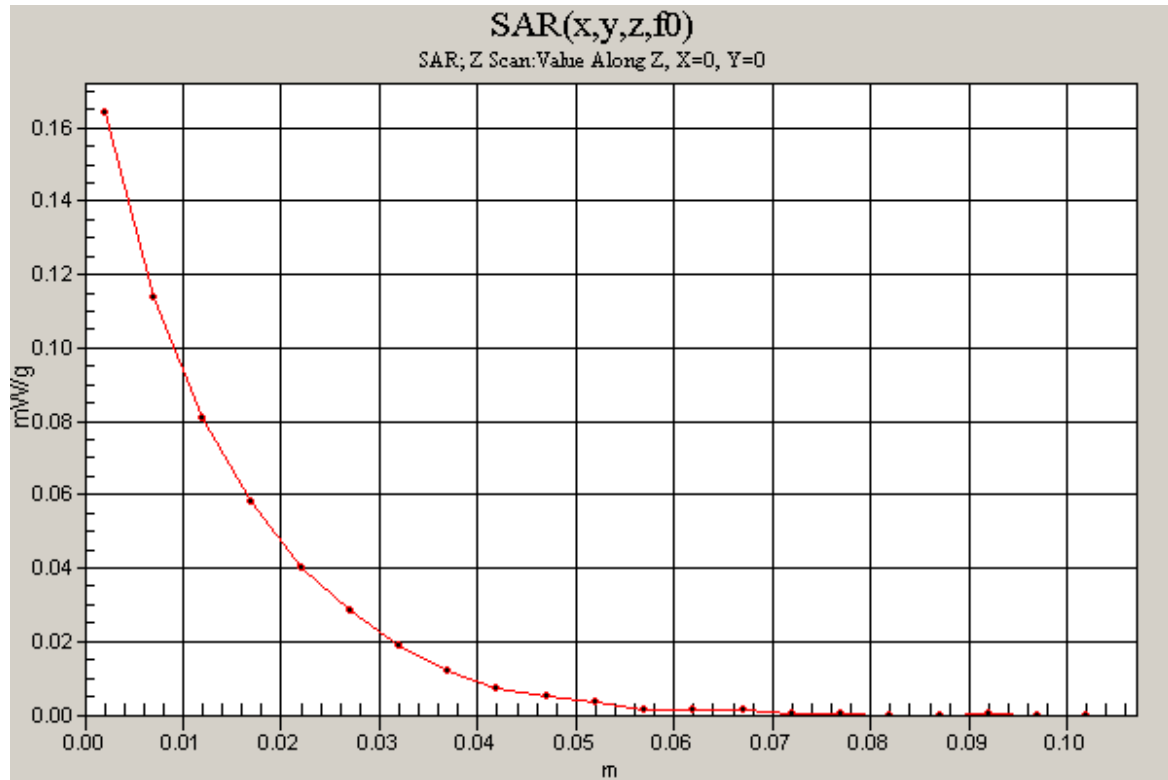

## WCDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/WCDMA Band II/CH9262/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.40 mW/g

**Rear Side/WCDMA Band II/CH9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.8 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.54 W/kg

**SAR(1 g) = 0.926 mW/g; SAR(10 g) = 0.523 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.23 mW/g

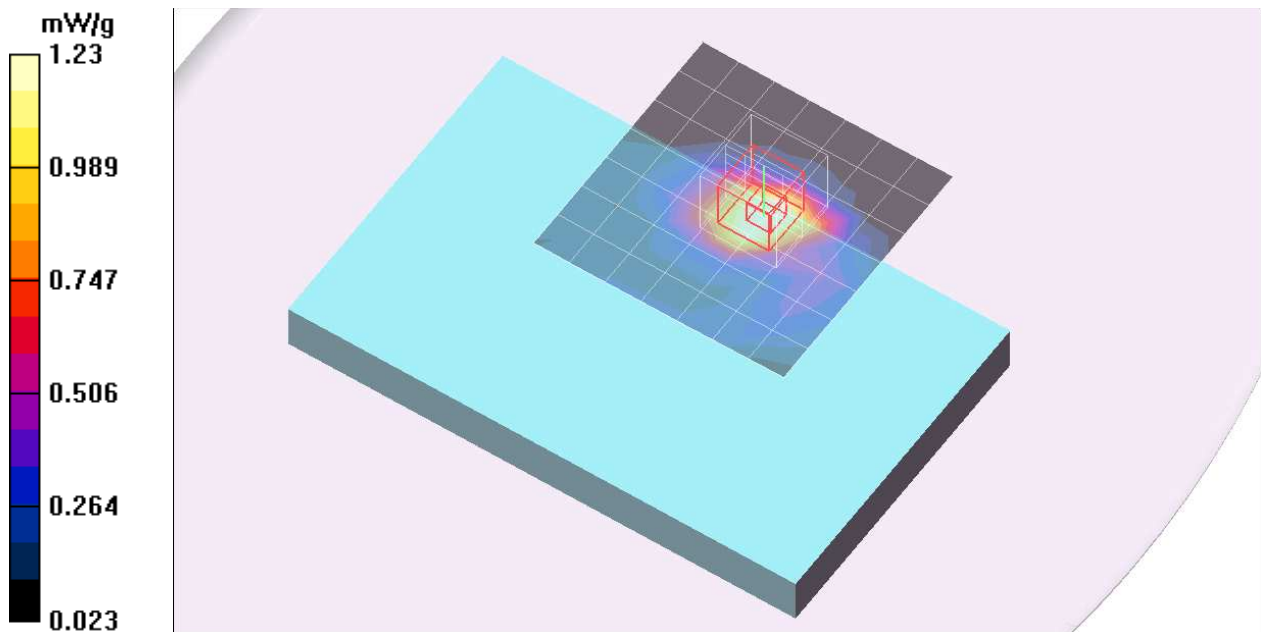


## WCDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1

**Rear Side/WCDMA Band II/CH9262/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.23 mW/g

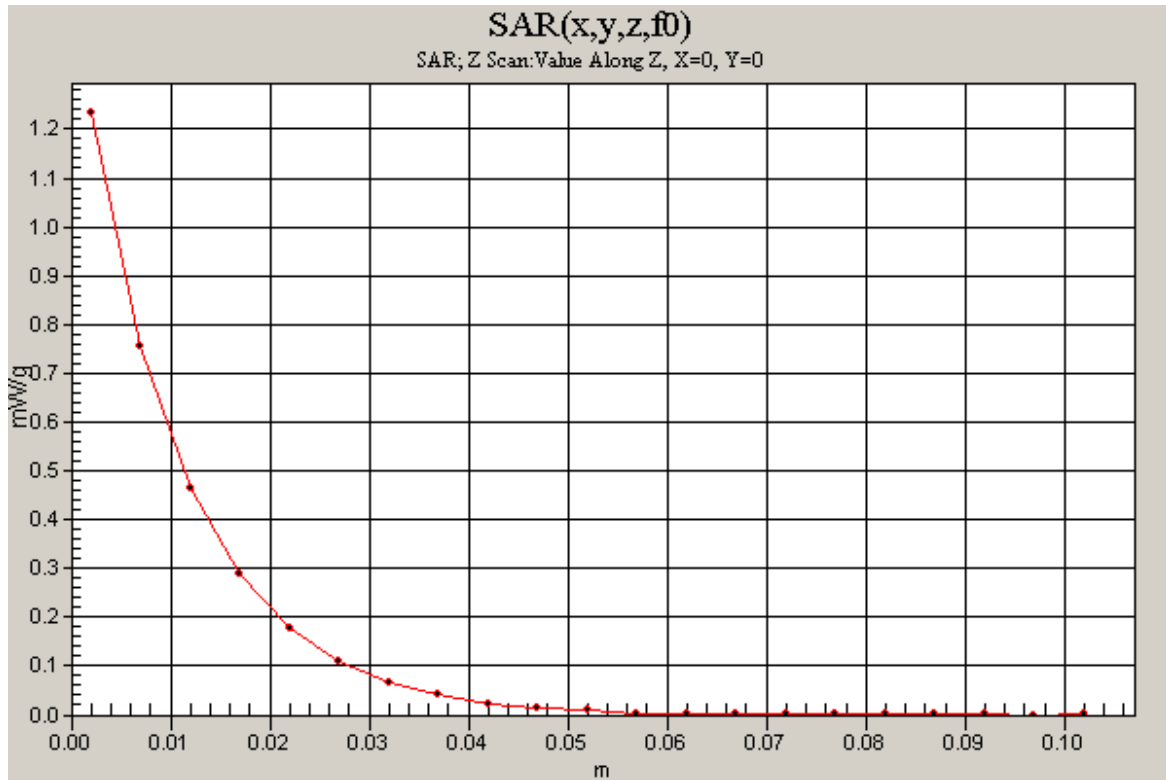

## WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/WCDMA Band II/CH9400/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.01 mW/g

**Rear Side/WCDMA Band II/CH9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.86 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 1.30 W/kg

**SAR(1 g) = 0.774 mW/g; SAR(10 g) = 0.435 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.04 mW/g

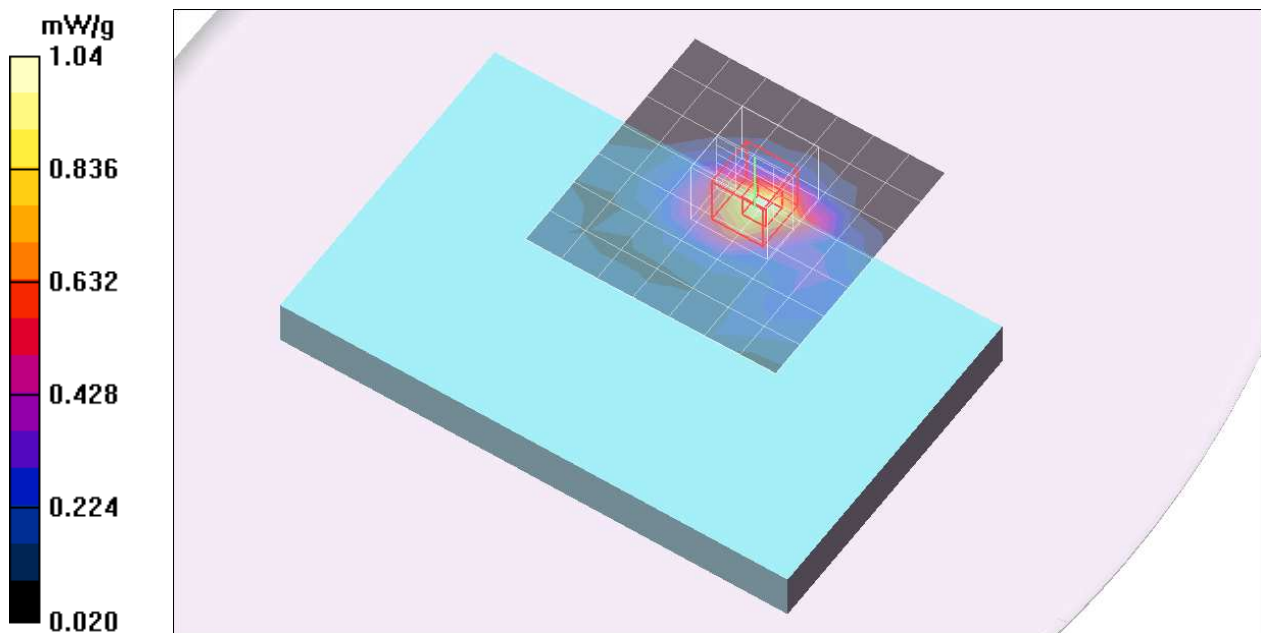

## WCDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1907.8$  MHz;  $\sigma = 1.58$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/WCDMA Band II/CH9538/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 1.06 mW/g


**Rear Side/WCDMA Band II/CH9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.12 V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.791 mW/g; SAR(10 g) = 0.438 mW/g**

Maximum value of SAR (measured) = 1.07 mW/g

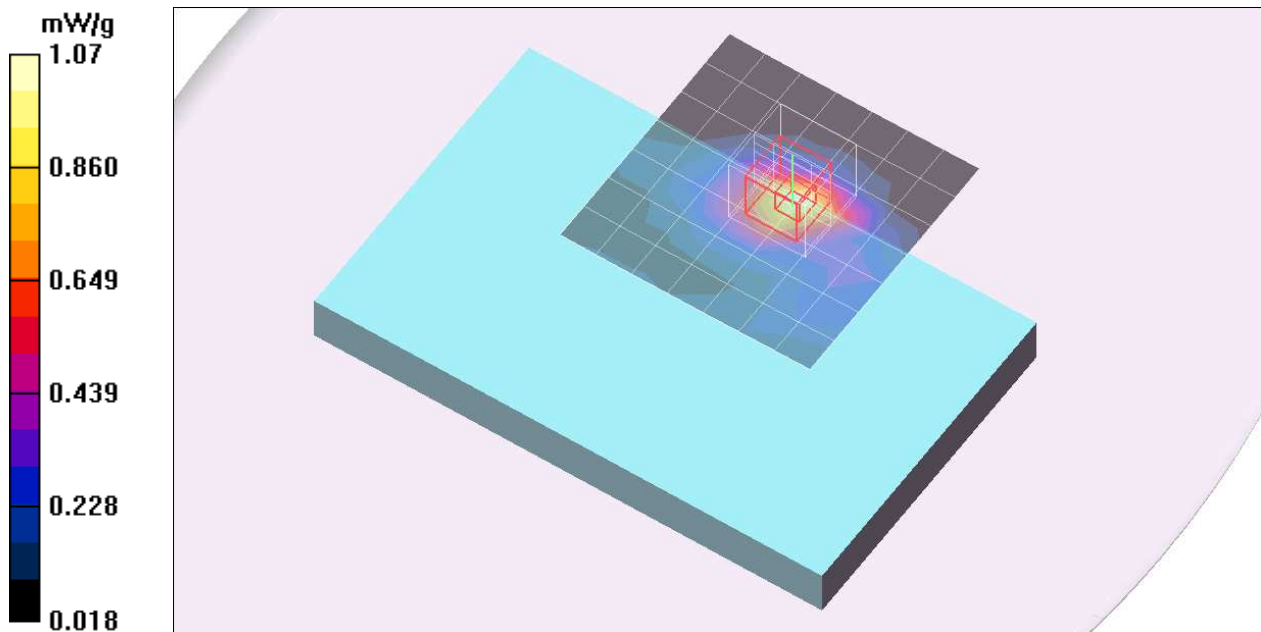

## WCDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/WCDMA Band II/CH9262/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.881 mW/g

**Edge2 Side/WCDMA Band II/CH9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm,

dy=8mm, dz=5mm


Reference Value = 28.1 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 0.839 mW/g; SAR(10 g) = 0.450 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.18 mW/g

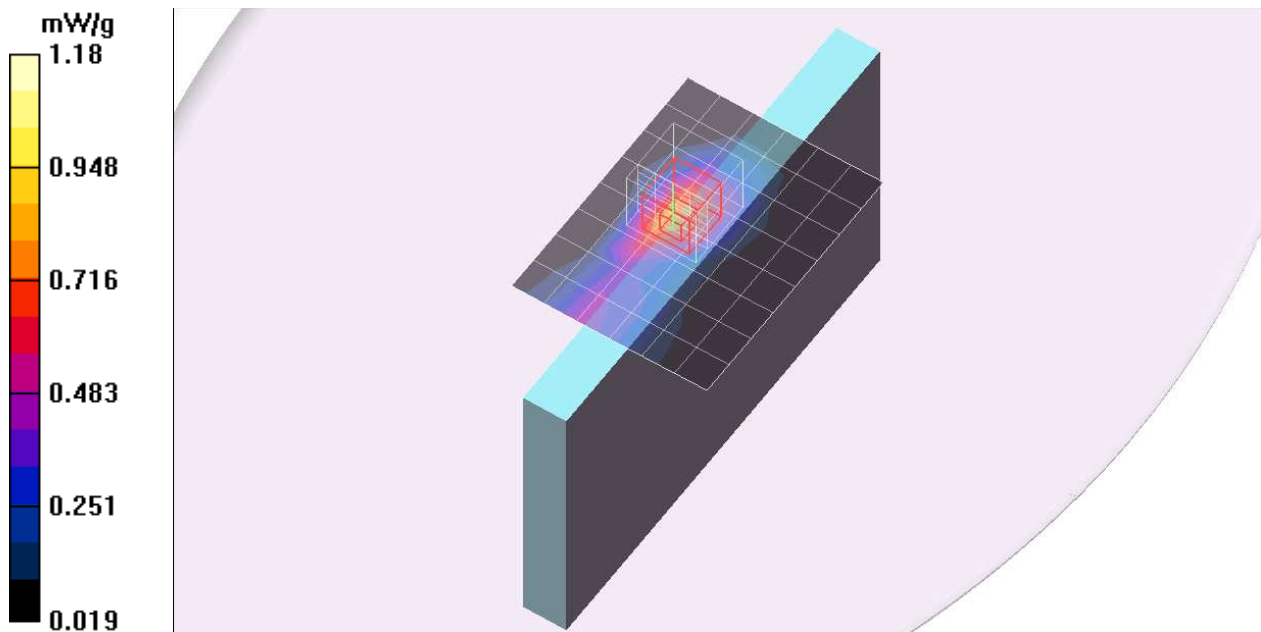

## WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/WCDMA Band II/CH9400/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.701 mW/g

**Edge2 Side/WCDMA Band II/CH9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.3 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.687 mW/g; SAR(10 g) = 0.364 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.988 mW/g

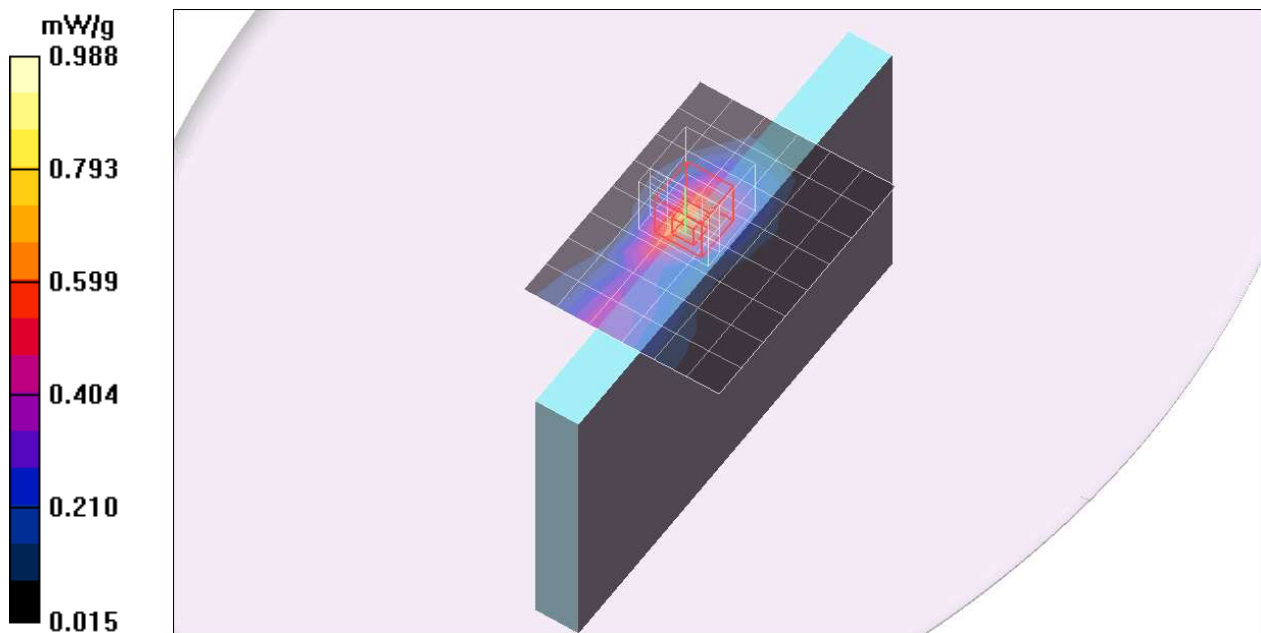

## WCDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1907.8$  MHz;  $\sigma = 1.58$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/WCDMA Band II/CH9538/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.710 mW/g


**Edge2 Side/WCDMA Band II/CH9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.3 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.361 mW/g**

Maximum value of SAR (measured) = 0.982 mW/g

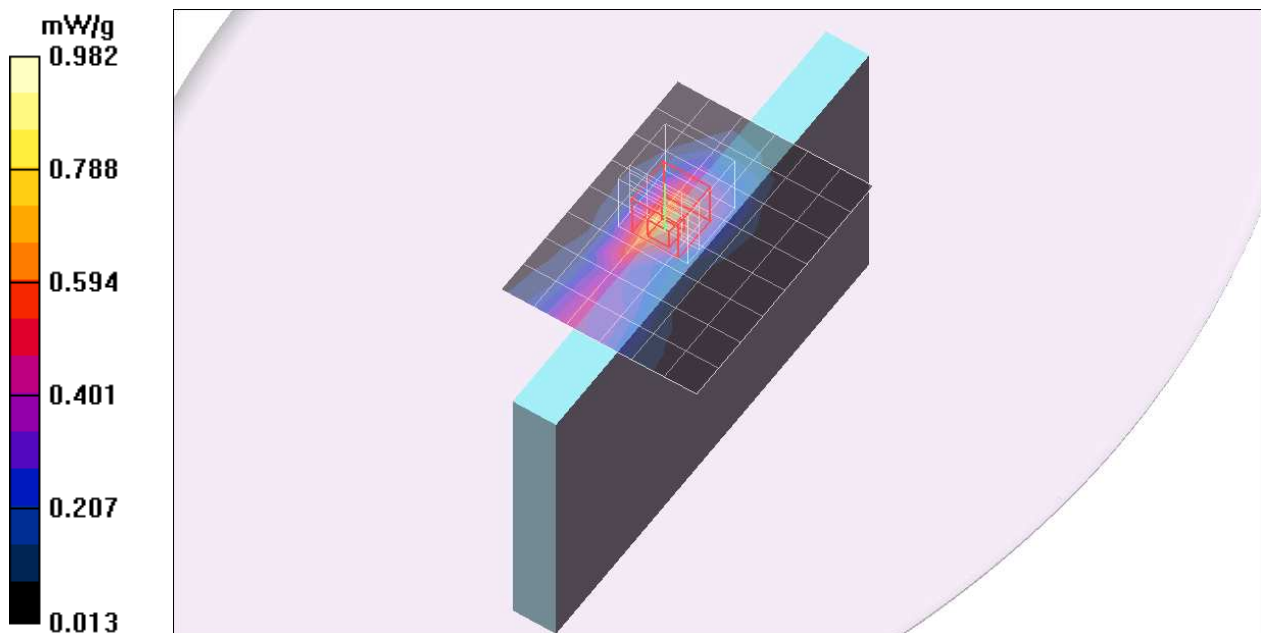

## WCDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/WCDMA Band II/CH9262\_Repeat/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.894 mW/g

**Edge2 Side/WCDMA Band II/CH9262\_Repeat/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.1 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.847 mW/g; SAR(10 g) = 0.455 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.19 mW/g

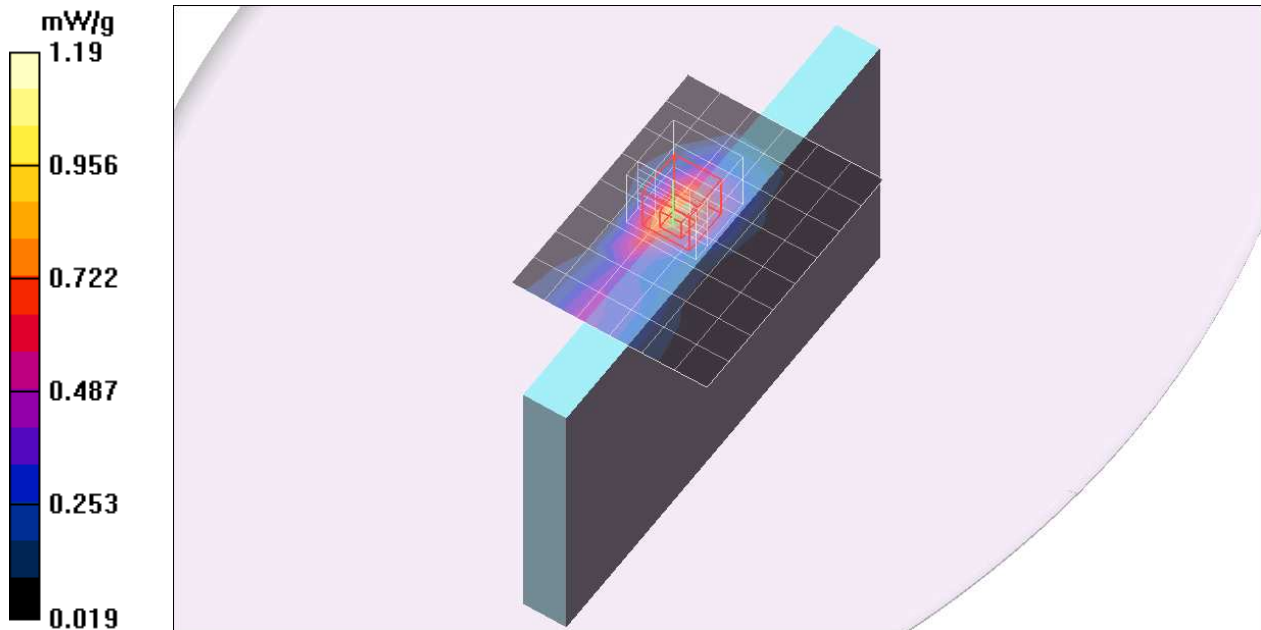

## WCDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/WCDMA Band II/CH9262\_Repeat/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.22 mW/g

**Rear Side/WCDMA Band II/CH9262\_Repeat/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.3 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 1.52 W/kg

**SAR(1 g) = 0.921 mW/g; SAR(10 g) = 0.523 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.23 mW/g

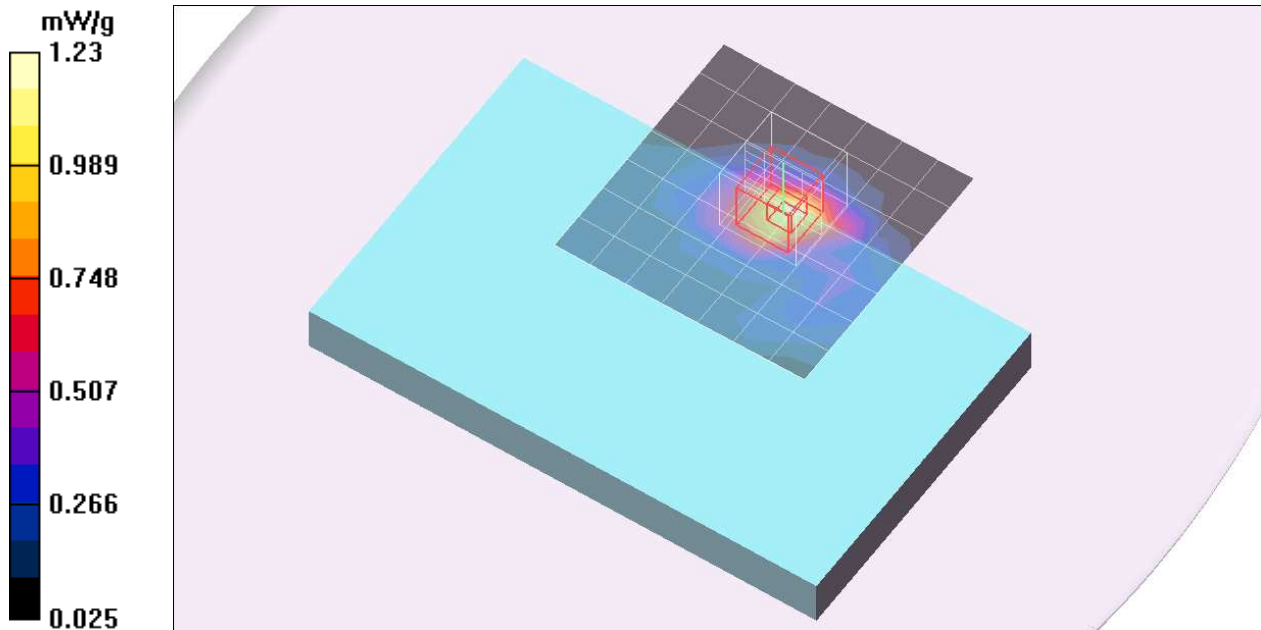

## WCDMA Band IV

Frequency: 1712.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1713.1$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/WCDMA Band IV/CH1312/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 1.34 mW/g


**Rear Side/WCDMA Band IV/CH1312/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.826 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.79 W/kg

**SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.574 mW/g**

Maximum value of SAR (measured) = 1.44 mW/g

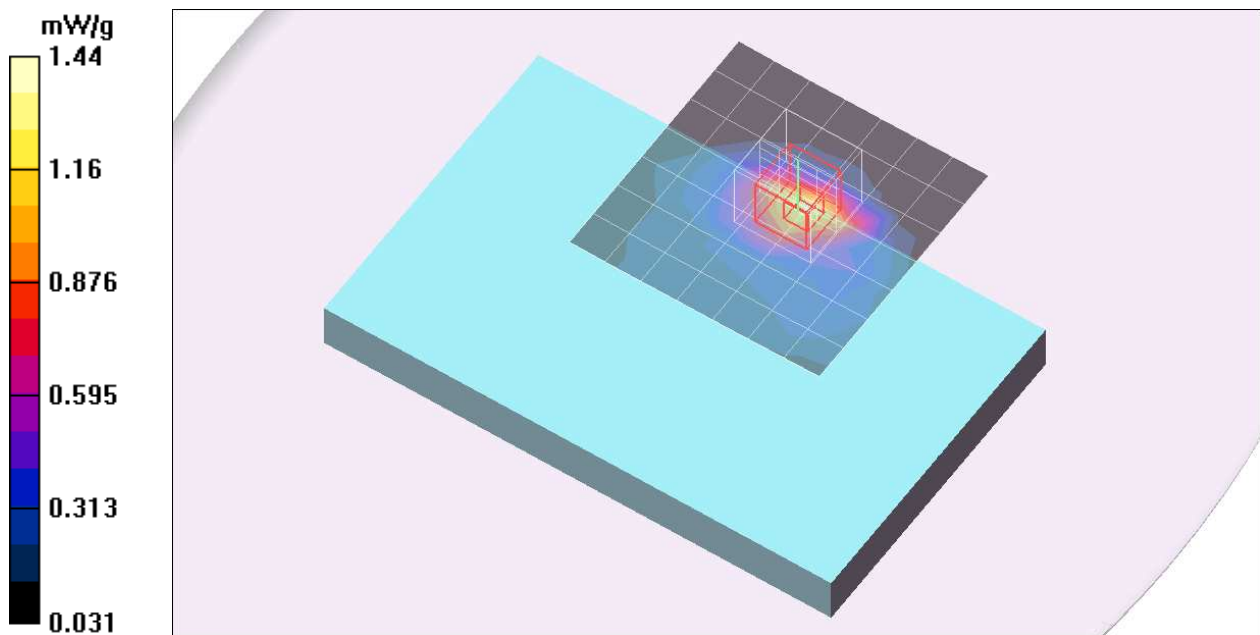

## WCDMA Band IV

Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1732.9$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/WCDMA Band IV/CH1413/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 1.45 mW/g


**Rear Side/WCDMA Band IV/CH1413/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.149 dB

Peak SAR (extrapolated) = 1.53 W/kg

**SAR(1 g) = 0.910 mW/g; SAR(10 g) = 0.501 mW/g**

Maximum value of SAR (measured) = 1.23 mW/g

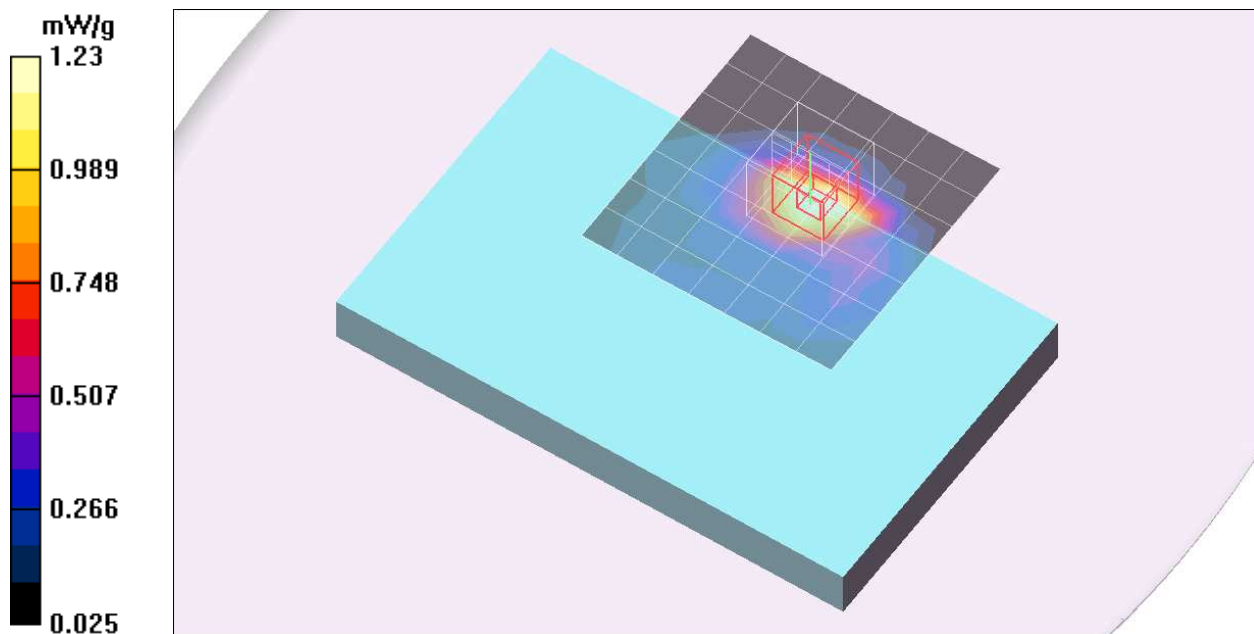

## WCDMA Band IV

Frequency: 1752.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1752.7$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/WCDMA Band IV/CH1513/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.29 mW/g

**Rear Side/WCDMA Band IV/CH1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 11.6 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 2.00 W/kg

**SAR(1 g) = 0.913 mW/g; SAR(10 g) = 0.443 mW/g**

Maximum value of SAR (measured) = 1.33 mW/g

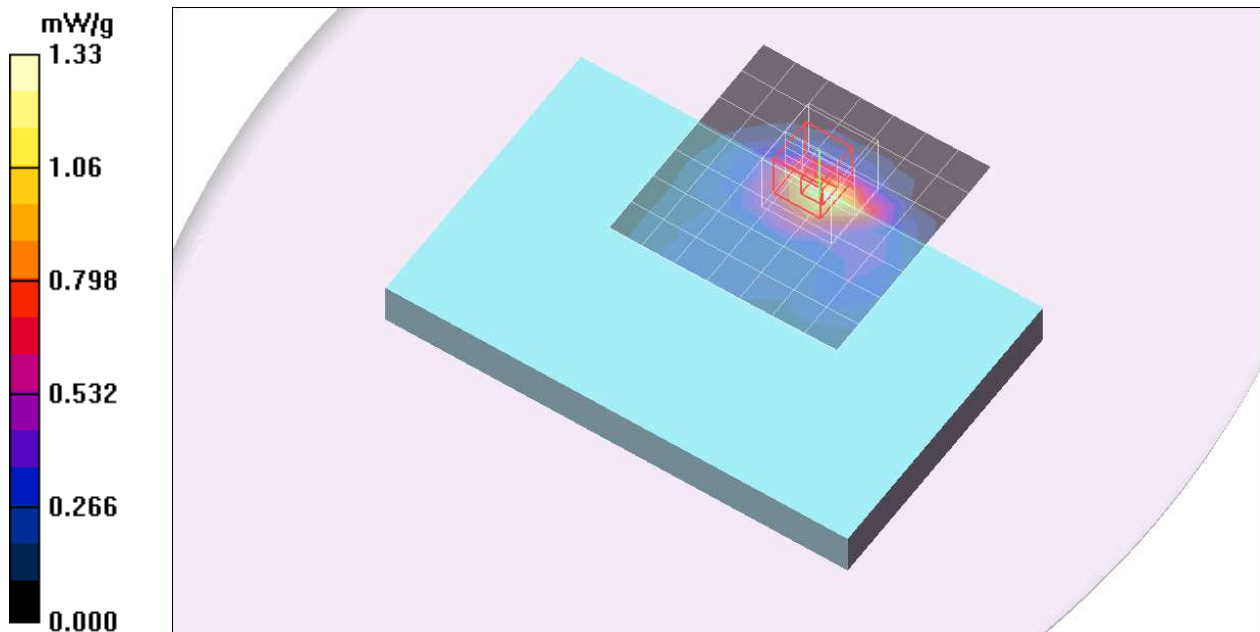

## WCDMA Band IV

Frequency: 1712.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1713.1$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/WCDMA Band IV/CH1312/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.10 mW/g

**Edge2 Side/WCDMA Band IV/CH1312/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 28.8 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 1.93 W/kg

**SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.522 mW/g**

Maximum value of SAR (measured) = 1.54 mW/g

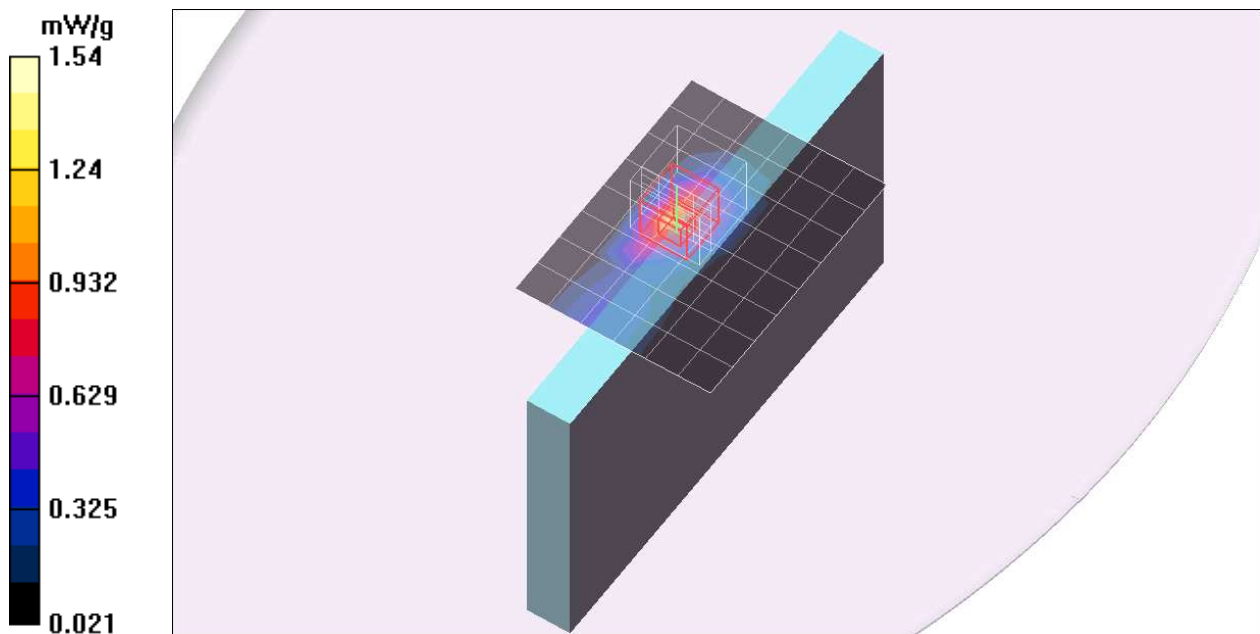

## WCDMA Band IV

Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1732.9$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/WCDMA Band IV/CH1413/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 1.19 mW/g


**Edge2 Side/WCDMA Band IV/CH1413/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.6 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.72 W/kg

**SAR(1 g) = 0.968 mW/g; SAR(10 g) = 0.493 mW/g**

Maximum value of SAR (measured) = 1.38 mW/g

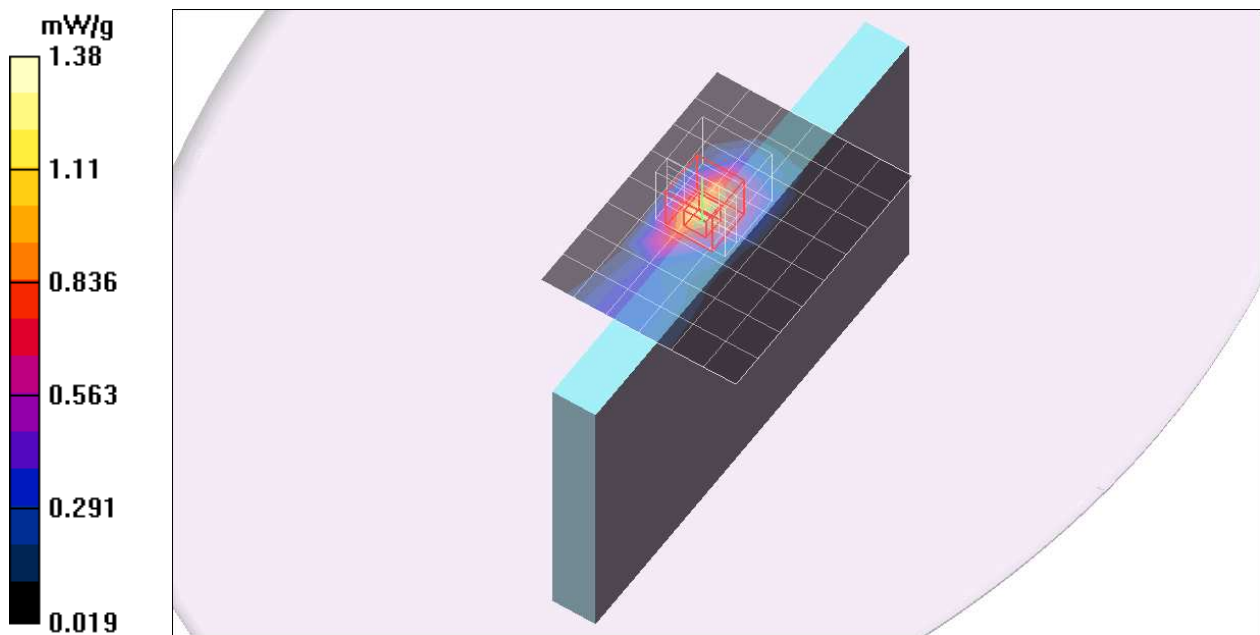

## WCDMA Band IV

Frequency: 1752.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1752.7$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/WCDMA Band IV/CH1513/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 1.26 mW/g


**Edge2 Side/WCDMA Band IV/CH1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.0 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.877 mW/g; SAR(10 g) = 0.456 mW/g**

Maximum value of SAR (measured) = 1.24 mW/g

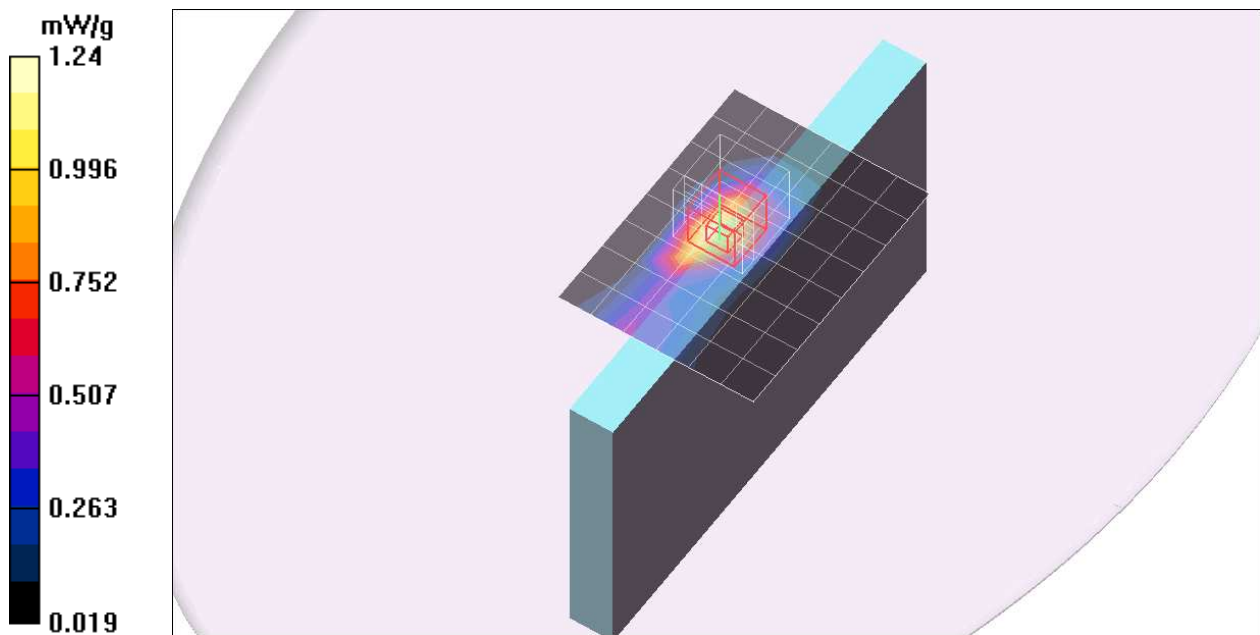

## WCDMA Band IV

Frequency: 1712.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1713.1$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/WCDMA Band IV/CH1312\_Repeat/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.13 mW/g


**Edge2 Side/WCDMA Band IV/CH1312\_Repeat/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.8 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 1.98 W/kg

**SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.529 mW/g**


Maximum value of SAR (measured) = 1.56 mW/g

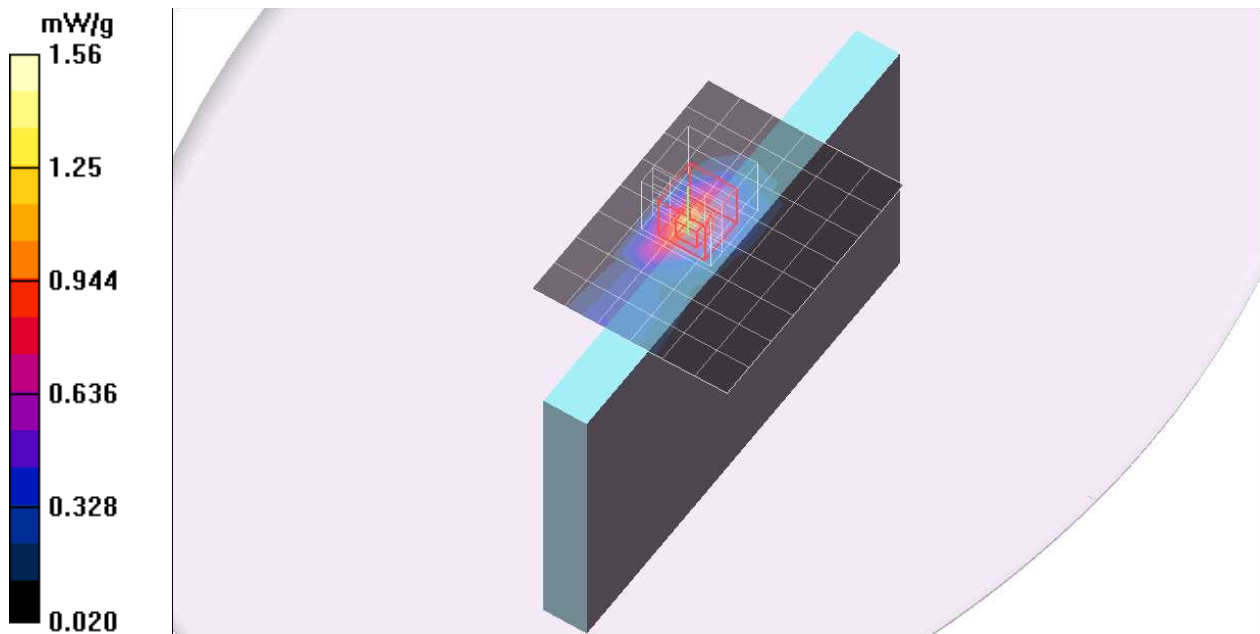

**WCDMA Band IV**

Frequency: 1712.4 MHz; Duty Cycle: 1:1

**Edge2 Side/WCDMA Band IV/CH1312\_Repeat/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 1.01 mW/g

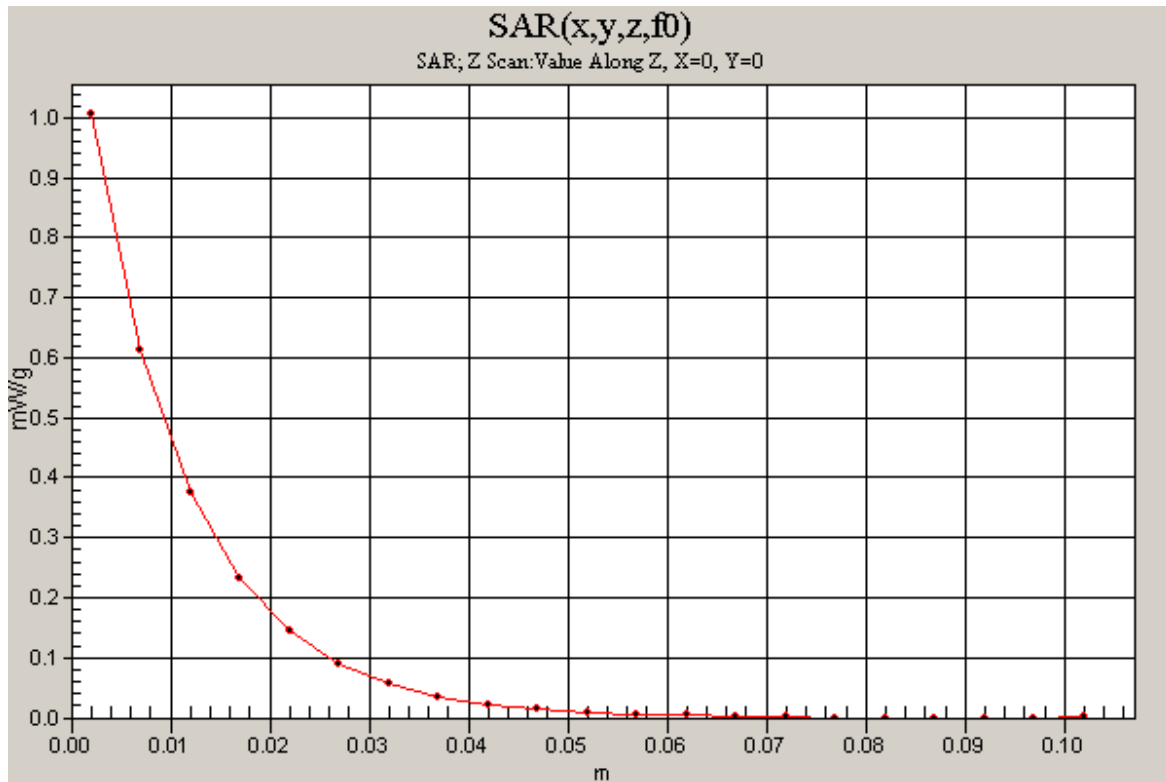

## WCDMA Band V

Frequency: 846.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 0.991$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/WCDMA Band V/CH4233/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.708 mW/g

**Rear Side/WCDMA Band V/CH4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.55 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.381 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.827 mW/g

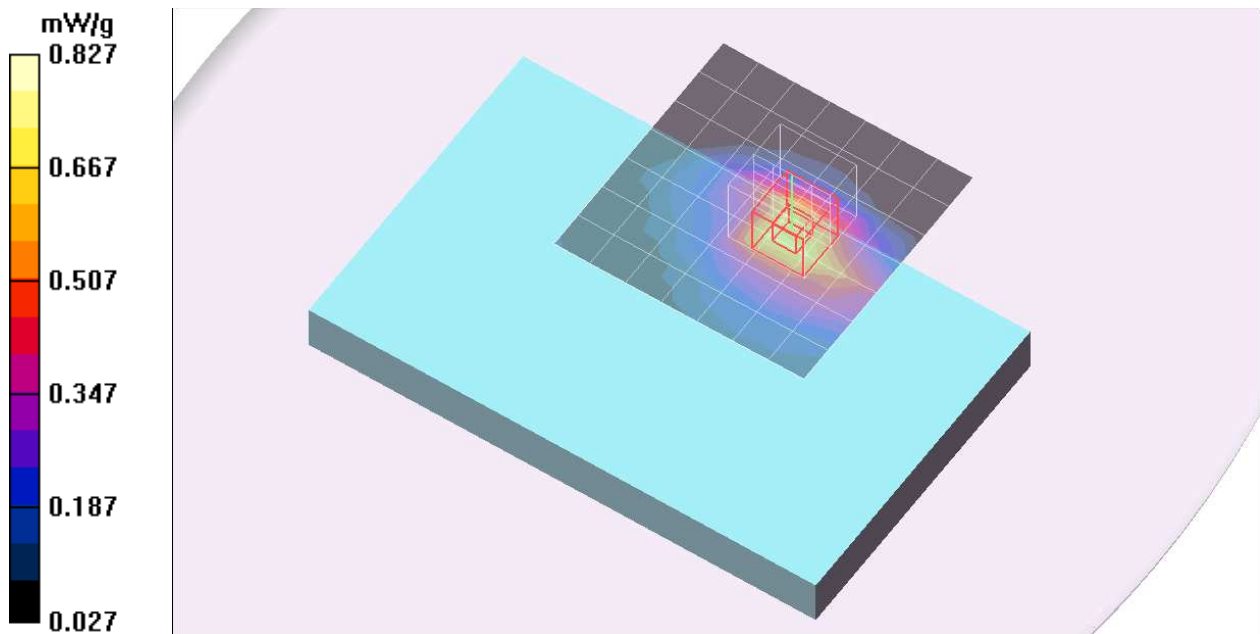


**WCDMA Band V**

Frequency: 846.6 MHz; Duty Cycle: 1:1

**Rear Side/WCDMA Band V/CH4233/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.085 mW/g

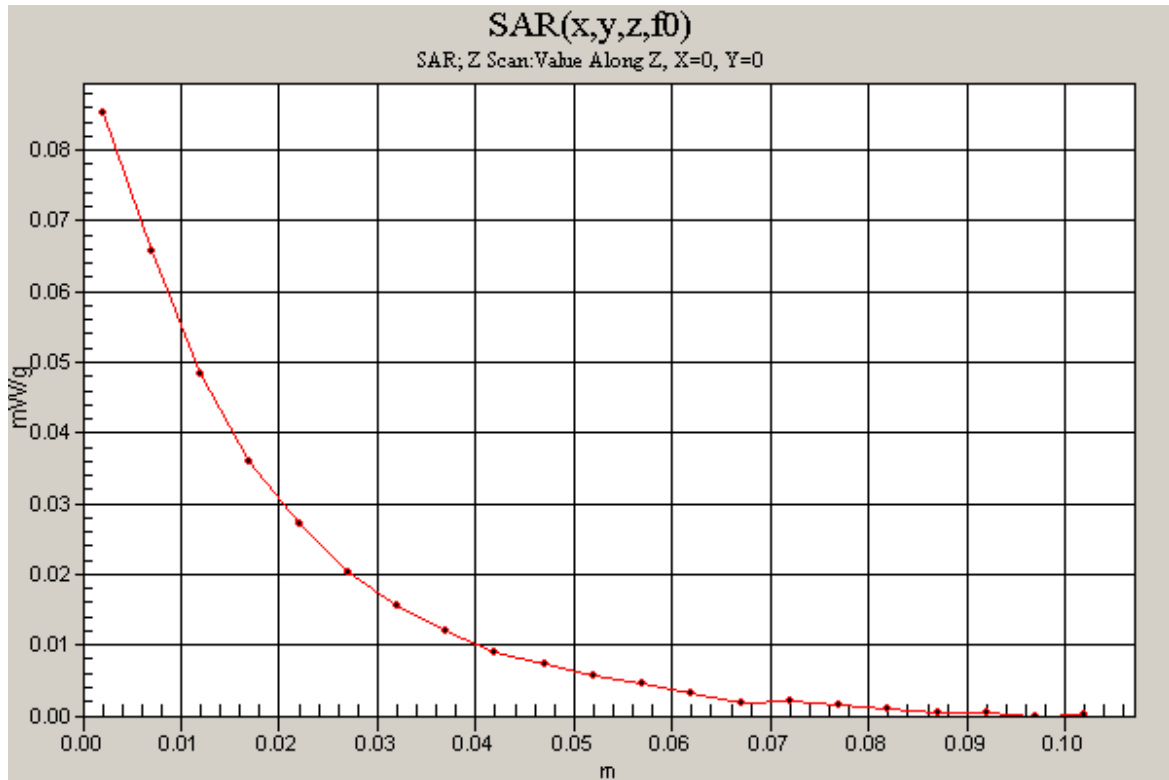

## WCDMA Band V

Frequency: 846.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 0.991$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/WCDMA Band V/CH4233/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.268 mW/g

**Edge2 Side/WCDMA Band V/CH4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 16.0 V/m; Power Drift = -0.125 dB

Peak SAR (extrapolated) = 0.466 W/kg

**SAR(1 g) = 0.229 mW/g; SAR(10 g) = 0.123 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.345 mW/g

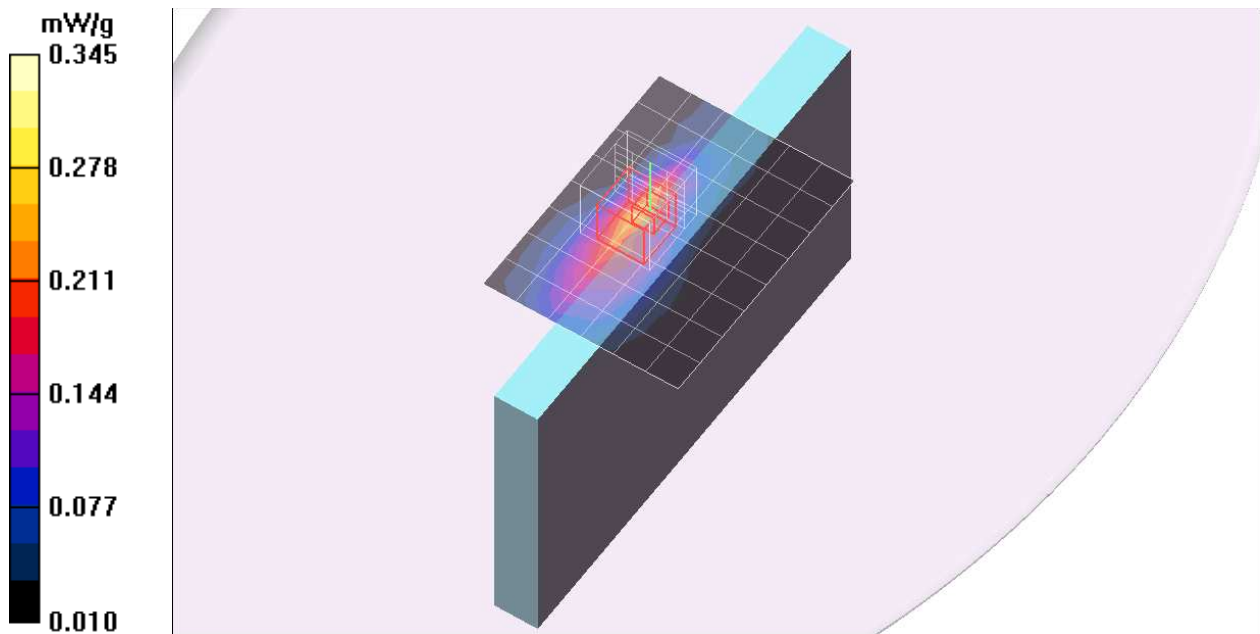

## CDMA BC0 Band

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/CDMA BC0/CH384/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.755 mW/g

**Rear Side/CDMA BC0/CH384/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.17 V/m; Power Drift = -0.158 dB

Peak SAR (extrapolated) = 0.990 W/kg

**SAR(1 g) = 0.612 mW/g; SAR(10 g) = 0.376 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.797 mW/g

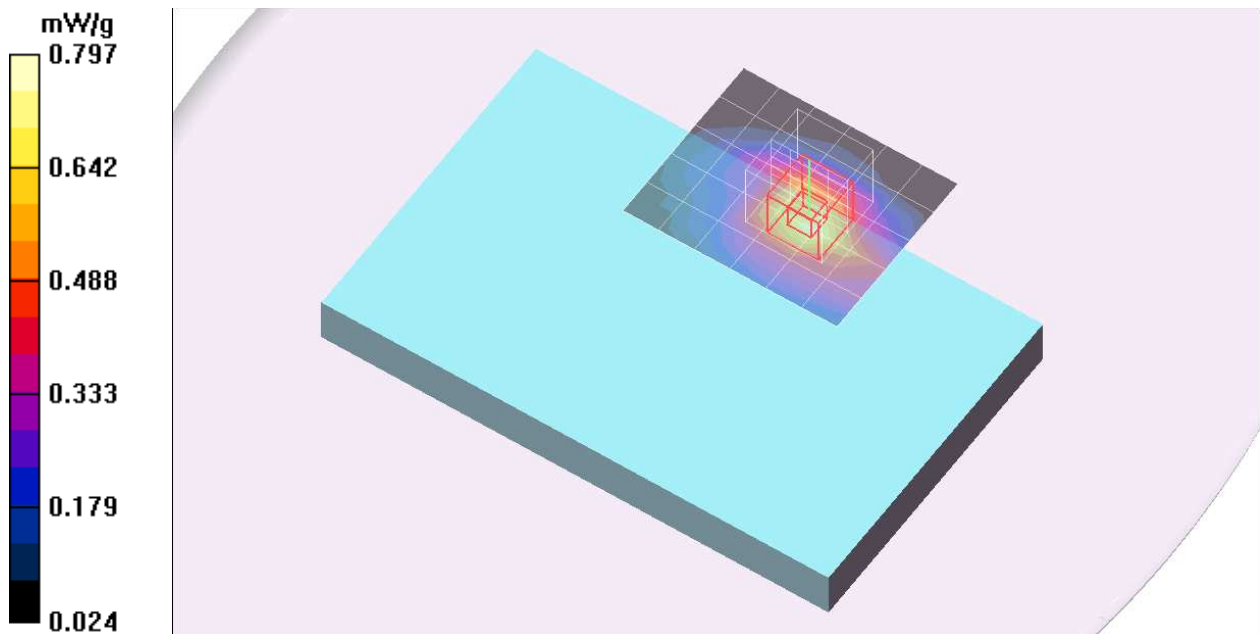


**CDMA BC0 Band**

Frequency: 836.52 MHz; Duty Cycle: 1:1

**Rear Side/CDMA BC0/CH384/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mmInfo: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.740 mW/g

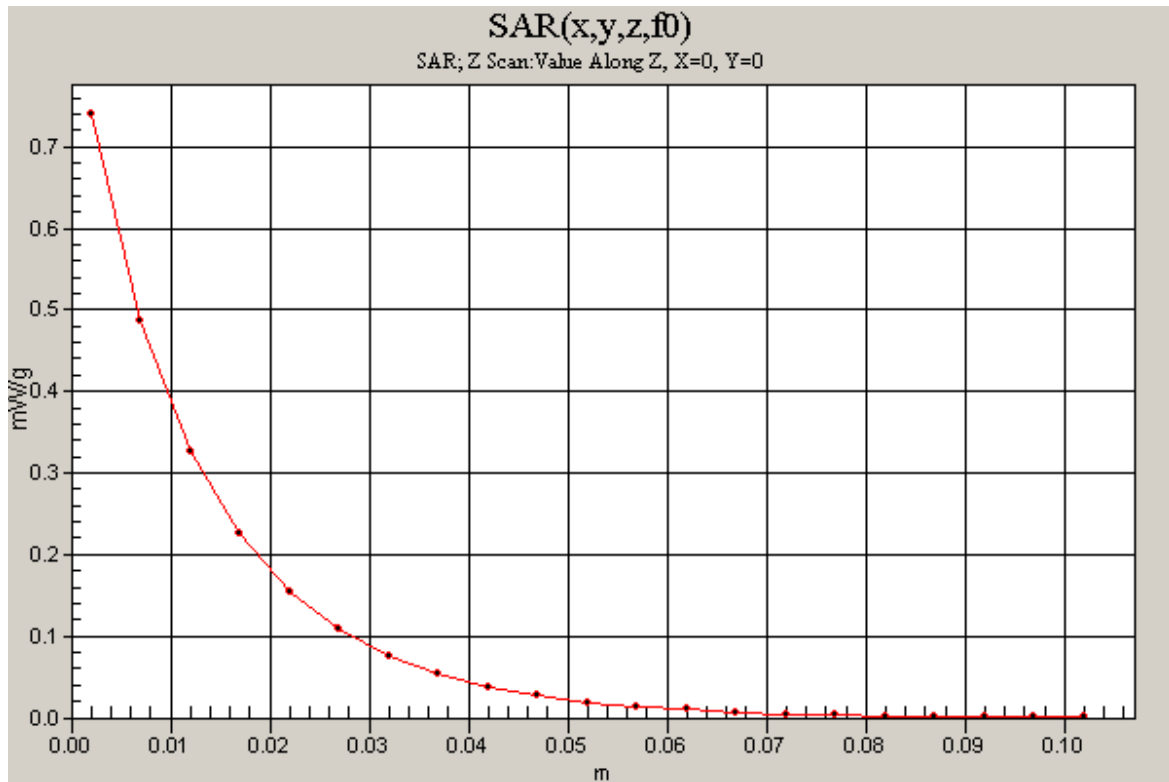

## CDMA BC0 Band

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/CDMA BC0/CH384/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.328 mW/g

**Edge2 Side/CDMA BC0/CH384/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 16.8 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 0.550 W/kg

**SAR(1 g) = 0.271 mW/g; SAR(10 g) = 0.146 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.416 mW/g

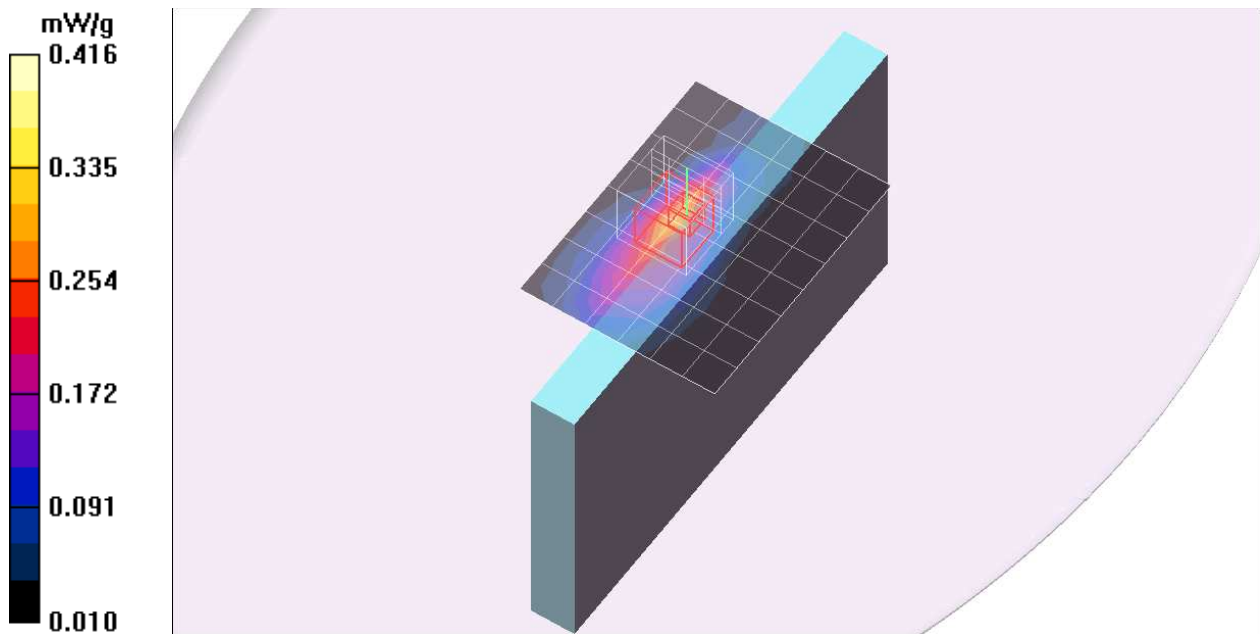

## CDMA BC1 Band

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/CDMA BC1/CH600/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.31 mW/g

**Rear Side/CDMA BC1/CH600/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.9 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 1.78 W/kg

**SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.586 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.44 mW/g

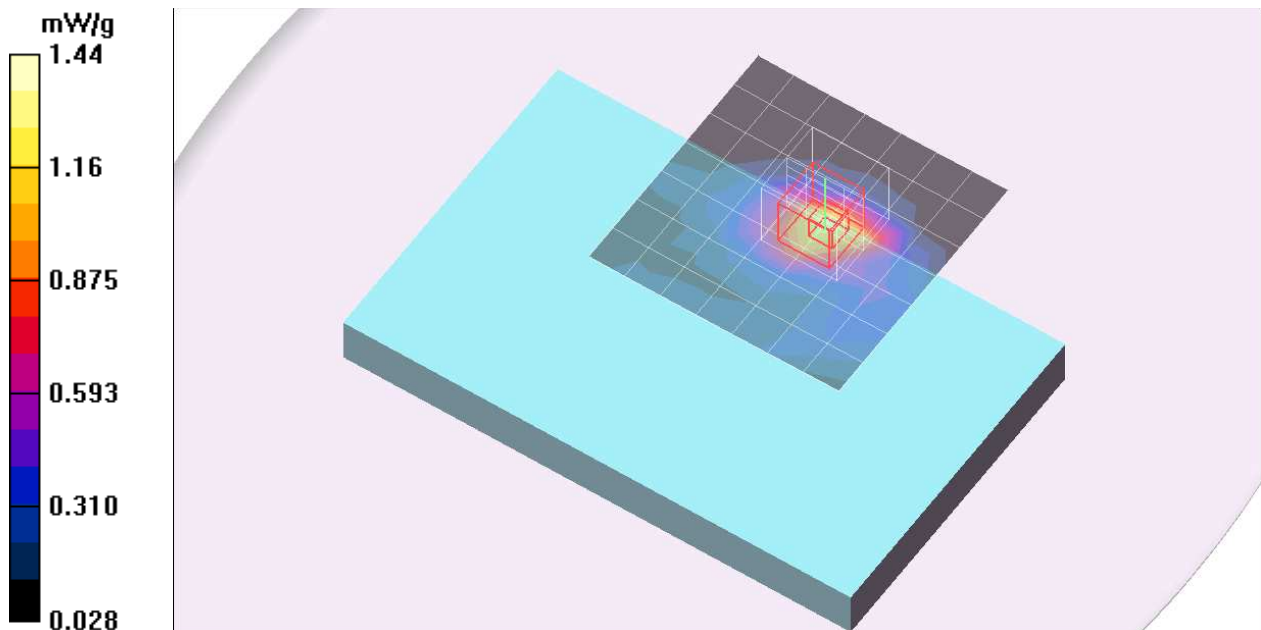


**CDMA BC1 Band**

Frequency: 1880 MHz; Duty Cycle: 1:1

**Rear Side/CDMA BC1/CH600/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.41 mW/g

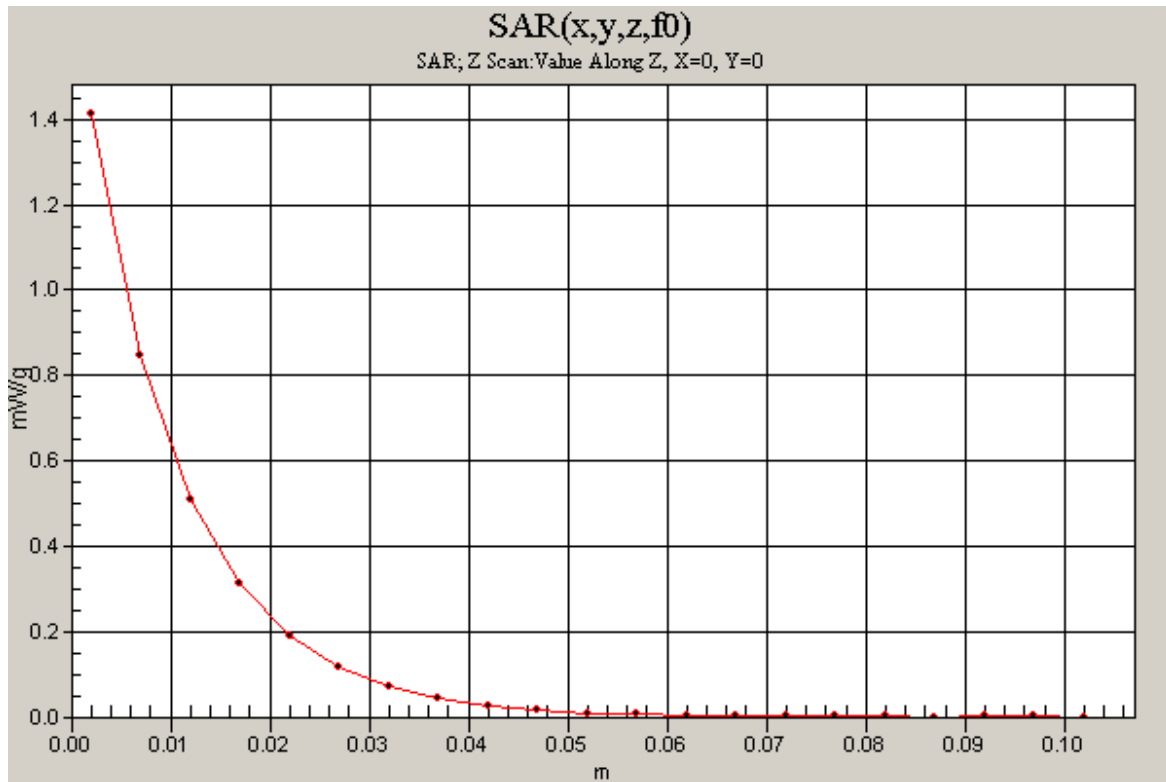

## CDMA BC1 Band

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1851.7$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/CDMA BC1/CH25/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.46 mW/g


**Rear Side/CDMA BC1/CH25/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.64 W/kg

**SAR(1 g) = 0.995 mW/g; SAR(10 g) = 0.570 mW/g**

Maximum value of SAR (measured) = 1.33 mW/g

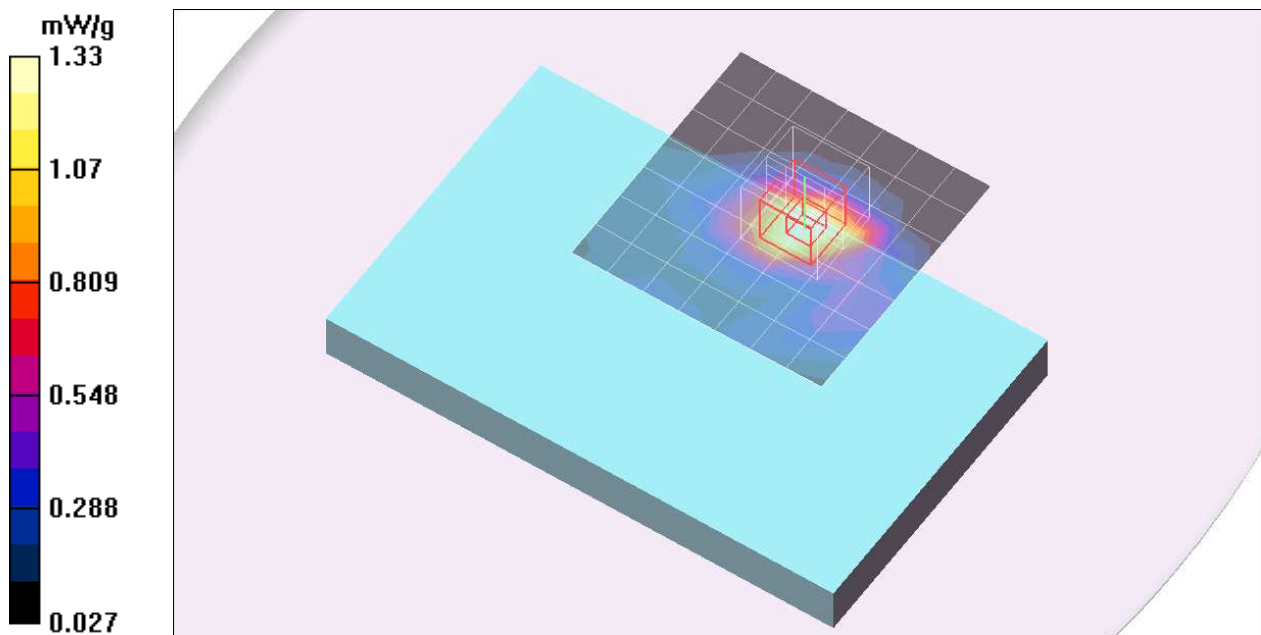

## CDMA BC1 Band

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1908.75$  MHz;  $\sigma = 1.58$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/CDMA BC1/CH1175/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.04 mW/g

**Rear Side/CDMA BC1/CH1175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.76 V/m; Power Drift = -0.088 dB

Peak SAR (extrapolated) = 1.43 W/kg

**SAR(1 g) = 0.845 mW/g; SAR(10 g) = 0.473 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.15 mW/g

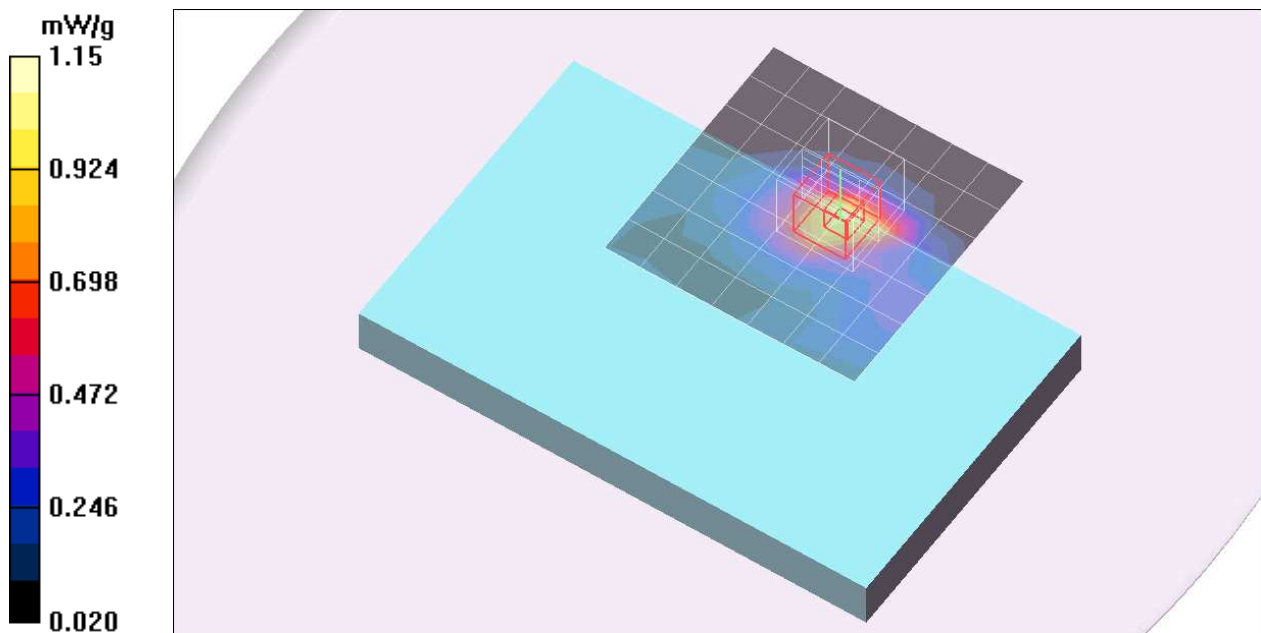

## CDMA BC1 Band

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/CDMA BC1/CH600/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.32 mW/g

**Edge2 Side/CDMA BC1/CH600/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.0 V/m; Power Drift = -0.162 dB

Peak SAR (extrapolated) = 1.69 W/kg

**SAR(1 g) = 0.949 mW/g; SAR(10 g) = 0.500 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.38 mW/g

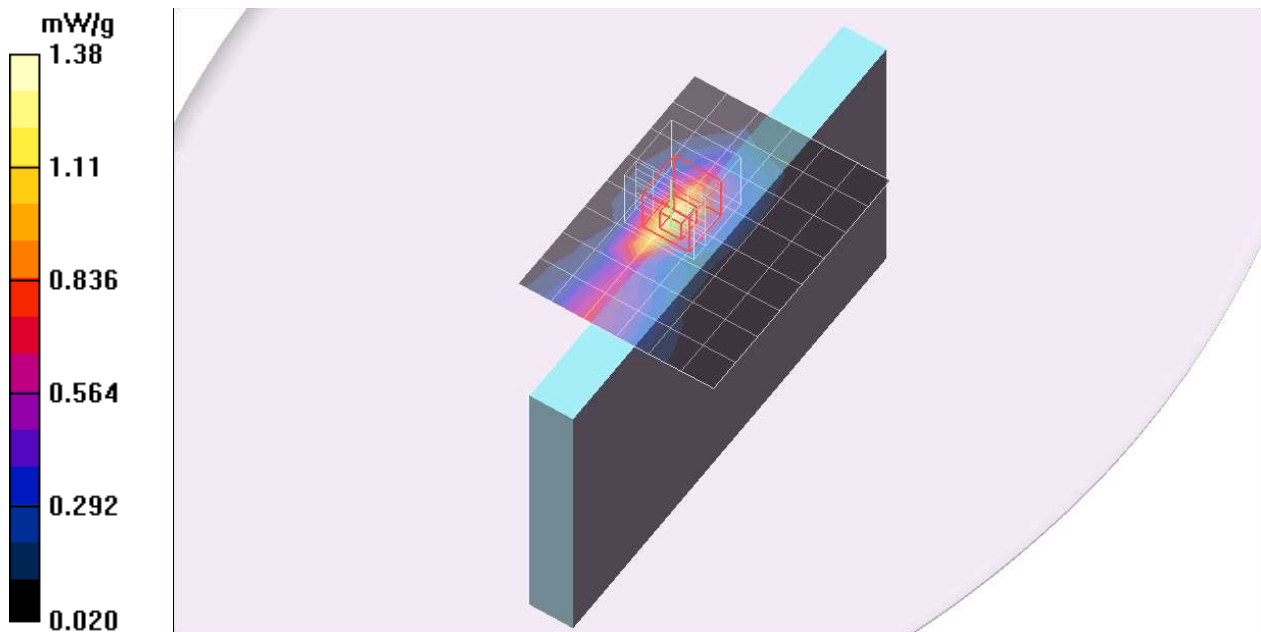

## CDMA BC1 Band

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1851.7$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/CDMA BC1/CH25/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.06 mW/g


**Edge2 Side/CDMA BC1/CH25/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.4 V/m; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 1.43 W/kg

**SAR(1 g) = 0.859 mW/g; SAR(10 g) = 0.476 mW/g**

Maximum value of SAR (measured) = 1.16 mW/g

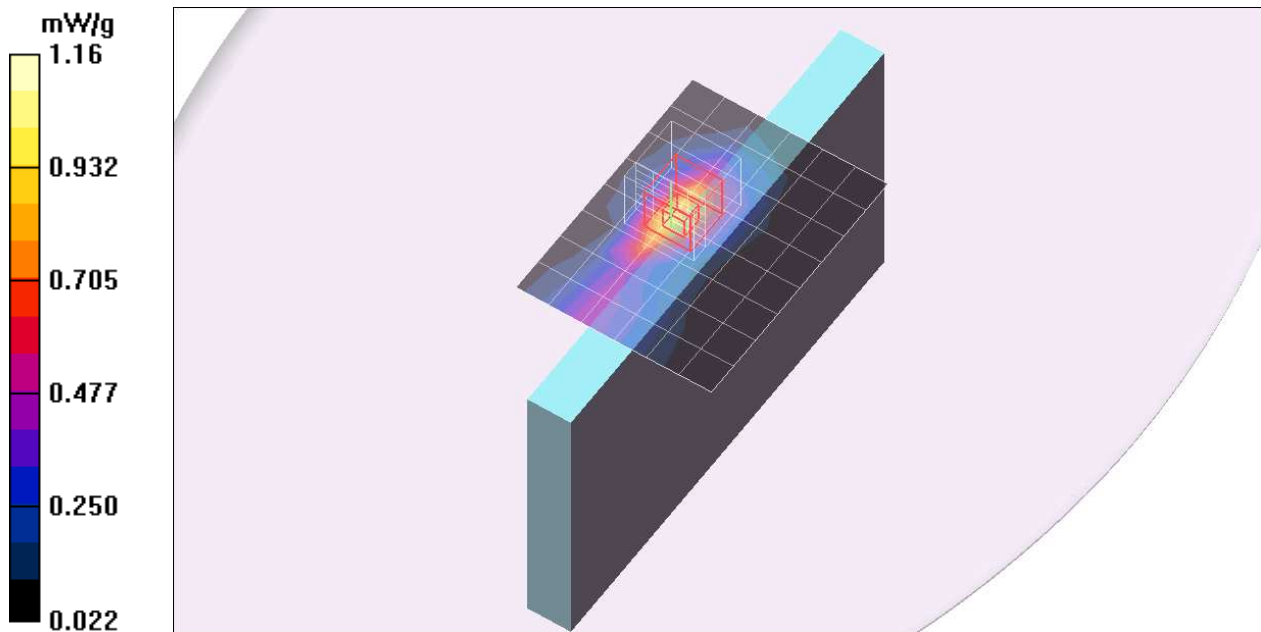

## CDMA BC1 Band

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1908.75$  MHz;  $\sigma = 1.58$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/CDMA BC1/CH1175/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.840 mW/g

**Edge2 Side/CDMA BC1/CH1175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.6 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.686 mW/g; SAR(10 g) = 0.378 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.954 mW/g

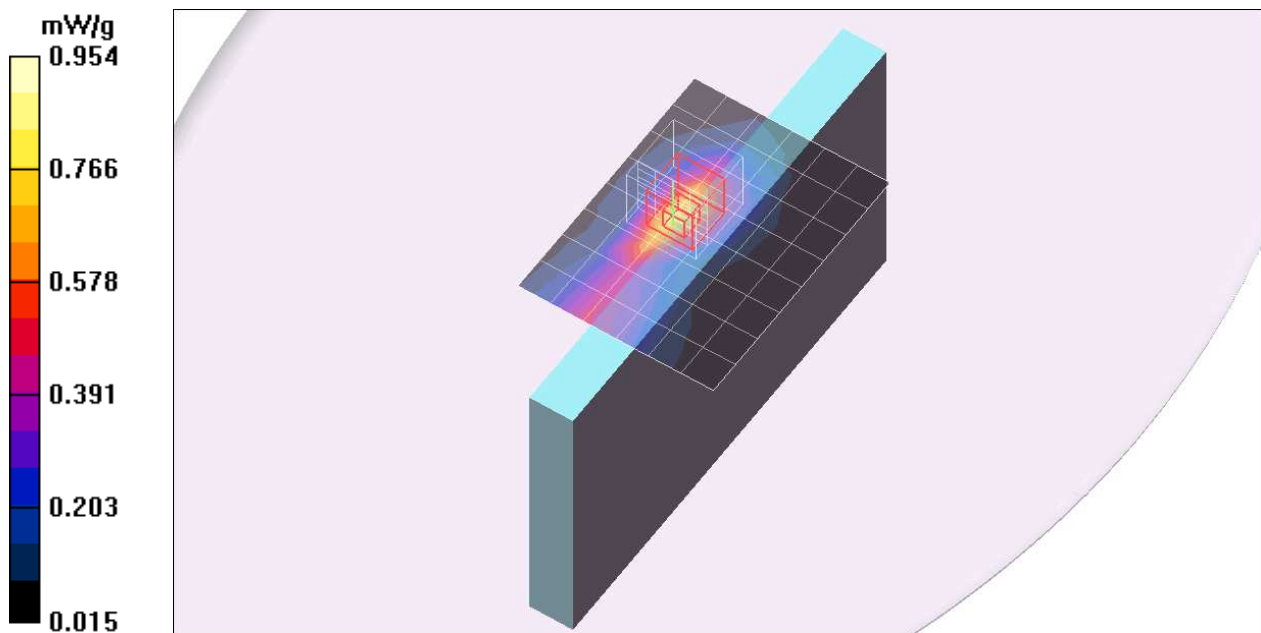

## CDMA BC1 Band

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/CDMA BC1/CH600\_Repeat/Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.30 mW/g

**Rear Side/CDMA BC1/CH600\_Repeat/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.5 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 1.73 W/kg

**SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.580 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.40 mW/g

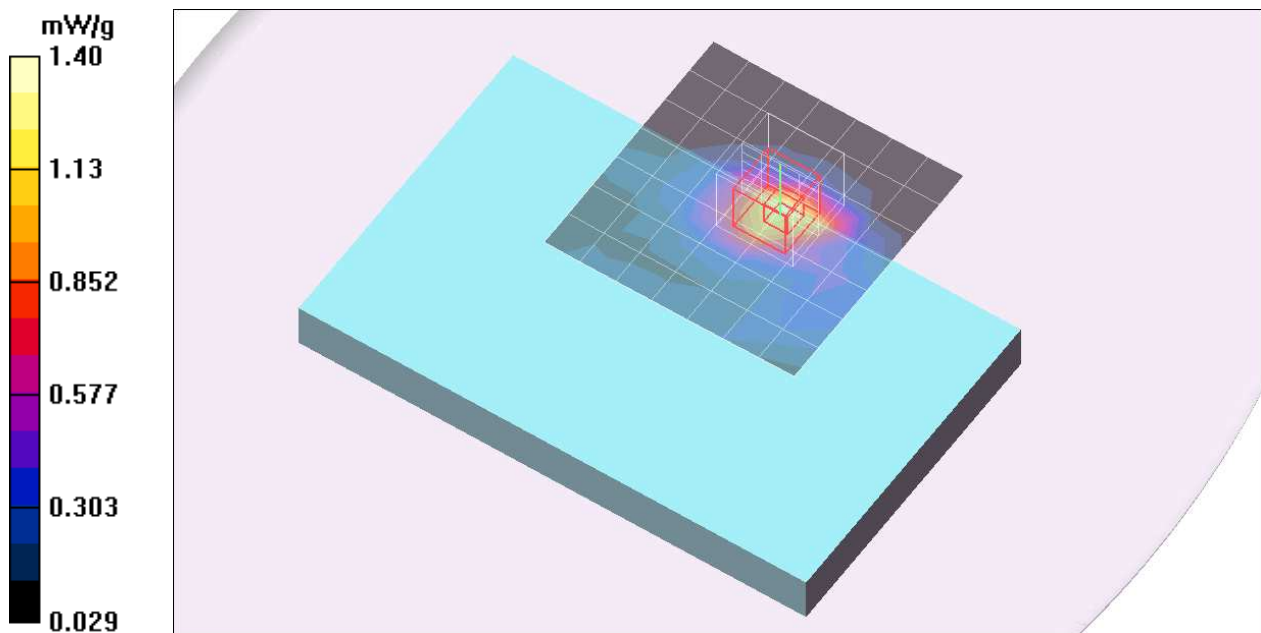

## CDMA BC10 Band

Frequency: 820.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 820.5$  MHz;  $\sigma = 0.963$  mho/m;  $\epsilon_r = 55.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/CDMA BC10 Band/CH580/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.822 mW/g

**Rear Side/CDMA BC10 Band/CH580/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.71 V/m; Power Drift = -0.137 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.662 mW/g; SAR(10 g) = 0.407 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.876 mW/g

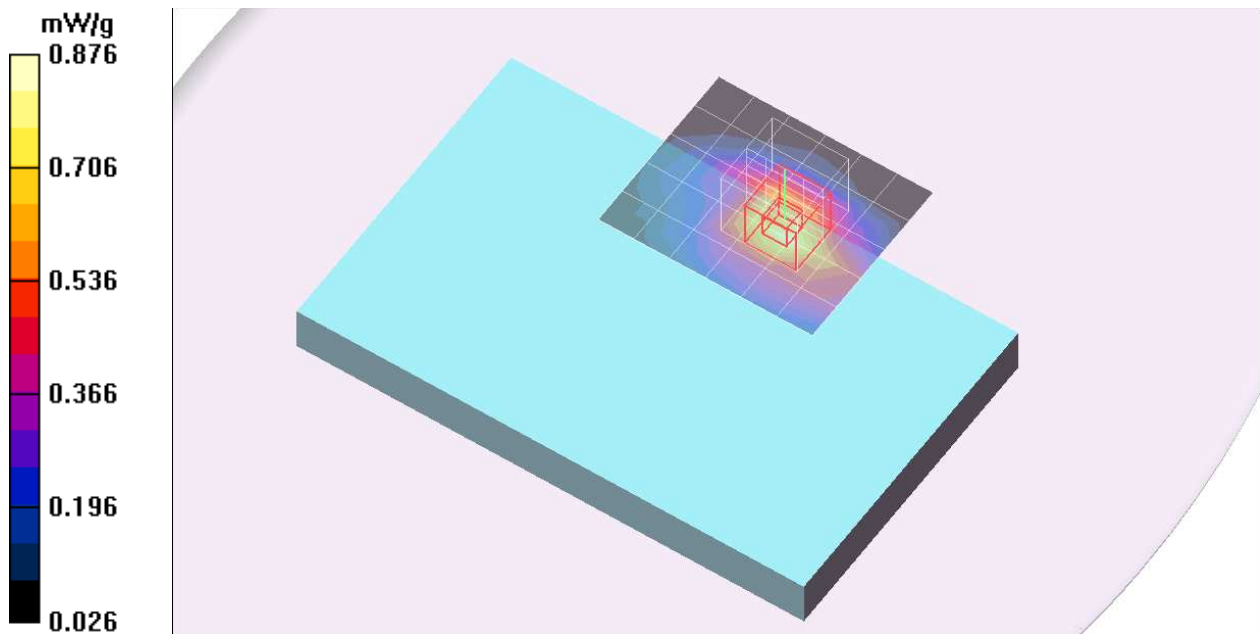

## CDMA BC10 Band

Frequency: 820.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 820.5$  MHz;  $\sigma = 0.963$  mho/m;  $\epsilon_r = 55.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2 Side/CDMA BC10 Band/CH580/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.06 mW/g

**Edge2 Side/CDMA BC10 Band/CH580/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm,

dy=8mm, dz=5mm


Reference Value = 36.5 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.679 mW/g; SAR(10 g) = 0.415 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.879 mW/g

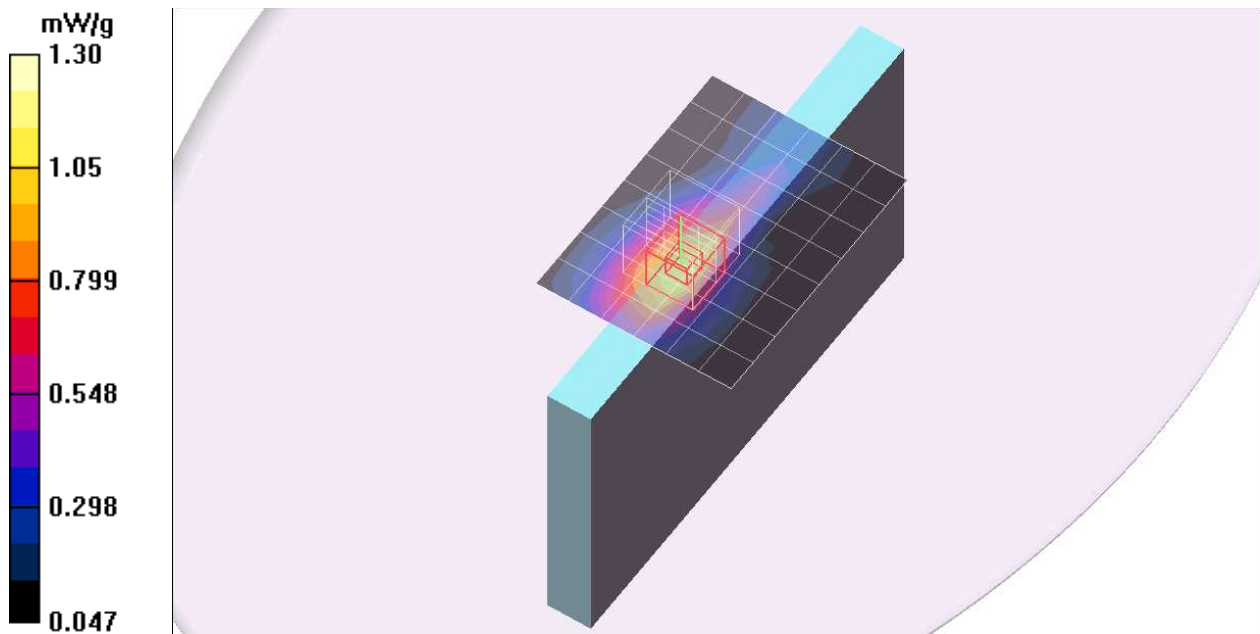


**CDMA BC10 Band**

Frequency: 820.5 MHz; Duty Cycle: 1:1

**Edge2 Side/CDMA BC10 Band/CH580/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.686 mW/g

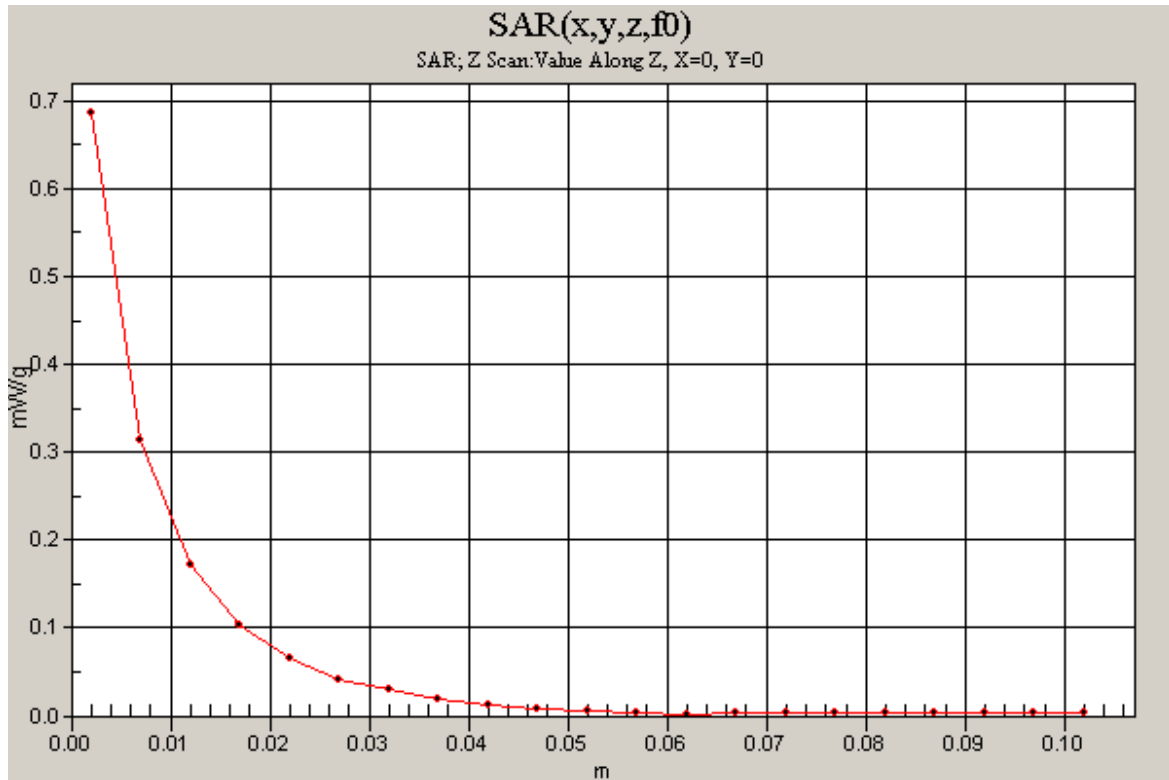

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH18700/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.968 mW/g

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH18700/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.8 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 1.95 W/kg

**SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.561 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.60 mW/g

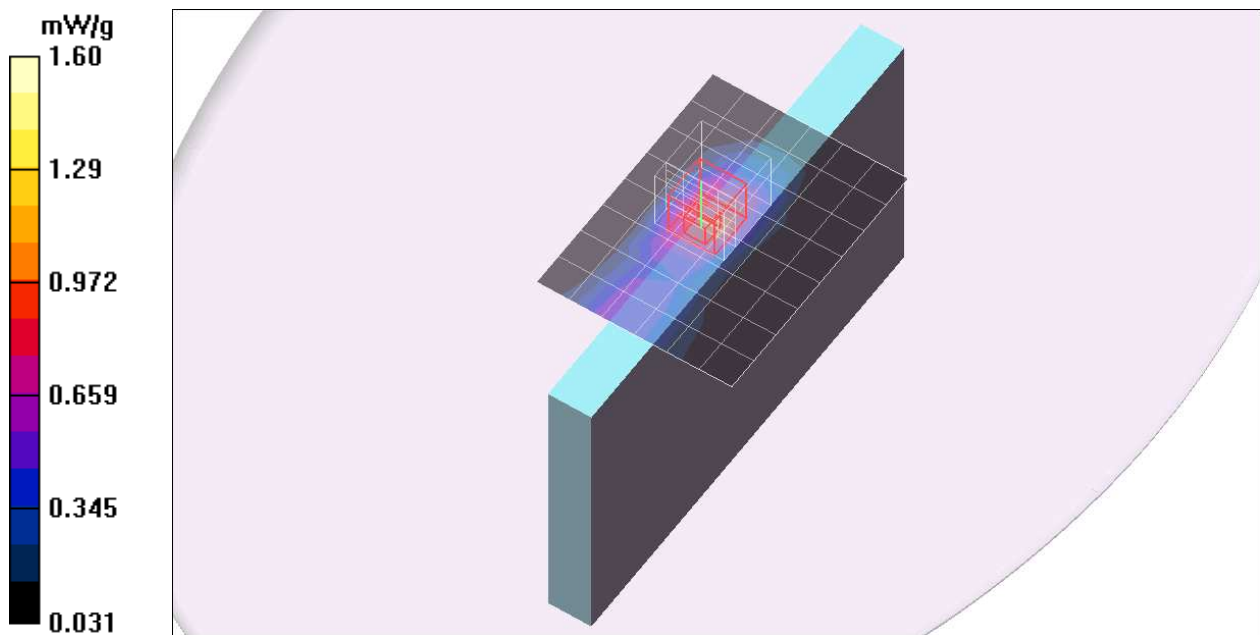

## LTE Band 2


Frequency: 1860 MHz; Duty Cycle: 1:1

**Edge2/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH18700/Z Scan (1x1x21):** Measurement grid:

dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.60 mW/g

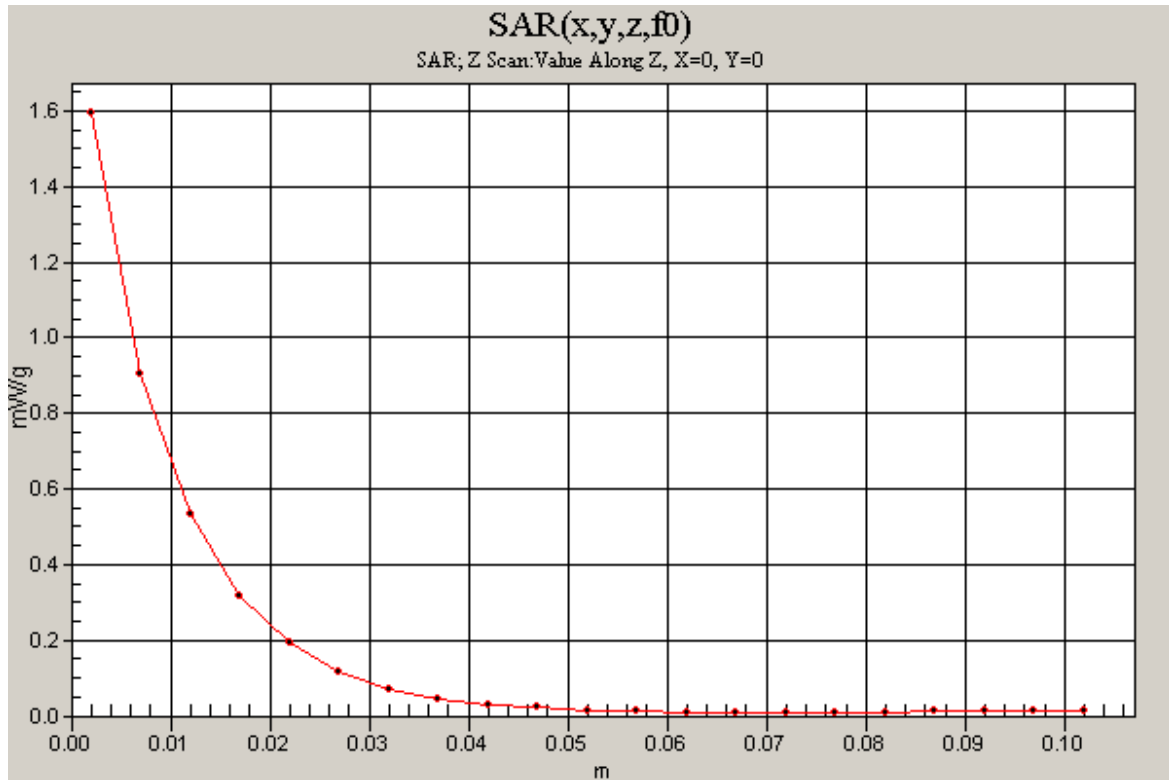

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 1,49/CH18700/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.883 mW/g

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 1,49/CH18700/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 27.7 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 1.79 W/kg

**SAR(1 g) = 0.994 mW/g; SAR(10 g) = 0.517 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.47 mW/g

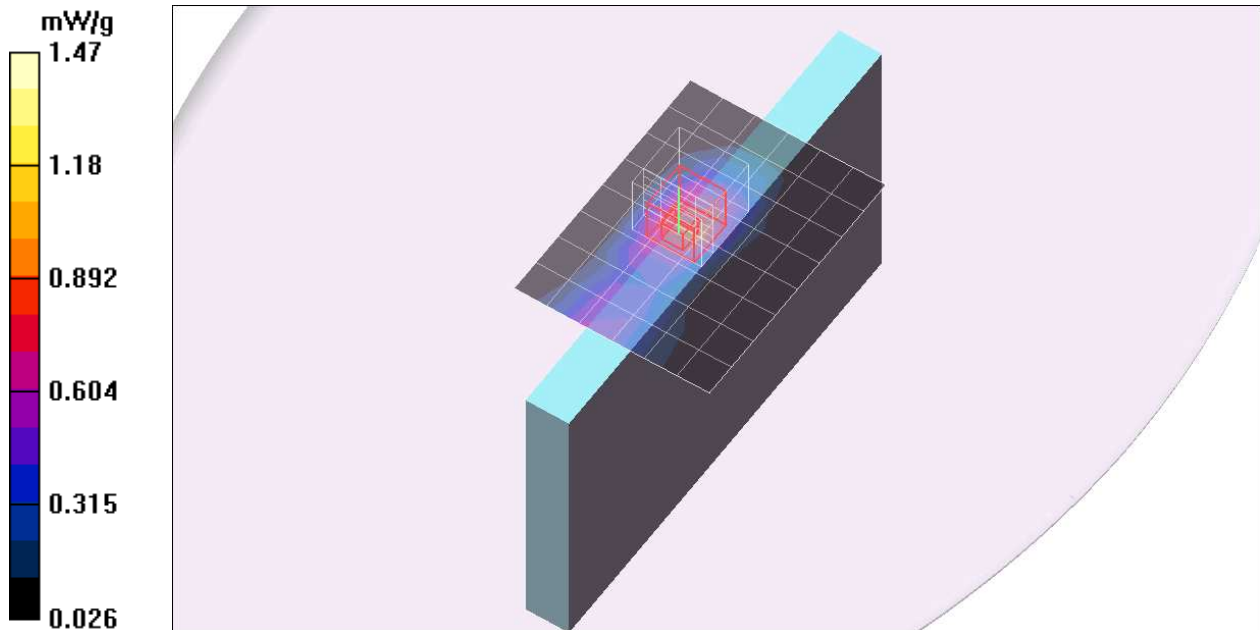

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 1,99/CH18700/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.824 mW/g

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 1,99/CH18700/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.4 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 0.913 mW/g; SAR(10 g) = 0.470 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.33 mW/g

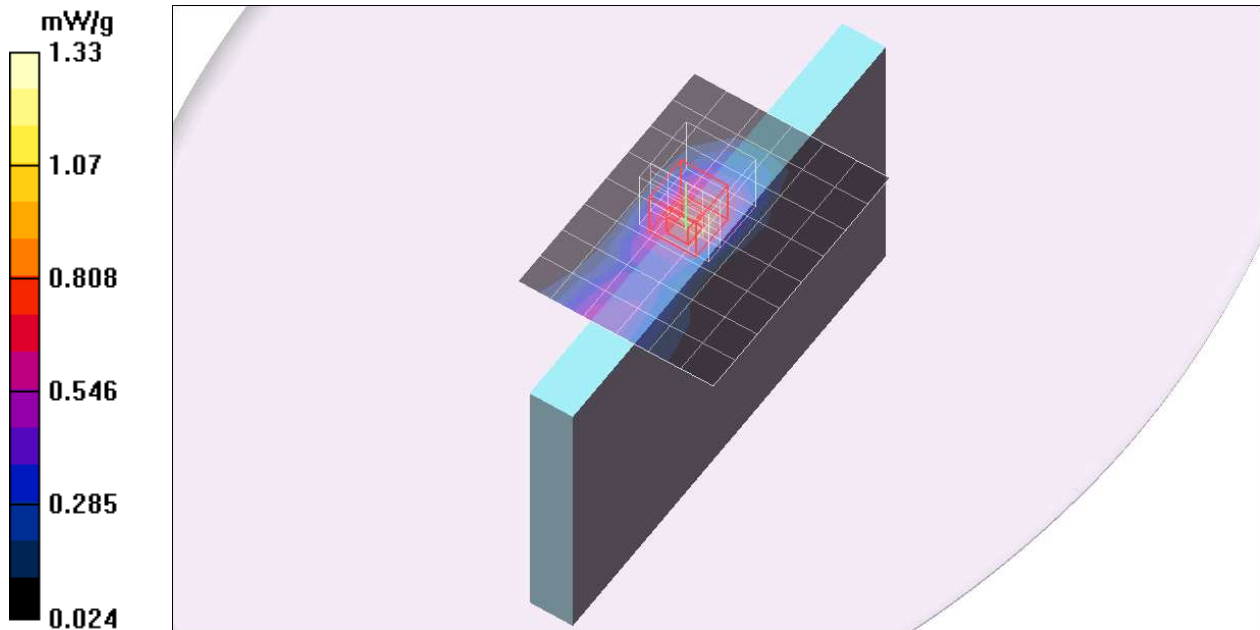

## LTE Band 2

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH18900/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.854 mW/g

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH18900/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.3 V/m; Power Drift = -0.391 dB

Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 0.900 mW/g; SAR(10 g) = 0.467 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.32 mW/g

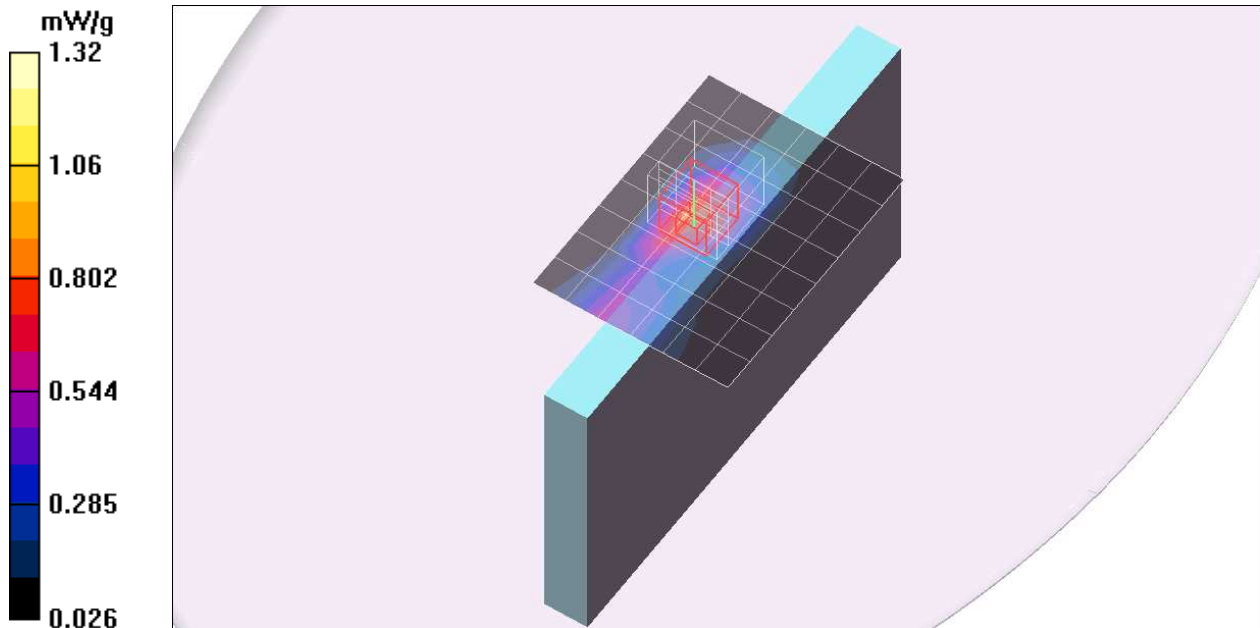

## LTE Band 2

Frequency: 1900 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.57$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH19100/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.779 mW/g

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH19100/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.1 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 0.817 mW/g; SAR(10 g) = 0.423 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.21 mW/g

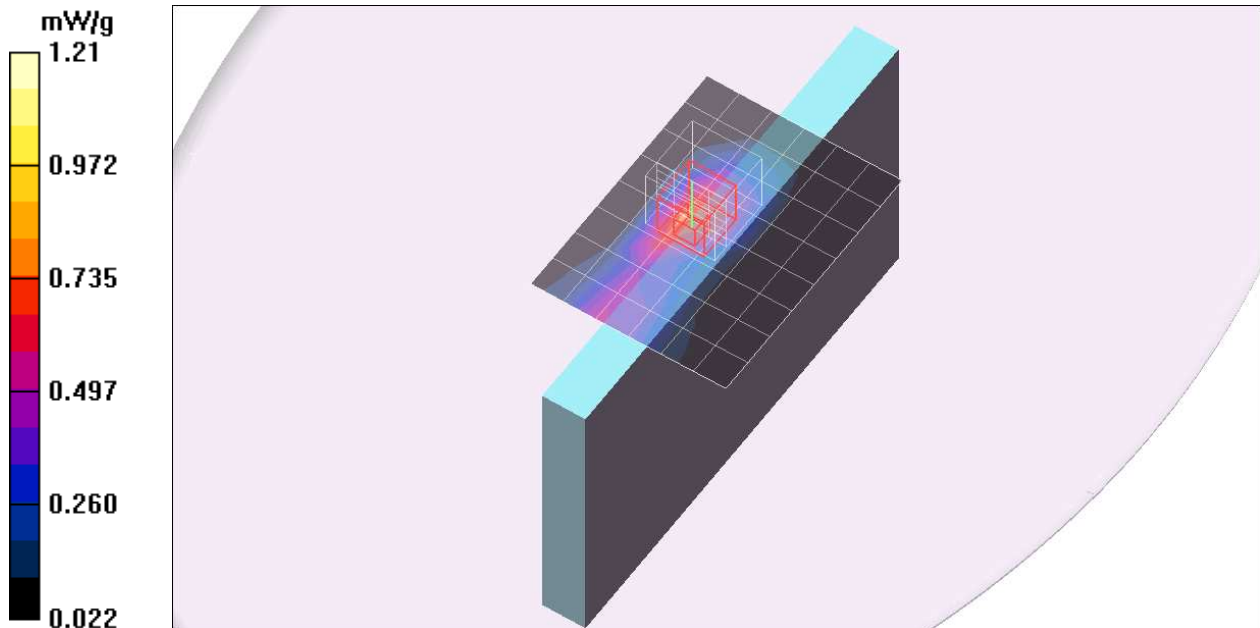

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 50,0/CH18700/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.742 mW/g

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 50,0/CH18700/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.3 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 1.35 W/kg

**SAR(1 g) = 0.761 mW/g; SAR(10 g) = 0.397 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.11 mW/g

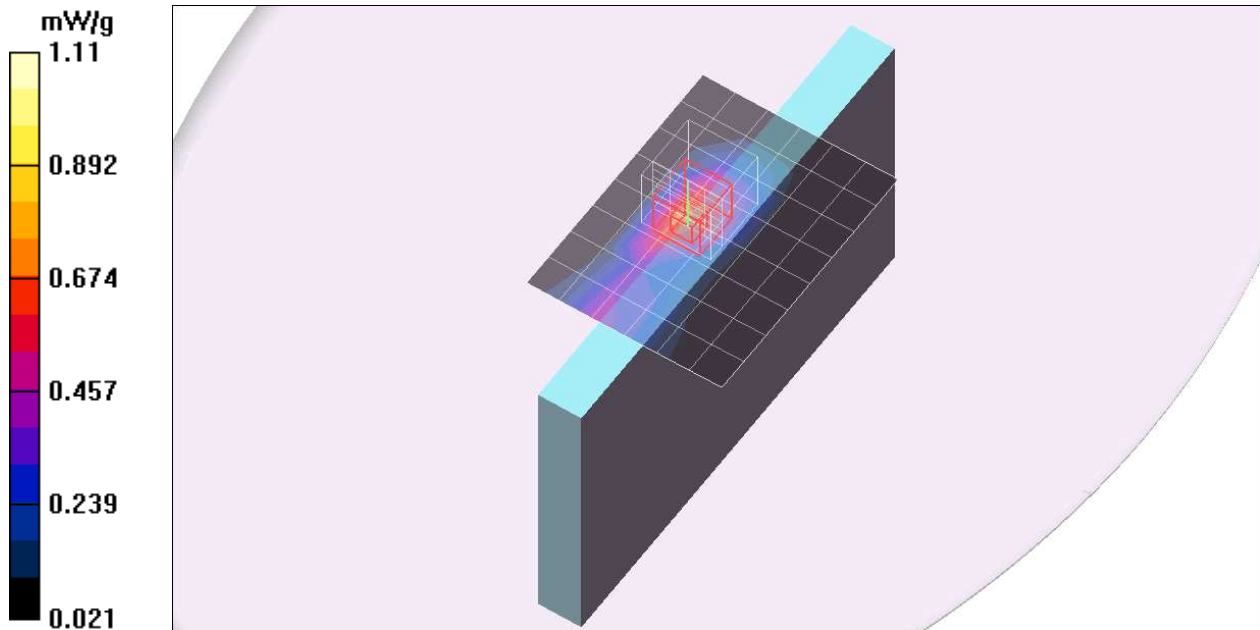

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 50,24/CH18700/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.698 mW/g

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 50,24/CH18700/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.8 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 1.29 W/kg

**SAR(1 g) = 0.728 mW/g; SAR(10 g) = 0.380 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.05 mW/g

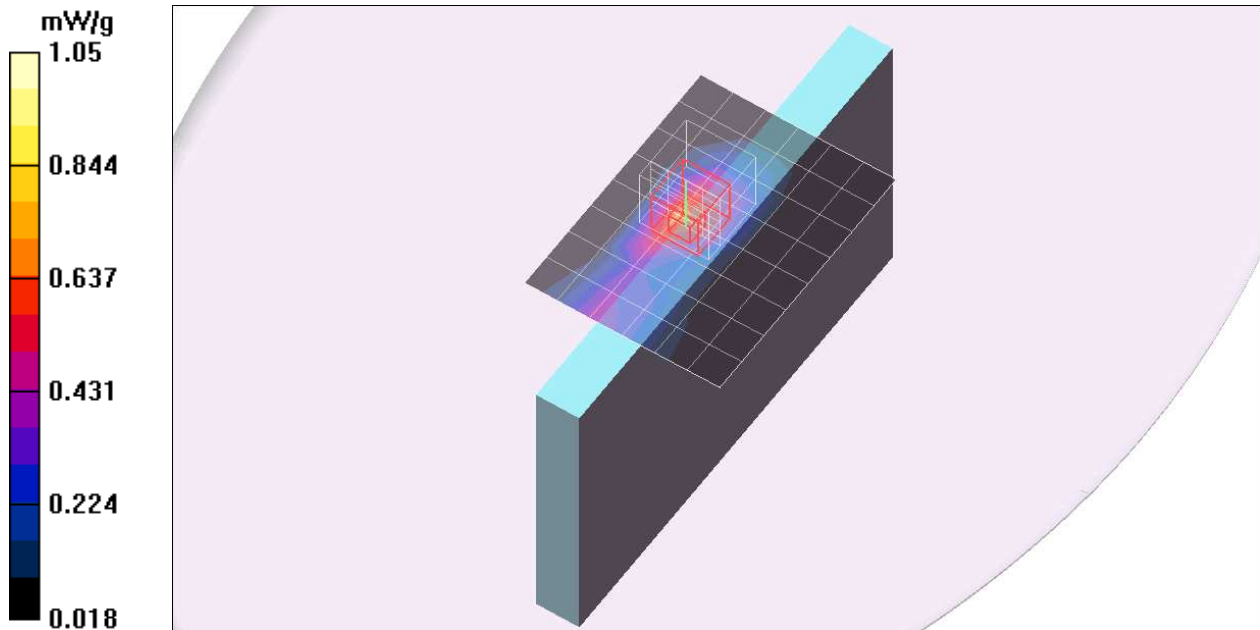

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 50,49/CH18700/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.668 mW/g

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 50,49/CH18700/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.3 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.689 mW/g; SAR(10 g) = 0.359 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.02 mW/g

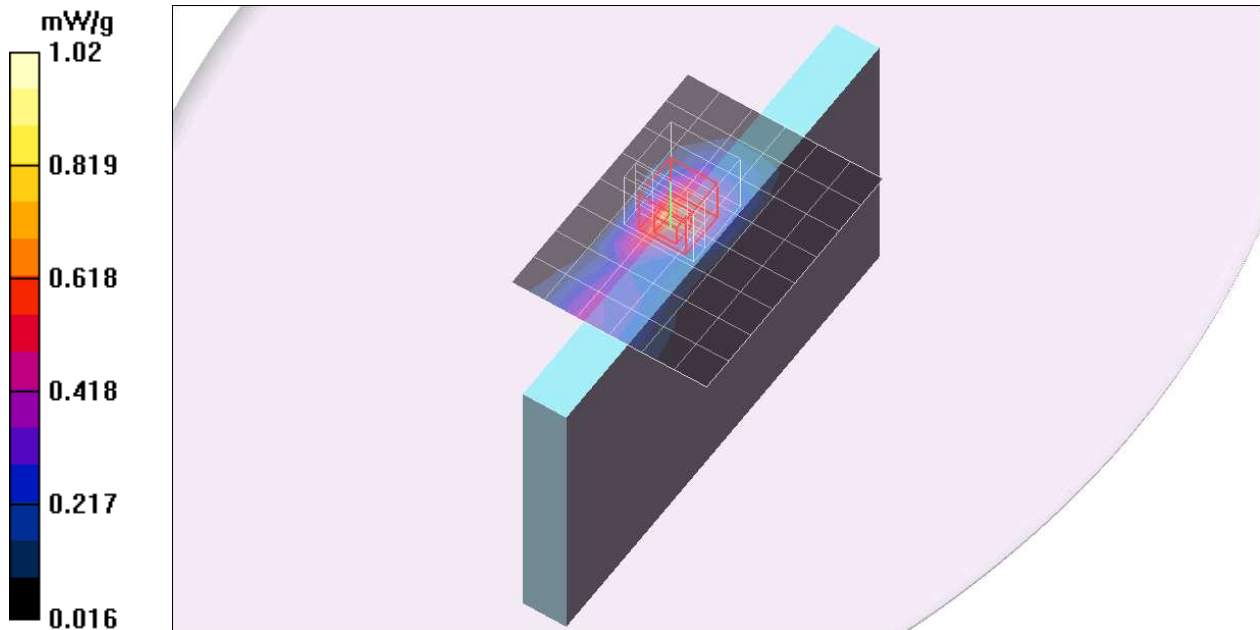

## LTE Band 2

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 50,0/CH18900/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.629 mW/g

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 50,0/CH18900/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.8 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.658 mW/g; SAR(10 g) = 0.341 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.969 mW/g

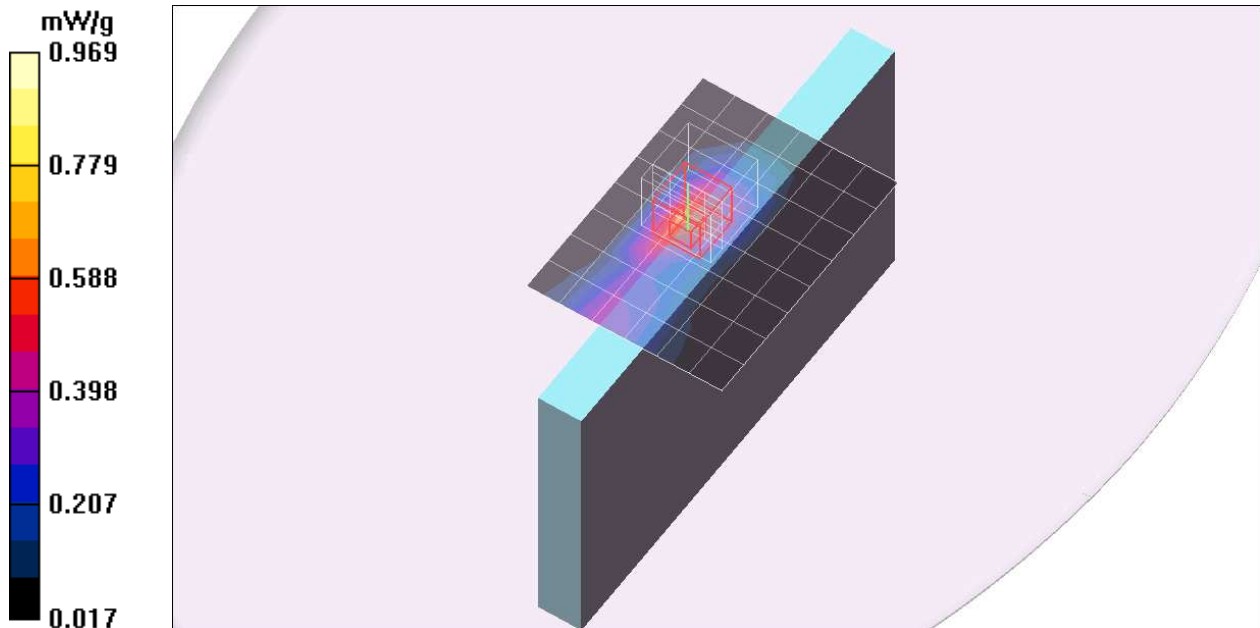

## LTE Band 2

Frequency: 1900 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.57$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 50,0/CH19100/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.577 mW/g

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 50,0/CH19100/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.0 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.619 mW/g; SAR(10 g) = 0.319 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.915 mW/g

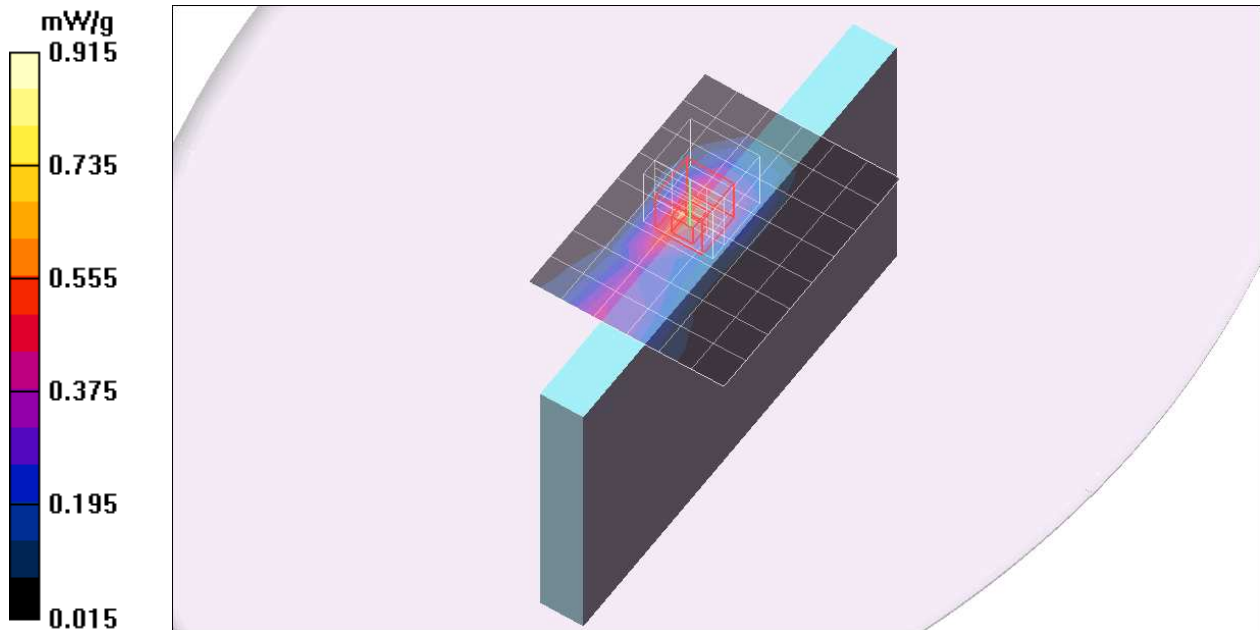

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 100,0/CH18700/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.706 mW/g

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 100,0/CH18700/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.8 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 1.31 W/kg

**SAR(1 g) = 0.728 mW/g; SAR(10 g) = 0.380 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.07 mW/g

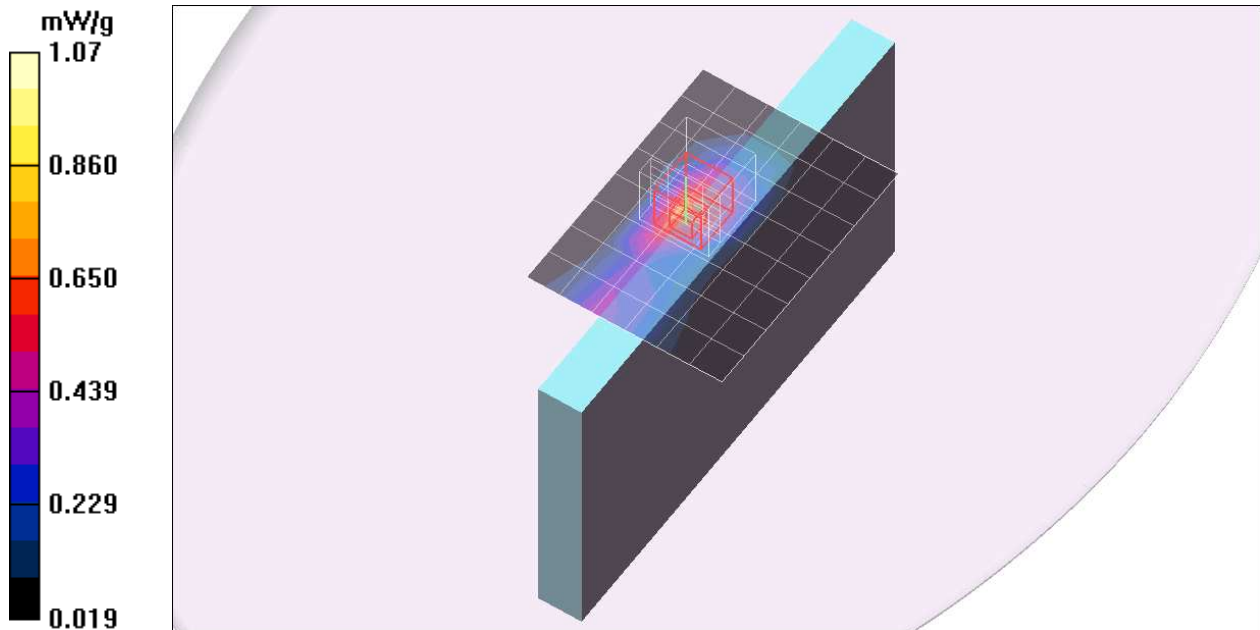

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH18700\_Repeat/Area Scan (7x9x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.953 mW/g

### Edge2/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH18700\_Repeat/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.9 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 1.94 W/kg

**SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.558 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.59 mW/g

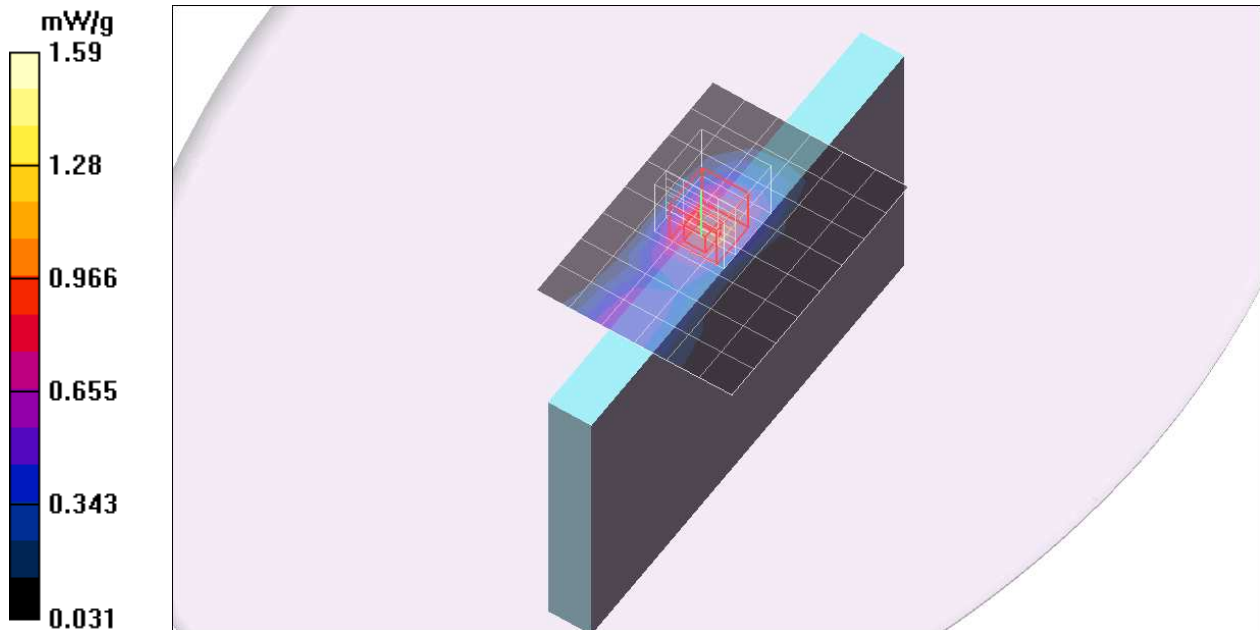

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Rear Side/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH18700/Area Scan (7x6x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.07 mW/g

### Rear Side/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH18700/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.7 V/m; Power Drift = 0.071 dB

Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 0.981 mW/g; SAR(10 g) = 0.581 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.29 mW/g

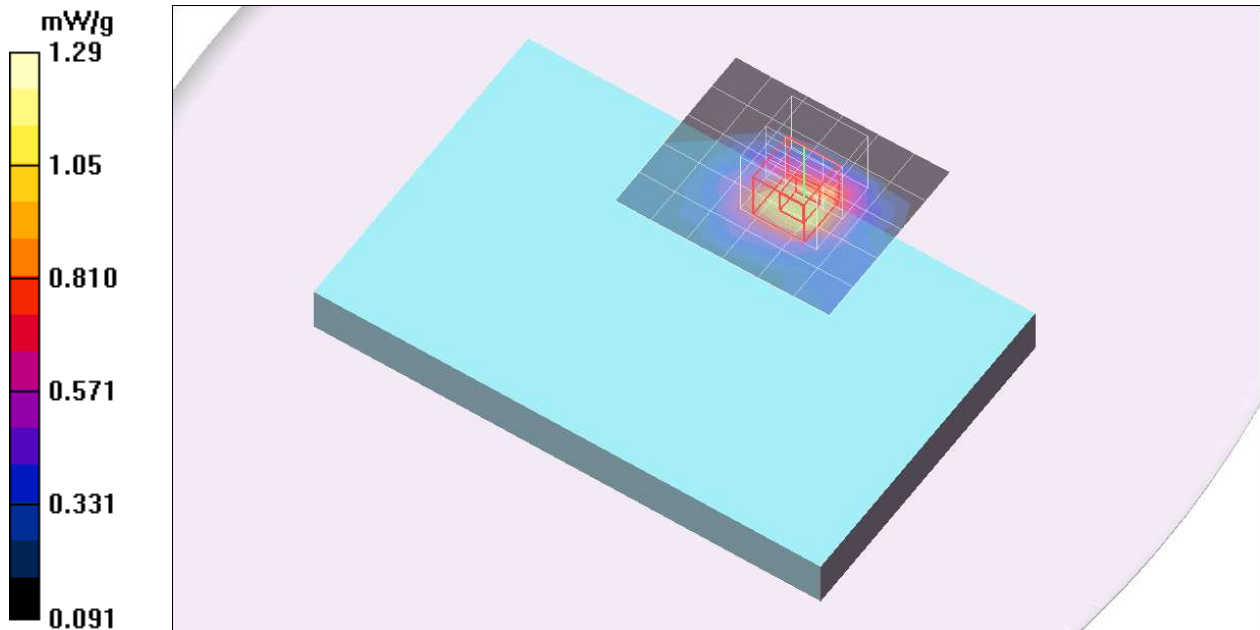

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 1,49/CH18700/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.00 mW/g

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 1,49/CH18700/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.2 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 1.52 W/kg

**SAR(1 g) = 0.927 mW/g; SAR(10 g) = 0.549 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.22 mW/g

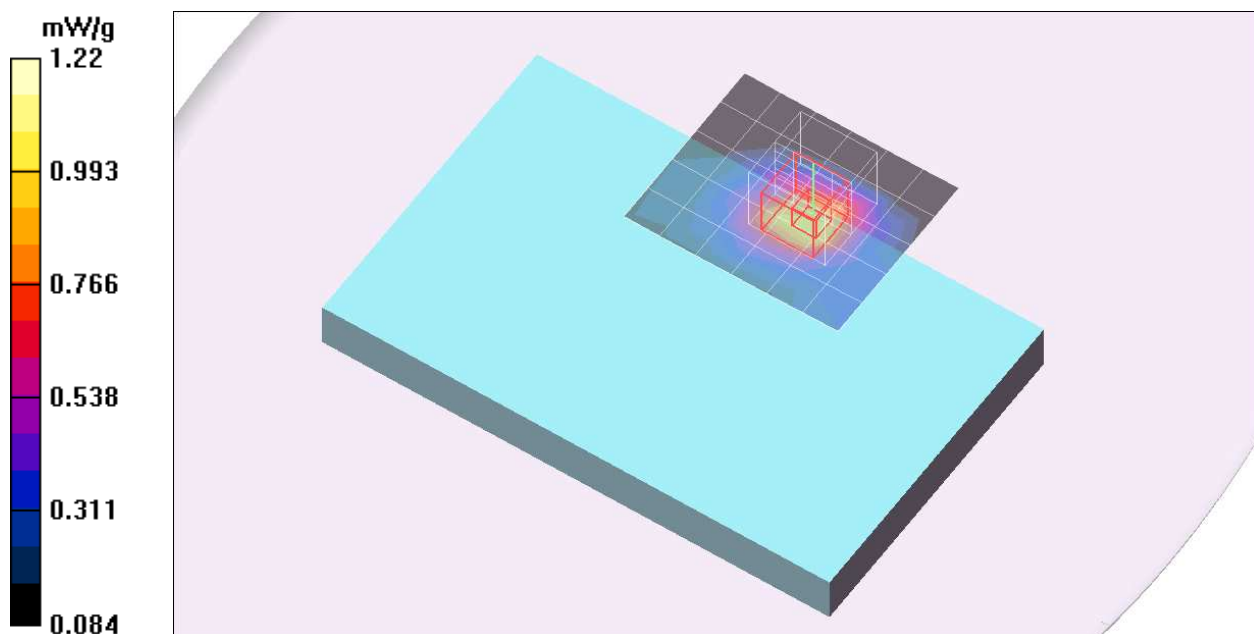

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 1,99/CH18700/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.930 mW/g

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 1,99/CH18700/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.6 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.853 mW/g; SAR(10 g) = 0.504 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.12 mW/g

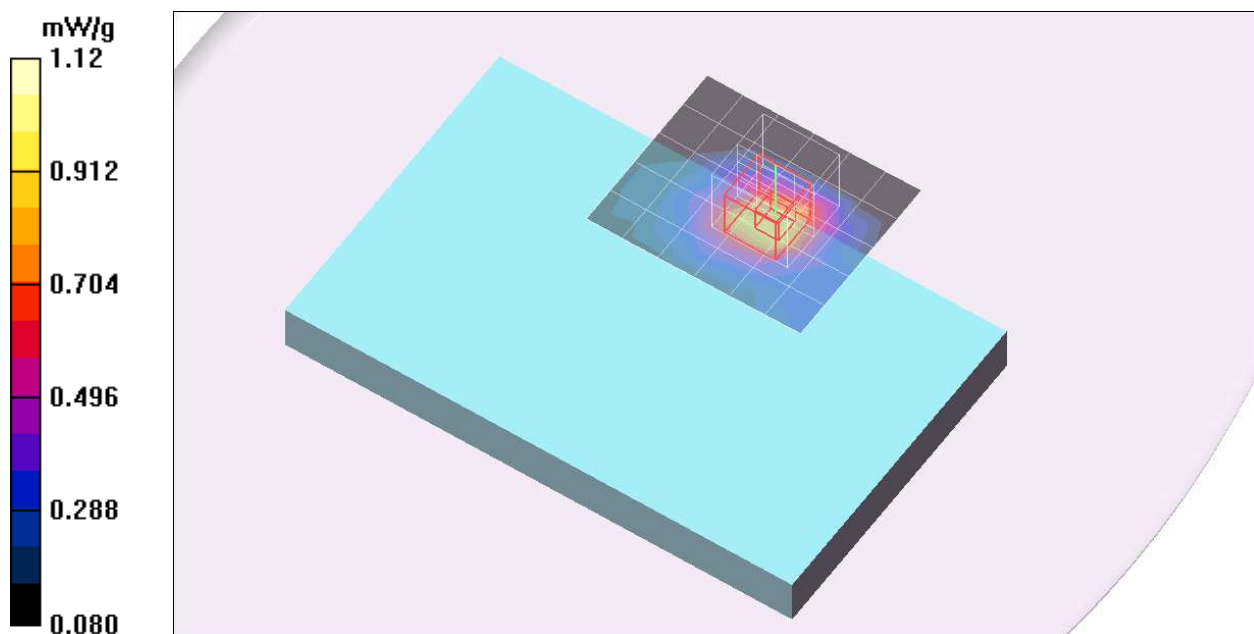

## LTE Band 2

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Rear Side/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH18900/Area Scan (7x6x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.957 mW/g

### Rear Side/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH18900/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.9 V/m; Power Drift = -0.188 dB

Peak SAR (extrapolated) = 1.50 W/kg

**SAR(1 g) = 0.900 mW/g; SAR(10 g) = 0.531 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.20 mW/g

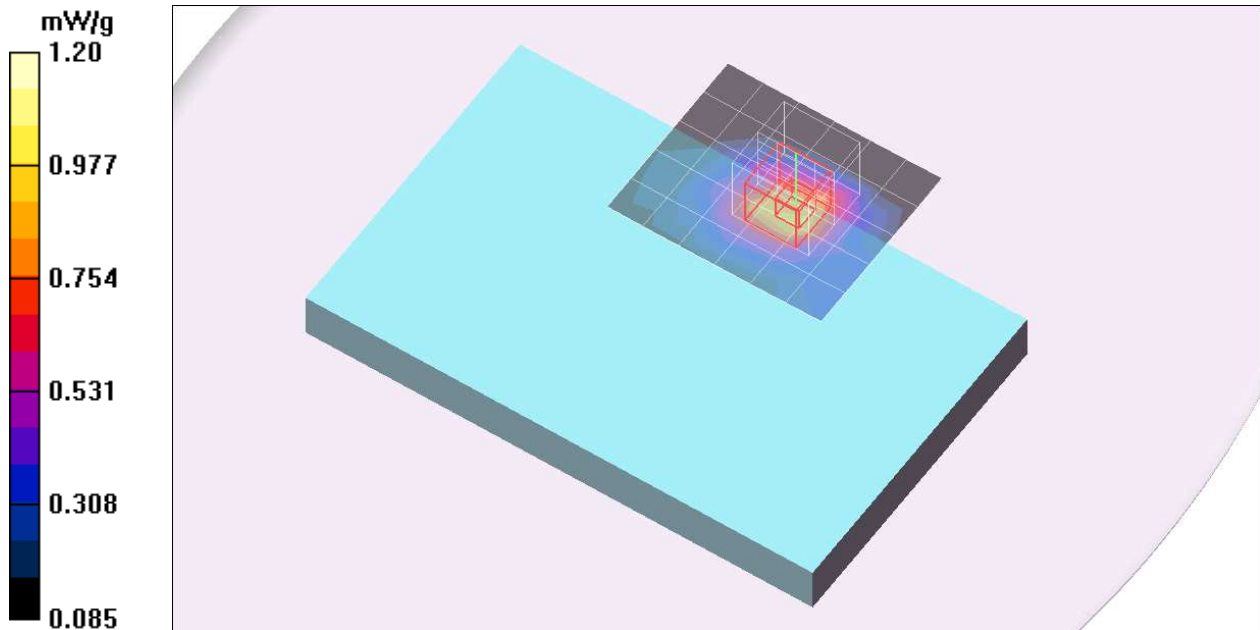

## LTE Band 2

Frequency: 1900 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.57$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Rear Side/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH19100/Area Scan (7x6x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.876 mW/g

### Rear Side/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH19100/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.69 V/m; Power Drift = 0.128 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.841 mW/g; SAR(10 g) = 0.491 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.12 mW/g

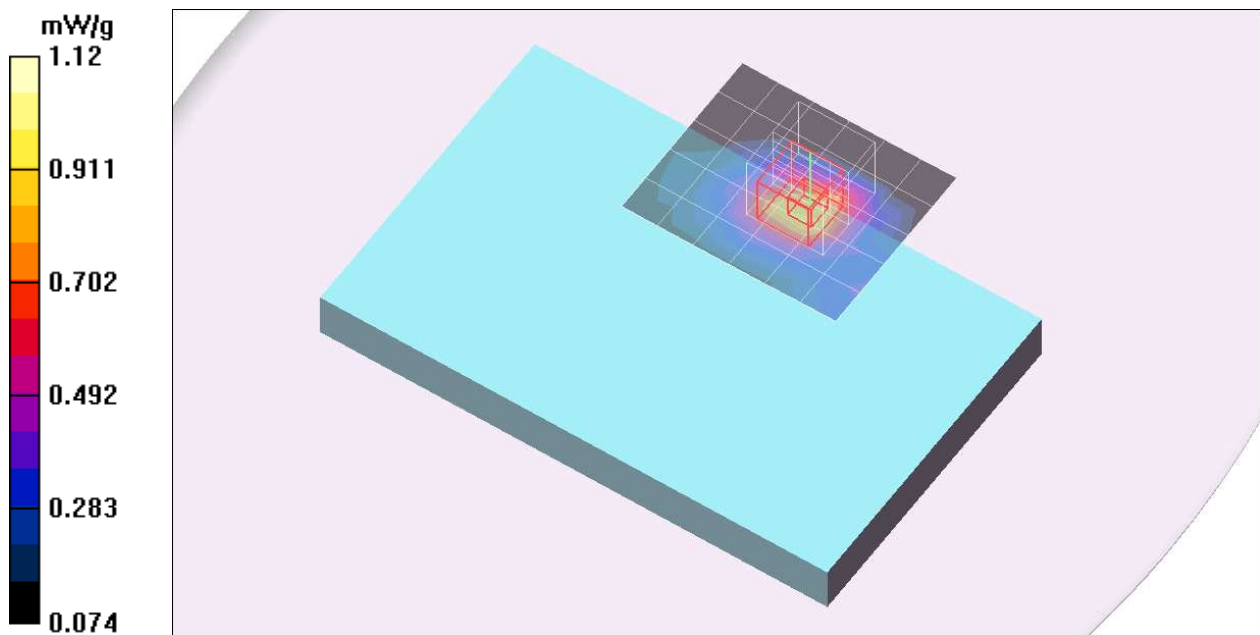

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 50,0/CH18700/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.790 mW/g

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 50,0/CH18700/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.98 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.722 mW/g; SAR(10 g) = 0.430 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.943 mW/g

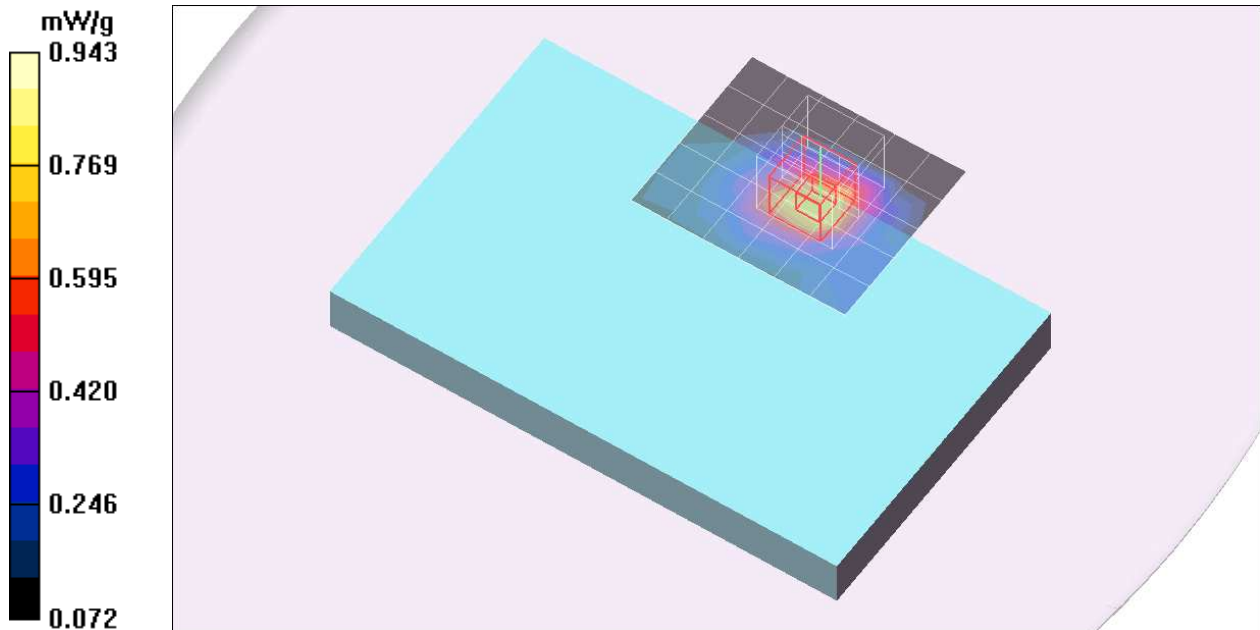

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 50,24/CH18700/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.761 mW/g

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 50,24/CH18700/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.63 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.698 mW/g; SAR(10 g) = 0.410 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.925 mW/g

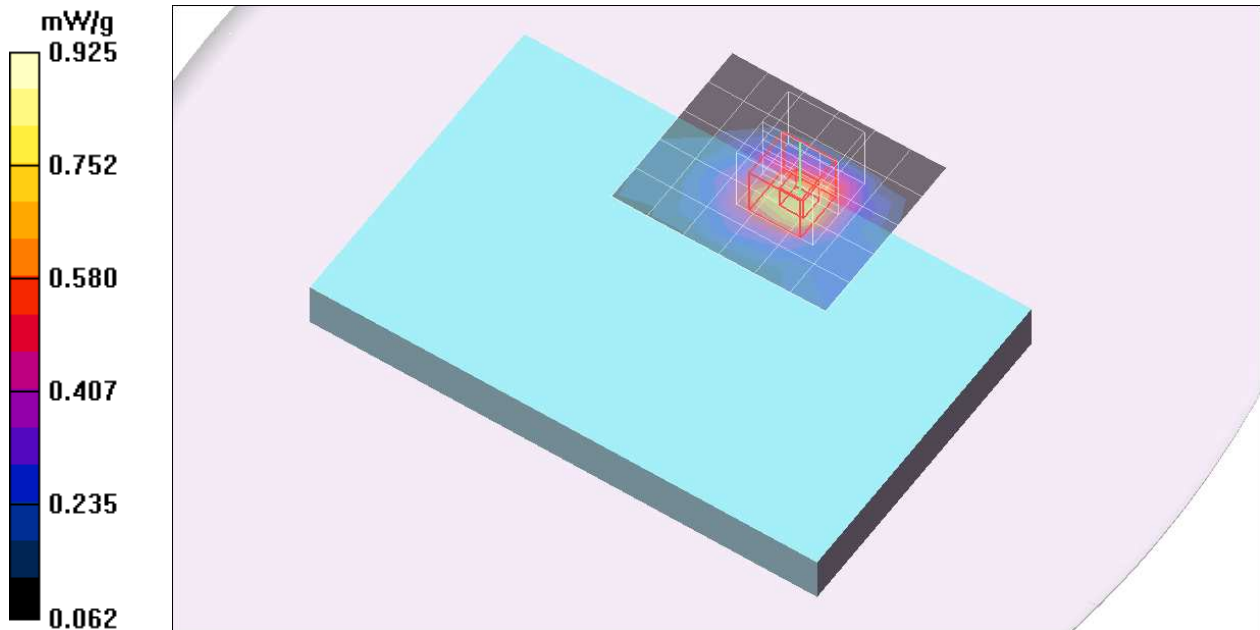

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 50,49/CH18700/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.719 mW/g

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 50,49/CH18700/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.38 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.666 mW/g; SAR(10 g) = 0.392 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.876 mW/g

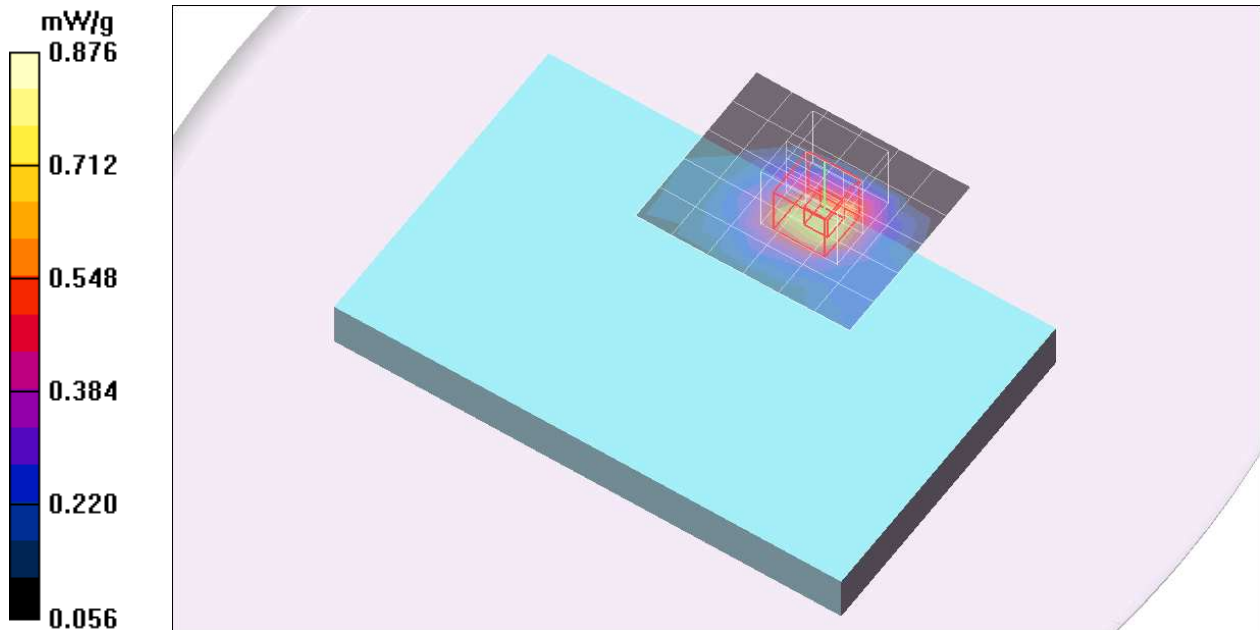

## LTE Band 2

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 50,0/CH18900/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.702 mW/g

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 50,0/CH18900/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.23 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.397 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.887 mW/g

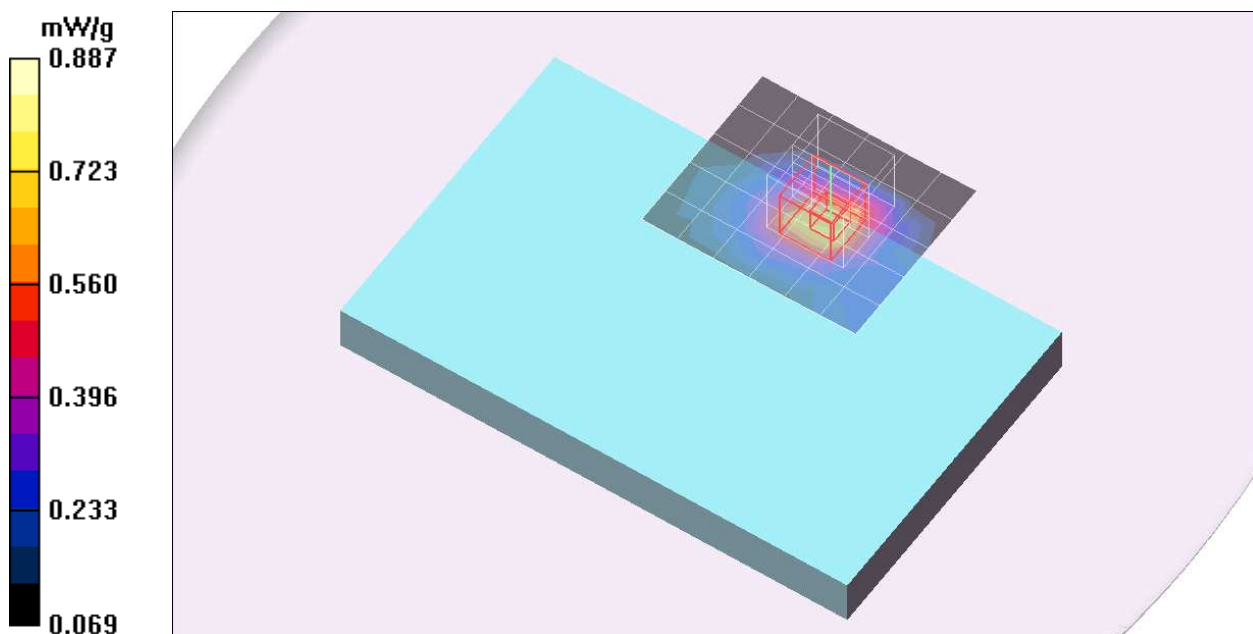

## LTE Band 2

Frequency: 1900 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.57$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 50,0/CH19100/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.681 mW/g

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 50,0/CH19100/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.37 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 1.07 W/kg

**SAR(1 g) = 0.637 mW/g; SAR(10 g) = 0.373 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.847 mW/g

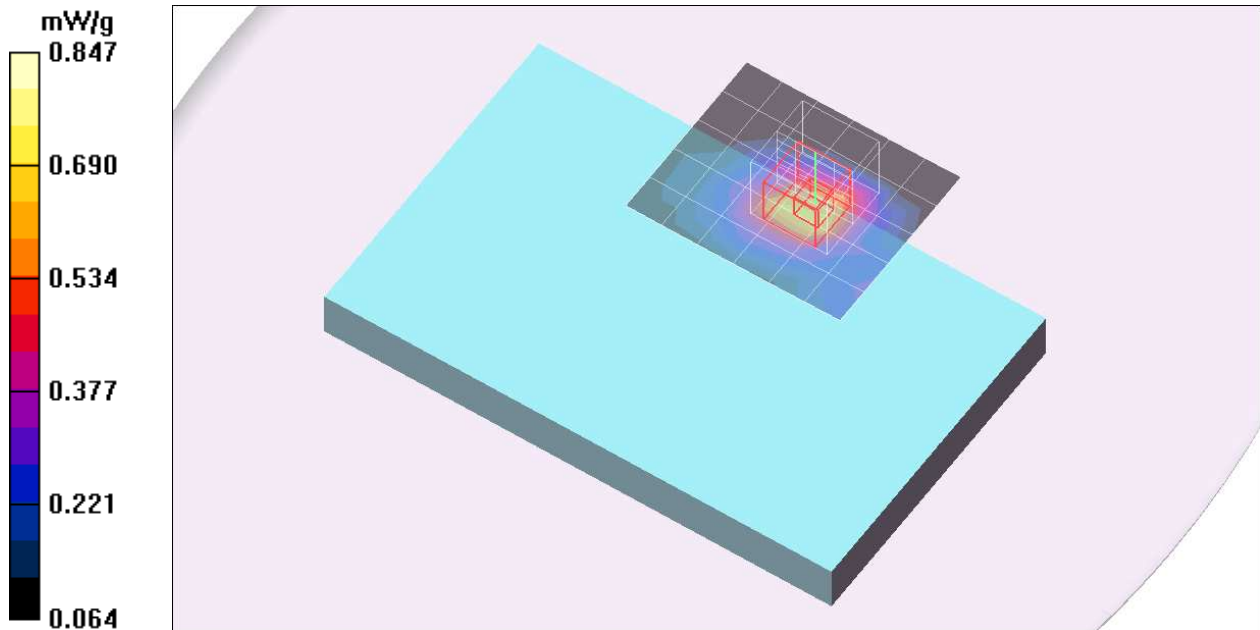

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 100,0/CH18700/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.765 mW/g

**Rear Side/LTE Band 2/QPSK\_BW 20\_RB 100,0/CH18700/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.43 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.695 mW/g; SAR(10 g) = 0.408 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.912 mW/g

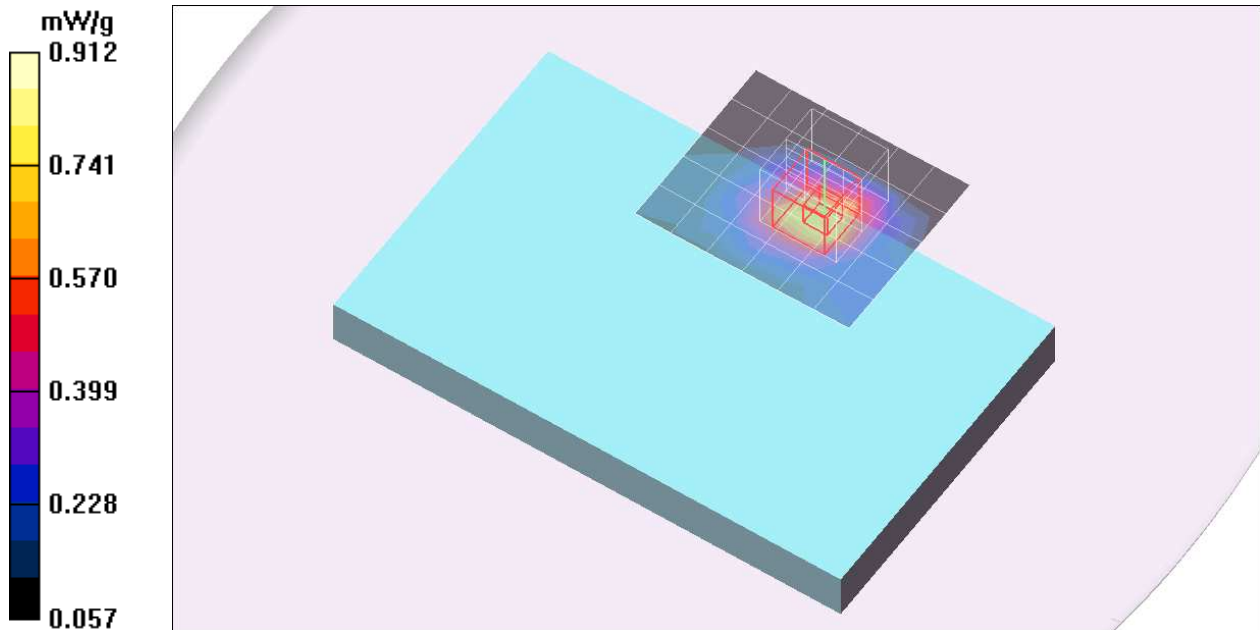

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Rear Side/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH18700\_Repeat/Area Scan (7x6x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.06 mW/g

### Rear Side/LTE Band 2/QPSK\_BW 20\_RB 1,0/CH18700\_Repeat/Zoom Scan

**(5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.9 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 1.58 W/kg

**SAR(1 g) = 0.956 mW/g; SAR(10 g) = 0.558 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.25 mW/g

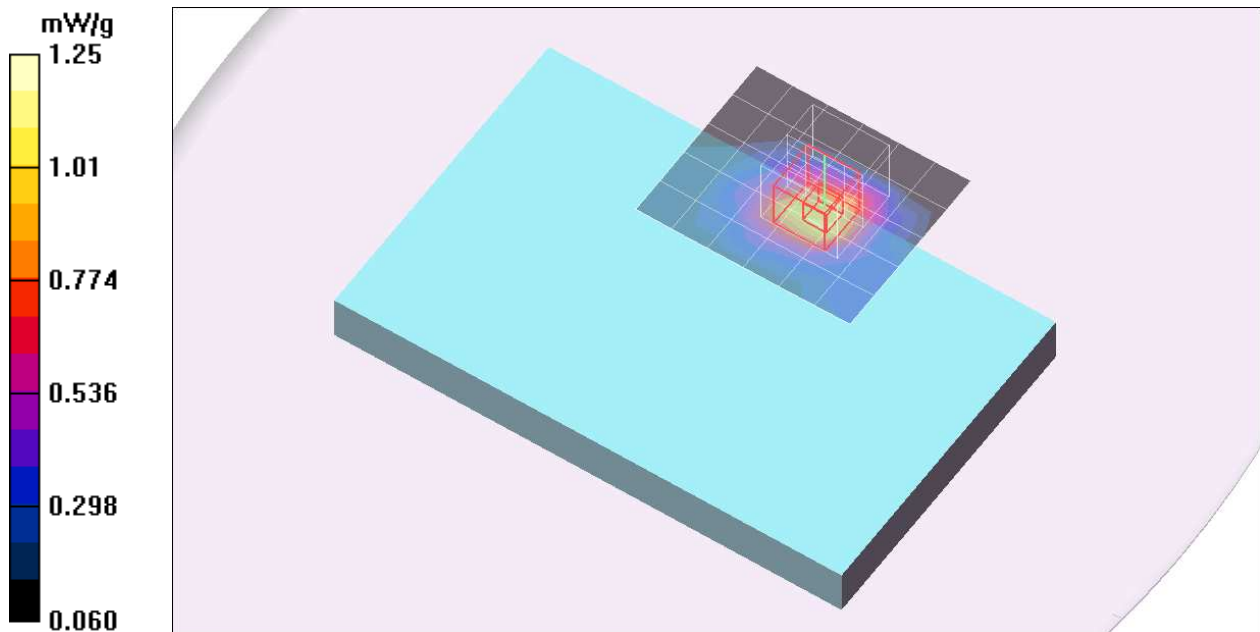

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 1,0/CH20300/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.19 mW/g

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 1,0/CH20300/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.4 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 1.86 W/kg

**SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.520 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.47 mW/g

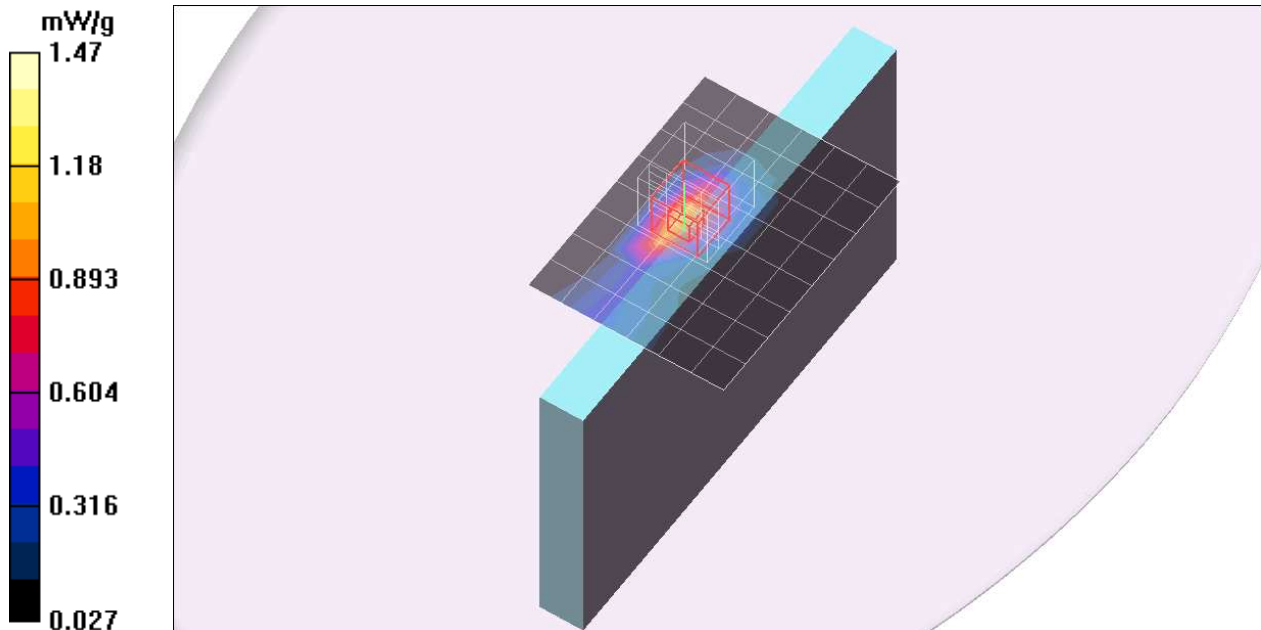

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 1,49/CH20300/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.25 mW/g

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 1,49/CH20300/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.2 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.97 W/kg

**SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.549 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.56 mW/g

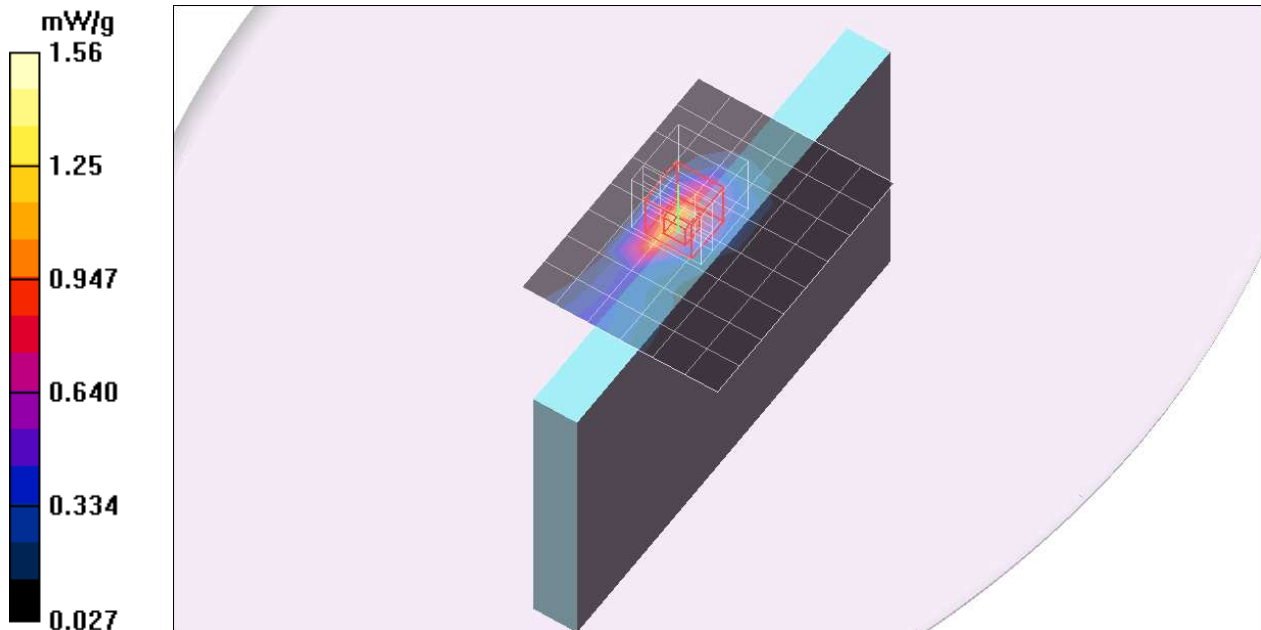

## LTE Band 4


Frequency: 1745 MHz; Duty Cycle: 1:1

**Edge2/LTE Band 4/QPSK\_BW 20\_RB 1,49/CH20300/Z Scan (1x1x21):** Measurement grid:

dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.982 mW/g

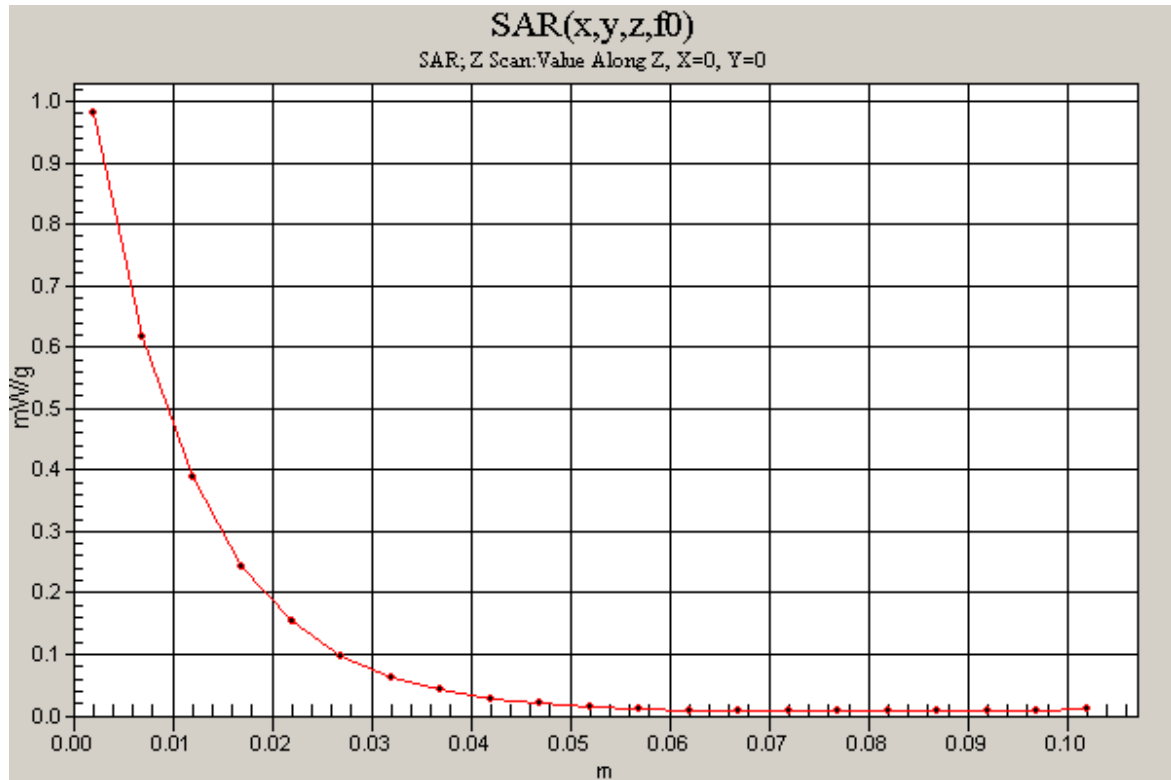

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 1,99/CH20300/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.26 mW/g

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 1,99/CH20300/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.1 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 1.97 W/kg

**SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.546 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.56 mW/g

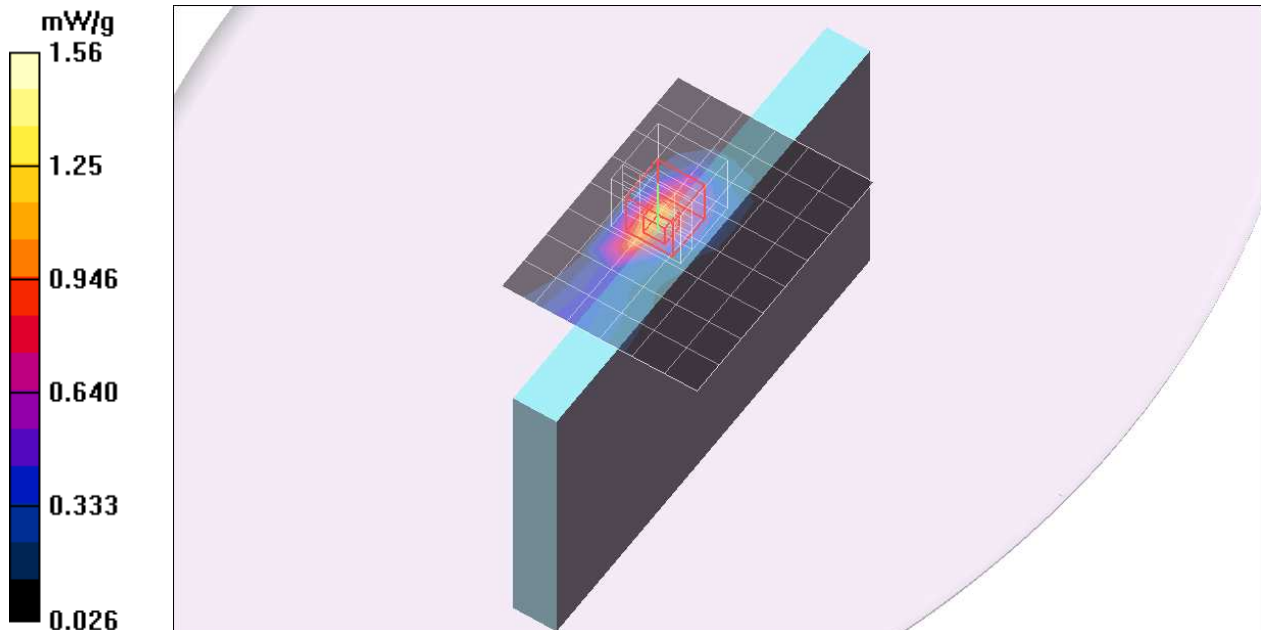

## LTE Band 4

Frequency: 1720 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 1,0/CH20050/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.04 mW/g

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 1,0/CH20050/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.4 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 0.883 mW/g; SAR(10 g) = 0.449 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.26 mW/g

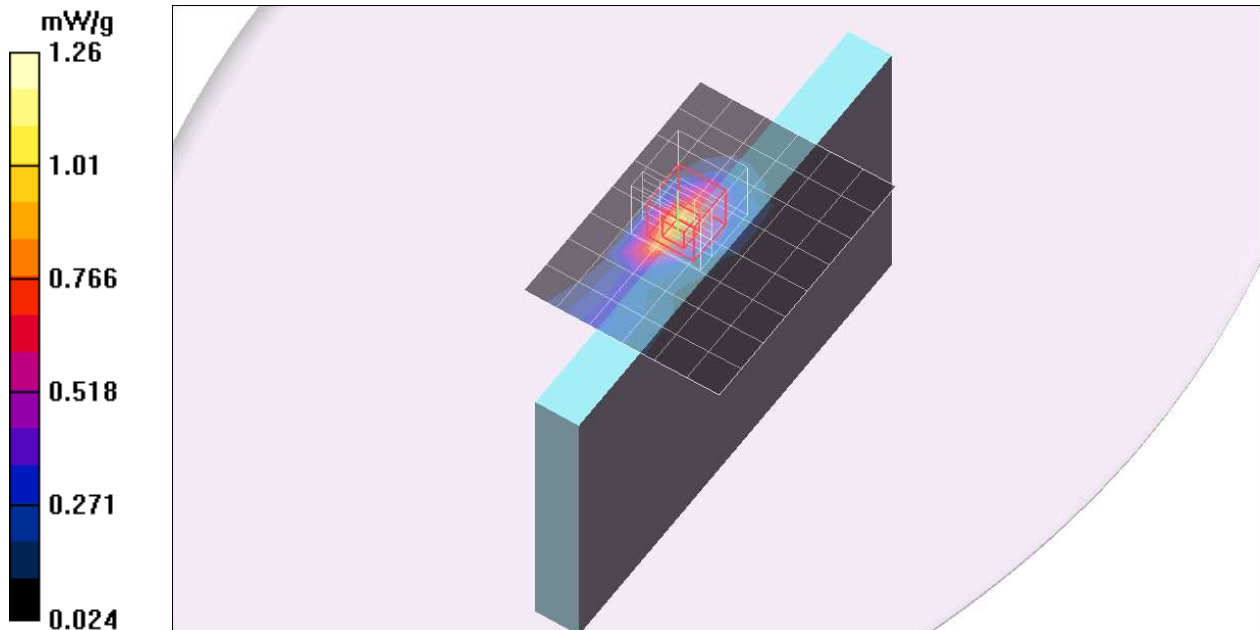

## LTE Band 4

Frequency: 1732.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1732.9$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 1,0/CH20175/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.15 mW/g

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 1,0/CH20175/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.2 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 1.81 W/kg

**SAR(1 g) = 0.991 mW/g; SAR(10 g) = 0.501 mW/g**

Maximum value of SAR (measured) = 1.44 mW/g

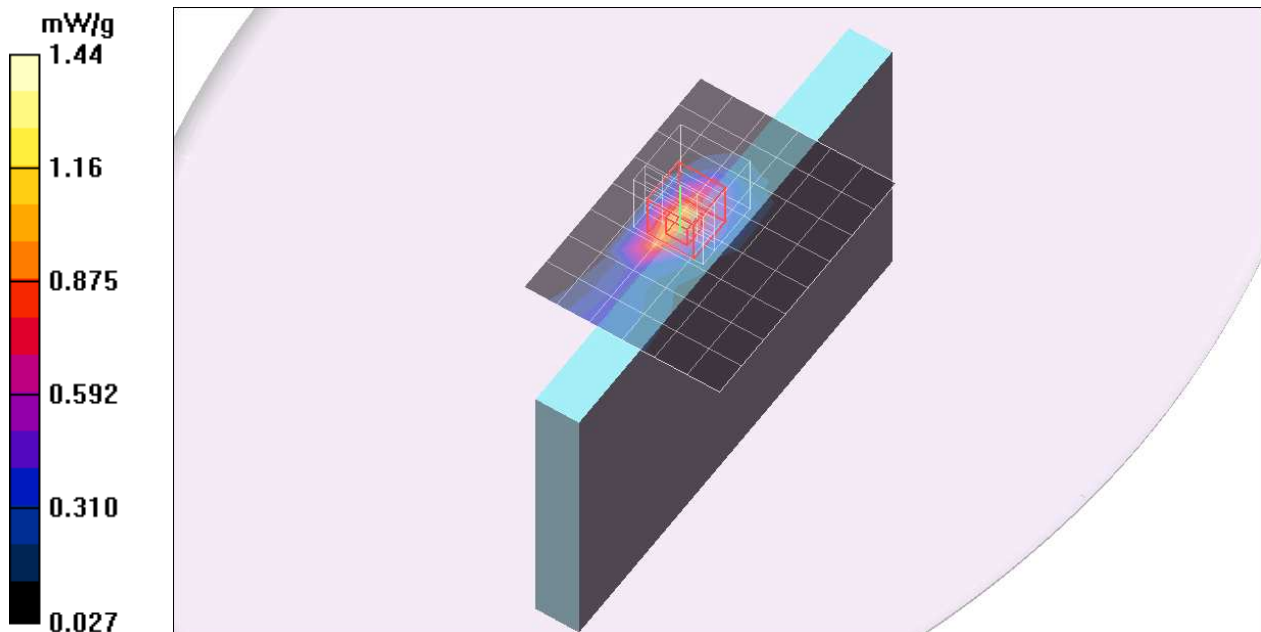

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 50,0/CH20300/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.936 mW/g

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 50,0/CH20300/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.5 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.795 mW/g; SAR(10 g) = 0.403 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.15 mW/g

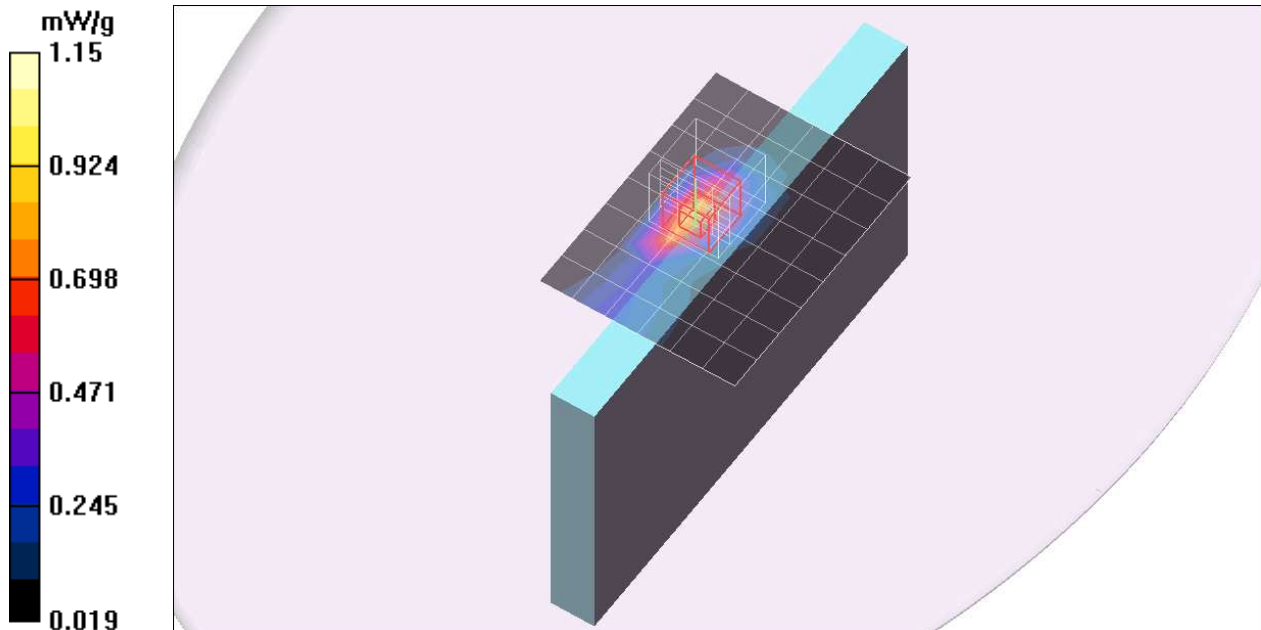

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 50,24/CH20300/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.937 mW/g

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 50,24/CH20300/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.5 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.794 mW/g; SAR(10 g) = 0.403 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.15 mW/g

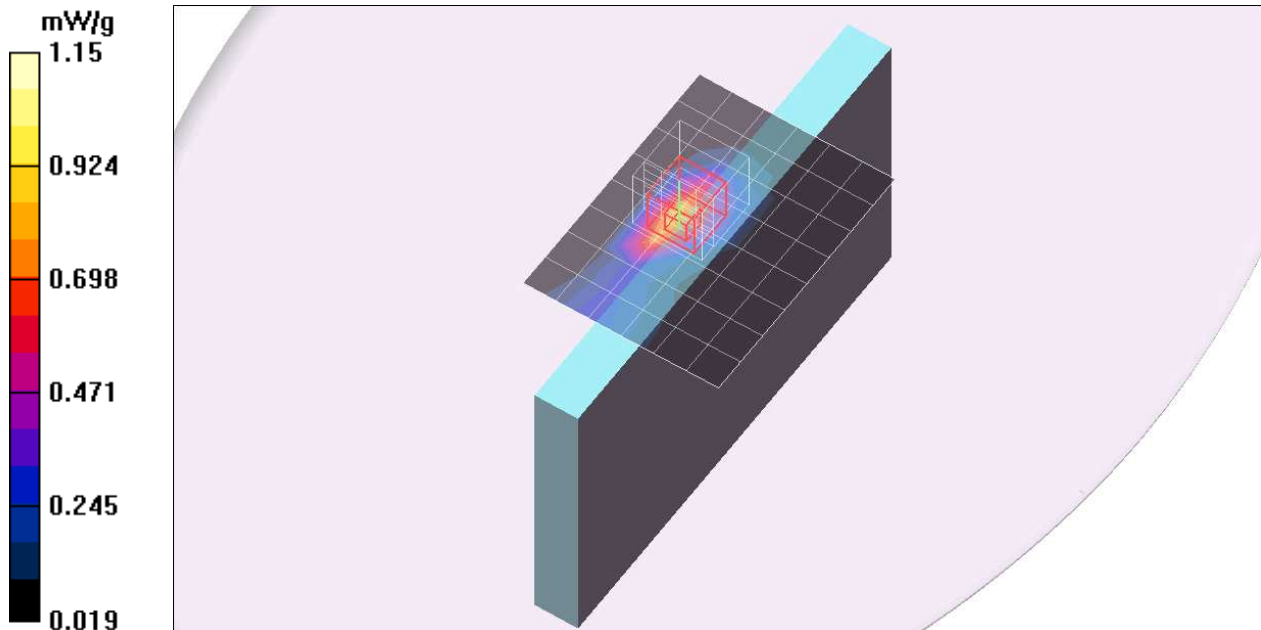

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 50,49/CH20300/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.950 mW/g

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 50,49/CH20300/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.5 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 1.48 W/kg

**SAR(1 g) = 0.812 mW/g; SAR(10 g) = 0.411 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.17 mW/g

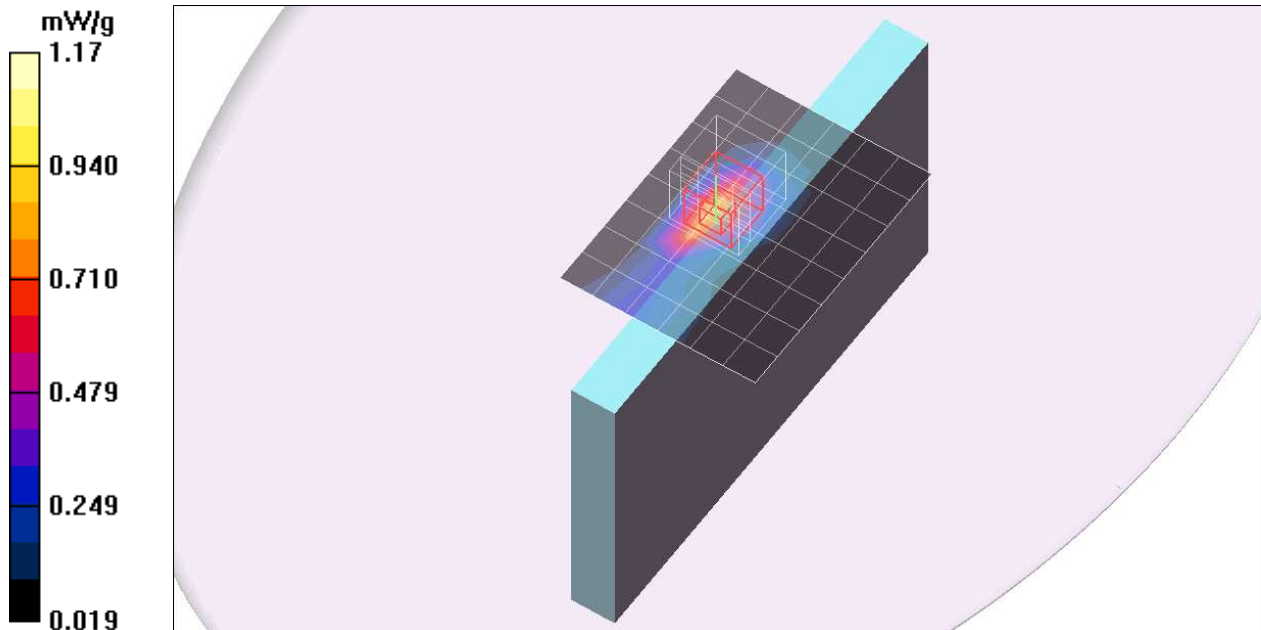

## LTE Band 4

Frequency: 1720 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 50,0/CH20050/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.828 mW/g

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 50,0/CH20050/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.7 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.687 mW/g; SAR(10 g) = 0.347 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.988 mW/g

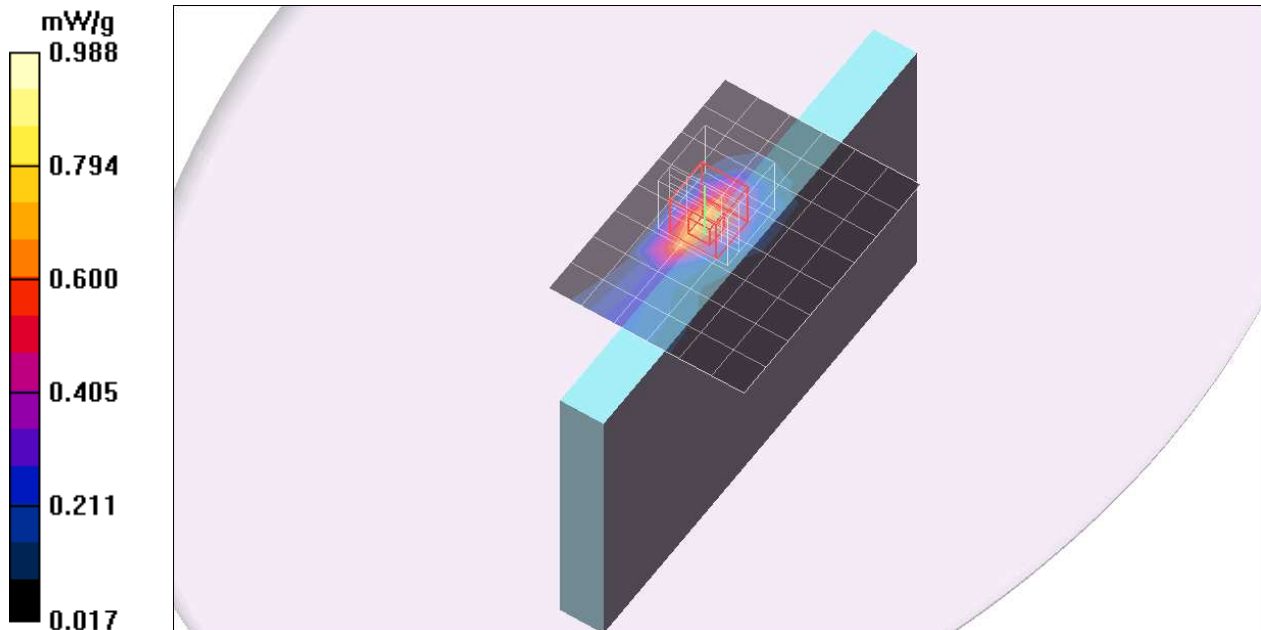

## LTE Band 4

Frequency: 1732.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1732.9$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 50,0/CH20175/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.887 mW/g

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 50,0/CH20175/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.751 mW/g; SAR(10 g) = 0.379 mW/g**

Maximum value of SAR (measured) = 1.09 mW/g

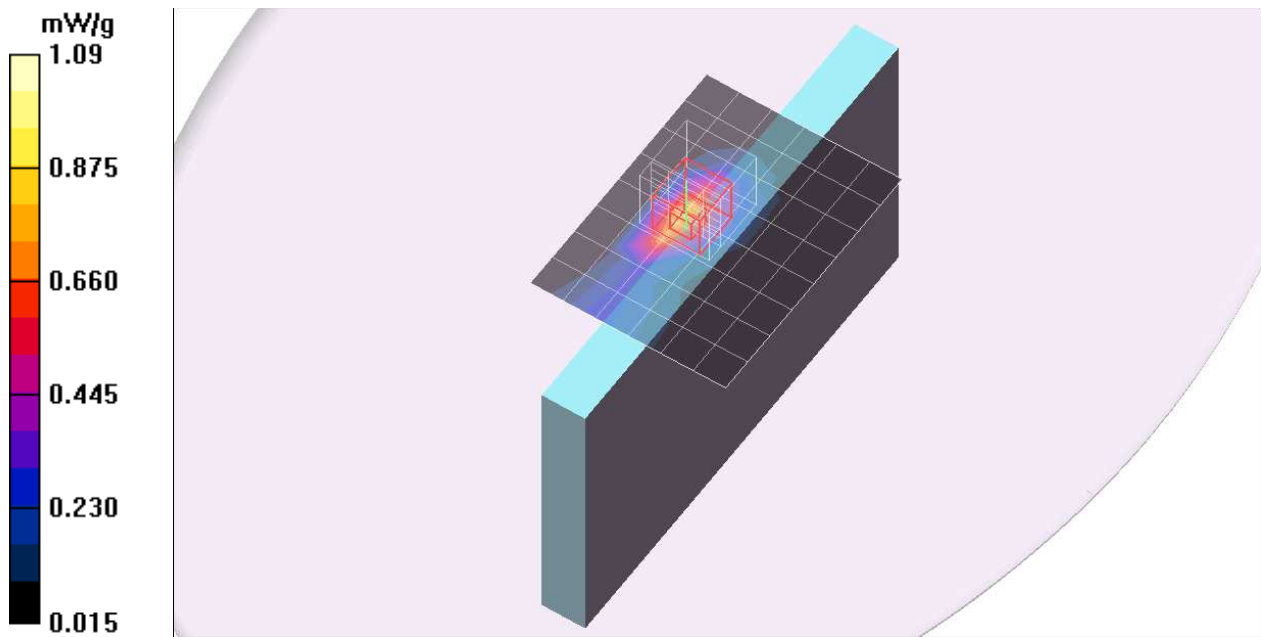

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 100,0/CH20300/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.951 mW/g

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 100,0/CH20300/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.5 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 1.49 W/kg

**SAR(1 g) = 0.815 mW/g; SAR(10 g) = 0.412 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.18 mW/g

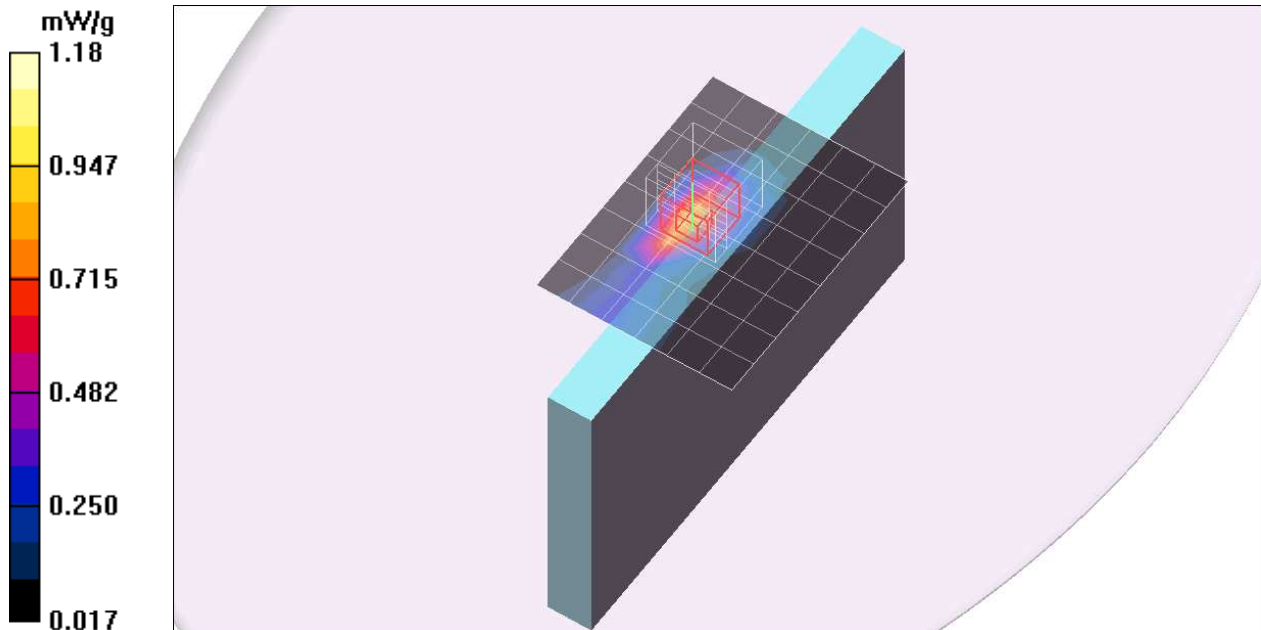

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 1,49/CH20300\_Repeat/Area Scan (7x9x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.26 mW/g

### Edge2/LTE Band 4/QPSK\_BW 20\_RB 1,49/CH20300\_Repeat/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.0 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 1.96 W/kg

**SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.544 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.55 mW/g

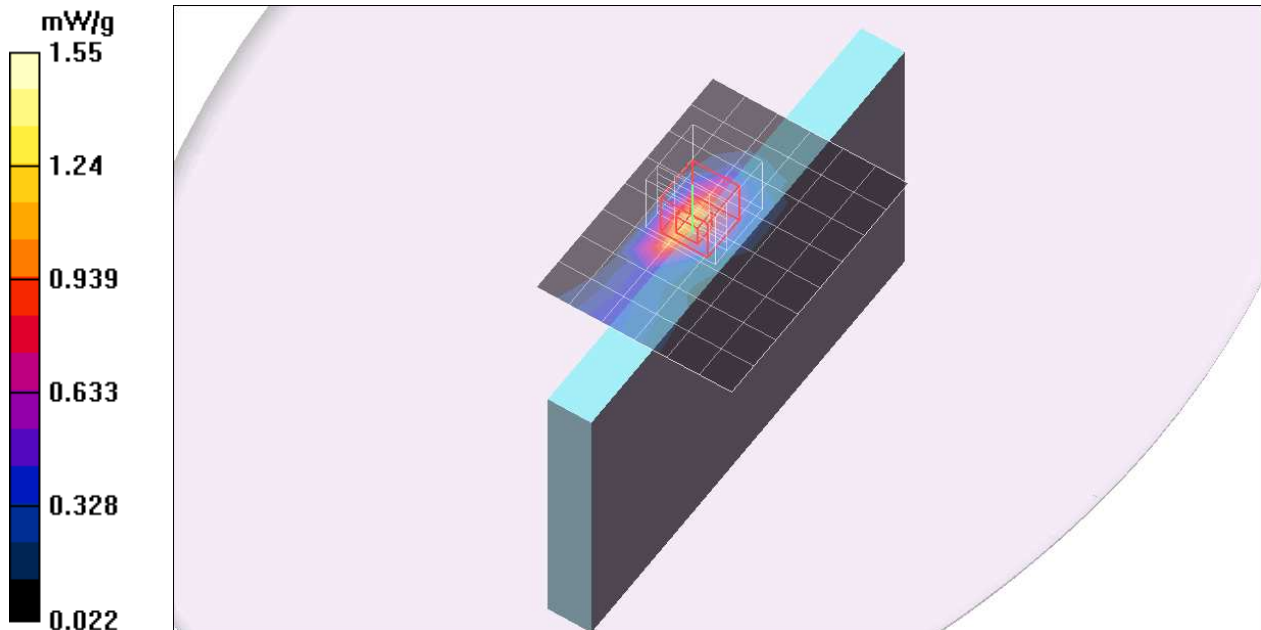

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Rear Side/LTE Band 4/QPSK\_BW 20\_RB 1,0/CH20300/Area Scan (7x6x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.841 mW/g

### Rear Side/LTE Band 4/QPSK\_BW 20\_RB 1,0/CH20300/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.9 V/m; Power Drift = 0.104 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.798 mW/g; SAR(10 g) = 0.444 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.09 mW/g

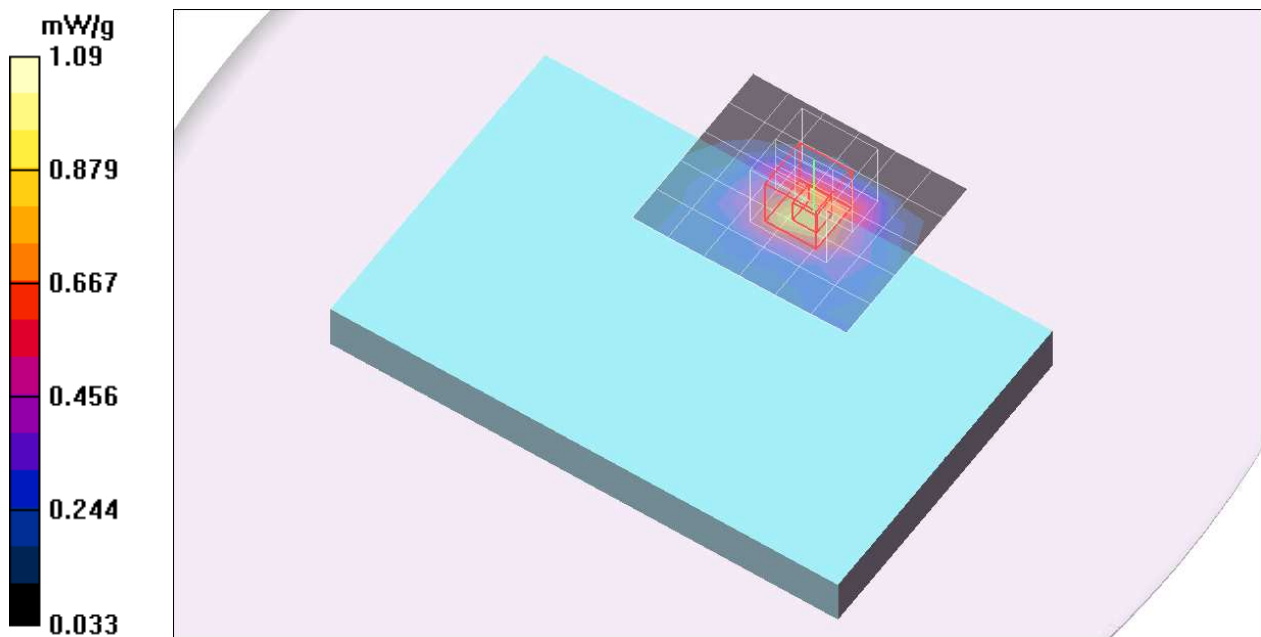

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 1,49/CH20300/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.887 mW/g

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 1,49/CH20300/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.9 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 1.38 W/kg

**SAR(1 g) = 0.825 mW/g; SAR(10 g) = 0.460 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.12 mW/g

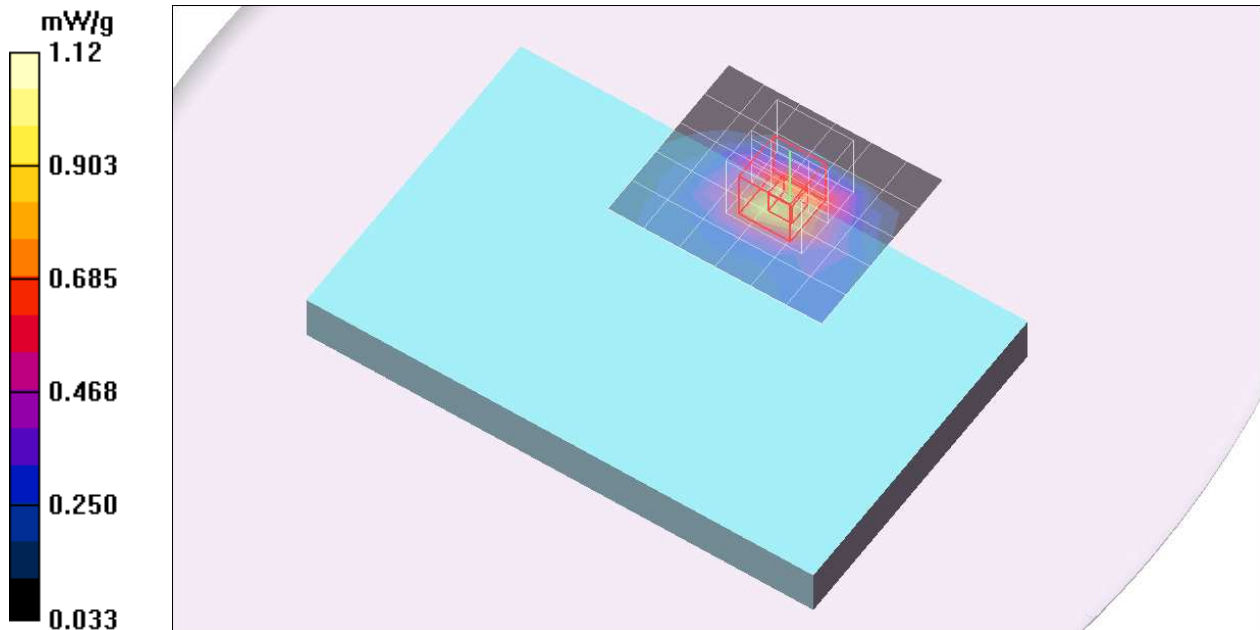

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 1,99/CH20300/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.915 mW/g

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 1,99/CH20300/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.7 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 1.40 W/kg

**SAR(1 g) = 0.833 mW/g; SAR(10 g) = 0.464 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.12 mW/g

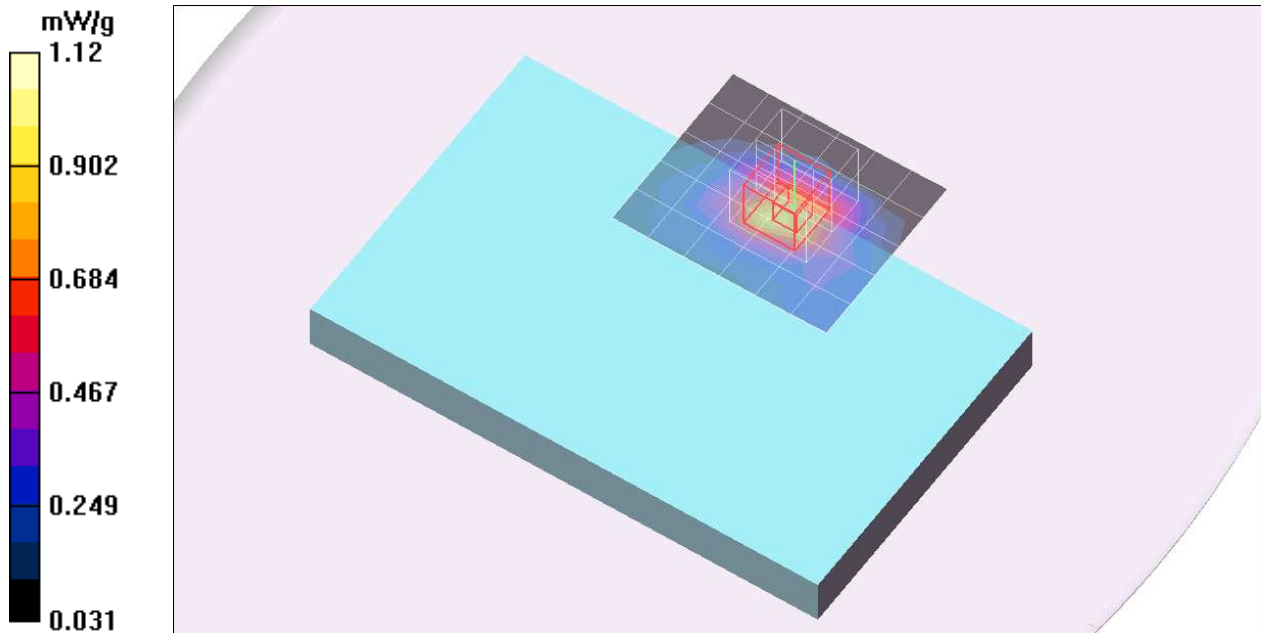

## LTE Band 4

Frequency: 1720 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Rear Side/LTE Band 4/QPSK\_BW 20\_RB 1,0/CH20050/Area Scan (7x6x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.692 mW/g

### Rear Side/LTE Band 4/QPSK\_BW 20\_RB 1,0/CH20050/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.4 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.663 mW/g; SAR(10 g) = 0.371 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.901 mW/g

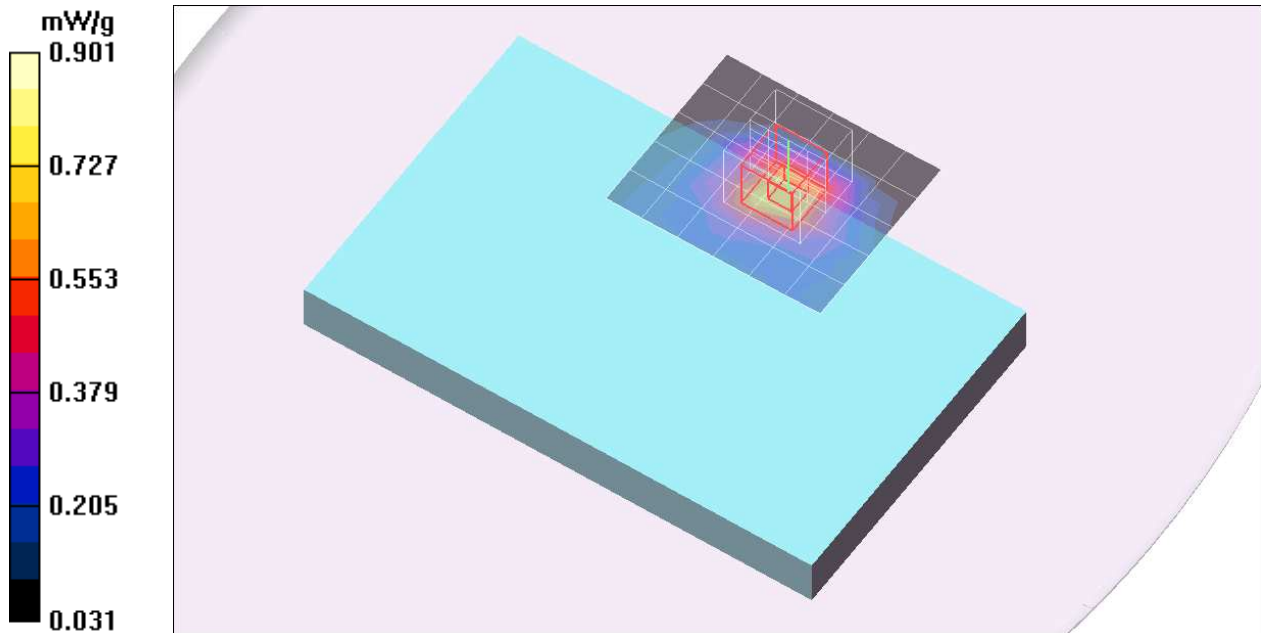

## LTE Band 4

Frequency: 1732.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1732.9$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Rear Side/LTE Band 4/QPSK\_BW 20\_RB 1,0/CH20175/Area Scan (7x6x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.773 mW/g

### Rear Side/LTE Band 4/QPSK\_BW 20\_RB 1,0/CH20175/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 1.23 W/kg

**SAR(1 g) = 0.729 mW/g; SAR(10 g) = 0.405 mW/g**

Maximum value of SAR (measured) = 0.997 mW/g

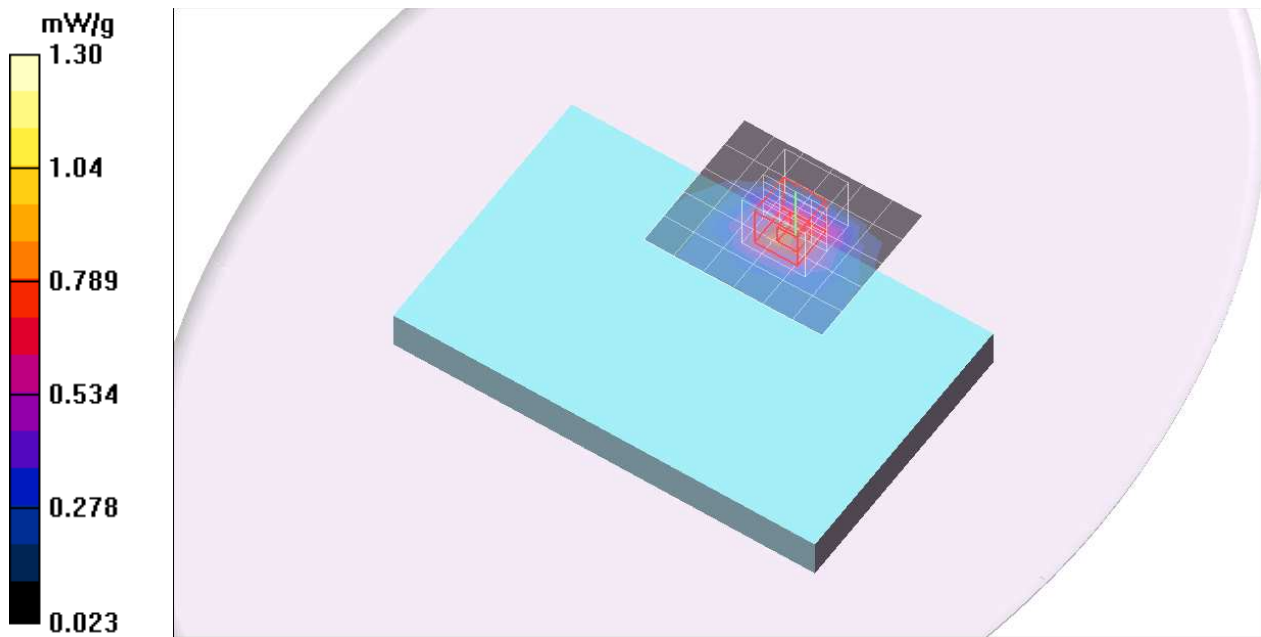

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 50,0/CH20300/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.654 mW/g

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 50,0/CH20300/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.4 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.613 mW/g; SAR(10 g) = 0.341 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.837 mW/g

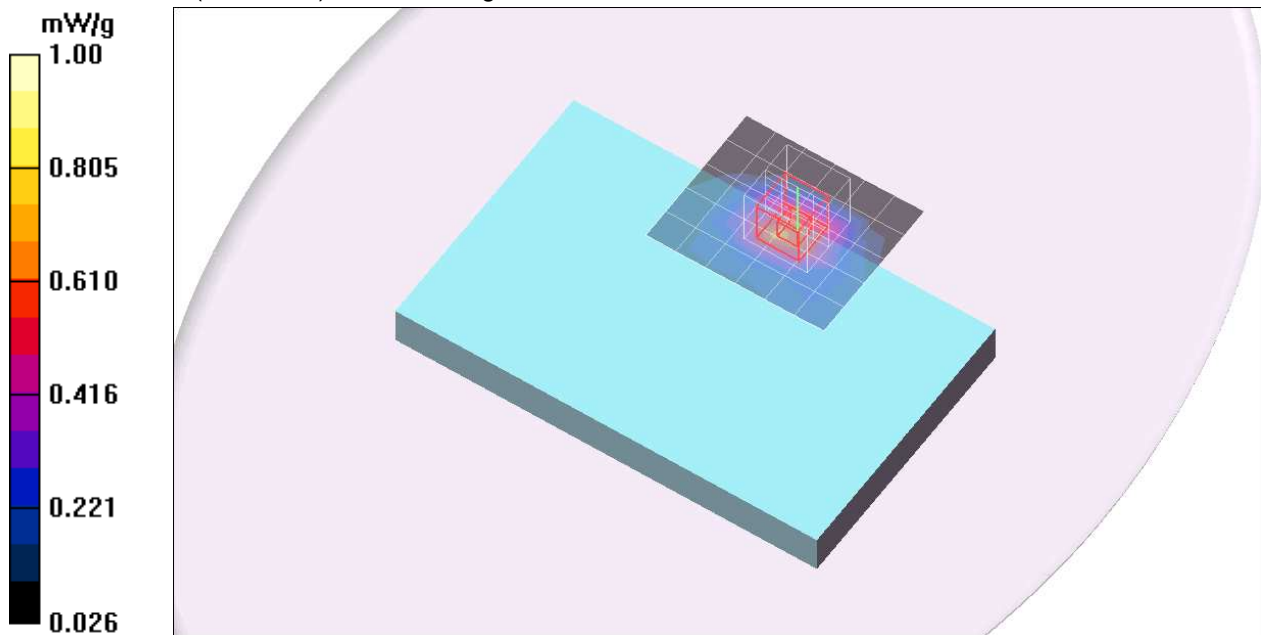

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 50,24/CH20300/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.667 mW/g

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 50,24/CH20300/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.4 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.346 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.850 mW/g

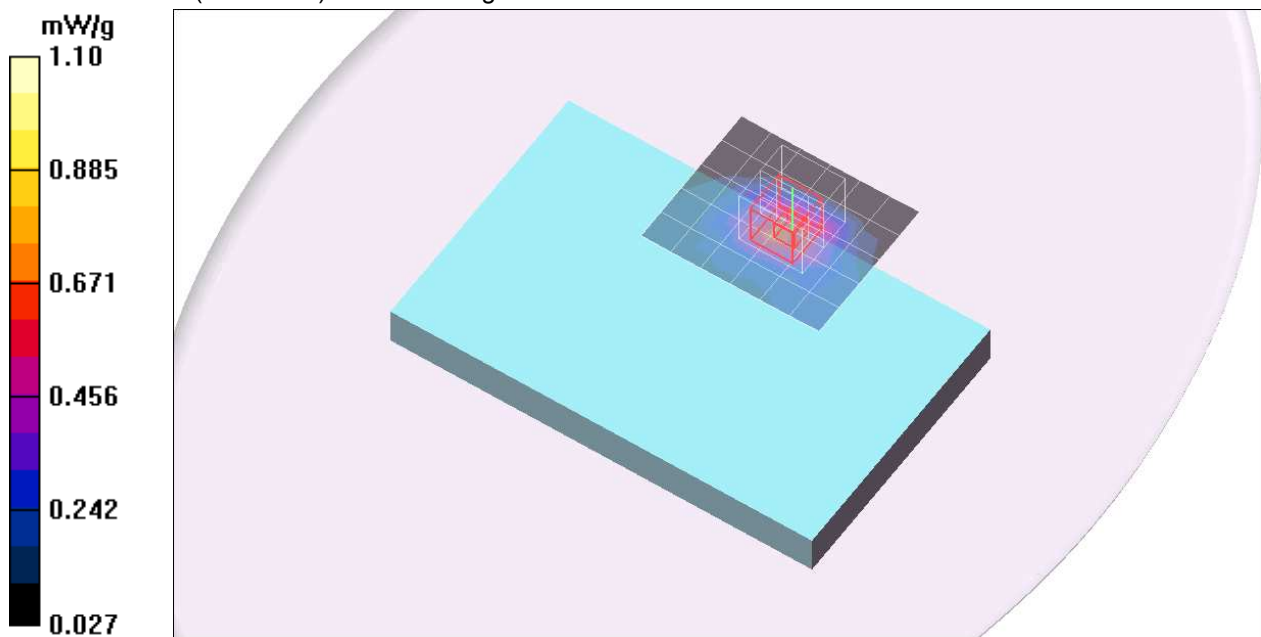

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 50,49/CH20300/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.675 mW/g

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 50,49/CH20300/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.3 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.627 mW/g; SAR(10 g) = 0.348 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.854 mW/g

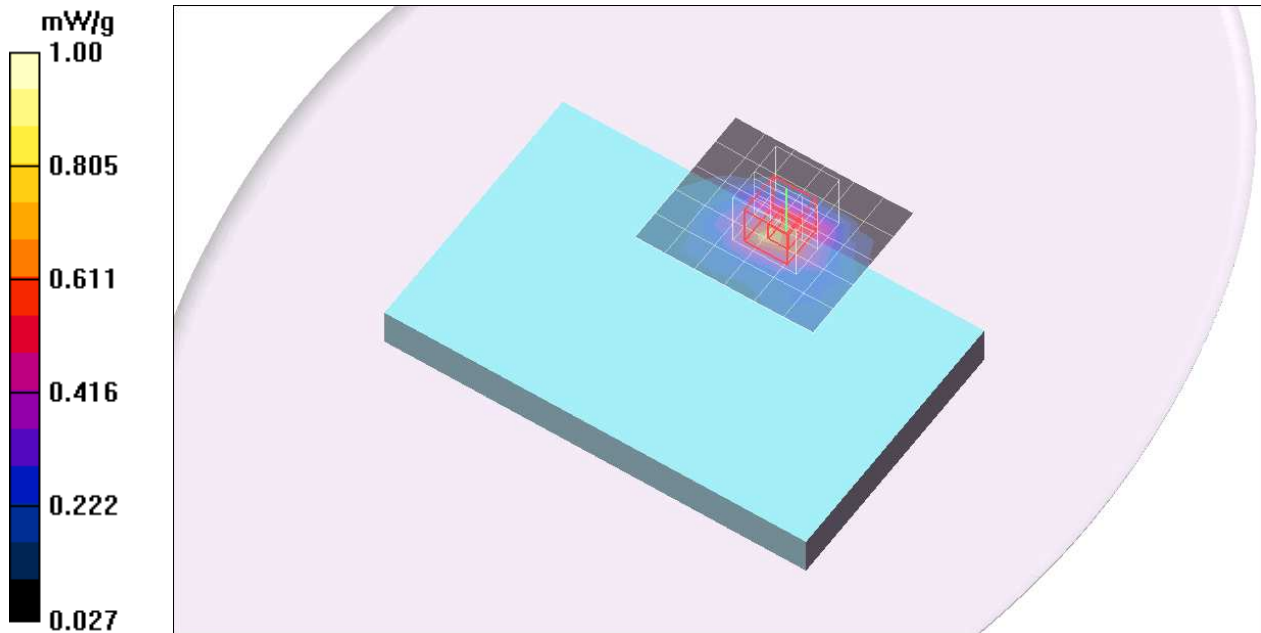

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 50,0/CH20050/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.562 mW/g

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 50,0/CH20050/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.4 V/m; Power Drift = -0.370 dB

Peak SAR (extrapolated) = 0.939 W/kg

**SAR(1 g) = 0.555 mW/g; SAR(10 g) = 0.306 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.757 mW/g

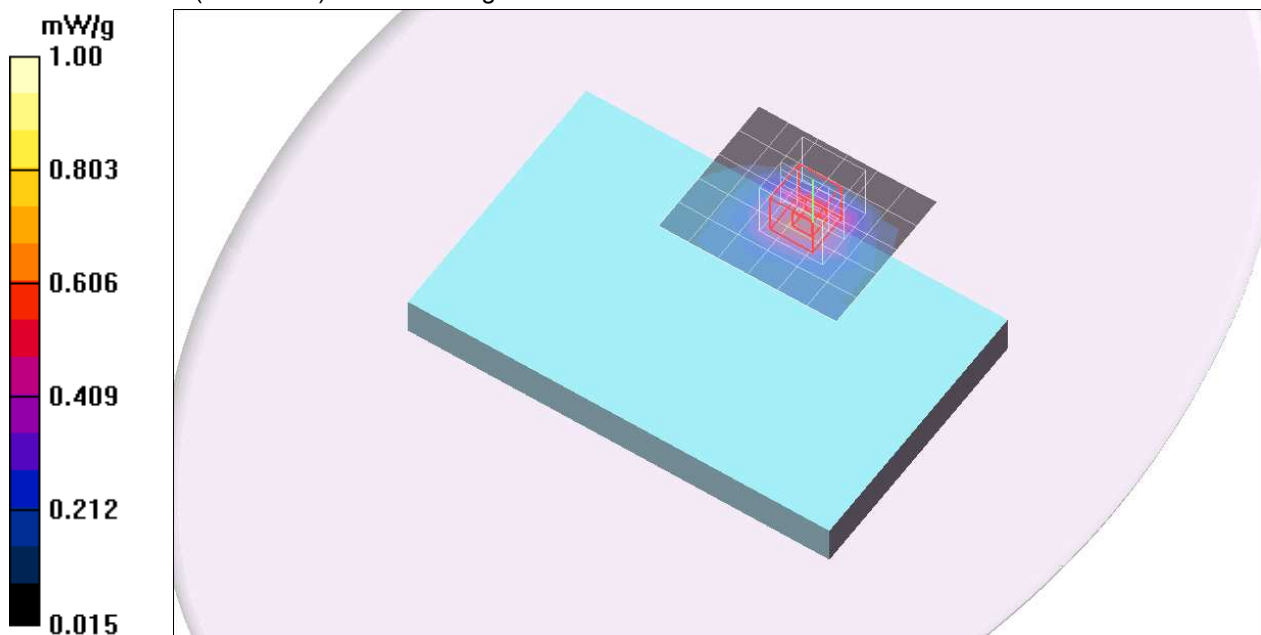

## LTE Band 4

Frequency: 1732.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1732.9$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 50,0/CH20175/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.615 mW/g

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 50,0/CH20175/Zoom Scan (5x5x7)/Cube 0:**


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.160 dB

Peak SAR (extrapolated) = 0.949 W/kg

**SAR(1 g) = 0.572 mW/g; SAR(10 g) = 0.316 mW/g**

Maximum value of SAR (measured) = 0.780 mW/g

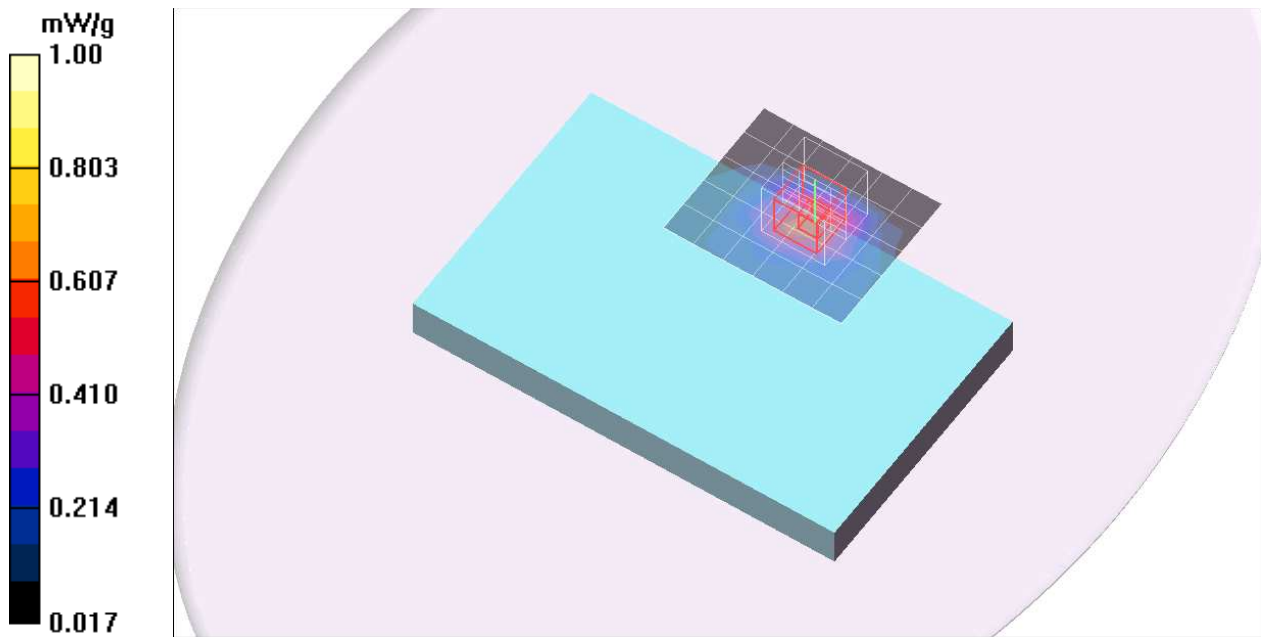

## LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(8.12, 8.12, 8.12); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 100,0/CH20300/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.682 mW/g

**Rear Side/LTE Band 4/QPSK\_BW 20\_RB 100,0/CH20300/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.4 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.623 mW/g; SAR(10 g) = 0.347 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.841 mW/g

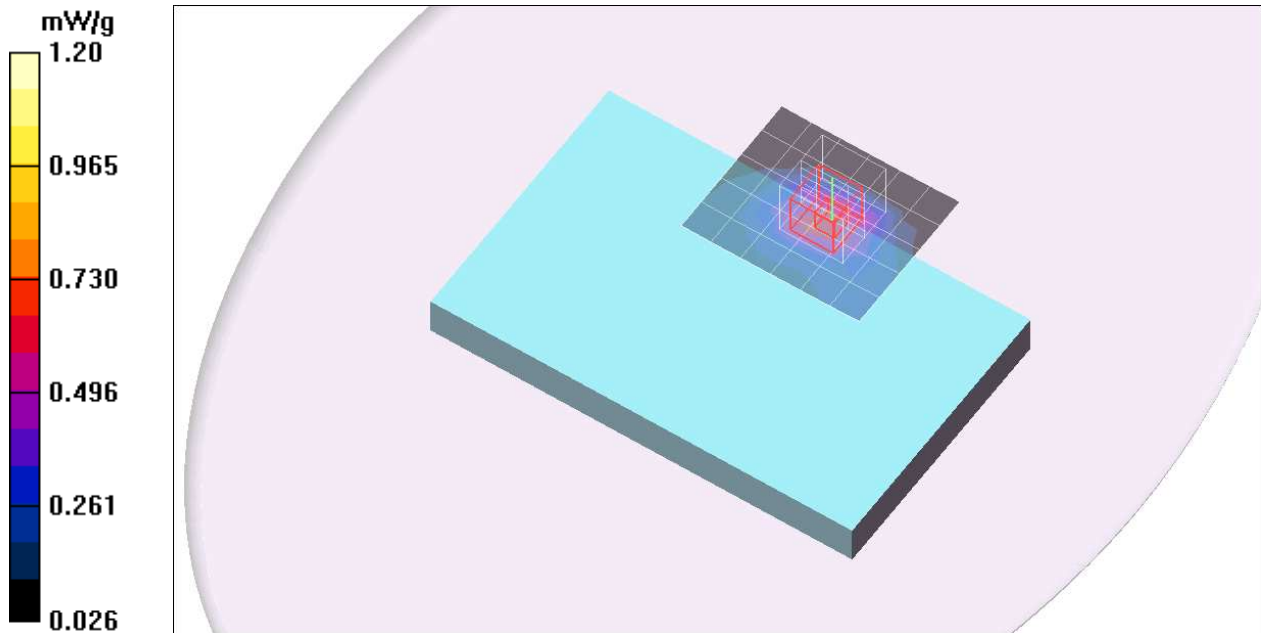

## LTE Band 5

Frequency: 836.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 5/QPSK\_BW 10\_RB 1,0/CH20525/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.241 mW/g

### Edge2/LTE Band 5/QPSK\_BW 10\_RB 1,0/CH20525/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.7 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.377 W/kg

**SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.102 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.269 mW/g

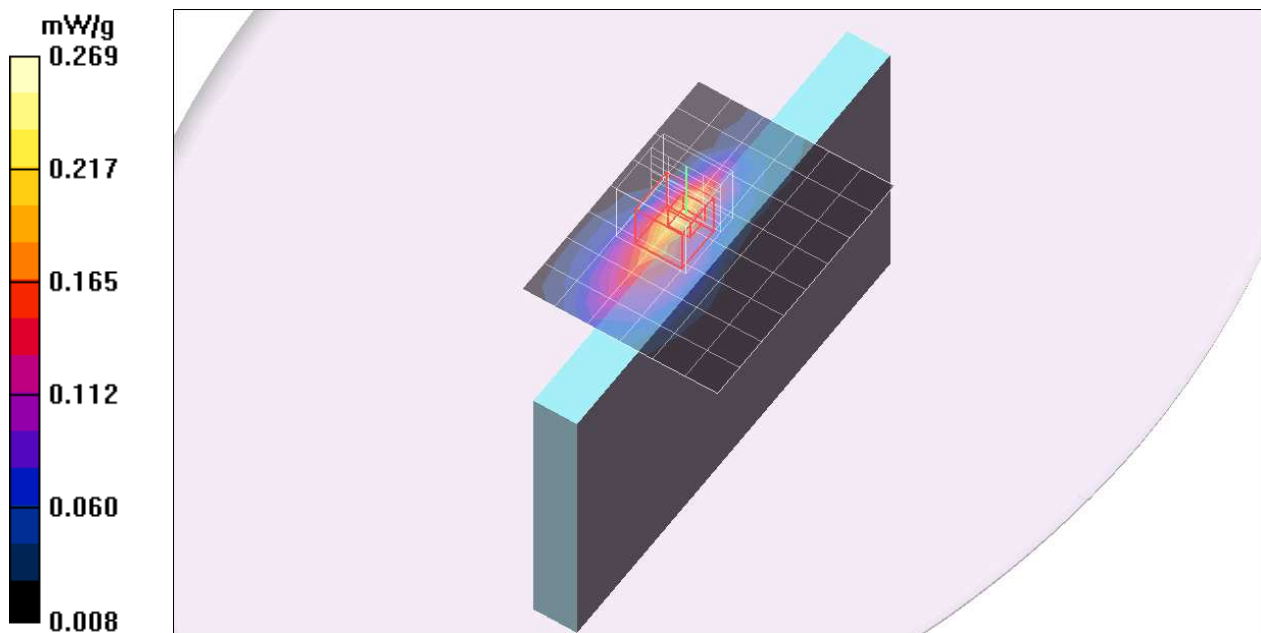

## LTE Band 5


Frequency: 836.5 MHz; Duty Cycle: 1:1

**Edge2/LTE Band 5/QPSK\_BW 10\_RB 1,0/CH20525/Z Scan (1x1x21):** Measurement grid:

dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.176 mW/g

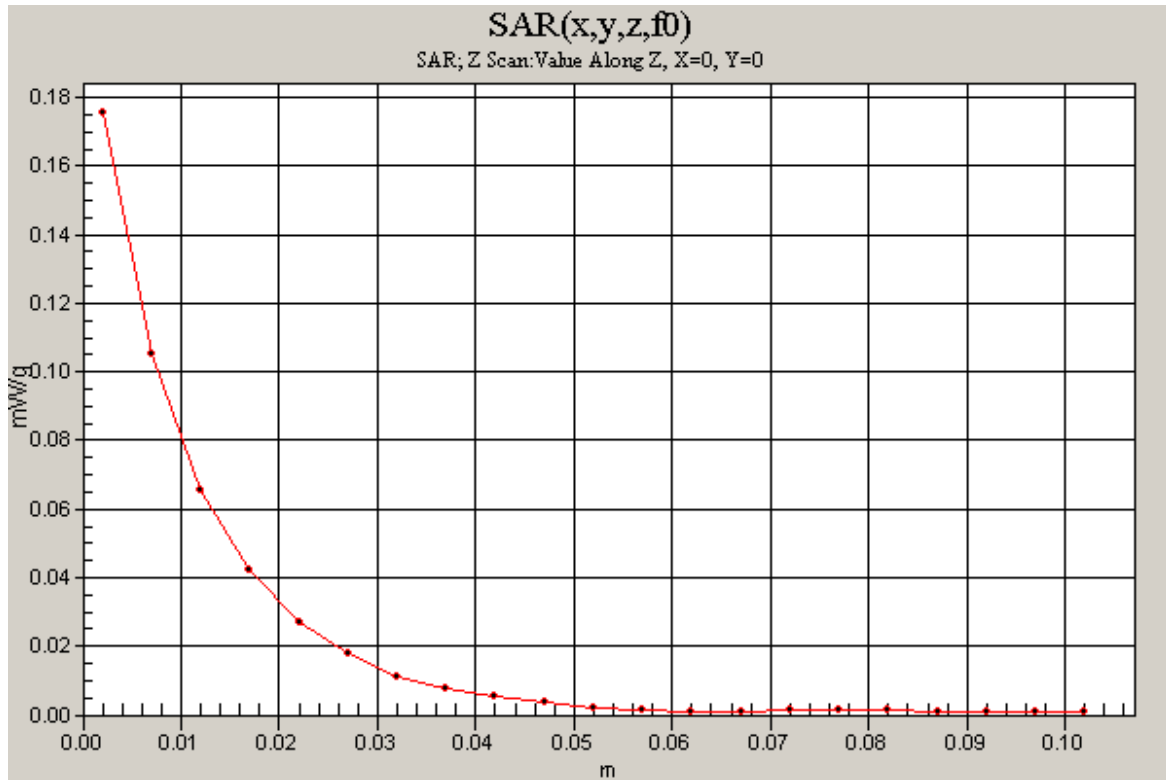

## LTE Band 5

Frequency: 836.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 5/QPSK\_BW 10\_RB 25,0/CH20525/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.189 mW/g

### Edge2/LTE Band 5/QPSK\_BW 10\_RB 25,0/CH20525/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.1 V/m; Power Drift = -0.155 dB

Peak SAR (extrapolated) = 0.296 W/kg

**SAR(1 g) = 0.150 mW/g; SAR(10 g) = 0.081 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.215 mW/g

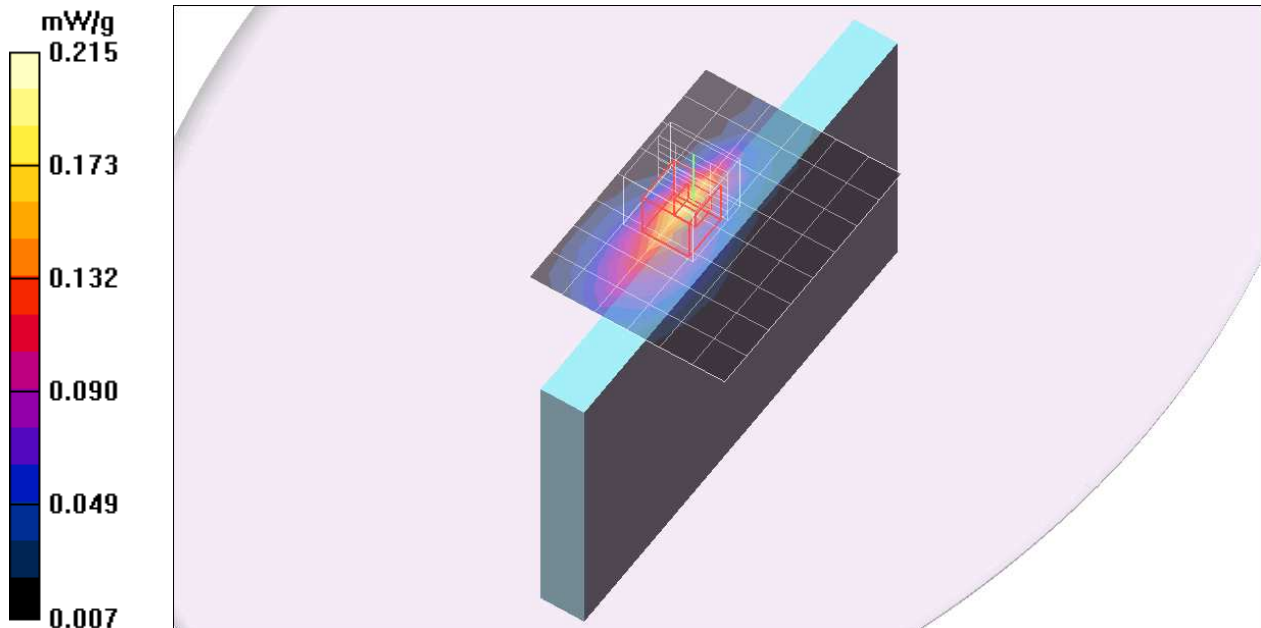

## LTE Band 5

Frequency: 836.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Rear Side/LTE Band 5/QPSK\_BW 10\_RB 1,0/CH20525/Area Scan (7x6x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.129 mW/g

### Rear Side/LTE Band 5/QPSK\_BW 10\_RB 1,0/CH20525/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 2.10 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 0.184 W/kg

**SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.061 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.139 mW/g

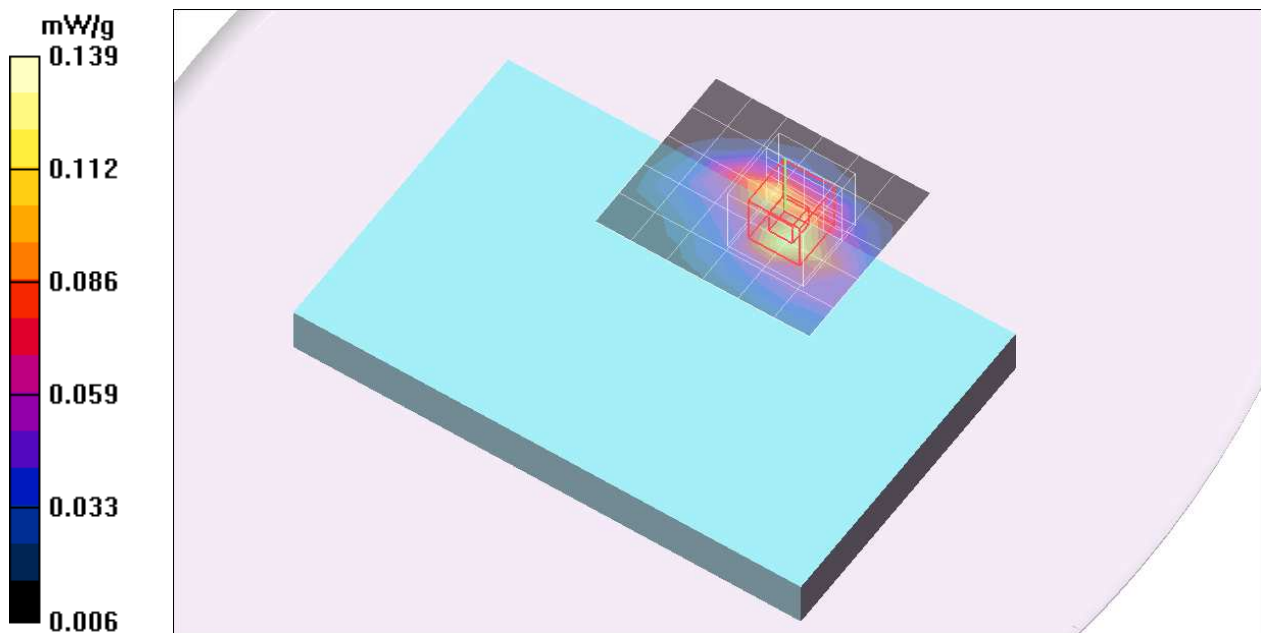

## LTE Band 5

Frequency: 836.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.21, 9.21, 9.21); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 5/QPSK\_BW 10\_RB 25,0/CH20525/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.104 mW/g

**Rear Side/LTE Band 5/QPSK\_BW 10\_RB 25,0/CH20525/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 1.63 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.146 W/kg

**SAR(1 g) = 0.082 mW/g; SAR(10 g) = 0.048 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.110 mW/g

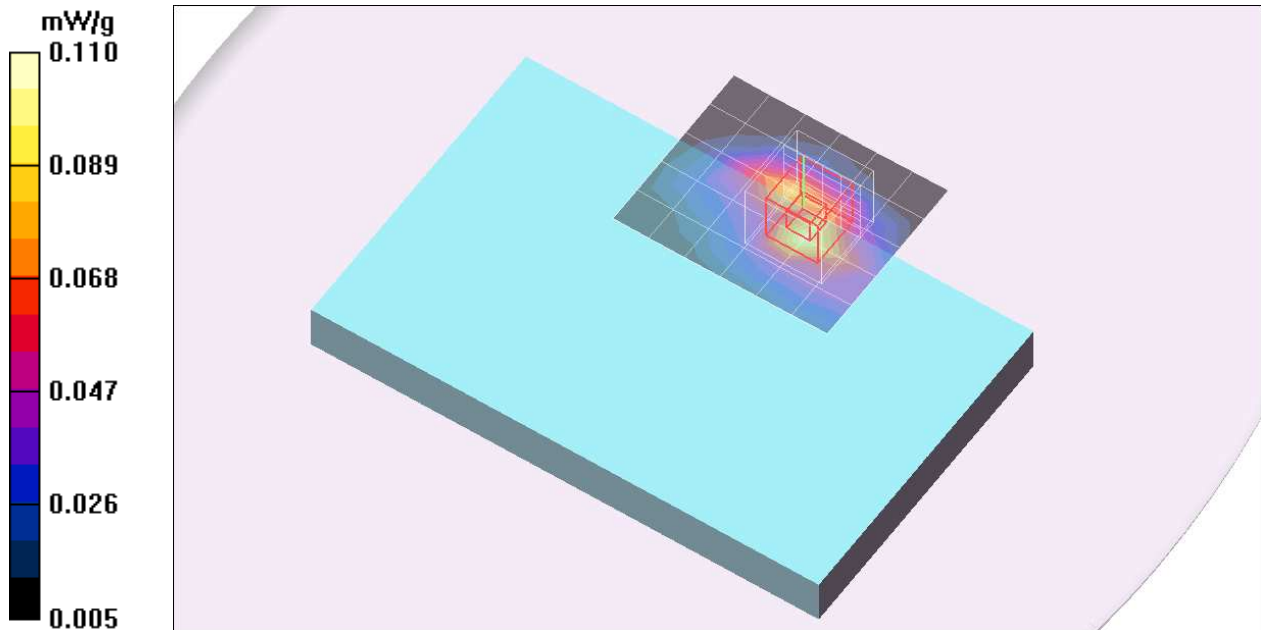

## LTE Band 13

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 782.5$  MHz;  $\sigma = 0.987$  mho/m;  $\epsilon_r = 56.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.44, 9.44, 9.44); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 13/QPSK\_BW 10\_RB 1,24/CH23230/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.163 mW/g

### Edge2/LTE Band 13/QPSK\_BW 10\_RB 1,24/CH23230/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.362 W/kg

**SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.099 mW/g**

Maximum value of SAR (measured) = 0.275 mW/g

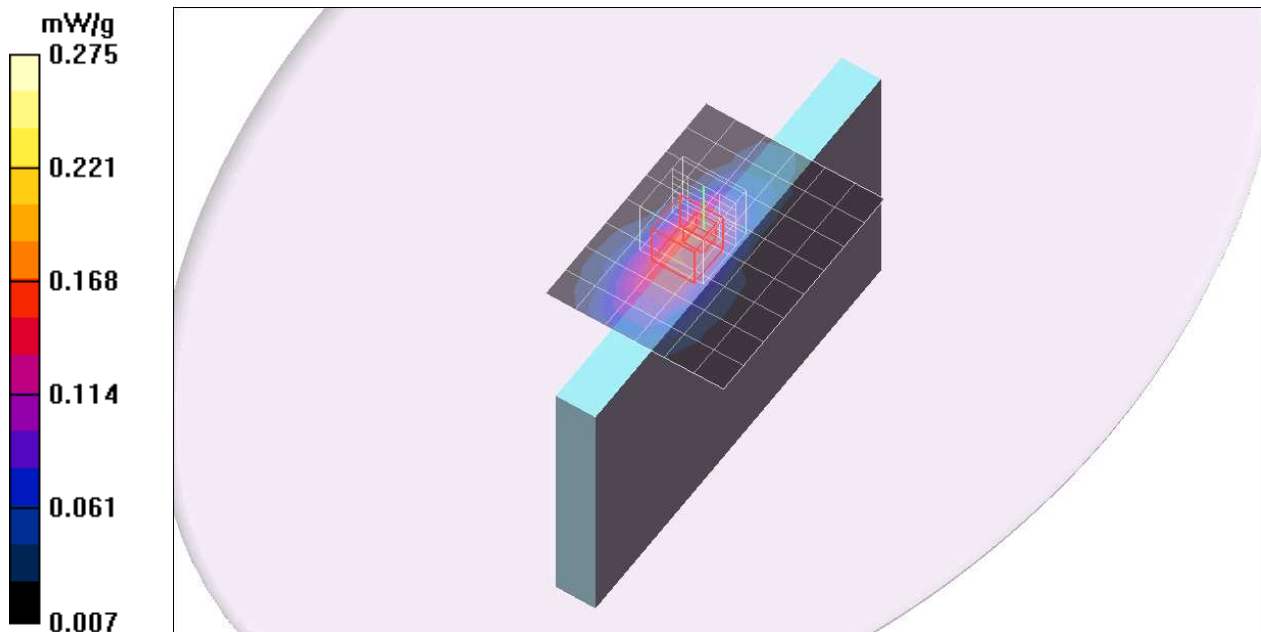

## LTE Band 13

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 782.5$  MHz;  $\sigma = 0.987$  mho/m;  $\epsilon_r = 56.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.44, 9.44, 9.44); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 13/QPSK\_BW 10\_RB 25,12/CH23230/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.128 mW/g

### Edge2/LTE Band 13/QPSK\_BW 10\_RB 25,12/CH23230/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.290 W/kg

**SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.079 mW/g**

Maximum value of SAR (measured) = 0.220 mW/g

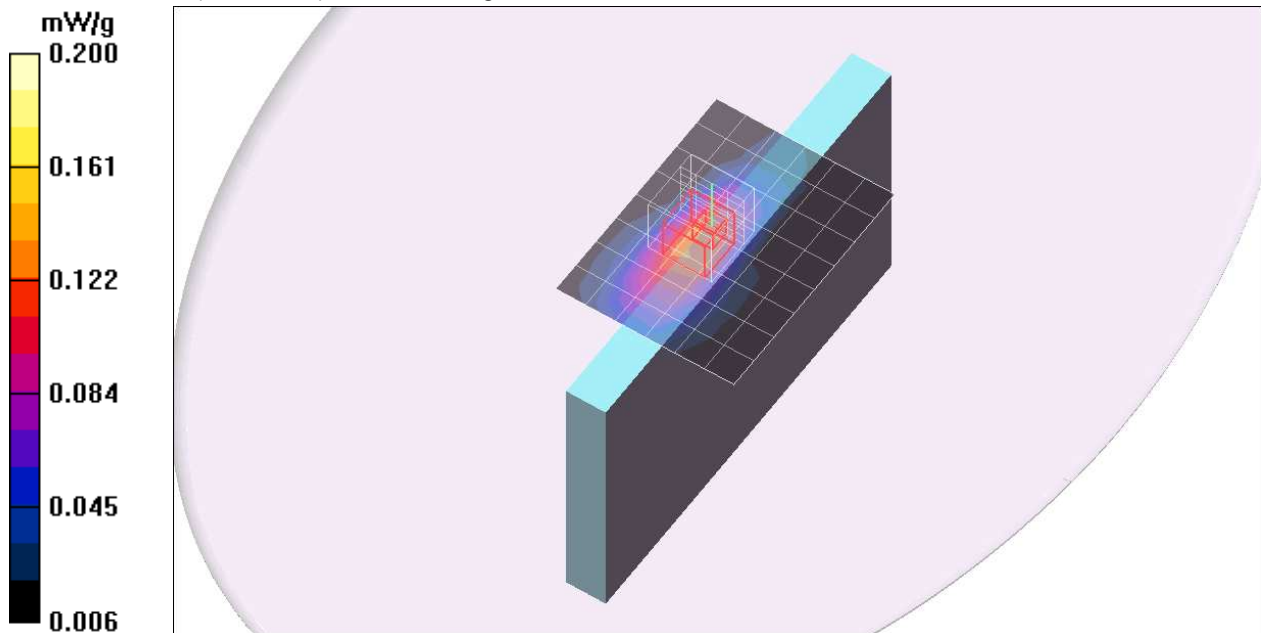

## LTE Band 13

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 782.5$  MHz;  $\sigma = 0.987$  mho/m;  $\epsilon_r = 56.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.44, 9.44, 9.44); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Rear Side/LTE Band 13/QPSK\_BW 10\_RB 1,24/CH23230/Area Scan (7x6x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.120 mW/g

### Rear Side/LTE Band 13/QPSK\_BW 10\_RB 1,24/CH23230/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.87 V/m; Power Drift = 0.120 dB

Peak SAR (extrapolated) = 0.159 W/kg

**SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.061 mW/g**

Maximum value of SAR (measured) = 0.126 mW/g

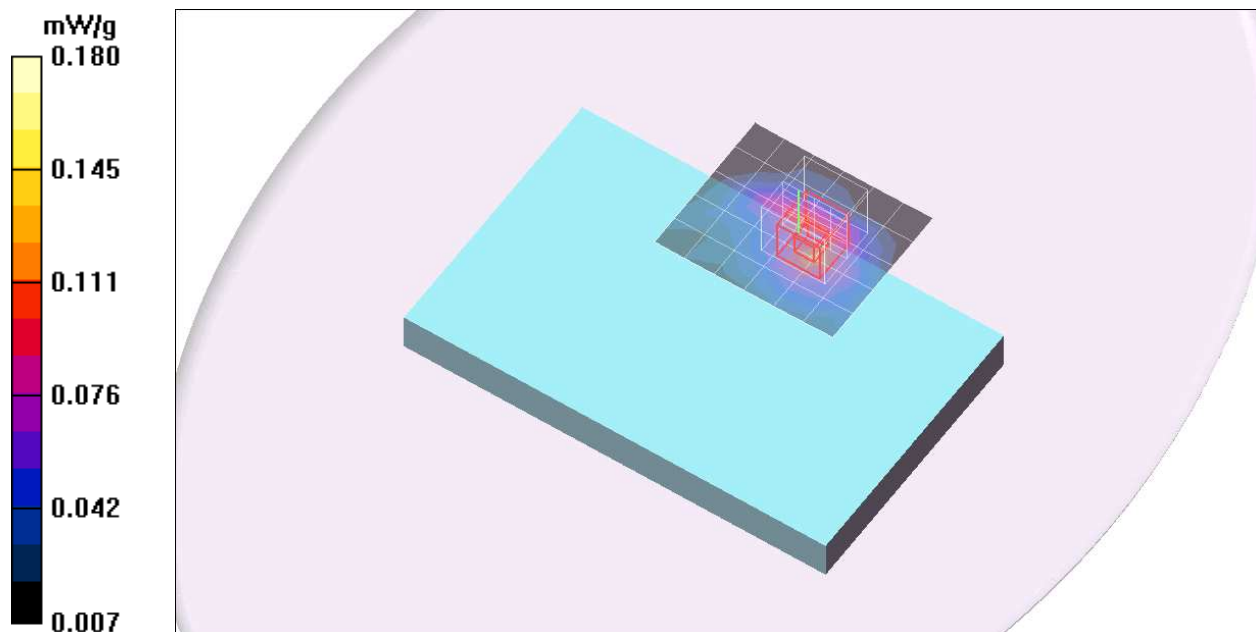

## LTE Band 13

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 782.5$  MHz;  $\sigma = 0.987$  mho/m;  $\epsilon_r = 56.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.44, 9.44, 9.44); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Rear Side/LTE Band 13/QPSK\_BW 10\_RB 25,12/CH23230/Area Scan (7x6x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.094 mW/g

### Rear Side/LTE Band 13/QPSK\_BW 10\_RB 25,12/CH23230/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.53 V/m; Power Drift = 0.157 dB

Peak SAR (extrapolated) = 0.139 W/kg

**SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.048 mW/g**

Maximum value of SAR (measured) = 0.108 mW/g

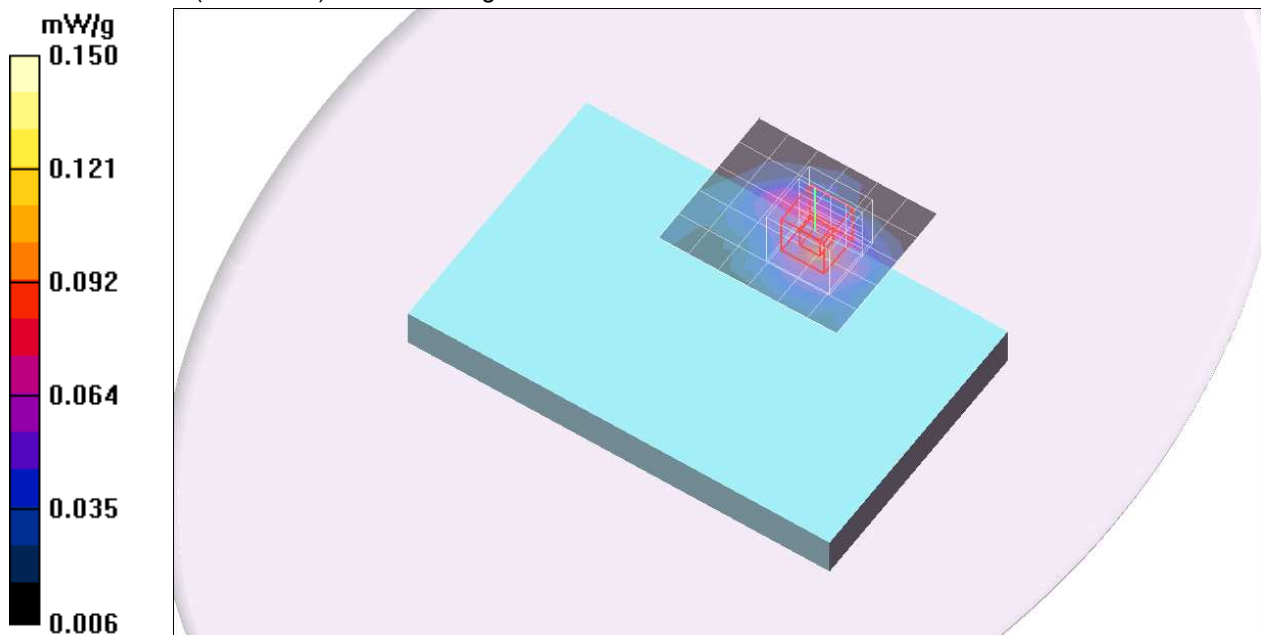

## LTE Band 17

Frequency: 710 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 710$  MHz;  $\sigma = 0.918$  mho/m;  $\epsilon_r = 57.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.44, 9.44, 9.44); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2/LTE Band 17/QPSK\_BW 10\_RB 1,24/CH23790/Area Scan (7x9x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.113 mW/g

**Edge2/LTE Band 17/QPSK\_BW 10\_RB 1,24/CH23790/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.9 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.269 W/kg

**SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.071 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.204 mW/g

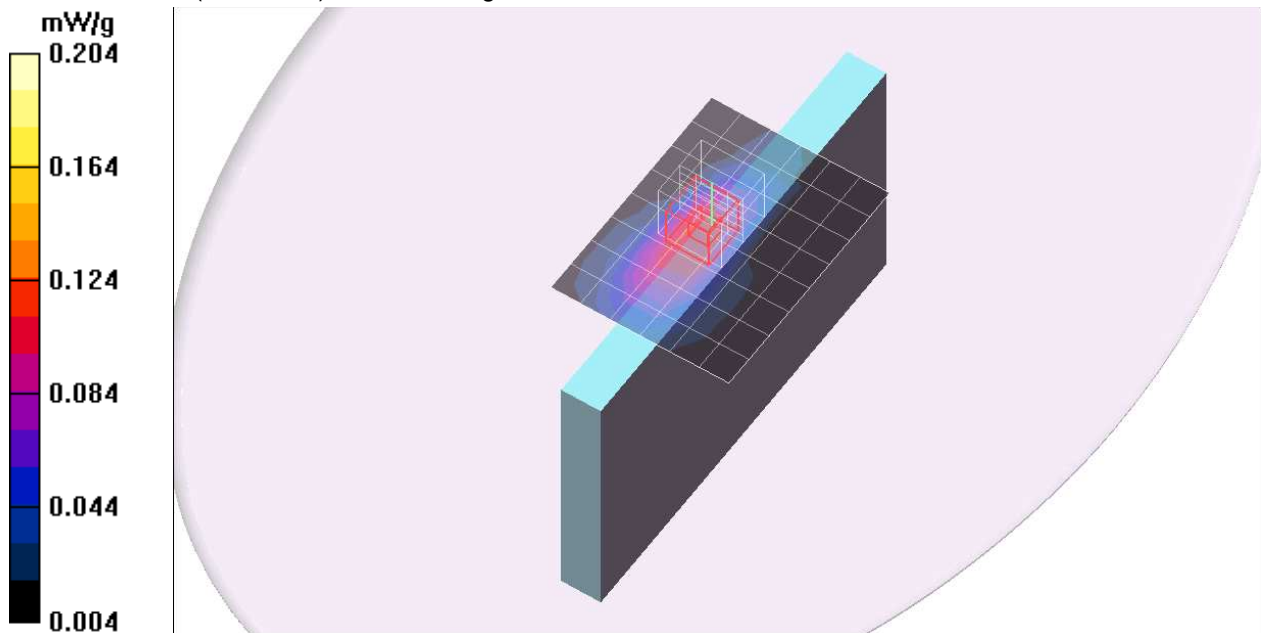

## LTE Band 17

Frequency: 710 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 710$  MHz;  $\sigma = 0.918$  mho/m;  $\epsilon_r = 57.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.44, 9.44, 9.44); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2/LTE Band 17/QPSK\_BW 10\_RB 25,0/CH23790/Area Scan (7x9x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.090 mW/g

**Edge2/LTE Band 17/QPSK\_BW 10\_RB 25,0/CH23790/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.1 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.208 W/kg

**SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.054 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.157 mW/g

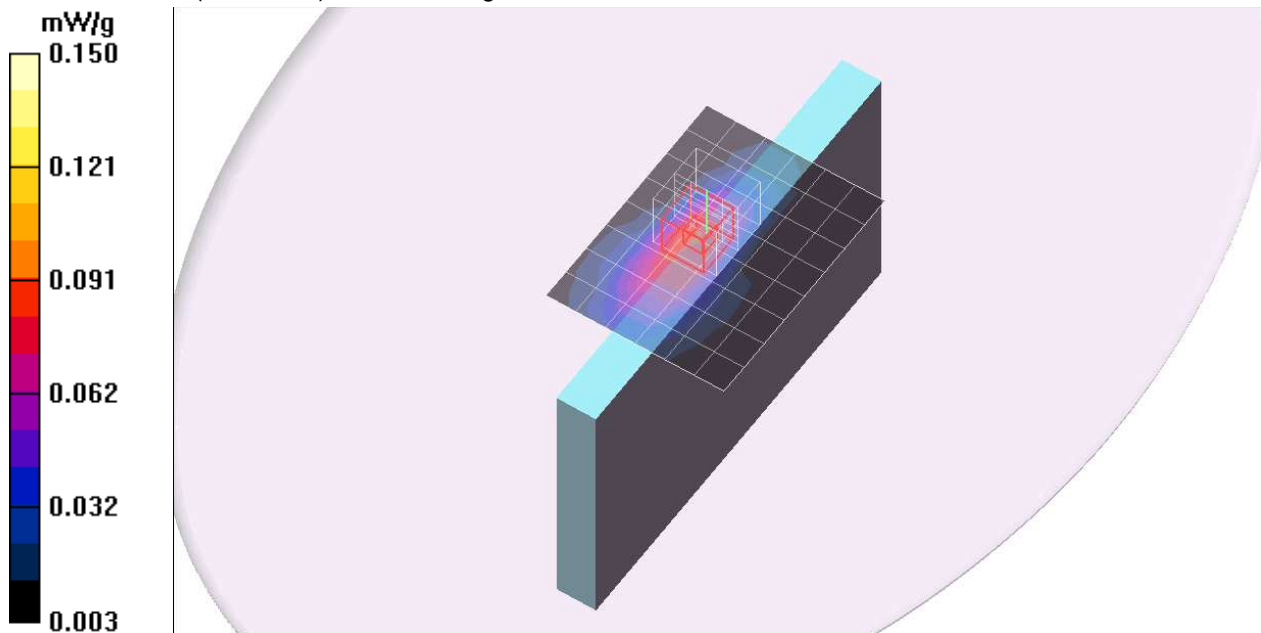

## LTE Band 17

Frequency: 710 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 710$  MHz;  $\sigma = 0.918$  mho/m;  $\epsilon_r = 57.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.44, 9.44, 9.44); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 17/QPSK\_BW 10\_RB 1,24/CH23790/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.084 mW/g

**Rear Side/LTE Band 17/QPSK\_BW 10\_RB 1,24/CH23790/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.23 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 0.126 W/kg

**SAR(1 g) = 0.070 mW/g; SAR(10 g) = 0.042 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.094 mW/g

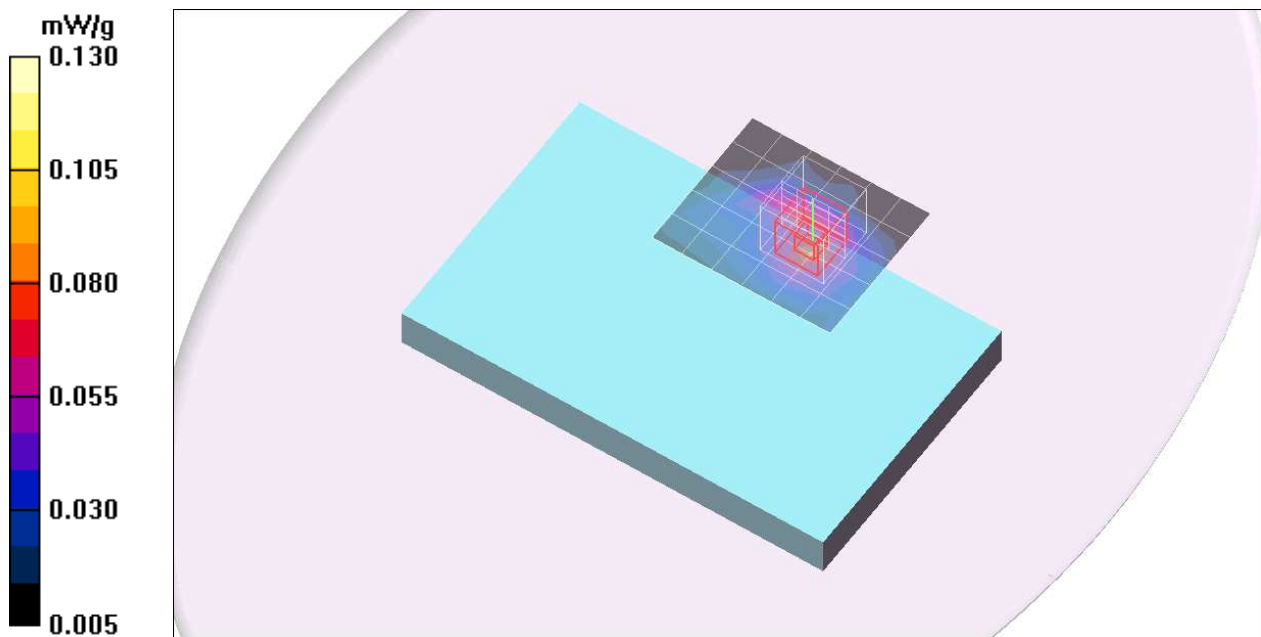

## LTE Band 17

Frequency: 710 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 710$  MHz;  $\sigma = 0.918$  mho/m;  $\epsilon_r = 57.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(9.44, 9.44, 9.44); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 17/QPSK\_BW 10\_RB 25,0/CH23790/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.069 mW/g

**Rear Side/LTE Band 17/QPSK\_BW 10\_RB 25,0/CH23790/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 3.89 V/m; Power Drift = 0.074 dB

Peak SAR (extrapolated) = 0.089 W/kg

**SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.036 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.073 mW/g

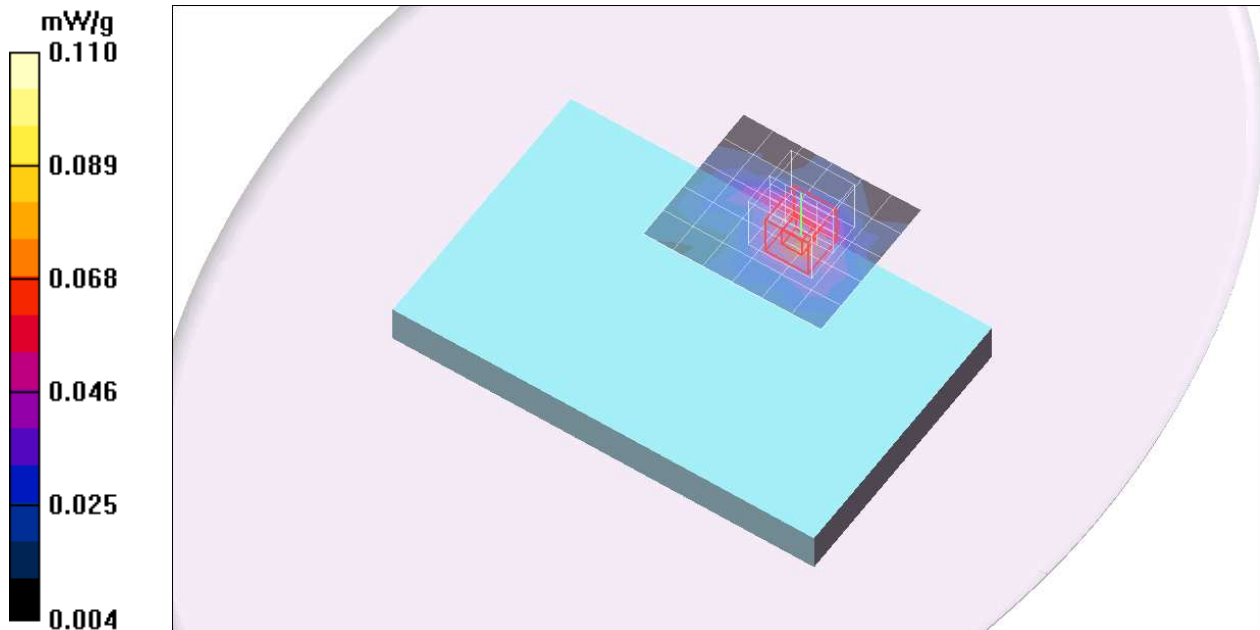

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Edge2/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26365/Area Scan (7x9x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.50 mW/g

**Edge2/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26365/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.6 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 1.87 W/kg

**SAR(1 g) = 1.000 mW/g; SAR(10 g) = 0.487 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.48 mW/g

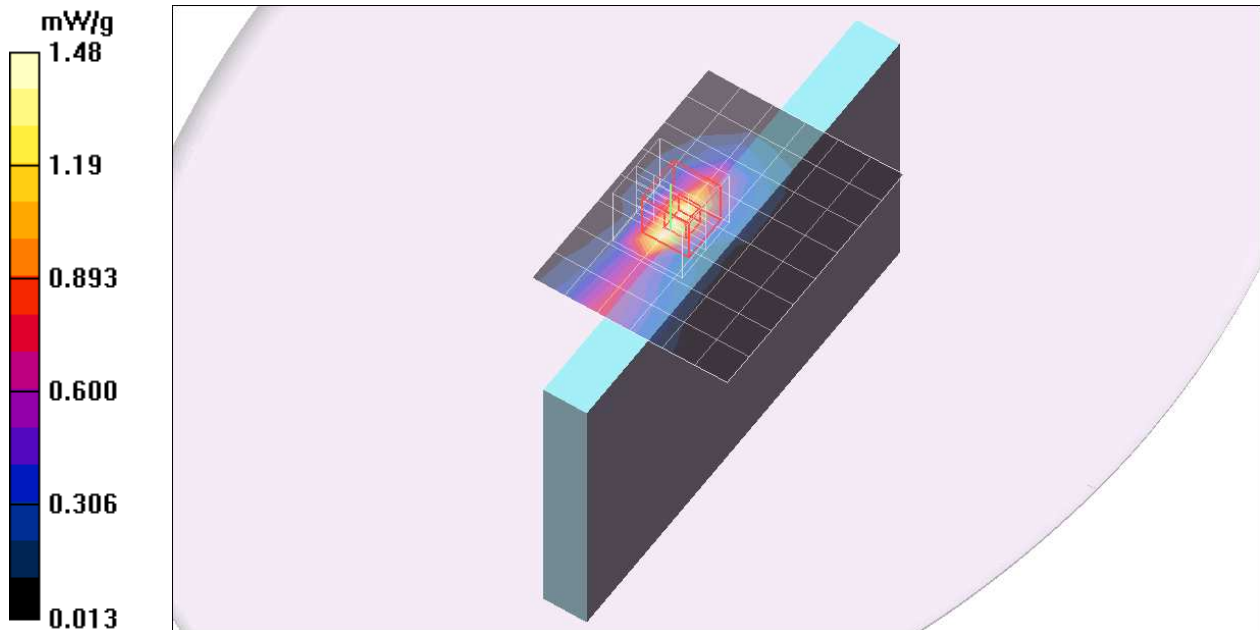

## LTE Band 25


Frequency: 1882.5 MHz; Duty Cycle: 1:1

**Edge2/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26365/Z Scan (1x1x21):** Measurement grid:

dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.15 mW/g

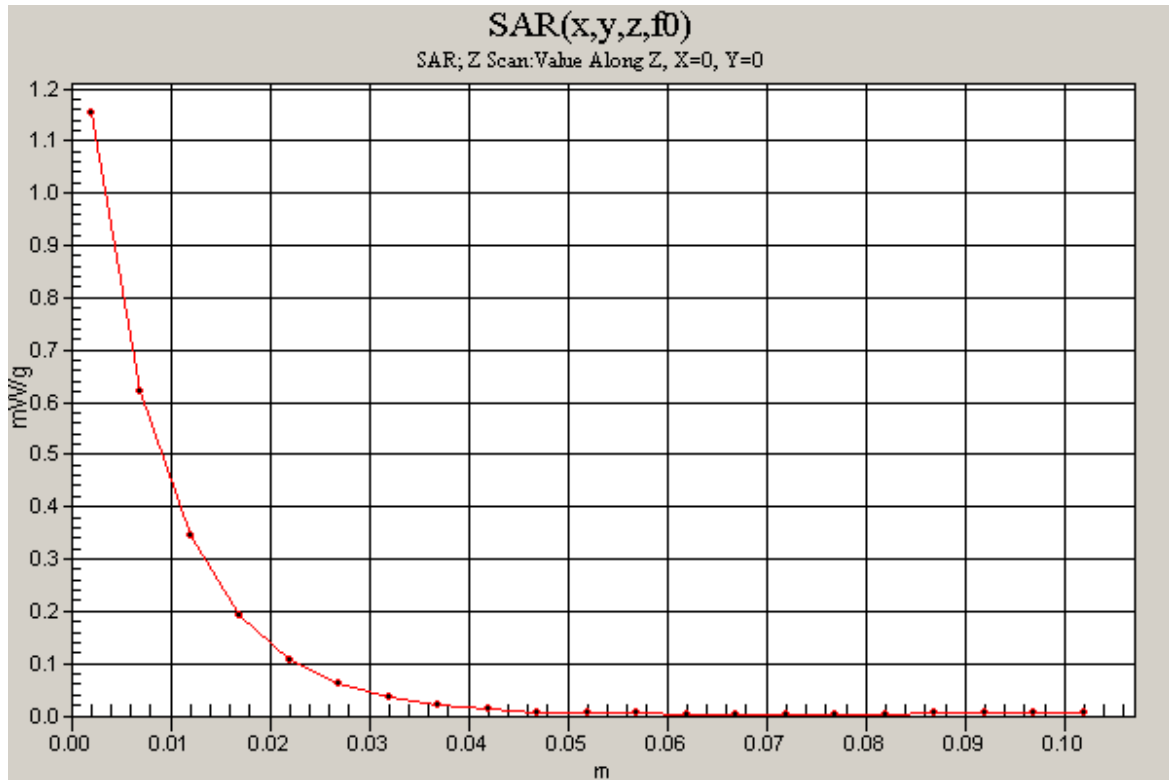

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 1,49/CH26365/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.03 mW/g

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 1,49/CH26365/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.5 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.807 mW/g; SAR(10 g) = 0.418 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.19 mW/g

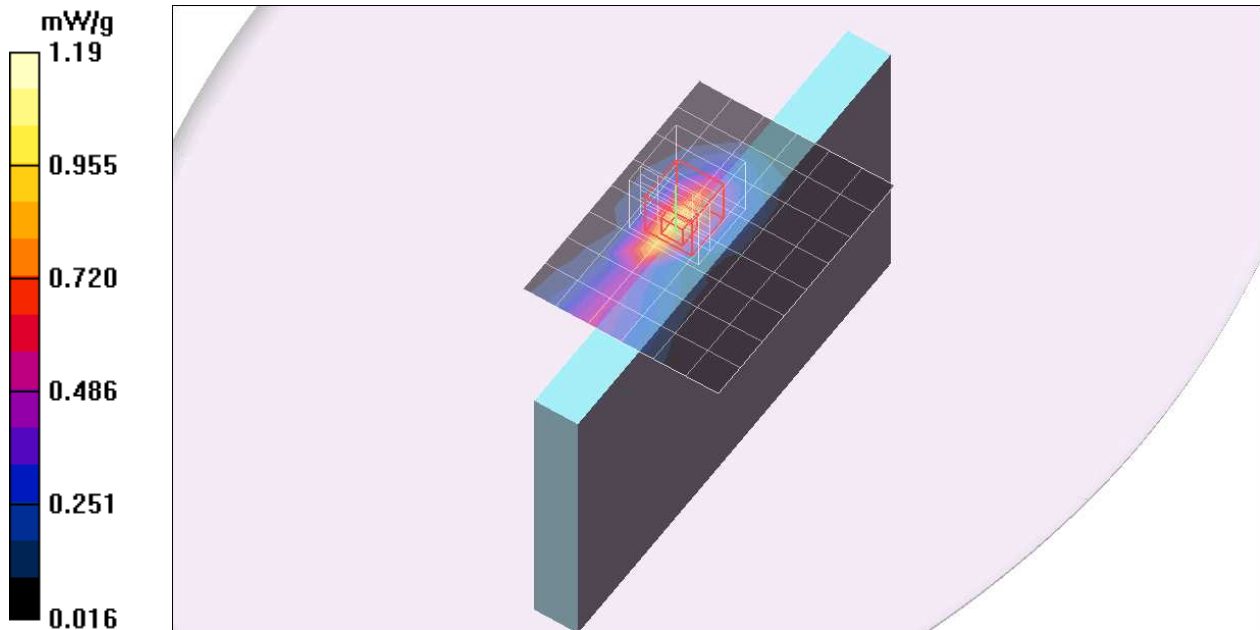

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 1,99/CH26365/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.989 mW/g

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 1,99/CH26365/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.2 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.787 mW/g; SAR(10 g) = 0.408 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.16 mW/g

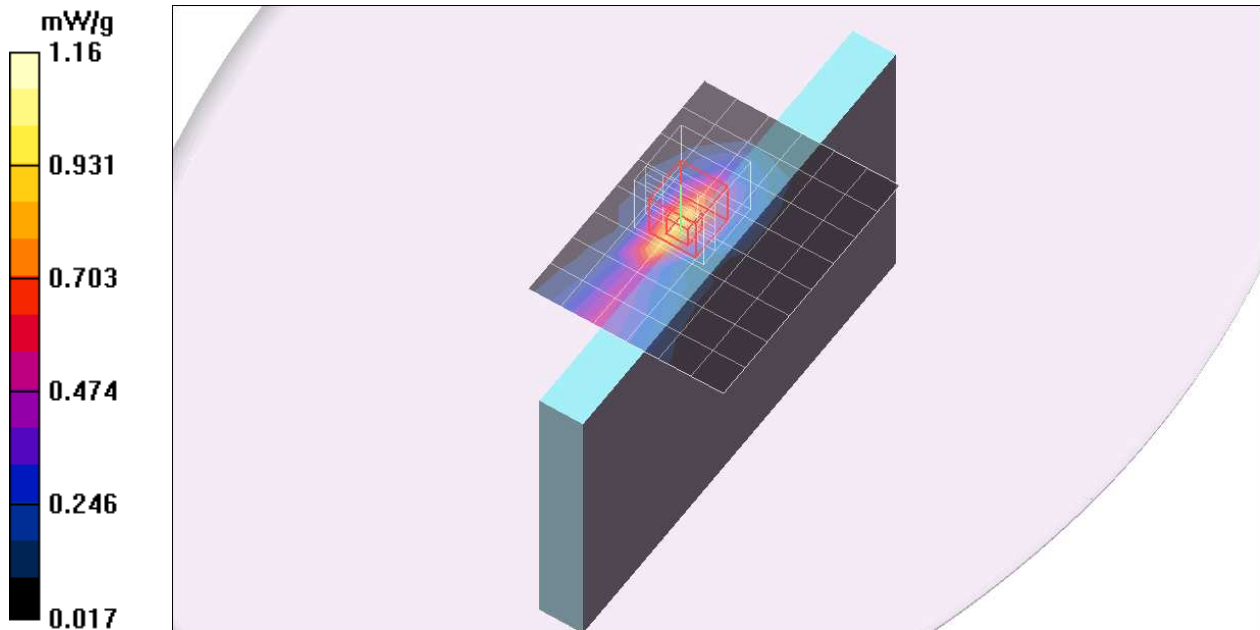

## LTE Band 25

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26140/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.24 mW/g

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26140/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.0 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 1.76 W/kg

**SAR(1 g) = 0.977 mW/g; SAR(10 g) = 0.513 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.43 mW/g

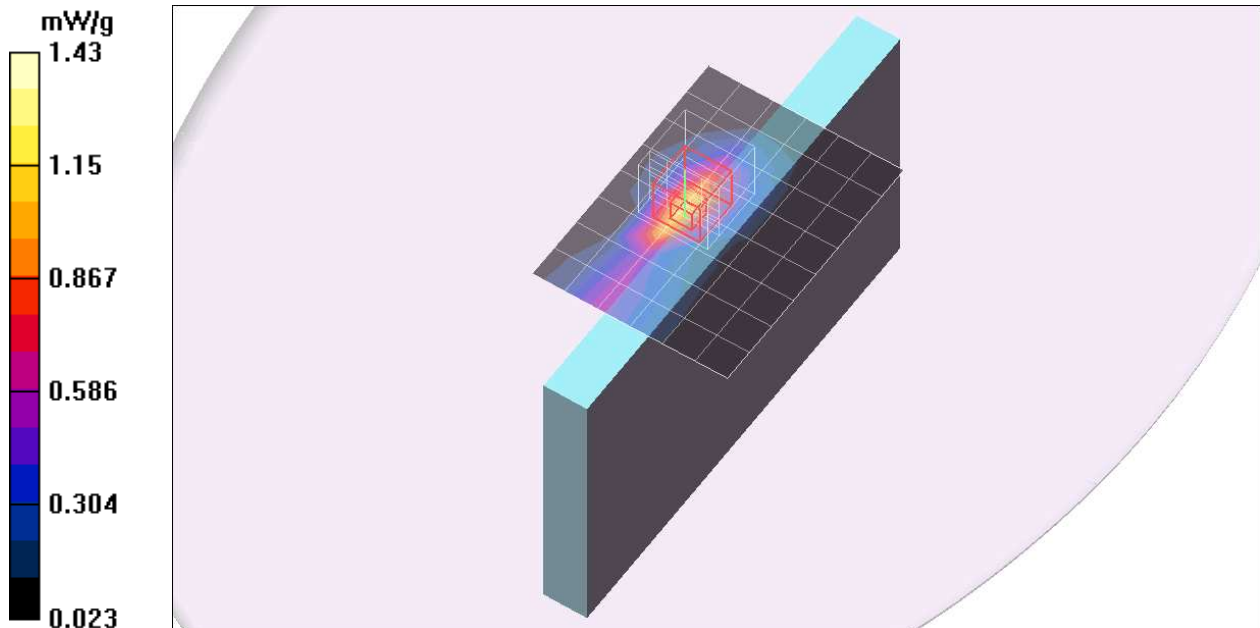

## LTE Band 25

Frequency: 1905 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1905$  MHz;  $\sigma = 1.57$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26590/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.996 mW/g

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26590/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.1 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.791 mW/g; SAR(10 g) = 0.409 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.18 mW/g

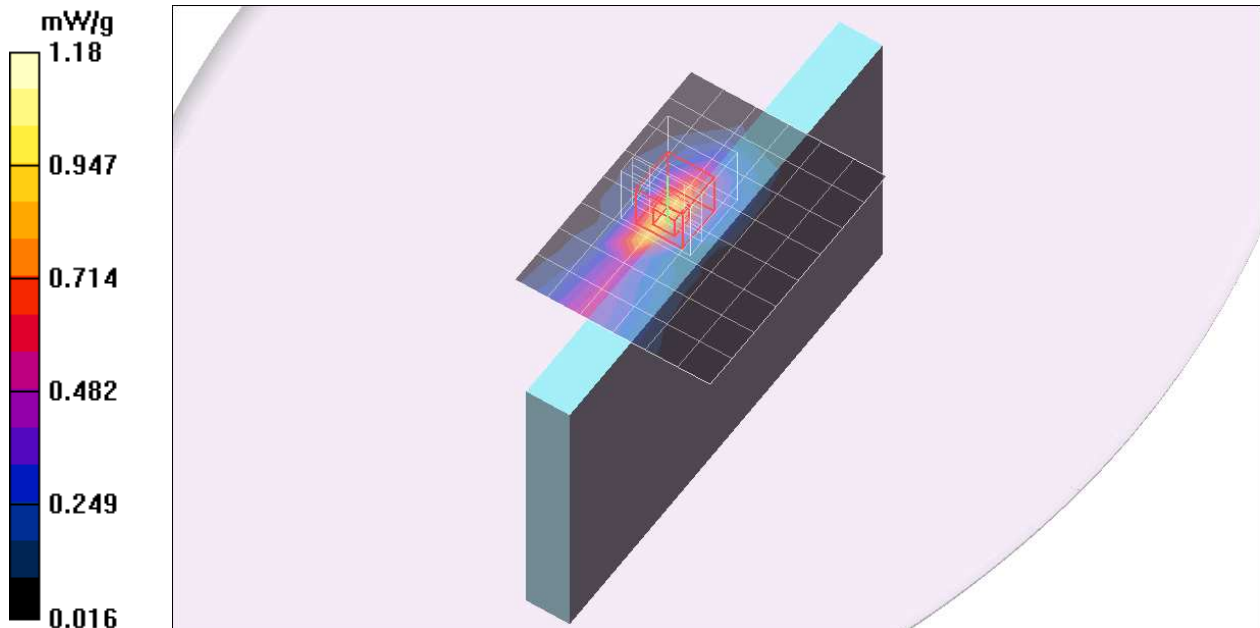

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 50,0/CH26365/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.791 mW/g

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 50,0/CH26365/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.8 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.621 mW/g; SAR(10 g) = 0.322 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.924 mW/g

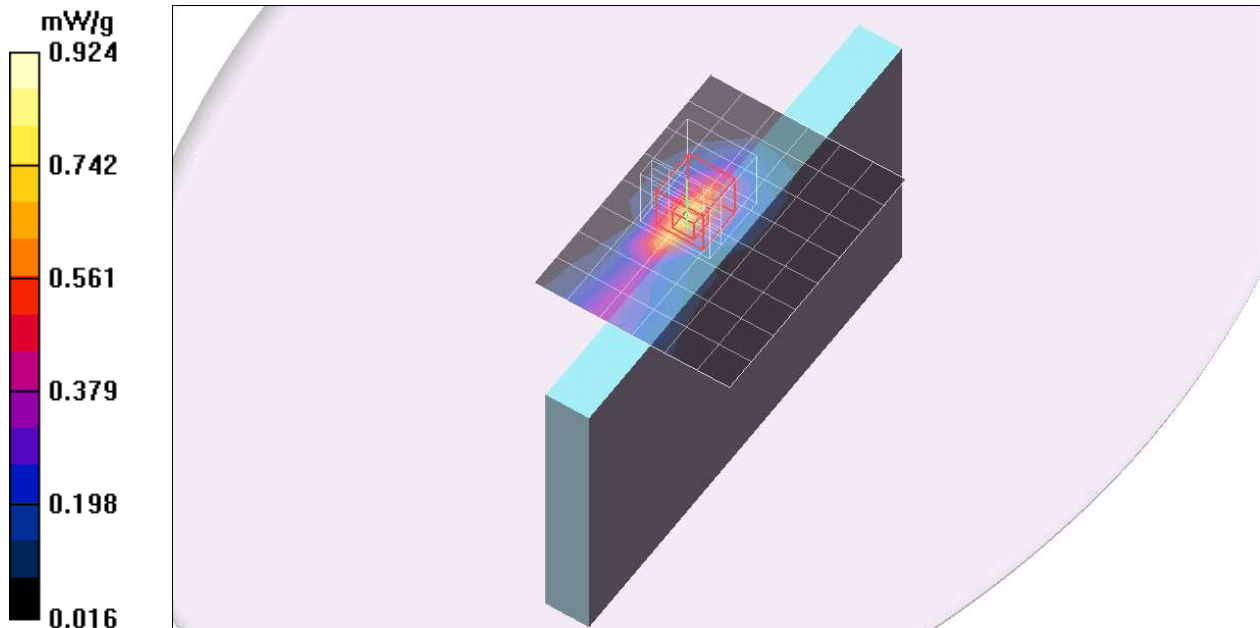

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 50,24/CH26365/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.766 mW/g

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 50,24/CH26365/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.8 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.604 mW/g; SAR(10 g) = 0.312 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.905 mW/g

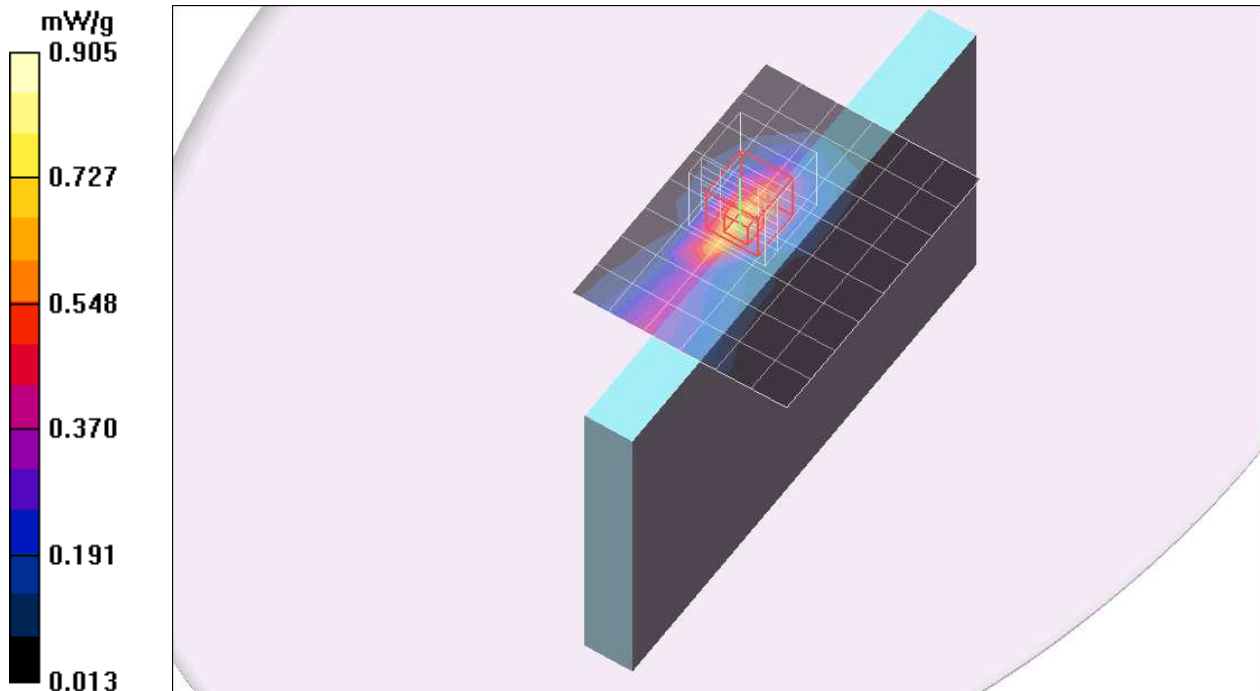

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 50,49/CH26365/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.751 mW/g

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 50,49/CH26365/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.5 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.584 mW/g; SAR(10 g) = 0.303 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.861 mW/g

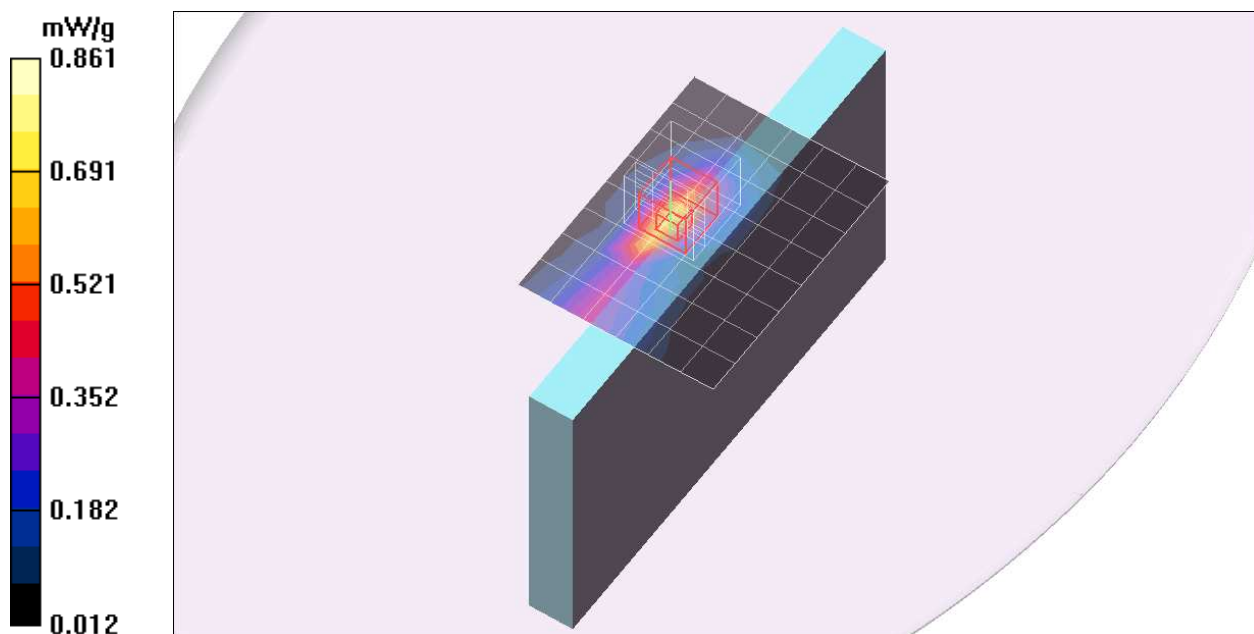

## LTE Band 25

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 50,0/CH26140/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.888 mW/g

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 50,0/CH26140/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.4 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.708 mW/g; SAR(10 g) = 0.368 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.04 mW/g

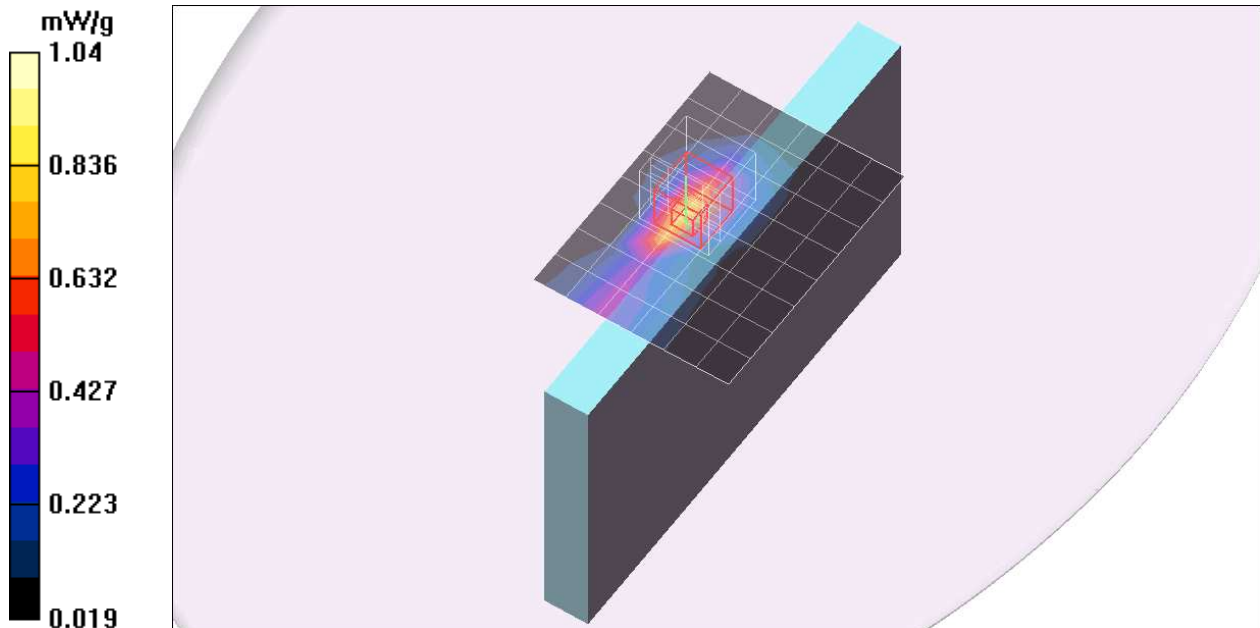

## LTE Band 25

Frequency: 1905 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1905$  MHz;  $\sigma = 1.57$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 50,0/CH26590/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.739 mW/g

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 50,0/CH26590/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.6 V/m; Power Drift = -0.083 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.594 mW/g; SAR(10 g) = 0.307 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.890 mW/g

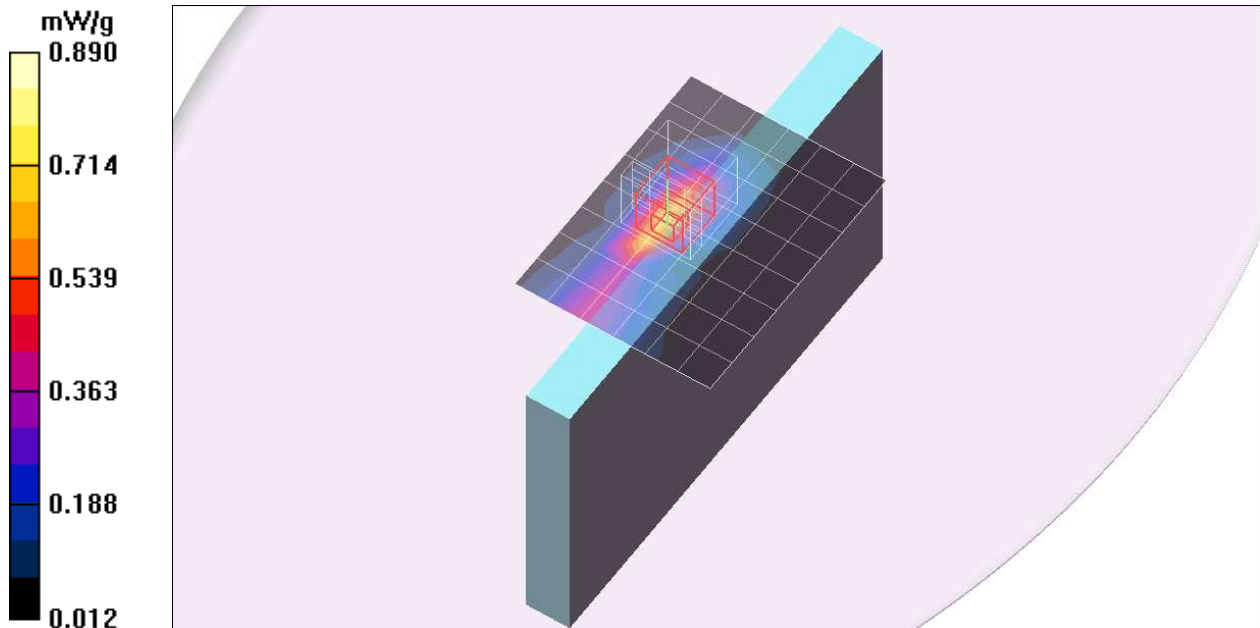

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 100,0/CH26365/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.758 mW/g

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 100,0/CH26365/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.7 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.600 mW/g; SAR(10 g) = 0.312 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.896 mW/g

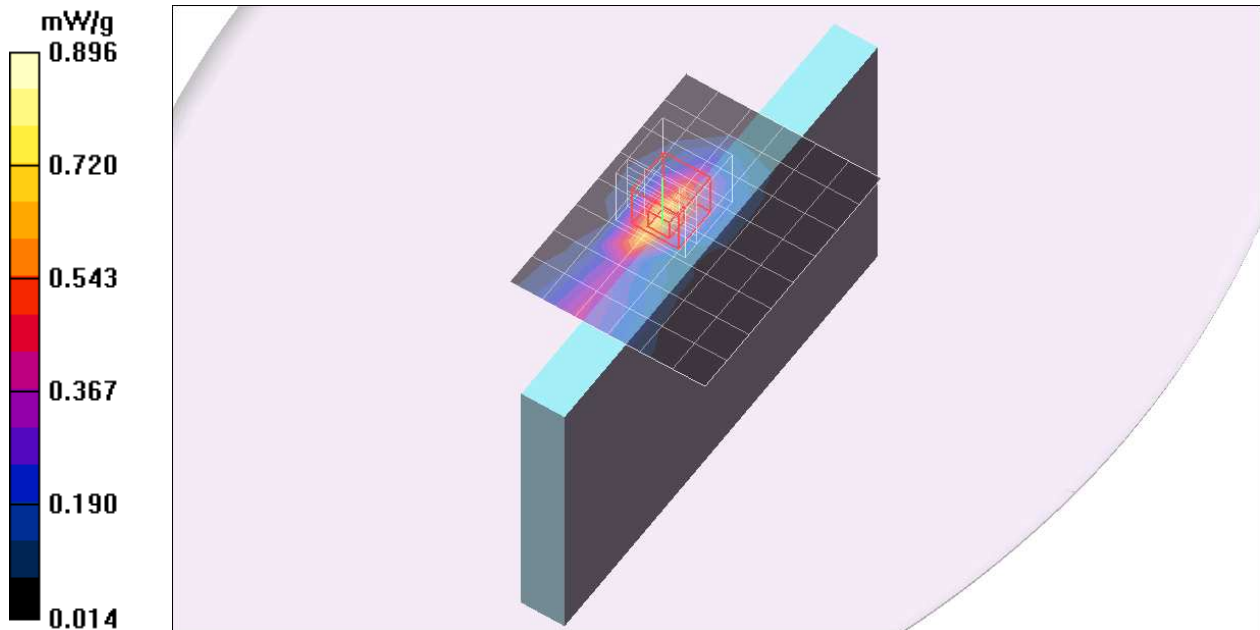

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26365\_Repeat/Area Scan (7x9x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.10 mW/g

### Edge2/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26365\_Repeat/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.3 V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 1.89 W/kg

**SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.504 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.52 mW/g

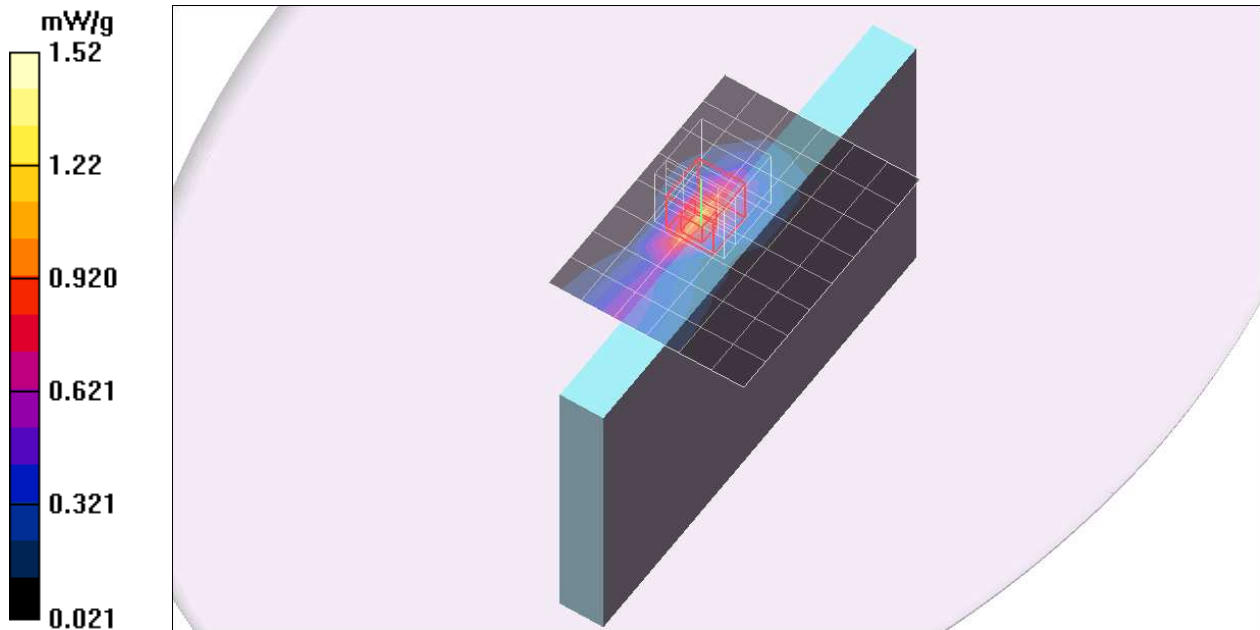

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26365/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.16 mW/g

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26365/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.1 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.799 mW/g; SAR(10 g) = 0.453 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.09 mW/g

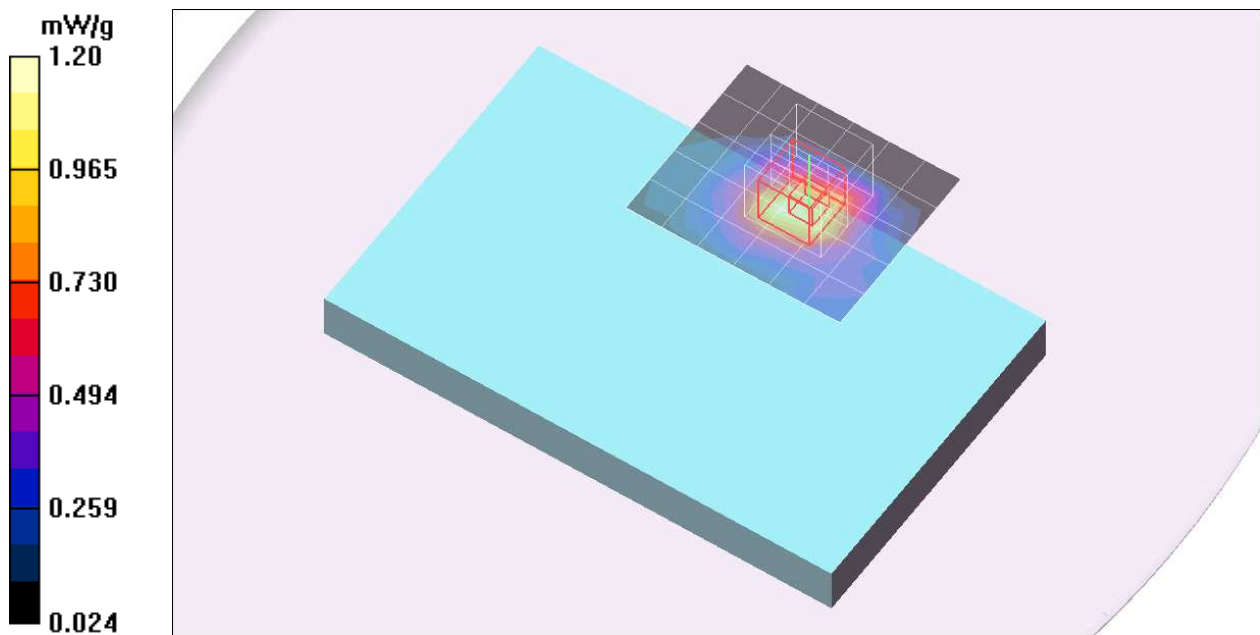

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 1,49/CH26365/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.837 mW/g

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 1,49/CH26365/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.76 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.746 mW/g; SAR(10 g) = 0.422 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.02 mW/g

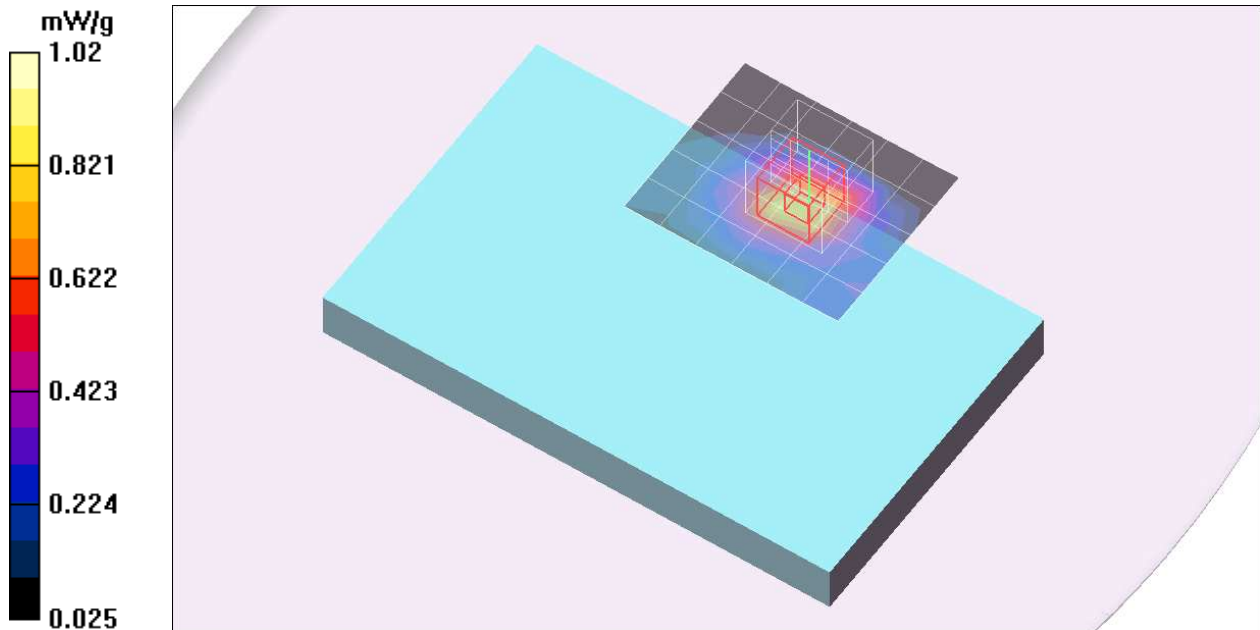

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 1,99/CH26365/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.807 mW/g

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 1,99/CH26365/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.43 V/m; Power Drift = 0.097 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.726 mW/g; SAR(10 g) = 0.409 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.992 mW/g

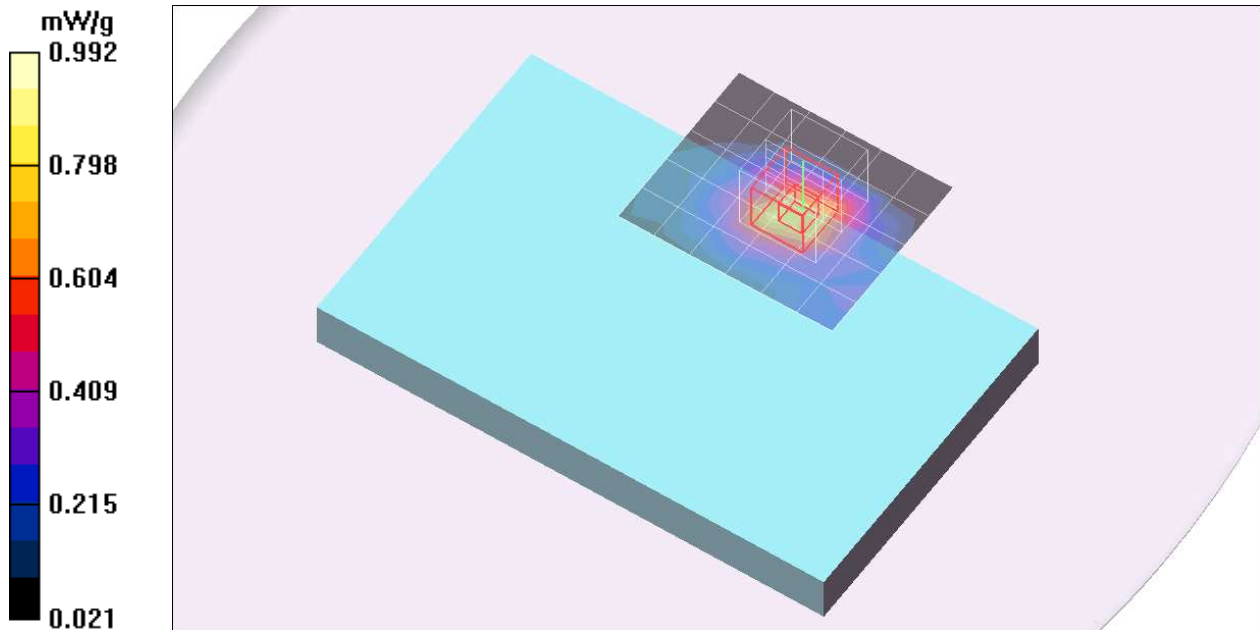

## LTE Band 25

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26140/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.04 mW/g

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26140/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.7 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 1.54 W/kg

**SAR(1 g) = 0.923 mW/g; SAR(10 g) = 0.525 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.23 mW/g

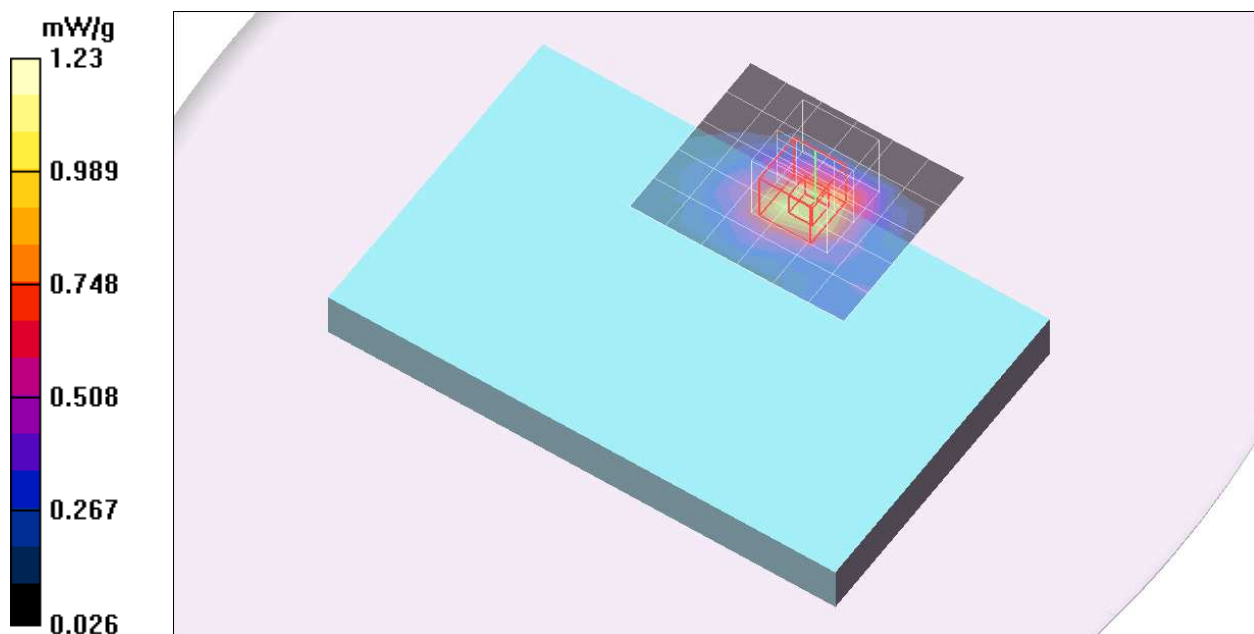

## LTE Band 25

Frequency: 1905 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1905$  MHz;  $\sigma = 1.57$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26590/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.824 mW/g

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 1,0/CH26590/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.43 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.740 mW/g; SAR(10 g) = 0.417 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.01 mW/g

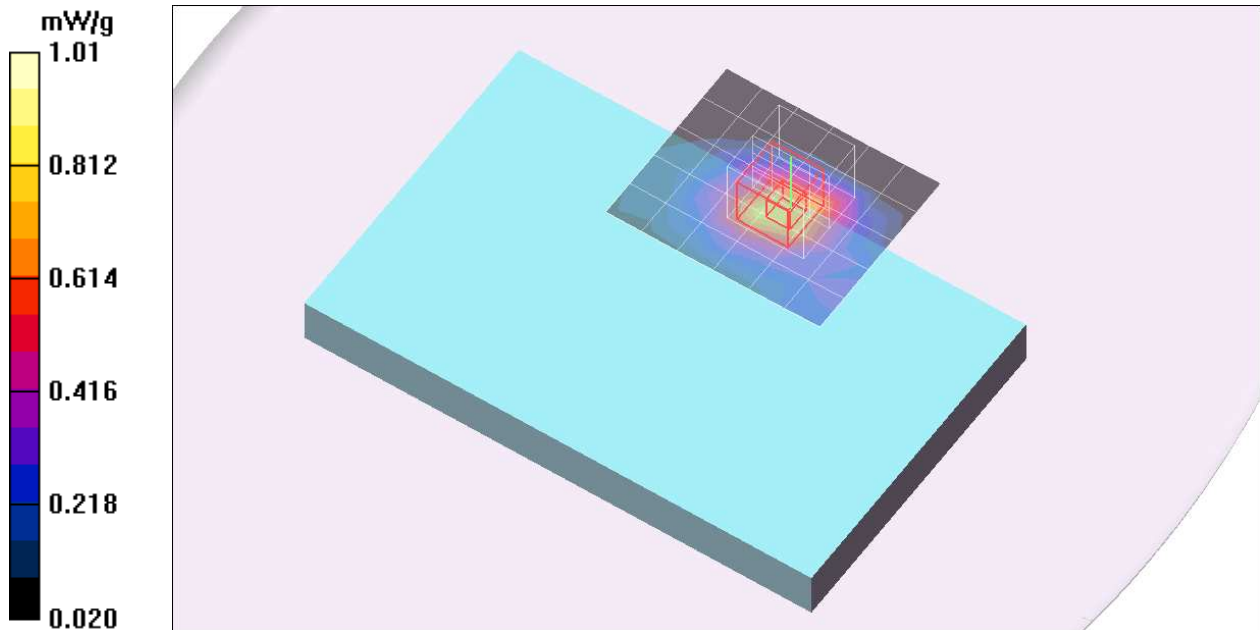

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 50,0/CH26365/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.829 mW/g

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 50,0/CH26365/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.92 V/m; Power Drift = 0.126 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.630 mW/g; SAR(10 g) = 0.367 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.822 mW/g

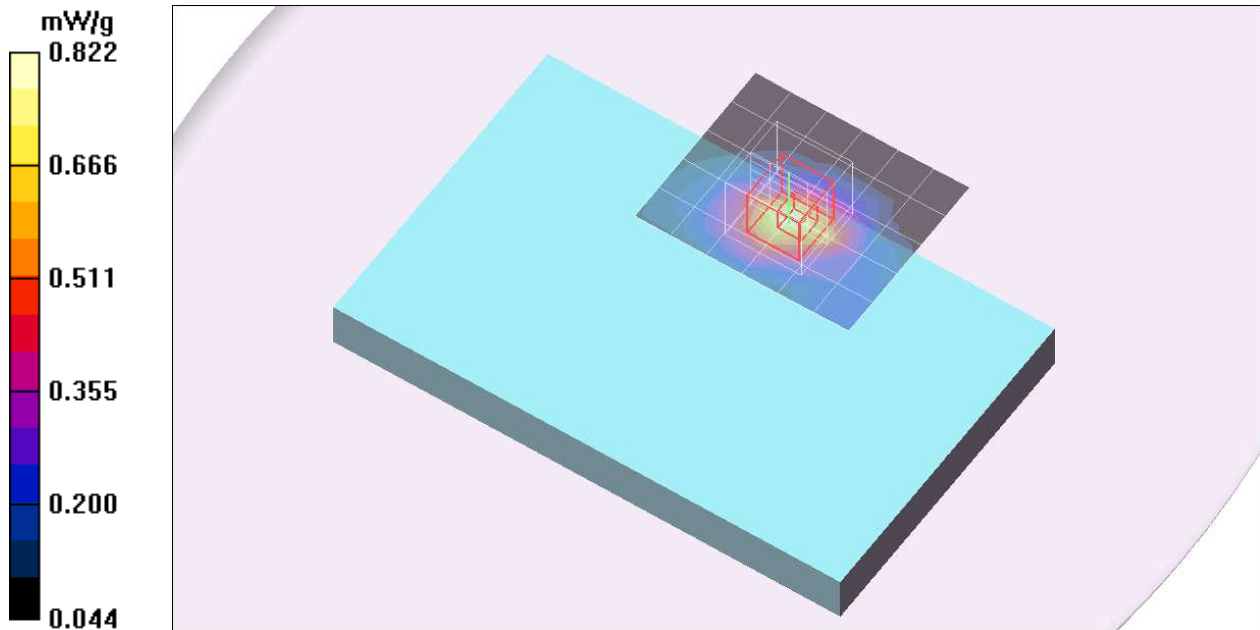

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 50,24/CH26365/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.824 mW/g

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 50,24/CH26365/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.32 V/m; Power Drift = 0.182 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.638 mW/g; SAR(10 g) = 0.378 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.832 mW/g

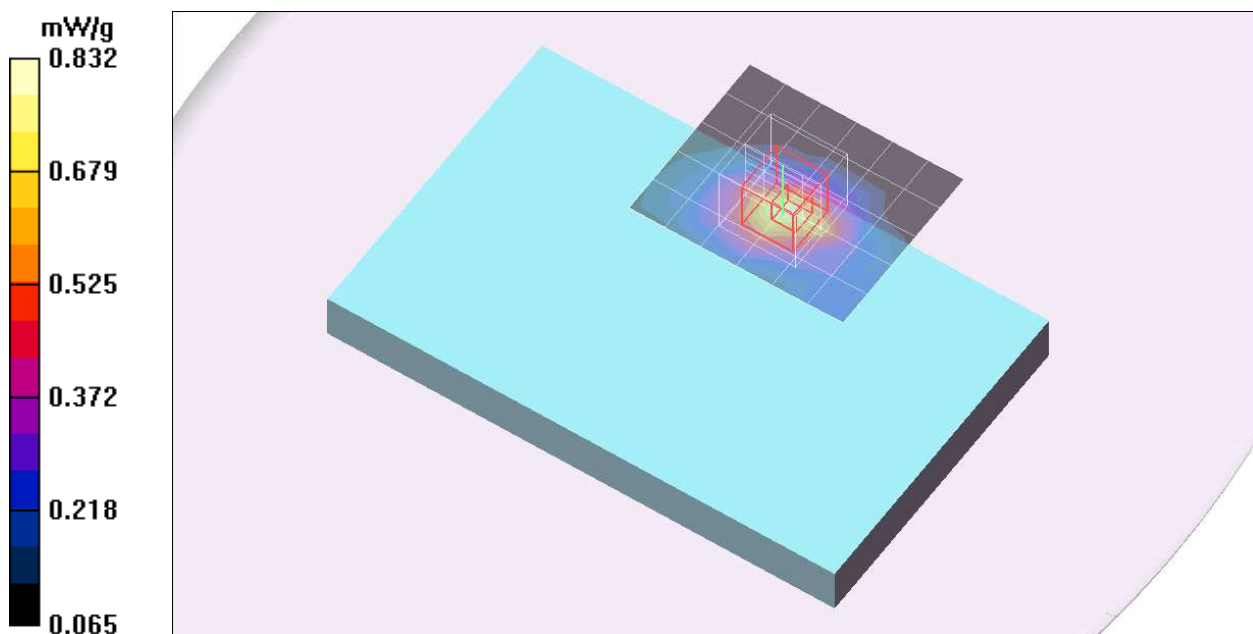

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 50,49/CH26365/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.828 mW/g

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 50,49/CH26365/Zoom Scan (5x5x7)/Cube 0:**


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.62 V/m; Power Drift = 0.122 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.639 mW/g; SAR(10 g) = 0.380 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

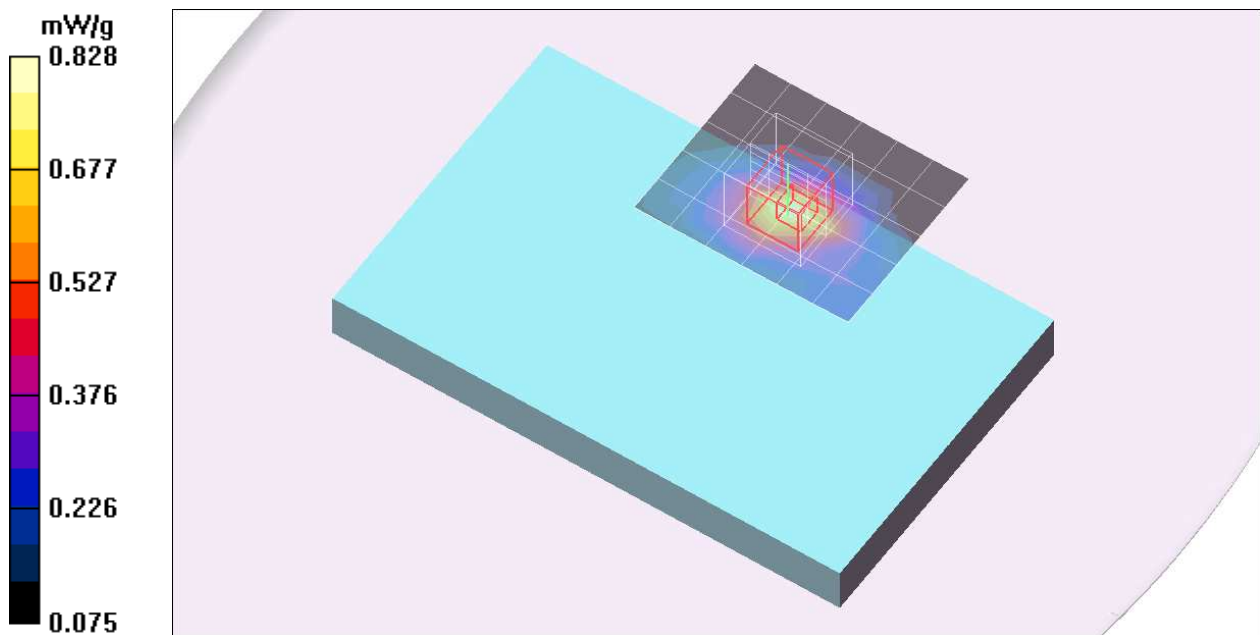

## LTE Band 25

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 50,0/CH26140/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.943 mW/g

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 50,0/CH26140/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.1 V/m; Power Drift = 0.156 dB

Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.727 mW/g; SAR(10 g) = 0.436 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.945 mW/g

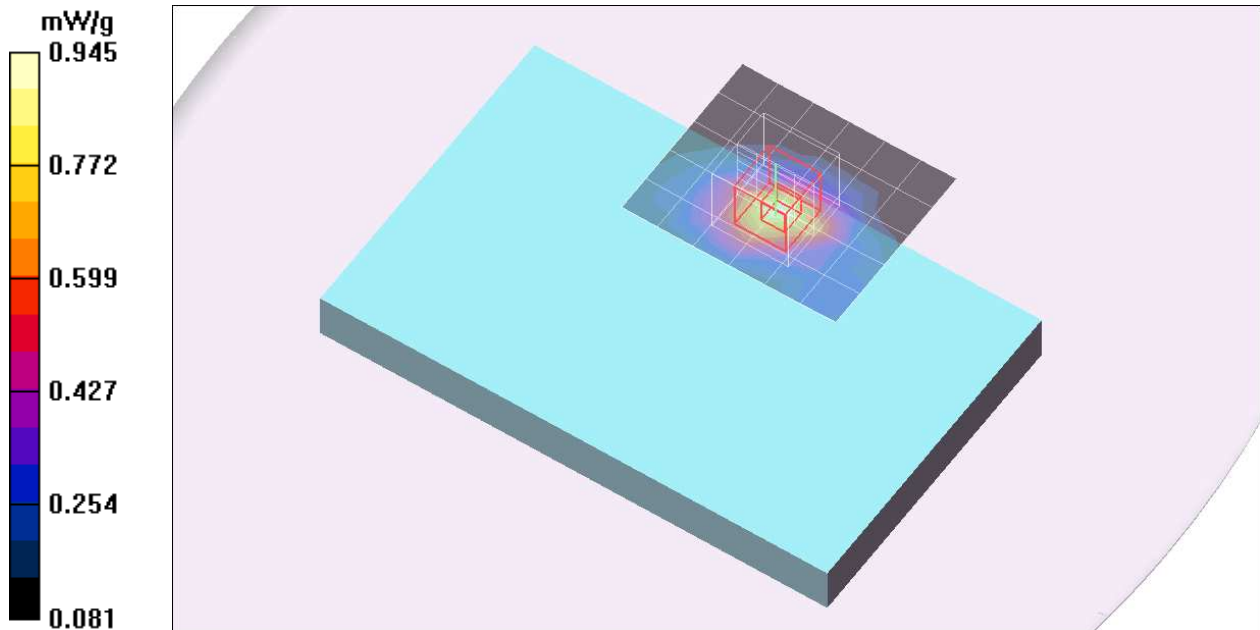

## LTE Band 25

Frequency: 1905 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1905$  MHz;  $\sigma = 1.57$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 50,0/CH26590/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.837 mW/g

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 50,0/CH26590/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.65 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.650 mW/g; SAR(10 g) = 0.389 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.842 mW/g

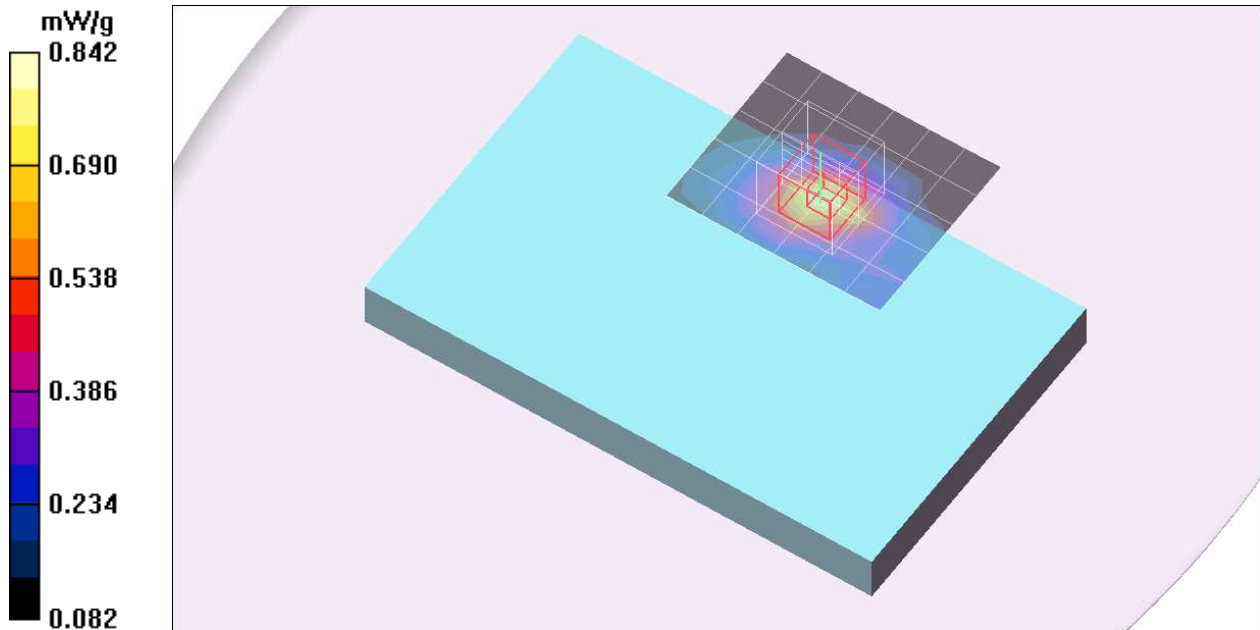

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/22/2014
- Probe: EX3DV4 - SN3979; ConvF(7.71, 7.71, 7.71); Calibrated: 3/4/2014
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 100,0/CH26365/Area Scan (7x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.858 mW/g

**Rear Side/LTE Band 25/QPSK\_BW 20\_RB 100,0/CH26365/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.93 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 1.07 W/kg

**SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.392 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.845 mW/g

