


Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2483,33MHz Pmax:113,50dBμV/m

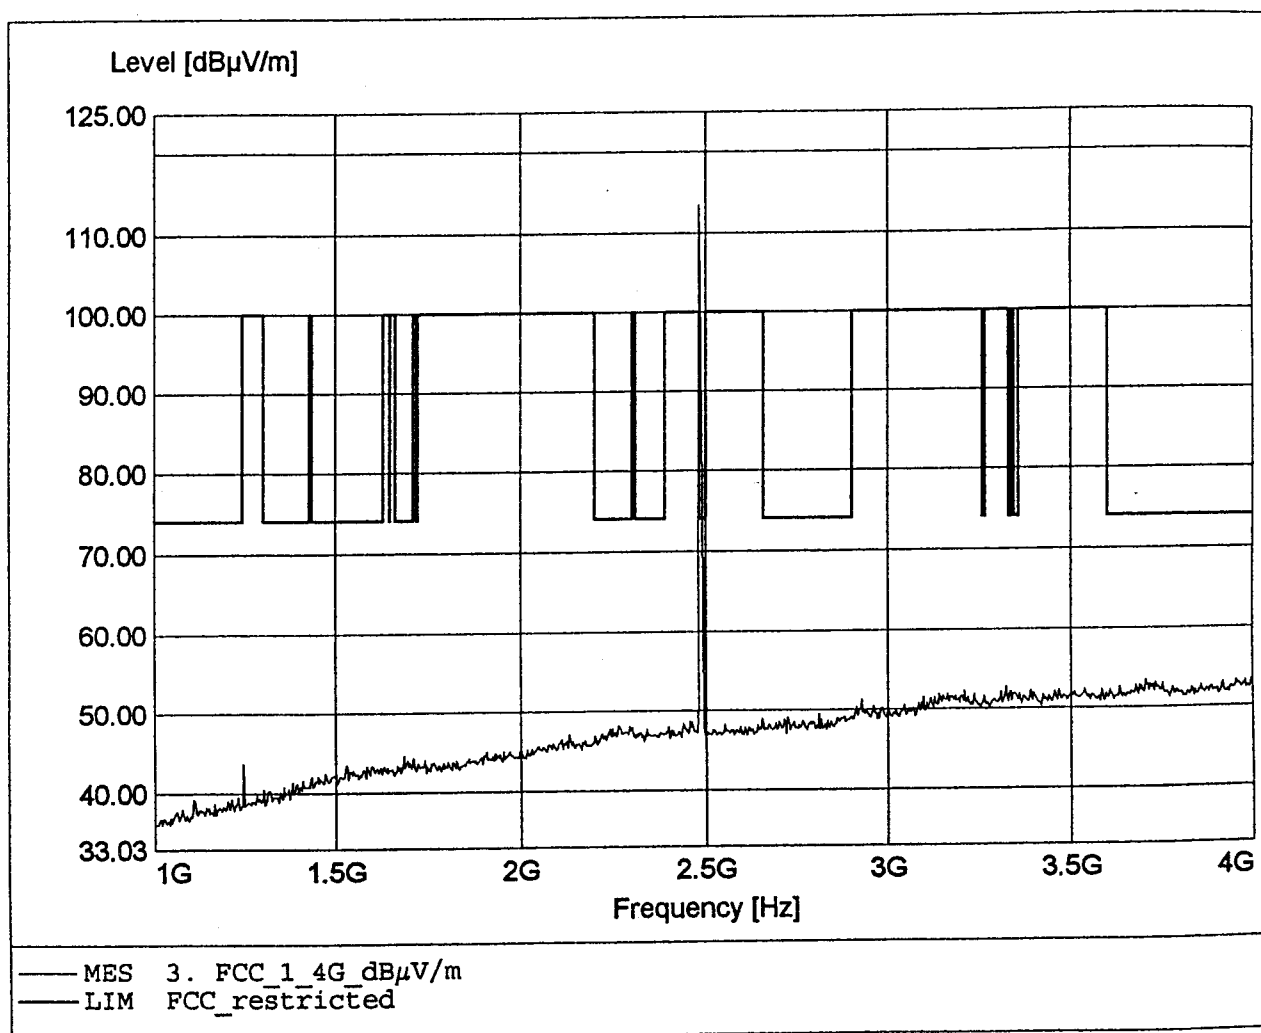

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7955,55MHz Pmax:63,65dBμV/m

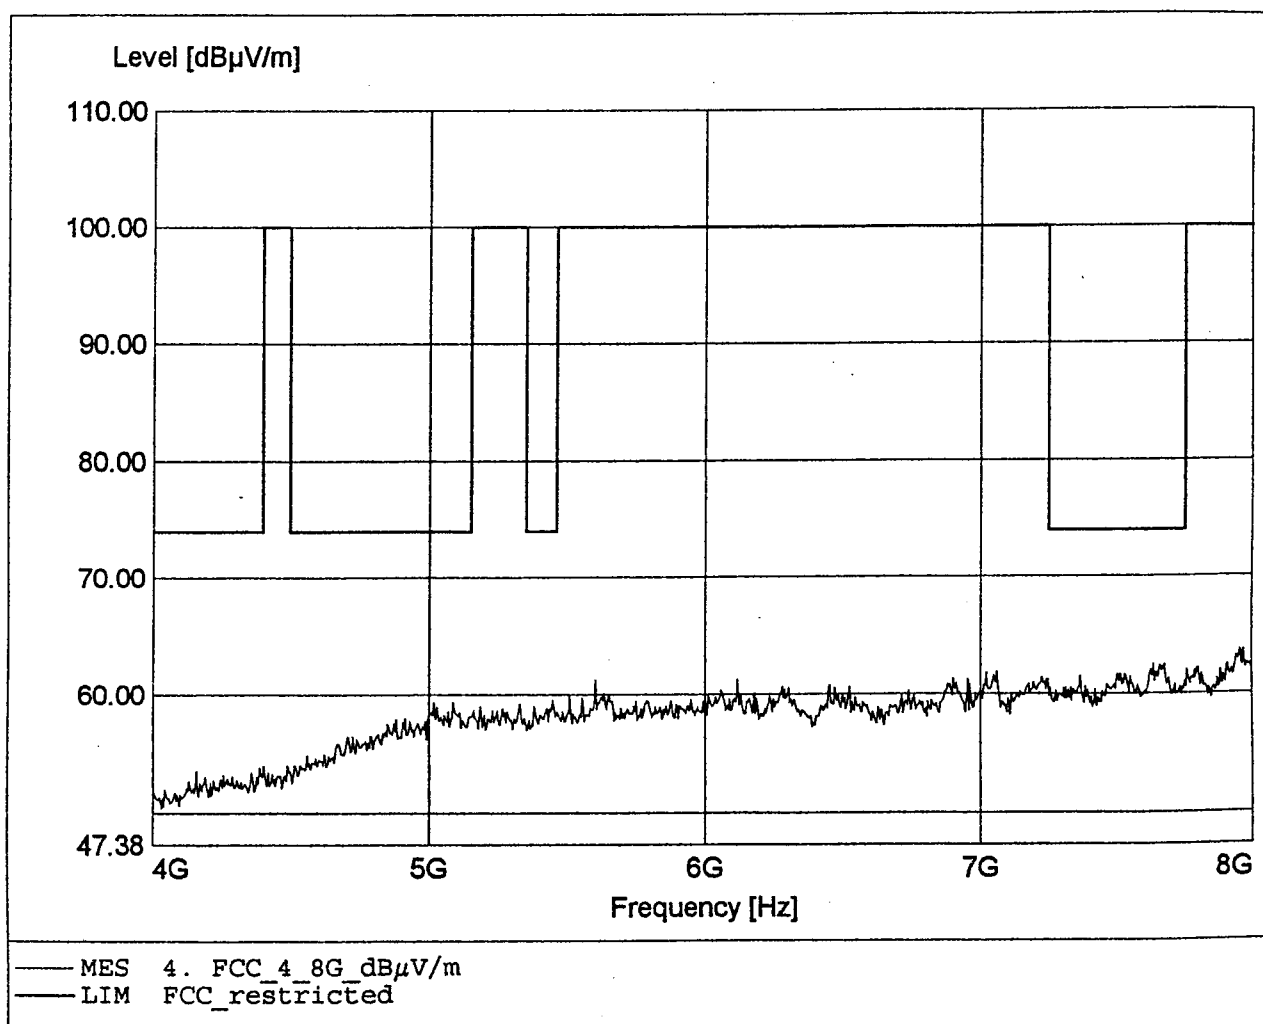

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7968,88MHz Pmax:63,87dBμV/m

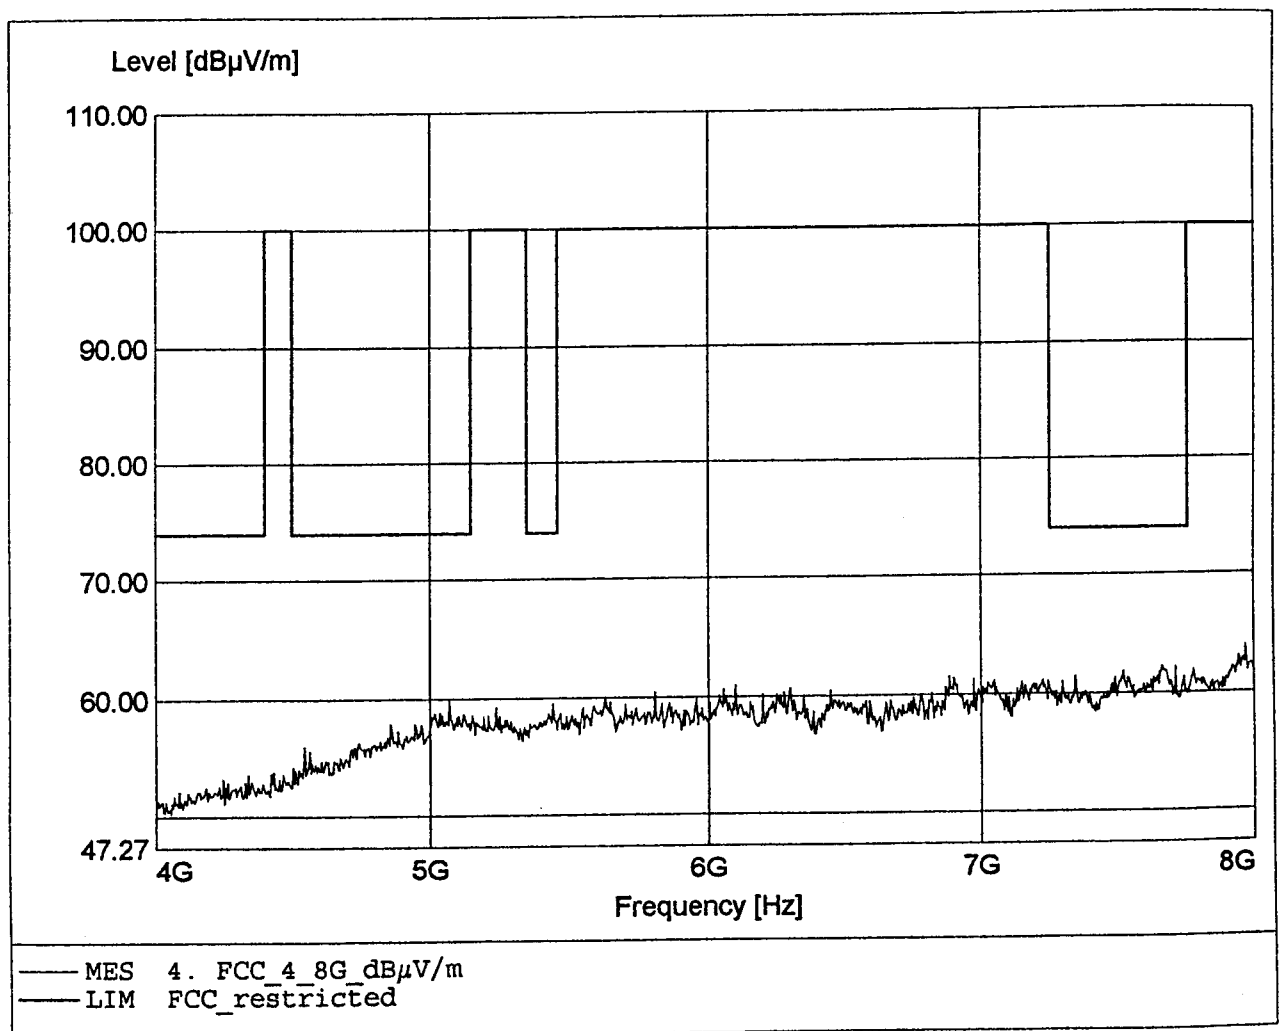

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:17655,55MHz Pmax:48,82dBμV/m

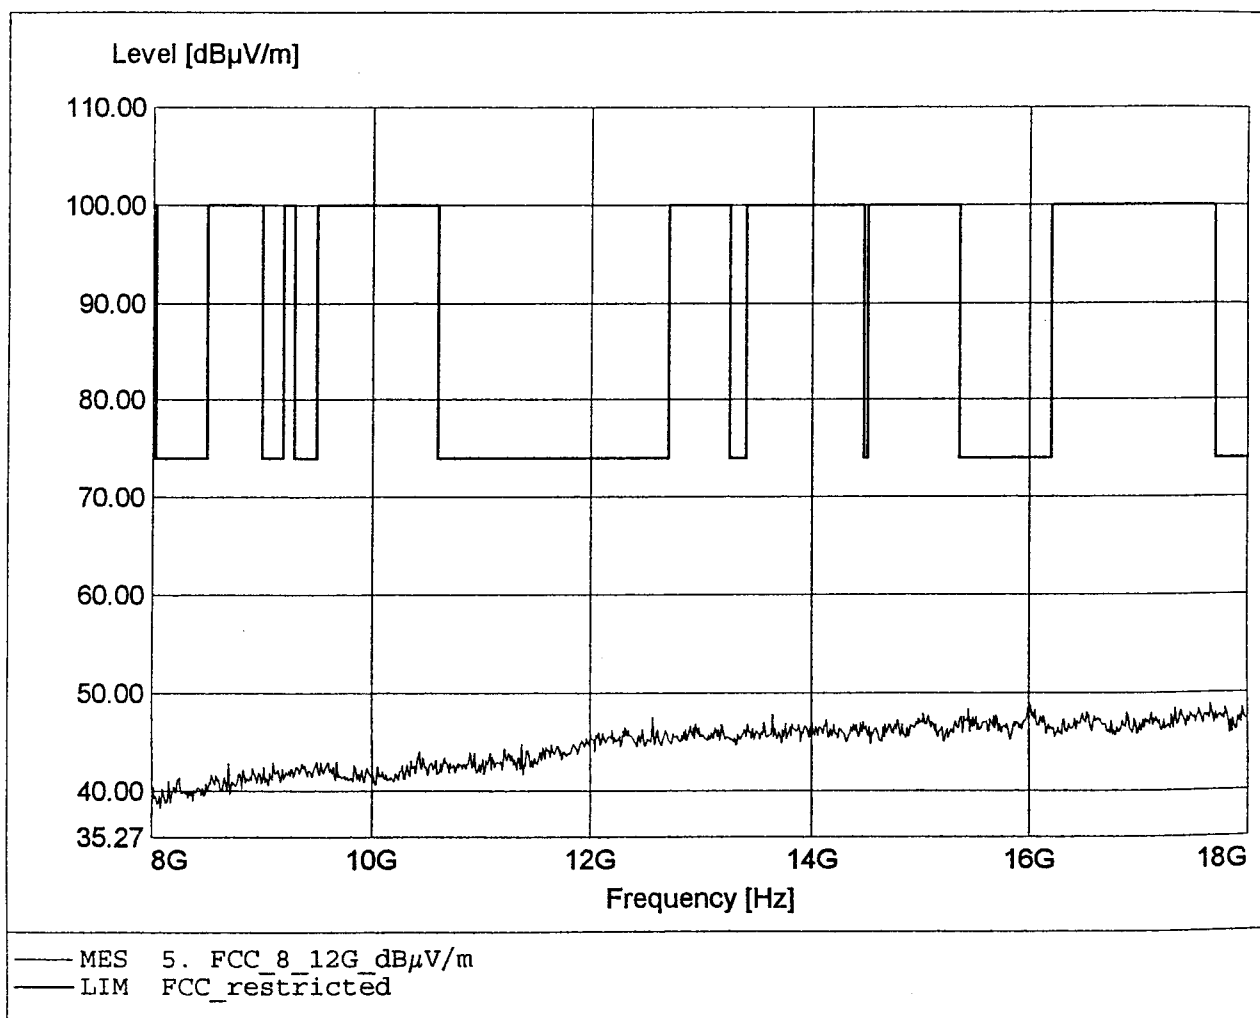

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:17511,07MHz Pmax:49,7dBμV/m

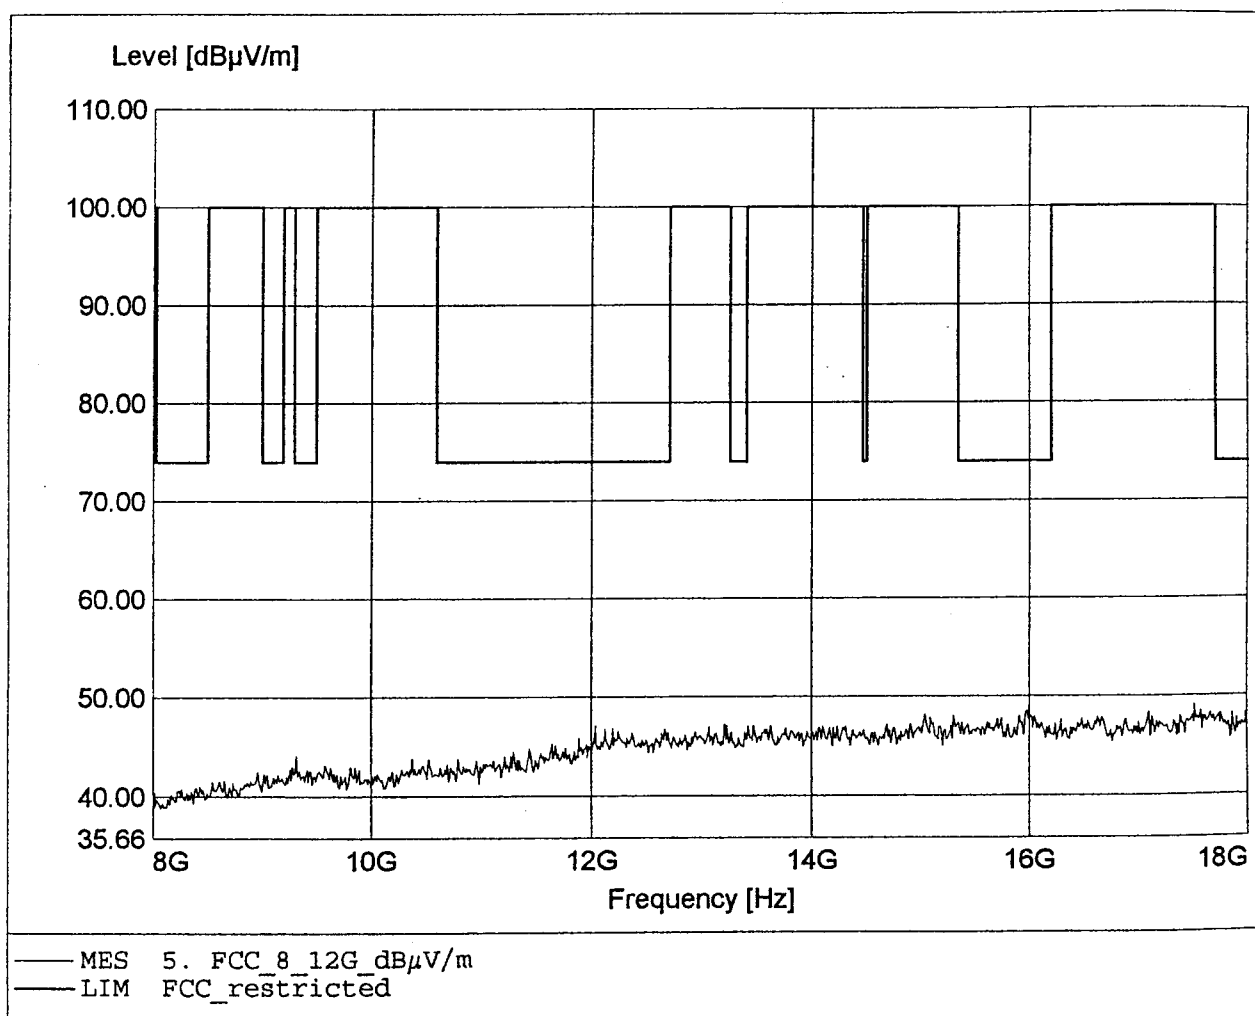

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26292,22MHz Pmax:60,23dBμV/m

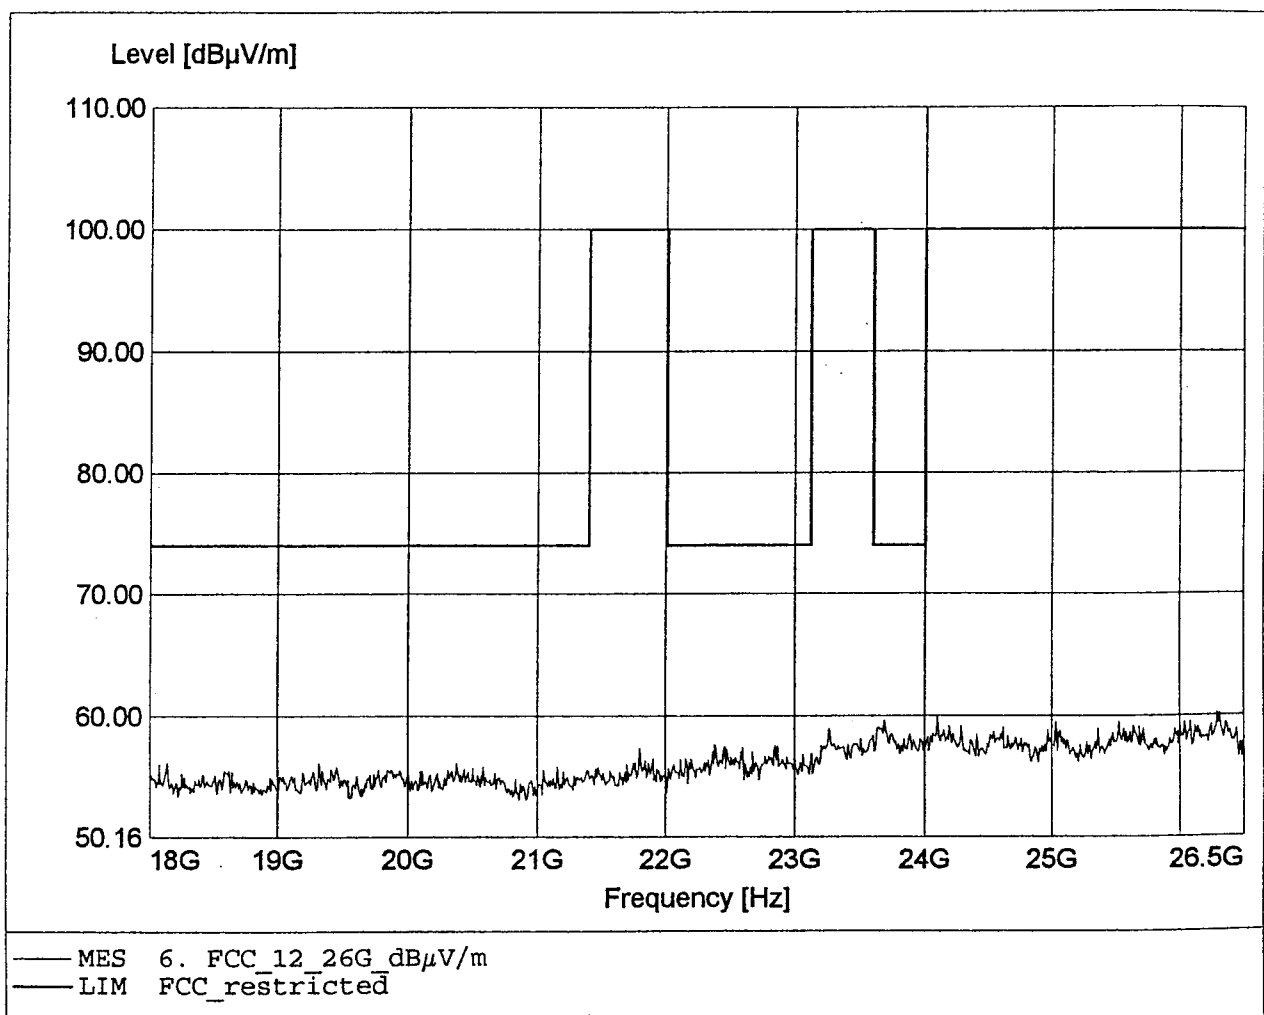

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25546,11MHz Pmax:59,58dBμV/m

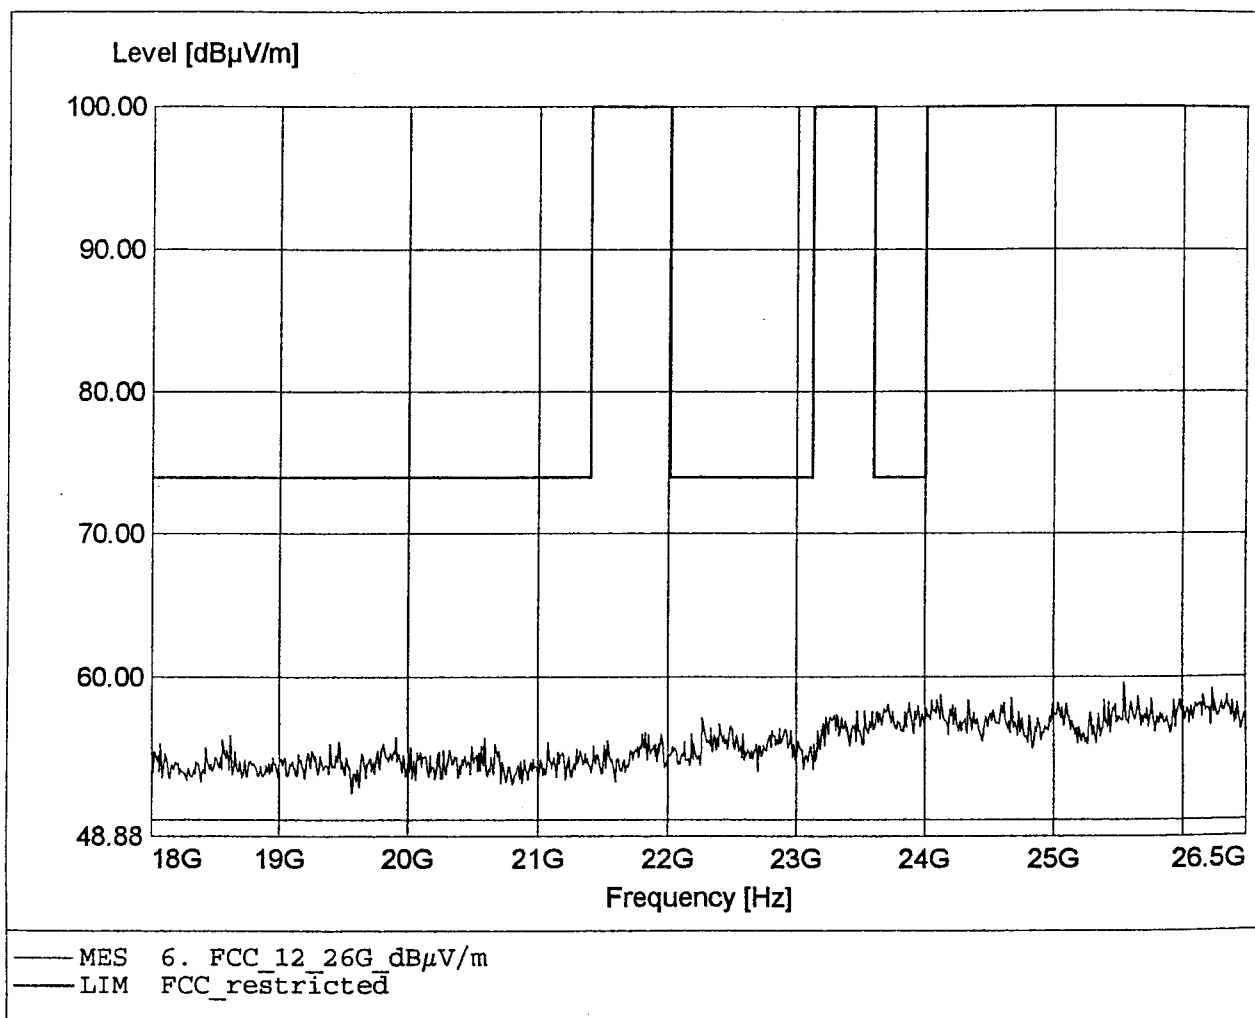

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:25,97MHz Pmax:26,81dBμV/m

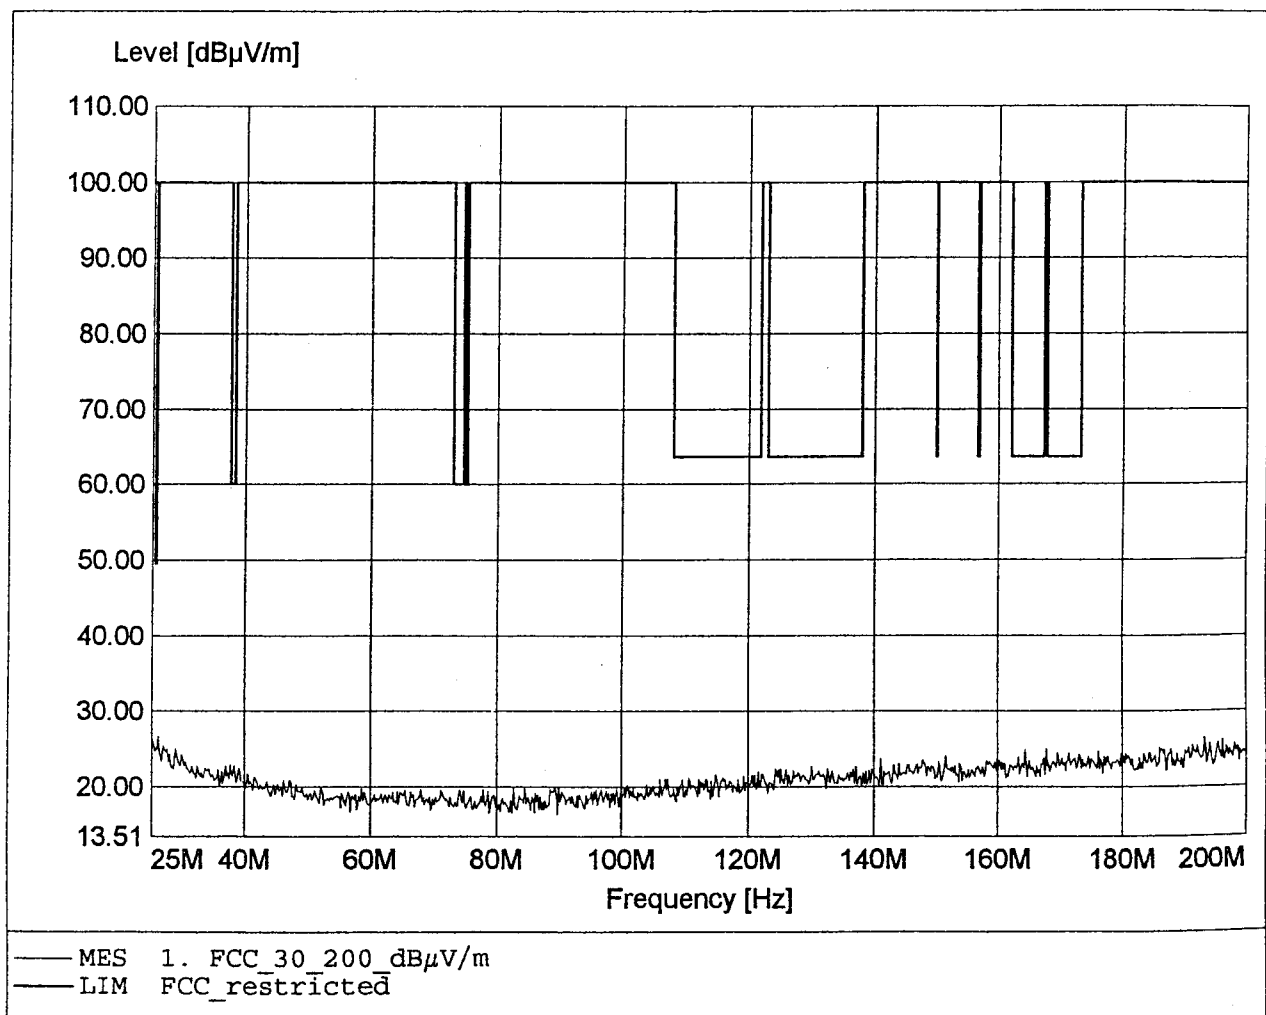

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:189,02MHz Pmax:27,2dBμV/m

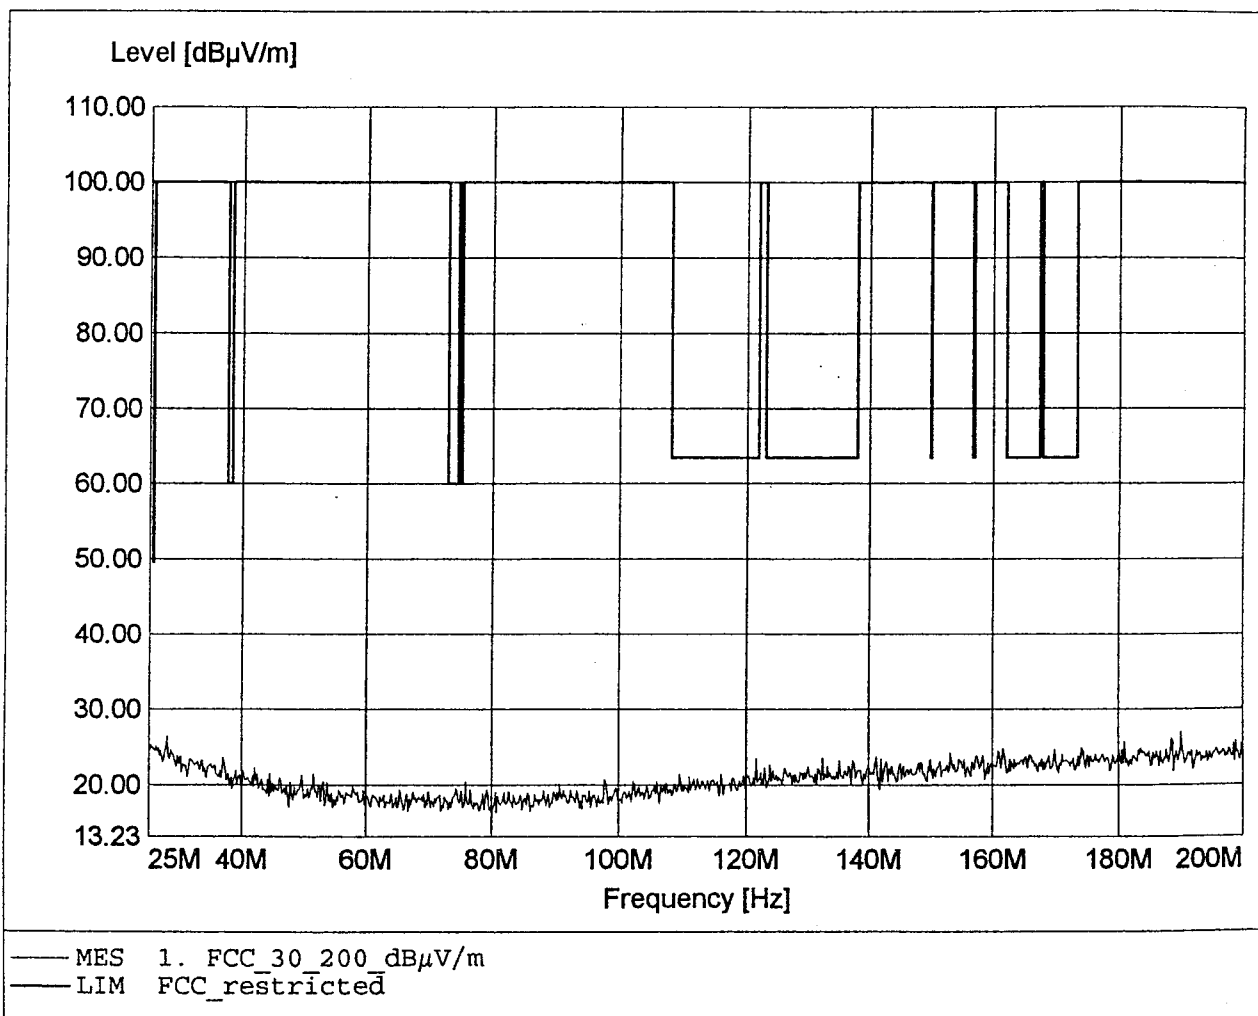

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:993,77MHz Pmax:36,18dBμV/m

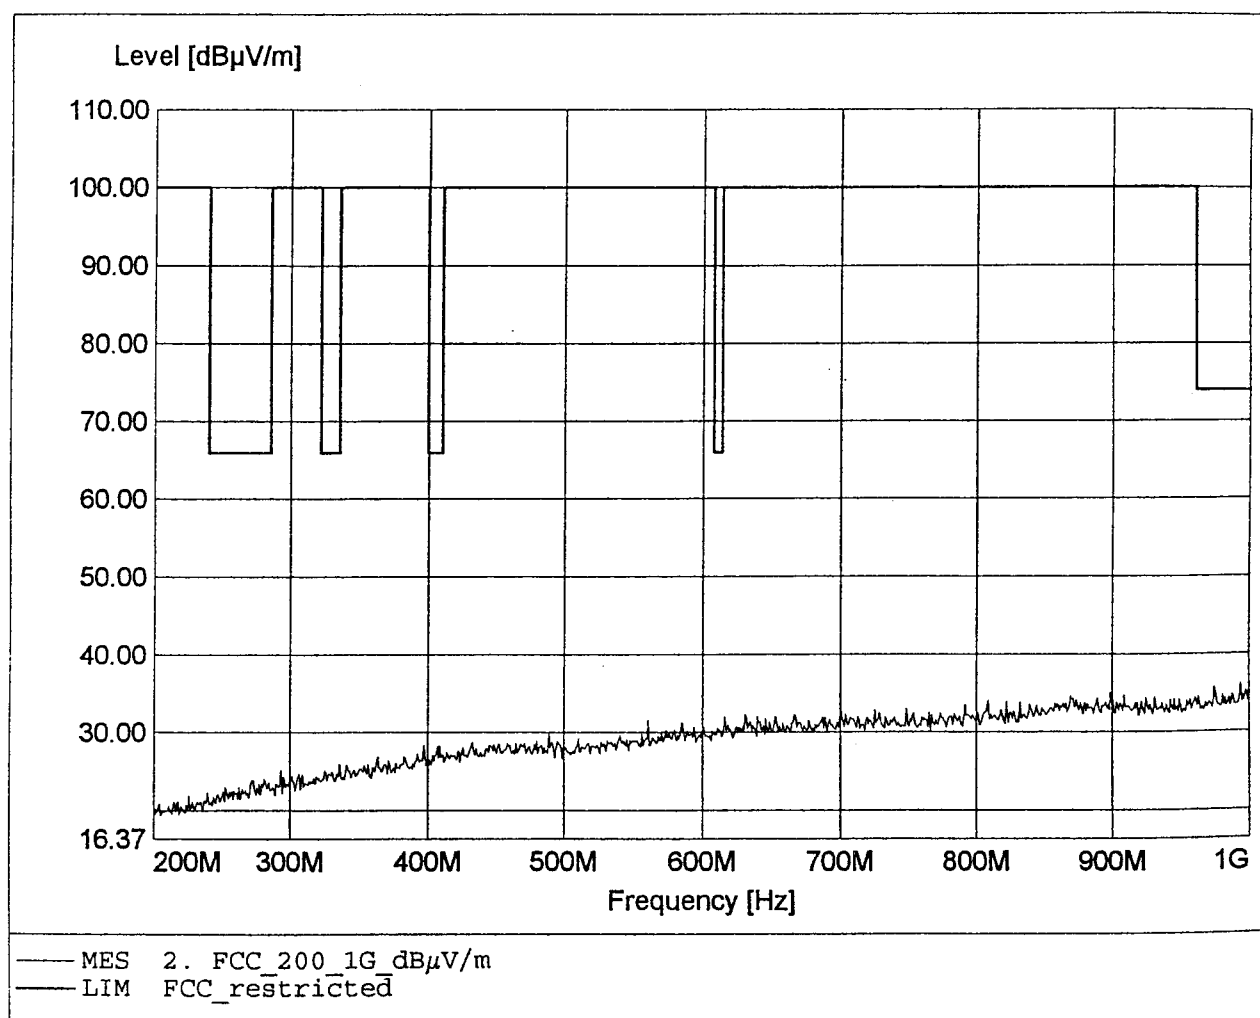

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:982,22MHz Pmax:35,58dBμV/m

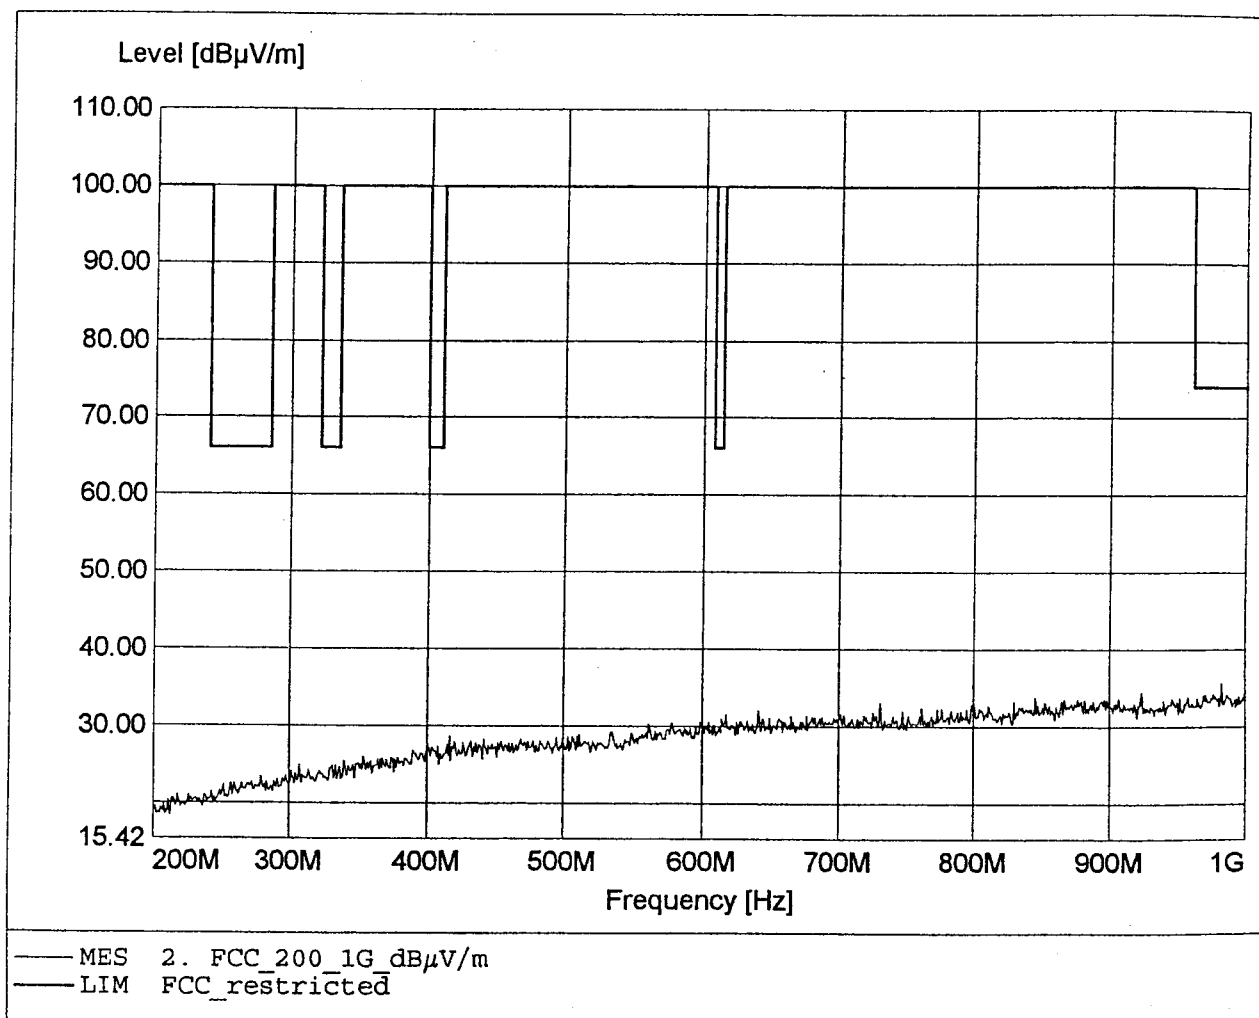

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2406,66MHz Pmax:122,18dBμV/m

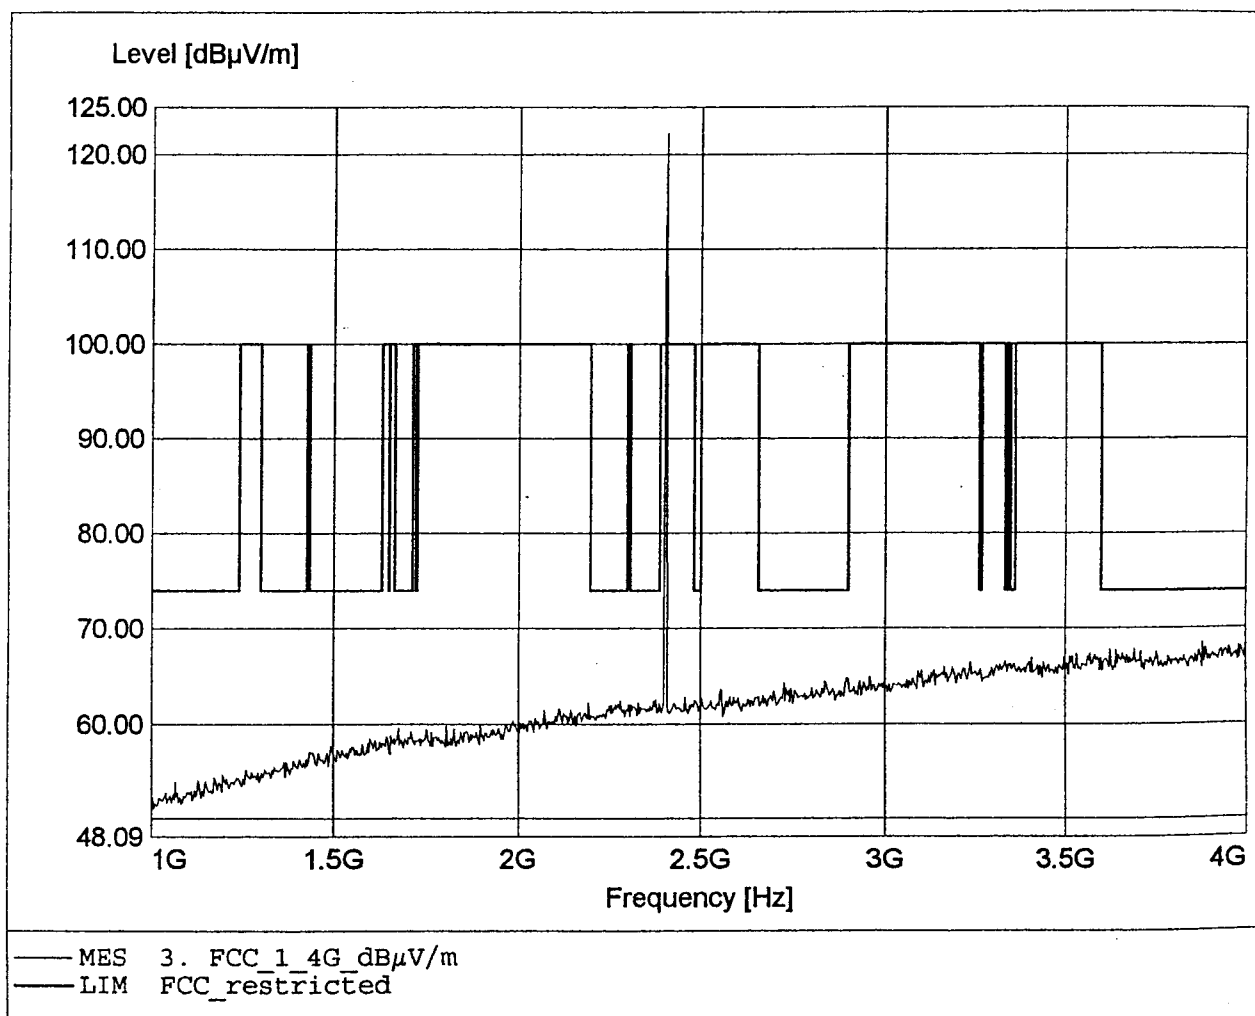

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2403,33MHz Pmax:114,81dBμV/m

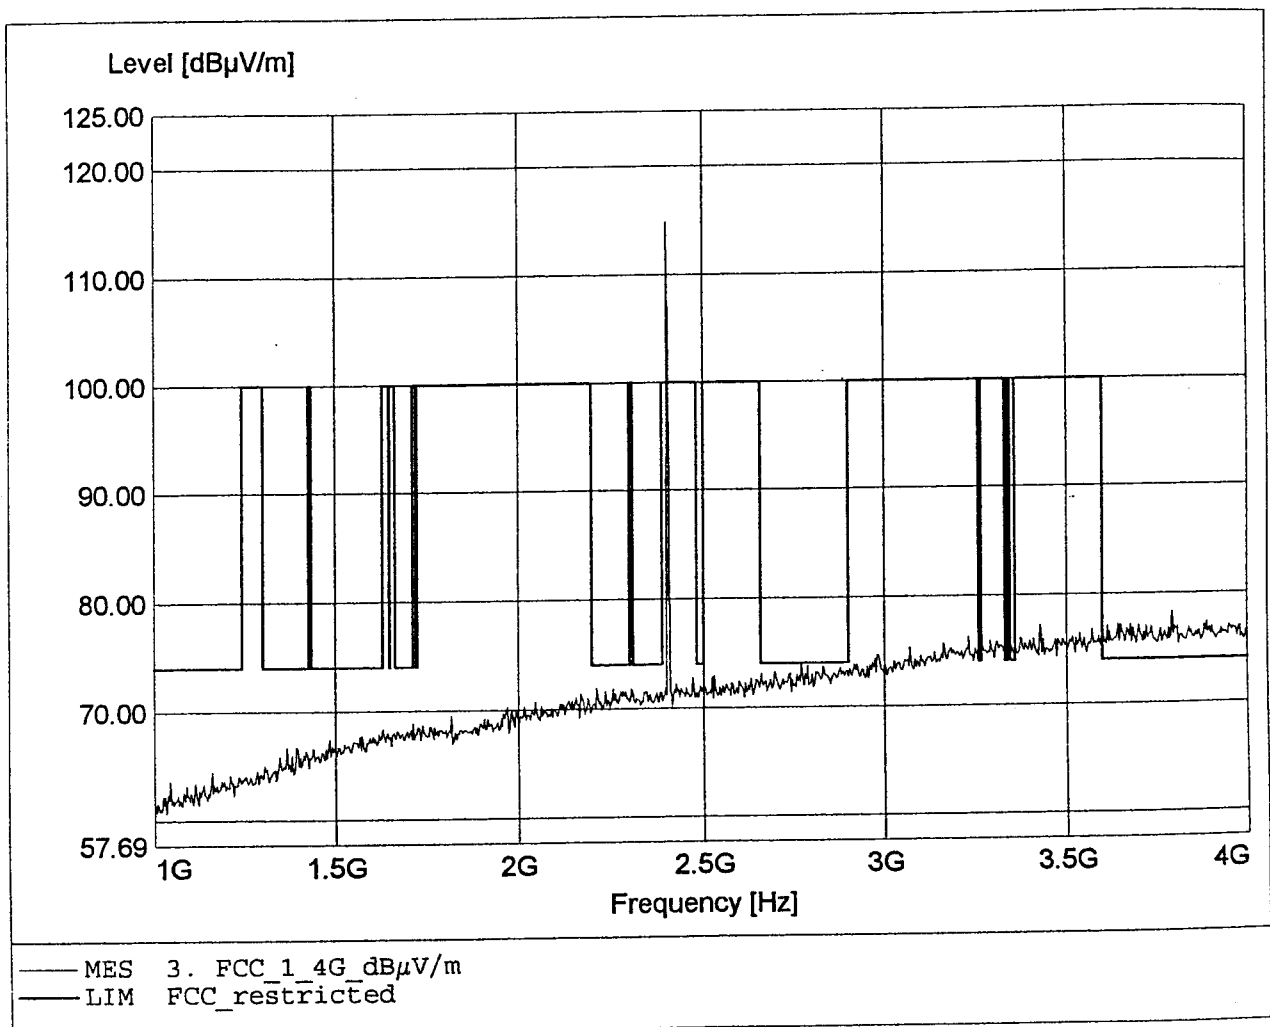

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7146,66MHz Pmax:64,66dBμV/m

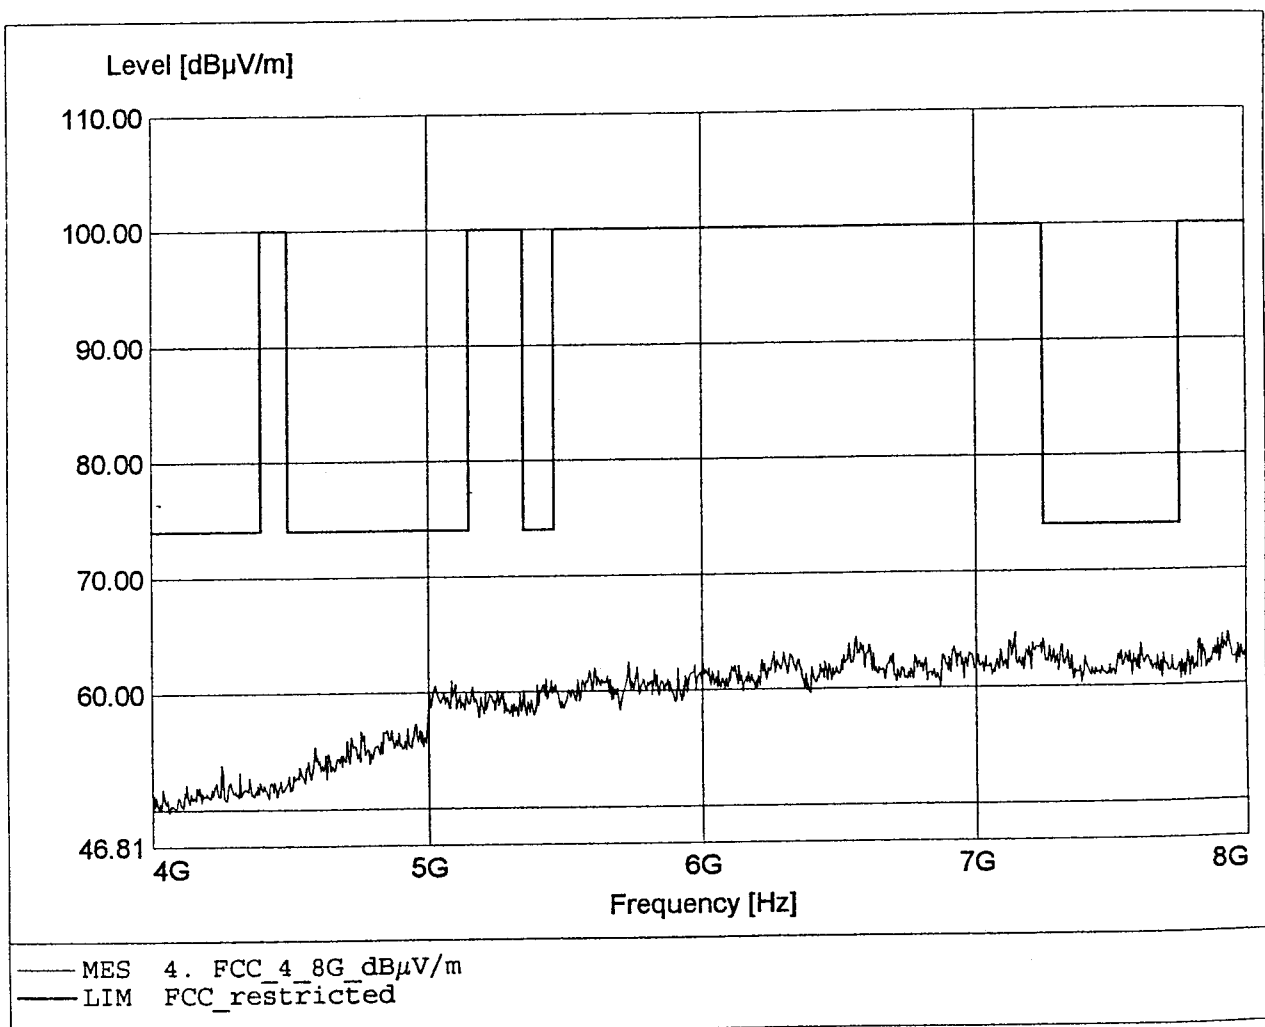

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7897,77MHz Pmax:64,68dBμV/m

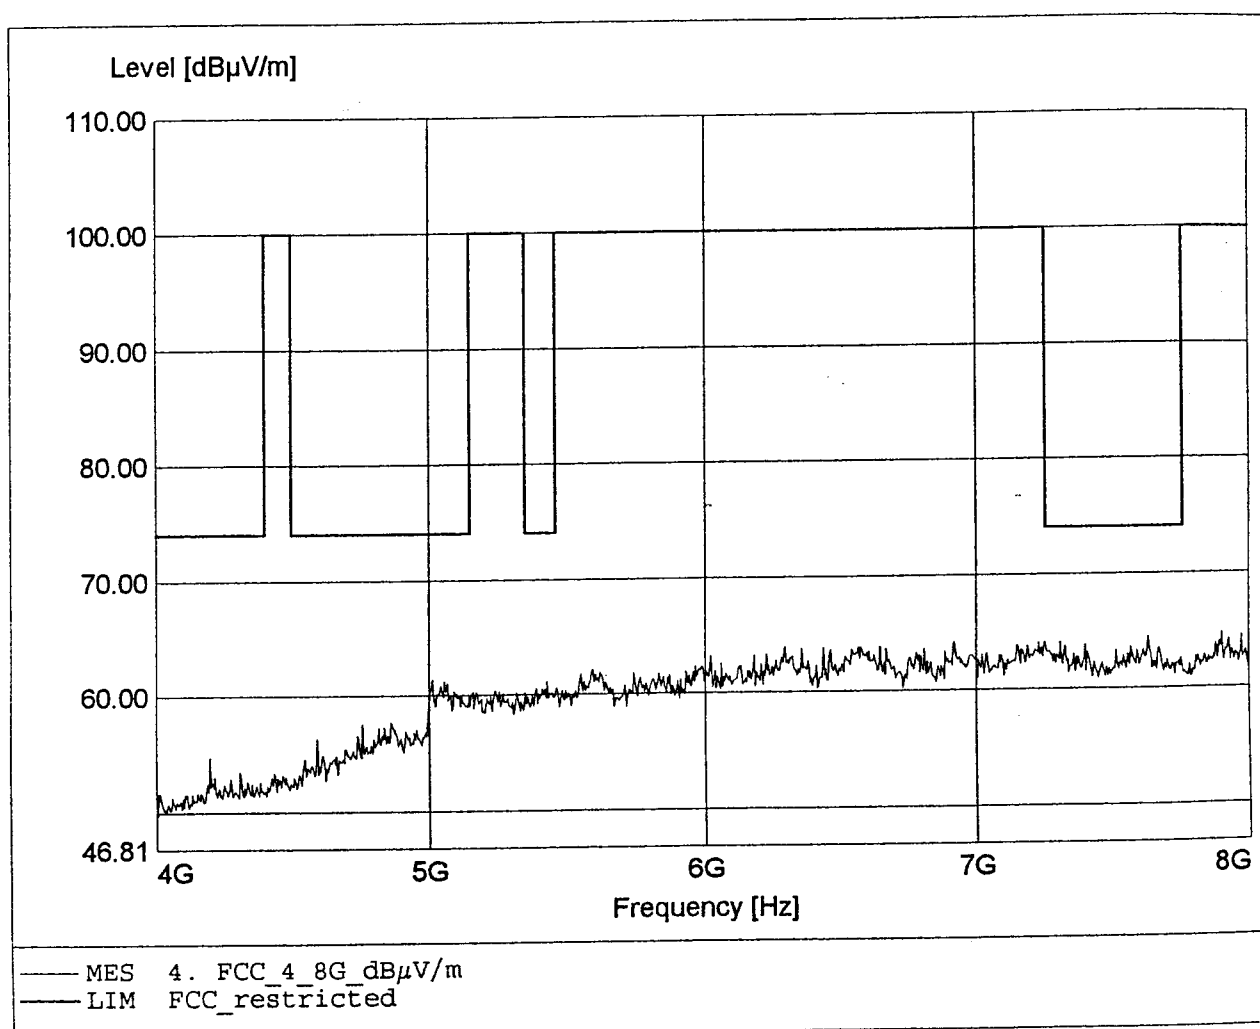

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:15555,55MHz Pmax:42,87dBμV/m

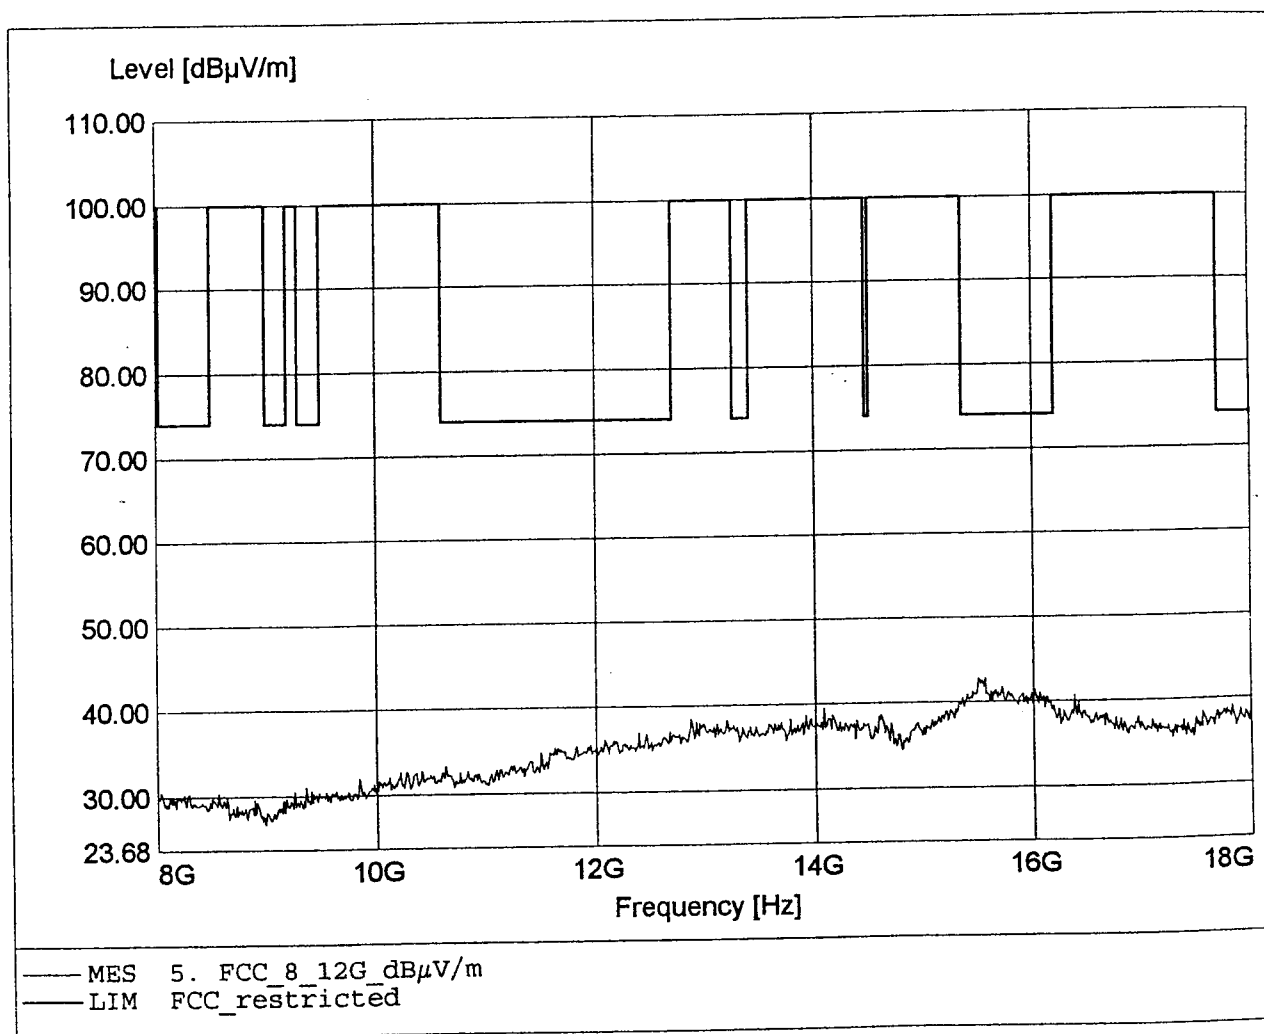

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:15544,44MHz Pmax:43,42dBμV/m

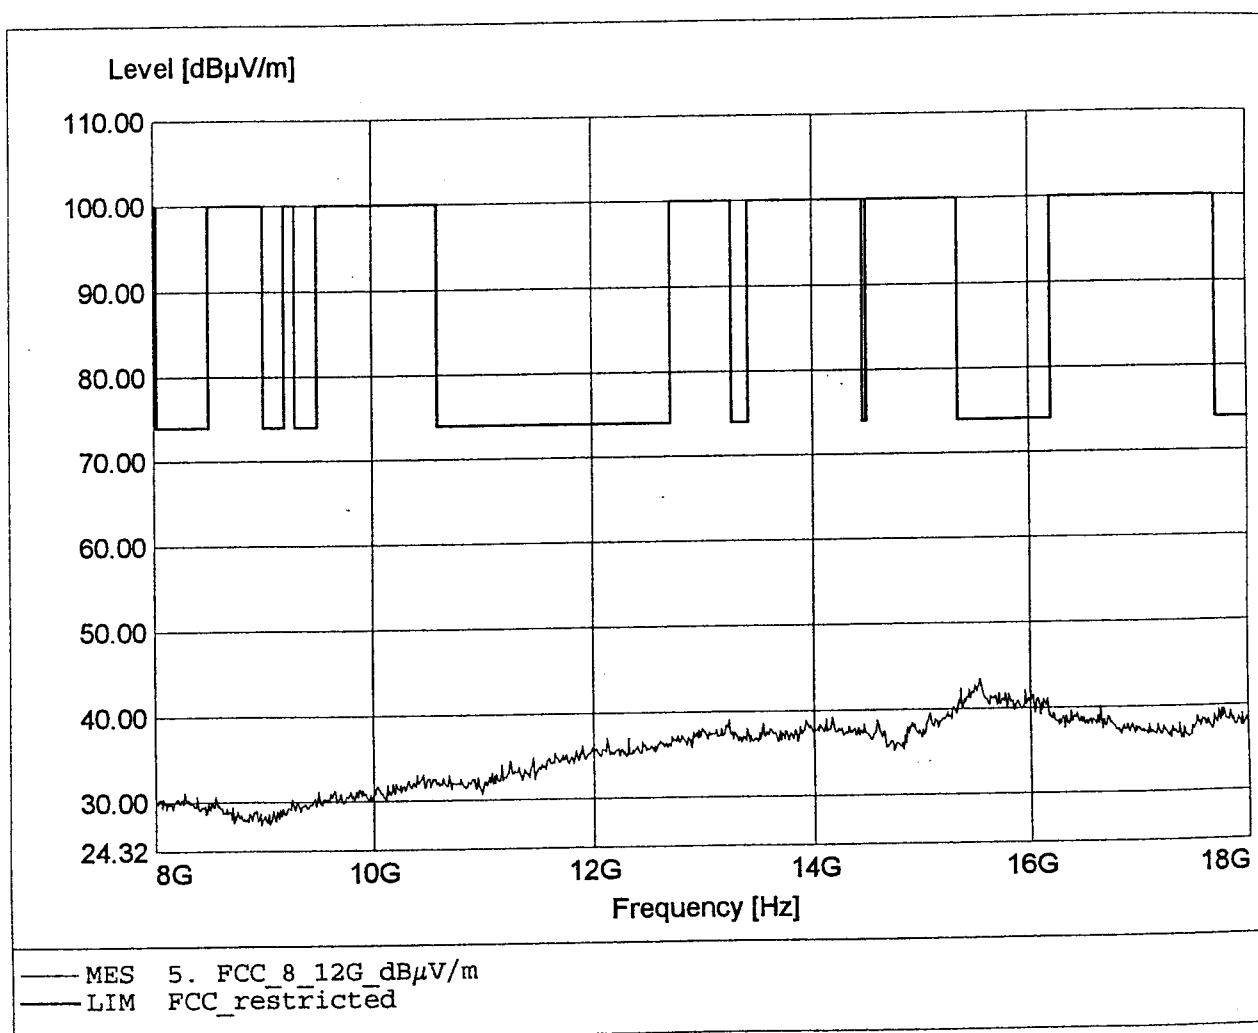

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26499,99MHz Pmax:51,69dBμV/m

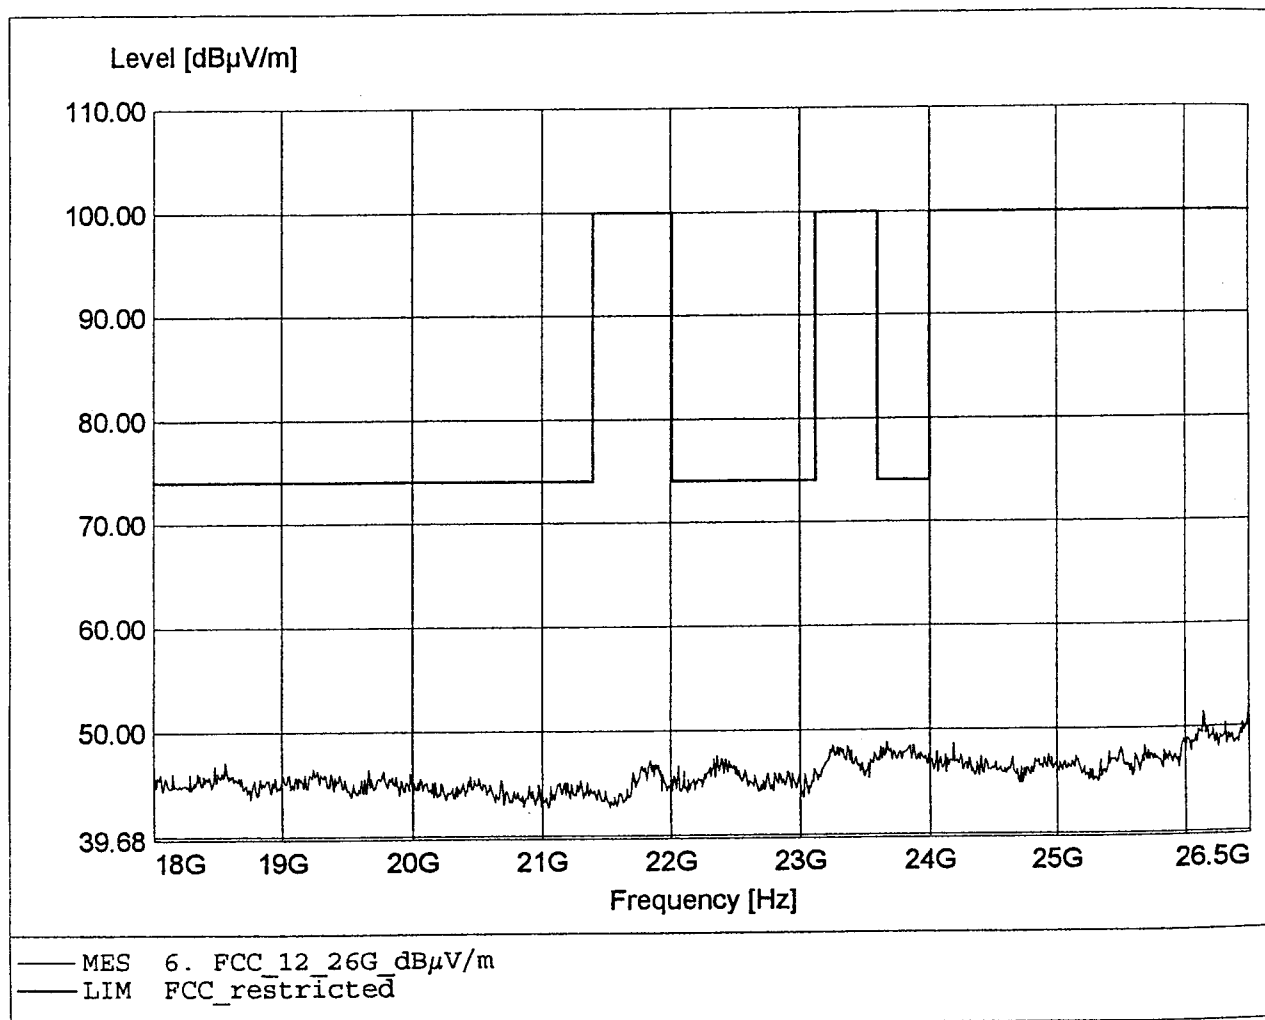

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26499,99MHz Pmax:50,70dBμV/m

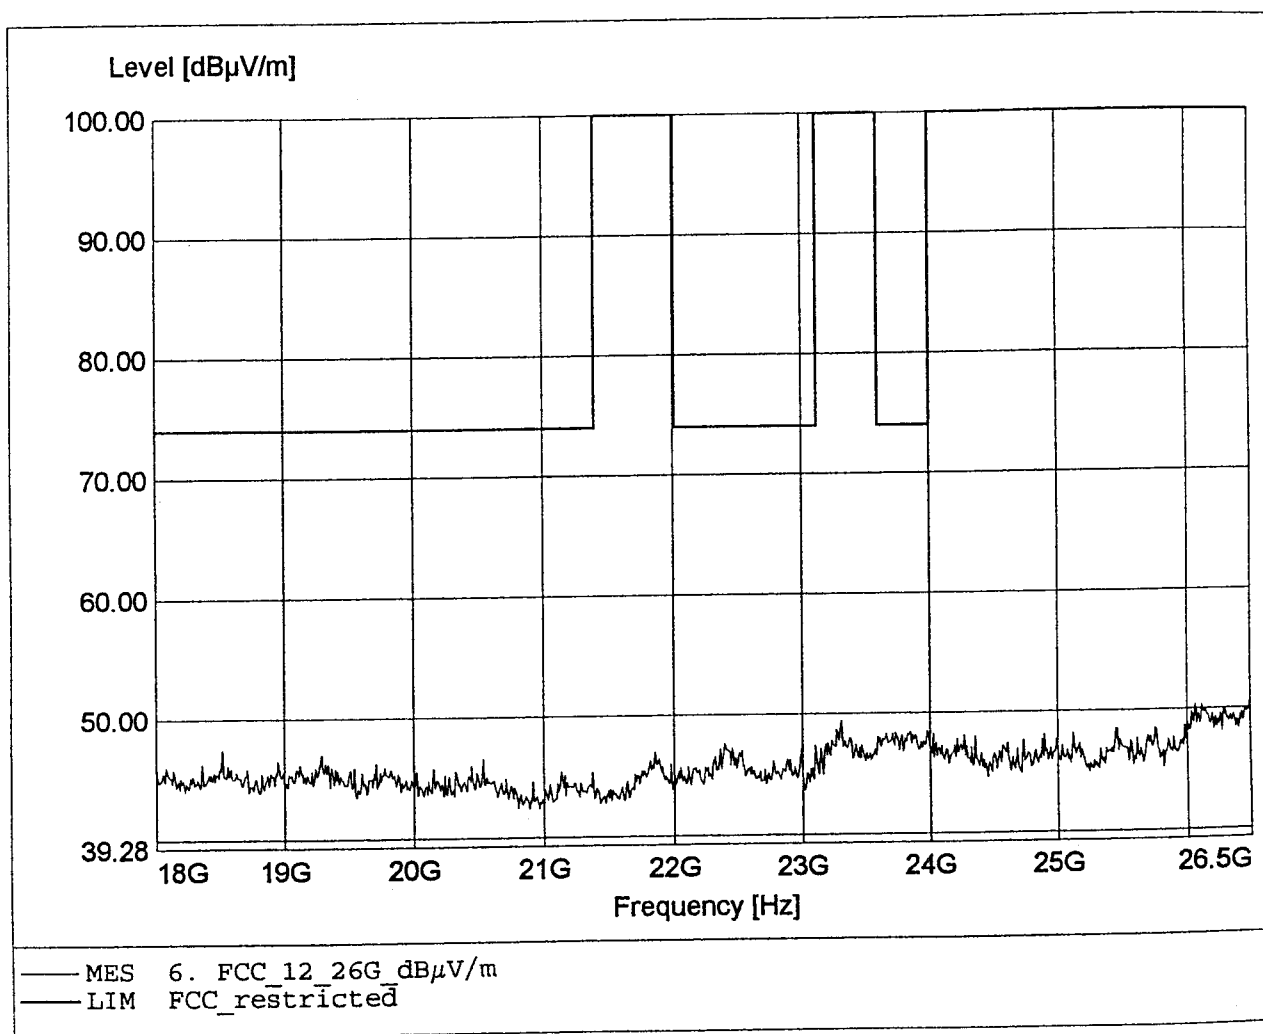

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:26,74MHz Pmax:26,45dBμV/m

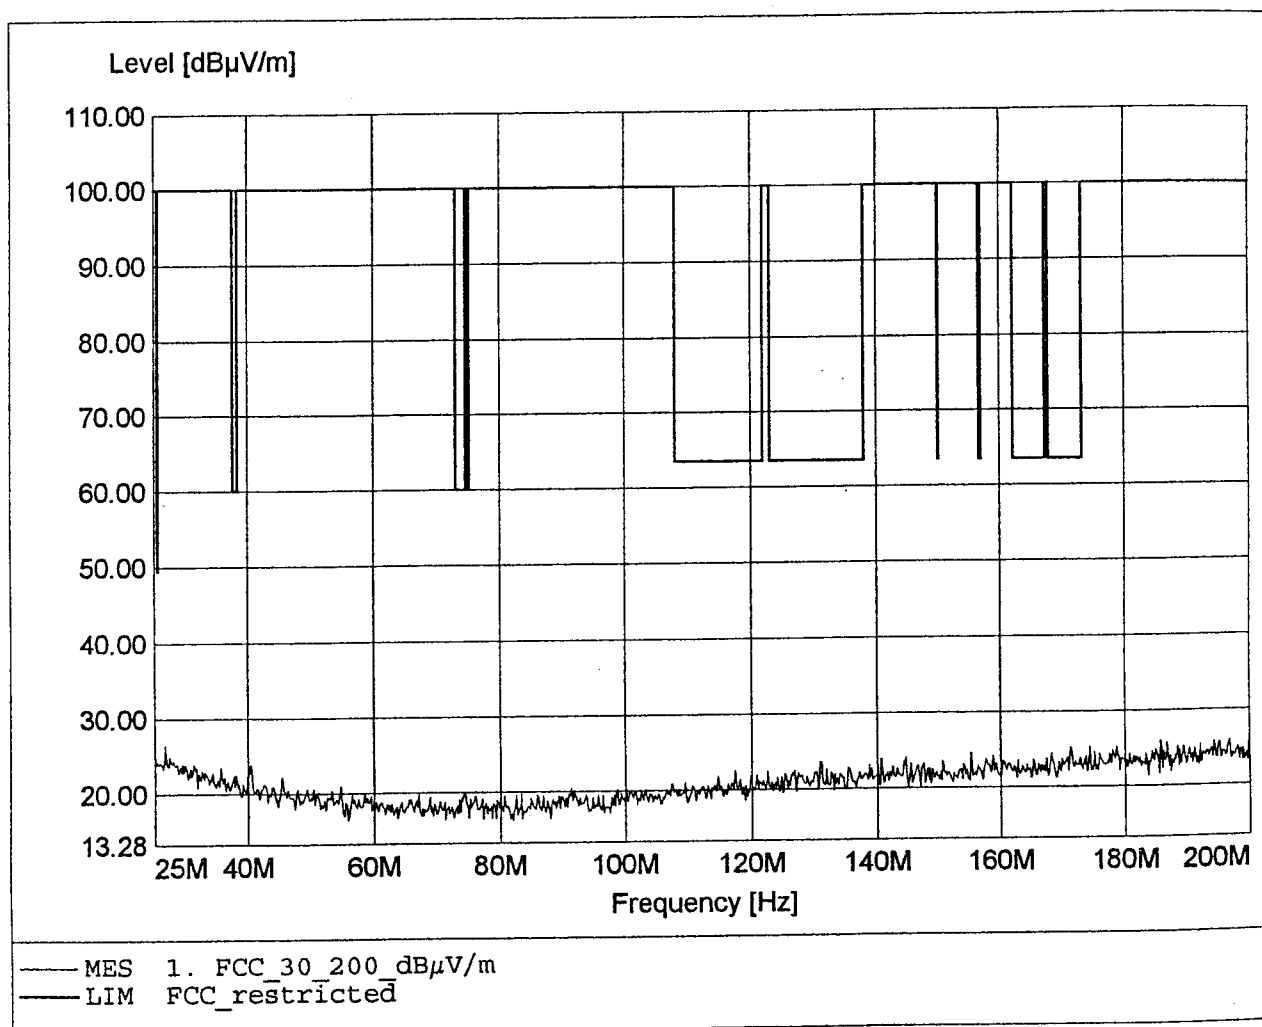

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:25,19MHz Pmax:27,59dBμV/m

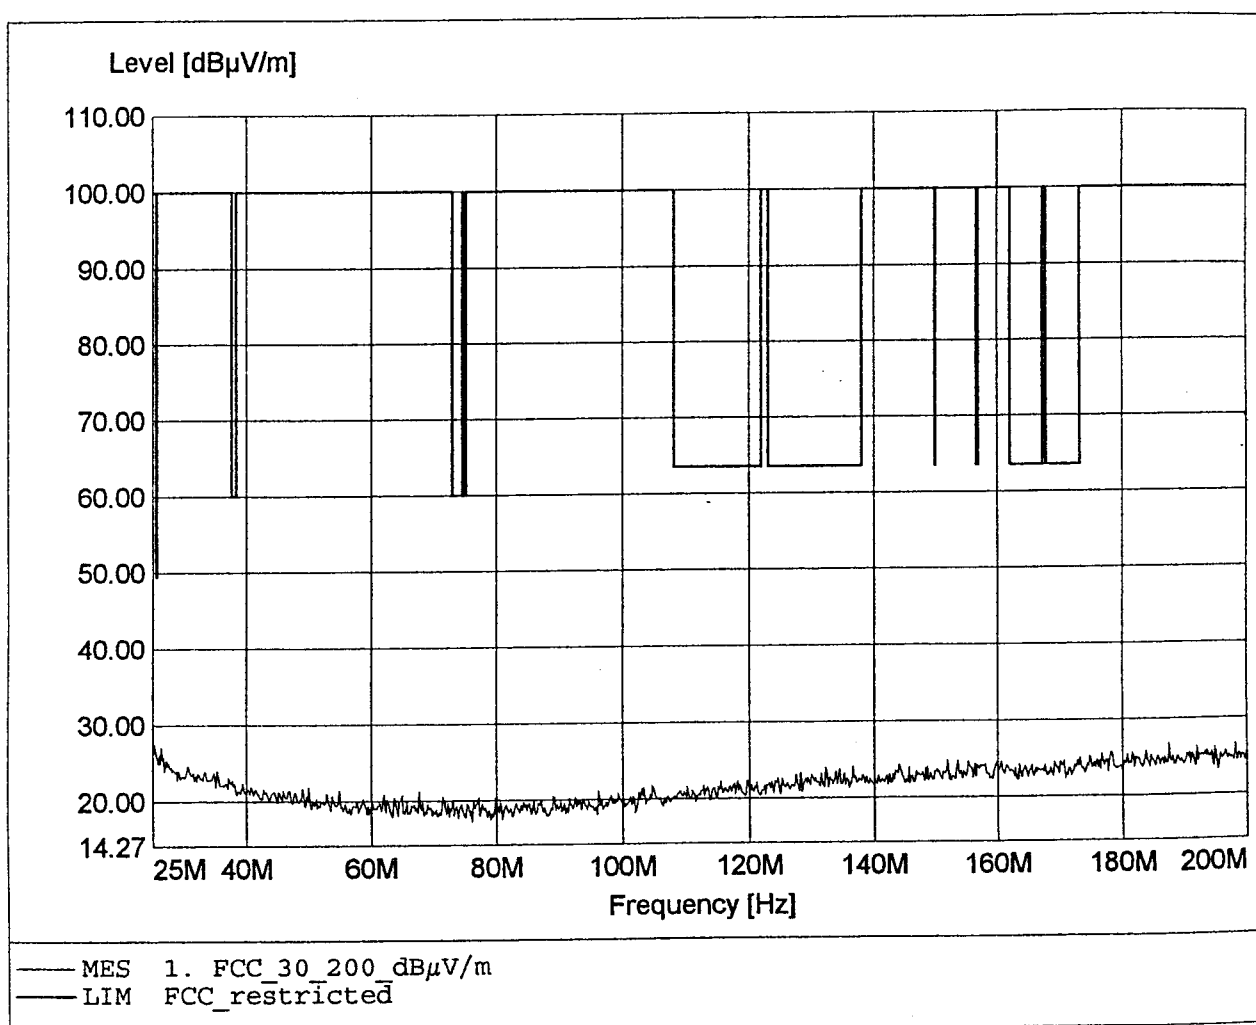

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:891,55MHz Pmax:42,92dBμV/m

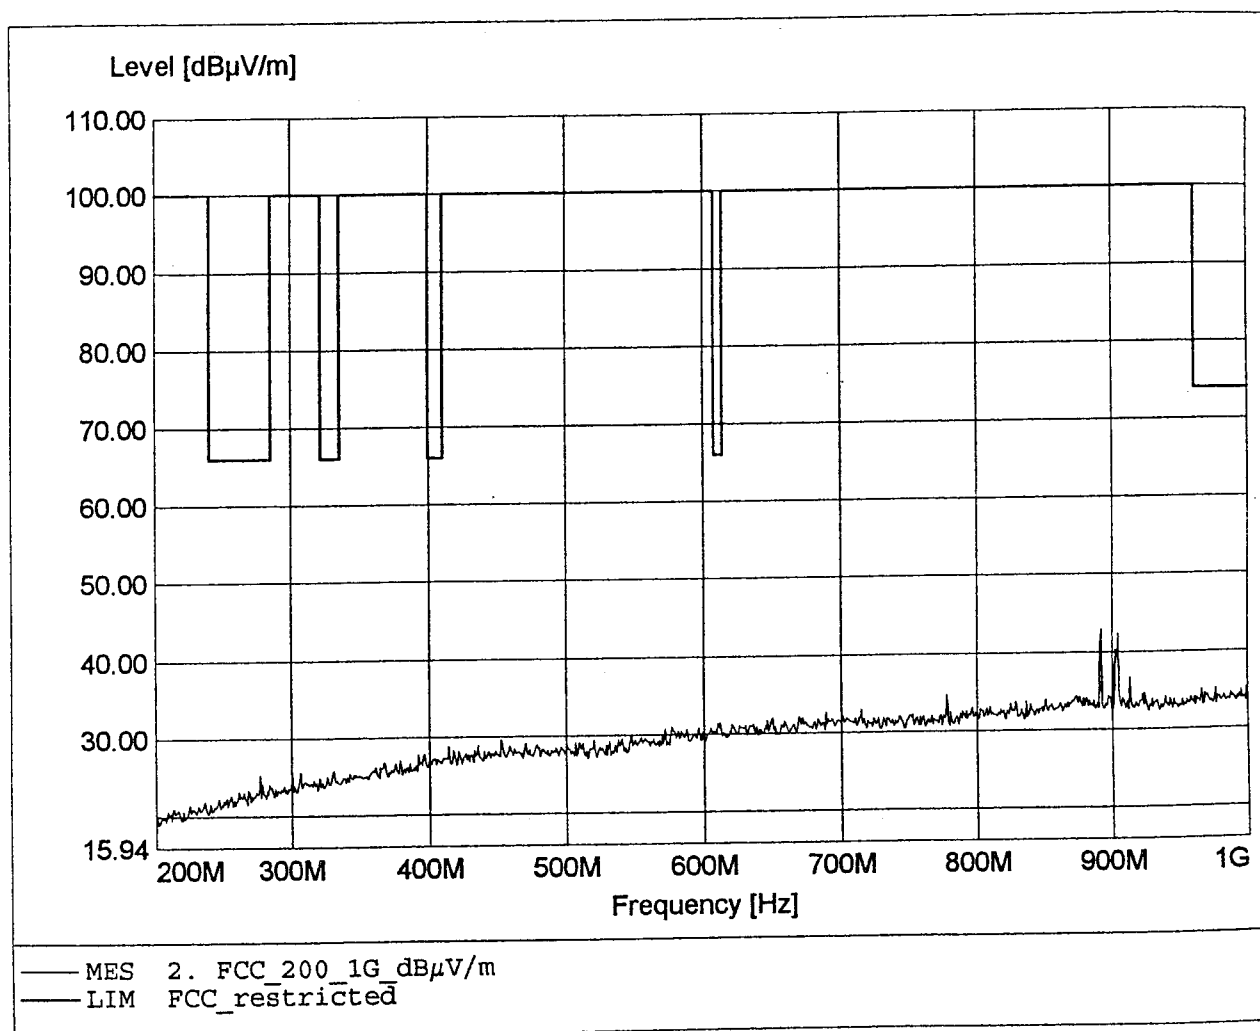

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:953,77MHz Pmax:34,68dBμV/m

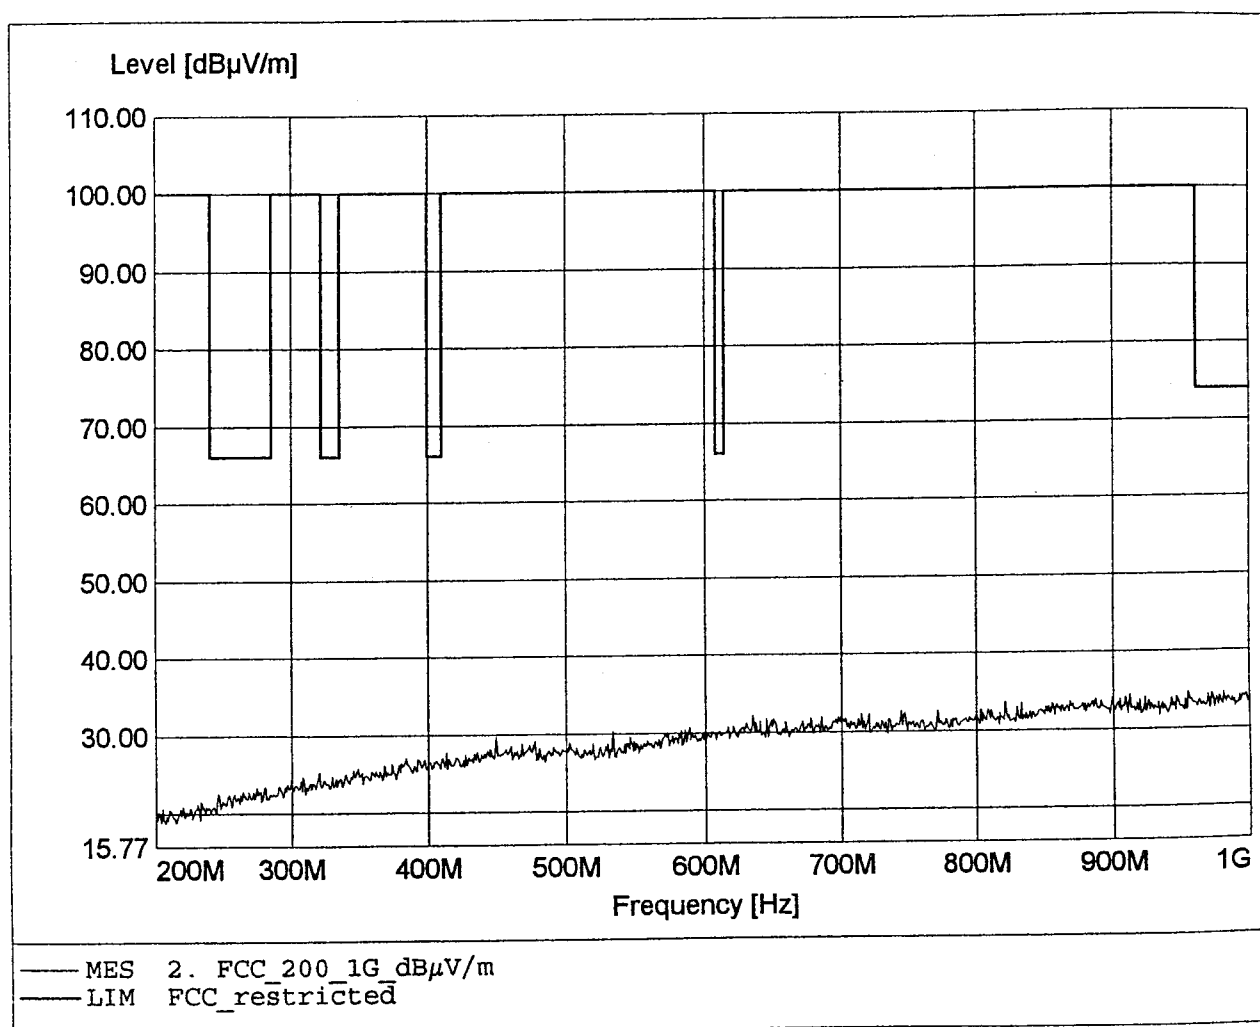

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2446,04MHz Pmax:122,4dBμV/m

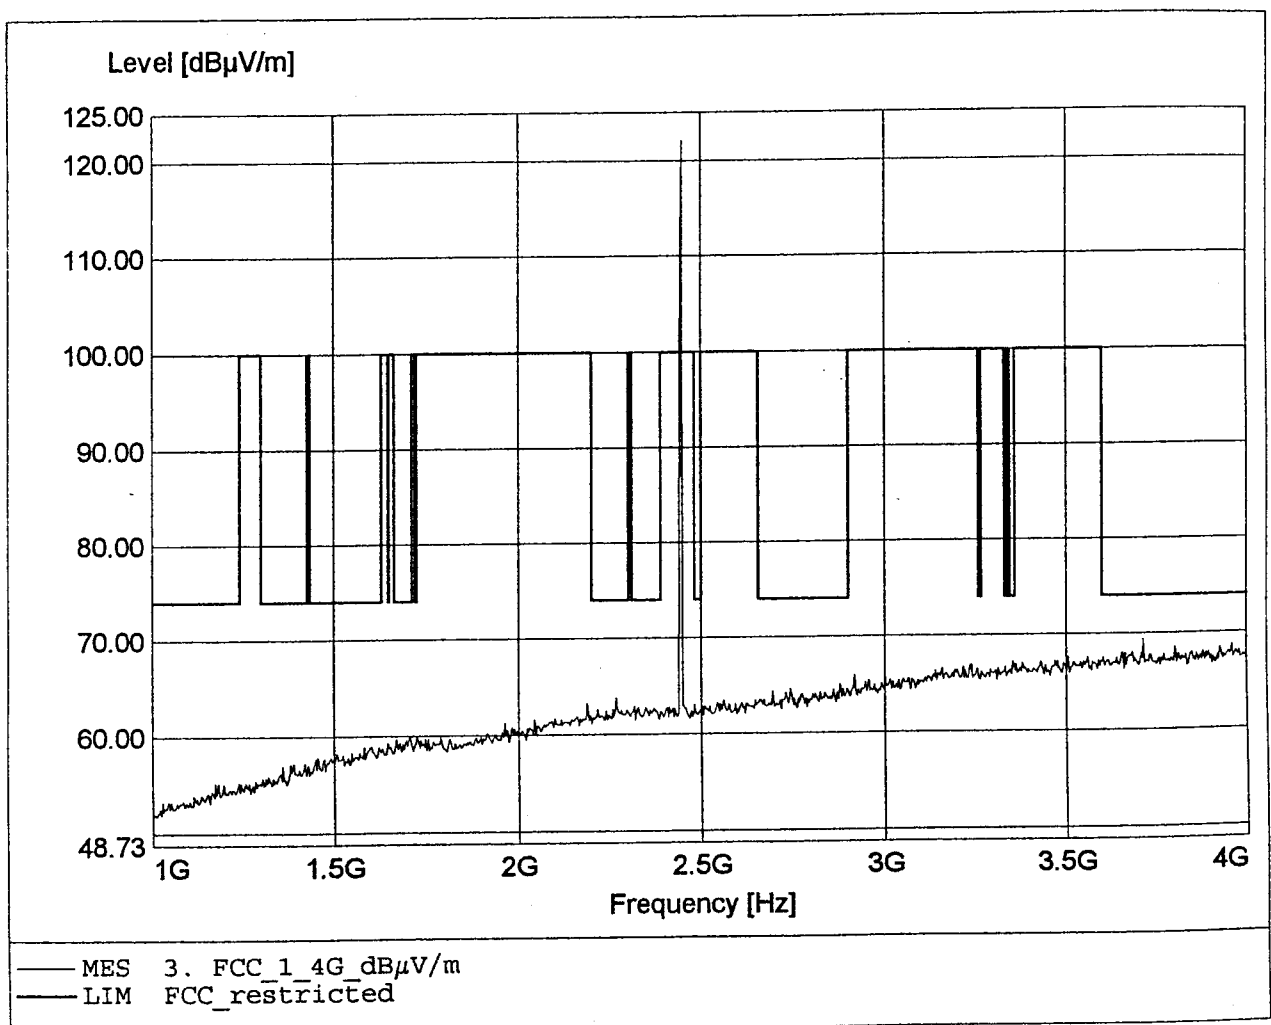

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2446,66MHz Pmax:119,45dBμV/m

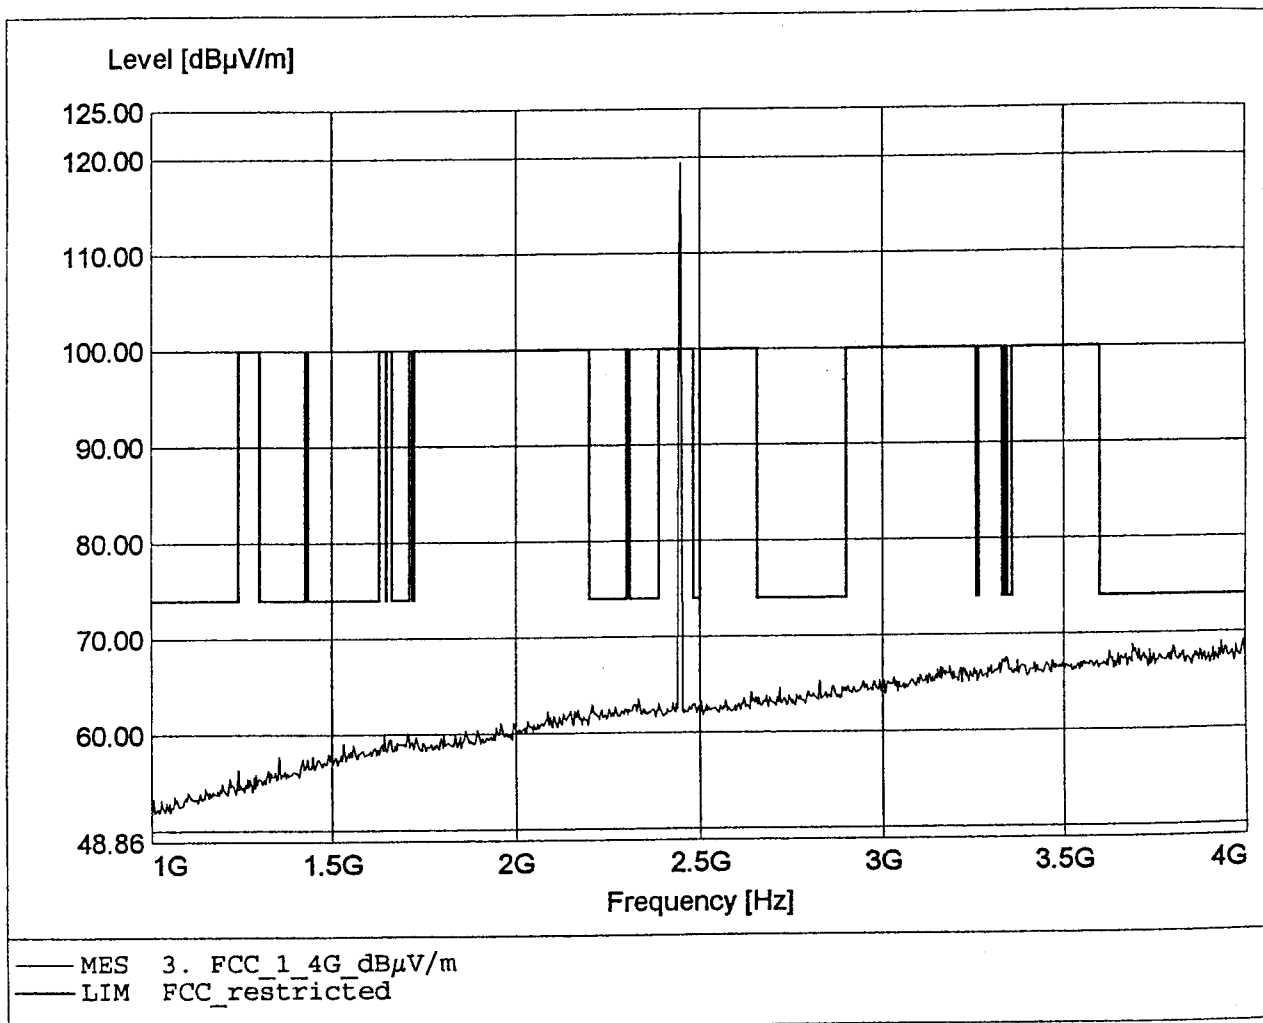

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7942,22MHz Pmax:63,66dBμV/m

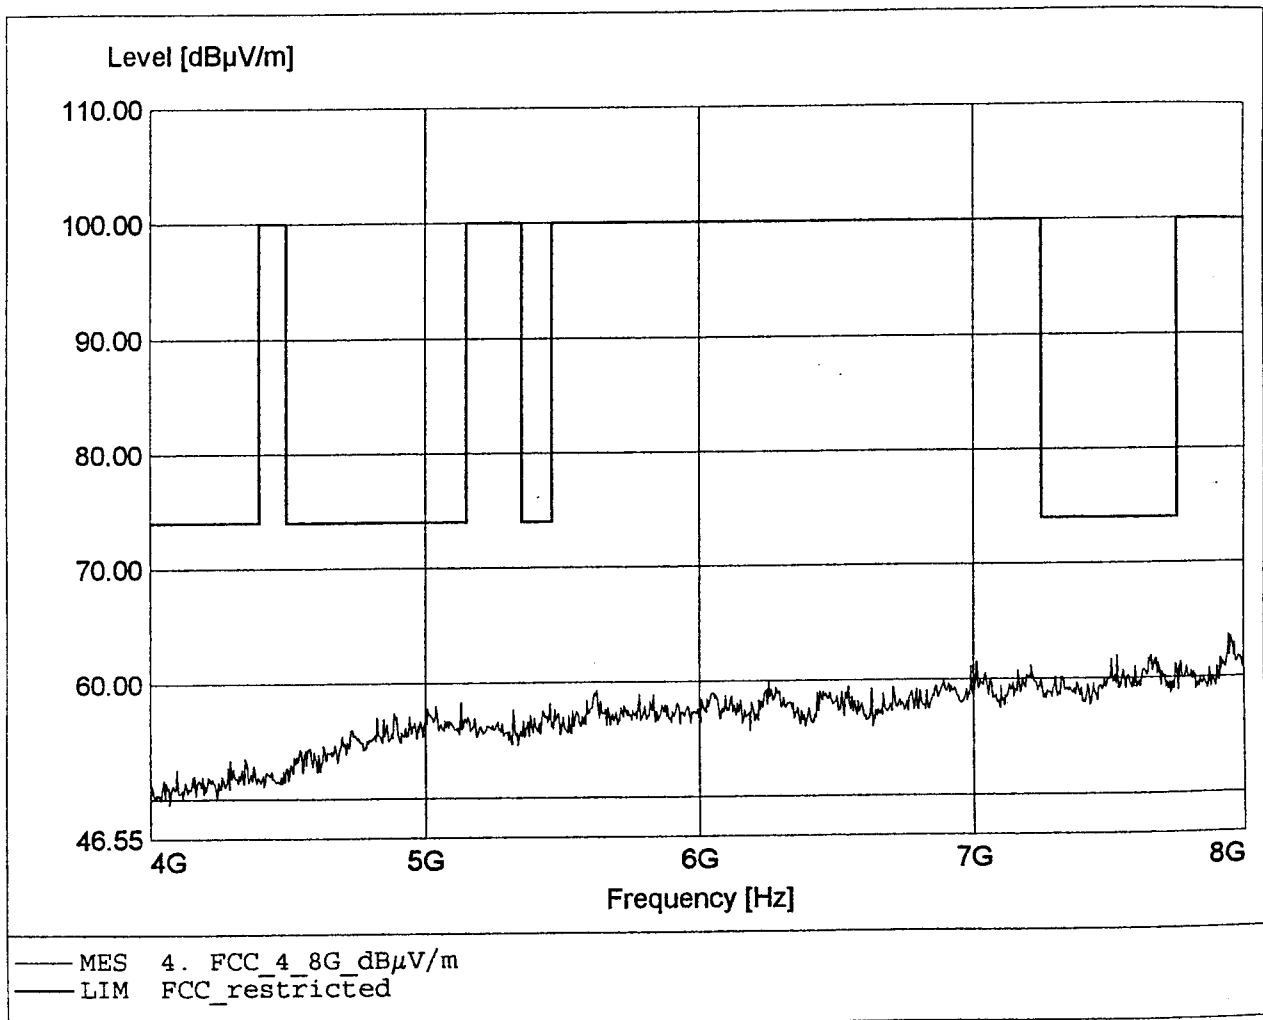

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7662,22MHz Pmax:62,86dBμV/m

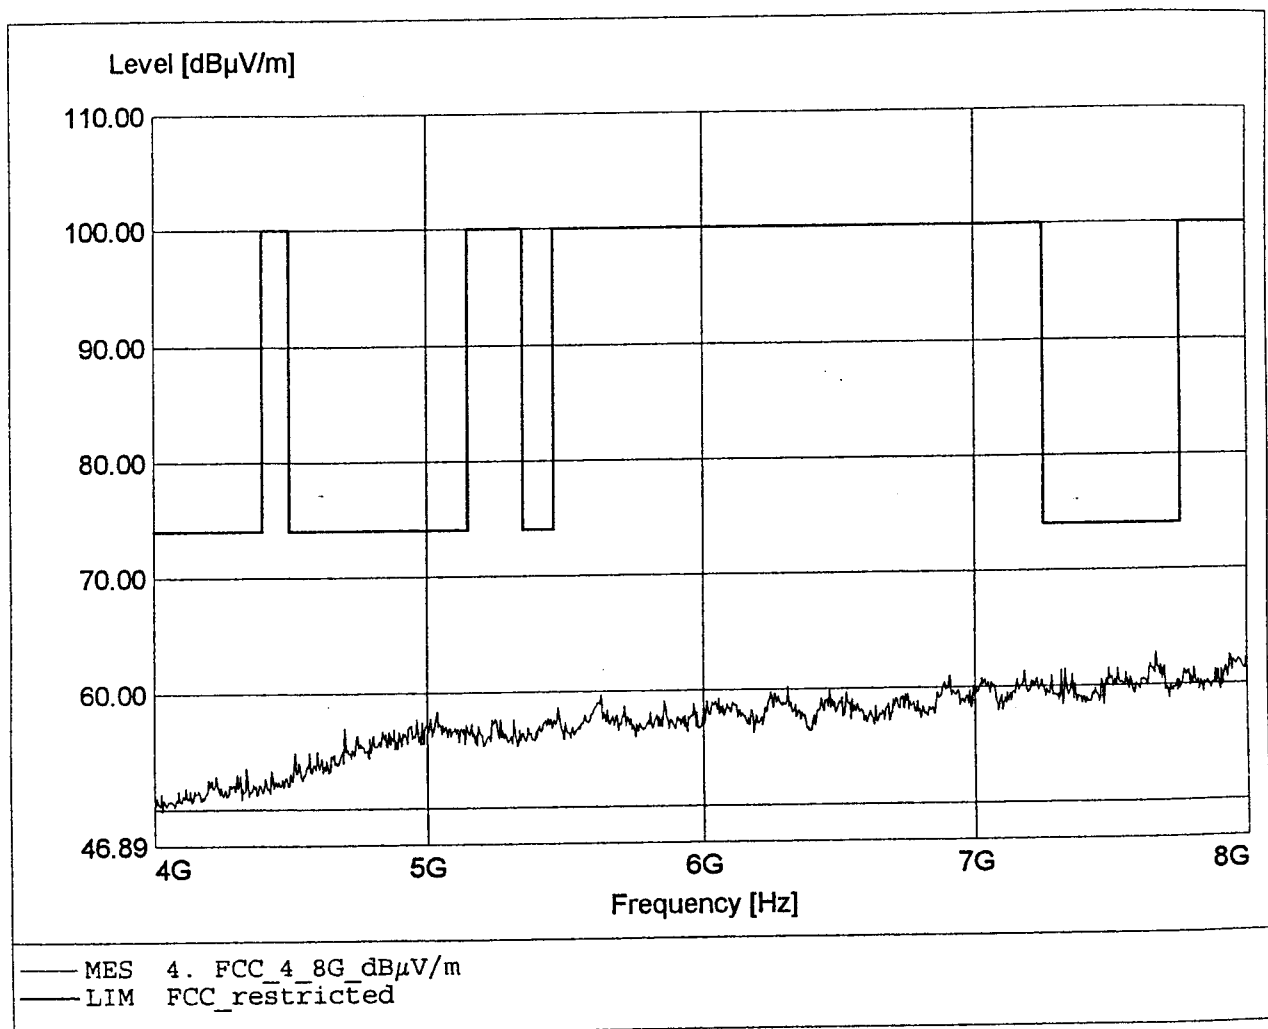

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:15499,99MHz Pmax:42,99dBμV/m

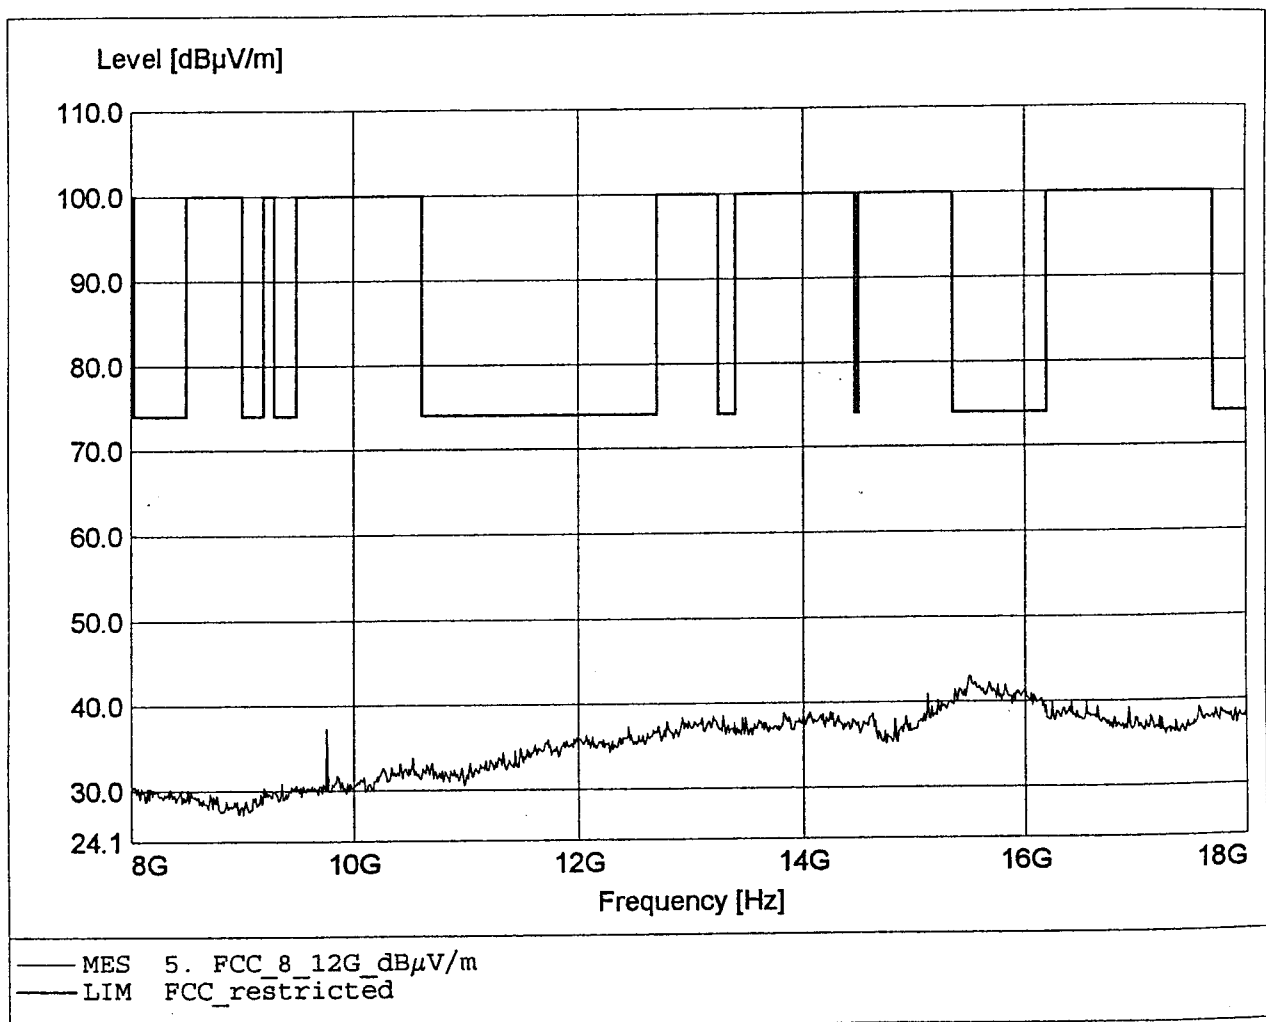

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:15555,55MHz Pmax:43,98dBμV/m

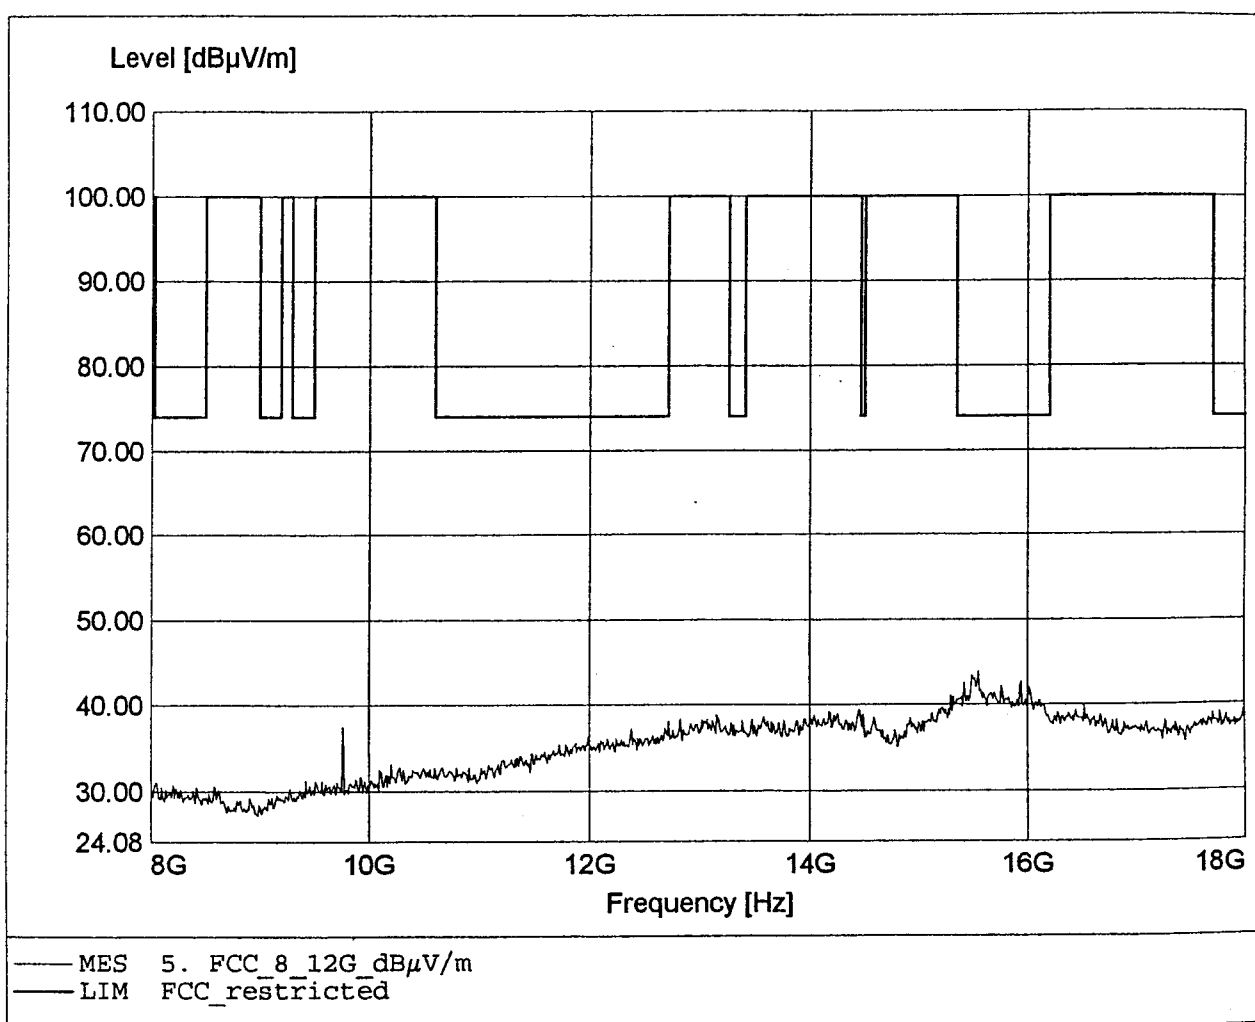

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26141,11MHz Pmax:50,98dBμV/m

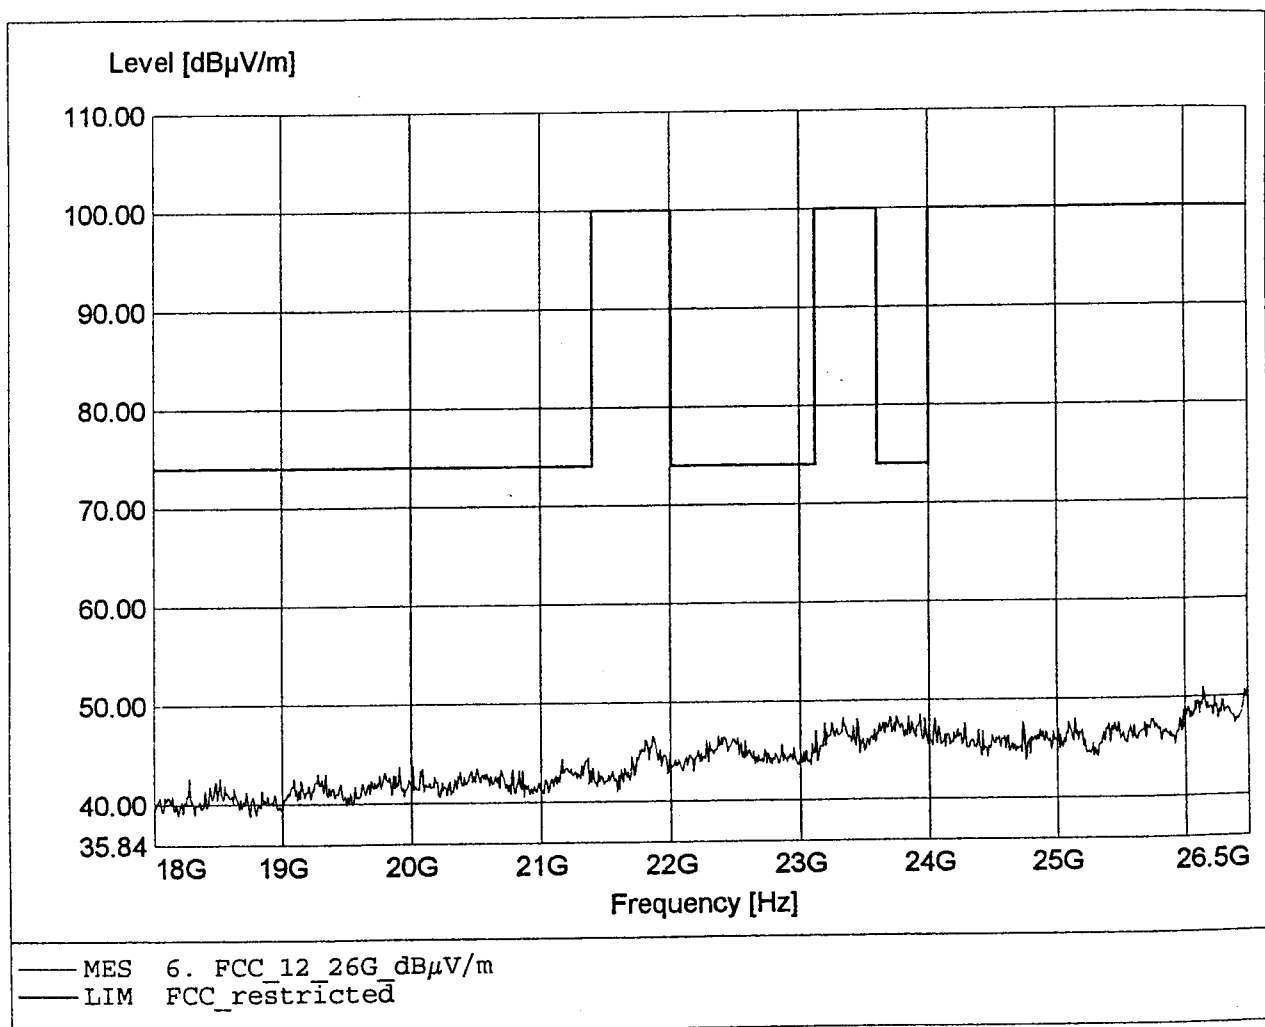

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26481,11MHz Pmax:50,78dBμV/m

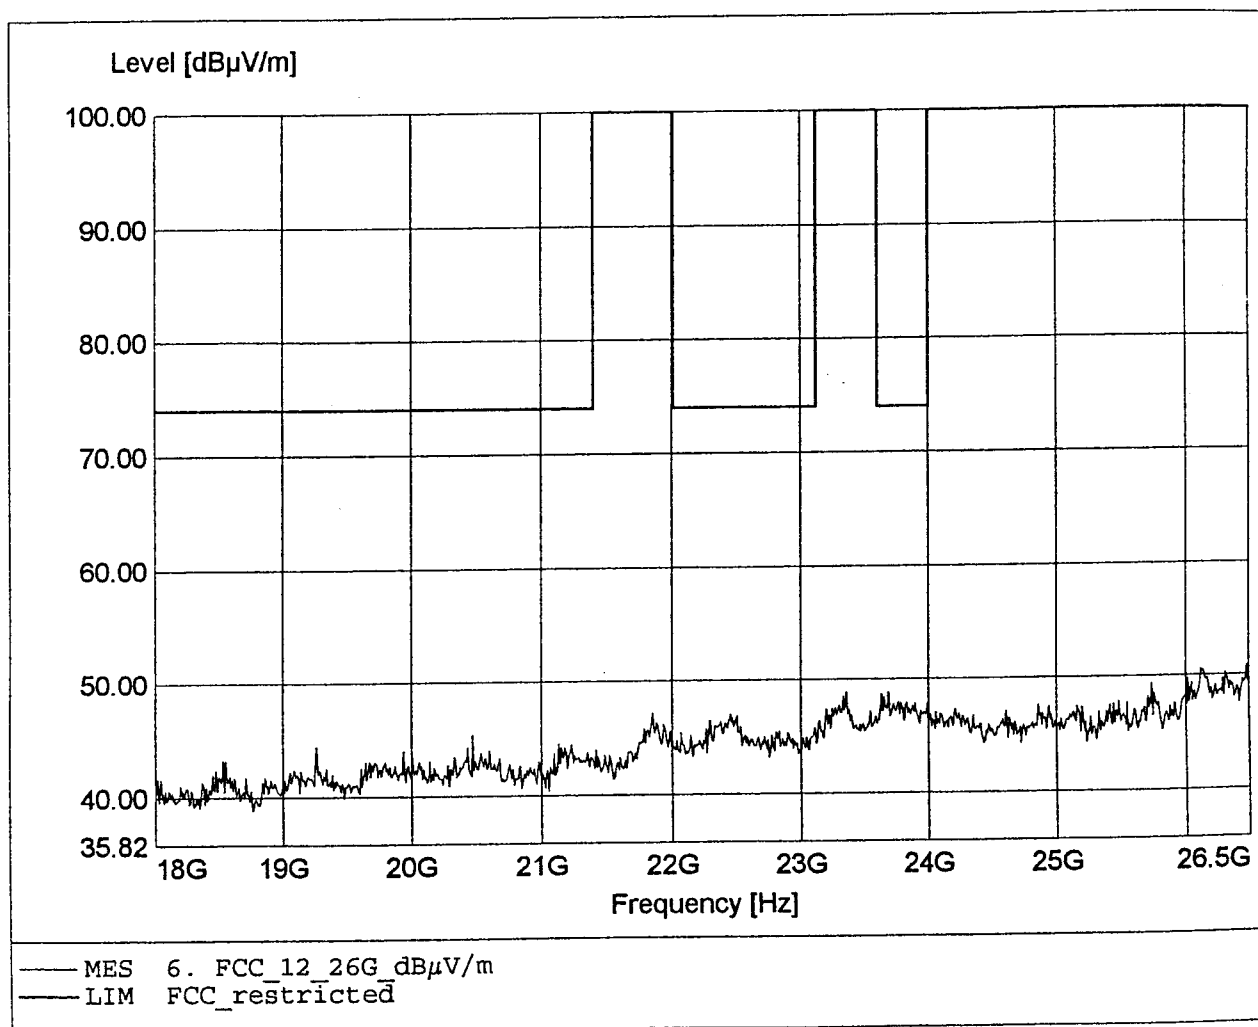

Spurious emissions (Field Strength Tx)
FCC RULES, PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:182,11MHz Pmax:26,71dBμV/m

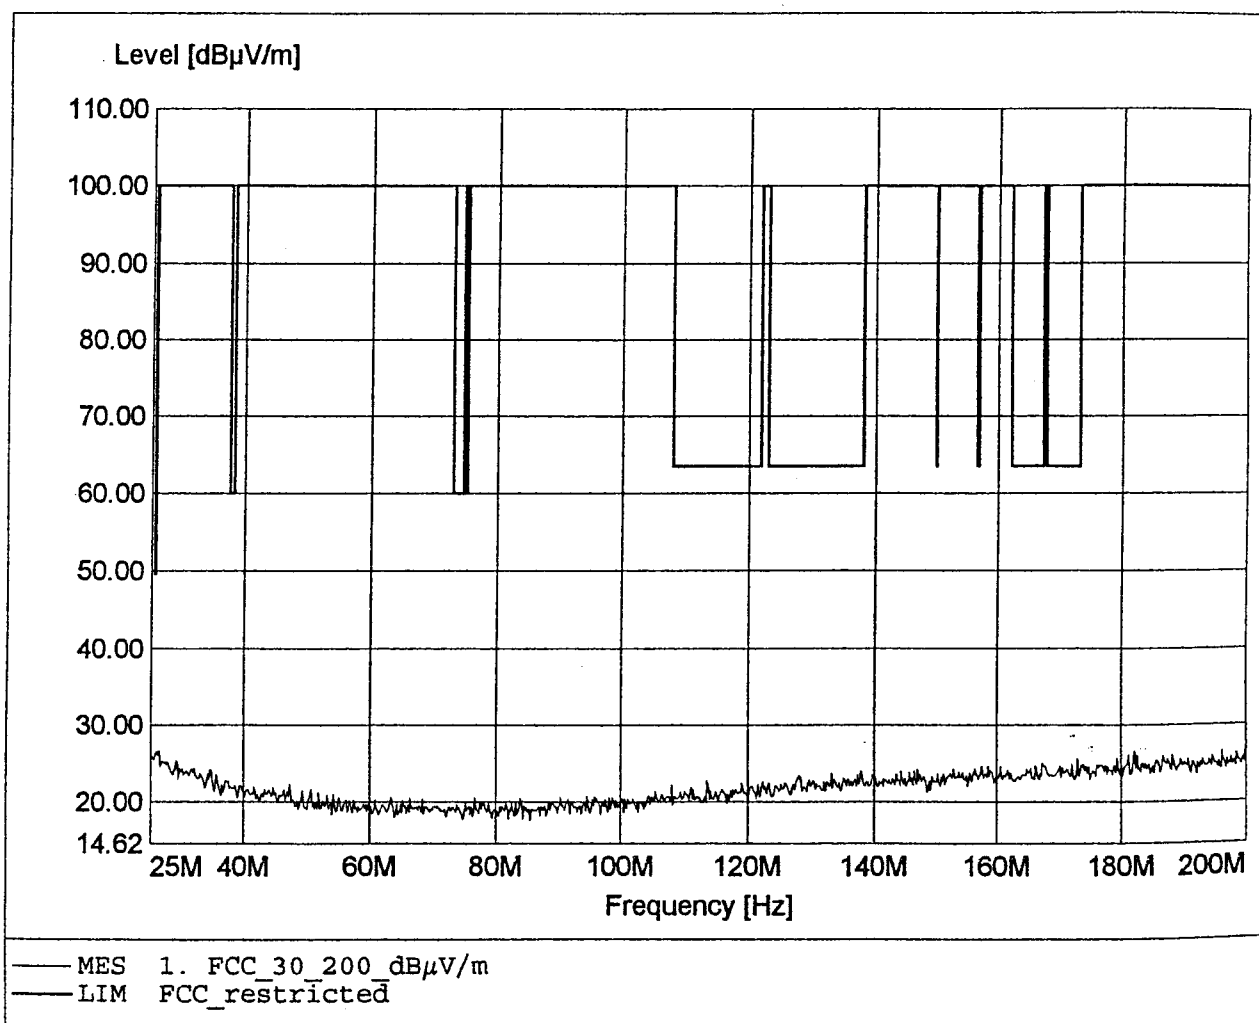

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:198,83MHz Pmax:26,23dBμV/m

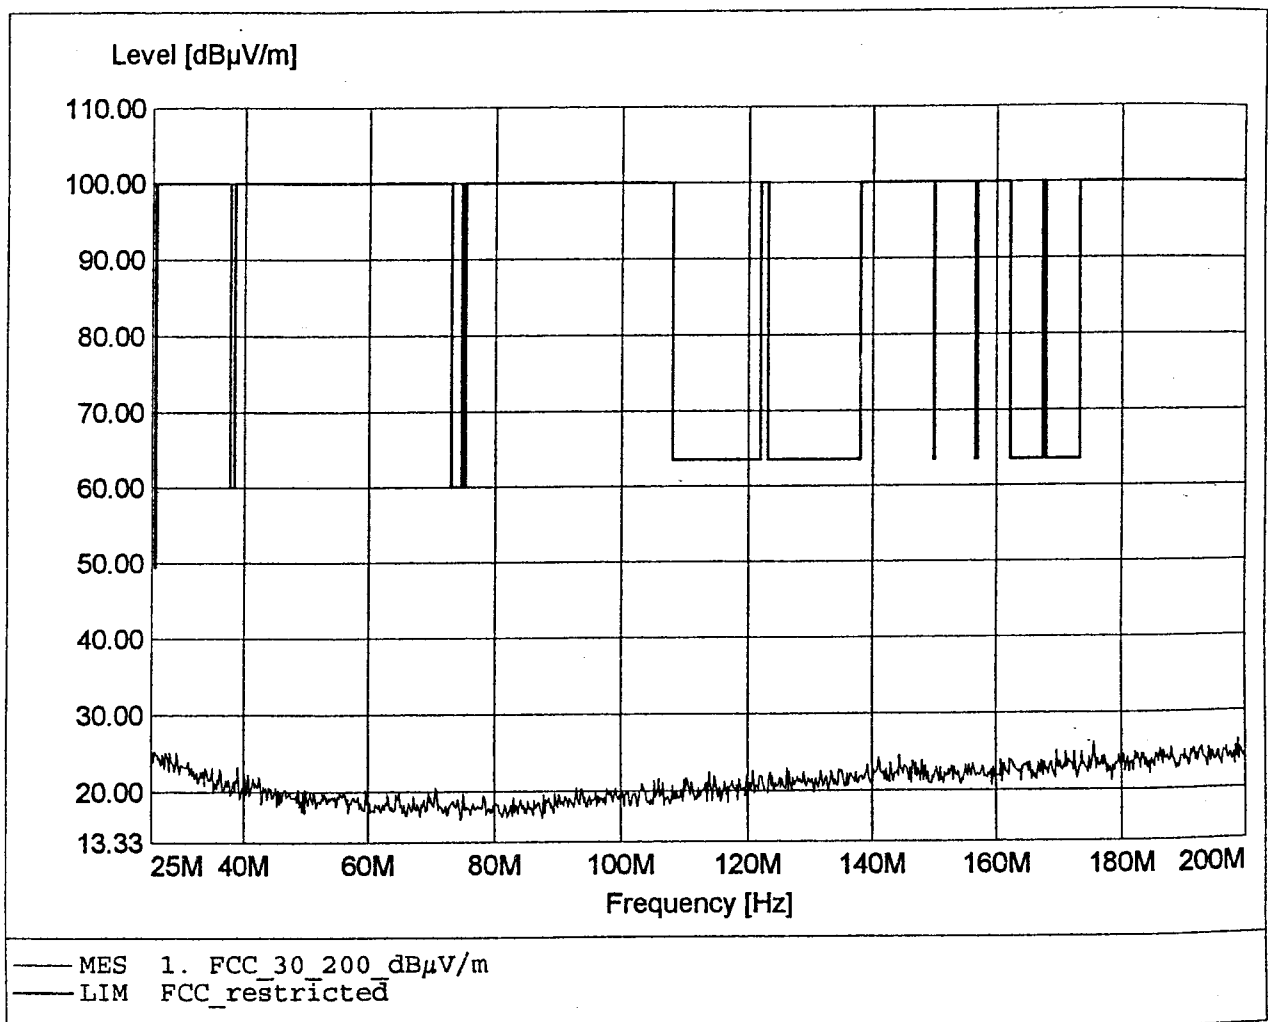

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:975,99MHz Pmax:34,74dBμV/m

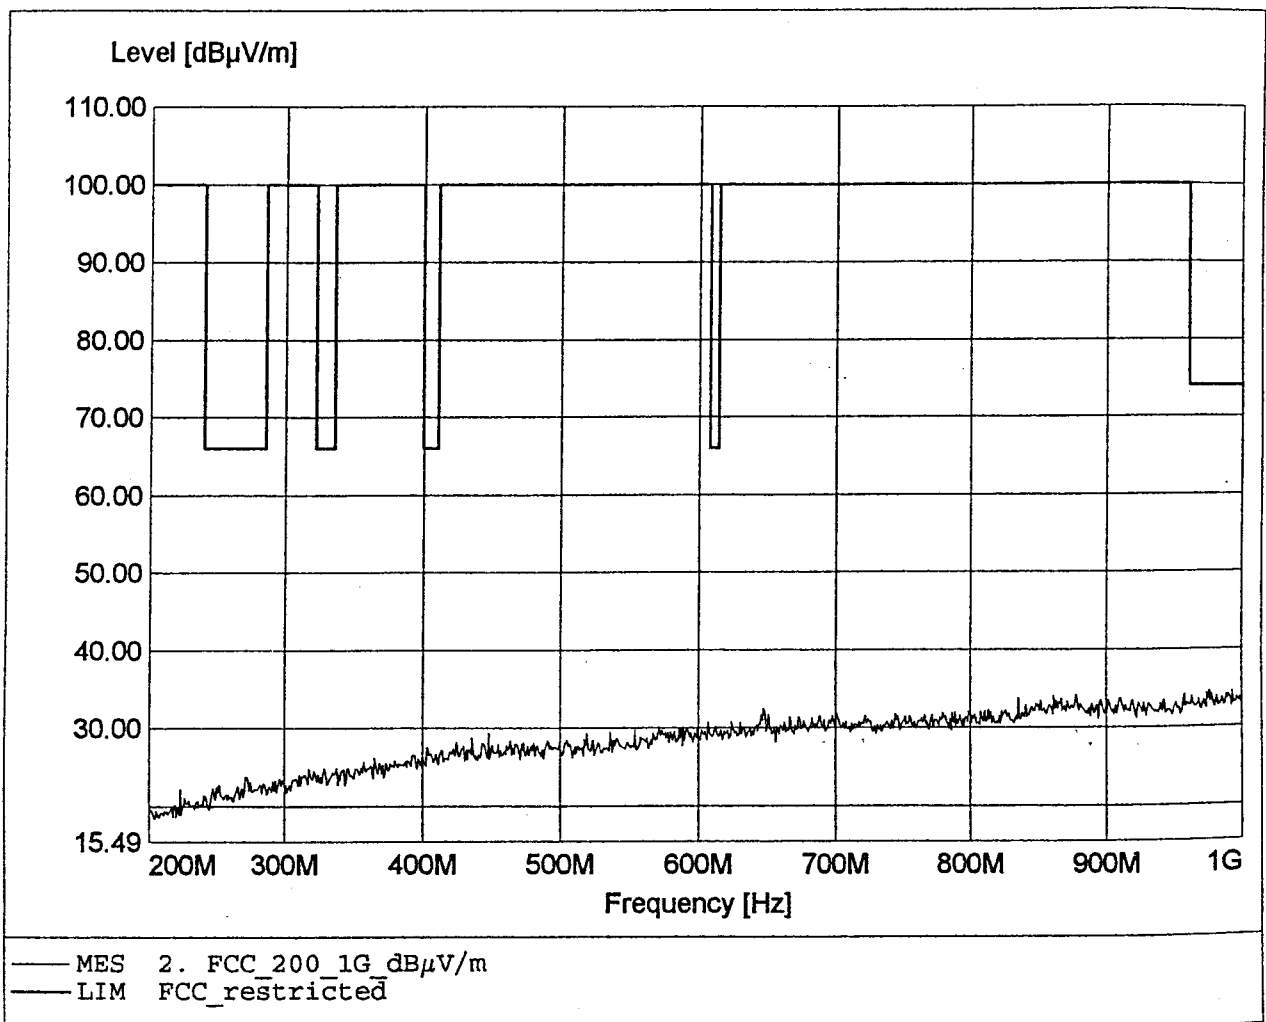

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:941,33MHz Pmax:35,45dBμV/m

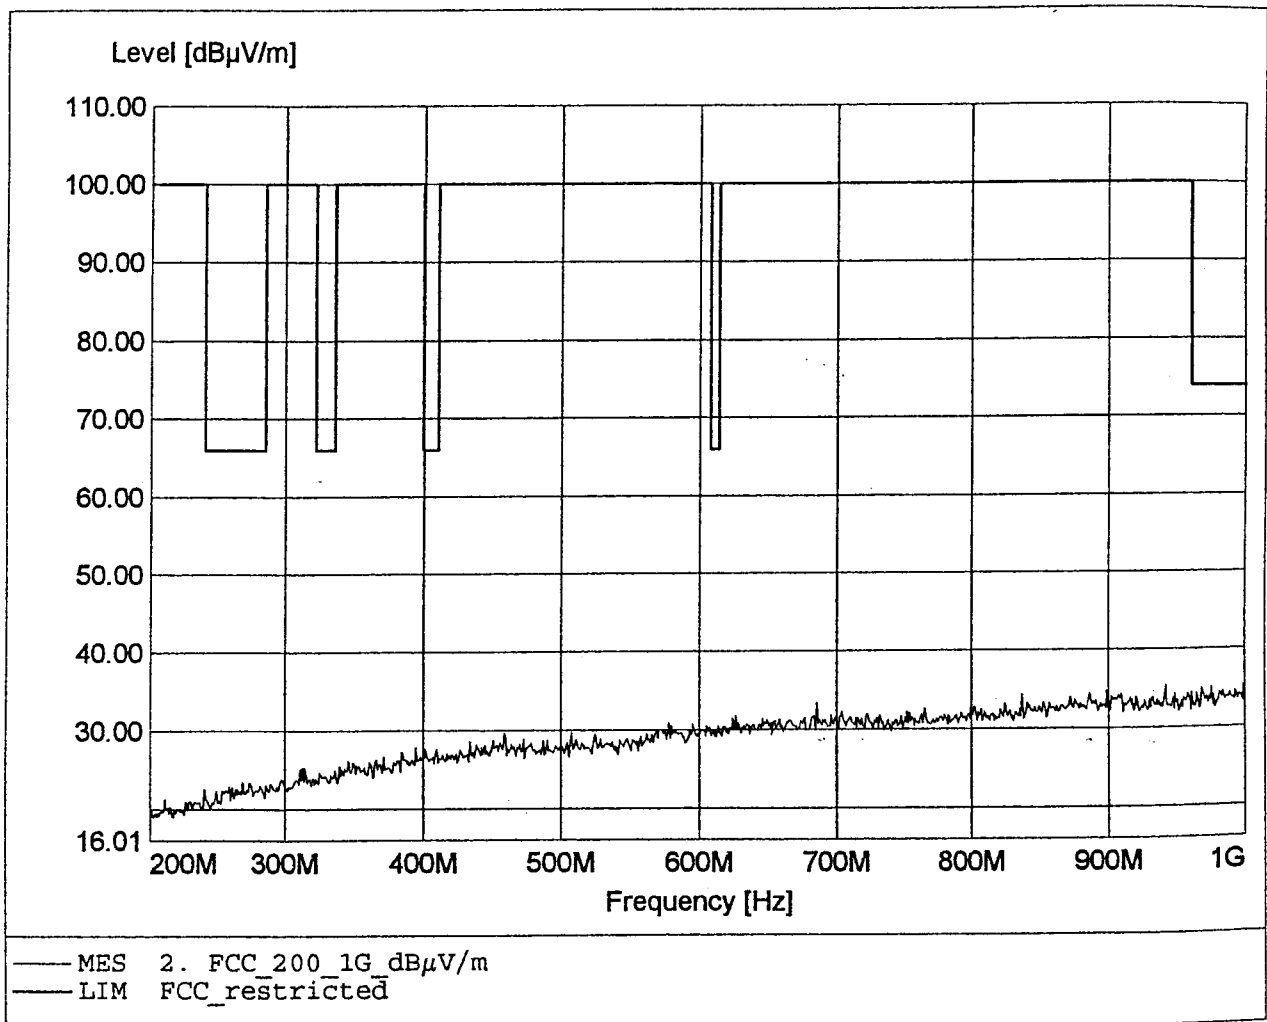

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2483,33MHz Pmax:122,73dBμV/m

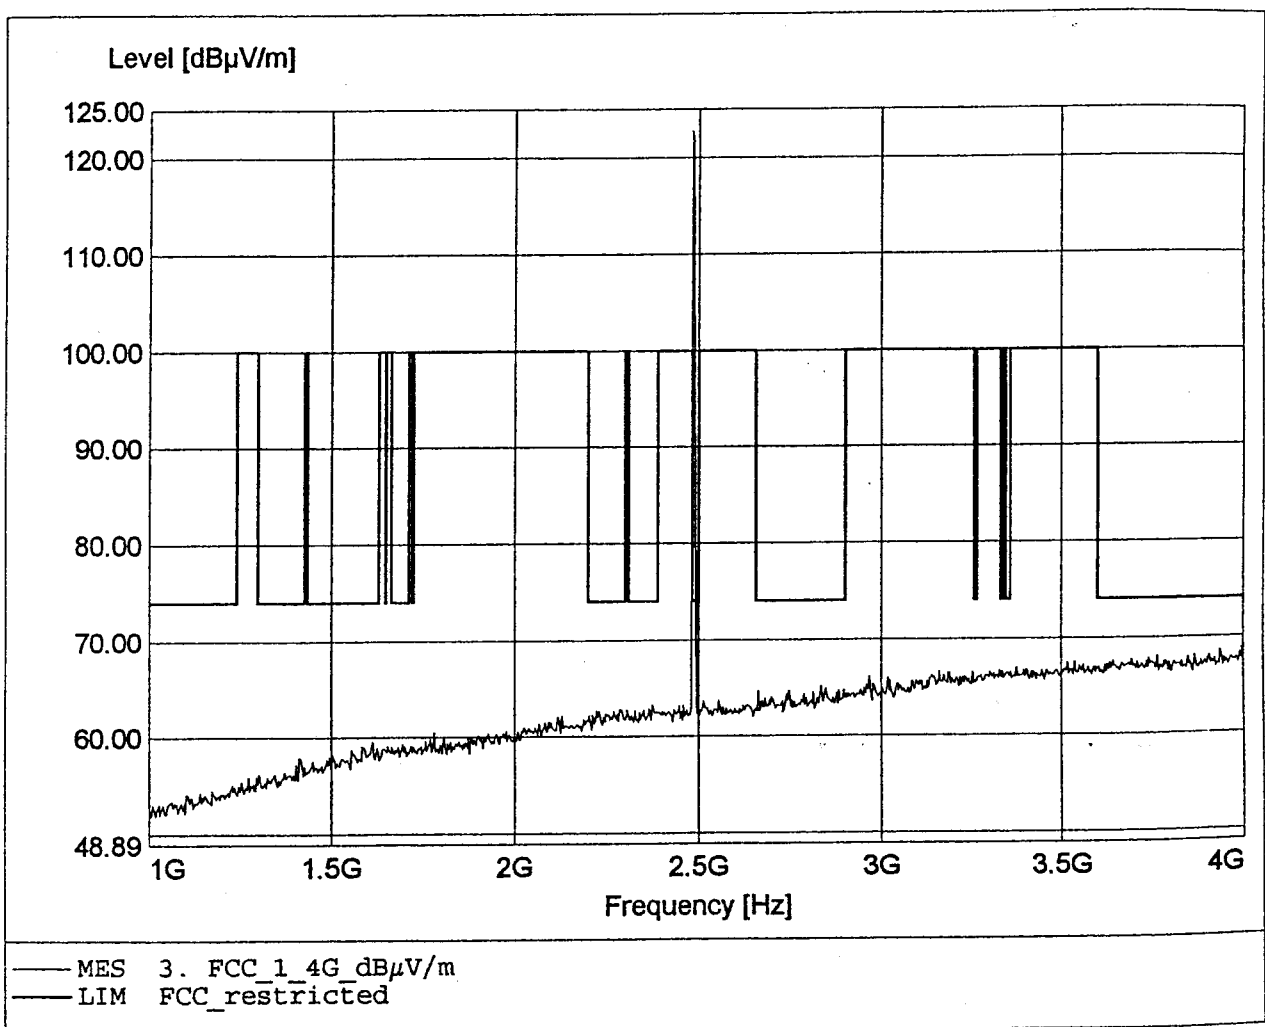

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)
 Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
 Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
 Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
 Comment 1: Dist.: 3m, Ant.: HL025
 Comment 2: Freq:2483,33MHz Pmax:119,18dBμV/m

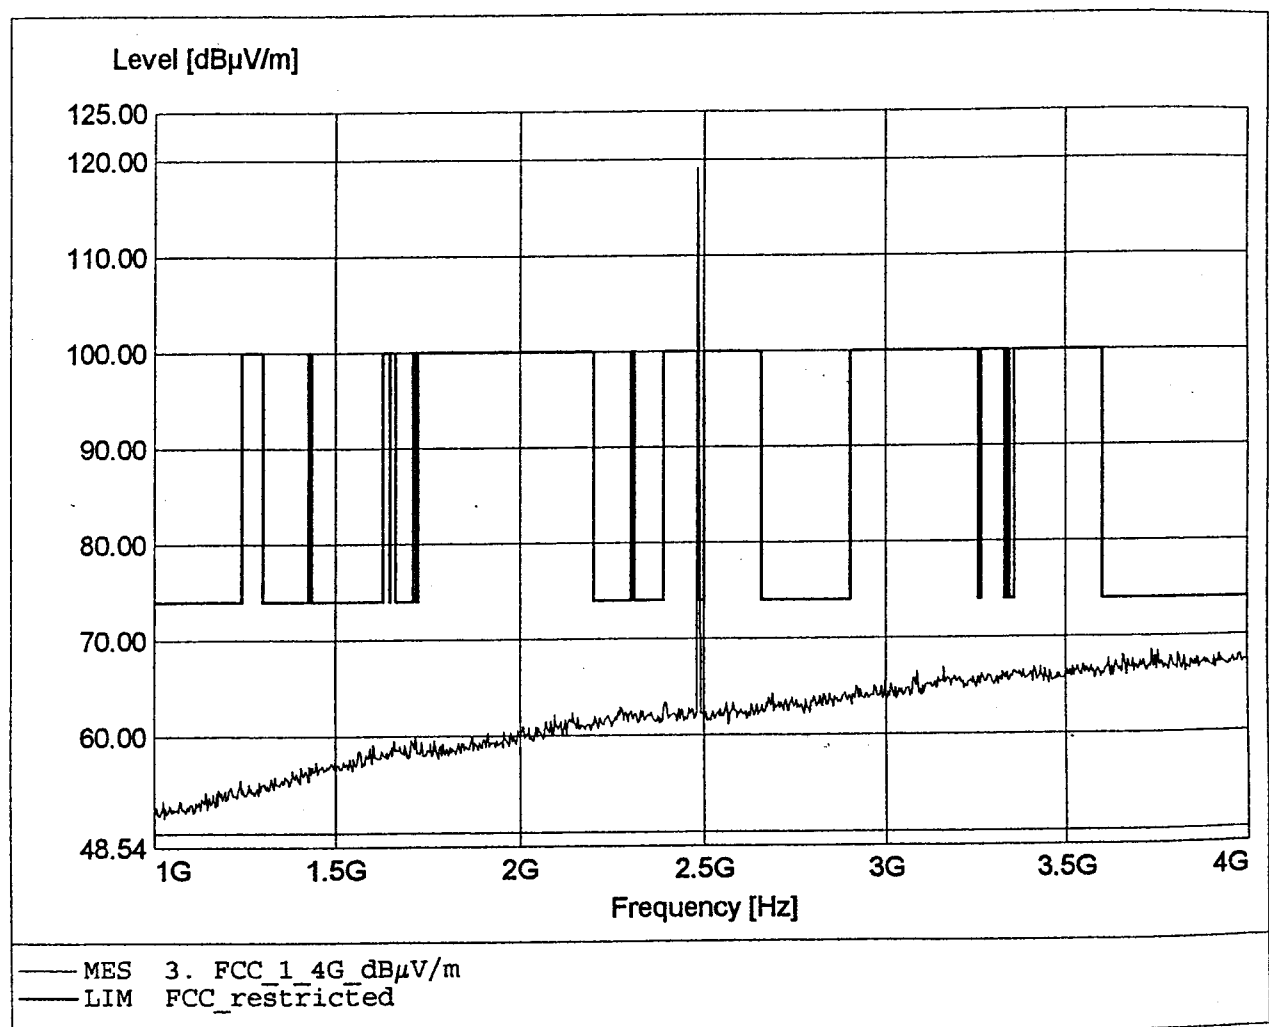

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:4960,00MHz Pmax:64,60dBμV/m

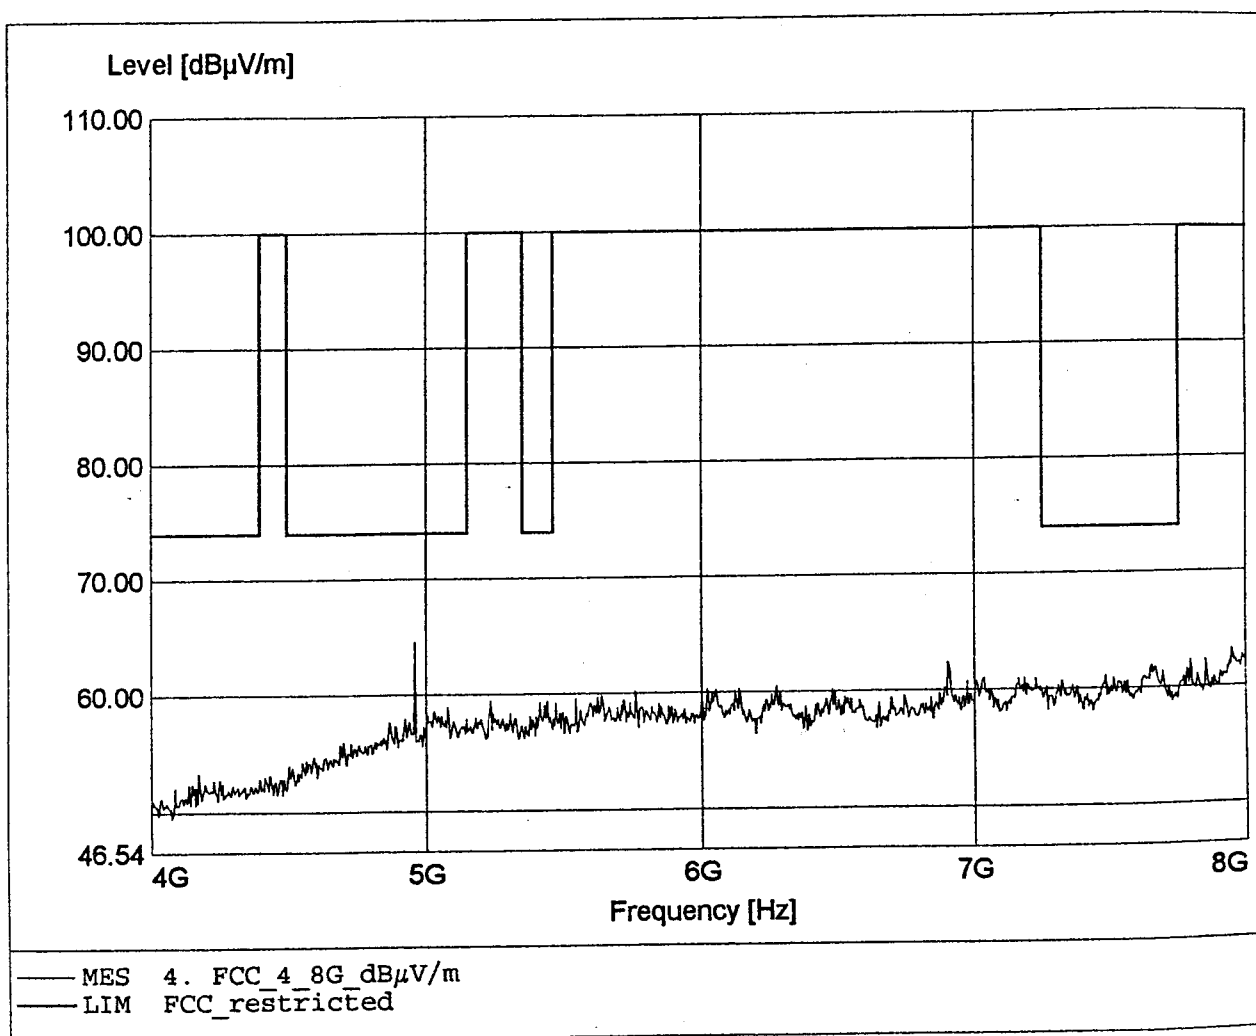

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7973,33MHz Pmax:65,63dBμV/m

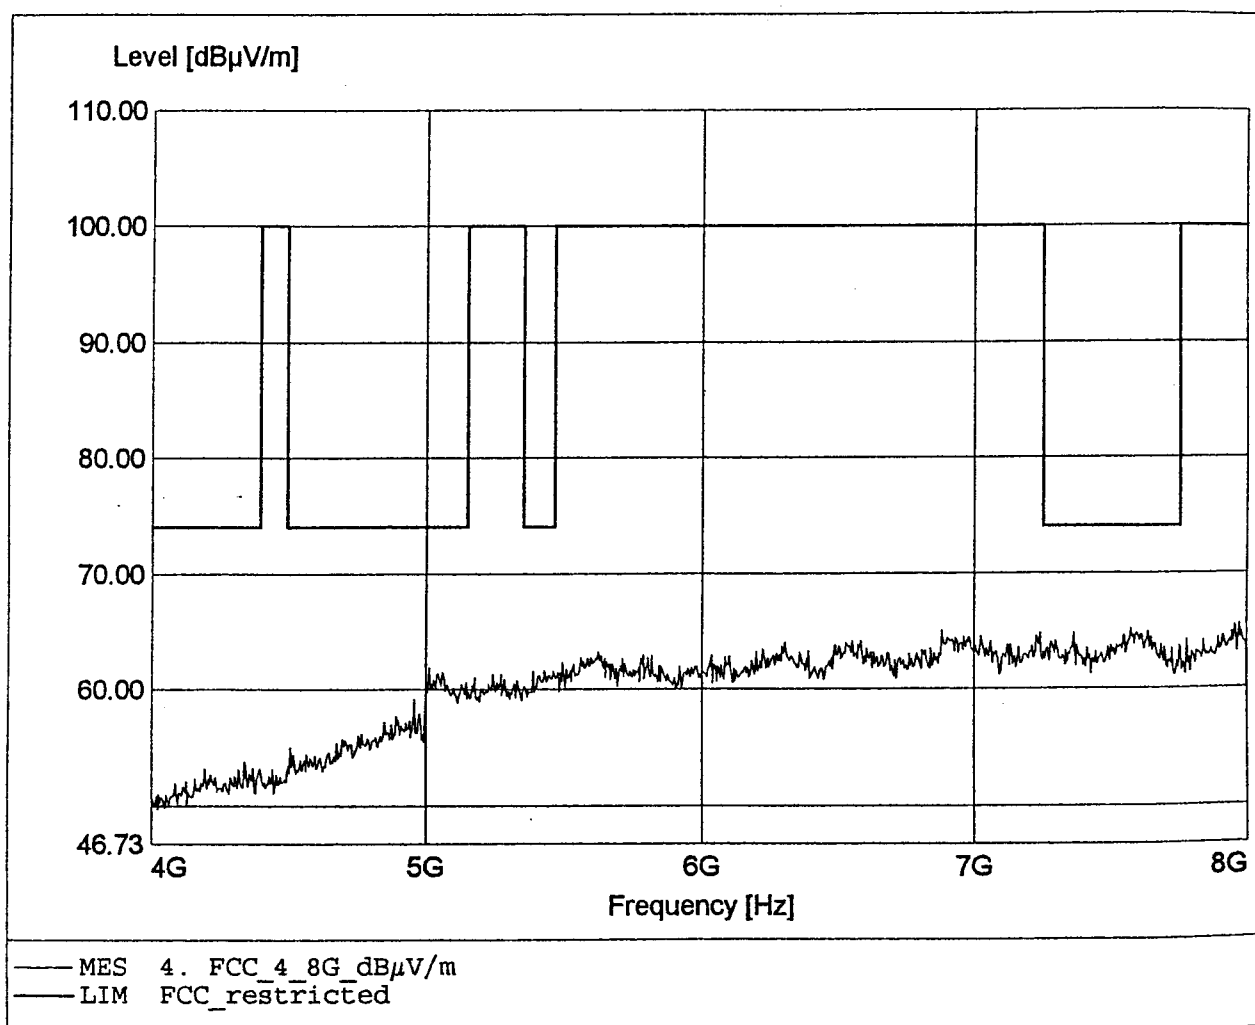

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:15511,11MHz Pmax:43,63dBμV/m

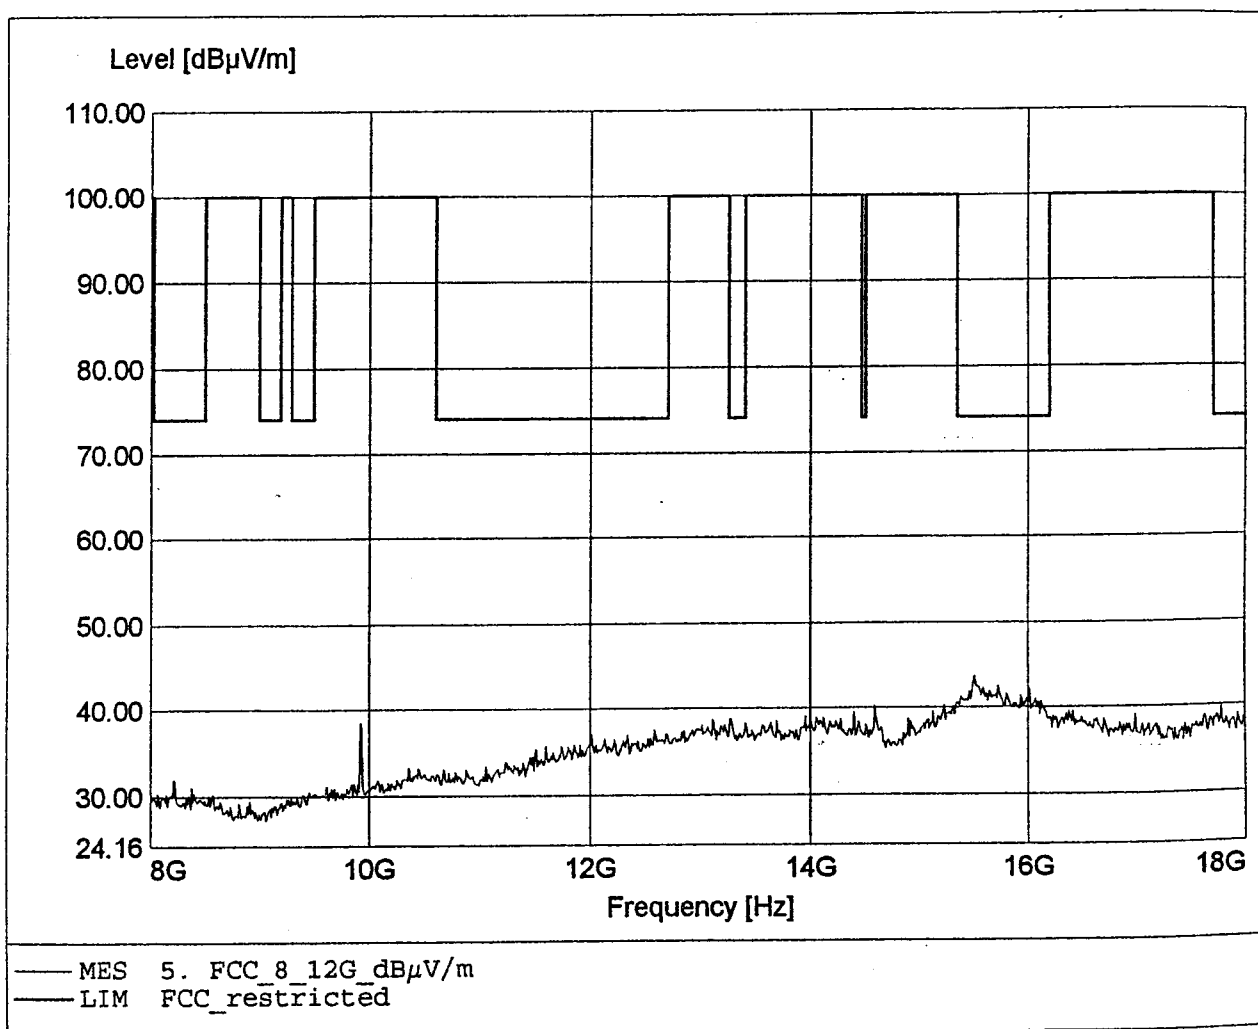

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:15544,44MHz Pmax:43,54dBμV/m

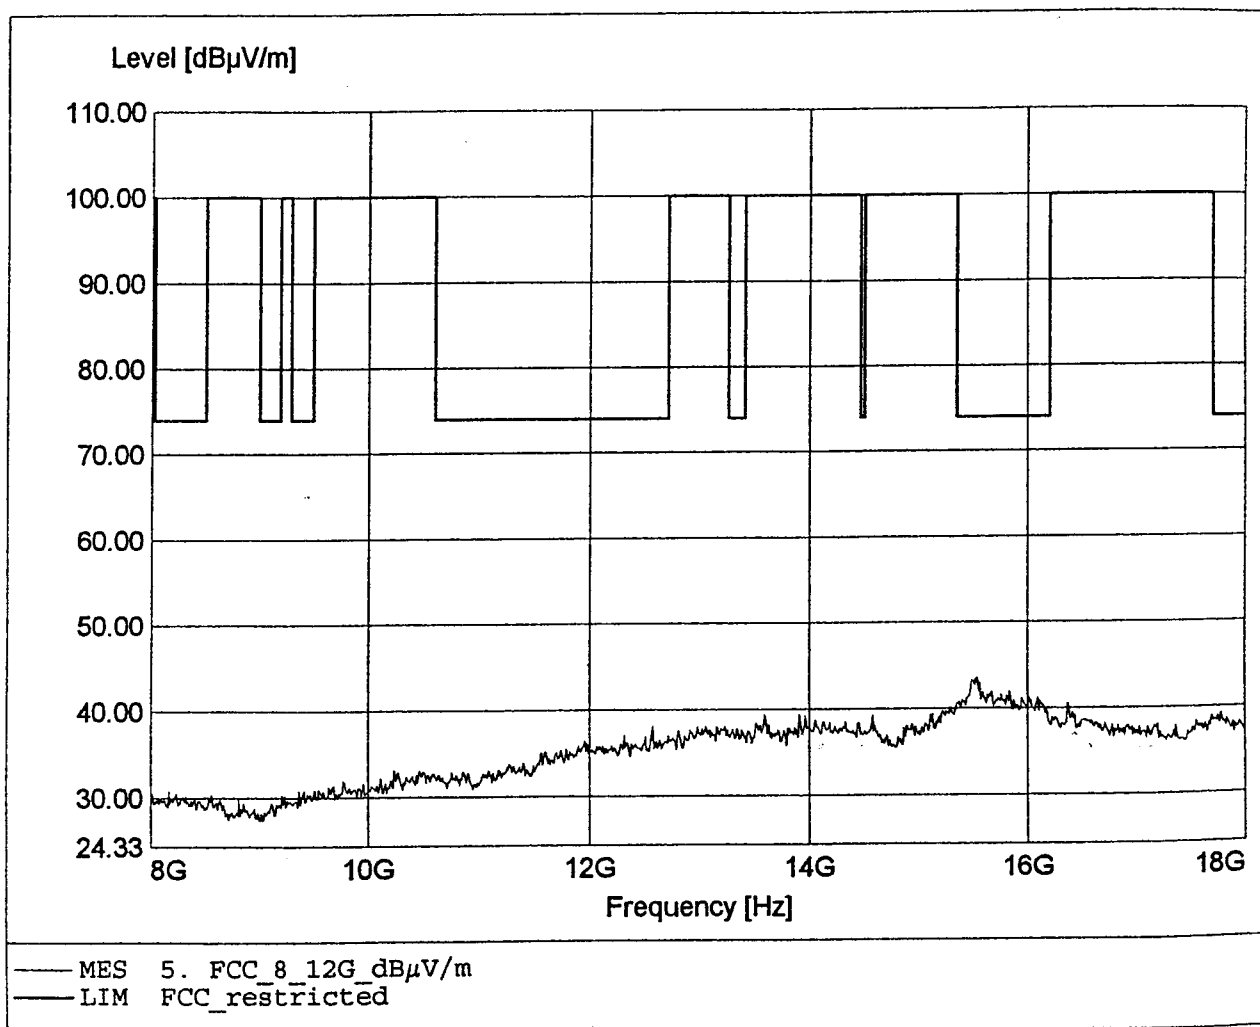

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26169,44MHz Pmax:50,73dBμV/m

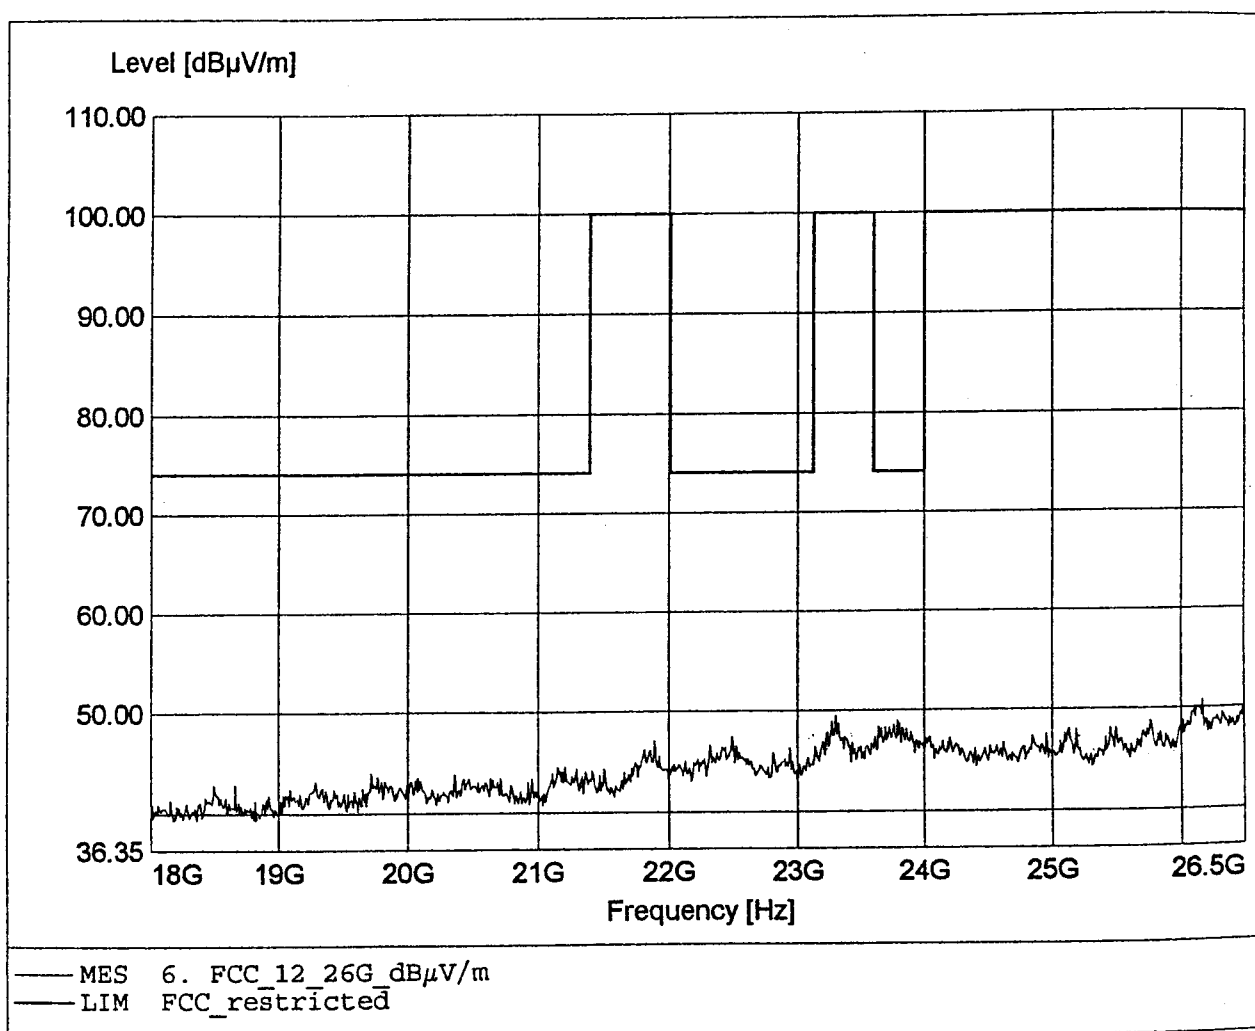

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S

Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26150,55MHz Pmax:51,37dBμV/m

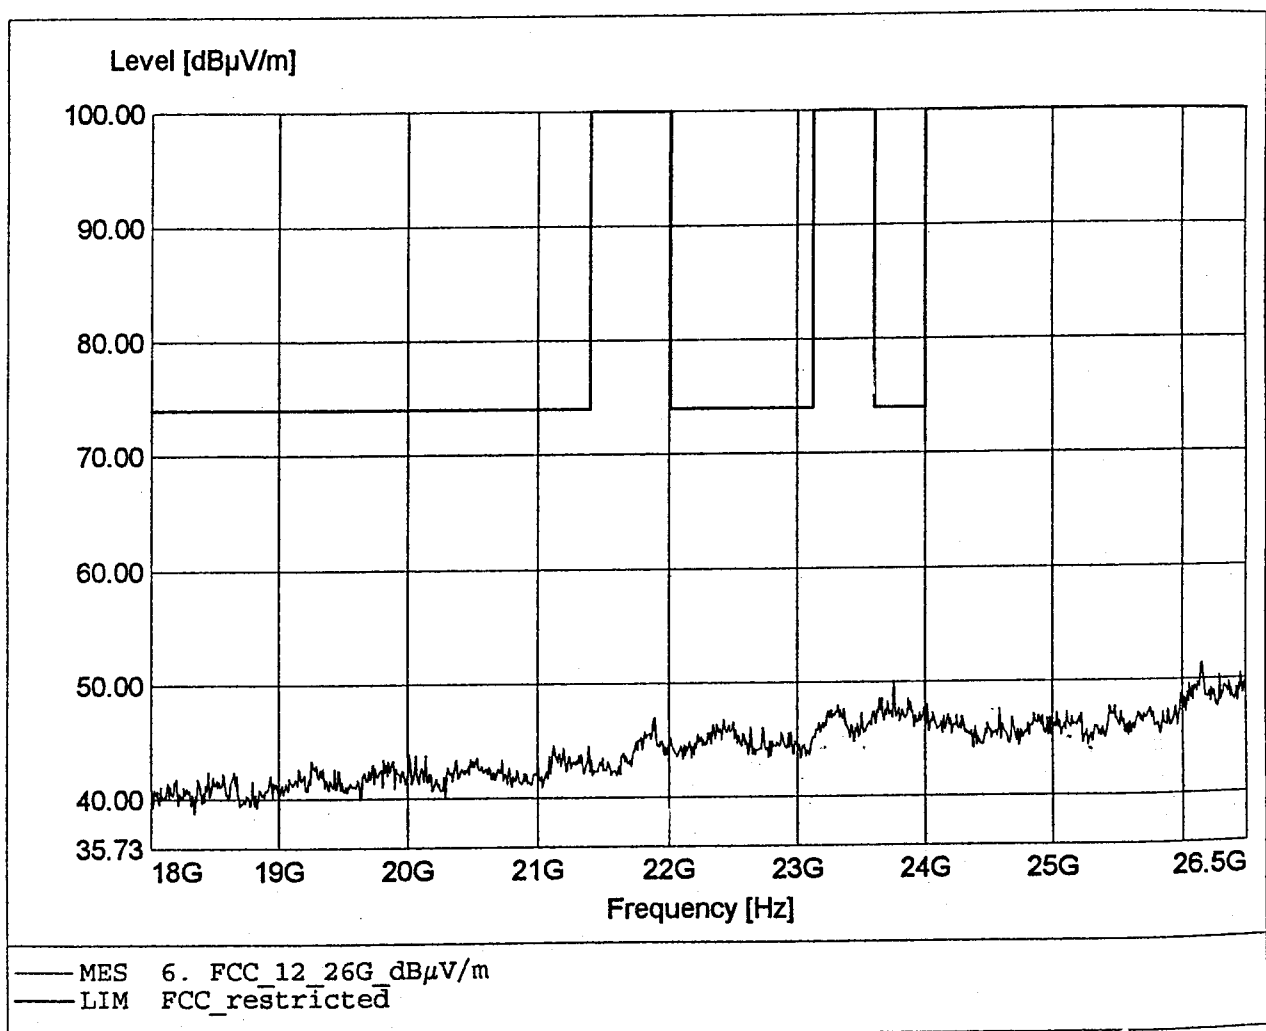

Appendix D

Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation




Date 10.Nov.'00 Time 13:11:46
Ref.Lvl 30.00 dBm Delta 0.58 dB
1.027 MHz

Res.Bw 300.0 kHz[3dB]
TG.Lvl off
CF.Stp 307.200 kHz

Vid.Bw 300 kHz
RF.Att 45 dB
Unit [dBm]


F1 OFF D1 OFF
F2 OFF D2 OFF
F2-F1 OFF D1-D2 OFF

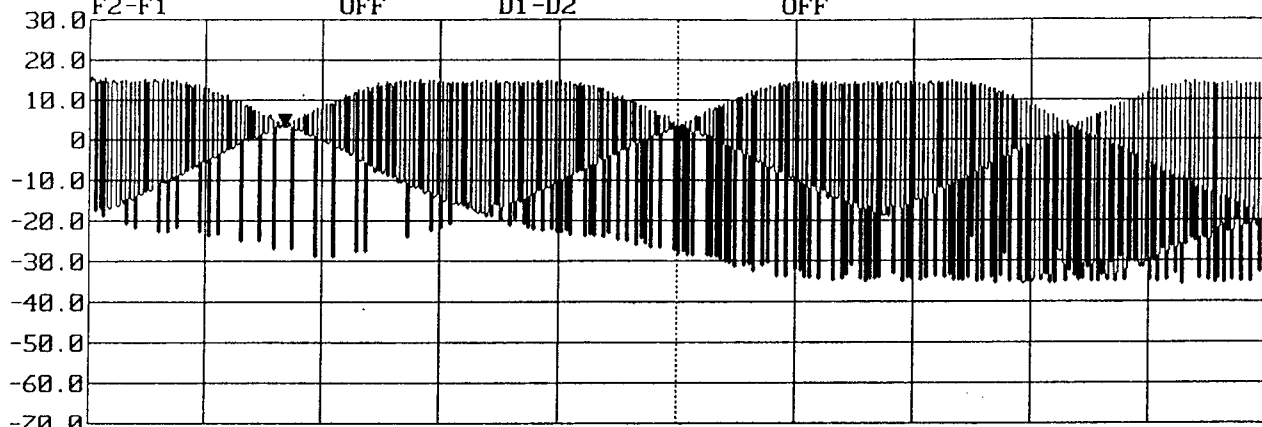

Start 2.44224 GHz Span 3.072 MHz Center 2.443776 GHz Sweep 200 s Stop 2.445312 GHz



Date 10.Nov.'00 Time 13:12:58 Res.Bw 300.0 kHz[3dB] Vid.Bw 300 kHz
Ref.Lvl Delta -0.83 dB TG.Lvl off
30.00 dBm 1.030 MHz CF.Stp 307.200 kHz RF.Att 45 dB
Unit [dBm]
F1 OFF D1 OFF
F2 OFF D2 OFF
F2-F1 OFF D1-D2 OFF

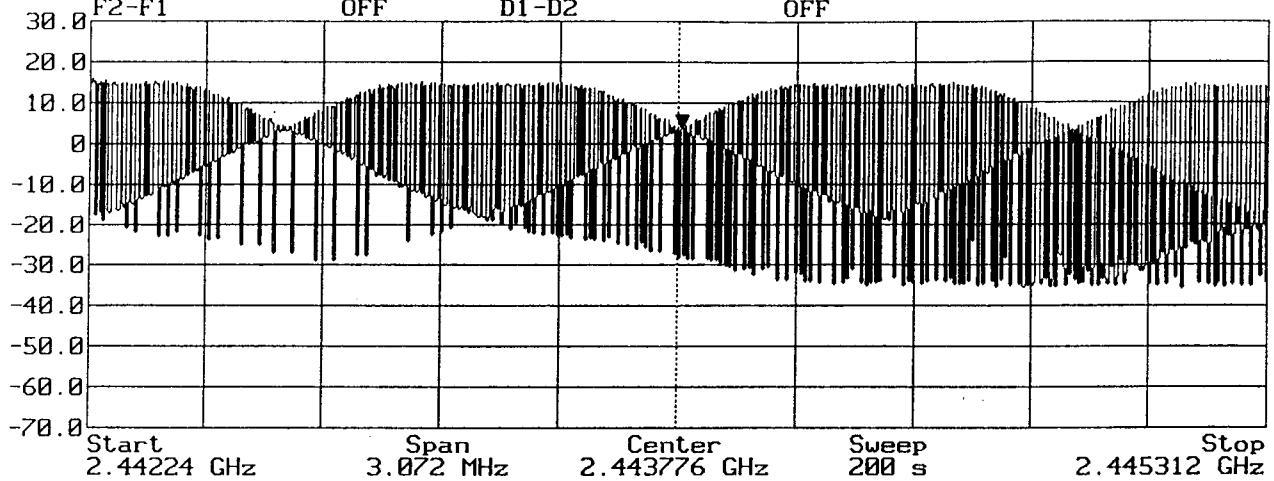


Appendix F

Number of Hopping Frequencies



Date 10.Nov.'00 Time 12:38:34 Res.Bw 398.4 kHz[3dB] Vid.Bw 3 MHz
Ref.Lvl Delta 0 dB TG.Lvl off RF.Att 45 dB
30.00 dBm 0 Hz CF.Stp 2.176 MHz Unit [dBm]

F1 OFF D1 OFF
F2 OFF D2 OFF
F2-F1 OFF D1-D2 OFF

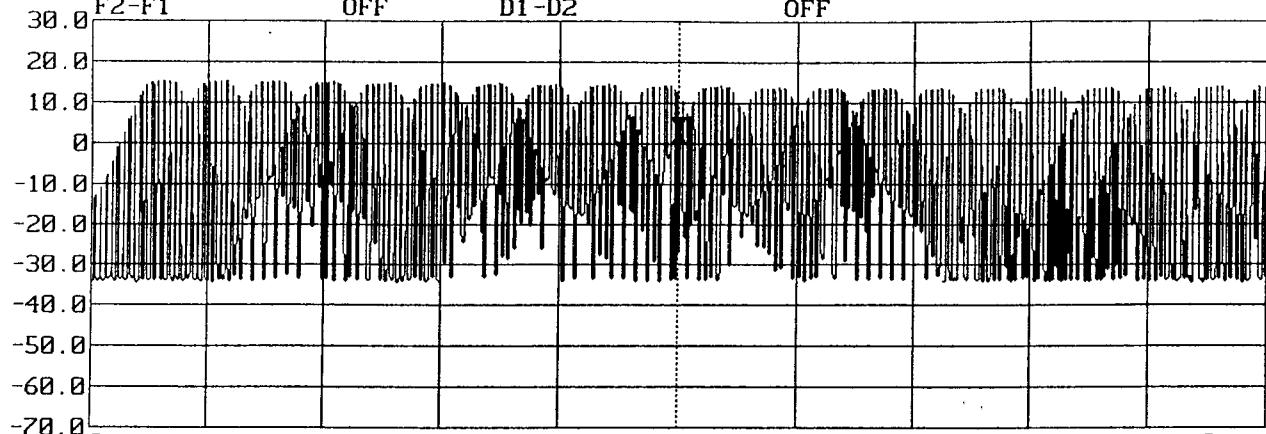


Start 2.4 GHz Span 21.76 MHz Center 2.41088 GHz Sweep 80 s Stop 2.42176 GHz



Date 10.Nov.'00 Time 12:42:31
Ref.Lvl Delta 0 dB
30.00 dBm 0 Hz

Res.Bw 398.4 kHz[3dB] Vid.Bw 3 MHz
TG.Lvl off RF.Att 45 dB
CF.Stp 2.048 MHz Unit [dBm]

F1 OFF D1 OFF
F2 OFF D2 OFF
F2-F1 OFF D1-D2 OFF

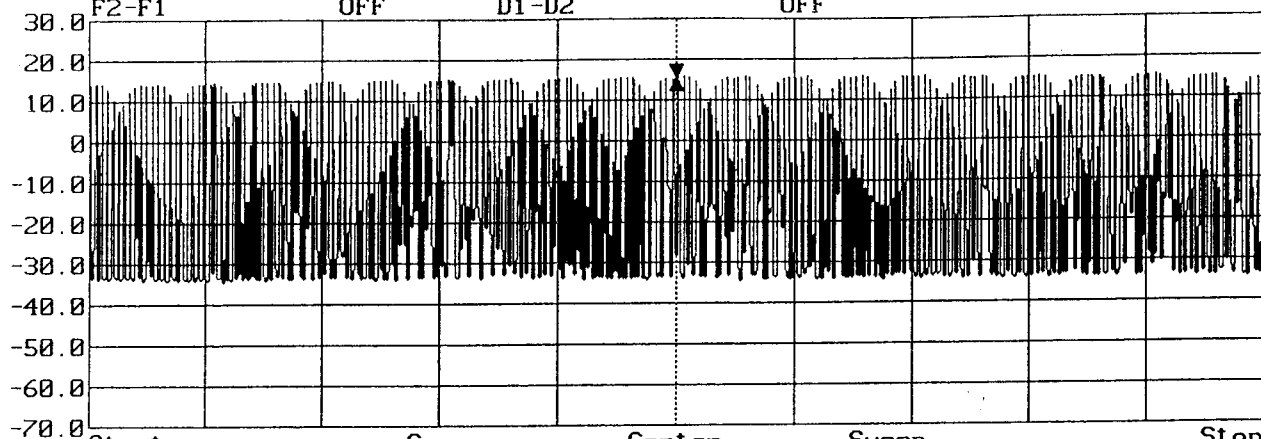

Start 2.42176 GHz Span 20.48 MHz Center 2.432 GHz Sweep 80 s Stop 2.44224 GHz



Date 10.Nov.'00 Time 12:48:26

Ref.Lvl
30.00 dBm

Res.Bw 398.4 kHz[3dB]

TG.Lvl off

CF.Stp 2.048 MHz

Vid.Bw

3 MHz

RF.Att

45 dB

Unit

[dBm]

F1

OFF

D1

OFF

F2

OFF

D2


OFF

F2-F1

OFF

D1-D2

OFF

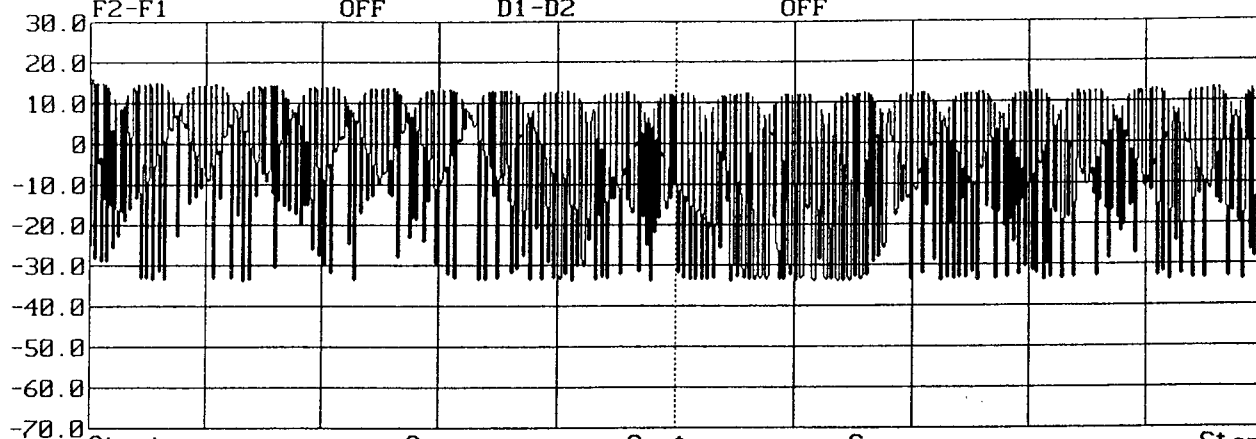

Start
2.44224 GHz

Span
20.48 MHz

Center
2.45248 GHz

Sweep
80 s

Stop
2.46272 GHz




Date 10.Nov.'00 Time 12:56:58

Ref.Lvl
30.00 dBm

Res.Bw 398.4 kHz[3dB] Vid.Bw 3 MHz
TG.Lvl off
CF.Stp 2.078 MHz RF.Att 45 dB
Unit [dBm]

F1 OFF D1 OFF
F2 OFF D2 OFF
F2-F1 OFF D1-D2 OFF

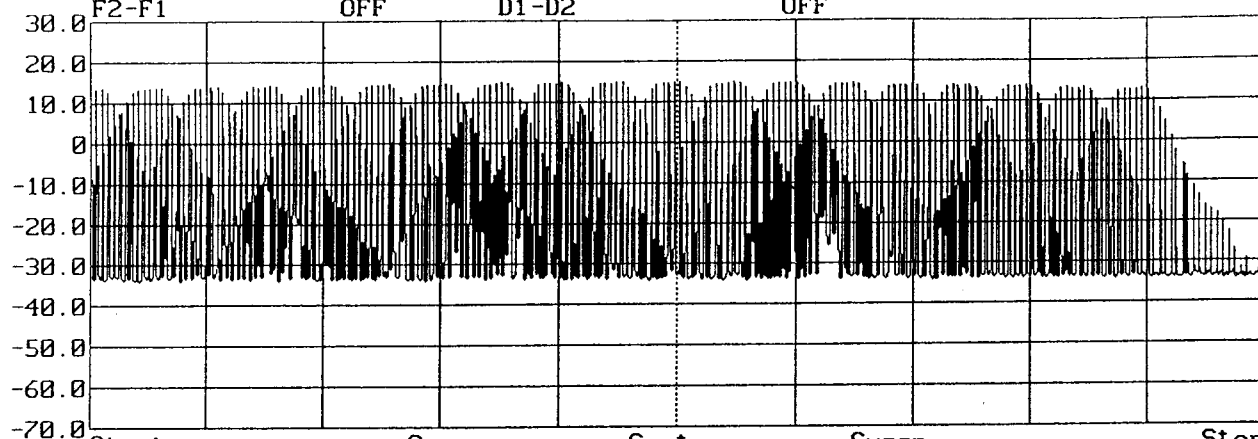


Start 2.46272 GHz Span 20.78 MHz Center 2.47311 GHz Sweep 80 s Stop 2.4835 GHz

Appendix G

Time of Occupancy (Dwell Time)



Date 10.Nov.'00 Time 13:44:11 TRG
Ref.Lvl 30.00 dBm Delta -9.12 dB
Res.Bw 1.0 MHz[3dB] Vid.Bw 300 kHz
TG.Lvl off
CF.Stp 100.000 kHz RF.Att 45 dB
Unit [dBm]
T1 OFF D1 9.55 dBm
T2 OFF D2 OFF
T1-T2 OFF D1-D2 OFF

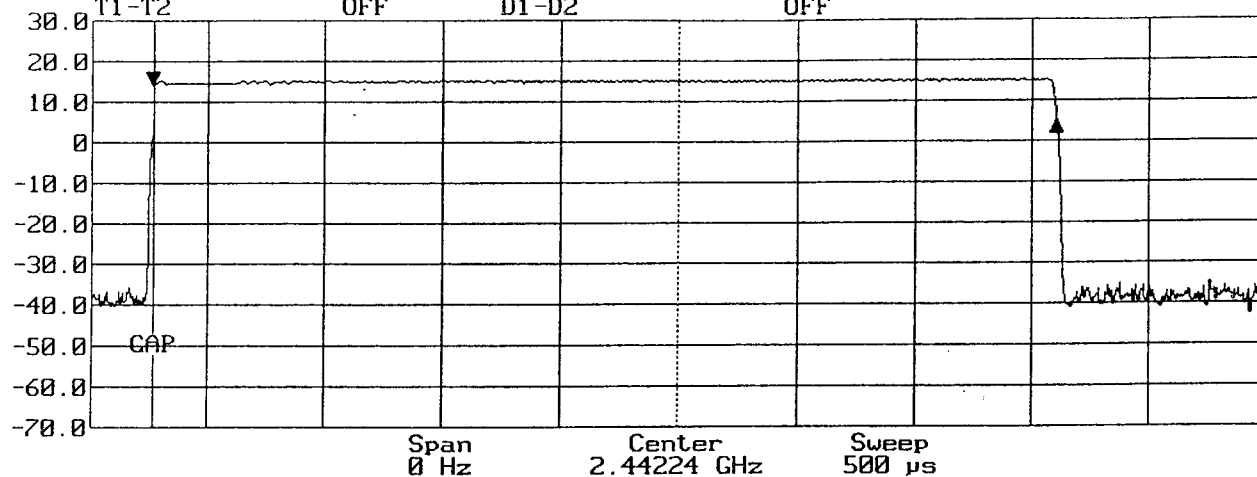




Appendix H

20dB Bandwidth




Date 10.Nov.'00 Time 12:12:14 Res.Bw 10.0 kHz[3dB] Vid.Bw 100 kHz
Ref.Lvl Delta -22.12 dB TG.Lvl off
15.00 dBm 500.0 kHz CF.Stp 200.000 kHz RF.Att 45 dB
Unit [dBm]
F1 2.40178222227 GHz D1 9.47 dBm
F2 2.40078888892 GHz D2 -10.53 dBm
F2-F1 993.33335 kHz D1-D2 -20.00 dB

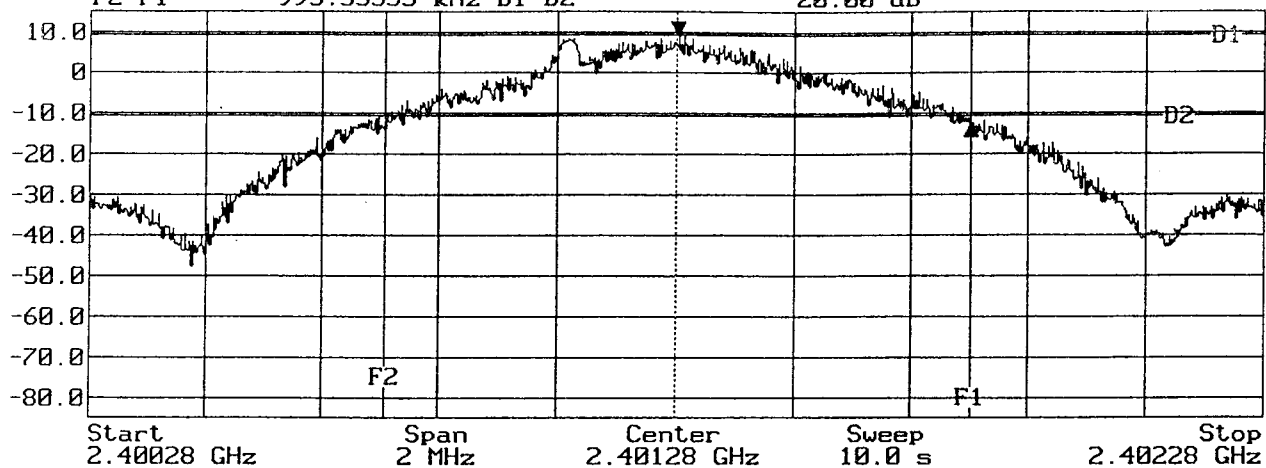




Date 10.Nov.'00 Time 12:14:15 Res.Bw 10.0 kHz[3dB] Vid.Bw 100 kHz
Ref.Lvl Delta 0 dB TG.Lvl off
15.00 dBm 0 Hz CF.Stp 200.000 kHz RF.Att 45 dB
Unit [dBm]
F1 2.4427555553 GHz D1 9.11 dBm
F2 2.4417577779 GHz D2 -10.89 dBm
F2-F1 997.7774 kHz D1-D2 -20.00 dB

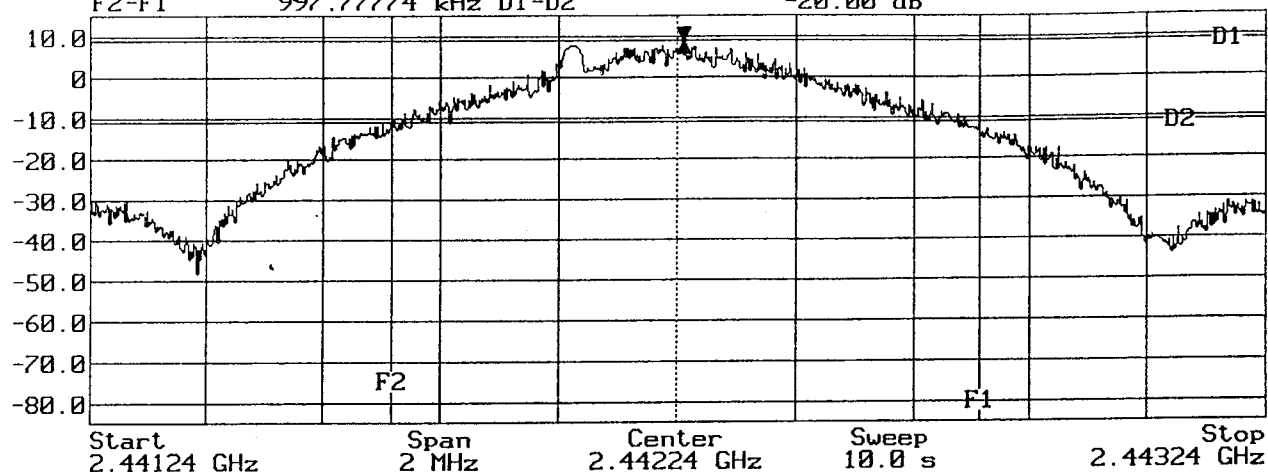



Date 10.Nov.'00 Time 12:20:21 Res.Bw 10.0 kHz[3dB] Vid.Bw 100 kHz
Ref.Lvl 15.00 dBm Delta -21.68 dB TG.Lvl off
CF.Stp 200.000 kHz RF.Att 45 dB [dBm]
Unit
F1 2.48165866663 GHz D1 7.36 dBm
F2 2.48065866670 GHz D2 -12.64 dBm
F2-F1 999.99993 kHz D1-D2 -20.00 dB

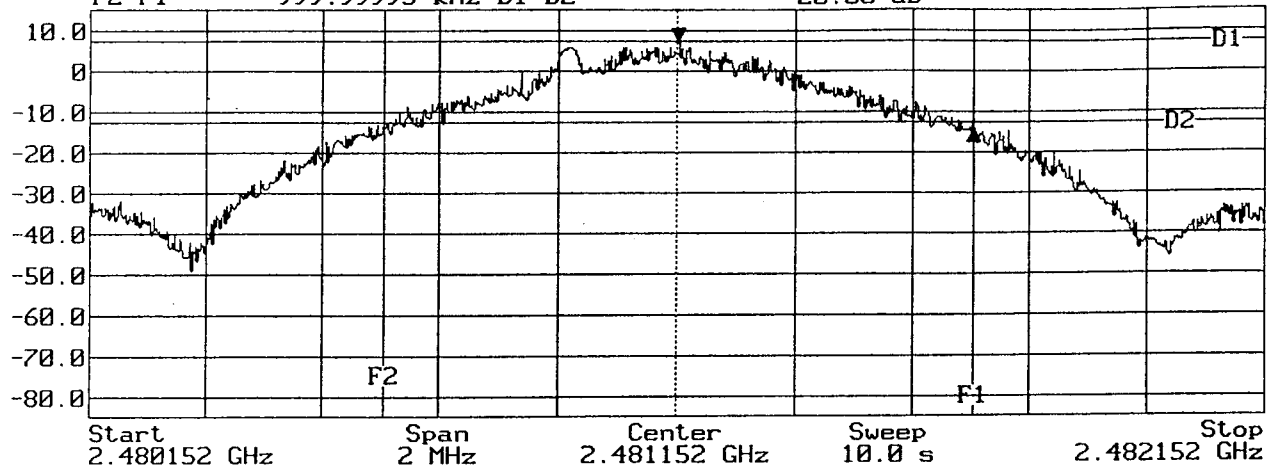


Appendix I

Band-edge Compliance of RF Emissions




Date 10.Nov.'00 Time 12:28:36 Res.Bw 10.0 kHz[3dB] Vid.Bw 100 kHz
Ref.Lvl Delta 0 dB TG.Lvl off RF.Att 45 dB
15.00 dBm 0 Hz CF.Stp 500.000 kHz Unit [dBm]
F1 2.400000000000 GHz D1 9.55 dBm
F2 2.40076333331 GHz D2 -10.45 dBm
F2-F1 -763.33331 kHz D1-D2 -20.00 dB

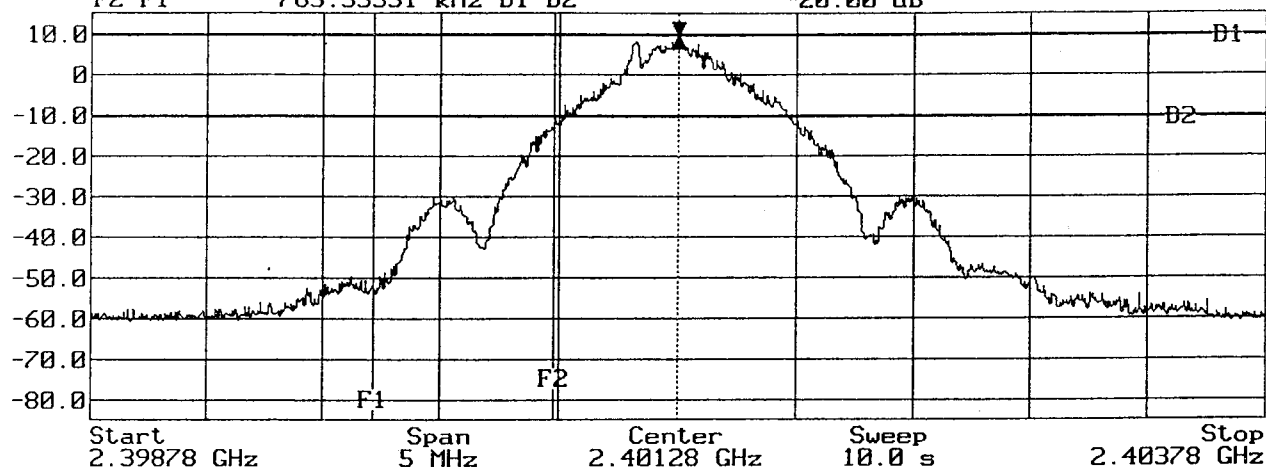



Date 10.Nov.'00 Time 12:24:04 Res.Bw 10.0 kHz[3dB] Vid.Bw 100 kHz
Ref.Lvl Delta -61.33 dB TG.Lvl off
15.00 dBm 1.266 MHz CF.Stp 500.000 kHz RF.Att 45 dB
Unit [dBm]
F1 2.483500000000 GHz D1 7.67 dBm
F2 2.48161977784 GHz D2 -12.33 dBm
F2-F1 1.88022216 MHz D1-D2 -20.00 dB

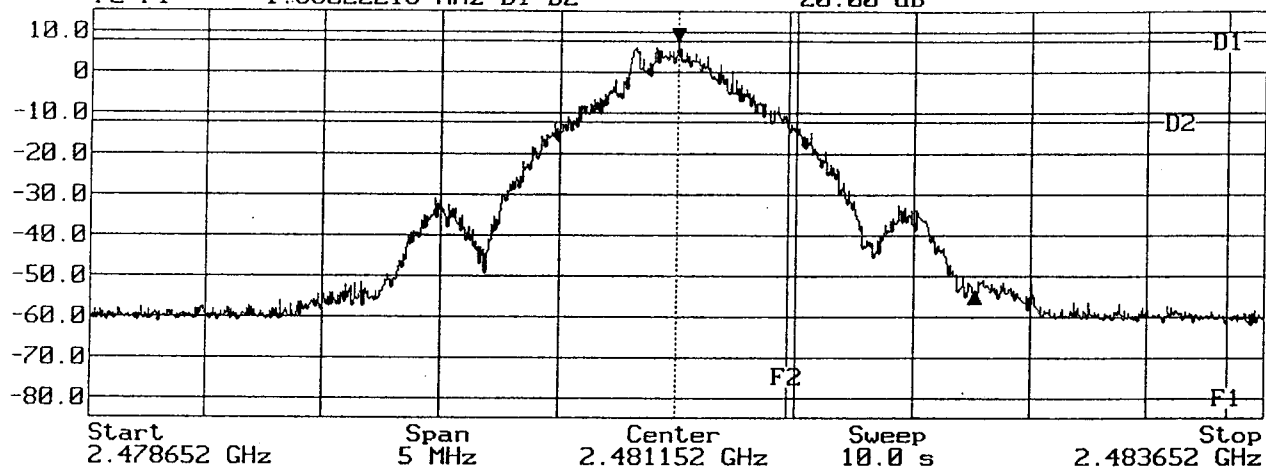

Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: 2.4 GHz COMMUNICATION SYSTEM
Manufacturer: KIRK TELECOM A/S
Operating Condition: Unom: 230VAC(AC/DC-adaptor) , Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH3-Z5
Comment: model: WRFP4 2G4 mode: active

