



SA à directoire et conseil de surveillance.  
SIRET : 418 022 877 00033 – RCS BREST  
Bâtiment Ponant, Avenue La Pérouse, Technopole Brest-Iroise – 29280 PLOUZANE – France.

# ACCEPTANCE TEST

## ANNEX G

### DIPOLE 2450MHZ CALIBRATION

Prepared By: Mr. LUC Jérôme, ANTENNESSA

Project Description : SAR TEST BENCH

Prepared For (End User) : CCS

This document is issued by ANTENNESSA, in confidence and is not to be reproduced in whole or in part without the prior written permission. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or in part without the prior written permission of ANTENNESSA.

**DIPOLE 1900 MHz CALIBRATION REPORT**

**DATE :** 06/01/2006

**REFERENCE :** SN 48/05 DIPJ36

**OBJECT :** COMOSAR IEEE REF DIPOLE

**MANUFACTURER :** ANTENNESSA

**SERIAL NUMBER :** SN 48/05 DIPJ36

**CUSTOMER :** CCS

**ORDER :** PF05120023

**DATE OF CALIBRATION :** 05/01/2006

**WARRANTY :**

This Calibration certificate may not be reproduced other than in full. Calibration certificates without signature and seal are not valid. This documentation contains property information which is protected by copyright. All right are reserved. No part of this document may be photocopied, reproduced without the prior written agreement of ANTENNESSA. ANTENNESSA shall not be liable for errors contained herein or for incidental or consequential in connection with the furnishing, performance or use of this material. Warranty doesn't apply to Normal wear, Normal tear, Improper use, Improper maintain, Improper installation.

Date

06-01-06

**ANTENNESSA**

Bâtiment POMANT


Ave La Perouse

Zone du Technopôle Brest Iroise


29280 PLOUZANE

Tél. (33) 02 98 05 13 34 - Fax (33) 02 98 05 13 35


**SAR TEAM MANAGER**



**PRESIDENT**



## PRODUCT DESCRIPTION

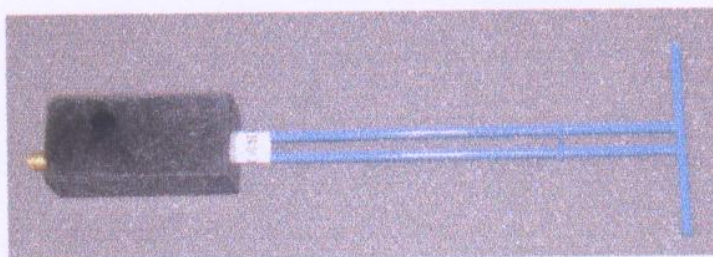


## CALIBRATION TEST EQUIPMENT

| TYPE                    | IDENTIFICATION |
|-------------------------|----------------|
| Vector Network Analyzer | HP8753D        |

## MEASUREMENT PROCEDURE

We placed the dipole under the flat part of SAM phantom fill with 2450 MHz head liquid.

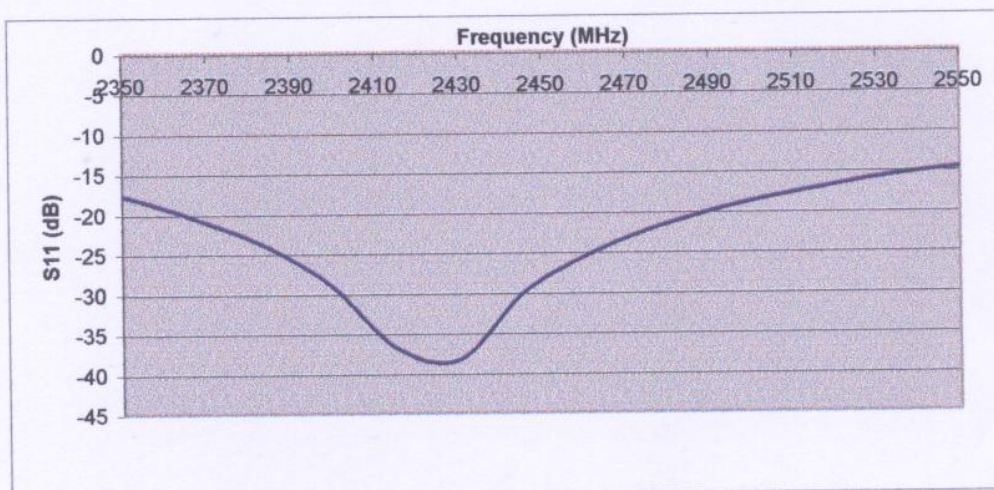

VSWR at 2450MHz: -28.17 dB.