Appendix C. Co-location

1. Results of Radiated Emissions for Co-located

Temperature	22°C	Humidity	61%
Test Engineer	Robert Chang	Configurations	2.4G + 5G TX

Horizontal

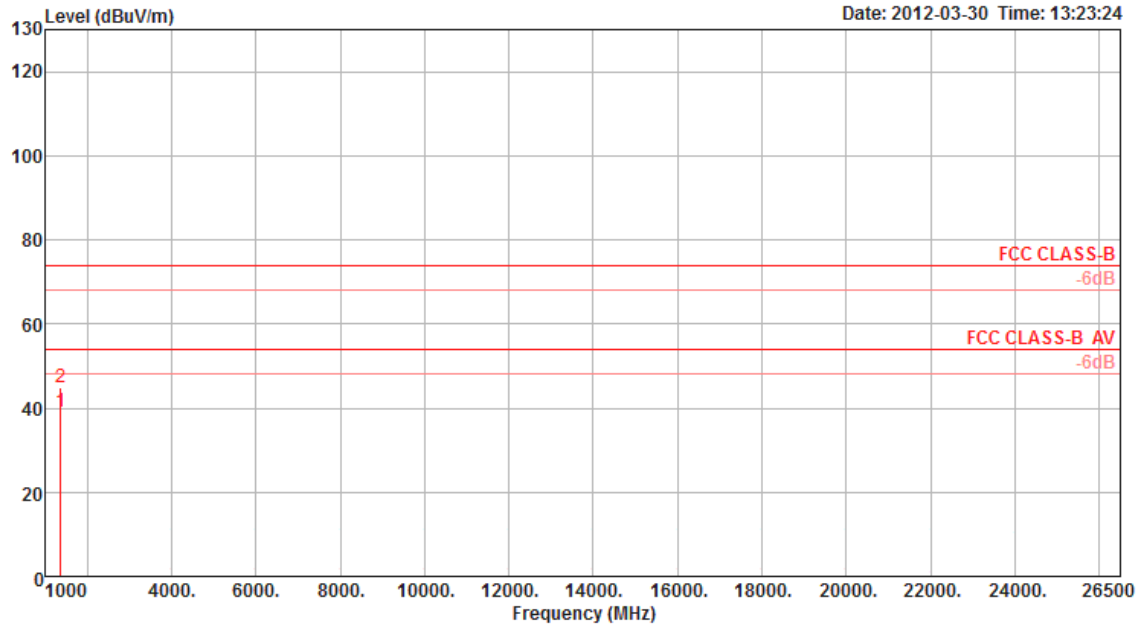

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	1374.99	39.17	54.00	-14.83	46.81	2.15	34.83	25.04	65	100	Average	HORIZONTAL
2 p	1375.22	44.81	74.00	-29.19	52.45	2.15	34.83	25.04	65	100	Peak	HORIZONTAL

Vertial

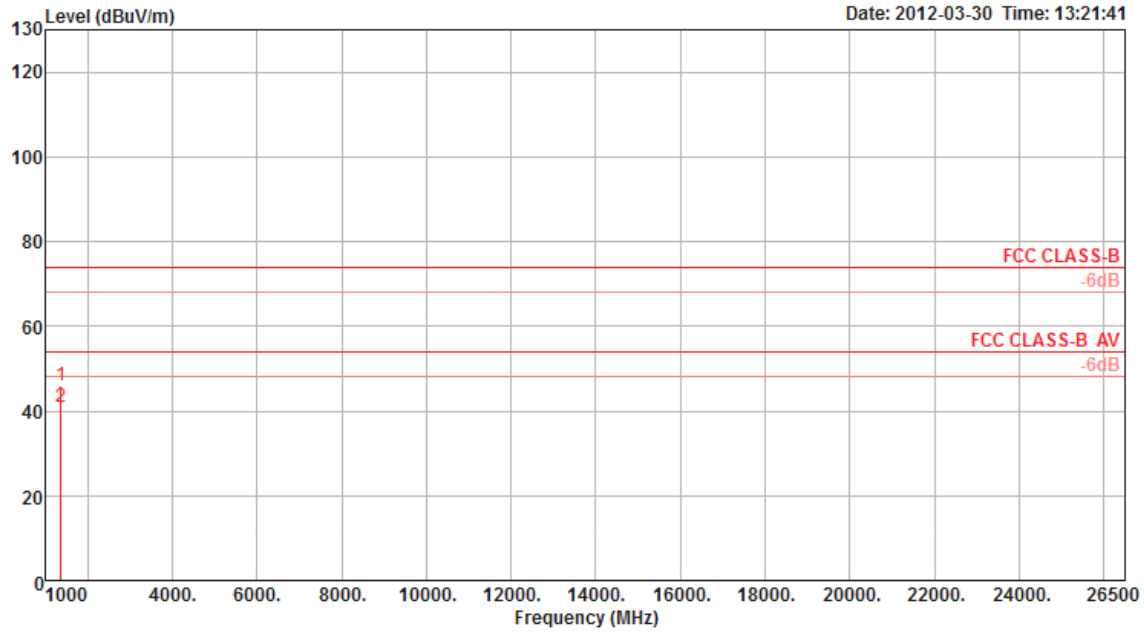

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	1374.98	46.06	74.00	-27.94	53.70	2.15	34.83	25.04	263	100	Peak	VERTICAL
2 a	1374.99	40.78	54.00	-13.22	48.42	2.15	34.83	25.04	263	100	Average	VERTICAL