Appendix C. Co-location

1. Results of Radiated Emissions for Co-located

Temperature	25℃	Humidity	57%
Test Engineer	Magic Lai	Configurations	2.4G + 5G TX

Horizontal

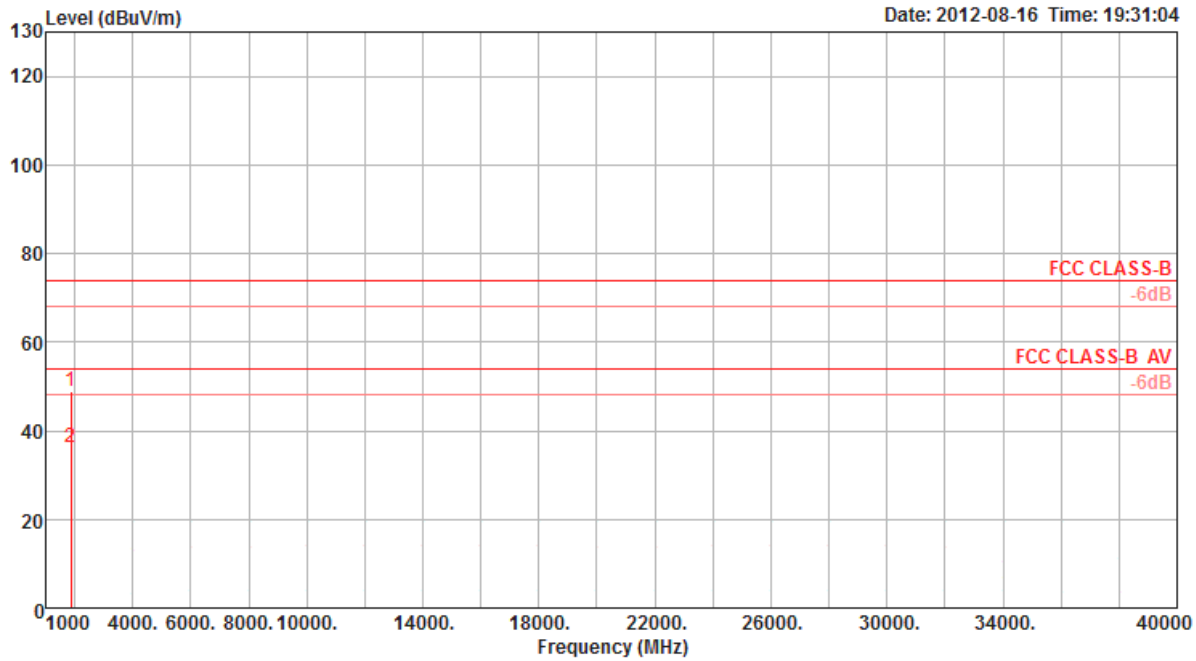

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	T/Pos	A/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			deg	cm
1 p	1878.71	48.95	74.00	-25.05	53.44	2.57	34.84	27.78	Peak	HORIZONTAL	200	100
2 a	1880.03	36.12	54.00	-17.88	40.60	2.57	34.83	27.78	Average	HORIZONTAL	200	100

Vertical

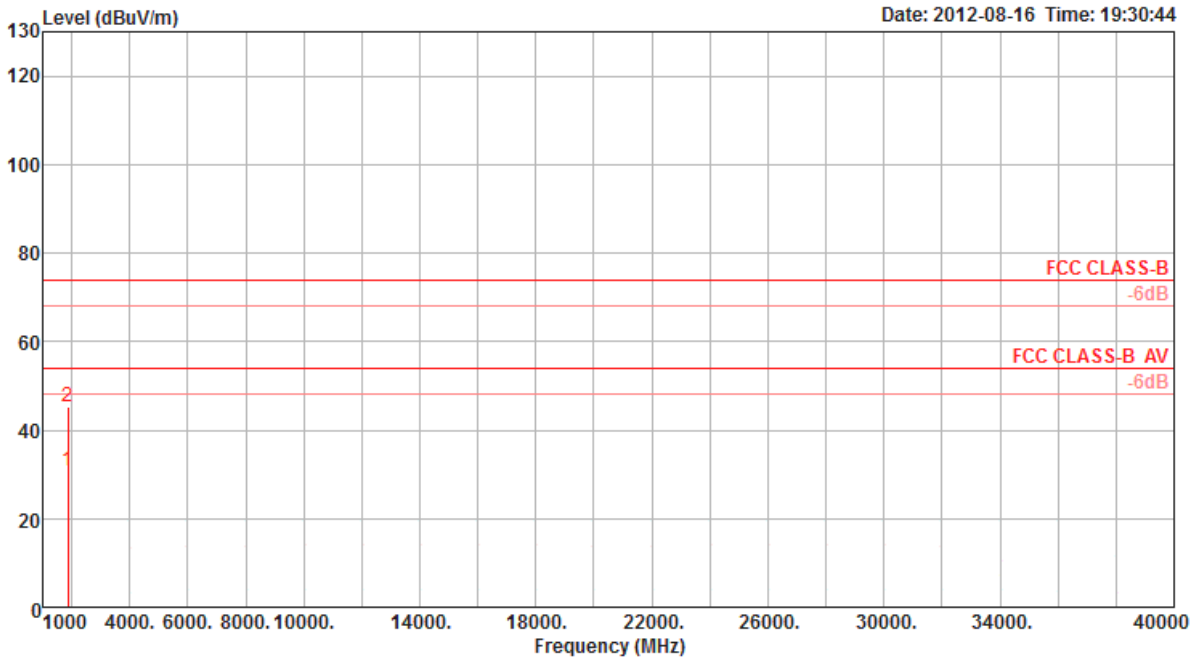

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	T/Pos	A/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			deg	cm
1 a	1878.62	30.70	54.00	-23.30	35.19	2.57	34.84	27.78	Average	VERTICAL	103	100
2 p	1879.38	45.14	74.00	-28.86	49.63	2.57	34.84	27.78	Peak	VERTICAL	103	100