

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Report No.: RFBBQZ-WTW-P25050576-1

FCC ID: PY324400640

Product: Orbi 11BE WiFi 7 Tri-band Router, Orbi 11BE WiFi 7 Tri-band Satellite (refer to item 3.1 for more details)

Brand: NETGEAR

Model No.: RBE771v2

Series Model: RBE770v2 (refer to item 3.1 for more details)

Received Date: 2025/5/27

Test Date: 2025/9/5 ~ 2025/12/9

Issued Date: 2025/12/11

Applicant and Manufacturer: NETGEAR, INC.

Address: 3553 North First Street, San Jose, CA 95134, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan

FCC Registration / 788550 / TW0003

Designation Number:

Approved by:

Jeremy Lin

Date:

2025/12/11

Jeremy Lin / Project Engineer

This test report consists of 150 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Polly Chien / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	9
3.3 Channel List	10
3.4 Test Mode Applicability and Tested Channel Detail	12
3.5 Duty Cycle of Test Signal	14
3.6 Test Program Used and Operation Descriptions	17
3.7 Connection Diagram of EUT and Peripheral Devices	17
3.8 Configuration of Peripheral Devices and Cable Connections	18
4 Test Instruments	19
4.1 26 dB Bandwidth	19
4.2 RF Output Power	19
4.3 Power Spectral Density	19
4.4 6 dB Bandwidth	19
4.5 Occupied Bandwidth	19
4.6 AC Power Conducted Emissions	20
4.7 Unwanted Emissions below 1 GHz	20
4.8 Unwanted Emissions above 1 GHz	21
5 Limits of Test Items	22
5.1 26 dB Bandwidth	22
5.2 RF Output Power	22
5.3 Power Spectral Density	22
5.4 6 dB Bandwidth	22
5.5 Occupied Bandwidth	22
5.6 AC Power Conducted Emissions	23
5.7 Unwanted Emissions below 1 GHz	23
5.8 Unwanted Emissions above 1 GHz	24
6 Test Arrangements	25
6.1 26 dB Bandwidth	25
6.1.1 Test Setup	25
6.1.2 Test Procedure	25
6.2 RF Output Power	26
6.2.1 Test Setup	26
6.2.2 Test Procedure	26
6.3 Power Spectral Density	27
6.3.1 Test Setup	27
6.3.2 Test Procedure	27
6.4 6 dB Bandwidth	27
6.4.1 Test Setup	27
6.4.2 Test Procedure	27
6.5 Occupied Bandwidth	28
6.5.1 Test Setup	28
6.5.2 Test Procedure	28
6.6 AC Power Conducted Emissions	29
6.6.1 Test Setup	29
6.6.2 Test Procedure	29
6.7 Unwanted Emissions below 1 GHz	30
6.7.1 Test Setup	30
6.7.2 Test Procedure	31

6.8	Unwanted Emissions above 1 GHz.....	32
6.8.1	Test Setup	32
6.8.2	Test Procedure	32
7	Test Results of Test Item	33
7.1	26 dB Bandwidth	33
7.2	RF Output Power.....	38
7.3	Power Spectral Density	50
7.4	6 dB Bandwidth	58
7.5	Occupied Bandwidth.....	60
7.6	AC Power Conducted Emissions	66
7.7	Unwanted Emissions below 1 GHz	70
7.8	Unwanted Emissions above 1 GHz.....	74
8	Pictures of Test Arrangements	149
9	Information of the Testing Laboratories	150

Release Control Record

Issue No.	Description	Date Issued
RFBBQZ-WTW-P25050576-1	Original release.	2025/12/11

1 Certificate

Product: Orbi 11BE WiFi 7 Tri-band Router, Orbi 11BE WiFi 7 Tri-band Satellite (refer to item 3.1 for more details)

Brand: NETGEAR

Test Model: RBE771v2

Series Model: RBE770v2 (refer to item 3.1 for more details)

Sample Status: Engineering sample

**Applicant and
Manufacturer:** NETGEAR, INC.

Test Date: 2025/9/5 ~ 2025/12/9

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

**Measurement
procedure:** ANSI C63.10-2020
KDB 789033 D02 General UNII Test Procedure New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(2)	26 dB Bandwidth	Pass	For U-NII-2A U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
---	Occupied Bandwidth	-	Reference only.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -21.03 dB at 0.25400 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -3.3 dB at 392.78 MHz
15.407(b) (1/10) 15.407(b) (2/10) 15.407(b) (3/10) 15.407(b) (4(i)/10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.1 dB at 5150.00 MHz and 5350.00 MHz
15.203	Antenna Requirement	Pass	No antenna connector is used.

Notes:

- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- The "Dynamic Frequency Selection measurement" was recorded in DFS test report.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
26 dB Bandwidth	-	206.5 Hz
RF Output Power	-	1.371 dB
Power Spectral Density	-	1.017 dB
6 dB Bandwidth	-	206.5 Hz
Occupied Bandwidth	-	72 Hz
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.88 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.59 dB
	30 MHz ~ 1 GHz	3.64 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Orbi 11BE WiFi 7 Tri-band Router, Orbi 11BE WiFi 7 Tri-band Satellite
Brand	NETGEAR
Test Model	RBE771v2
Series Model	RBE770v2
Model Difference	Refer to Note
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from adapter
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode 1024QAM for OFDMA in 11ax mode 4096QAM for OFDMA in 11be mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	Up to 4323.5 Mbps
Operating Frequency	5180 ~ 5320 MHz 5500 ~ 5720 MHz 5745 ~ 5825 MHz
Number of Channel	5180 ~ 5320 MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20): 8 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40): 4 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80): 2 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160): 1 5500 ~ 5720 MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20): 12 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40): 6 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80): 3 802.11ac (VHT160), 802.11ax (HE160), 802.11 be (EHT160): 1 802.11 be (EHT240): 1 5745 ~ 5825 MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20): 5 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11 be (EHT40): 2 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80): 1
Output Power	CDD Mode: 5180 ~ 5250 MHz : 857.859 mW (29.33 dBm) 5250 ~ 5320 MHz : 217.140 mW (23.37 dBm) 5500 ~ 5720 MHz : 220.202 mW (23.43 dBm) 5745 ~ 5825 MHz : 868.238 mW (29.39 dBm) Beamforming Mode: 5180 ~ 5250 MHz : 857.859 mW (29.33 dBm) 5250 ~ 5320 MHz : 217.140 mW (23.37 dBm) 5500 ~ 5720 MHz : 220.202 mW (23.43 dBm) 5745 ~ 5825 MHz : 868.238 mW (29.39 dBm)
EUT Category	Indoor Access Point

Note:

1. All models are listed as below.

Product Description	Model	Difference
Orbi 11BE WiFi 7 Tri-band Router	RBE771v2	DFS mode: Master mode (Indoor access point) Four 2.5G Ethernet ports (1WAN+3LAN)
Orbi 11BE WiFi 7 Tri-band Satellite	RBE770v2	DFS mode: Mesh mode (Subordinate device) Two 2.5G Ethernet ports (2LAN)

Note: Since the circuit design and RF characteristics of RBE771v2 and RBE770v2 are the same, it has been verified that the output power will use the same power settings.

2. The EUT uses following accessories.

Item	Brand	Model	Part Number	Specification
AC Adapter 1	NETGEAR	ADS-40FPC-12 12030E	332-11771-01	AC Input : 100-240V, 50/60Hz, 1.0A DC Output : 12.0V, 2.5A, 30.0W DC Output Cable : 1.81M / 0 core Manufacturer : Vietnam Honor High Tech Company Limited
AC Adapter 2	NETGEAR	2AED030FC	332-11774-01	AC Input : 100-240V, 50/60Hz, 1.0A DC Output : 12.0V, 2.5A, 30.0W DC Output Cable : 1.83M / 0 core Manufacturer : CWT
RJ45 Cable	NETGEAR	-	-	Signal Line : 1.97m non-shielded and without core

3. The Device has two source components as list.

Source	Component Position	Component Position(FEM)	Remark
1 st (Main)	DP20, DP21	FEM20, FEM21	Pin to Pin & Same design
2 nd (Option 1)	DP20, DP21	FEM20, FEM21	Pin to Pin & Same design
2 nd (Option 2)	DP20, DP21		Pin to Pin & Same design

*After pretest 1st (Main) source was worst case and chose for final test.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna NO.	Model	Antenna Net Gain(dBi)	Frequency range (MHz)	Antenna Type	Connector Type
1	02129140-08099-2	2.51	2400	Monopole	ipex(MHF)
		2.29	2450		
		2.36	2500		
		3.54	5150		
		3.40	5200		
		3.87	5250		
		3.49	5300		
		3.49	5350		
		3.54	5470		
		4.72	5600		
		4.52	5725		
		4.24	5785		
		4.02	5850		
		3.96	5865		
		4.39	5895		
2	02129140-08099-1	2.67	2400		
		2.91	2450		
		2.93	2500		
		3.39	5150		
		2.99	5200		
		3.40	5250		
		3.12	5300		
		3.06	5350		
		3.24	5470		
		4.37	5600		
		4.02	5725		
		3.72	5785		
		4.07	5850		
		3.98	5865		
		3.59	5895		

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

5 GHz Band			
Modulation Mode	Beamforming Mode	TX & RX Configuration	
802.11a	Not Support	2TX	2RX
802.11n (HT20)	Support	2TX	2RX
802.11n (HT40)	Support	2TX	2RX
802.11ac (VHT20)	Support	2TX	2RX
802.11ac (VHT40)	Support	2TX	2RX
802.11ac (VHT80)	Support	2TX	2RX
802.11ac (VHT160)	Support	2TX	2RX
802.11ax (HE20)	Support	2TX	2RX
802.11ax (HE40)	Support	2TX	2RX
802.11ax (HE80)	Support	2TX	2RX
802.11ax (HE160)	Support	2TX	2RX
802.11be (EHT20)	Support	2TX	2RX
802.11be (EHT40)	Support	2TX	2RX
802.11be (EHT80)	Support	2TX	2RX
802.11be (EHT160)	Support	2TX	2RX
802.11be (EHT240)	Support	2TX	2RX

Note:

1. All of modulation mode support beamforming function except 802.11a modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), 802.11ac mode for 20 MHz (40 MHz, 80 MHz, 160 MHz), 802.11ax mode for 20 MHz (40 MHz, 80 MHz, 160 MHz) and 802.11be mode for 20 MHz (40 MHz, 80 MHz, 160 MHz, 240 MHz), therefore the investigated worst case to representative mode in test report.
4. The EUT device modulation technique OFDMA does not support partial RUs (resource units) and channel puncturing/bandwidth reduction mechanisms.

3.3 Channel List

FOR 5180 ~ 5320 MHz

8 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	52	5260 MHz
40	5200 MHz	56	5280 MHz
44	5220 MHz	60	5300 MHz
48	5240 MHz	64	5320 MHz

4 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	54	5270 MHz
46	5230 MHz	62	5310 MHz

2 channels are provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz

1 straddle channel is provided for 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
50	5250 MHz

FOR 5500 ~ 5720 MHz

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	138	5690 MHz
122	5610 MHz		

1 channel is provided for 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
114	5570 MHz

1 straddle channel is provided for 802.11be (EHT240):

Channel	Frequency
114+138	5610 MHz

FOR 5745 ~ 5825 MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency
155	5775 MHz

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	The AC Adapter has the following models: ADS-40FPC-12 12030E / 2AED030FC. Pre-scan these models of AC Adapters and find the worst case as a representative test condition.
Worst Case:	1. AC Adapter Worst Condition: ADS-40FPC-12 12030E 2. The EUT is usually used standing that and was therefore chosen for Unwanted Emissions.

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
26 dB Bandwidth	A	802.11a	CDD	52, 60, 64, 100, 116, 140, 144	BPSK	6Mb/s
		802.11be (EHT20)	CDD	52, 60, 64, 100, 116, 140, 144	BPSK	MCS0
		802.11be (EHT40)	CDD	54, 62, 102, 110, 134, 142	BPSK	MCS0
		802.11be (EHT80)	CDD	58, 106, 122, 138	BPSK	MCS0
		802.11be (EHT160)	CDD	50, 114	BPSK	MCS0
		802.11be (EHT240)	CDD	114+138	BPSK	MCS0
RF Output Power	A	802.11a	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
		802.11be (EHT20)	CDD & Beamforming	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
		802.11be (EHT40)	CDD & Beamforming	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
		802.11be (EHT80)	CDD & Beamforming	42, 58, 106, 122, 138, 155	BPSK	MCS0
		802.11be (EHT160)	CDD & Beamforming	50, 114	BPSK	MCS0
		802.11be (EHT240)	CDD & Beamforming	114+138	BPSK	MCS0
Power Spectral Density	A	802.11a	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
		802.11be (EHT20)	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
		802.11be (EHT40)	CDD	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
		802.11be (EHT80)	CDD	42, 58, 106, 122, 138, 155	BPSK	MCS0
		802.11be (EHT160)	CDD	50, 114	BPSK	MCS0
		802.11be (EHT240)	CDD	114+138	BPSK	MCS0
6 dB Bandwidth	A	802.11a	CDD	144, 149, 157, 165	BPSK	6Mb/s
		802.11ax (HE20)	CDD	144, 149, 157, 165	BPSK	MCS0
		802.11ax (HE40)	CDD	142, 151, 159	BPSK	MCS0
		802.11ax (HE80)	CDD	138, 155	BPSK	MCS0

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
Occupied Bandwidth	A	802.11a	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
		802.11be (EHT20)	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
		802.11be (EHT40)	CDD	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
		802.11be (EHT80)	CDD	42, 58, 106, 122, 138, 155	BPSK	MCS0
		802.11be (EHT160)	CDD	50, 114	BPSK	MCS0
		802.11be (EHT240)	CDD	114+138	BPSK	MCS0
AC Power Conducted Emissions	A, B	802.11be (EHT40)	CDD	151	BPSK	MCS0
Unwanted Emissions below 1 GHz	A, B	802.11be (EHT40)	CDD	151	BPSK	MCS0
Unwanted Emissions above 1 GHz	A	802.11a	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
		802.11be (EHT20)	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
		802.11be (EHT40)	CDD	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
		802.11be (EHT80)	CDD	42, 58, 106, 122, 138, 155	BPSK	MCS0
		802.11be (EHT160)	CDD	50, 114	BPSK	MCS0
		802.11be (EHT240)	CDD	114+138	BPSK	MCS0
EUT Configure Mode:	A	Model: RBE771v2				
	B	Model: RBE770v2				

3.5 Duty Cycle of Test Signal

802.11a: Duty cycle = 100 ms / 100 ms x 100% = 100.0%


802.11be (EHT20): Duty cycle = 5.488 ms / 5.541 ms x 100% = 99.0%

802.11be (EHT40): Duty cycle = 5.48 ms / 5.58 ms x 100% = 98.2%


802.11be (EHT80): Duty cycle = 5.48 ms / 5.58 ms x 100% = 98.2%

802.11be (EHT160): Duty cycle = 5.48 ms / 5.56 ms x 100% = 98.6%

802.11be (EHT240): Duty cycle = 5.438 ms / 5.477 ms x 100% = 99.3%

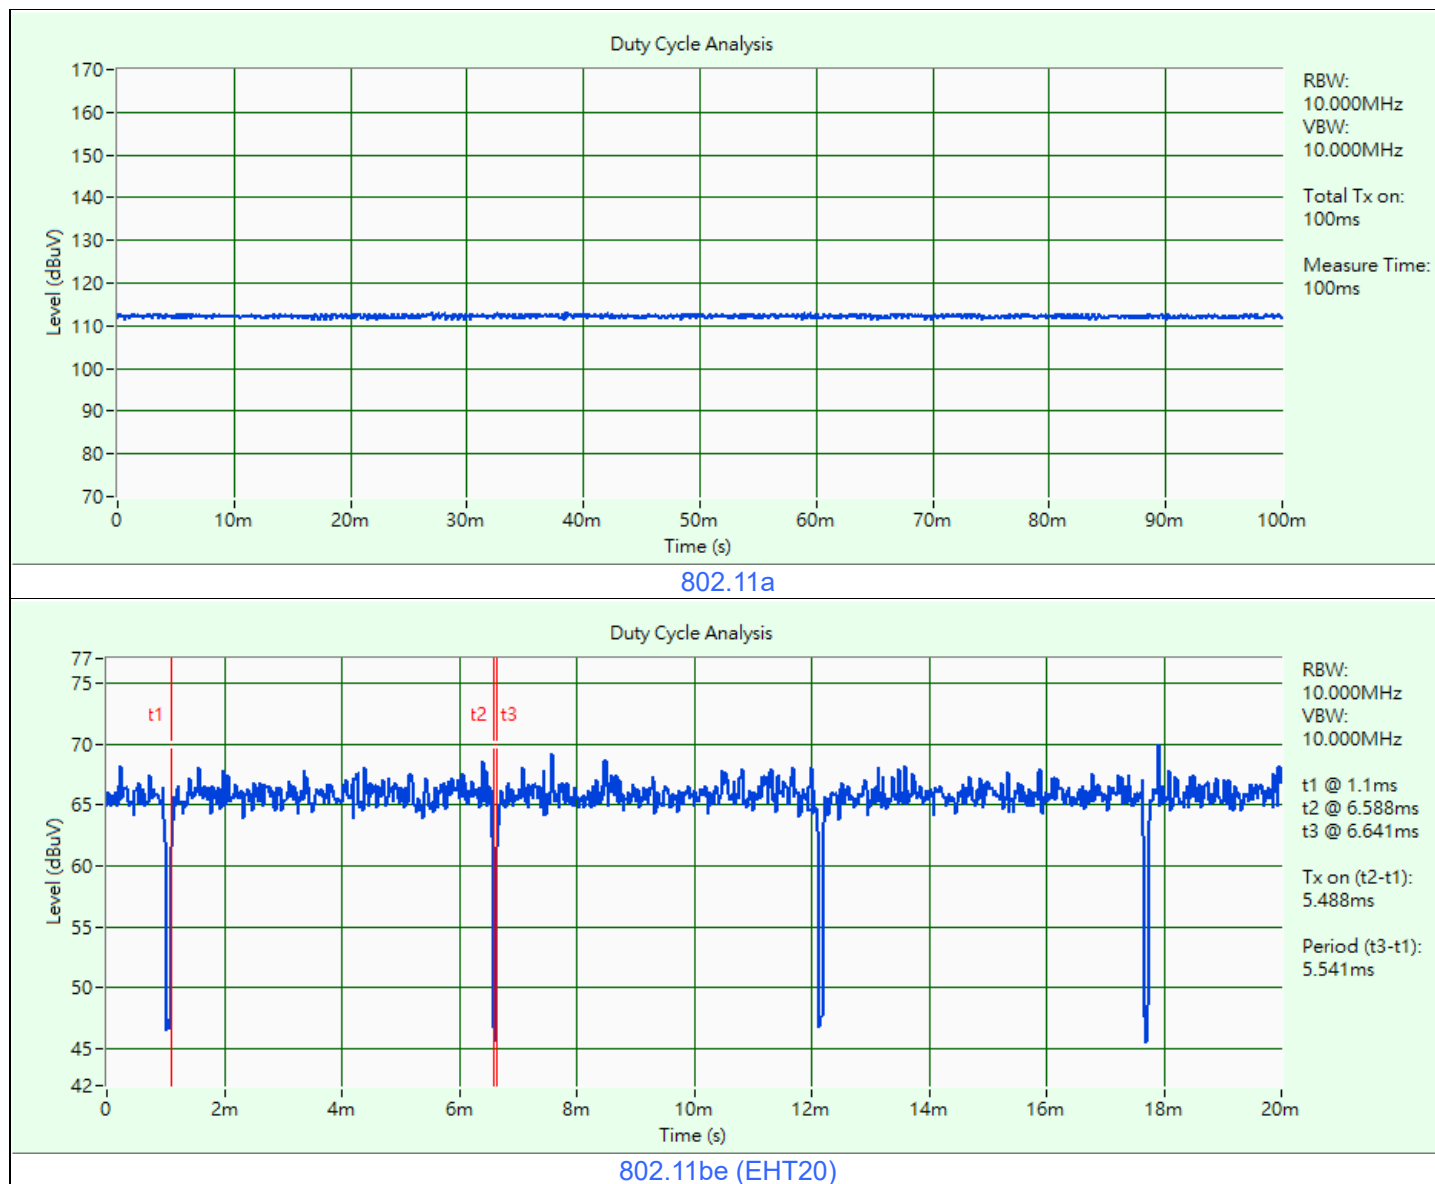


Duty Cycle Analysis

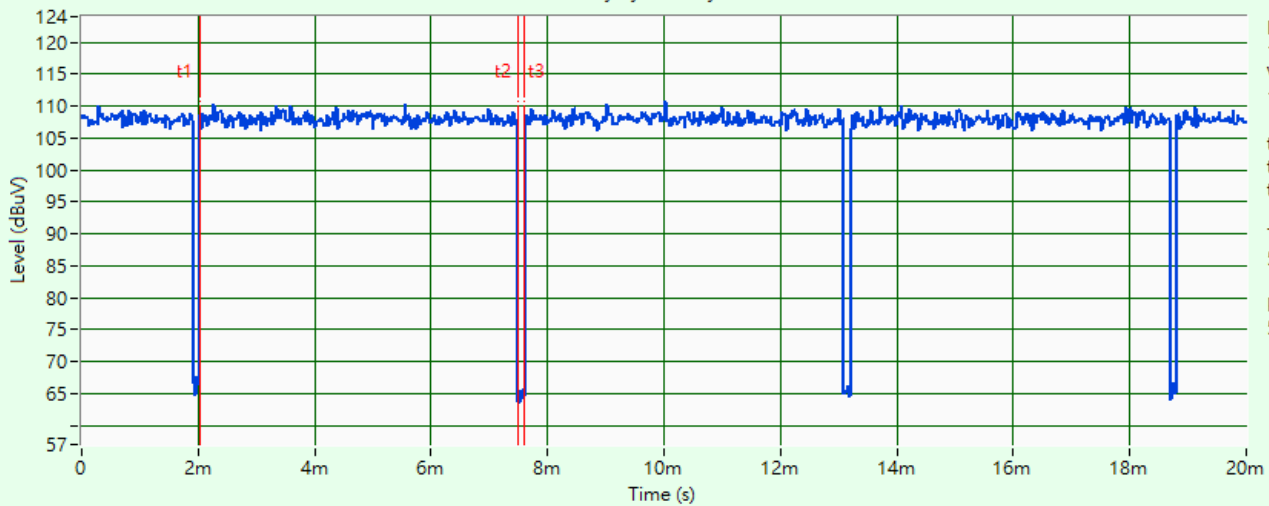


802.11be (EHT40)

Duty Cycle Analysis

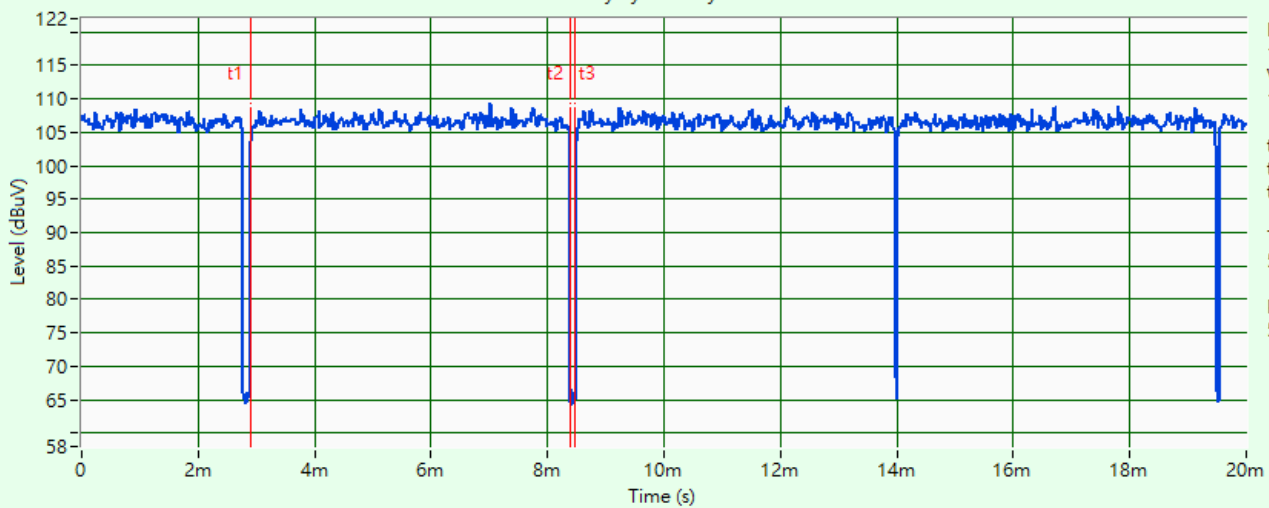


802.11be (EHT80)

Duty Cycle Analysis

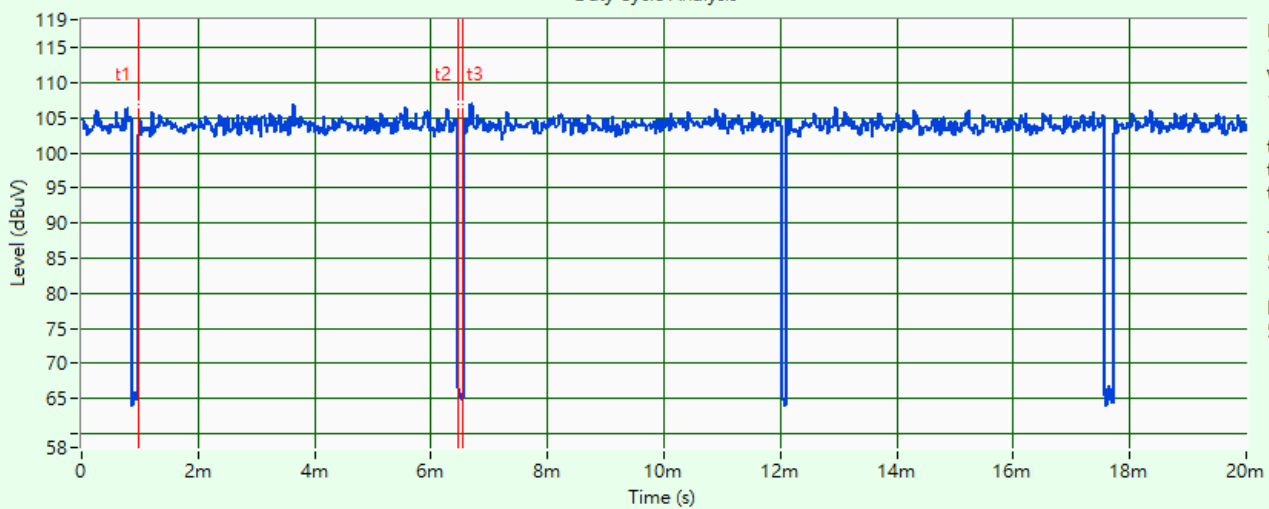

802.11be (EHT160)

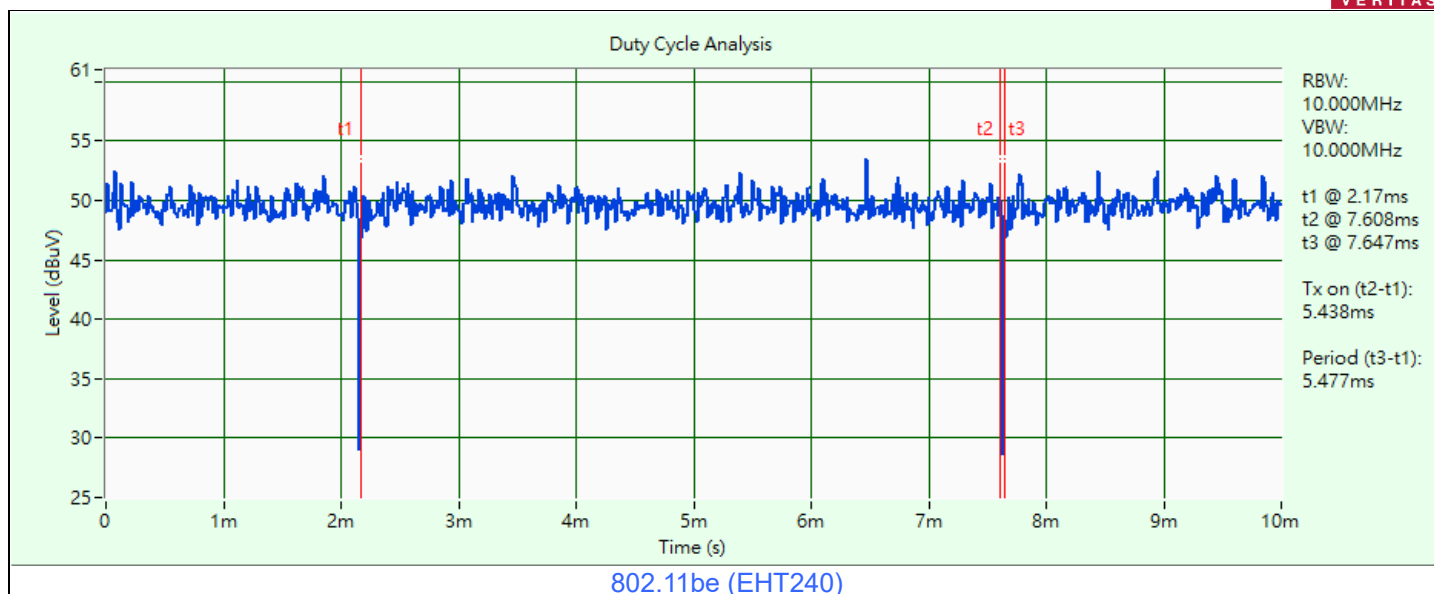


3.6 Test Program Used and Operation Descriptions


Controlling software QPSR_Ver 5.0-00202 has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

Mode A

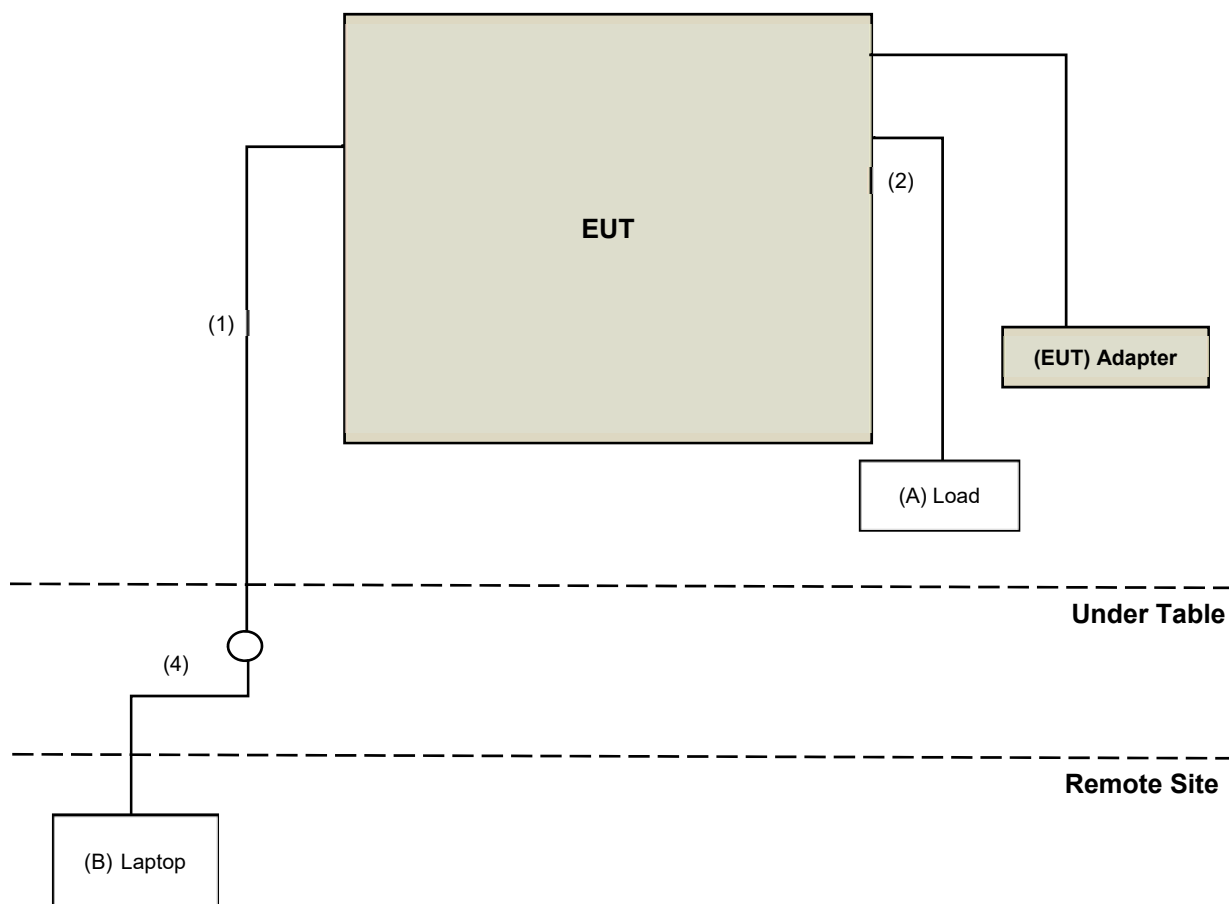

Mode B

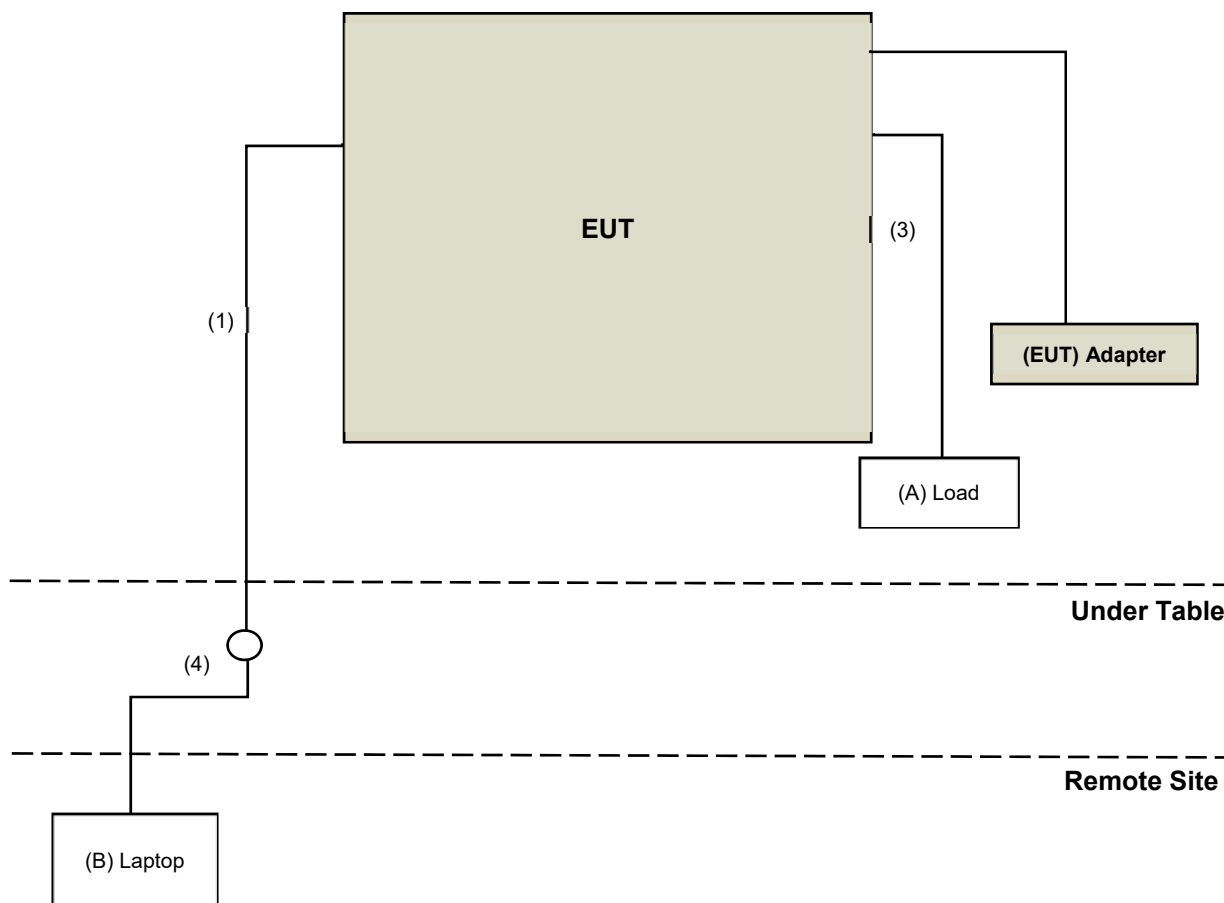

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Load	N/A	N/A	N/A	N/A	Provided by Lab
B	Laptop	DELL	E5430	2RL3YW1	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	RJ-45 Cable	1	0.95	N	0	Accessory of EUT
2	RJ-45 Cable	3	1.5	N	0	Provided by Lab
3	RJ-45 Cable	1	1.5	N	0	Provided by Lab
4	RJ-45 Cable	1	10	N	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 26 dB Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2025/5/23	2026/5/22
Signal & Spectrum Analyzer R&S	FSV3044	101504	2025/6/18	2026/6/17
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2025/10/15 ~ 2025/10/18

4.2 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2025/5/23	2026/5/22
MXA Signal Analyzer Keysight	N9020B	MY60110462	2025/4/22	2026/4/21
Peak Power Analyzer Keysight	8990B	MY51000485	2025/1/20	2026/1/19
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
USB Power Sensor Anritsu	MA24408A	12994	2024/12/4	2025/12/3
Wideband Power Sensor Keysight	N1923A	MY58020002	2025/1/21	2026/1/20
		MY58140009	2025/1/21	2026/1/20

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2025/10/15 ~ 2025/10/18

4.3 Power Spectral Density

Refer to section 4.1 to get the tested date and information of the instruments.

4.4 6 dB Bandwidth

Refer to section 4.1 to get the tested date and information of the instruments.

4.5 Occupied Bandwidth

Refer to section 4.1 to get the tested date and information of the instruments.

4.6 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance	E1-011279	04	2024/11/28	2025/11/27
	E1-011280	05	2024/11/28	2025/11/27
	E1-011311	09	2024/11/28	2025/11/27
DC LISN Schwarzbeck	NNBM 8126G	8126G-069	2024/11/5	2025/11/4
Diode Pulse Limiter Schwarzbeck	VTSD 9561 F-N	01445	2025/4/27	2026/4/26
EMI Test Receiver R&S	ESCI	100613	2024/11/25	2025/11/24
LISN R&S	ENV216	101826	2025/3/24	2026/3/23
	ESH3-Z5	100311	2025/8/28	2026/8/27
RF Coaxial Cable Woken	5D-FB	Cable-cond1-01	2025/1/5	2026/1/4
Software BVADT	BVADT_Cond_ V7.4.1.0	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2025/8/27	2026/8/26

Notes:

1. The test was performed in HY - Conduction 1.
2. Tested Date: 2025/10/3

4.7 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower inn-co GmbH	MA 4000	010303	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-155	2025/9/16	2026/9/15
EMI Test Receiver R&S	ESR3	102782	2024/12/10	2025/12/9
Loop Antenna TESEQ	HLA 6121	45745	2025/9/1	2026/8/31
Preamplifier Agilent	8447D	2944A10631	2025/4/27	2026/4/26
RF Coaxial Cable Woken	8D-FB	Cable-CH4-01	2025/6/30	2026/6/29
Signal & Spectrum Analyzer R&S	FSV3044	101105	2025/2/25	2026/2/24
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 3.
2. Tested Date: 2025/10/7

4.8 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower inn-co GmbH	MA 4000	010303	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	5	N/A	N/A
EMI Test Receiver R&S	ESR3	102782	2024/12/10	2025/12/9
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-408	2024/11/10	2025/11/9
			2025/11/9	2026/11/8
	BBHA 9170	9170-480	2024/11/10	2025/11/9
			2025/11/9	2026/11/8
		BBHA9170241	2024/10/18	2025/10/17
			2025/10/28	2026/10/27
		BBHA9170243	2024/11/10	2025/11/9
			2025/11/9	2026/11/8
Preamplifier EMCI	EMC 184045	980116	2024/9/24	2025/9/23
Preamplifier Keysight	83017A	MY53270295	2025/4/27	2026/4/26
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2025/6/30	2026/6/29
	EMC102-KM-KM-3000	150929	2025/6/30	2026/6/29
RF Coaxial Cable HUBER+SUHNER	EMC104-SM-SM-10000	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-4)	2025/4/27	2026/4/26
	SUCOFLEX 104	Cable-CH4-03(250724)	2025/4/27	2026/4/26
Signal & Spectrum Analyzer R&S	FSV3044	101105	2025/2/25	2026/2/24
Software BV ADT	ADT_Radiated_V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 3.
2. Tested Date: 2025/9/5 ~ 2025/10/17 & 2025/12/9

5 Limits of Test Items

5.1 26 dB Bandwidth

The results are for reference only.

5.2 RF Output Power

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Points	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Client devices	250mW (24 dBm)

Operation Band	Limit
U-NII-2A	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = 5 log(N_{ANT}/N_{SS}) dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = 10 log(N_{ANT}/N_{SS}) dB.

5.3 Power Spectral Density

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	17 dBm/MHz
	Fixed point-to-point Access Points	
	Indoor Access Point	
	Client devices	11 dBm/MHz

Operation Band	Limit
U-NII-2A	11 dBm/MHz
U-NII-2C	11 dBm/MHz
U-NII-3	30 dBm/500 kHz

5.4 6 dB Bandwidth

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.5 Occupied Bandwidth

The results are for reference only.

5.6 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.7 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.8 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To	Limit	
789033 D02 General UNII Test Procedure New Rules v02r01	Field Strength at 3 m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)

For transmitters operating in the 5.15-5.25 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.25-5.35 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(2)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.47-5.725 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(3)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.725-5.850 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1}	PK: 68.2 (dBμV/m) ^{*1}
	PK: 10 (dBm/MHz) ^{*2}	PK: 105.2 (dBμV/m) ^{*2}
	PK: 15.6 (dBm/MHz) ^{*3}	PK: 110.8 (dBμV/m) ^{*3}
	PK: 27 (dBm/MHz) ^{*4}	PK: 122.2 (dBμV/m) ^{*4}

^{*1} beyond 75 MHz or more above of the band edge.

^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30 P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

6 Test Arrangements

6.1 26 dB Bandwidth

6.1.1 Test Setup




6.1.2 Test Procedure

- a. Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = peak.
- d. Trace mode = max-hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

6.2 RF Output Power

6.2.1 Test Setup



For channel straddling:



6.2.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

For channel straddling:


Method SA-1

- Set span to encompass the entire 99% OBW of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS.
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging (rms) mode.
- Compute power by integrating the spectrum across the 99% OBW of the signal using the instrument's band-power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band-power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 99% OBW of the spectrum.
- Record the max value.

Note: When measuring straddle channel power, use compute power by integrating the spectrum across the 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the 99% OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 99% OBW of the spectrum.

6.3 Power Spectral Density

6.3.1 Test Setup



6.3.2 Test Procedure

For specified measurement bandwidth 1 MHz:

Method SA-1

- Set span to encompass the entire 99% OBW of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS.
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value


For specified measurement bandwidth 500 kHz:

Method SA-1

- Set span to encompass the entire 99% OBW of the signal
- Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS.
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where $\text{BWCF} = 10\log(500 \text{ kHz}/300 \text{ kHz})$.
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value.

6.4 6 dB Bandwidth

6.4.1 Test Setup




6.4.2 Test Procedure

- Set RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.5 Occupied Bandwidth

6.5.1 Test Setup




6.5.2 Test Procedure

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a. The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level.
- d. Step a) through step c) might require iteration to adjust within the specified range.
- e. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

6.6 AC Power Conducted Emissions

6.6.1 Test Setup

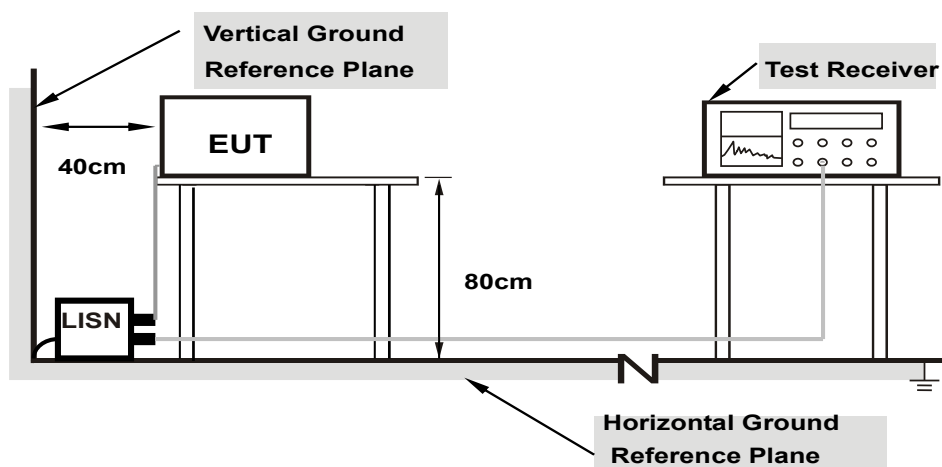

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure


- Exploratory ac power-line conducted emission measurements: The EUT shall be operated on the mid channel and in the mode with highest output power unless the fundamental operates in the AC power-line emission test range then the EUT shall be operated in the range of typical modes of operation.
- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.7 Unwanted Emissions below 1 GHz

6.7.1 Test Setup

For Radiated emission below 30 MHz

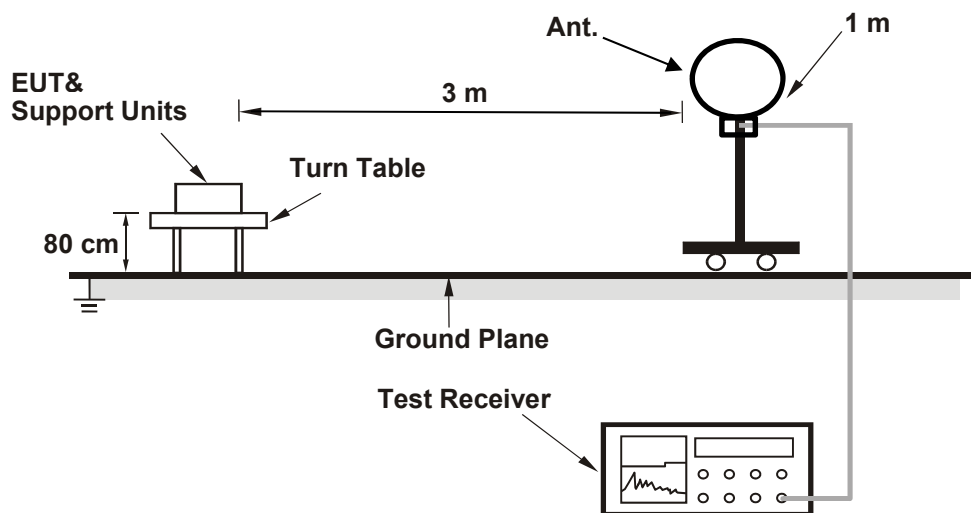

For Radiated emission above 30 MHz

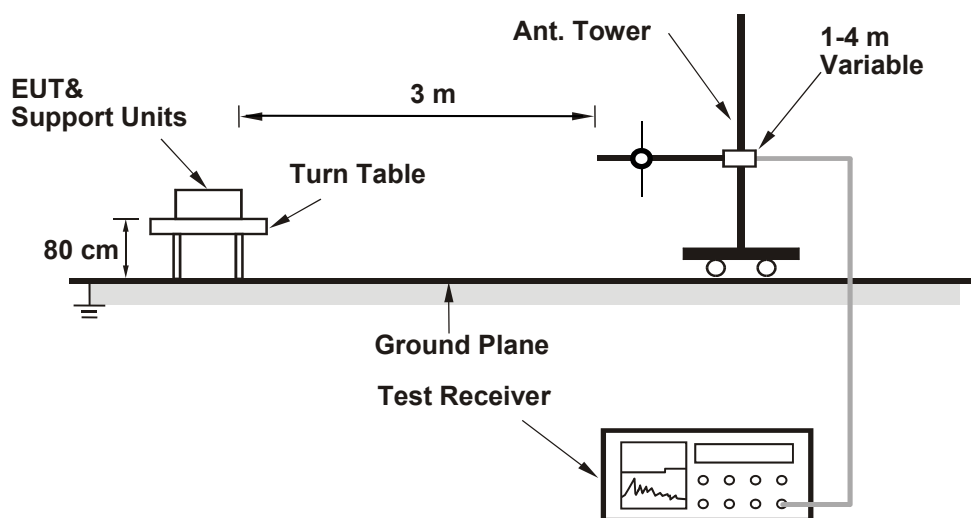

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-peak(QP) detect function, Average(AV) detect function, Peak(PK) detect function and specified bandwidth with maximum hold mode when the test frequencies less than or equal to 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.8 Unwanted Emissions above 1 GHz

6.8.1 Test Setup

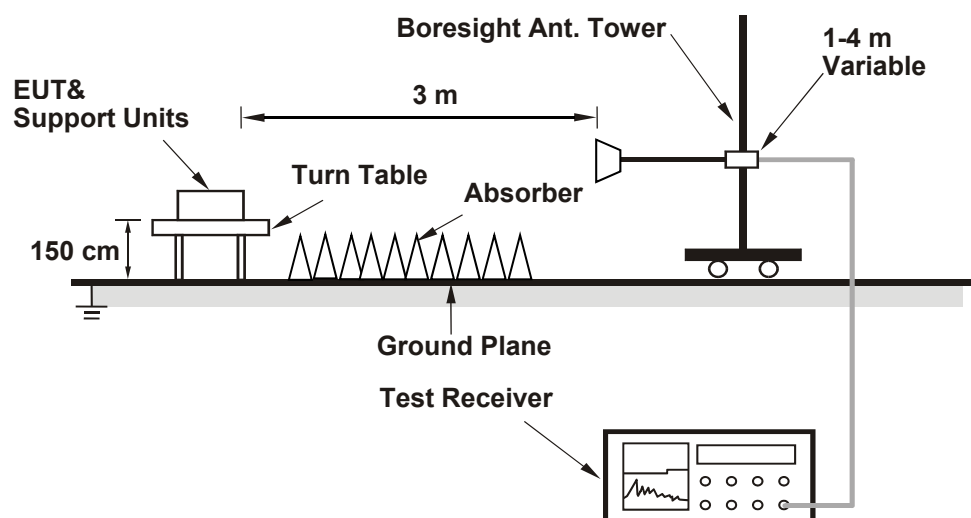

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 26 dB Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Match Tsui
---------------------------	--------------	------------	------------

802.11a

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	23.05	22.83
60	5300	23.27	22.85
64	5320	22.88	22.84
100	5500	23.39	23.39
116	5580	23.26	23.26
140	5700	23.06	23.05
144 (U-NII-2C)	5720	16.49	16.46
144 (U-NII-3)	5720	6.79	6.52

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
52	5260	22.83	24.58 > 24
60	5300	22.85	24.58 > 24
64	5320	22.84	24.58 > 24
100	5500	23.39	24.69 > 24
116	5580	23.26	24.66 > 24
140	5700	23.05	24.62 > 24
144 (U-NII-2C)	5720	16.46	23.16 < 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT20)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	24.16	24.45
60	5300	23.93	23.94
64	5320	24.62	24.50
100	5500	24.67	24.99
116	5580	24.75	24.97
140	5700	24.77	24.58
144 (U-NII-2C)	5720	17.72	17.77
144 (U-NII-3)	5720	7.28	7.14

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
52	5260	24.16	24.83 > 24
60	5300	23.93	24.78 > 24
64	5320	24.50	24.89 > 24
100	5500	24.67	24.92 > 24
116	5580	24.75	24.93 > 24
140	5700	24.58	24.9 > 24
144 (U-NII-2C)	5720	17.72	23.48 < 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT40)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
54	5270	45.26	45.23
62	5310	45.93	45.23
102	5510	44.98	45.28
110	5550	44.69	44.67
134	5670	45.02	44.77
142 (U-NII-2C)	5710	37.30	37.32
142 (U-NII-3)	5710	7.13	7.13

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
54	5270	45.23	27.55 > 24
62	5310	45.23	27.55 > 24
102	5510	44.98	27.53 > 24
110	5550	44.67	27.5 > 24
134	5670	44.77	27.5 > 24
142 (U-NII-2C)	5710	37.30	26.71 > 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT80)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
58	5290	88.31	89.93
106	5530	89.02	88.91
122	5610	87.97	89.47
138 (U-NII-2C)	5690	79.95	80.10
138 (U-NII-3)	5690	9.02	8.73

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
58	5290	88.31	30.46 > 24
106	5530	88.91	30.48 > 24
122	5610	87.97	30.44 > 24
138 (U-NII-2C)	5690	79.95	30.02 > 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT160)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1)	5250	89.06	89.00
50 (U-NII-2A)	5250	88.38	87.76
114	5570	176.18	176.55

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
50 (U-NII-2A)	5250	87.76	30.43 > 24
114	5570	176.18	33.45 > 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.







802.11be (EHT240)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
114+138 (U-NII-2C)	5610	250.45	251.65
114+138 (U-NII-3)	5610	12.42	15.21

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
114+138 (U-NII-2C)	5610	250.45	34.98 > 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

Spectrum Plot of Minimum Value

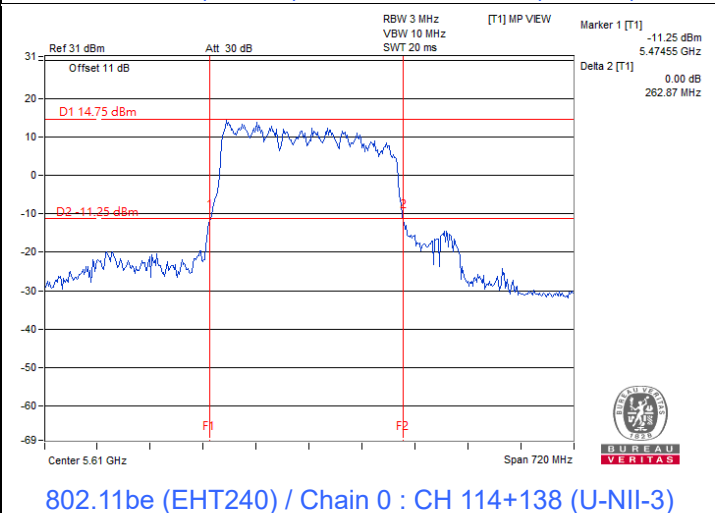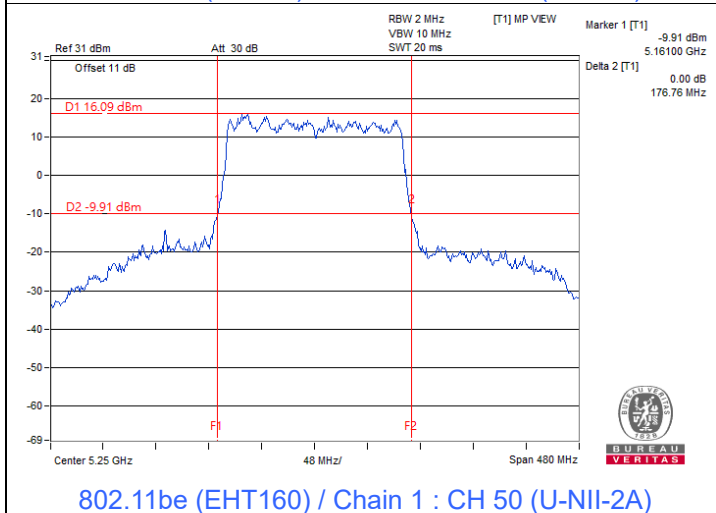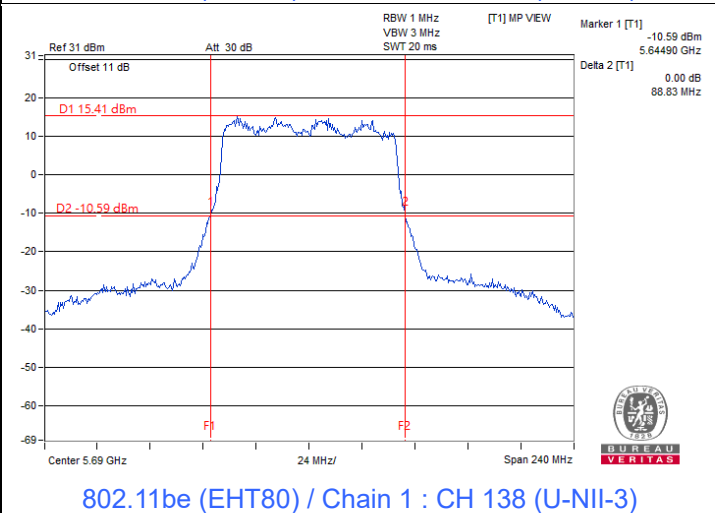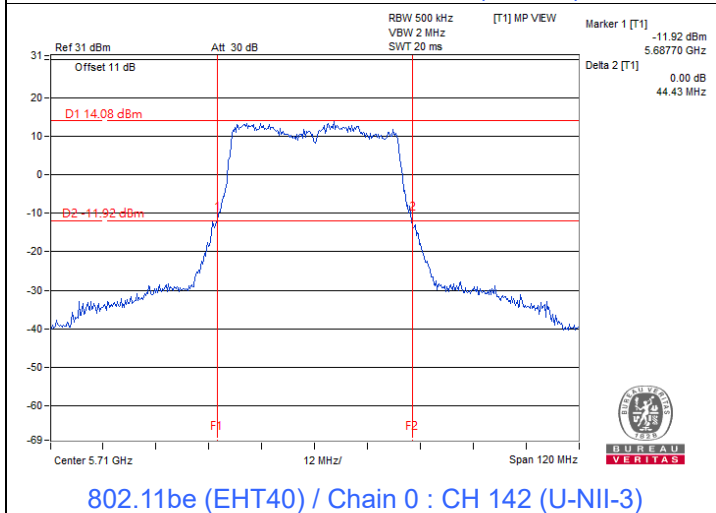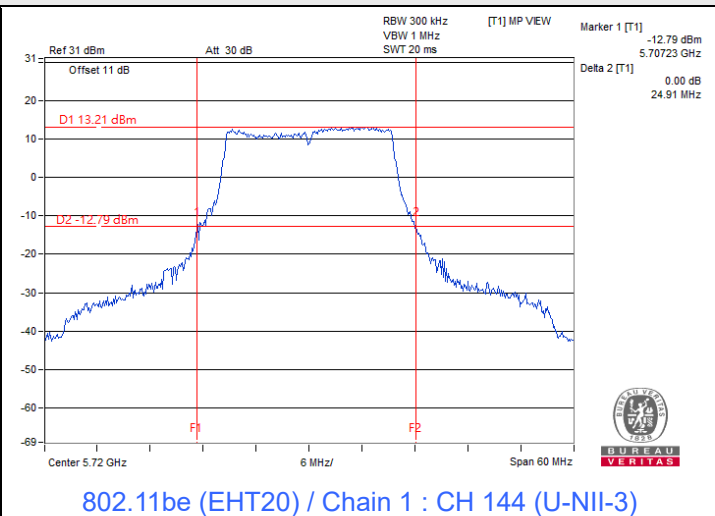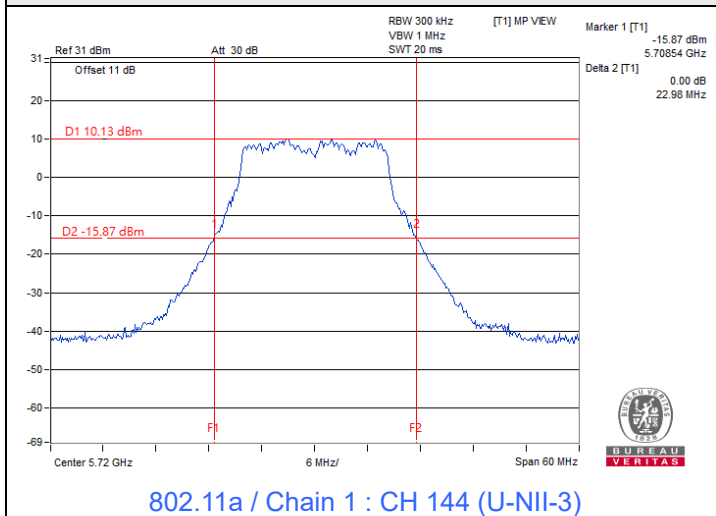

Notes:

1. For U-NII-2C straddle channel = 5725 MHz - Marker 1
2. For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz
3. For U-NII-1 straddle channel = 5250 MHz - Marker 1
4. For U-NII-2A straddle channel = Marker 1 + Delta 2 - 5250 MHz

7.2 RF Output Power

Environmental Conditions:	25°C, 60% RH	Tested By:	Match Tsui
---------------------------	--------------	------------	------------

802.11a CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
36	5180	25.72	26.58	828.238	29.18	30	Pass
40	5200	25.79	26.59	835.352	29.22	30	Pass
48	5240	25.69	26.49	816.337	29.12	30	Pass
52	5260	19.83	20.32	203.808	23.09	24	Pass
60	5300	19.75	20.42	204.56	23.11	24	Pass
64	5320	19.66	20.41	202.37	23.06	24	Pass
100	5500	19.71	20.38	202.685	23.07	24	Pass
116	5580	19.66	20.44	203.132	23.08	24	Pass
140	5700	20.07	20.42	211.779	23.26	24	Pass
*144 (U-NII-2C)	5720	15.86	16.52	83.422	19.21	23.16	Pass
*144 (U-NII-3)	5720	10.15	10.77	22.291	13.48	30	Pass
149	5745	26.23	26.22	838.553	29.24	30	Pass
157	5785	26.28	26.24	845.346	29.27	30	Pass
165	5825	26.24	26.23	840.486	29.25	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.87 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.87 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 4.72 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 4.52 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
36	5180	25.90	26.71	857.859	29.33	30	Pass
40	5200	25.81	26.41	818.588	29.13	30	Pass
48	5240	25.78	26.35	809.962	29.08	30	Pass
52	5260	20.22	20.49	217.140	23.37	24	Pass
60	5300	19.94	20.55	212.129	23.27	24	Pass
64	5320	19.73	20.61	209.052	23.20	24	Pass
100	5500	20.01	20.75	219.081	23.41	24	Pass
116	5580	19.77	20.88	217.303	23.37	24	Pass
140	5700	20.06	20.33	209.286	23.21	24	Pass
*144 (U-NII-2C)	5720	18.34	18.89	145.68	21.63	23.48	Pass
*144 (U-NII-3)	5720	14.22	14.75	56.278	17.50	30	Pass
149	5745	26.32	26.35	860.068	29.35	30	Pass
157	5785	26.02	26.29	825.543	29.17	30	Pass
165	5825	26.72	25.99	867.086	29.38	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.87 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.87 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 4.72 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 4.52 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT40) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
38	5190	21.30	21.71	283.148	24.52	30	Pass
46	5230	25.49	26.35	785.516	28.95	30	Pass
54	5270	19.97	20.59	213.863	23.30	24	Pass
62	5310	19.81	20.52	208.439	23.19	24	Pass
102	5510	19.85	20.29	203.511	23.09	24	Pass
110	5550	19.78	20.41	204.961	23.12	24	Pass
134	5670	19.80	20.33	203.394	23.08	24	Pass
*142 (U-NII-2C)	5710	19.53	19.56	180.108	22.56	24	Pass
*142 (U-NII-3)	5710	9.04	9.00	15.96	12.03	30	Pass
151	5755	26.14	26.60	868.238	29.39	30	Pass
159	5795	25.98	26.23	816.037	29.12	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.87 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.87 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 4.72 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 4.52 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT80) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
42	5210	20.81	21.49	261.432	24.17	30	Pass
58	5290	19.80	20.33	203.394	23.08	24	Pass
106	5530	20.12	20.68	219.752	23.42	24	Pass
122	5610	19.69	20.41	203.011	23.08	24	Pass
*138 (U-NII-2C)	5690	19.55	20.07	191.782	22.83	24	Pass
*138 (U-NII-3)	5690	4.69	5.65	6.617	8.21	30	Pass
155	5775	26.02	26.23	819.704	29.14	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.87 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.87 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 4.72 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 4.52 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT160) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
*50 (U-NII-1)	5250	17.20	18.24	119.161	20.76	30	Pass
*50 (U-NII-2A)	5250	16.46	17.49	100.364	20.02	24	Pass
114	5570	20.07	20.74	220.202	23.43	24	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.87 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.87 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 4.72 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT240) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
*114+138 (U-NII-2C)	5610	17.86	17.01	111.328	20.47	24	Pass
*114+138 (U-NII-3)	5610	-9.09	-12.62	0.17801	-7.50	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-2C, the maximum gain is 4.72 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 4.52 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
36	5180	25.90	26.71	857.859	29.33	30	Pass
40	5200	25.81	26.41	818.588	29.13	30	Pass
48	5240	25.78	26.35	809.962	29.08	30	Pass
52	5260	20.22	20.49	217.14	23.37	24	Pass
60	5300	19.94	20.55	212.129	23.27	24	Pass
64	5320	19.73	20.61	209.052	23.20	24	Pass
100	5500	20.01	20.75	219.081	23.41	23.78	Pass
116	5580	19.77	20.88	217.303	23.37	23.78	Pass
140	5700	20.06	20.33	209.286	23.21	23.78	Pass
*144 (U-NII-2C)	5720	18.34	18.89	145.68	21.63	23.26	Pass
*144 (U-NII-3)	5720	14.22	14.75	56.278	17.50	29.79	Pass
149	5745	26.32	26.35	860.068	29.35	29.79	Pass
157	5785	26.02	26.29	825.543	29.17	29.79	Pass
165	5825	26.72	25.99	867.086	29.38	29.79	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-1, the directional gain is 5.85 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the directional gain is 6.22 dBi $>$ 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.22-6)].
- For U-NII-3, the directional gain is 6.21 dBi $>$ 6 dBi, so the output power limit shall be reduced to $30-(6.21-6) = 29.79$ dBm.

802.11be (EHT40) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
38	5190	21.30	21.71	283.148	24.52	30	Pass
46	5230	25.49	26.35	785.516	28.95	30	Pass
54	5270	19.97	20.59	213.863	23.30	24	Pass
62	5310	19.81	20.52	208.439	23.19	24	Pass
102	5510	19.85	20.29	203.511	23.09	23.78	Pass
110	5550	19.78	20.41	204.961	23.12	23.78	Pass
134	5670	19.80	20.33	203.394	23.08	23.78	Pass
*142 (U-NII-2C)	5710	19.53	19.56	180.108	22.56	23.78	Pass
*142 (U-NII-3)	5710	9.04	9.00	15.96	12.03	29.79	Pass
151	5755	26.14	26.60	868.238	29.39	29.79	Pass
159	5795	25.98	26.23	816.037	29.12	29.79	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-1, the directional gain is 5.85 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the directional gain is 6.22 dBi $>$ 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.22-6)].
- For U-NII-3, the directional gain is 6.21 dBi $>$ 6 dBi, so the output power limit shall be reduced to $30-(6.21-6) = 29.79$ dBm.

802.11be (EHT80) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
42	5210	20.81	21.49	261.432	24.17	30	Pass
58	5290	19.80	20.33	203.394	23.08	24	Pass
106	5530	20.12	20.68	219.752	23.42	23.78	Pass
122	5610	19.69	20.41	203.011	23.08	23.78	Pass
*138 (U-NII-2C)	5690	19.55	20.07	191.782	22.83	23.78	Pass
*138 (U-NII-3)	5690	4.69	5.65	6.617	8.21	29.79	Pass
155	5775	26.02	26.23	819.704	29.14	29.79	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-1, the directional gain is 5.85 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the directional gain is 6.22 dBi $>$ 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.22-6)].
- For U-NII-3, the directional gain is 6.21 dBi $>$ 6 dBi, so the output power limit shall be reduced to $30 - (6.21 - 6) = 29.79$ dBm.

802.11be (EHT160) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
*50 (U-NII-1)	5250	17.20	18.24	119.161	20.76	30	Pass
*50 (U-NII-2A)	5250	16.46	17.49	100.364	20.02	24	Pass
114	5570	20.07	20.74	220.202	23.43	23.78	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-1, the directional gain is 5.85 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the directional gain is 6.22 dBi $>$ 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.22-6)].


802.11be (EHT240) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
*114+138 (U-NII-2C)	5610	17.86	17.01	111.328	20.47	23.78	Pass
*114+138 (U-NII-3)	5610	-9.09	-12.62	0.17801	-7.50	29.79	Pass


Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-2C, the directional gain is 6.22 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.22-6)].
- For U-NII-3, the directional gain is 6.21 dBi > 6 dBi, so the output power limit shall be reduced to $30-(6.21-6) = 29.79$ dBm.


Spectrum Plot for channel straddling

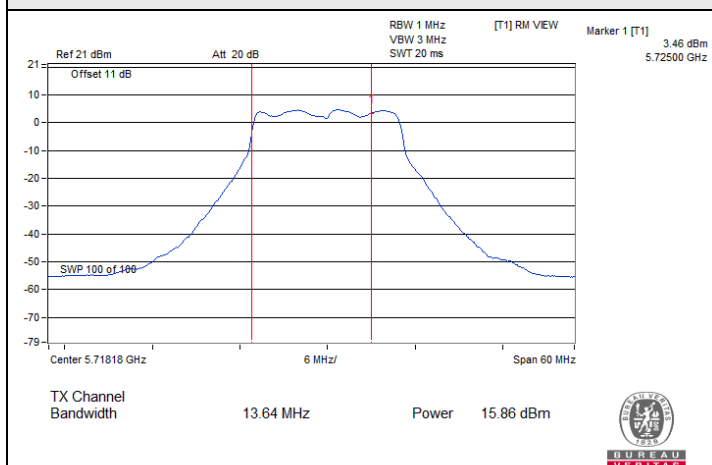


802.11a / Chain 0 : CH 144 (U-NII-2C)

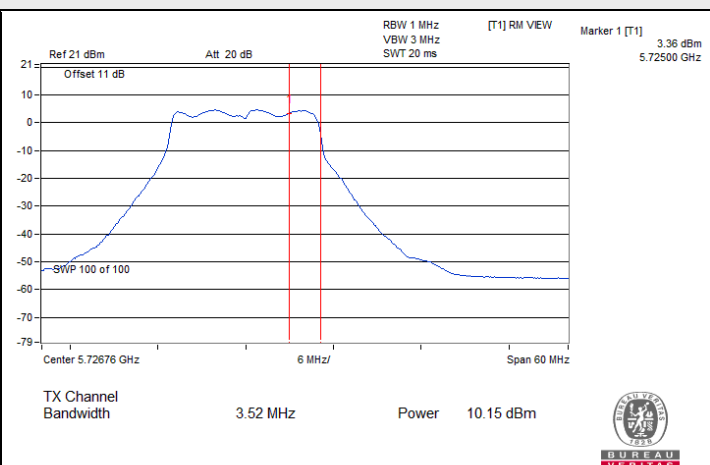


802.11a / Chain 0 : CH 144 (U-NII-3)

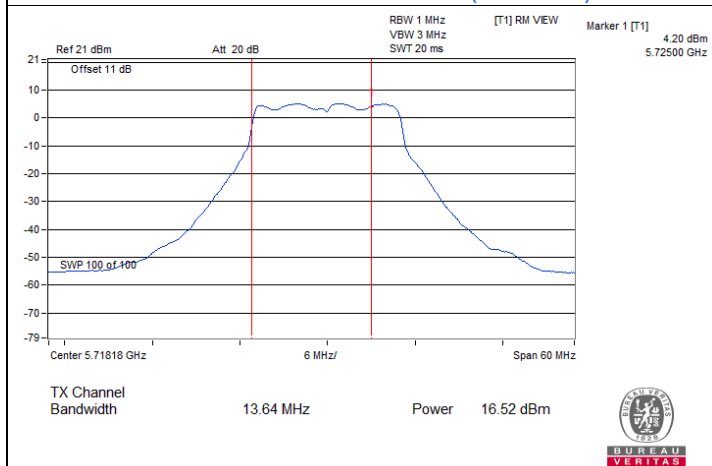


802.11a / Chain 1 : CH 144 (U-NII-2C)

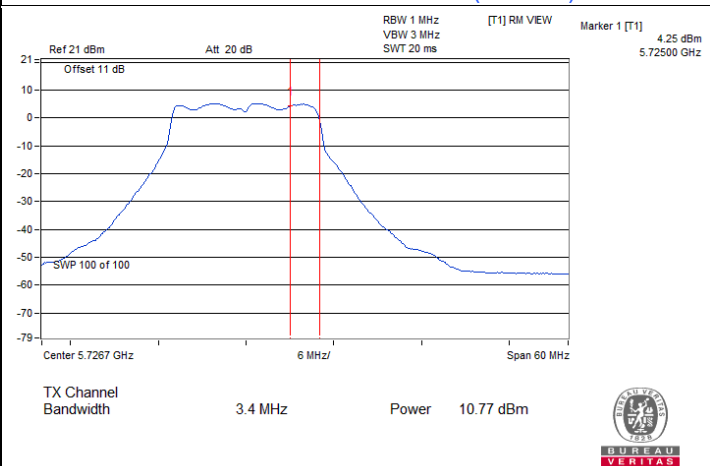

802.11a / Chain 1 : CH 144 (U-NII-3)






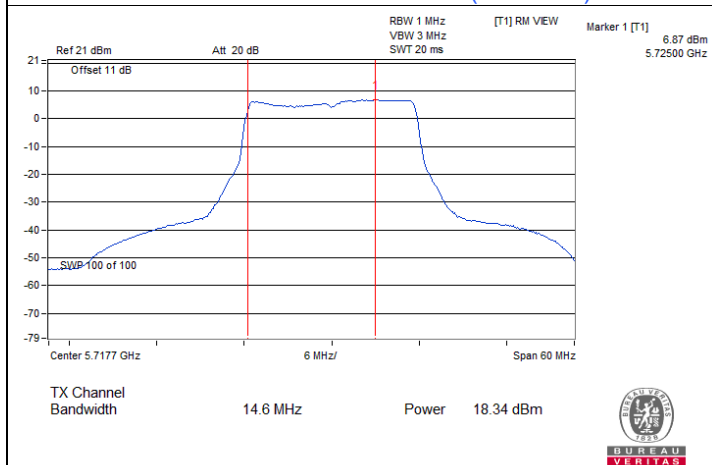


802.11be (EHT20) / Chain 0 : CH 144 (U-NII-2C)

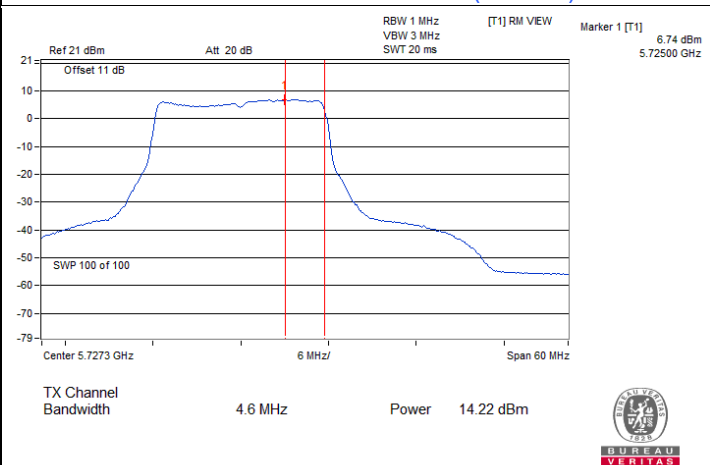


802.11be (EHT20) / Chain 0 : CH 144 (U-NII-3)


Spectrum Plot for channel straddling

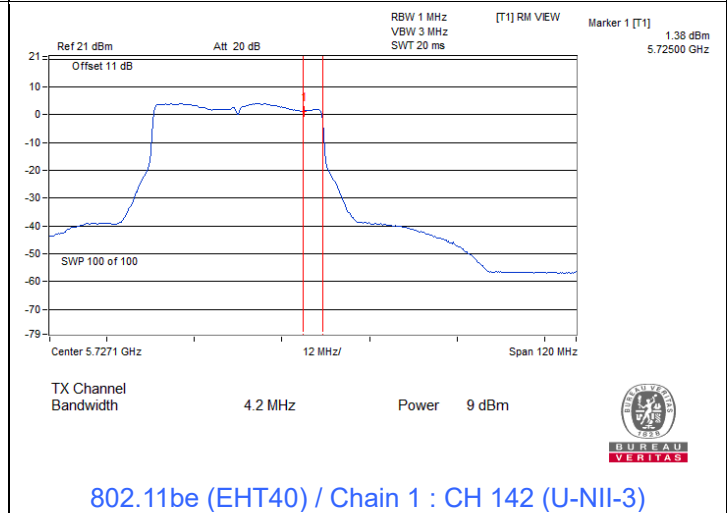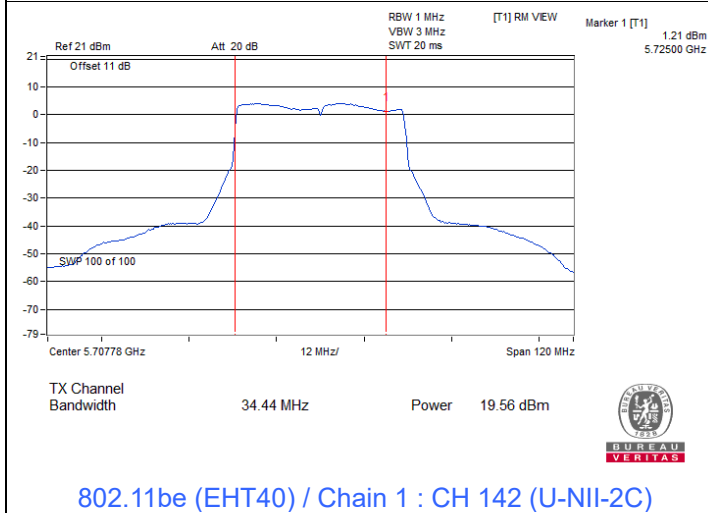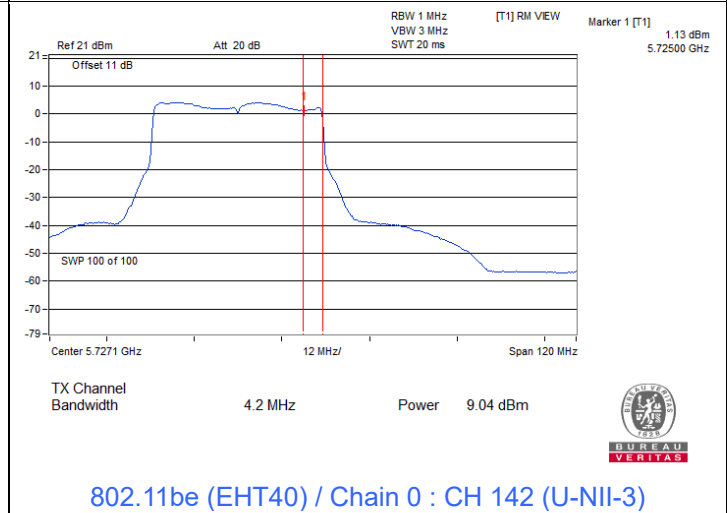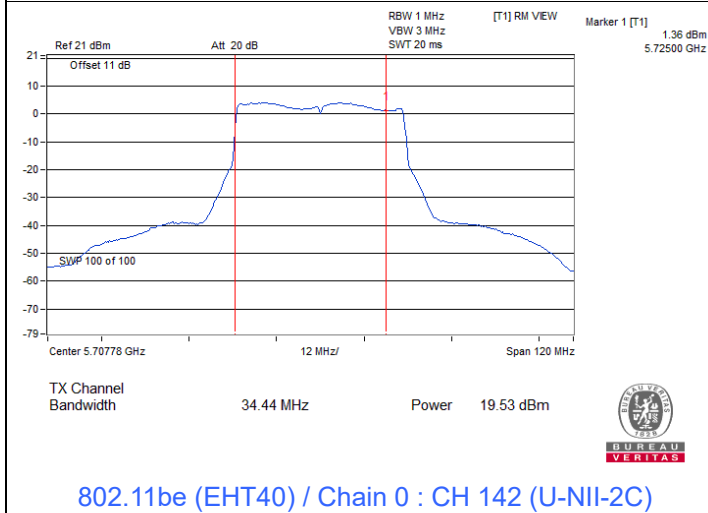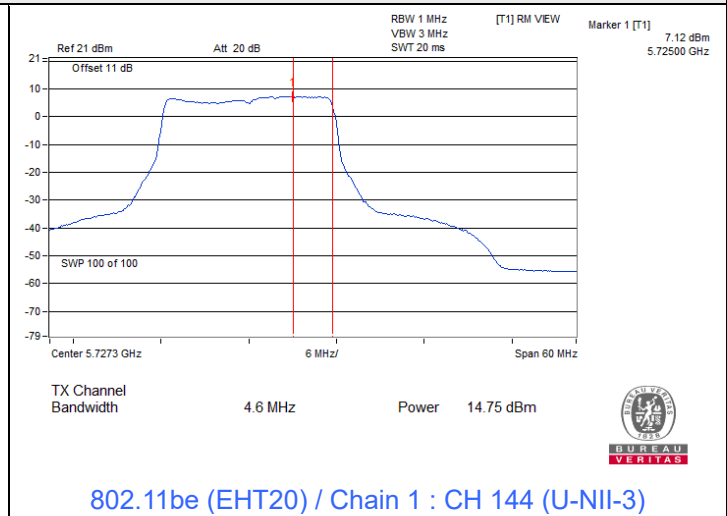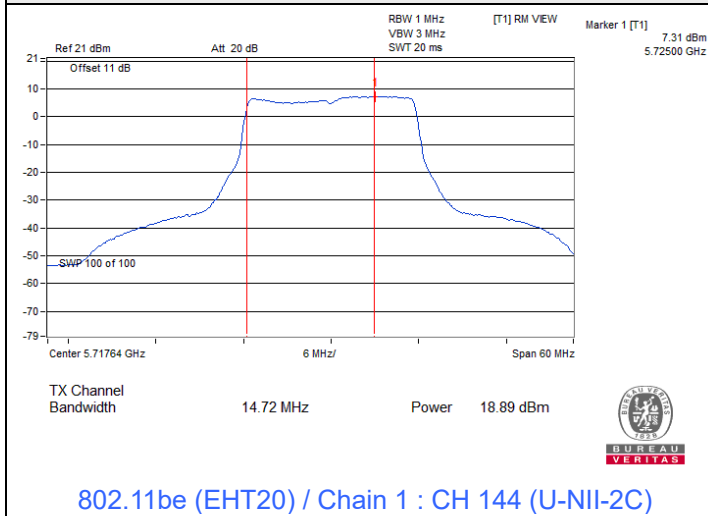


Spectrum Plot for channel straddling

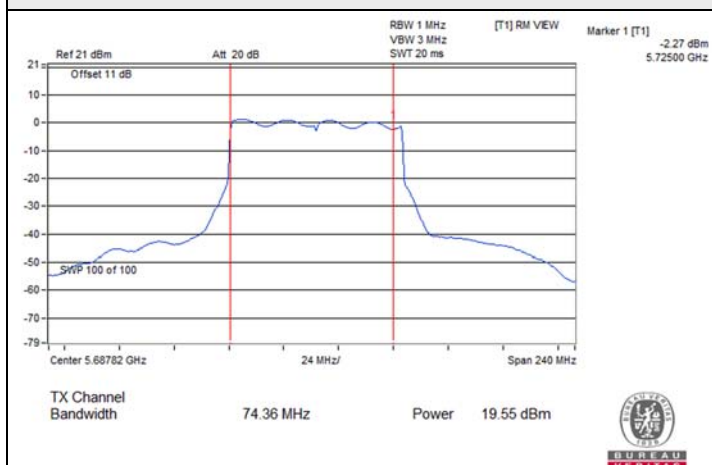


802.11be (EHT80) / Chain 0 : CH 138 (U-NII-2C)

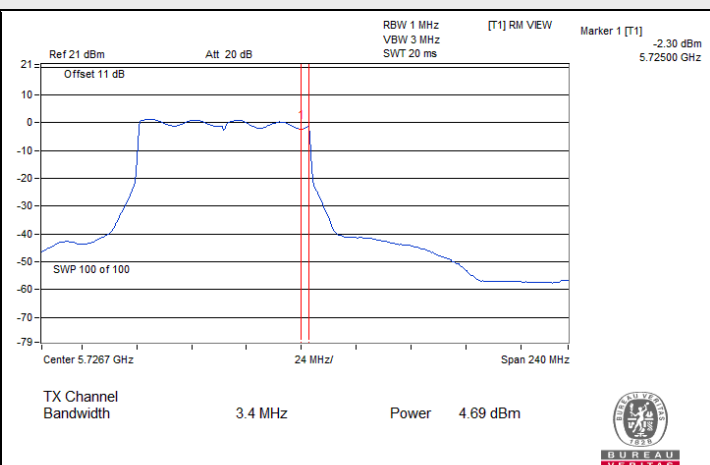


802.11be (EHT80) / Chain 0 : CH 138 (U-NII-3)

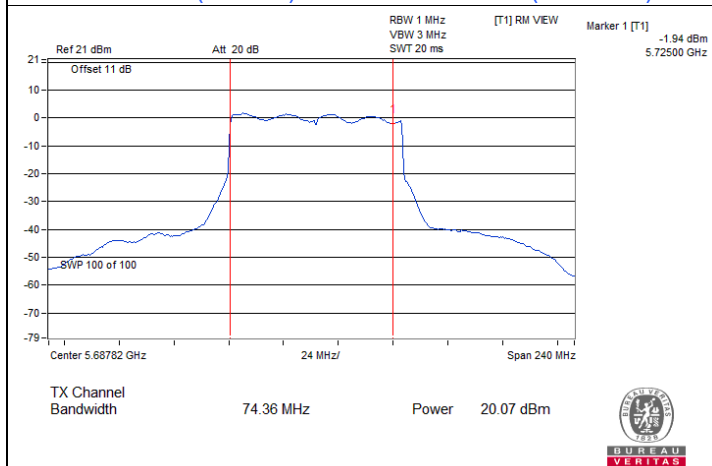


802.11be (EHT80) / Chain 1 : CH 138 (U-NII-2C)

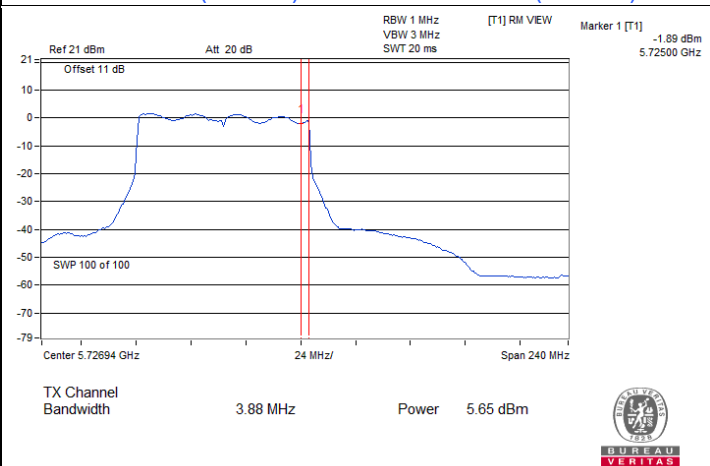

802.11be (EHT80) / Chain 1 : CH 138 (U-NII-3)

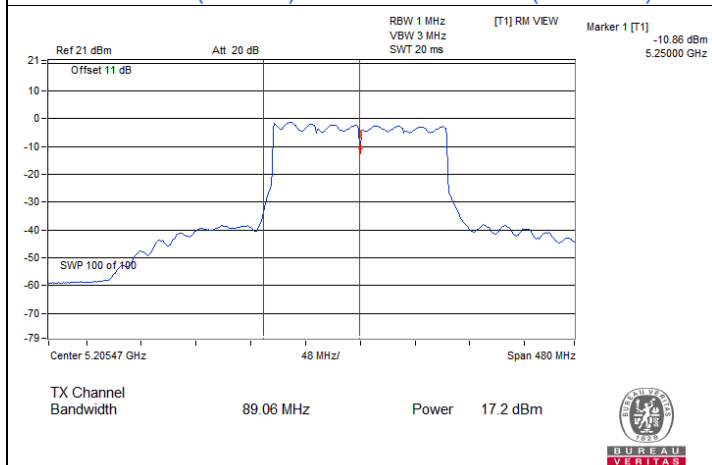


802.11be (EHT160) / Chain 0 : CH 50 (U-NII-1)

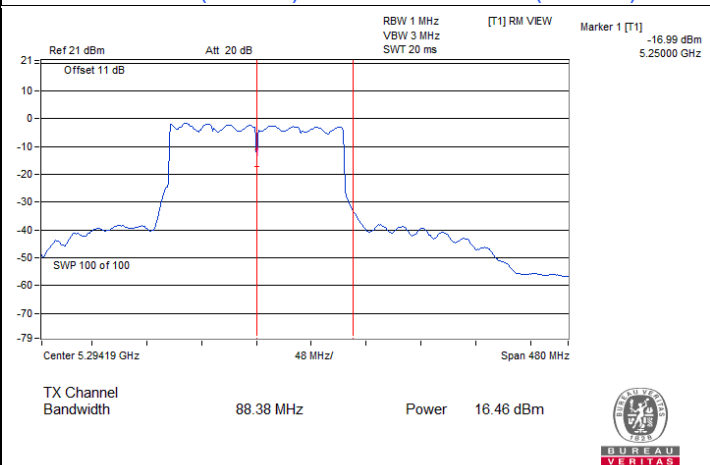


802.11be (EHT160) / Chain 0 : CH 50 (U-NII-2A)


Spectrum Plot for channel straddling

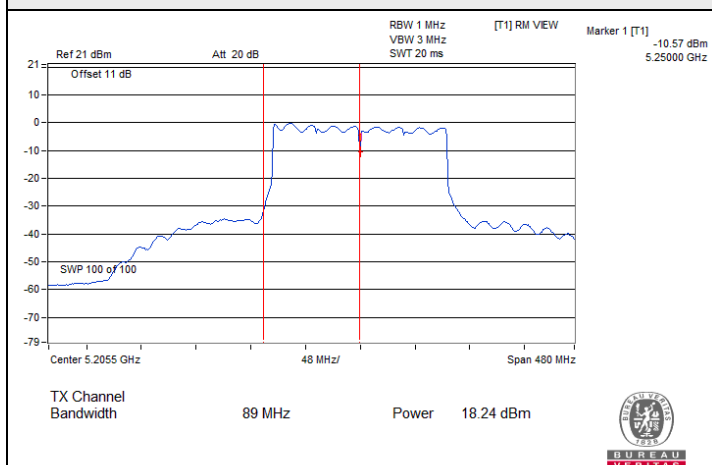


802.11be (EHT160) / Chain 1 : CH 50 (U-NII-1)

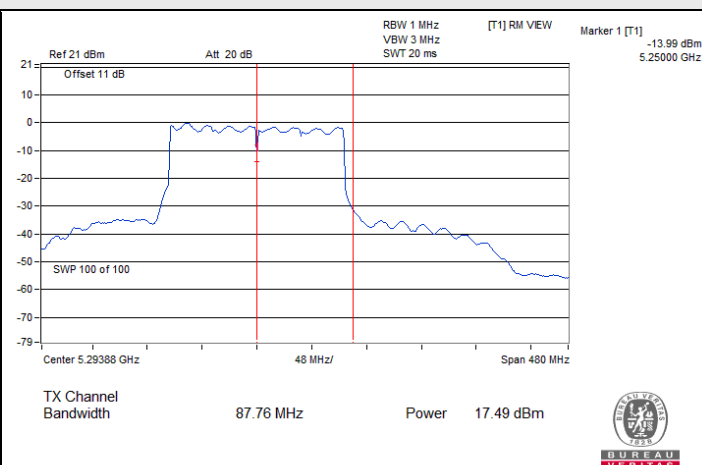


802.11be (EHT160) / Chain 1 : CH 50 (U-NII-2A)

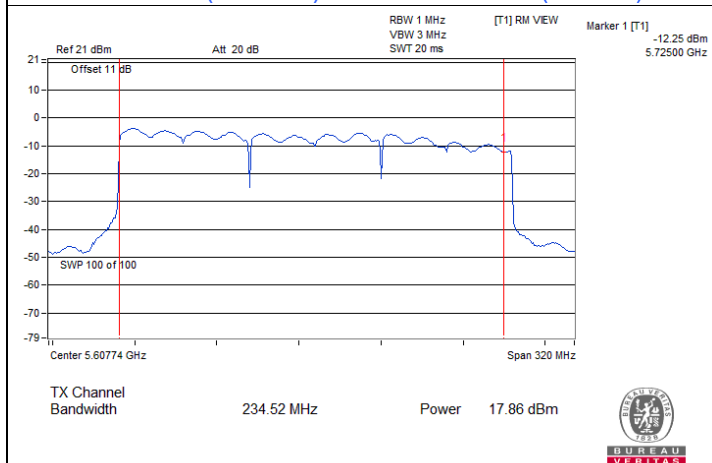


802.11be (EHT240) / Chain 0 : CH 114+138 (U-NII-2C)

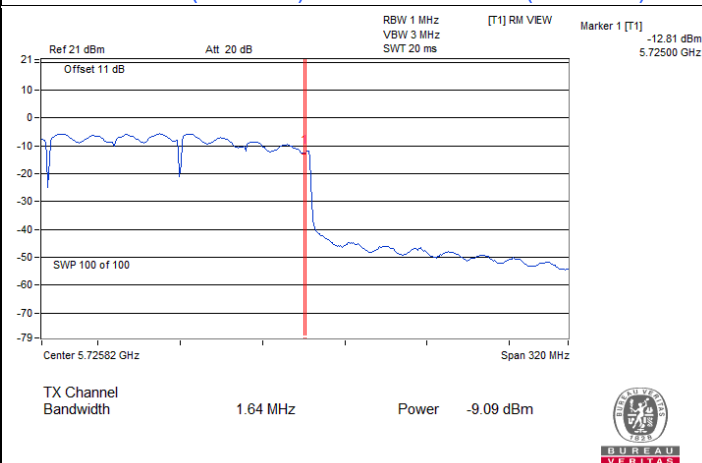

802.11be (EHT240) / Chain 0 : CH 114+138 (U-NII-3)

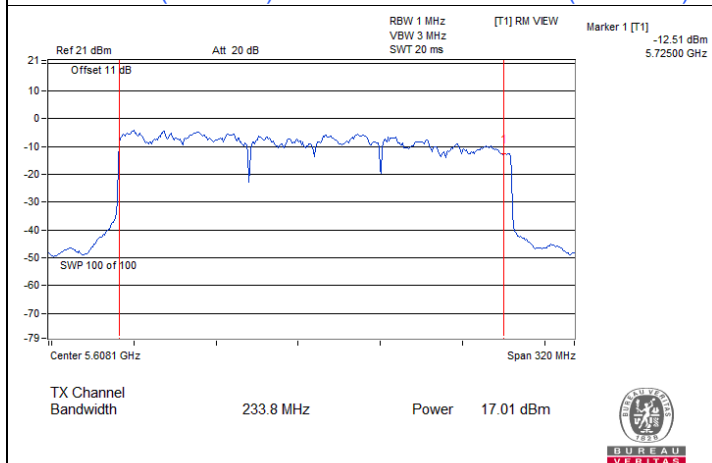

802.11be (EHT240) / Chain 1 : CH 114+138 (U-NII-2C)

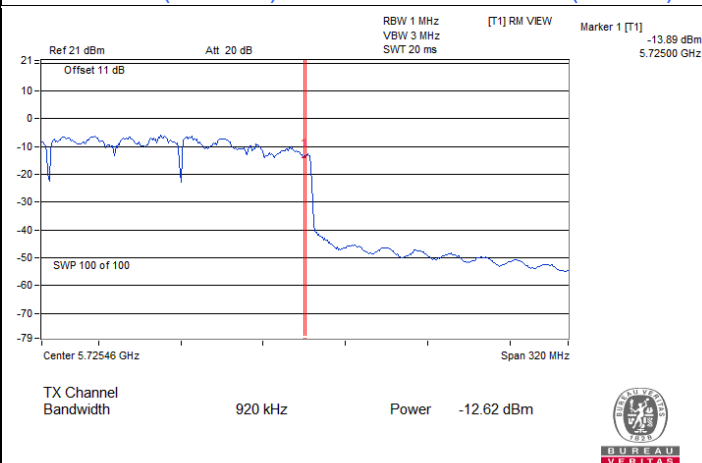

802.11be (EHT240) / Chain 1 : CH 114+138 (U-NII-3)

7.3 Power Spectral Density

Environmental Conditions:	25°C, 60% RH	Tested By:	Match Tsui
---------------------------	--------------	------------	------------

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
36	5180	12.64	13.64	16.18	17	Pass
40	5200	12.99	13.47	16.25	17	Pass
48	5240	12.70	13.24	15.99	17	Pass
52	5260	6.89	7.45	10.19	11	Pass
60	5300	7.00	7.50	10.27	11	Pass
64	5320	6.61	7.65	10.17	11	Pass
100	5500	6.74	7.20	9.99	10.78	Pass
116	5580	6.78	7.36	10.09	10.78	Pass
140	5700	6.81	7.29	10.07	10.78	Pass
144 (U-NII-2C)	5720	6.85	7.42	10.15	10.78	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-1, the directional gain is 5.85 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
- For U-NII-2A, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
- For U-NII-2C, the directional gain is 6.22 dBi $>$ 6 dBi, so the power density limit shall be reduced to $11 - (6.22 - 6) = 10.78$ dBm/MHz.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
36	5180	12.92	13.36	16.16	17	Pass
40	5200	12.77	13.18	15.99	17	Pass
48	5240	12.41	13.29	15.88	17	Pass
52	5260	6.84	7.23	10.05	11	Pass
60	5300	6.90	7.36	10.15	11	Pass
64	5320	6.47	7.55	10.05	11	Pass
100	5500	6.82	7.41	10.14	10.78	Pass
116	5580	6.70	7.77	10.28	10.78	Pass
140	5700	6.64	7.10	9.89	10.78	Pass
144 (U-NII-2C)	5720	6.73	7.26	10.01	10.78	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 5.85 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
4. For U-NII-2A, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
5. For U-NII-2C, the directional gain is 6.22 dBi $>$ 6 dBi, so the power density limit shall be reduced to $11 - (6.22 - 6) = 10.78$ dBm/MHz.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
38	5190	4.95	5.35	8.16	17	Pass
46	5230	9.53	10.16	12.87	17	Pass
54	5270	3.67	4.00	6.85	11	Pass
62	5310	3.77	4.26	7.03	11	Pass
102	5510	3.68	4.08	6.89	10.78	Pass
110	5550	3.83	4.40	7.13	10.78	Pass
134	5670	3.91	3.84	6.89	10.78	Pass
142 (U-NII-2C)	5710	4.10	4.12	7.12	10.78	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 5.85 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
4. For U-NII-2A, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
5. For U-NII-2C, the directional gain is 6.22 dBi $>$ 6 dBi, so the power density limit shall be reduced to $11 - (6.22 - 6) = 10.78$ dBm/MHz.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
42	5210	2.03	2.54	5.30	17	Pass
58	5290	0.64	1.44	4.07	11	Pass
106	5530	1.13	1.61	4.39	10.78	Pass
122	5610	0.59	1.35	4.00	10.78	Pass
138 (U-NII-2C)	5690	0.65	1.38	4.04	10.78	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-1, the directional gain is 5.85 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
- For U-NII-2A, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
- For U-NII-2C, the directional gain is 6.22 dBi $>$ 6 dBi, so the power density limit shall be reduced to $11 - (6.22 - 6) = 10.78$ dBm/MHz.

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
50 (U-NII-1)	5250	-0.71	-0.24	2.54	17	Pass
50 (U-NII-2A)	5250	-2.08	-1.48	1.24	11	Pass
114	5570	-0.78	-0.22	2.52	10.78	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-1, the directional gain is 5.85 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
- For U-NII-2A, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
- For U-NII-2C, the directional gain is 6.22 dBi $>$ 6 dBi, so the power density limit shall be reduced to $11 - (6.22 - 6) = 10.78$ dBm/MHz.

802.11be (EHT240)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
114+138 (U-NII-2C)	5610	-3.35	-3.37	-0.35	10.78	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 5.85 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
4. For U-NII-2A, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
5. For U-NII-2C, the directional gain is 6.22 dBi $>$ 6 dBi, so the power density limit shall be reduced to $11 - (6.22 - 6) = 10.78$ dBm/MHz.

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
144 (U-NII-3)	5720	-1.49	-0.89	1.83	4.05	29.79	Pass
149	5745	5.21	5.23	8.23	10.45	29.79	Pass
157	5785	5.07	4.96	8.03	10.25	29.79	Pass
165	5825	5.27	5.34	8.32	10.54	29.79	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 6.21 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (6.21 - 6) = 29.79$ dBm/500kHz.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
144 (U-NII-3)	5720	-2.47	-1.89	0.84	3.06	29.79	Pass
149	5745	3.29	3.26	6.29	8.51	29.79	Pass
157	5785	3.23	3.19	6.22	8.44	29.79	Pass
165	5825	3.28	3.34	6.32	8.54	29.79	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 6.21 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (6.21 - 6) = 29.79$ dBm/500kHz.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
142 (U-NII-3)	5710	-6.70	-6.69	-3.68	-1.46	29.79	Pass
151	5755	0.28	0.84	3.58	5.80	29.79	Pass
159	5795	0.47	0.58	3.54	5.76	29.79	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 6.21 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (6.21 - 6) = 29.79$ dBm/500kHz.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
138 (U-NII-3)	5690	-10.53	-9.91	-7.2	-4.98	29.79	Pass
155	5775	-1.54	-1.48	1.5	3.72	29.79	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 6.21 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (6.21 - 6) = 29.79$ dBm/500kHz.


802.11be (EHT240)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
114+138 (U-NII-3)	5610	-19.95	-19.92	-16.92	-14.70	29.79	Pass


Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 6.21 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (6.21 - 6) = 29.79$ dBm/500kHz.


Spectrum Plot of Maximum Value

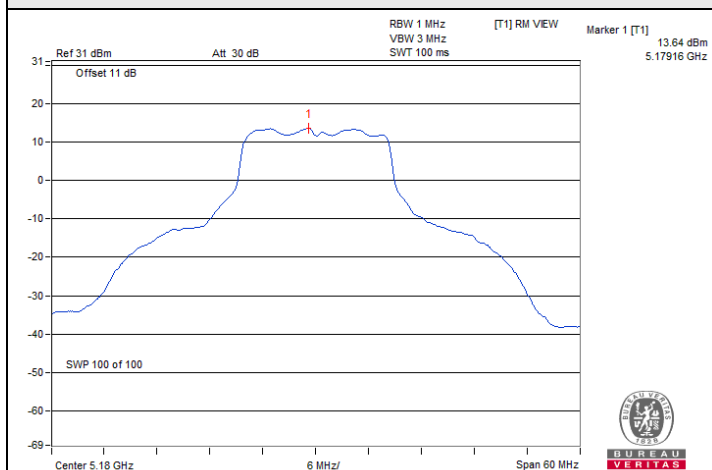


802.11a / Chain 1 : CH 36

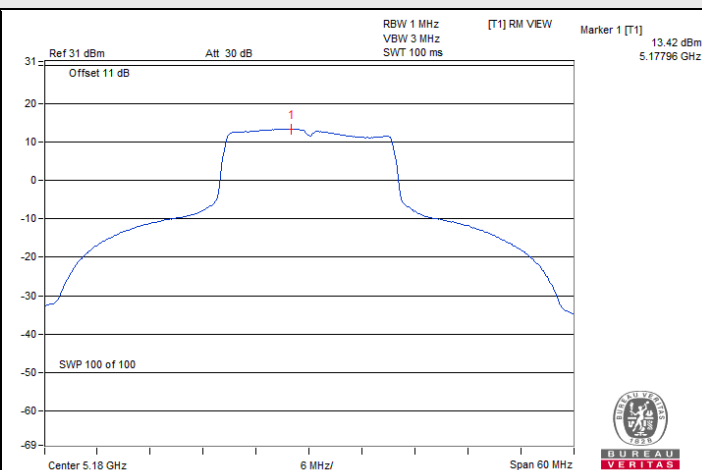


802.11be (EHT20) / Chain 1 : CH 36

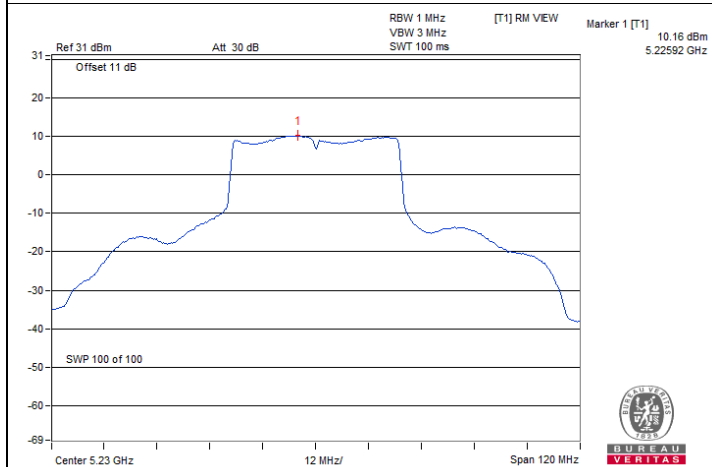


802.11be (EHT40) / Chain 1 : CH 46

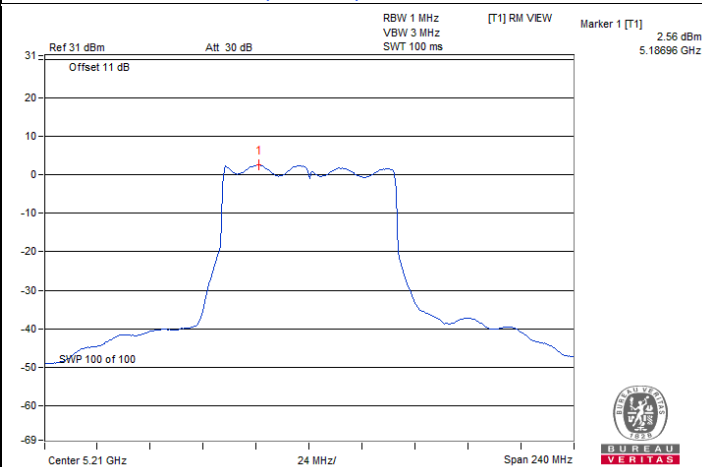

802.11be (EHT80) / Chain 1 : CH 42

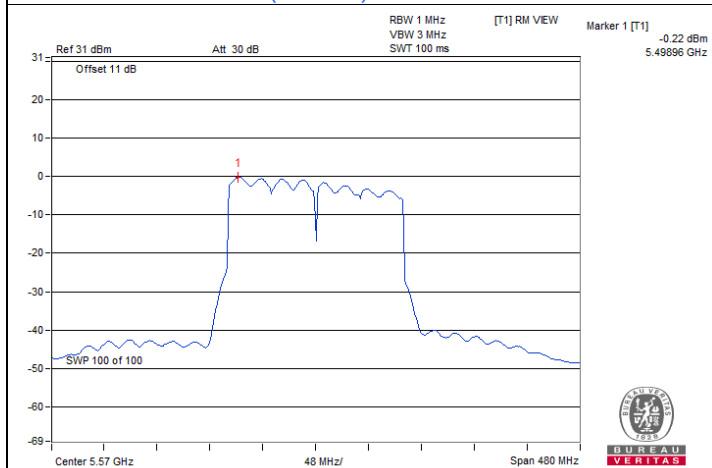


802.11be (EHT160) / Chain 1 : CH 114

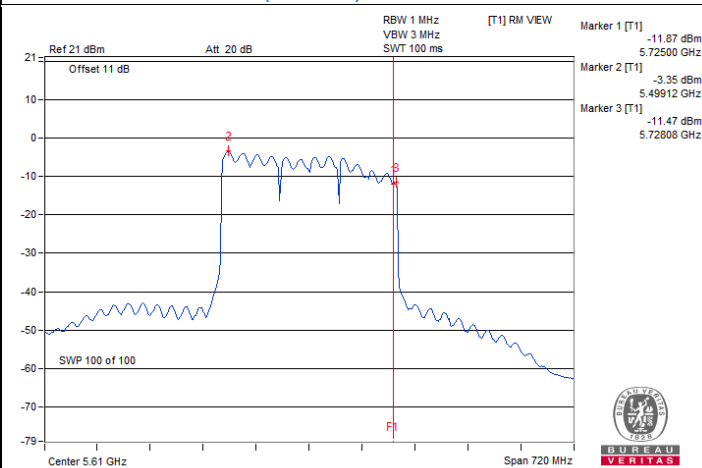


802.11be (EHT240) / Chain 0 : CH 114+138 (U-NII-2C)


Spectrum Plot of Maximum Value

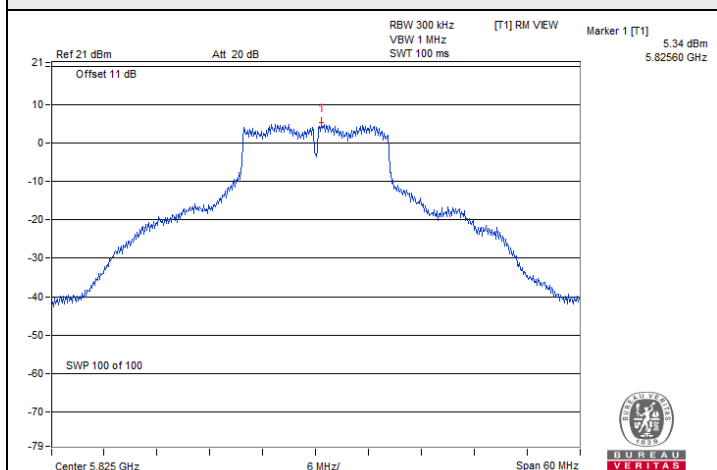


802.11a / Chain 1 : CH 165

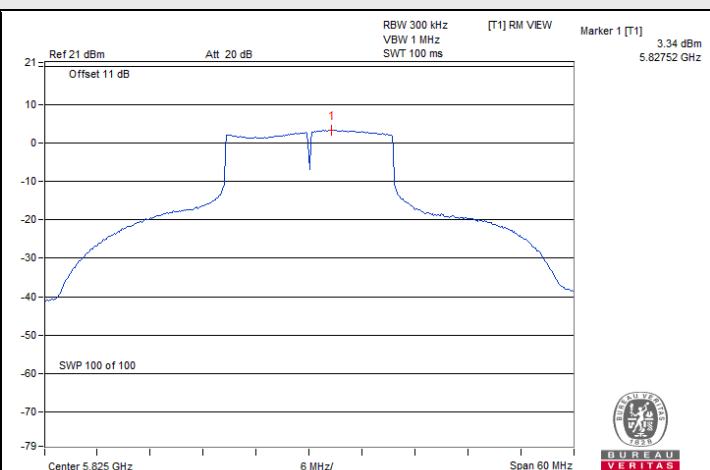


802.11be (EHT20) / Chain 1 : CH 165

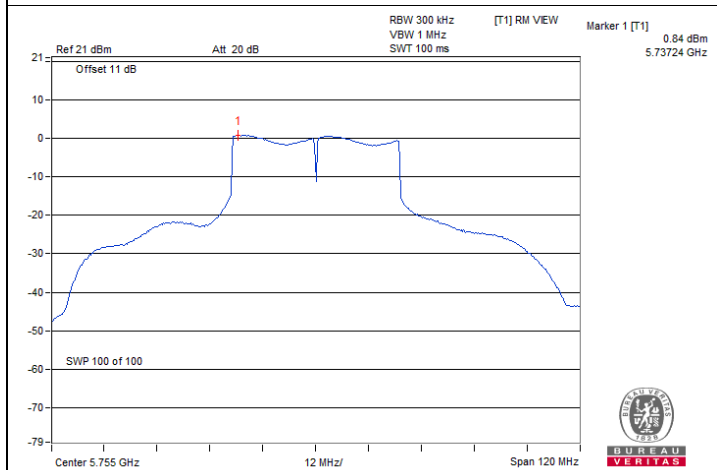

802.11be (EHT40) / Chain 1 : CH 151

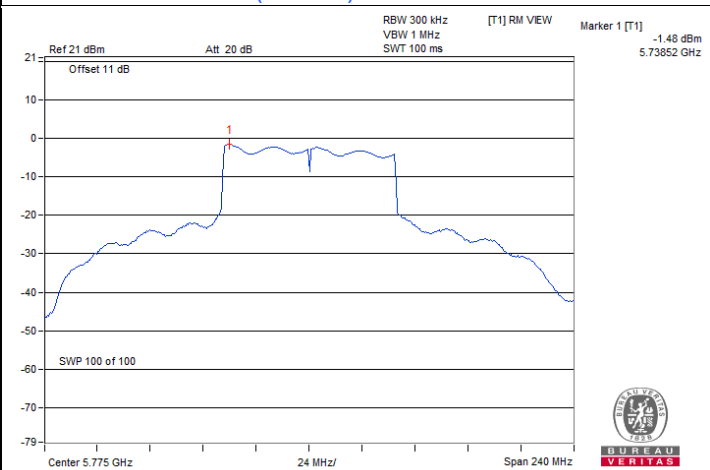

802.11be (EHT80) / Chain 1 : CH 155

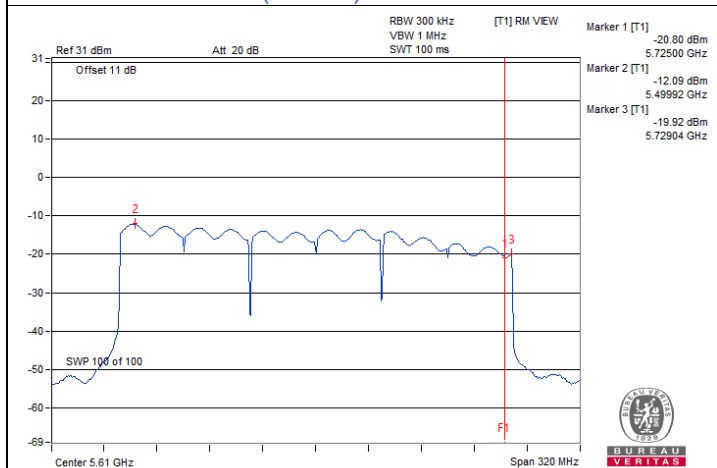

802.11be (EHT240) / Chain 0 : CH 114+138 (U-NII-3)

7.4 6 dB Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Match Tsui
---------------------------	--------------	------------	------------

802.11a

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
144 (U-NII-3)	5720	3.16	2.96	0.5	Pass
149	5745	15.90	16.12	0.5	Pass
157	5785	15.87	15.87	0.5	Pass
165	5825	15.85	15.91	0.5	Pass

802.11be (EHT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
144 (U-NII-3)	5720	4.52	4.52	0.5	Pass
149	5745	19.05	18.86	0.5	Pass
157	5785	19.01	19.04	0.5	Pass
165	5825	18.85	18.39	0.5	Pass

802.11be (EHT40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
142 (U-NII-3)	5710	4.05	4.23	0.5	Pass
151	5755	38.40	38.41	0.5	Pass
159	5795	38.52	38.31	0.5	Pass






802.11be (EHT80)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
138 (U-NII-3)	5690	2.80	2.91	0.5	Pass
155	5775	77.94	78.22	0.5	Pass

802.11be (EHT240)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
114+138 (U-NII-3)	5610	3.20	2.37	0.5	Pass

Spectrum Plot of Minimum Value

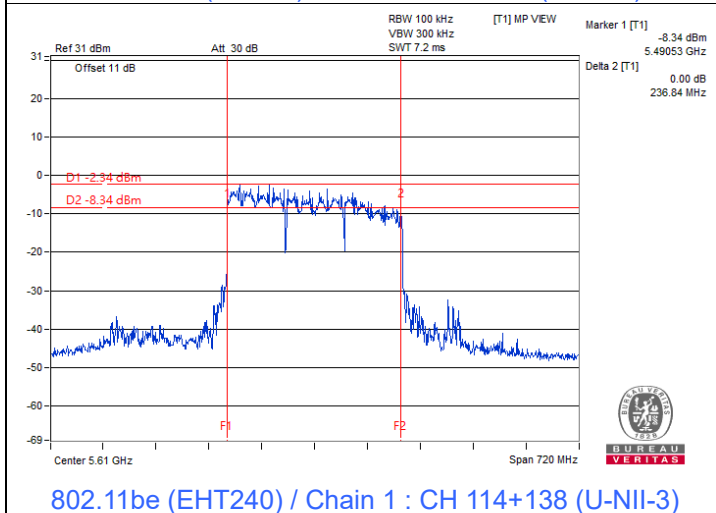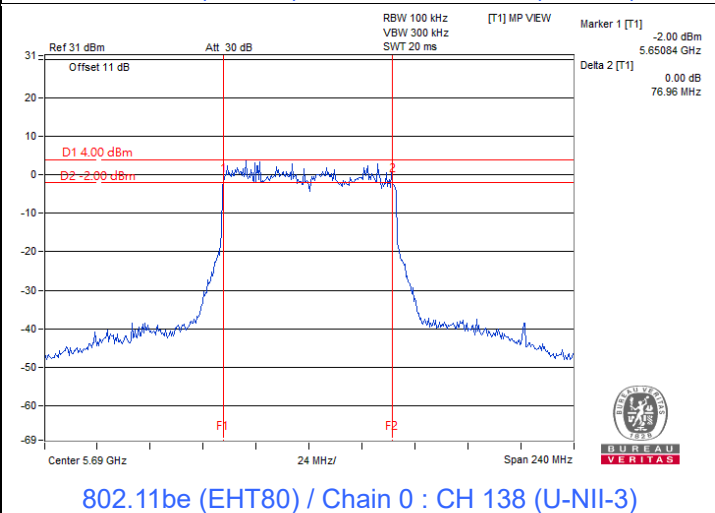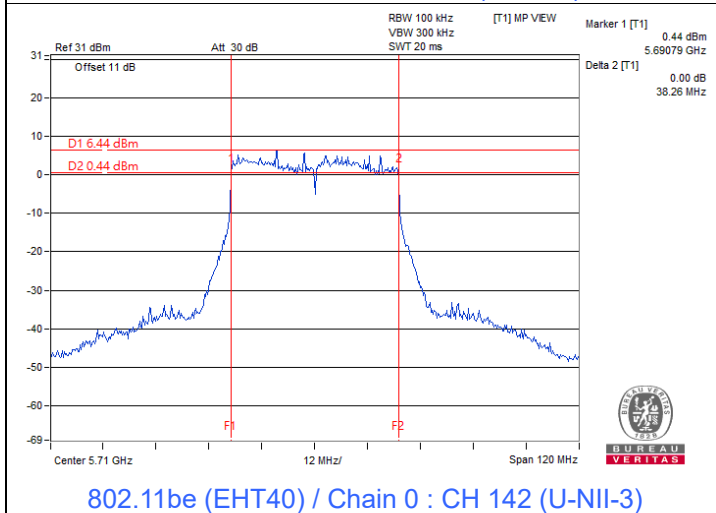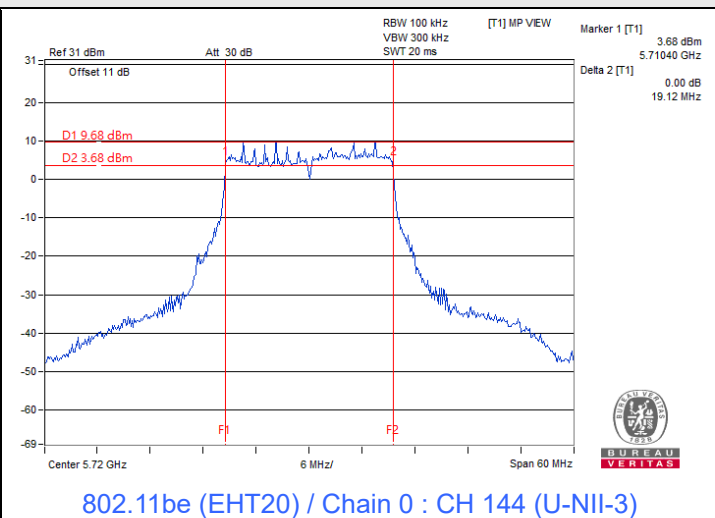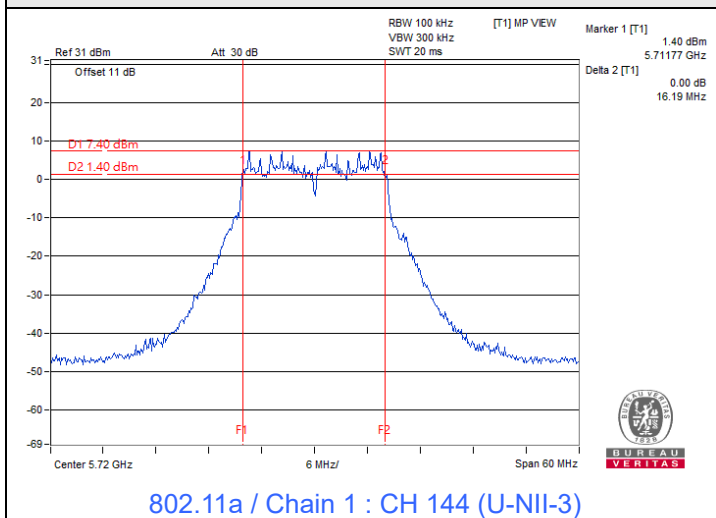

Note: For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz

7.5 Occupied Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Match Tsui
---------------------------	--------------	------------	------------

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.40	17.04
40	5200	17.40	17.04
48	5240	17.40	17.04
52	5260	17.16	17.04
60	5300	17.04	17.16
64	5320	17.04	17.04
100	5500	17.16	17.16
116	5580	17.16	17.16
140	5700	17.16	17.04
144 (U-NII-2C)	5720	13.64	13.64
144 (U-NII-3)	5720	3.52	3.40
149	5745	19.56	19.68
157	5785	20.40	20.40
165	5825	24.24	24.96

802.11be (EHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	19.68	19.68
40	5200	19.80	19.56
48	5240	19.56	19.56
52	5260	19.20	19.20
60	5300	19.20	19.20
64	5320	19.32	19.20
100	5500	19.32	19.32
116	5580	19.32	19.32
140	5700	19.32	19.32
144 (U-NII-2C)	5720	14.60	14.72
144 (U-NII-3)	5720	4.60	4.60
149	5745	19.80	20.04
157	5785	20.64	20.40
165	5825	26.16	25.20

802.11be (EHT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	38.64	38.64
46	5230	39.12	40.08
54	5270	38.64	38.40
62	5310	38.64	38.64
102	5510	38.40	38.16
110	5550	38.40	38.64
134	5670	38.40	38.40
142 (U-NII-2C)	5710	34.44	34.44
142 (U-NII-3)	5710	4.20	4.20
151	5755	39.12	41.04
159	5795	41.76	41.28

802.11be (EHT80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	78.24	78.24
58	5290	77.76	77.76
106	5530	77.76	77.76
122	5610	77.76	77.76
138 (U-NII-2C)	5690	74.36	74.36
138 (U-NII-3)	5690	3.40	3.88
155	5775	93.60	93.12







802.11be (EHT160)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1)	5250	79.68	79.68
50 (U-NII-2A)	5250	78.72	78.72
114	5570	157.44	157.44







802.11be (EHT240)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
114+138 (U-NII-2C)	5610	234.52	233.80
114+138 (U-NII-3)	5610	1.64	0.92



Spectrum Plot of Maximum Value

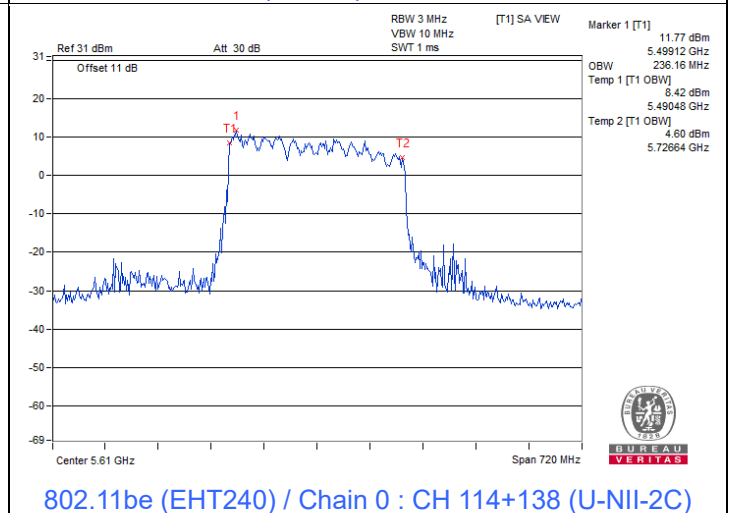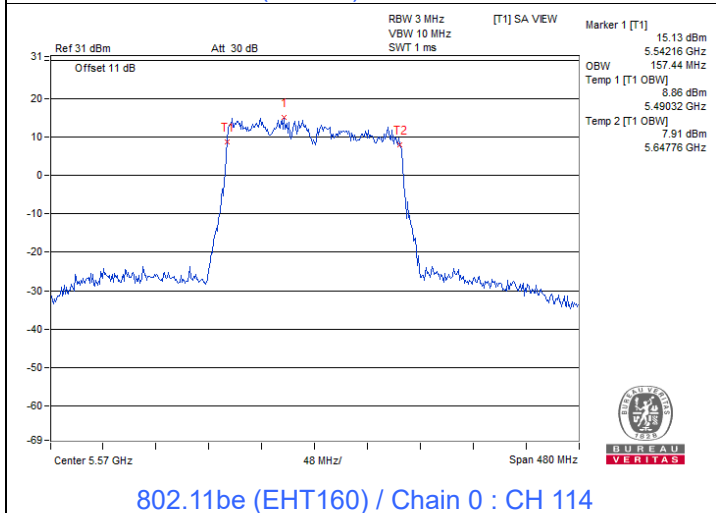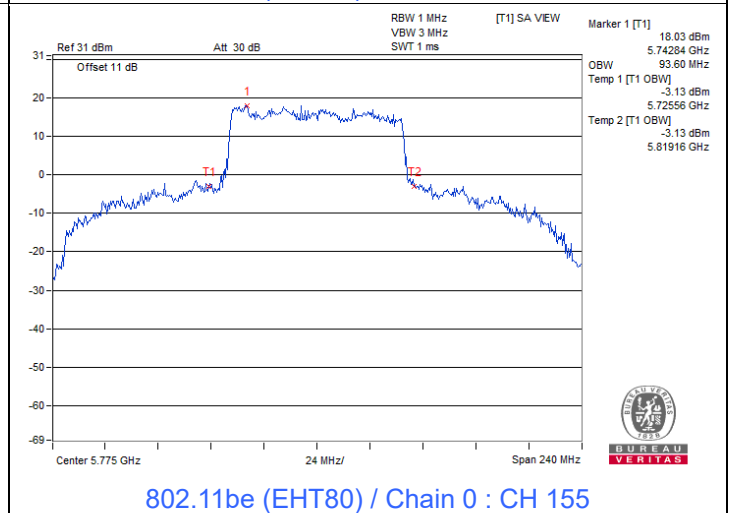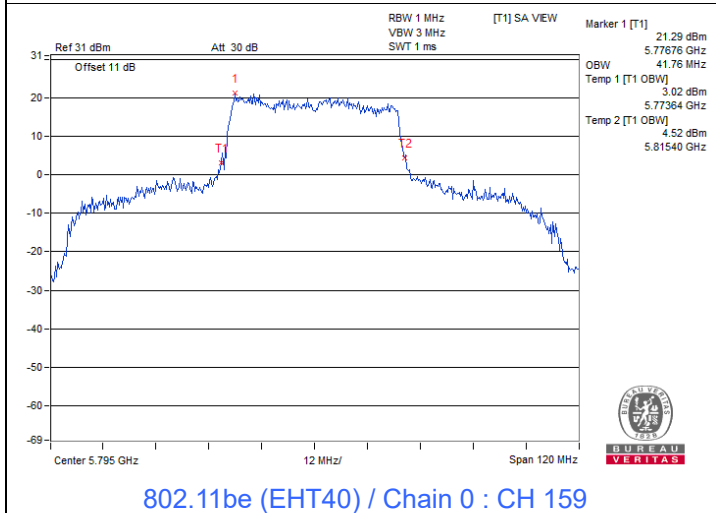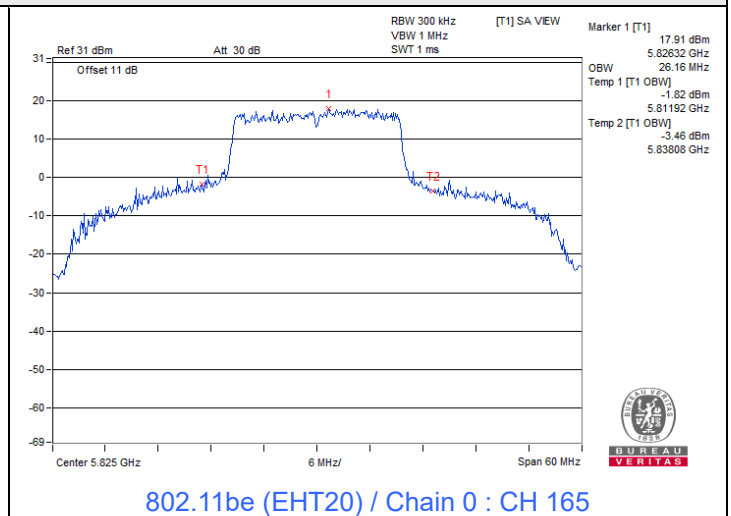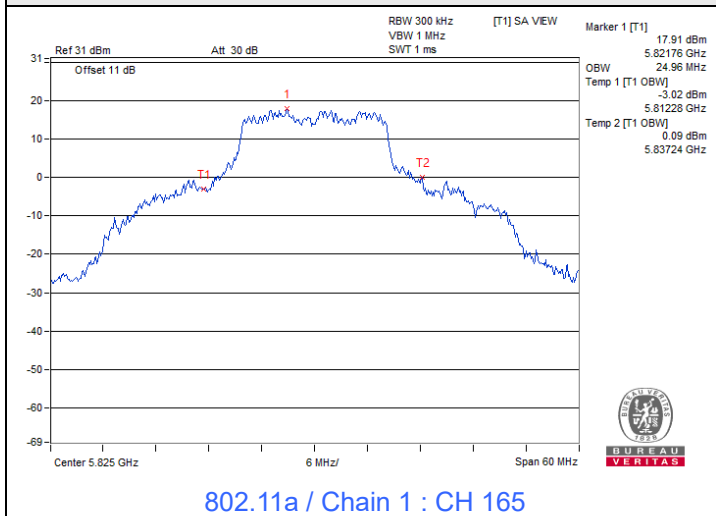





Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

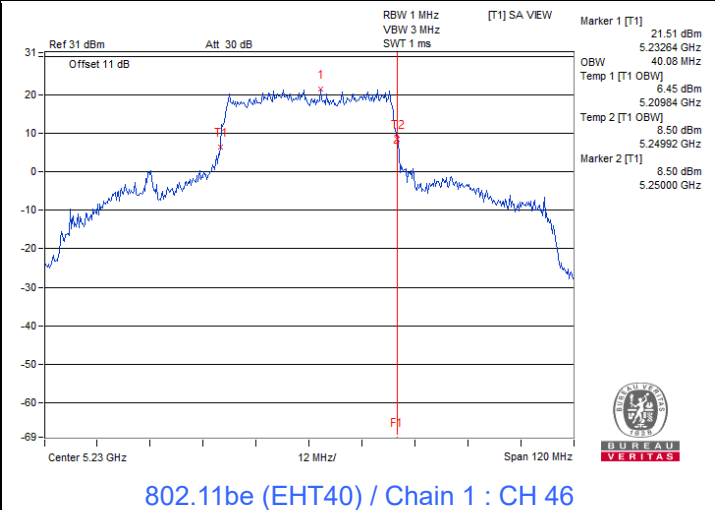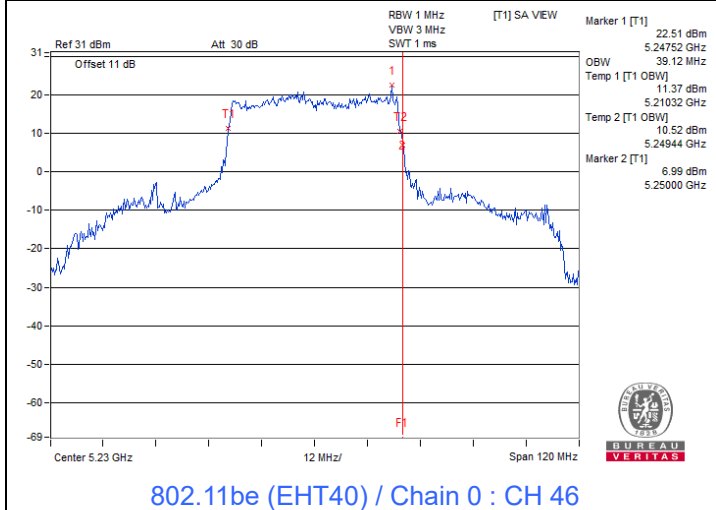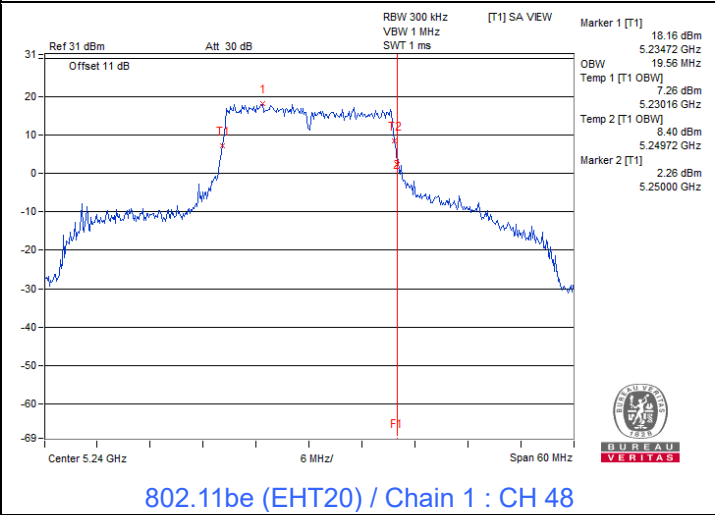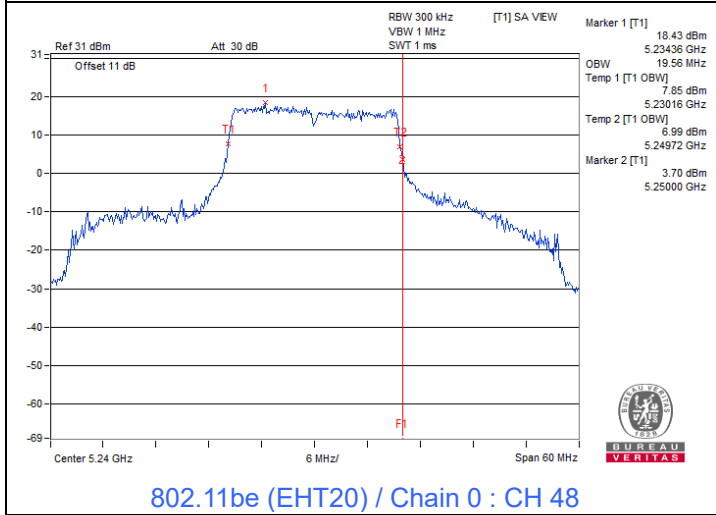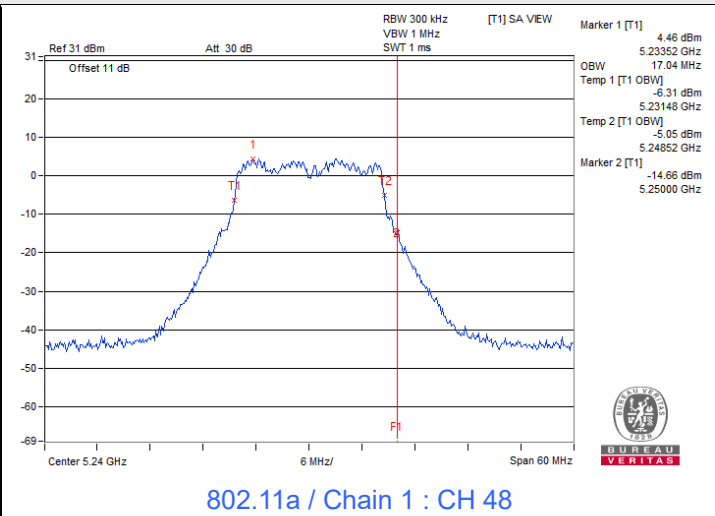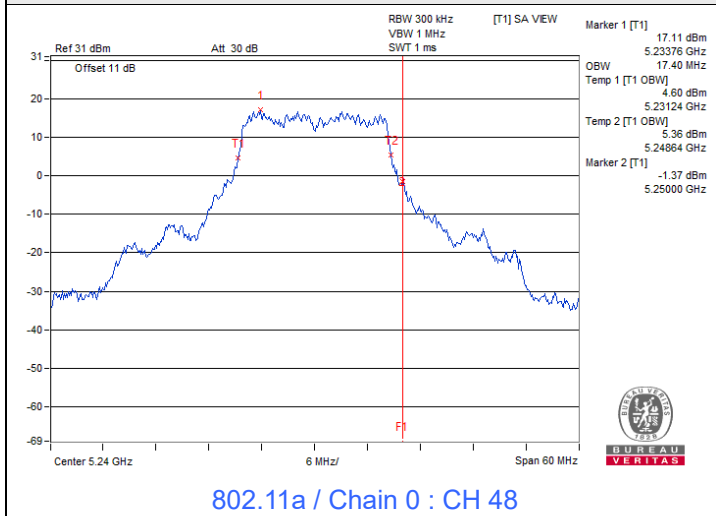


Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

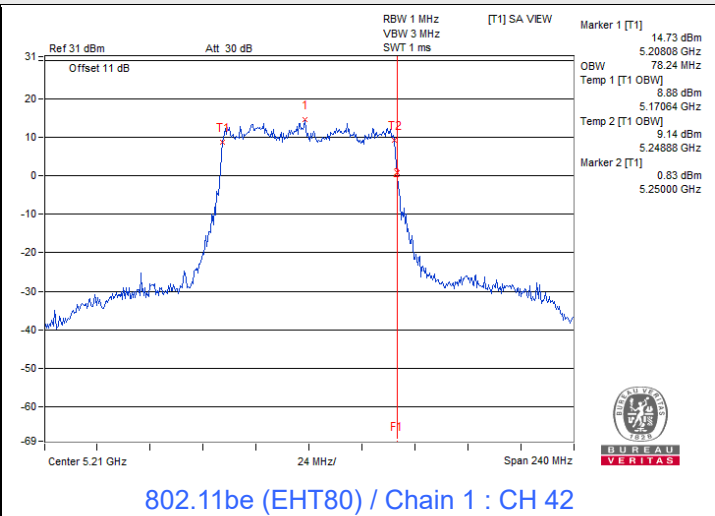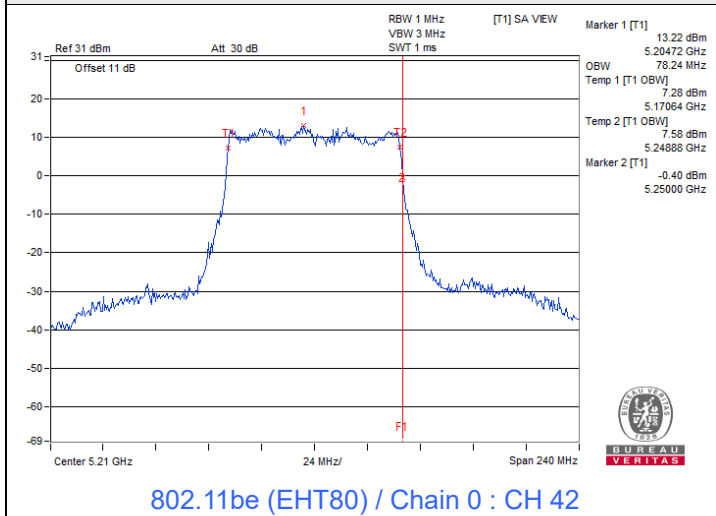


Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

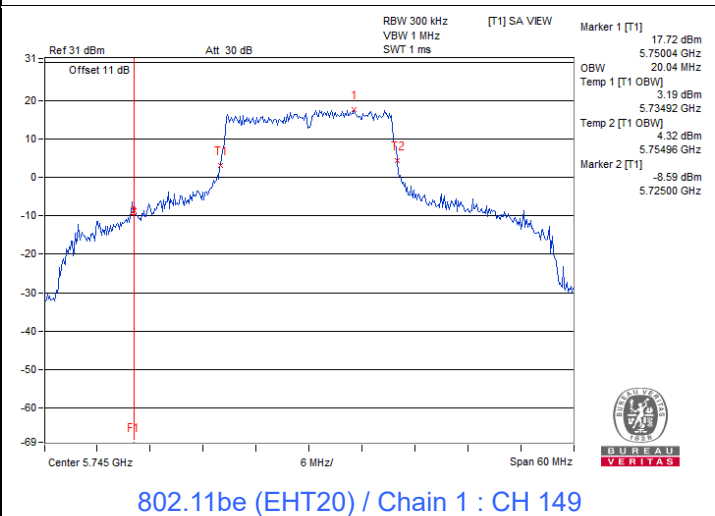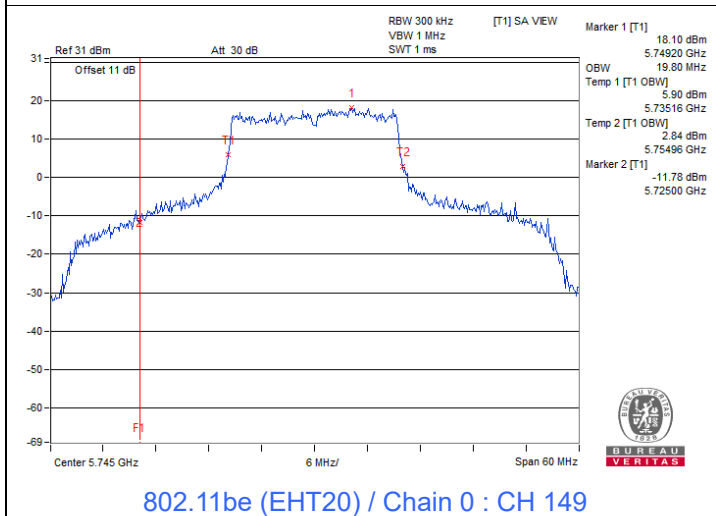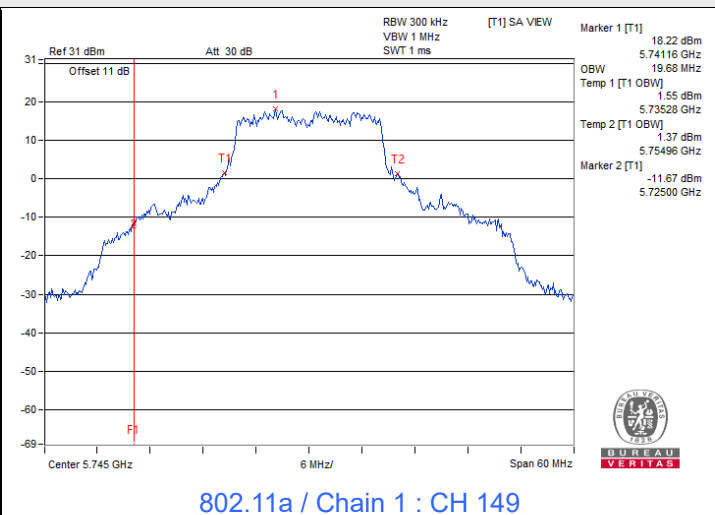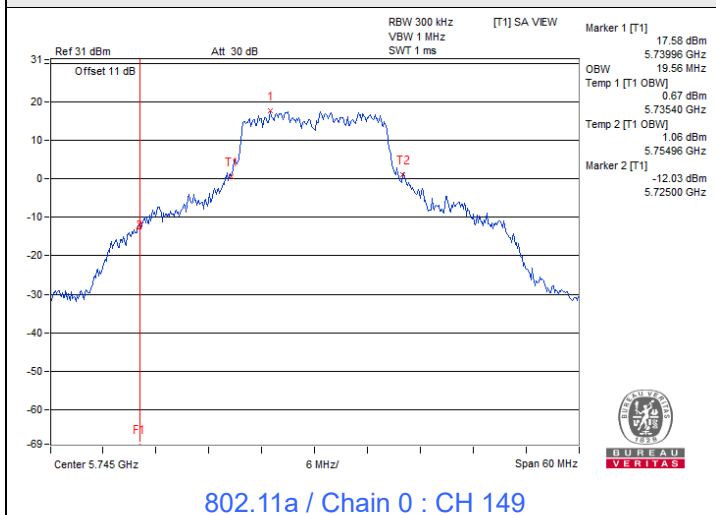


Spectrum Plot for nearby DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C)

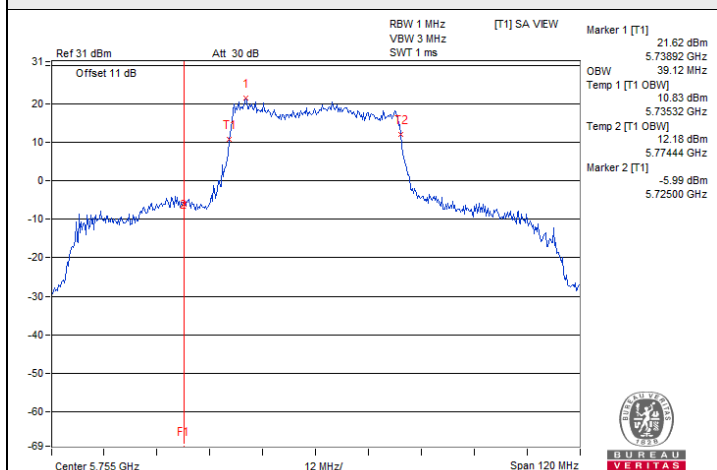


802.11be (EHT40) / Chain 0 : CH 151

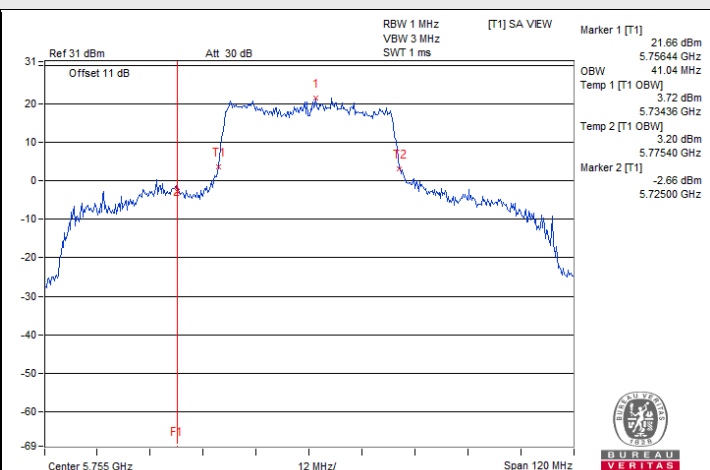

802.11be (EHT40) / Chain 1 : CH 151

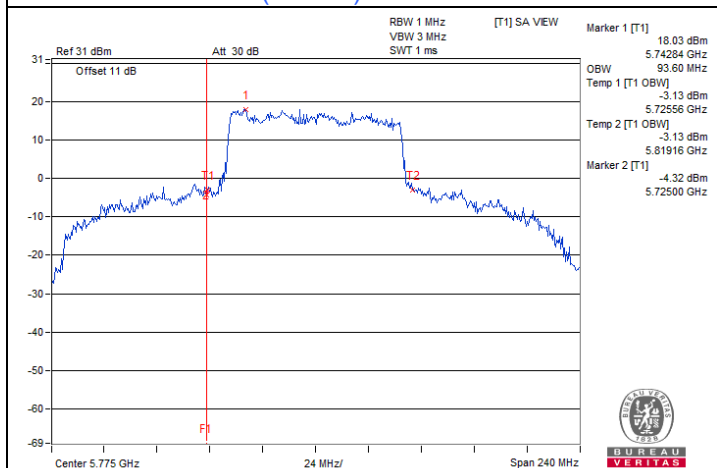

802.11be (EHT80) / Chain 0 : CH 155

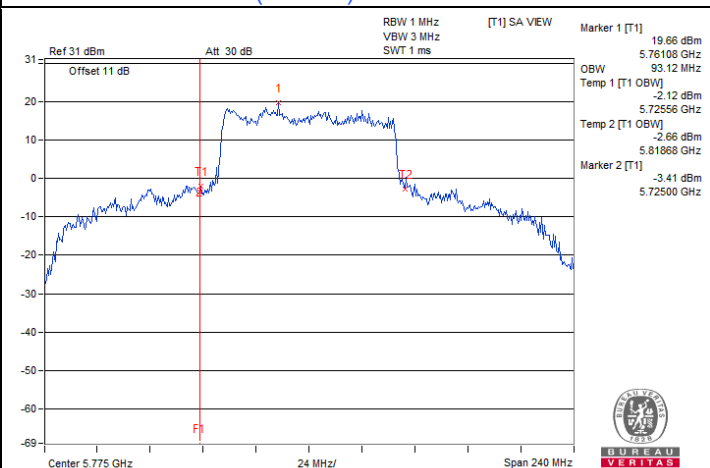

802.11be (EHT80) / Chain 1 : CH 155

7.6 AC Power Conducted Emissions


Mode A

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Luis Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16190	9.76	29.94	9.38	39.70	19.14	65.37	55.37	-25.67	-36.23
2	0.19000	9.78	24.65	4.17	34.43	13.95	64.04	54.04	-29.61	-40.09
3	0.20600	9.79	26.33	10.41	36.12	20.20	63.37	53.37	-27.25	-33.17
4	0.25400	9.81	28.38	20.79	38.19	30.60	61.63	51.63	-23.44	-21.03
5	0.28200	9.83	27.87	18.39	37.70	28.22	60.76	50.76	-23.06	-22.54
6	0.30200	9.84	22.99	12.48	32.83	22.32	60.19	50.19	-27.36	-27.87

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

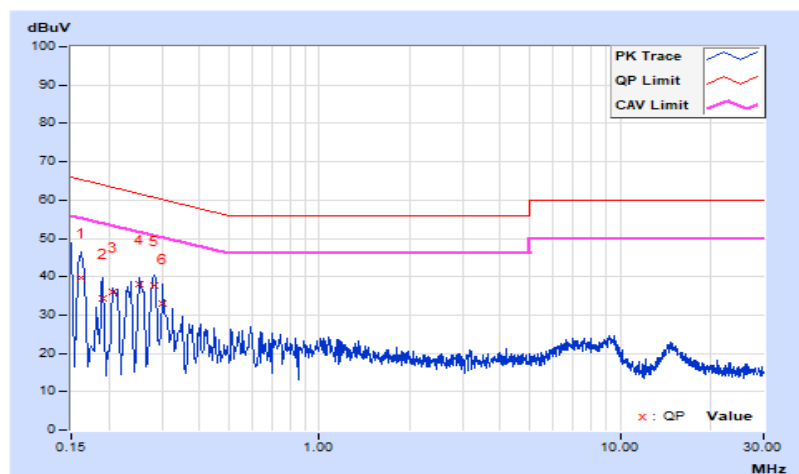


RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Luis Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16579	9.71	29.86	10.41	39.57	20.12	65.17	55.17	-25.60	-35.05
2	0.19367	9.72	25.61	7.09	35.33	16.81	63.88	53.88	-28.55	-37.07
3	0.21800	9.74	22.97	5.49	32.71	15.23	62.89	52.89	-30.18	-37.66
4	0.25800	9.78	26.62	16.87	36.40	26.65	61.50	51.50	-25.10	-24.85
5	0.28528	9.80	24.39	15.47	34.19	25.27	60.66	50.66	-26.47	-25.39
6	0.30600	9.82	23.45	13.74	33.27	23.56	60.08	50.08	-26.81	-26.52

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

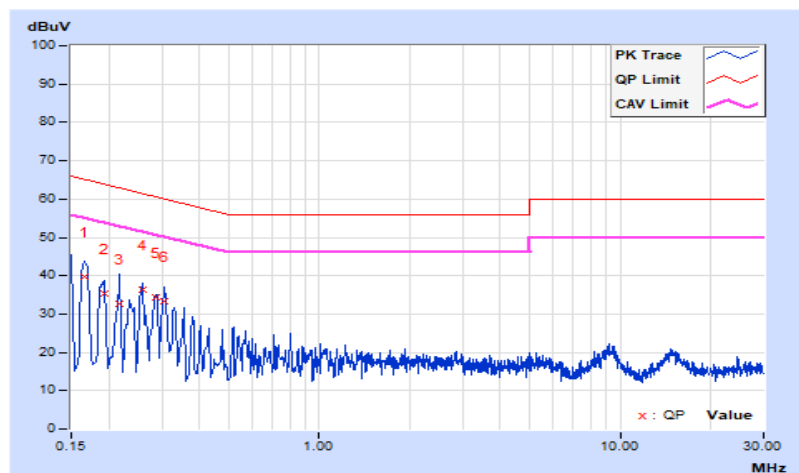


Mode B

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Luis Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16600	9.76	32.70	16.01	42.46	25.77	65.16	55.16	-22.70	-29.39
2	0.19000	9.78	26.20	8.27	35.98	18.05	64.04	54.04	-28.06	-35.99
3	0.21400	9.80	26.58	9.41	36.38	19.21	63.05	53.05	-26.67	-33.84
4	0.23000	9.80	24.36	9.60	34.16	19.40	62.45	52.45	-28.29	-33.05
5	0.25400	9.81	27.83	18.23	37.64	28.04	61.63	51.63	-23.99	-23.59
6	0.28600	9.83	25.22	11.61	35.05	21.44	60.64	50.64	-25.59	-29.20

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

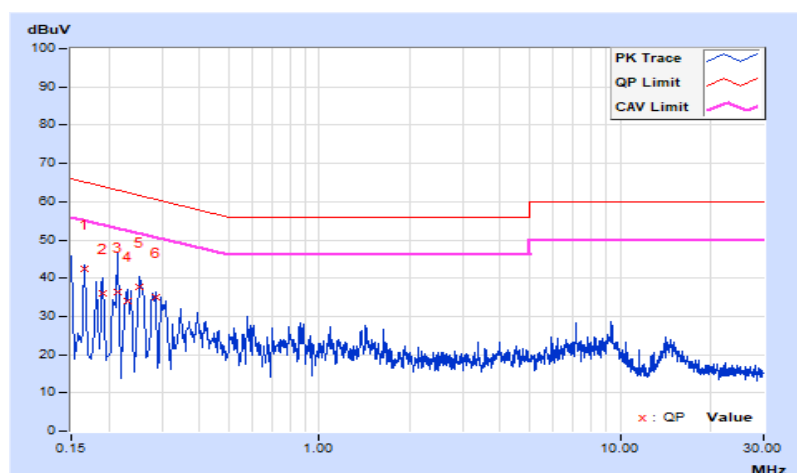


RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Luis Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16932	9.71	32.23	16.06	41.94	25.77	64.99	54.99	-23.05	-29.22
2	0.19400	9.72	28.05	8.84	37.77	18.56	63.86	53.86	-26.09	-35.30
3	0.21126	9.73	23.48	10.01	33.21	19.74	63.16	53.16	-29.95	-33.42
4	0.23400	9.75	25.23	9.21	34.98	18.96	62.31	52.31	-27.33	-33.35
5	0.28200	9.80	27.05	16.00	36.85	25.80	60.76	50.76	-23.91	-24.96
6	0.30600	9.82	24.36	16.31	34.18	26.13	60.08	50.08	-25.90	-23.95

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

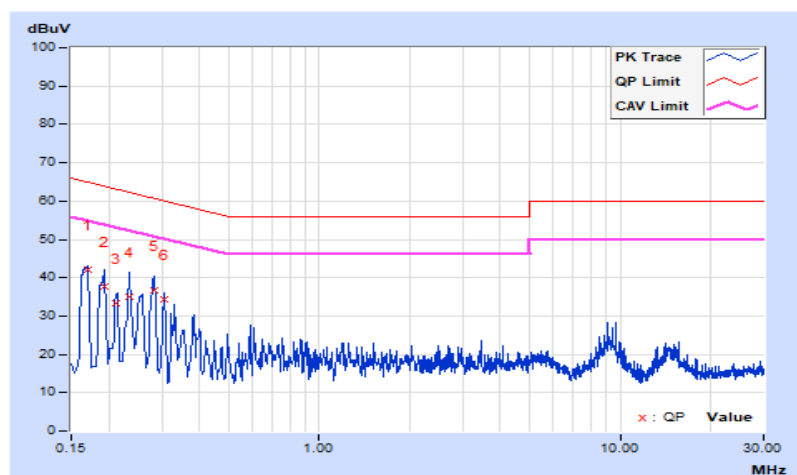

7.7 Unwanted Emissions below 1 GHz


Mode A

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	34.85	22.1 QP	40.0	-17.9	1.01 H	148	32.1	-10.0
2	164.83	22.3 QP	43.5	-21.2	1.49 H	288	30.8	-8.5
3	281.23	34.2 QP	46.0	-11.8	1.01 H	262	41.9	-7.7
4	393.75	38.9 QP	46.0	-7.1	1.01 H	8	44.4	-5.5
5	431.58	39.5 QP	46.0	-6.5	1.01 H	358	44.0	-4.5
6	712.88	40.6 QP	46.0	-5.4	1.49 H	75	39.3	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

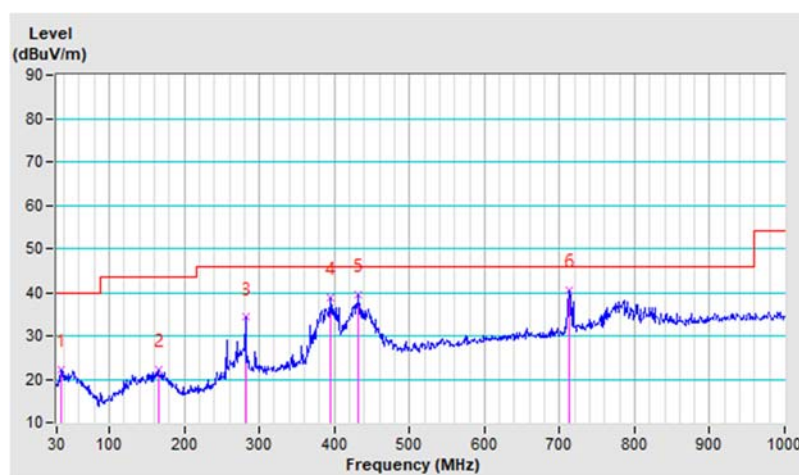


RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.76	35.6 QP	40.0	-4.4	1.49 V	97	45.1	-9.5
2	51.34	30.9 QP	40.0	-9.1	1.01 V	215	39.7	-8.8
3	281.23	31.5 QP	46.0	-14.5	1.49 V	60	39.2	-7.7
4	406.36	35.9 QP	46.0	-10.1	1.49 V	83	41.2	-5.3
5	432.55	35.4 QP	46.0	-10.6	1.01 V	183	39.9	-4.5
6	670.20	31.2 QP	46.0	-14.8	1.01 V	322	30.7	0.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

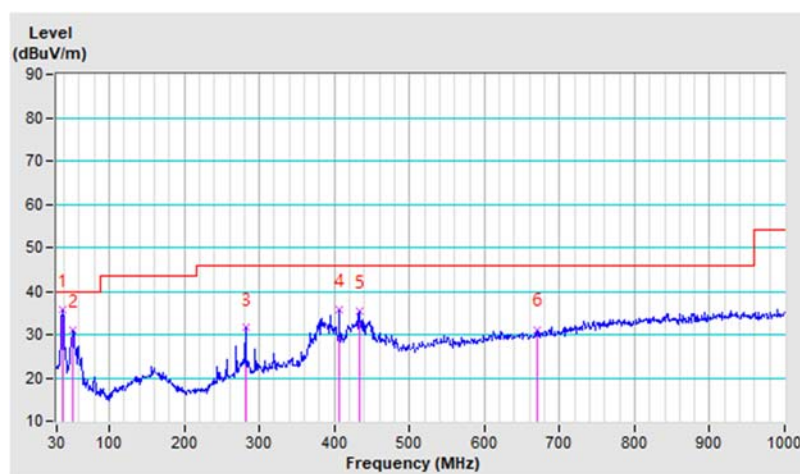


Mode B

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	268.62	34.5 QP	46.0	-11.5	1.00 H	278	42.6	-8.1
2	392.78	42.7 QP	46.0	-3.3	1.00 H	132	48.2	-5.5
3	543.13	29.1 QP	46.0	-16.9	1.50 H	176	31.8	-2.7
4	654.68	33.9 QP	46.0	-12.1	1.00 H	211	33.7	0.2
5	823.46	42.4 QP	46.0	-3.6	1.00 H	6	38.5	3.9
6	890.39	42.5 QP	46.0	-3.5	1.50 H	227	37.5	5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

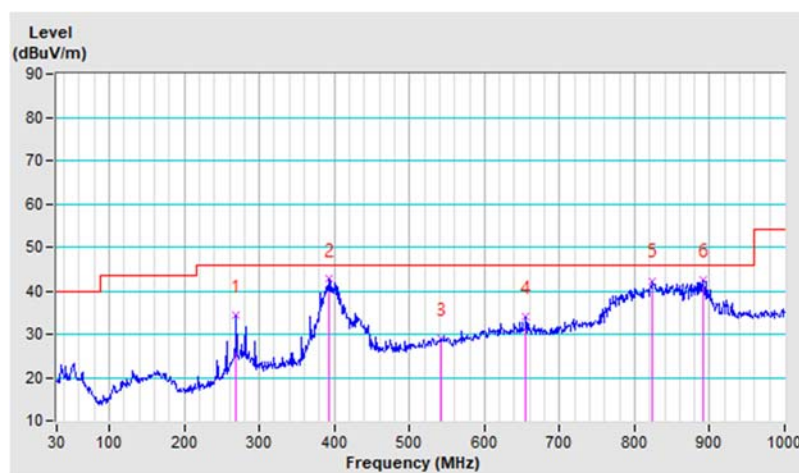


RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.82	35.3 QP	40.0	-4.7	1.01 V	43	45.4	-10.1
2	53.28	33.6 QP	40.0	-6.4	1.01 V	240	42.5	-8.9
3	281.23	30.3 QP	46.0	-15.7	1.49 V	78	38.0	-7.7
4	381.14	41.0 QP	46.0	-5.0	1.01 V	18	46.6	-5.6
5	406.36	41.0 QP	46.0	-5.0	1.49 V	7	46.3	-5.3
6	568.35	30.2 QP	46.0	-15.8	1.49 V	97	32.2	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

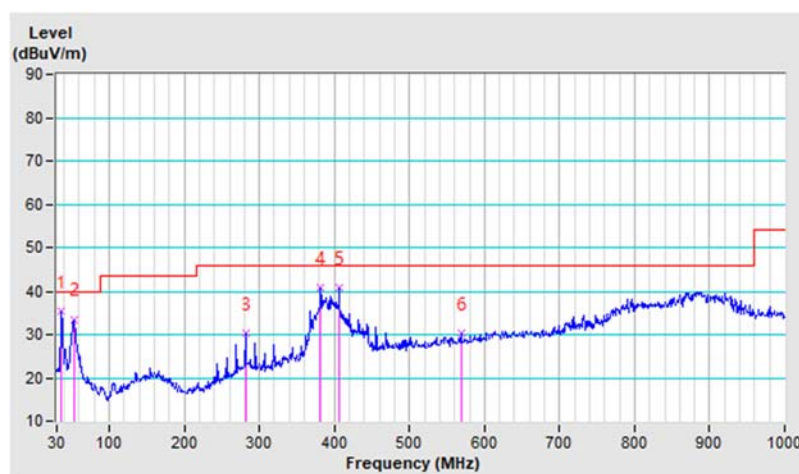

7.8 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.2 PK	74.0	-9.8	1.53 H	285	52.8	11.4
2	5150.00	49.8 AV	54.0	-4.2	1.53 H	285	38.4	11.4
3	*5180.00	109.0 PK			1.53 H	285	67.6	41.4
4	*5180.00	99.1 AV			1.53 H	285	57.7	41.4
5	#10360.00	59.2 PK	68.2	-9.0	1.64 H	107	38.2	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.1 PK	74.0	-5.9	2.59 V	309	56.7	11.4
2	5150.00	53.9 AV	54.0	-0.1	2.59 V	309	42.5	11.4
3	*5180.00	116.8 PK			2.59 V	309	75.4	41.4
4	*5180.00	106.6 AV			2.59 V	309	65.2	41.4
5	#10360.00	58.8 PK	68.2	-9.4	2.22 V	197	37.8	21.0

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
- " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	111.6 PK			1.51 H	287	70.3	41.3
2	*5200.00	101.3 AV			1.51 H	287	60.0	41.3
3	#10400.00	59.8 PK	68.2	-8.4	1.68 H	108	38.5	21.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	119.0 PK			2.67 V	310	77.7	41.3
2	*5200.00	109.0 AV			2.67 V	310	67.7	41.3
3	#10400.00	59.3 PK	68.2	-8.9	2.22 V	198	38.0	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	111.3 PK			1.52 H	288	70.1	41.2
2	*5240.00	100.5 AV			1.52 H	288	59.3	41.2
3	5350.00	58.6 PK	74.0	-15.4	1.52 H	288	47.5	11.1
4	5350.00	45.3 AV	54.0	-8.7	1.52 H	288	34.2	11.1
5	#10480.00	59.7 PK	68.2	-8.5	1.66 H	110	38.3	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	118.0 PK			2.59 V	312	76.8	41.2
2	*5240.00	107.9 AV			2.59 V	312	66.7	41.2
3	5350.00	59.3 PK	74.0	-14.7	2.59 V	312	48.2	11.1
4	5350.00	45.7 AV	54.0	-8.3	2.59 V	312	34.6	11.1
5	#10480.00	59.3 PK	68.2	-8.9	2.22 V	187	37.9	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.6 PK	74.0	-15.4	1.72 H	241	47.2	11.4
2	5150.00	45.6 AV	54.0	-8.4	1.72 H	241	34.2	11.4
3	*5260.00	105.9 PK			1.72 H	241	64.8	41.1
4	*5260.00	95.1 AV			1.72 H	241	54.0	41.1
5	#10520.00	59.7 PK	68.2	-8.5	1.69 H	110	38.3	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.9 PK	74.0	-15.1	2.16 V	310	47.5	11.4
2	5150.00	45.7 AV	54.0	-8.3	2.16 V	310	34.3	11.4
3	*5260.00	114.1 PK			2.16 V	310	73.0	41.1
4	*5260.00	104.0 AV			2.16 V	310	62.9	41.1
5	#10520.00	59.4 PK	68.2	-8.8	2.21 V	190	38.0	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	105.0 PK			1.68 H	245	63.8	41.2
2	*5300.00	94.1 AV			1.68 H	245	52.9	41.2
3	10600.00	59.5 PK	74.0	-14.5	1.69 H	110	38.0	21.5
4	10600.00	46.2 AV	54.0	-7.8	1.69 H	110	24.7	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	113.7 PK			1.68 V	321	72.5	41.2
2	*5300.00	103.8 AV			1.68 V	321	62.6	41.2
3	10600.00	59.3 PK	74.0	-14.7	2.22 V	195	37.8	21.5
4	10600.00	46.0 AV	54.0	-8.0	2.22 V	195	24.5	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	104.9 PK			1.62 H	244	63.6	41.3
2	*5320.00	94.0 AV			1.62 H	244	52.7	41.3
3	5350.00	58.6 PK	74.0	-15.4	1.62 H	244	47.5	11.1
4	5350.00	45.1 AV	54.0	-8.9	1.62 H	244	34.0	11.1
5	10640.00	59.6 PK	74.0	-14.4	1.70 H	105	38.0	21.6
6	10640.00	46.5 AV	54.0	-7.5	1.70 H	105	24.9	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	112.9 PK			1.60 V	320	71.6	41.3
2	*5320.00	103.4 AV			1.60 V	320	62.1	41.3
3	5350.00	58.8 PK	74.0	-15.2	1.60 V	320	47.7	11.1
4	5350.00	45.7 AV	54.0	-8.3	1.60 V	320	34.6	11.1
5	10640.00	59.4 PK	74.0	-14.6	2.29 V	192	37.8	21.6
6	10640.00	46.2 AV	54.0	-7.8	2.29 V	192	24.6	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.0 PK	74.0	-15.0	1.47 H	106	47.7	11.3
2	5460.00	45.3 AV	54.0	-8.7	1.47 H	106	34.0	11.3
3	#5470.00	59.1 PK	68.2	-9.1	1.47 H	106	47.8	11.3
4	*5500.00	103.1 PK			1.47 H	106	61.5	41.6
5	*5500.00	93.3 AV			1.47 H	106	51.7	41.6
6	11000.00	59.6 PK	74.0	-14.4	1.69 H	106	38.2	21.4
7	11000.00	46.4 AV	54.0	-7.6	1.69 H	106	25.0	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.1 PK	74.0	-14.9	1.62 V	309	47.8	11.3
2	5460.00	45.5 AV	54.0	-8.5	1.62 V	309	34.2	11.3
3	#5470.00	59.3 PK	68.2	-8.9	1.62 V	309	48.0	11.3
4	*5500.00	112.6 PK			1.62 V	309	71.0	41.6
5	*5500.00	102.8 AV			1.62 V	309	61.2	41.6
6	11000.00	59.4 PK	74.0	-14.6	2.30 V	187	38.0	21.4
7	11000.00	46.2 AV	54.0	-7.8	2.30 V	187	24.8	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	103.0 PK			1.53 H	122	61.3	41.7
2	*5580.00	93.7 AV			1.53 H	122	52.0	41.7
3	11160.00	60.0 PK	74.0	-14.0	1.62 H	105	38.2	21.8
4	11160.00	46.7 AV	54.0	-7.3	1.62 H	105	24.9	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	112.8 PK			1.77 V	298	71.1	41.7
2	*5580.00	103.2 AV			1.77 V	298	61.5	41.7
3	11160.00	59.8 PK	74.0	-14.2	2.25 V	193	38.0	21.8
4	11160.00	46.5 AV	54.0	-7.5	2.25 V	193	24.7	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	102.6 PK			1.56 H	125	60.4	42.2
2	*5700.00	92.7 AV			1.56 H	125	50.5	42.2
3	#5725.00	59.8 PK	68.2	-8.4	1.56 H	125	48.0	11.8
4	11400.00	60.3 PK	74.0	-13.7	1.69 H	106	38.0	22.3
5	11400.00	47.0 AV	54.0	-7.0	1.69 H	106	24.7	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.7 PK			1.89 V	314	70.5	42.2
2	*5700.00	102.8 AV			1.89 V	314	60.6	42.2
3	#5725.00	60.0 PK	68.2	-8.2	1.89 V	314	48.2	11.8
4	11400.00	60.1 PK	74.0	-13.9	2.25 V	193	37.8	22.3
5	11400.00	46.8 AV	54.0	-7.2	2.25 V	193	24.5	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	59.1 PK	68.2	-9.1	1.17 H	116	47.8	11.3
2	*5720.00	103.0 PK			1.17 H	116	60.8	42.2
3	*5720.00	93.0 AV			1.17 H	116	50.8	42.2
4	#5850.00	59.7 PK	68.2	-8.5	1.17 H	116	47.7	12.0
5	11440.00	60.4 PK	74.0	-13.6	1.69 H	111	38.1	22.3
6	11440.00	47.3 AV	54.0	-6.7	1.69 H	111	25.0	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	59.3 PK	68.2	-8.9	1.77 V	317	48.0	11.3
2	*5720.00	112.9 PK			1.77 V	317	70.7	42.2
3	*5720.00	103.0 AV			1.77 V	317	60.8	42.2
4	#5850.00	59.8 PK	68.2	-8.4	1.77 V	317	47.8	12.0
5	11440.00	60.3 PK	74.0	-13.7	2.22 V	192	38.0	22.3
6	11440.00	47.1 AV	54.0	-6.9	2.22 V	192	24.8	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5609.60	60.0 PK	68.2	-8.2	1.79 H	120	48.5	11.5
2	*5745.00	107.8 PK			1.79 H	120	65.5	42.3
3	*5745.00	98.1 AV			1.79 H	120	55.8	42.3
4	#5965.60	61.1 PK	68.2	-7.1	1.79 H	120	48.9	12.2
5	11490.00	64.1 PK	74.0	-9.9	1.98 H	36	41.7	22.4
6	11490.00	50.9 AV	54.0	-3.1	1.98 H	36	28.5	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5640.80	61.3 PK	68.2	-6.9	2.04 V	328	49.7	11.6
2	*5745.00	118.7 PK			2.04 V	328	76.4	42.3
3	*5745.00	108.9 AV			2.04 V	328	66.6	42.3
4	#5936.40	61.4 PK	68.2	-6.8	2.04 V	328	49.1	12.3
5	11490.00	60.9 PK	74.0	-13.1	2.22 V	185	38.5	22.4
6	11490.00	47.6 AV	54.0	-6.4	2.22 V	185	25.2	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5624.80	60.6 PK	68.2	-7.6	1.15 H	119	49.1	11.5
2	*5785.00	107.3 PK			1.15 H	119	64.8	42.5
3	*5785.00	97.4 AV			1.15 H	119	54.9	42.5
4	#5968.80	61.4 PK	68.2	-6.8	1.15 H	119	49.2	12.2
5	11570.00	64.0 PK	74.0	-10.0	1.95 H	42	42.0	22.0
6	11570.00	50.7 AV	54.0	-3.3	1.95 H	42	28.7	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5604.00	60.9 PK	68.2	-7.3	1.96 V	329	49.5	11.4
2	*5785.00	117.3 PK			1.96 V	329	74.8	42.5
3	*5785.00	107.7 AV			1.96 V	329	65.2	42.5
4	#5940.00	62.1 PK	68.2	-6.1	1.96 V	329	49.8	12.3
5	11570.00	60.3 PK	74.0	-13.7	2.23 V	197	38.3	22.0
6	11570.00	47.1 AV	54.0	-6.9	2.23 V	197	25.1	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5612.40	59.8 PK	68.2	-8.4	1.04 H	119	48.3	11.5
2	*5825.00	106.9 PK			1.04 H	119	64.3	42.6
3	*5825.00	97.1 AV			1.04 H	119	54.5	42.6
4	#5937.20	61.2 PK	68.2	-7.0	1.04 H	119	48.9	12.3
5	11650.00	63.3 PK	74.0	-10.7	1.95 H	40	41.8	21.5
6	11650.00	50.2 AV	54.0	-3.8	1.95 H	40	28.7	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.80	60.2 PK	68.2	-8.0	1.96 V	330	48.6	11.6
2	*5825.00	117.3 PK			1.96 V	330	74.7	42.6
3	*5825.00	107.3 AV			1.96 V	330	64.7	42.6
4	#5969.60	61.3 PK	68.2	-6.9	1.96 V	330	49.1	12.2
5	11650.00	59.7 PK	74.0	-14.3	2.23 V	190	38.2	21.5
6	11650.00	46.8 AV	54.0	-7.2	2.23 V	190	25.3	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.9 PK	74.0	-9.1	1.54 H	287	53.5	11.4
2	5150.00	51.9 AV	54.0	-2.1	1.54 H	287	40.5	11.4
3	*5180.00	111.7 PK			1.54 H	287	70.3	41.4
4	*5180.00	99.5 AV			1.54 H	287	58.1	41.4
5	#10360.00	59.3 PK	68.2	-8.9	1.68 H	109	38.3	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.0 PK	74.0	-5.0	2.51 V	313	57.6	11.4
2	5150.00	53.6 AV	54.0	-0.4	2.51 V	313	42.2	11.4
3	*5180.00	119.0 PK			2.51 V	313	77.6	41.4
4	*5180.00	106.8 AV			2.51 V	313	65.4	41.4
5	#10360.00	59.0 PK	68.2	-9.2	2.25 V	195	38.0	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	112.4 PK			1.42 H	289	71.1	41.3
2	*5200.00	100.9 AV			1.42 H	289	59.6	41.3
3	#10400.00	59.6 PK	68.2	-8.6	1.66 H	105	38.3	21.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	119.7 PK			2.51 V	313	78.4	41.3
2	*5200.00	107.8 AV			2.51 V	313	66.5	41.3
3	#10400.00	59.3 PK	68.2	-8.9	2.22 V	182	38.0	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	112.6 PK			1.54 H	290	71.4	41.2
2	*5240.00	99.9 AV			1.54 H	290	58.7	41.2
3	5350.00	58.6 PK	74.0	-15.4	1.54 H	290	47.5	11.1
4	5350.00	45.4 AV	54.0	-8.6	1.54 H	290	34.3	11.1
5	#10480.00	59.6 PK	68.2	-8.6	1.69 H	112	38.2	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	119.1 PK			2.47 V	319	77.9	41.2
2	*5240.00	107.8 AV			2.47 V	319	66.6	41.2
3	5350.00	58.8 PK	74.0	-15.2	2.47 V	319	47.7	11.1
4	5350.00	45.6 AV	54.0	-8.4	2.47 V	319	34.5	11.1
5	#10480.00	59.3 PK	68.2	-8.9	2.25 V	193	37.9	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.8 PK	74.0	-15.2	1.61 H	245	47.4	11.4
2	5150.00	45.7 AV	54.0	-8.3	1.61 H	245	34.3	11.4
3	*5260.00	106.8 PK			1.61 H	245	65.7	41.1
4	*5260.00	94.6 AV			1.61 H	245	53.5	41.1
5	#10520.00	59.5 PK	68.2	-8.7	1.66 H	102	38.1	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.0 PK	74.0	-15.0	1.98 V	318	47.6	11.4
2	5150.00	45.9 AV	54.0	-8.1	1.98 V	318	34.5	11.4
3	*5260.00	115.4 PK			1.98 V	318	74.3	41.1
4	*5260.00	103.5 AV			1.98 V	318	62.4	41.1
5	#10520.00	59.3 PK	68.2	-8.9	2.22 V	195	37.9	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	106.7 PK			1.62 H	248	65.5	41.2
2	*5300.00	93.8 AV			1.62 H	248	52.6	41.2
3	10600.00	59.5 PK	74.0	-14.5	1.66 H	106	38.0	21.5
4	10600.00	46.2 AV	54.0	-7.8	1.66 H	106	24.7	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	115.0 PK			2.29 V	323	73.8	41.2
2	*5300.00	103.0 AV			2.29 V	323	61.8	41.2
3	10600.00	59.3 PK	74.0	-14.7	2.20 V	182	37.8	21.5
4	10600.00	46.0 AV	54.0	-8.0	2.20 V	182	24.5	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	105.9 PK			1.60 H	247	64.6	41.3
2	*5320.00	94.1 AV			1.60 H	247	52.8	41.3
3	5350.00	58.3 PK	74.0	-15.7	1.60 H	247	47.2	11.1
4	5350.00	45.3 AV	54.0	-8.7	1.60 H	247	34.2	11.1
5	10640.00	59.6 PK	74.0	-14.4	1.70 H	112	38.0	21.6
6	10640.00	46.2 AV	54.0	-7.8	1.70 H	112	24.6	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.4 PK			1.79 V	325	74.1	41.3
2	*5320.00	102.9 AV			1.79 V	325	61.6	41.3
3	5350.00	58.8 PK	74.0	-15.2	1.79 V	325	47.7	11.1
4	5350.00	45.7 AV	54.0	-8.3	1.79 V	325	34.6	11.1
5	10640.00	59.4 PK	74.0	-14.6	2.23 V	197	37.8	21.6
6	10640.00	46.0 AV	54.0	-8.0	2.23 V	197	24.4	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.1 PK	74.0	-14.9	1.57 H	128	47.8	11.3
2	5460.00	45.5 AV	54.0	-8.5	1.57 H	128	34.2	11.3
3	#5470.00	59.5 PK	68.2	-8.7	1.57 H	128	48.2	11.3
4	*5500.00	103.8 PK			1.57 H	128	62.2	41.6
5	*5500.00	92.2 AV			1.57 H	128	50.6	41.6
6	11000.00	59.6 PK	74.0	-14.4	1.72 H	105	38.2	21.4
7	11000.00	46.4 AV	54.0	-7.6	1.72 H	105	25.0	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.3 PK	74.0	-14.7	1.83 V	342	48.0	11.3
2	5460.00	45.6 AV	54.0	-8.4	1.83 V	342	34.3	11.3
3	#5470.00	59.9 PK	68.2	-8.3	1.83 V	342	48.6	11.3
4	*5500.00	114.5 PK			1.83 V	342	72.9	41.6
5	*5500.00	102.3 AV			1.83 V	342	60.7	41.6
6	11000.00	59.4 PK	74.0	-14.6	2.22 V	182	38.0	21.4
7	11000.00	46.2 AV	54.0	-7.8	2.22 V	182	24.8	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	105.4 PK			1.55 H	125	63.7	41.7
2	*5580.00	93.8 AV			1.55 H	125	52.1	41.7
3	11160.00	60.0 PK	74.0	-14.0	1.69 H	107	38.2	21.8
4	11160.00	46.8 AV	54.0	-7.2	1.69 H	107	25.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	114.5 PK			1.76 V	303	72.8	41.7
2	*5580.00	102.6 AV			1.76 V	303	60.9	41.7
3	11160.00	59.8 PK	74.0	-14.2	2.22 V	198	38.0	21.8
4	11160.00	46.5 AV	54.0	-7.5	2.22 V	198	24.7	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	105.6 PK			1.56 H	121	63.4	42.2
2	*5700.00	93.0 AV			1.56 H	121	50.8	42.2
3	#5725.00	59.8 PK	68.2	-8.4	1.56 H	121	48.0	11.8
4	11400.00	60.5 PK	74.0	-13.5	1.77 H	108	38.2	22.3
5	11400.00	47.1 AV	54.0	-6.9	1.77 H	108	24.8	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	115.8 PK			1.87 V	322	73.6	42.2
2	*5700.00	102.7 AV			1.87 V	322	60.5	42.2
3	#5725.00	65.3 PK	68.2	-2.9	1.87 V	322	53.5	11.8
4	11400.00	60.4 PK	74.0	-13.6	2.22 V	192	38.1	22.3
5	11400.00	47.0 AV	54.0	-7.0	2.22 V	192	24.7	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	59.3 PK	68.2	-8.9	1.74 H	123	48.0	11.3
2	*5720.00	105.2 PK			1.74 H	123	63.0	42.2
3	*5720.00	92.4 AV			1.74 H	123	50.2	42.2
4	#5850.00	59.8 PK	68.2	-8.4	1.74 H	123	47.8	12.0
5	11440.00	60.3 PK	74.0	-13.7	1.69 H	106	38.0	22.3
6	11440.00	47.2 AV	54.0	-6.8	1.69 H	106	24.9	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	59.4 PK	68.2	-8.8	1.85 V	319	48.1	11.3
2	*5720.00	115.9 PK			1.85 V	319	73.7	42.2
3	*5720.00	102.9 AV			1.85 V	319	60.7	42.2
4	#5850.00	60.0 PK	68.2	-8.2	1.85 V	319	48.0	12.0
5	11440.00	60.1 PK	74.0	-13.9	2.28 V	192	37.8	22.3
6	11440.00	47.0 AV	54.0	-7.0	2.28 V	192	24.7	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5604.00	59.2 PK	68.2	-9.0	1.18 H	118	47.8	11.4
2	*5745.00	110.1 PK			1.18 H	118	67.8	42.3
3	*5745.00	97.8 AV			1.18 H	118	55.5	42.3
4	#5931.20	60.3 PK	68.2	-7.9	1.18 H	118	48.0	12.3
5	11490.00	63.9 PK	74.0	-10.1	1.98 H	37	41.5	22.4
6	11490.00	50.9 AV	54.0	-3.1	1.98 H	37	28.5	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5639.20	61.8 PK	68.2	-6.4	2.03 V	324	50.2	11.6
2	*5745.00	119.9 PK			2.03 V	324	77.6	42.3
3	*5745.00	108.0 AV			2.03 V	324	65.7	42.3
4	#5940.00	61.2 PK	68.2	-7.0	2.03 V	324	48.9	12.3
5	11490.00	60.8 PK	74.0	-13.2	2.22 V	189	38.4	22.4
6	11490.00	47.5 AV	54.0	-6.5	2.22 V	189	25.1	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5630.00	59.5 PK	68.2	-8.7	1.11 H	117	48.0	11.5
2	*5785.00	108.5 PK			1.11 H	117	66.0	42.5
3	*5785.00	96.4 AV			1.11 H	117	53.9	42.5
4	#5940.00	60.0 PK	68.2	-8.2	1.11 H	117	47.7	12.3
5	11570.00	63.2 PK	74.0	-10.8	1.92 H	36	41.2	22.0
6	11570.00	50.2 AV	54.0	-3.8	1.92 H	36	28.2	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5616.80	60.1 PK	68.2	-8.1	1.95 V	322	48.6	11.5
2	*5785.00	118.2 PK			1.95 V	322	75.7	42.5
3	*5785.00	107.1 AV			1.95 V	322	64.6	42.5
4	#5956.80	61.1 PK	68.2	-7.1	1.95 V	322	48.8	12.3
5	11570.00	60.5 PK	74.0	-13.5	2.23 V	192	38.5	22.0
6	11570.00	47.2 AV	54.0	-6.8	2.23 V	192	25.2	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5646.00	60.0 PK	68.2	-8.2	1.15 H	118	48.4	11.6
2	*5825.00	108.6 PK			1.15 H	118	66.0	42.6
3	*5825.00	96.6 AV			1.15 H	118	54.0	42.6
4	#5958.00	60.9 PK	68.2	-7.3	1.15 H	118	48.7	12.2
5	11650.00	62.7 PK	74.0	-11.3	1.95 H	39	41.2	21.5
6	11650.00	49.7 AV	54.0	-4.3	1.95 H	39	28.2	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5641.60	61.0 PK	68.2	-7.2	2.01 V	328	49.4	11.6
2	*5825.00	119.7 PK			2.01 V	328	77.1	42.6
3	*5825.00	107.2 AV			2.01 V	328	64.6	42.6
4	#5953.20	61.0 PK	68.2	-7.2	2.01 V	328	48.7	12.3
5	11650.00	59.9 PK	74.0	-14.1	2.31 V	189	38.4	21.5
6	11650.00	46.6 AV	54.0	-7.4	2.31 V	189	25.1	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.4 PK	74.0	-13.6	1.63 H	284	49.0	11.4
2	5150.00	47.7 AV	54.0	-6.3	1.63 H	284	36.3	11.4
3	*5190.00	104.0 PK			1.63 H	284	62.7	41.3
4	*5190.00	91.7 AV			1.63 H	284	50.4	41.3
5	#10380.00	59.1 PK	68.2	-9.1	1.69 H	112	38.0	21.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.6 PK	74.0	-6.4	1.75 V	305	56.2	11.4
2	5150.00	53.9 AV	54.0	-0.1	1.75 V	305	42.5	11.4
3	*5190.00	112.7 PK			1.75 V	305	71.4	41.3
4	*5190.00	99.9 AV			1.75 V	305	58.6	41.3
5	#10380.00	58.9 PK	68.2	-9.3	2.22 V	182	37.8	21.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.4 PK	74.0	-11.6	1.39 H	289	51.0	11.4
2	5150.00	47.9 AV	54.0	-6.1	1.39 H	289	36.5	11.4
3	*5230.00	109.1 PK			1.39 H	289	67.9	41.2
4	*5230.00	96.8 AV			1.39 H	289	55.6	41.2
5	5350.00	58.3 PK	74.0	-15.7	1.39 H	289	47.2	11.1
6	5350.00	45.1 AV	54.0	-8.9	1.39 H	289	34.0	11.1
7	#10460.00	59.6 PK	68.2	-8.6	1.62 H	105	38.2	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.6 PK	74.0	-6.4	2.23 V	324	56.2	11.4
2	5150.00	53.2 AV	54.0	-0.8	2.23 V	324	41.8	11.4
3	*5230.00	117.3 PK			2.23 V	324	76.1	41.2
4	*5230.00	105.0 AV			2.23 V	324	63.8	41.2
5	5350.00	59.4 PK	74.0	-14.6	2.23 V	324	48.3	11.1
6	5350.00	45.6 AV	54.0	-8.4	2.23 V	324	34.5	11.1
7	#10460.00	59.4 PK	68.2	-8.8	2.22 V	180	38.0	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.7 PK	74.0	-15.3	1.66 H	246	47.3	11.4
2	5150.00	45.6 AV	54.0	-8.4	1.66 H	246	34.2	11.4
3	*5270.00	104.5 PK			1.66 H	246	63.4	41.1
4	*5270.00	91.4 AV			1.66 H	246	50.3	41.1
5	#10540.00	59.4 PK	68.2	-8.8	1.68 H	108	38.0	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.9 PK	74.0	-15.1	2.47 V	323	47.5	11.4
2	5150.00	45.7 AV	54.0	-8.3	2.47 V	323	34.3	11.4
3	*5270.00	113.4 PK			2.47 V	323	72.3	41.1
4	*5270.00	101.6 AV			2.47 V	323	60.5	41.1
5	#10540.00	59.1 PK	68.2	-9.1	2.30 V	189	37.7	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	102.7 PK			1.64 H	244	61.5	41.2
2	*5310.00	90.1 AV			1.64 H	244	48.9	41.2
3	5350.00	58.6 PK	74.0	-15.4	1.64 H	244	47.5	11.1
4	5350.00	46.4 AV	54.0	-7.6	1.64 H	244	35.3	11.1
5	10620.00	59.5 PK	74.0	-14.5	1.62 H	108	38.0	21.5
6	10620.00	46.0 AV	54.0	-8.0	1.62 H	108	24.5	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	112.9 PK			1.76 V	325	71.7	41.2
2	*5310.00	99.8 AV			1.76 V	325	58.6	41.2
3	5350.00	66.9 PK	74.0	-7.1	1.76 V	325	55.8	11.1
4	5350.00	53.6 AV	54.0	-0.4	1.76 V	325	42.5	11.1
5	10620.00	59.3 PK	74.0	-14.7	2.21 V	190	37.8	21.5
6	10620.00	45.7 AV	54.0	-8.3	2.21 V	190	24.2	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.1 PK	74.0	-14.9	1.68 H	120	47.8	11.3
2	5460.00	45.8 AV	54.0	-8.2	1.68 H	120	34.5	11.3
3	#5470.00	59.5 PK	68.2	-8.7	1.68 H	120	48.2	11.3
4	*5510.00	102.6 PK			1.68 H	120	61.0	41.6
5	*5510.00	89.7 AV			1.68 H	120	48.1	41.6
6	11020.00	59.6 PK	74.0	-14.4	1.75 H	112	38.2	21.4
7	11020.00	46.4 AV	54.0	-7.6	1.75 H	112	25.0	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.0 PK	74.0	-11.0	1.78 V	341	51.7	11.3
2	5460.00	47.9 AV	54.0	-6.1	1.78 V	341	36.6	11.3
3	#5470.00	66.5 PK	68.2	-1.7	1.78 V	341	55.2	11.3
4	*5510.00	111.9 PK			1.78 V	341	70.3	41.6
5	*5510.00	98.9 AV			1.78 V	341	57.3	41.6
6	11020.00	59.4 PK	74.0	-14.6	2.29 V	187	38.0	21.4
7	11020.00	46.2 AV	54.0	-7.8	2.29 V	187	24.8	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	102.5 PK			1.67 H	128	60.9	41.6
2	*5550.00	89.9 AV			1.67 H	128	48.3	41.6
3	11100.00	60.0 PK	74.0	-14.0	1.70 H	102	38.2	21.8
4	11100.00	46.7 AV	54.0	-7.3	1.70 H	102	24.9	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	111.7 PK			1.78 V	345	70.1	41.6
2	*5550.00	98.4 AV			1.78 V	345	56.8	41.6
3	11100.00	59.9 PK	74.0	-14.1	2.22 V	193	38.1	21.8
4	11100.00	46.6 AV	54.0	-7.4	2.22 V	193	24.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	103.8 PK			1.46 H	119	61.8	42.0
2	*5670.00	90.8 AV			1.46 H	119	48.8	42.0
3	#5725.00	60.0 PK	68.2	-8.2	1.46 H	119	48.2	11.8
4	11340.00	60.2 PK	74.0	-13.8	1.75 H	112	38.2	22.0
5	11340.00	47.0 AV	54.0	-7.0	1.75 H	112	25.0	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	112.3 PK			1.78 V	323	70.3	42.0
2	*5670.00	100.1 AV			1.78 V	323	58.1	42.0
3	#5725.00	63.1 PK	68.2	-5.1	1.78 V	323	51.3	11.8
4	11340.00	60.0 PK	74.0	-14.0	2.25 V	192	38.0	22.0
5	11340.00	46.7 AV	54.0	-7.3	2.25 V	192	24.7	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	58.9 PK	68.2	-9.3	1.54 H	118	47.6	11.3
2	*5710.00	102.3 PK			1.54 H	118	60.1	42.2
3	*5710.00	89.8 AV			1.54 H	118	47.6	42.2
4	#5850.00	59.5 PK	68.2	-8.7	1.54 H	118	47.5	12.0
5	11420.00	60.4 PK	74.0	-13.6	1.66 H	105	38.1	22.3
6	11420.00	47.0 AV	54.0	-7.0	1.66 H	105	24.7	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	59.0 PK	68.2	-9.2	1.99 V	318	47.7	11.3
2	*5710.00	112.5 PK			1.99 V	318	70.3	42.2
3	*5710.00	100.4 AV			1.99 V	318	58.2	42.2
4	#5850.00	59.6 PK	68.2	-8.6	1.99 V	318	47.6	12.0
5	11420.00	60.3 PK	74.0	-13.7	2.20 V	182	38.0	22.3
6	11420.00	46.8 AV	54.0	-7.2	2.20 V	182	24.5	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5640.80	59.7 PK	68.2	-8.5	1.32 H	119	48.1	11.6
2	*5755.00	106.9 PK			1.32 H	119	64.5	42.4
3	*5755.00	94.6 AV			1.32 H	119	52.2	42.4
4	#5942.00	60.4 PK	68.2	-7.8	1.32 H	119	48.1	12.3
5	11510.00	62.5 PK	74.0	-11.5	1.99 H	35	40.2	22.3
6	11510.00	49.5 AV	54.0	-4.5	1.99 H	35	27.2	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.40	61.4 PK	68.2	-6.8	1.95 V	331	49.8	11.6
2	*5755.00	117.9 PK			1.95 V	331	75.5	42.4
3	*5755.00	105.9 AV			1.95 V	331	63.5	42.4
4	#5948.00	60.8 PK	68.2	-7.4	1.95 V	331	48.4	12.4
5	11510.00	60.5 PK	74.0	-13.5	2.29 V	185	38.2	22.3
6	11510.00	47.4 AV	54.0	-6.6	2.29 V	185	25.1	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5630.00	60.0 PK	68.2	-8.2	1.12 H	119	48.5	11.5
2	*5795.00	106.2 PK			1.12 H	119	63.6	42.6
3	*5795.00	93.3 AV			1.12 H	119	50.7	42.6
4	#5950.80	61.0 PK	68.2	-7.2	1.12 H	119	48.7	12.3
5	11590.00	61.8 PK	74.0	-12.2	1.95 H	33	40.0	21.8
6	11590.00	48.8 AV	54.0	-5.2	1.95 H	33	27.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5613.20	60.1 PK	68.2	-8.1	1.97 V	330	48.6	11.5
2	*5795.00	117.6 PK			1.97 V	330	75.0	42.6
3	*5795.00	104.9 AV			1.97 V	330	62.3	42.6
4	#5984.80	61.6 PK	68.2	-6.6	1.97 V	330	49.4	12.2
5	11590.00	60.2 PK	74.0	-13.8	2.25 V	198	38.4	21.8
6	11590.00	47.0 AV	54.0	-7.0	2.25 V	198	25.2	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.9 PK	74.0	-14.1	1.45 H	287	48.5	11.4
2	5150.00	47.2 AV	54.0	-6.8	1.45 H	287	35.8	11.4
3	*5210.00	101.2 PK			1.45 H	287	59.9	41.3
4	*5210.00	88.7 AV			1.45 H	287	47.4	41.3
5	#10420.00	59.2 PK	68.2	-9.0	1.61 H	106	38.0	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.6 PK	74.0	-9.4	2.50 V	308	53.2	11.4
2	5150.00	53.2 AV	54.0	-0.8	2.50 V	308	41.8	11.4
3	*5210.00	109.1 PK			2.50 V	308	67.8	41.3
4	*5210.00	96.7 AV			2.50 V	308	55.4	41.3
5	#10420.00	59.0 PK	68.2	-9.2	2.22 V	190	37.8	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	99.0 PK			1.62 H	250	57.8	41.2
2	*5290.00	86.9 AV			1.62 H	250	45.7	41.2
3	5350.00	60.1 PK	74.0	-13.9	1.62 H	250	49.0	11.1
4	5350.00	47.1 AV	54.0	-6.9	1.62 H	250	36.0	11.1
5	#10580.00	59.5 PK	68.2	-8.7	1.70 H	105	38.0	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	109.3 PK			1.75 V	325	68.1	41.2
2	*5290.00	97.2 AV			1.75 V	325	56.0	41.2
3	5350.00	68.6 PK	74.0	-5.4	1.75 V	325	57.5	11.1
4	5350.00	53.9 AV	54.0	-0.1	1.75 V	325	42.8	11.1
5	#10580.00	59.2 PK	68.2	-9.0	2.23 V	192	37.7	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.3 PK	74.0	-14.7	1.67 H	125	48.0	11.3
2	5460.00	46.3 AV	54.0	-7.7	1.67 H	125	35.0	11.3
3	#5470.00	60.1 PK	68.2	-8.1	1.67 H	125	48.8	11.3
4	*5530.00	99.0 PK			1.67 H	125	57.4	41.6
5	*5530.00	86.4 AV			1.67 H	125	44.8	41.6
6	11060.00	59.6 PK	74.0	-14.4	1.75 H	111	38.0	21.6
7	11060.00	46.4 AV	54.0	-7.6	1.75 H	111	24.8	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.2 PK	74.0	-7.8	1.55 V	343	54.9	11.3
2	5460.00	53.5 AV	54.0	-0.5	1.55 V	343	42.2	11.3
3	#5470.00	67.3 PK	68.2	-0.9	1.55 V	343	56.0	11.3
4	*5530.00	108.3 PK			1.50 V	343	66.7	41.6
5	*5530.00	95.6 AV			1.50 V	343	54.0	41.6
6	11060.00	59.4 PK	74.0	-14.6	2.22 V	189	37.8	21.6
7	11060.00	46.1 AV	54.0	-7.9	2.22 V	189	24.5	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	101.2 PK			1.67 H	123	59.3	41.9
2	*5610.00	88.9 AV			1.67 H	123	47.0	41.9
3	#5725.00	59.3 PK	68.2	-8.9	1.67 H	123	47.5	11.8
4	11220.00	60.0 PK	74.0	-14.0	1.75 H	109	38.2	21.8
5	11220.00	46.6 AV	54.0	-7.4	1.75 H	109	24.8	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	110.8 PK			1.94 V	299	68.9	41.9
2	*5610.00	98.0 AV			1.94 V	299	56.1	41.9
3	#5725.00	59.4 PK	68.2	-8.8	1.94 V	299	47.6	11.8
4	11220.00	59.8 PK	74.0	-14.2	2.20 V	193	38.0	21.8
5	11220.00	46.4 AV	54.0	-7.6	2.20 V	193	24.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	58.9 PK	68.2	-9.3	1.04 H	116	47.6	11.3
2	*5690.00	99.5 PK			1.04 H	116	57.3	42.2
3	*5690.00	87.9 AV			1.04 H	116	45.7	42.2
4	#5850.00	59.6 PK	68.2	-8.6	1.04 H	116	47.6	12.0
5	11380.00	60.4 PK	74.0	-13.6	1.75 H	112	38.2	22.2
6	11380.00	47.0 AV	54.0	-7.0	1.75 H	112	24.8	22.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	59.0 PK	68.2	-9.2	2.06 V	319	47.7	11.3
2	*5690.00	109.5 PK			2.06 V	319	67.3	42.2
3	*5690.00	97.2 AV			2.06 V	319	55.0	42.2
4	#5850.00	59.7 PK	68.2	-8.5	2.06 V	319	47.7	12.0
5	11380.00	60.2 PK	74.0	-13.8	2.25 V	187	38.0	22.2
6	11380.00	46.7 AV	54.0	-7.3	2.25 V	187	24.5	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.00	61.1 PK	68.2	-7.1	1.25 H	119	49.5	11.6
2	*5775.00	103.5 PK			1.25 H	119	61.0	42.5
3	*5775.00	91.9 AV			1.25 H	119	49.4	42.5
4	#5926.00	61.8 PK	68.2	-6.4	1.25 H	119	49.5	12.3
5	11550.00	61.9 PK	74.0	-12.1	1.95 H	41	39.8	22.1
6	11550.00	48.6 AV	54.0	-5.4	1.95 H	41	26.5	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	67.4 PK	68.2	-0.8	1.96 V	332	55.8	11.6
2	*5775.00	115.9 PK			1.96 V	332	73.4	42.5
3	*5775.00	103.3 AV			1.96 V	332	60.8	42.5
4	#5928.80	65.0 PK	68.2	-3.2	1.96 V	332	52.7	12.3
5	11550.00	60.3 PK	74.0	-13.7	2.31 V	192	38.2	22.1
6	11550.00	47.1 AV	54.0	-6.9	2.31 V	192	25.0	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.7 PK	74.0	-12.3	1.42 H	287	50.3	11.4
2	5150.00	47.9 AV	54.0	-6.1	1.42 H	287	36.5	11.4
3	*5250.00	97.6 PK			1.42 H	287	56.5	41.1
4	*5250.00	85.8 AV			1.42 H	287	44.7	41.1
5	5350.00	60.3 PK	74.0	-13.7	1.42 H	287	49.2	11.1
6	5350.00	46.1 AV	54.0	-7.9	1.42 H	287	35.0	11.1
7	#10500.00	59.7 PK	68.2	-8.5	1.70 H	112	38.3	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5090.00	69.3 PK	74.0	-4.7	1.93 V	313	58.1	11.2
2	5090.00	53.4 AV	54.0	-0.6	1.93 V	313	42.2	11.2
3	*5250.00	107.1 PK			1.93 V	313	66.0	41.1
4	*5250.00	94.4 AV			1.93 V	313	53.3	41.1
5	5370.00	66.0 PK	74.0	-8.0	1.93 V	313	54.7	11.3
6	5370.00	51.7 AV	54.0	-2.3	1.93 V	313	40.4	11.3
7	#10500.00	59.6 PK	68.2	-8.6	2.22 V	195	38.2	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.1 PK	74.0	-14.9	1.60 H	127	47.8	11.3
2	5460.00	46.3 AV	54.0	-7.7	1.60 H	127	35.0	11.3
3	#5470.00	59.8 PK	68.2	-8.4	1.60 H	127	48.5	11.3
4	*5570.00	97.2 PK			1.60 H	127	55.5	41.7
5	*5570.00	85.5 AV			1.60 H	127	43.8	41.7
6	#5725.00	59.8 PK	68.2	-8.4	1.60 H	127	48.0	11.8
7	11140.00	59.9 PK	74.0	-14.1	1.69 H	105	38.1	21.8
8	11140.00	47.1 AV	54.0	-6.9	1.69 H	105	25.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	67.1 PK	74.0	-6.9	1.51 V	344	55.8	11.3
2	5460.00	53.6 AV	54.0	-0.4	1.51 V	344	42.3	11.3
3	#5470.00	67.5 PK	68.2	-0.7	1.51 V	344	56.2	11.3
4	*5570.00	107.3 PK			1.51 V	344	65.6	41.7
5	*5570.00	94.9 AV			1.51 V	344	53.2	41.7
6	#5725.00	63.3 PK	68.2	-4.9	1.51 V	344	51.5	11.8
7	11140.00	59.8 PK	74.0	-14.2	2.35 V	189	38.0	21.8
8	11140.00	47.0 AV	54.0	-7.0	2.35 V	189	25.2	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT240)	Channel	CH 114+138 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.9 PK	74.0	-15.1	1.62 H	133	47.6	11.3
2	5460.00	45.3 AV	54.0	-8.7	1.62 H	133	34.0	11.3
3	#5470.00	59.8 PK	68.2	-8.4	1.62 H	133	48.5	11.3
4	*5610.00	95.3 PK			1.62 H	133	53.4	41.9
5	*5610.00	82.8 AV			1.62 H	133	40.9	41.9
6	#5850.00	58.7 PK	68.2	-9.5	1.62 H	133	46.7	12.0
7	11220.00	59.7 PK	74.0	-14.3	1.77 H	104	37.9	21.8
8	11220.00	46.8 AV	54.0	-7.2	1.77 H	104	25.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5403.00	67.7 PK	74.0	-6.3	1.53 V	301	56.4	11.3
2	5403.00	53.3 AV	54.0	-0.7	1.53 V	301	42.0	11.3
3	#5470.00	66.4 PK	68.2	-1.8	1.53 V	301	55.1	11.3
4	*5610.00	105.2 PK			1.53 V	301	63.3	41.9
5	*5610.00	92.0 AV			1.53 V	301	50.1	41.9
6	#5850.00	59.9 PK	68.2	-8.3	1.53 V	301	47.9	12.0
7	11220.00	60.0 PK	74.0	-14.0	2.40 V	184	38.2	21.8
8	11220.00	47.1 AV	54.0	-6.9	2.40 V	184	25.3	21.8


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


Plot of Band Edge

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11a Channel 36

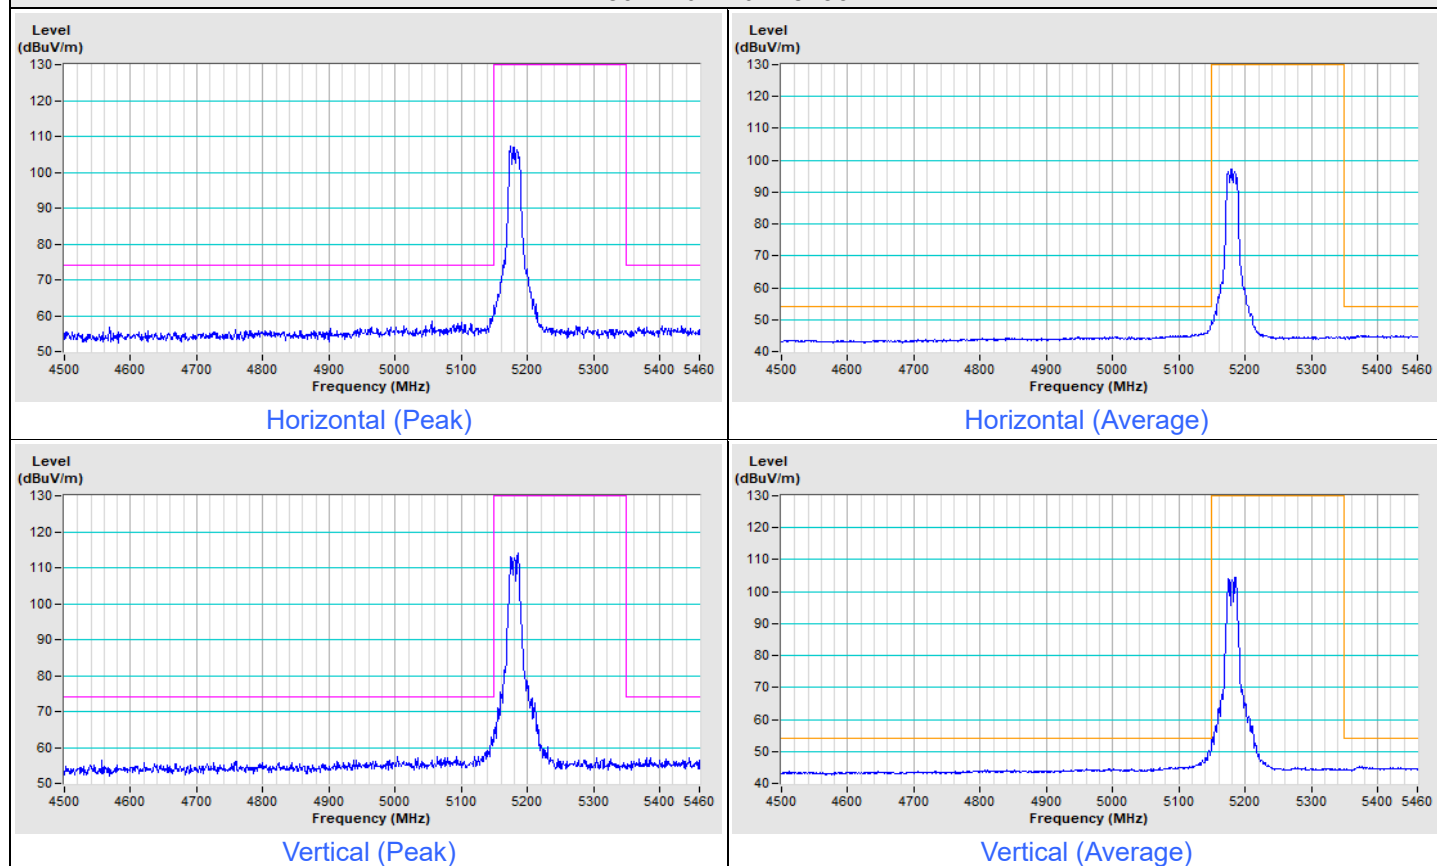


802.11a Channel 48

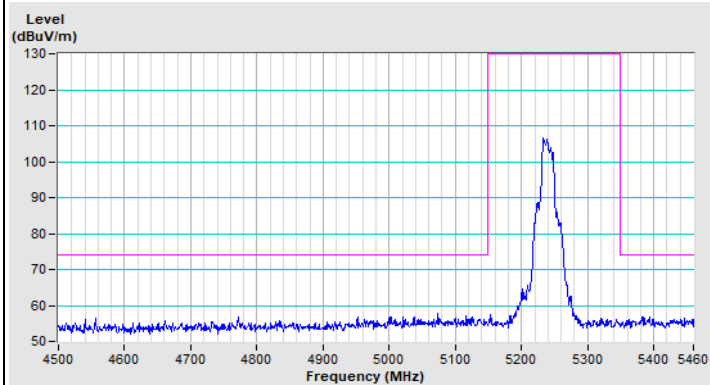


Horizontal (Peak)

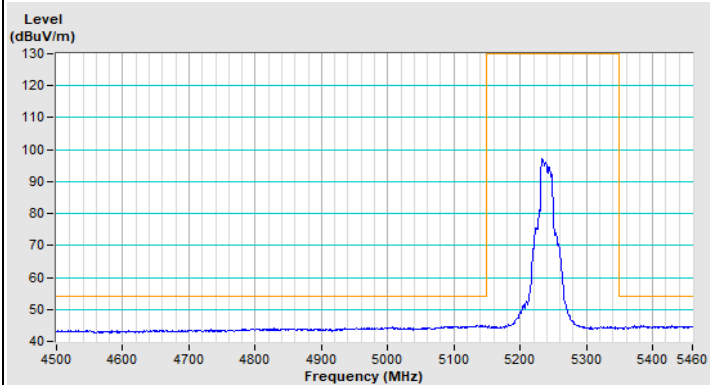

Horizontal (Average)

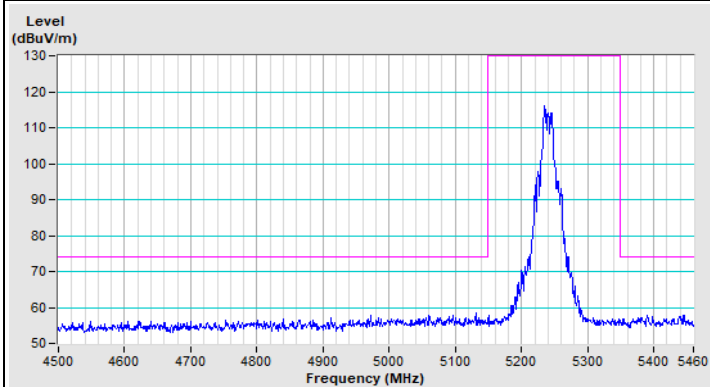


Vertical (Peak)

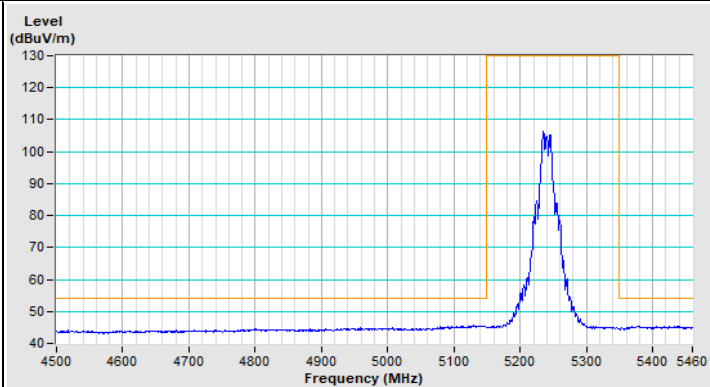


Vertical (Average)


802.11a Channel 52

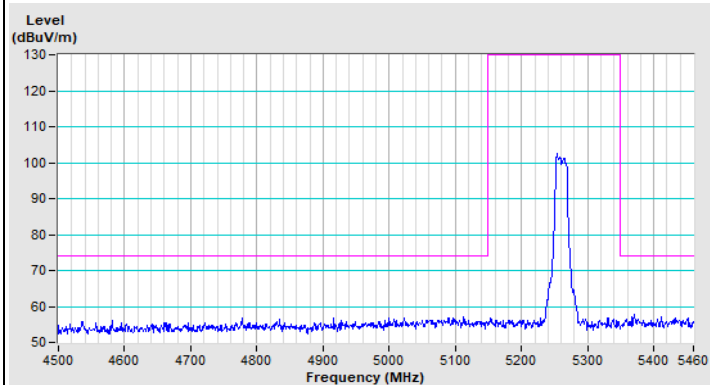


Horizontal (Peak)

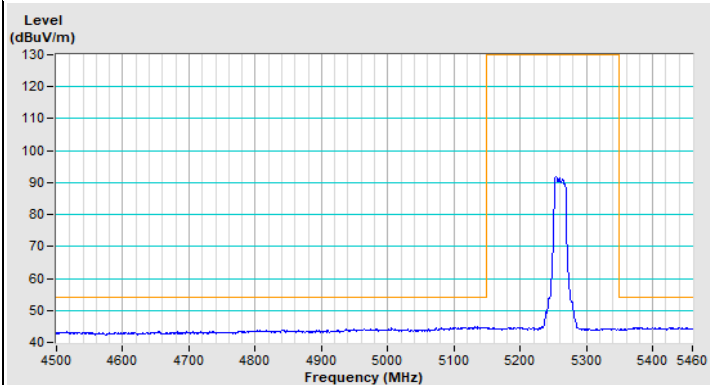


Horizontal (Average)

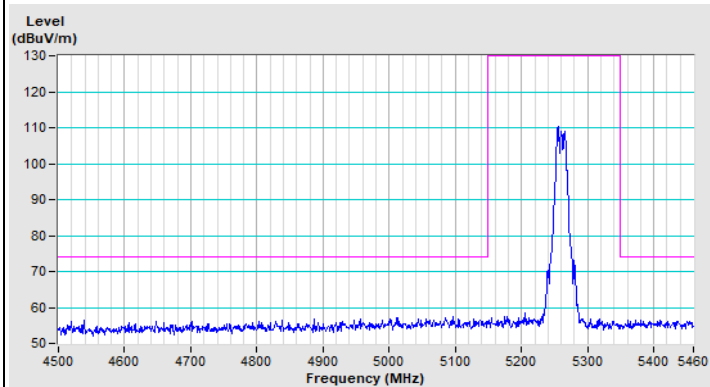


Vertical (Peak)

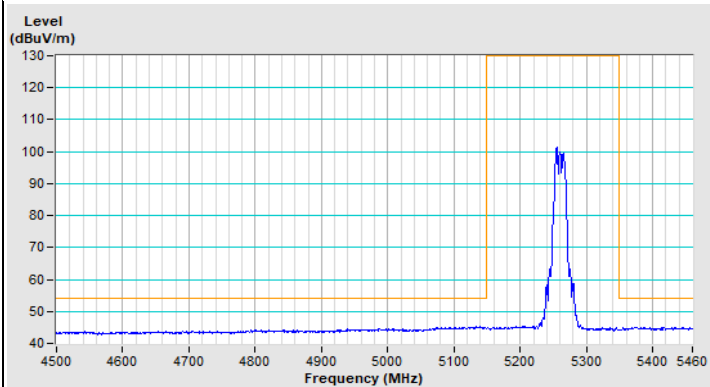


Vertical (Average)

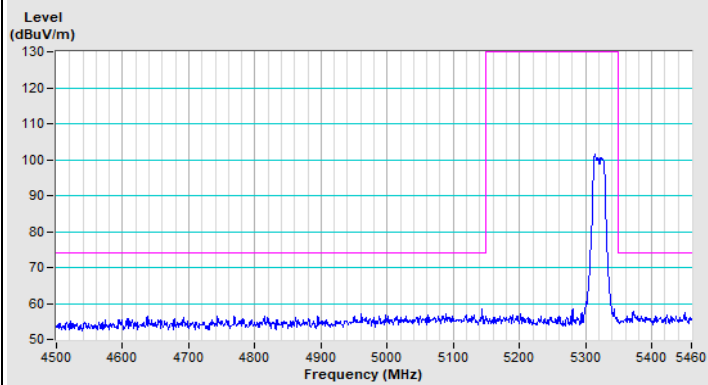802.11a Channel 64


Horizontal (Peak)

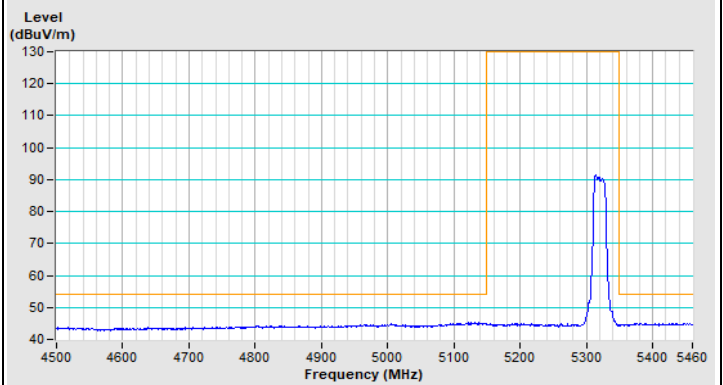

Horizontal (Average)

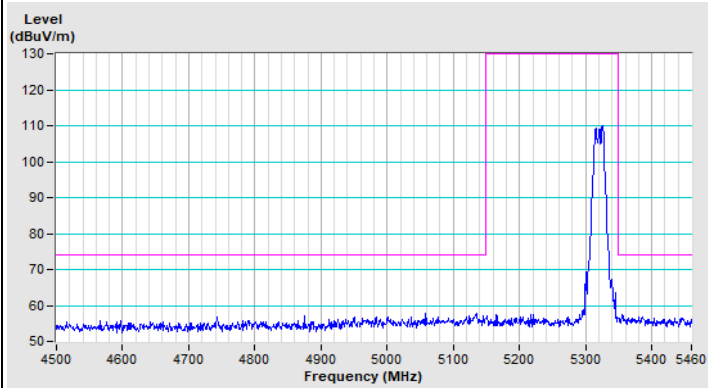


Vertical (Peak)

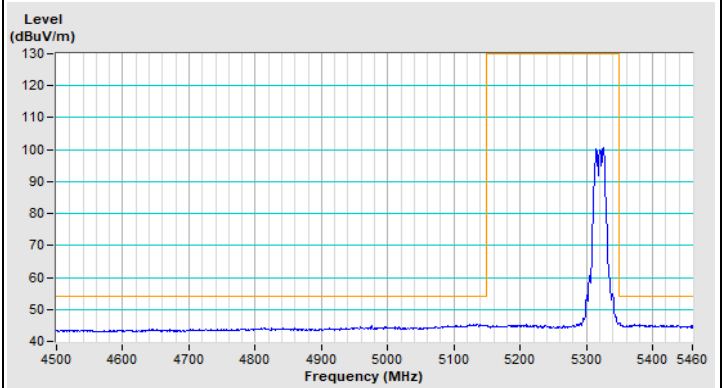


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11a Channel 100

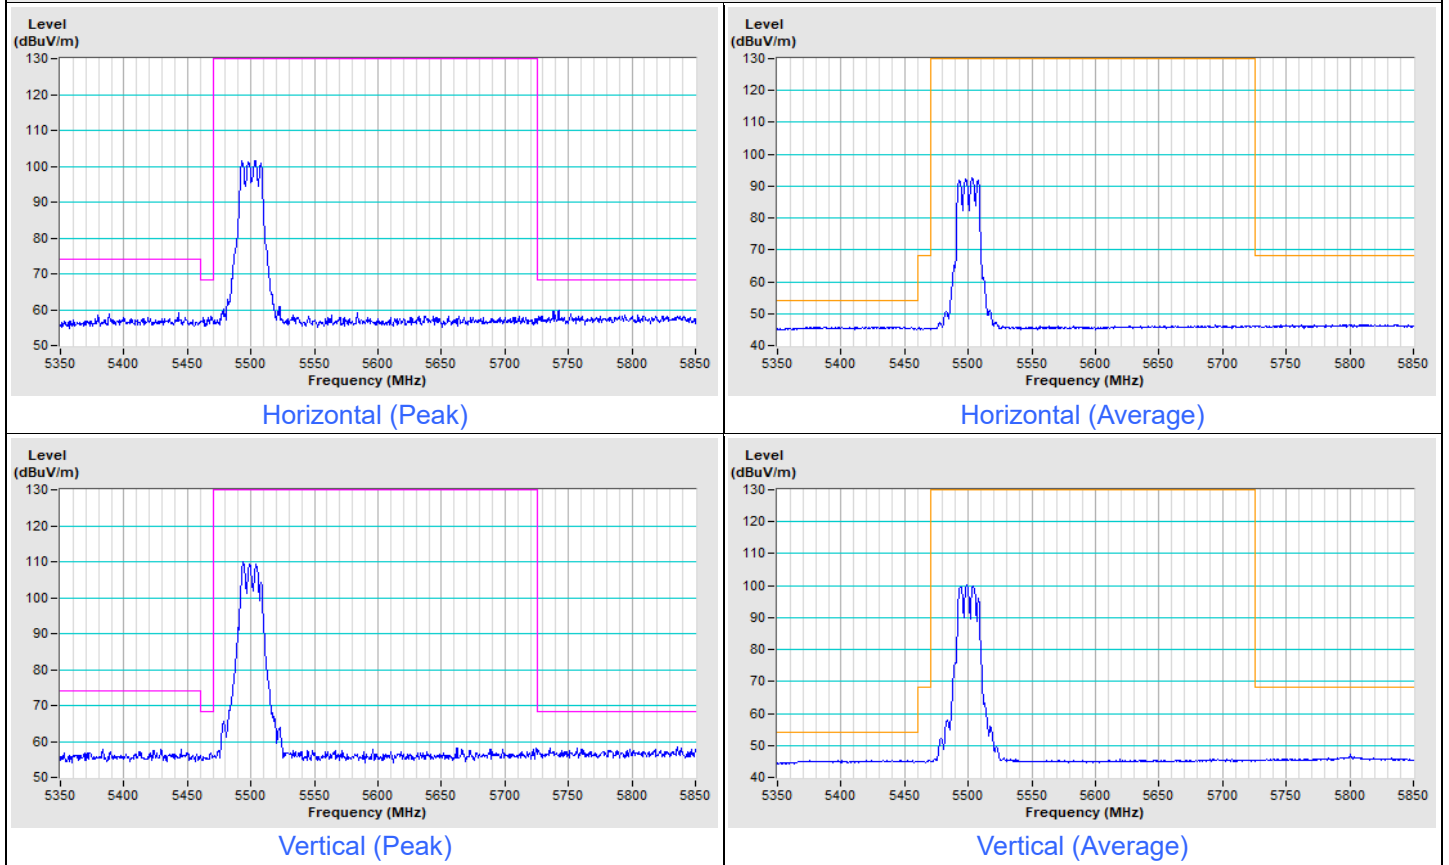


802.11a Channel 100

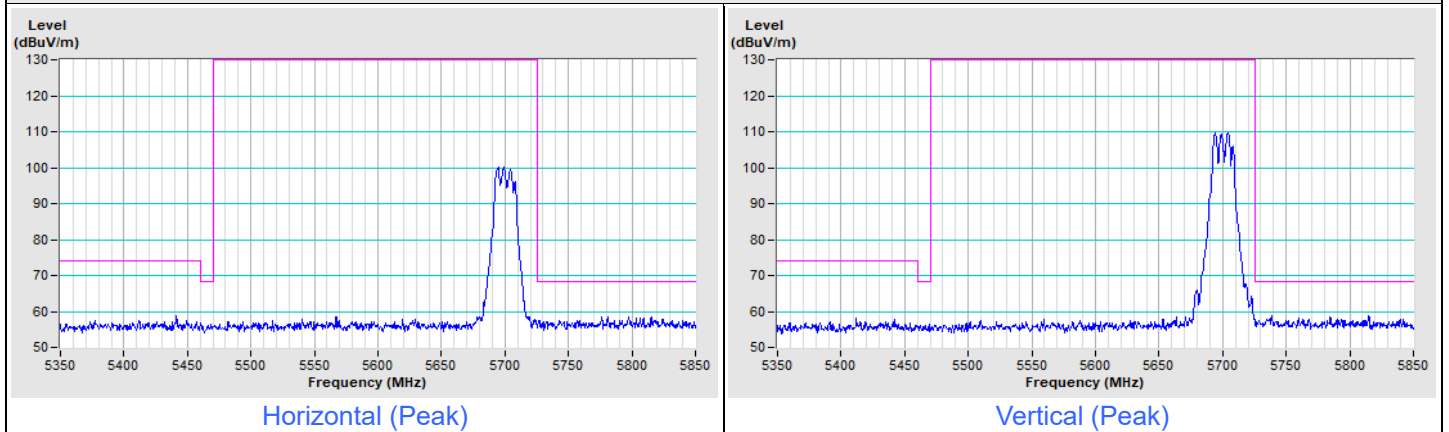


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11a Channel 144

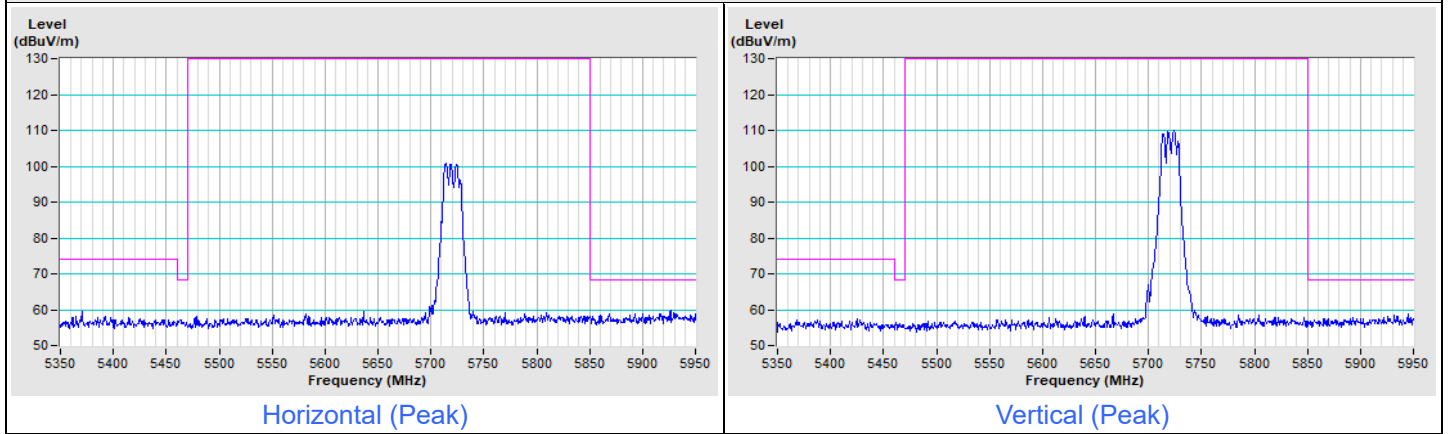


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------


802.11a Channel 149

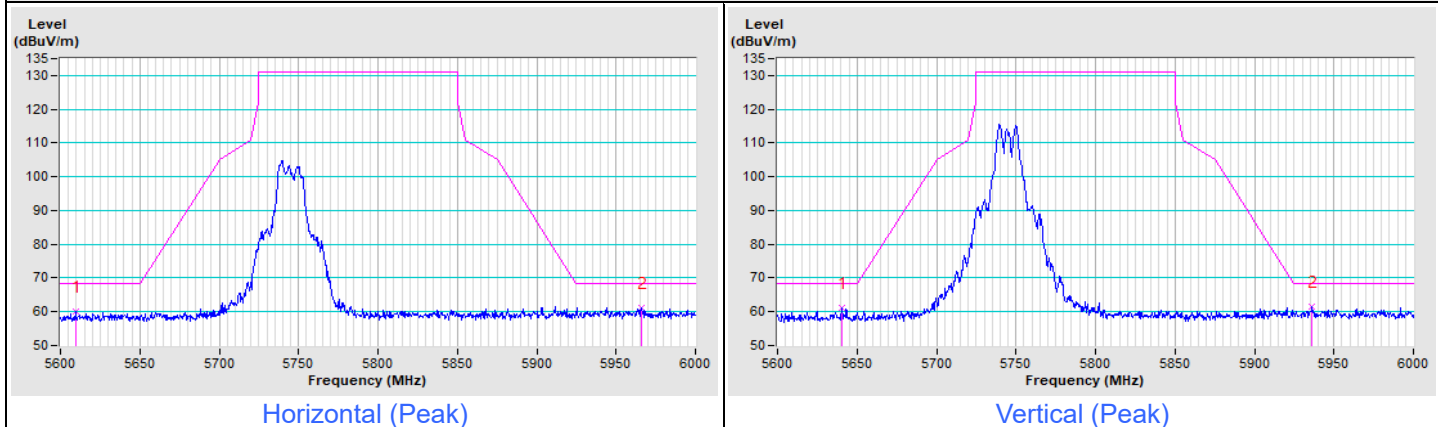

802.11a Channel 157

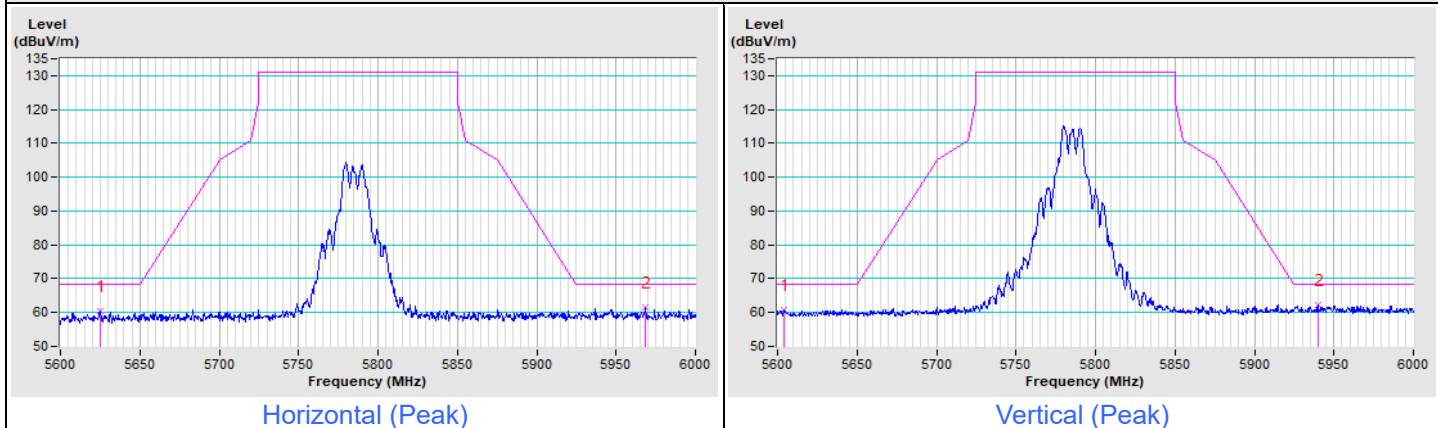


802.11a Channel 165




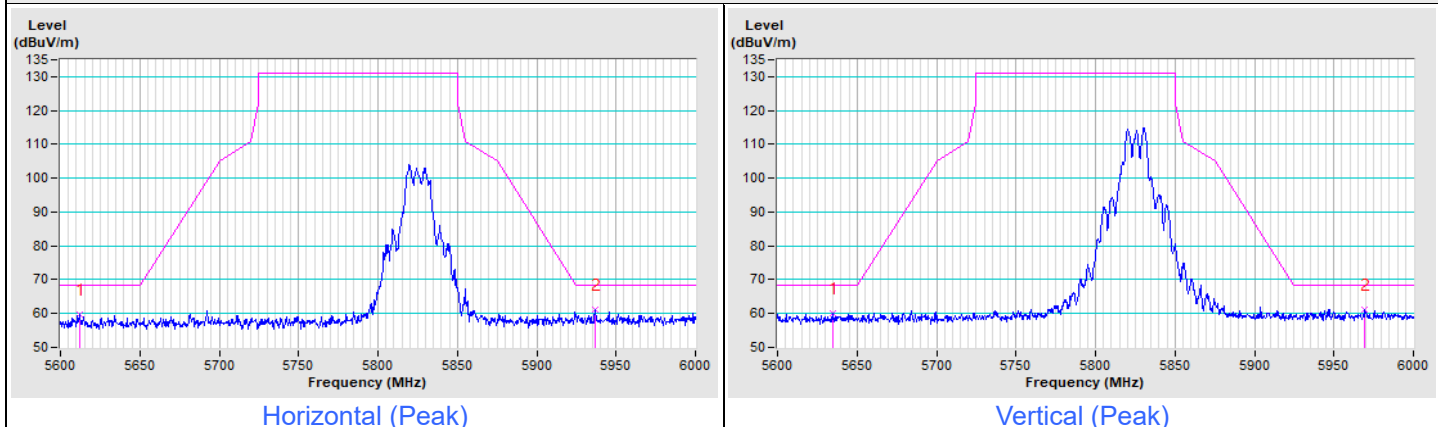


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT20) Channel 36

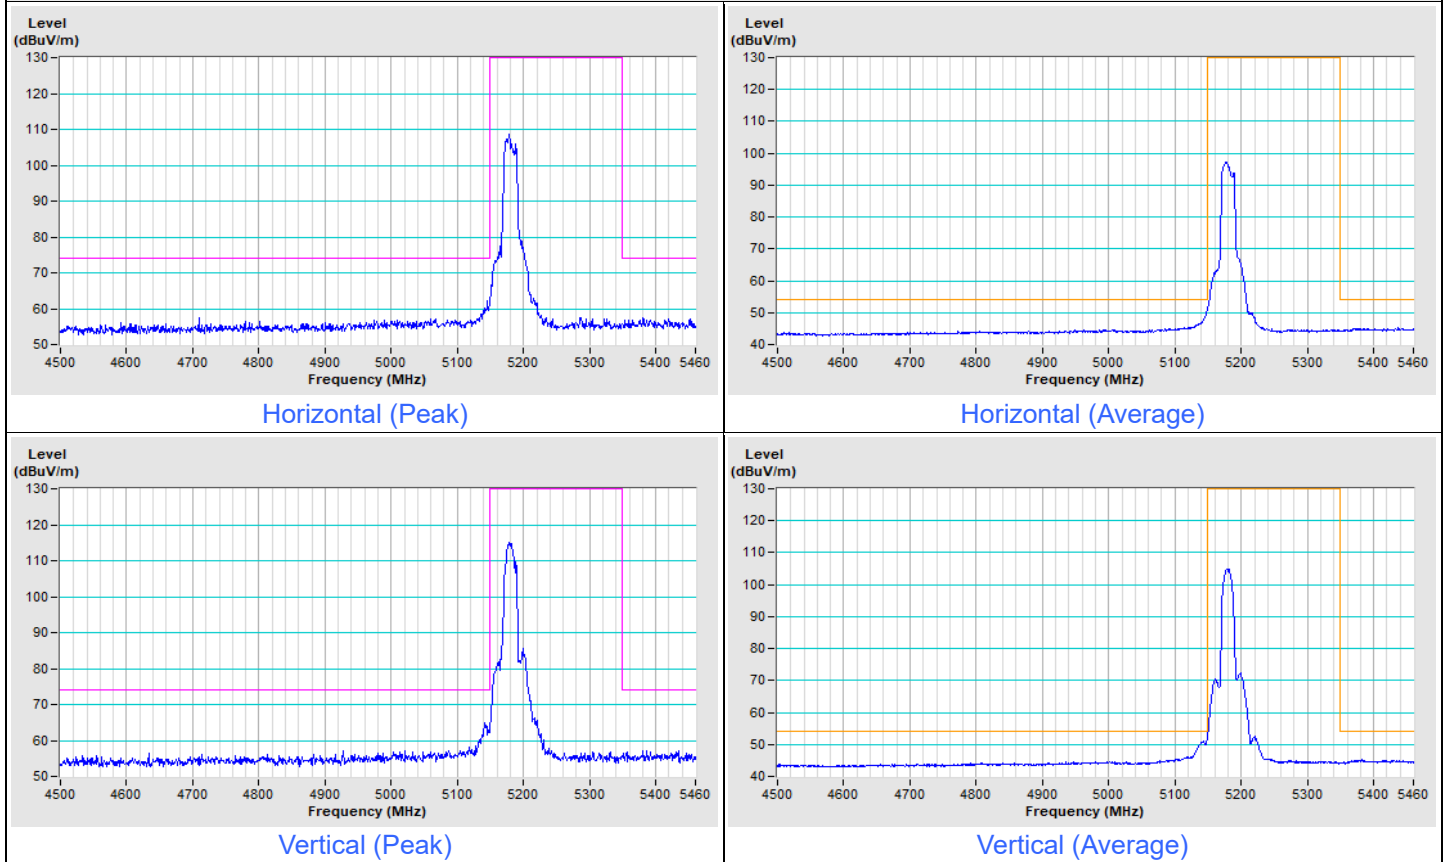


802.11be (EHT20) Channel 48

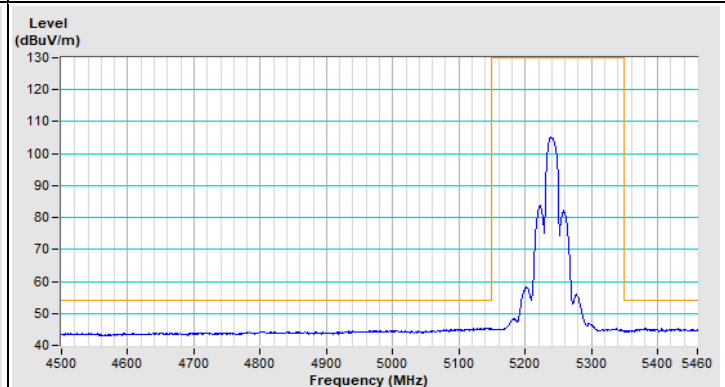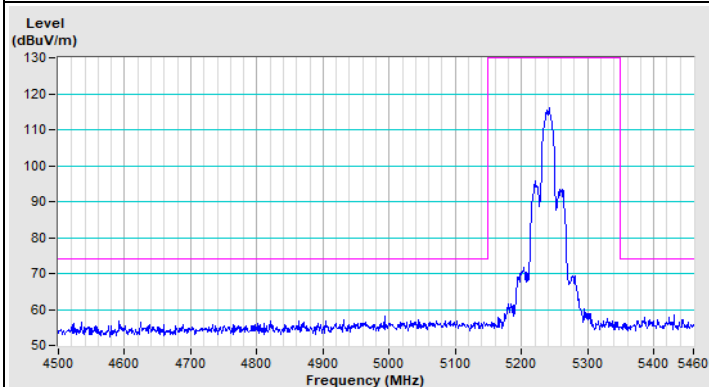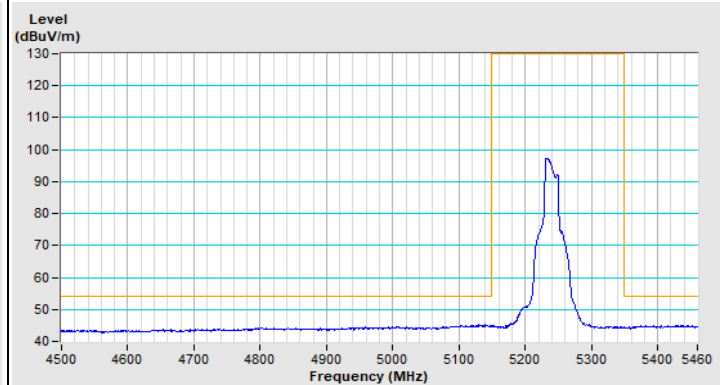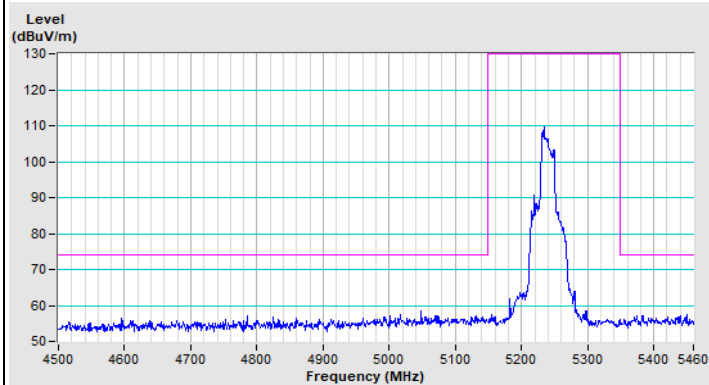


802.11be (EHT20) Channel 52

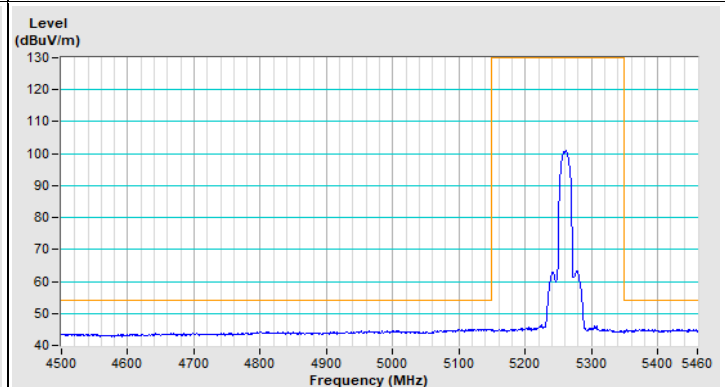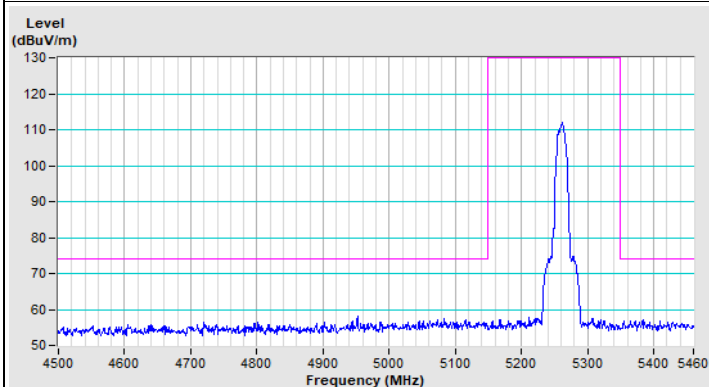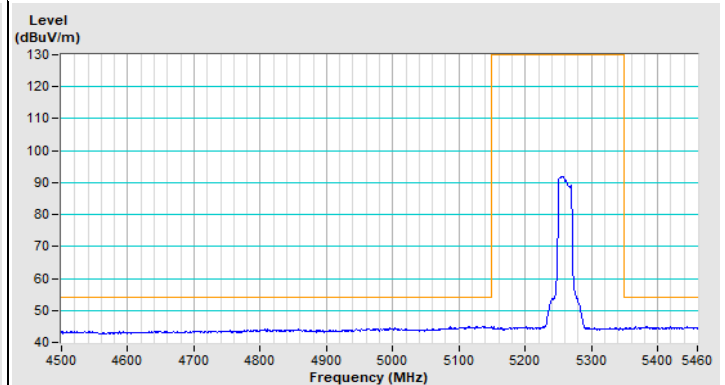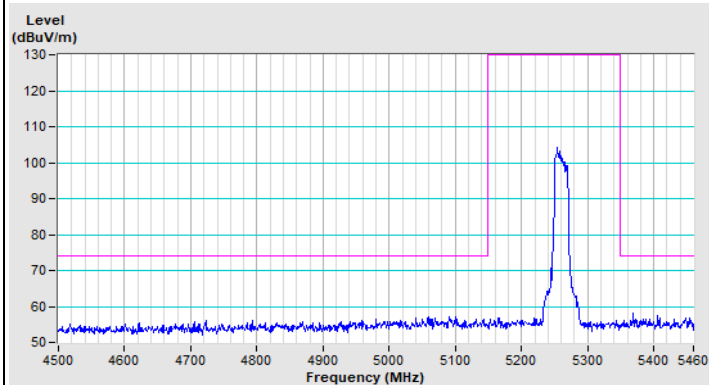


802.11be (EHT20) Channel 64

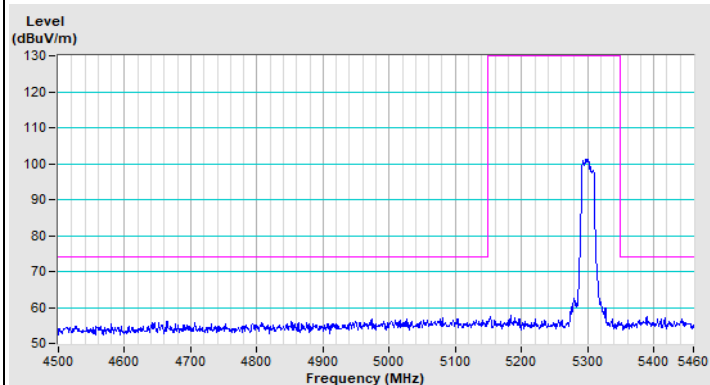


Horizontal (Peak)

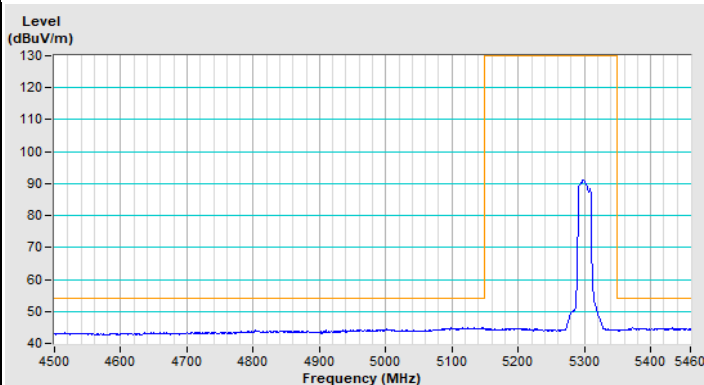

Horizontal (Average)

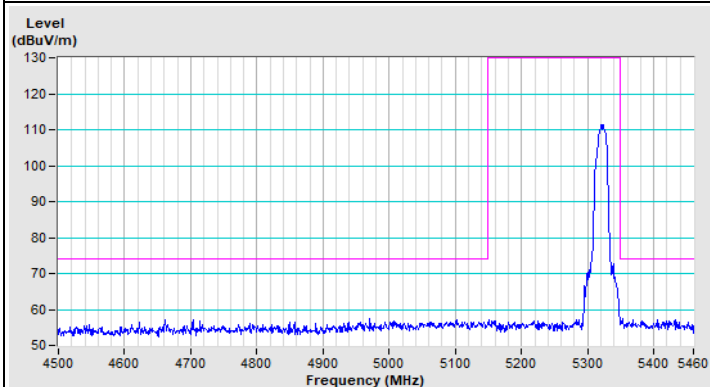


Vertical (Peak)

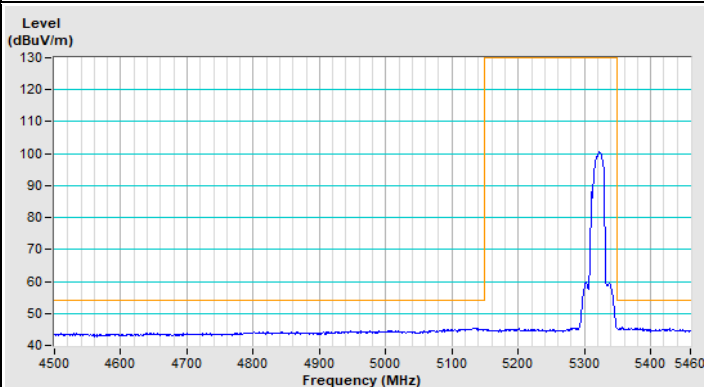


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 100

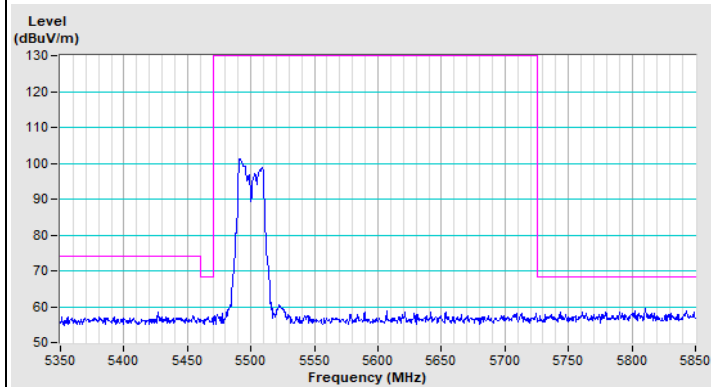


Horizontal (Peak)

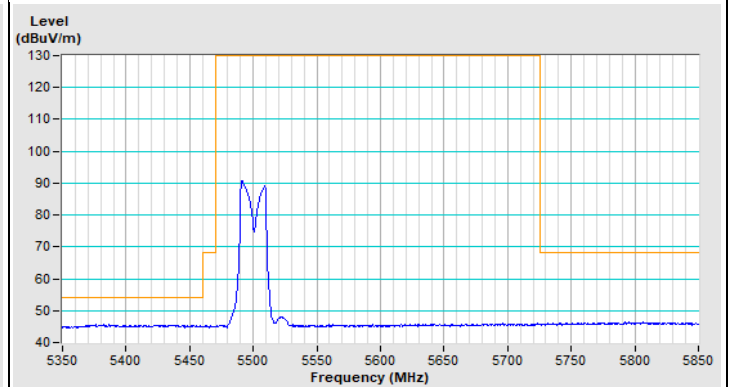

Horizontal (Average)

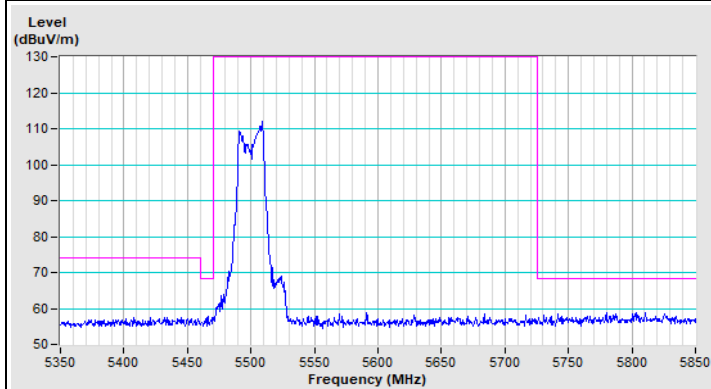


Vertical (Peak)

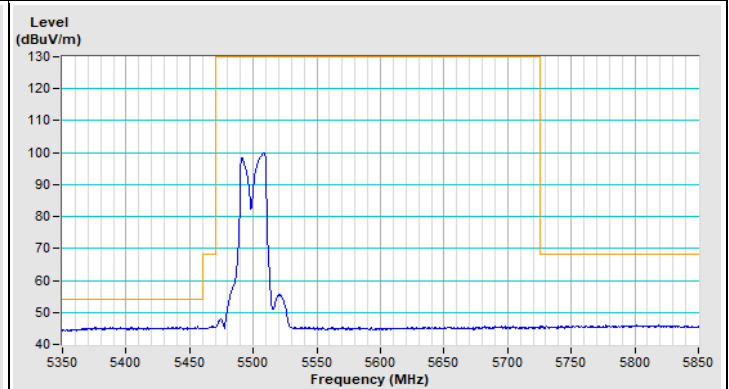


Vertical (Average)

802.11be (EHT20) Channel 140

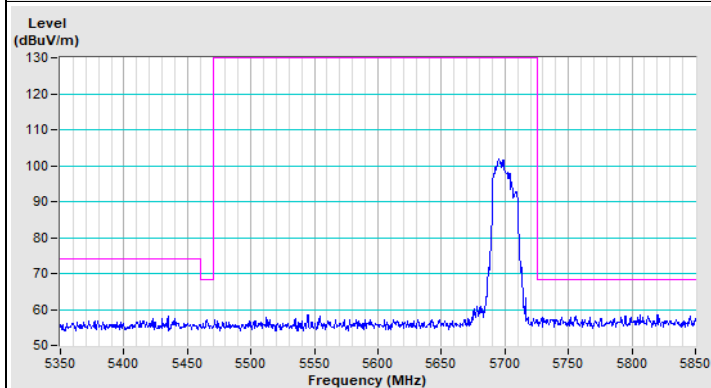


Horizontal (Peak)

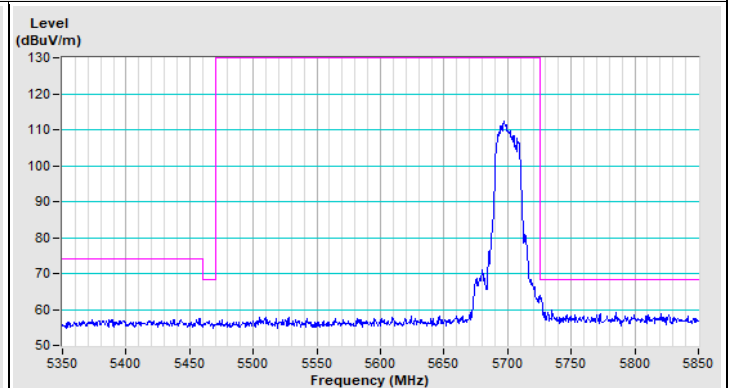

Vertical (Peak)



Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT20) Channel 144


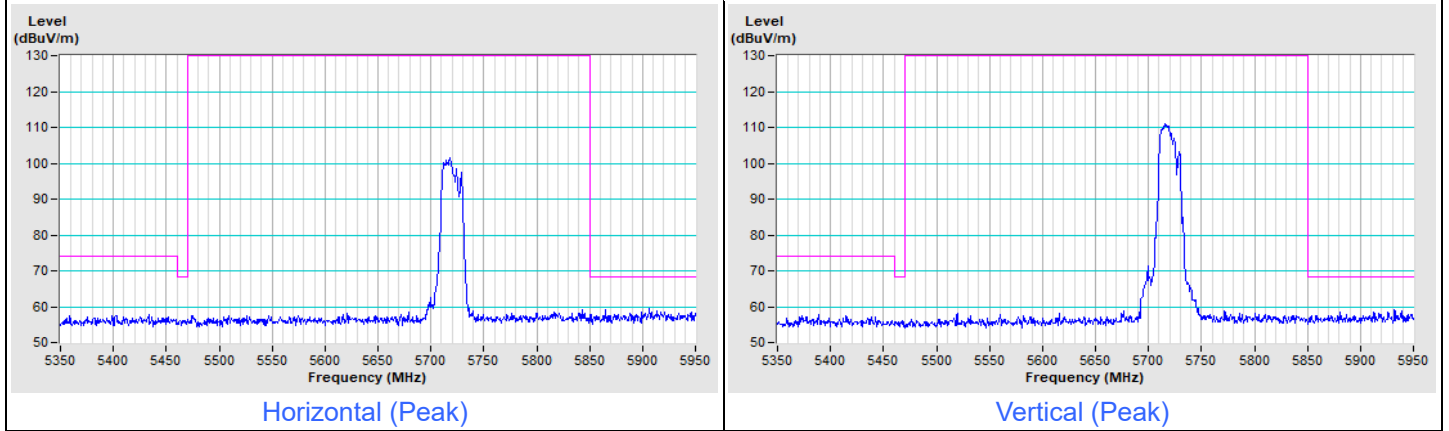


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------



802.11be (EHT20) Channel 149

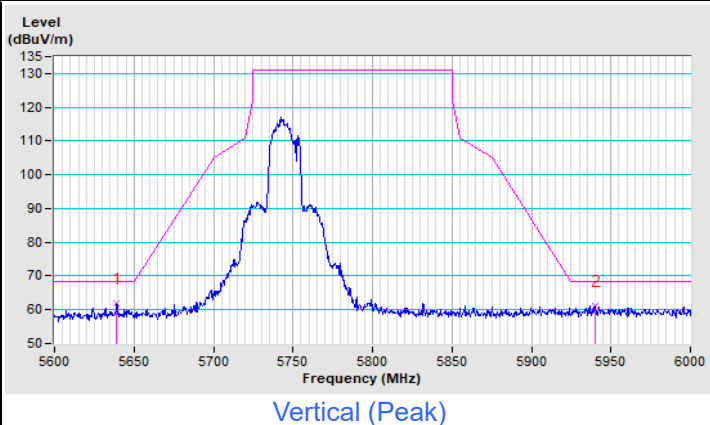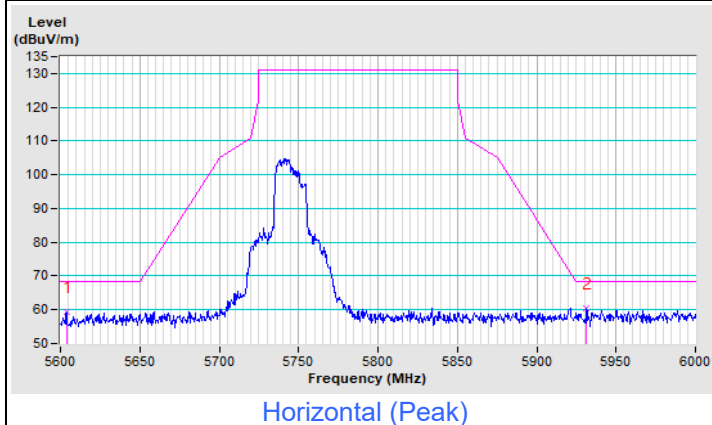

802.11be (EHT20) Channel 157

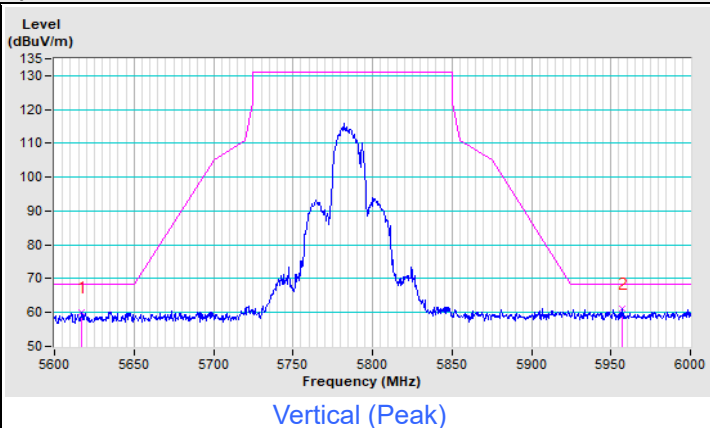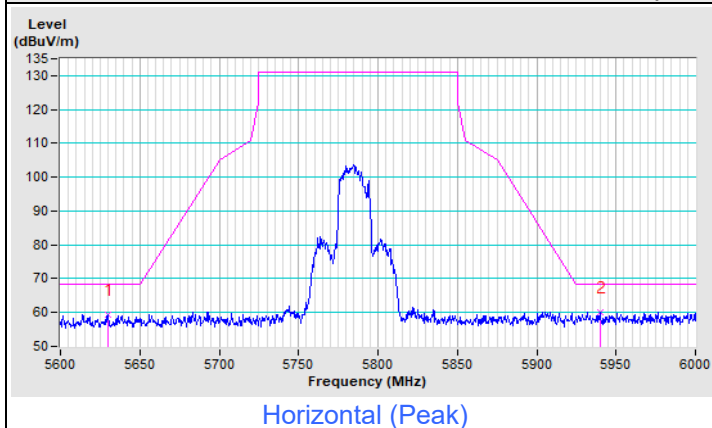


802.11be (EHT20) Channel 165

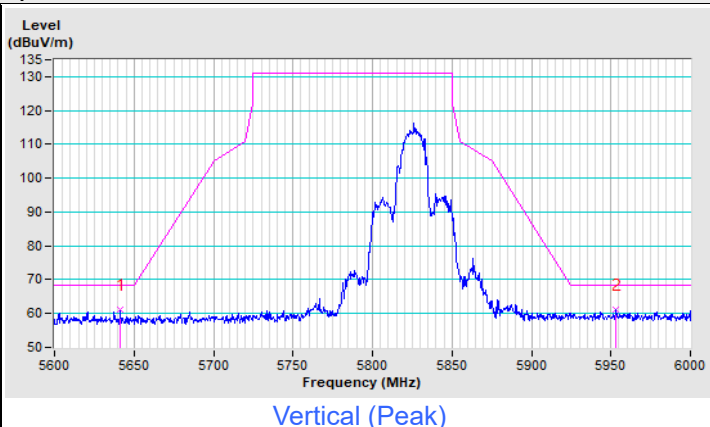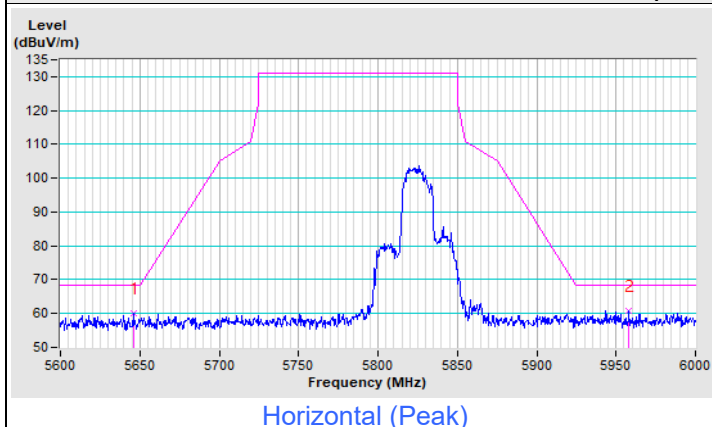


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 38

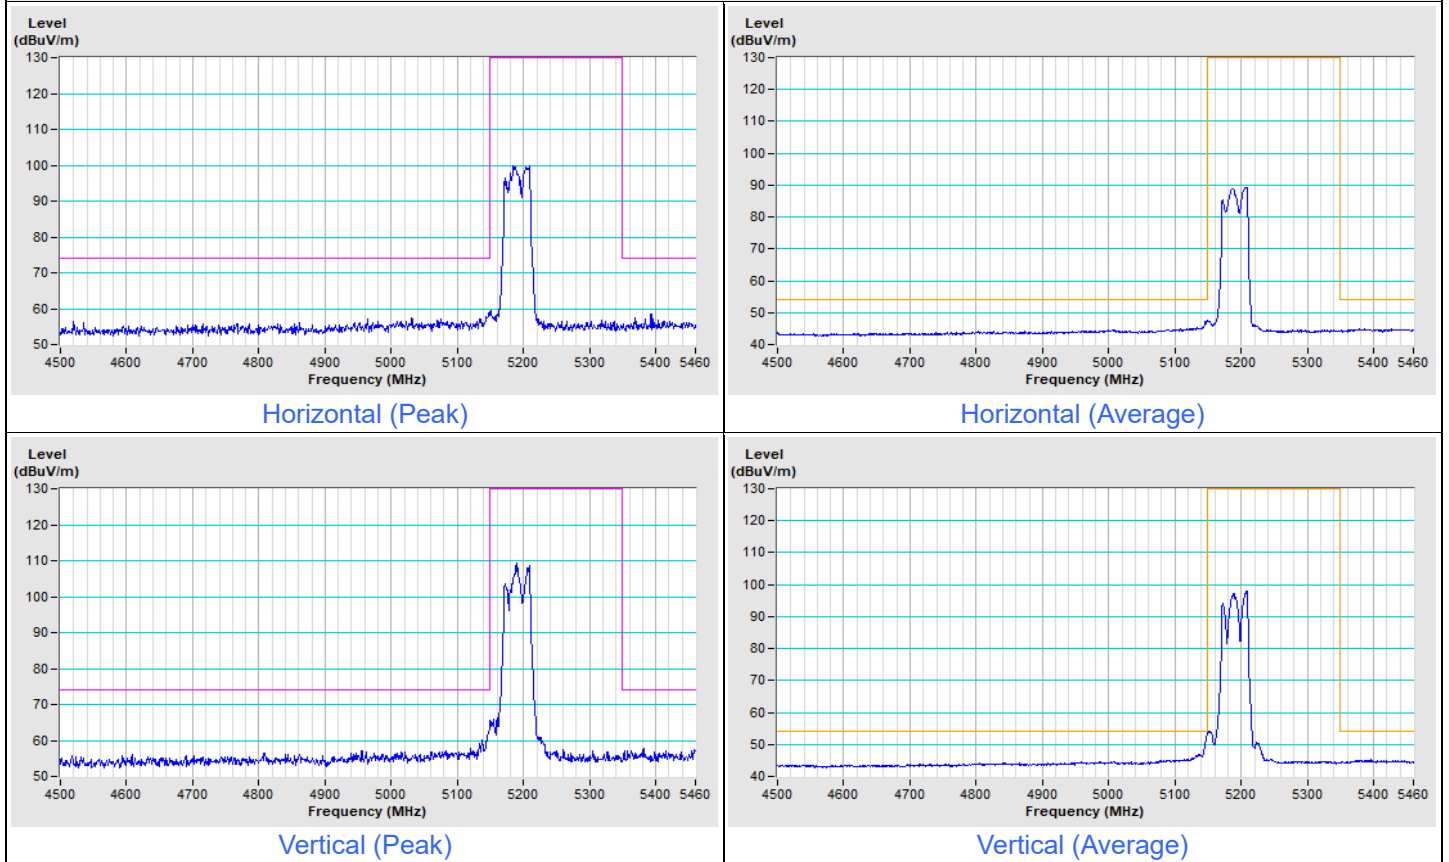


802.11be (EHT40) Channel 46

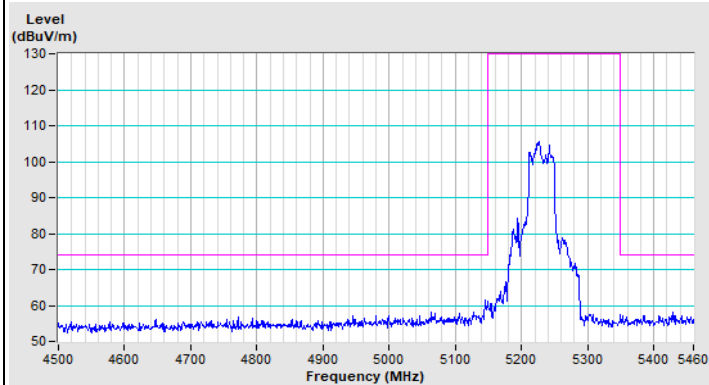


Horizontal (Peak)

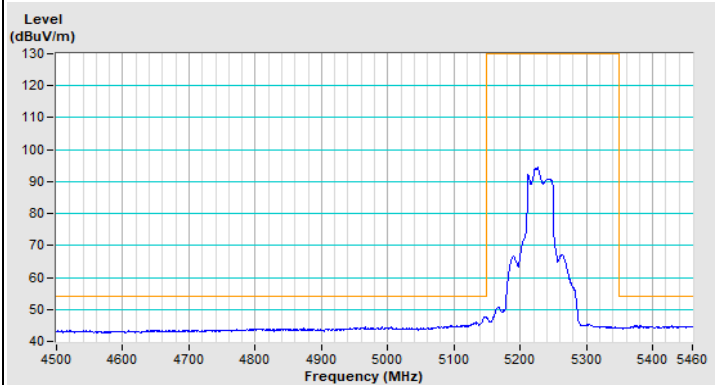

Horizontal (Average)

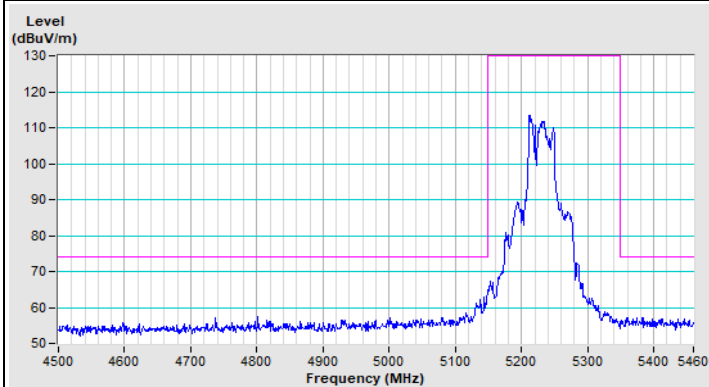


Vertical (Peak)

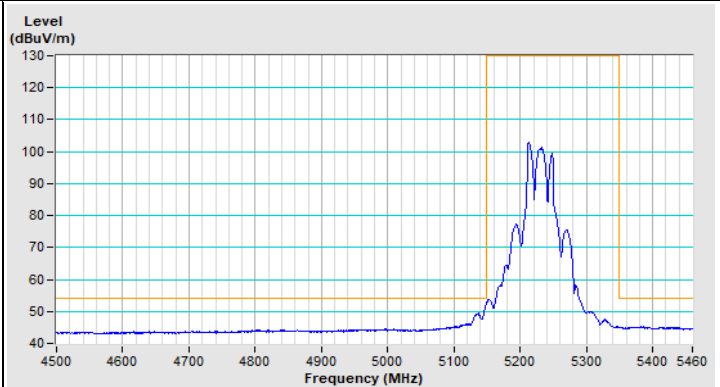


Vertical (Average)


802.11be (EHT40) Channel 54

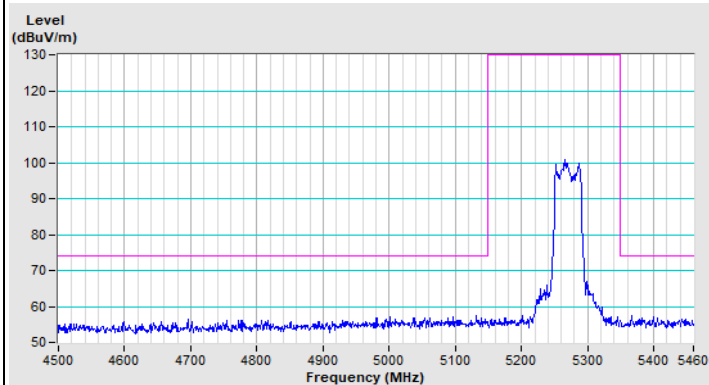


Horizontal (Peak)

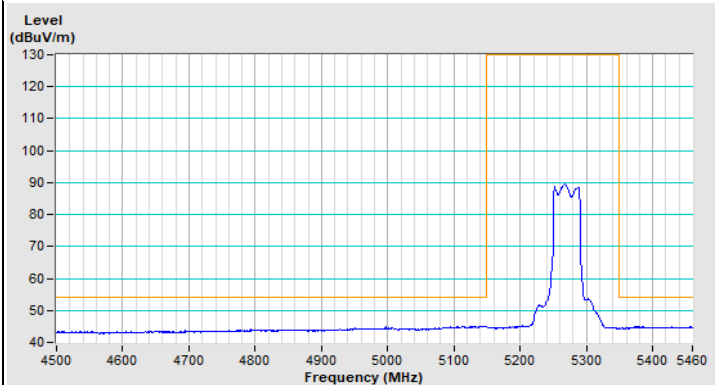

Horizontal (Average)

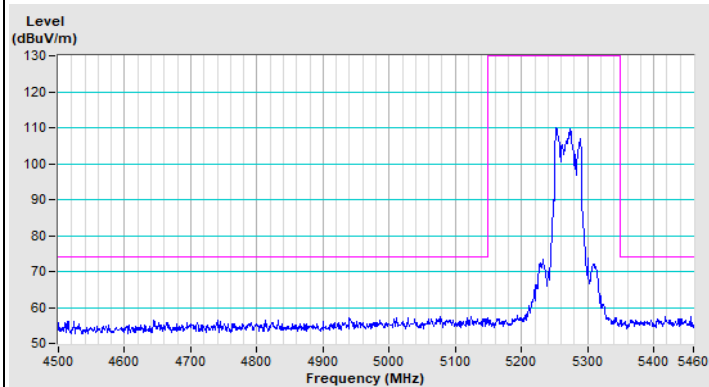


Vertical (Peak)

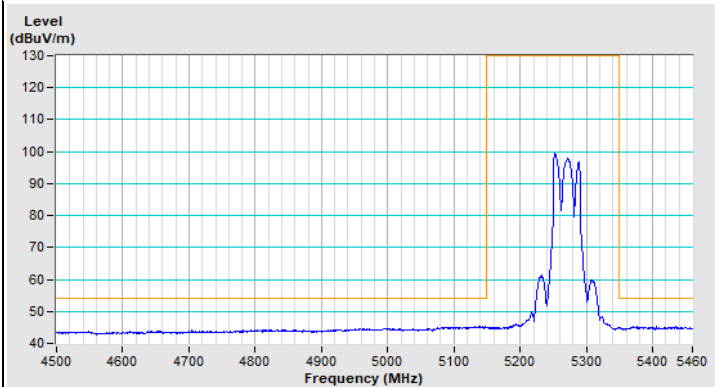


Vertical (Average)


802.11be (EHT40) Channel 62

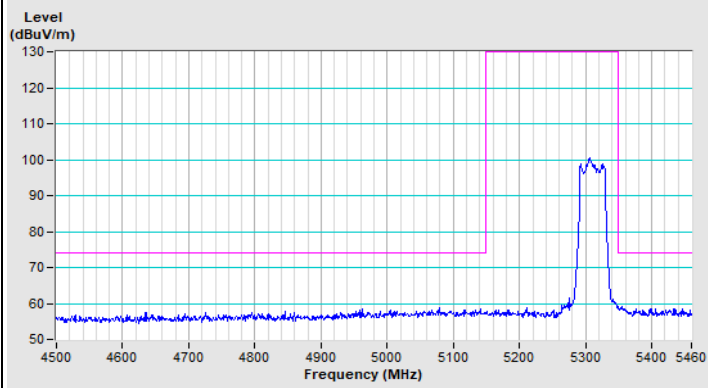


Horizontal (Peak)

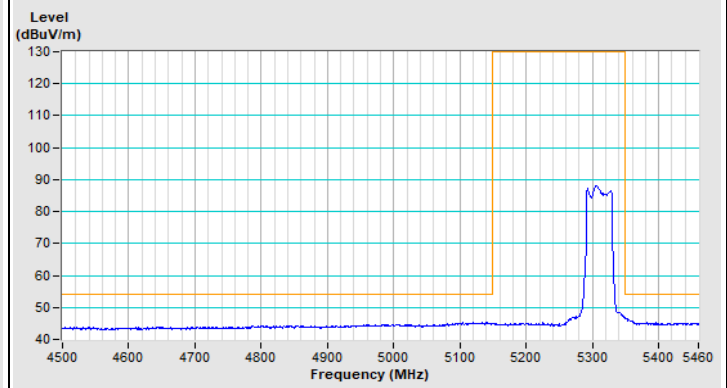

Horizontal (Average)

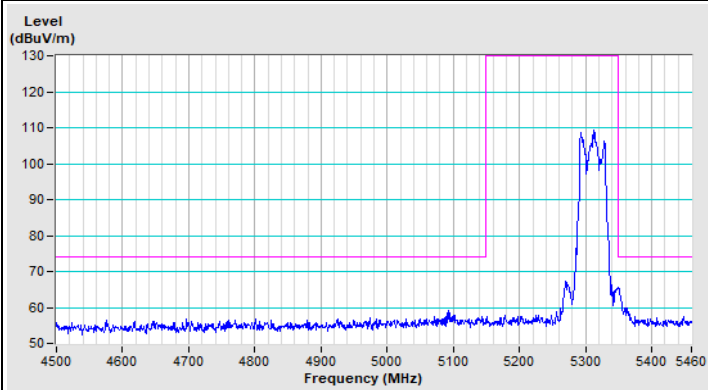





Vertical (Peak)

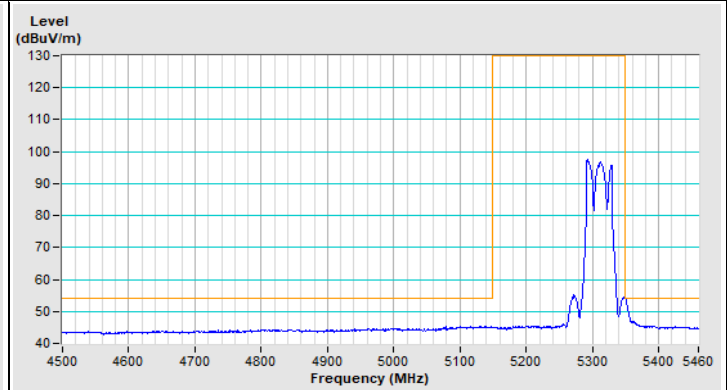



Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 102

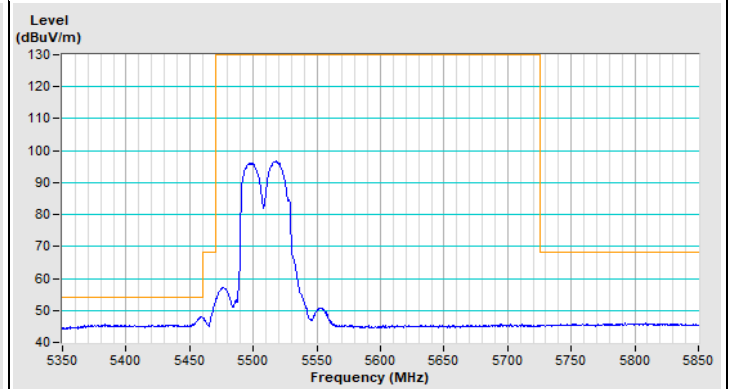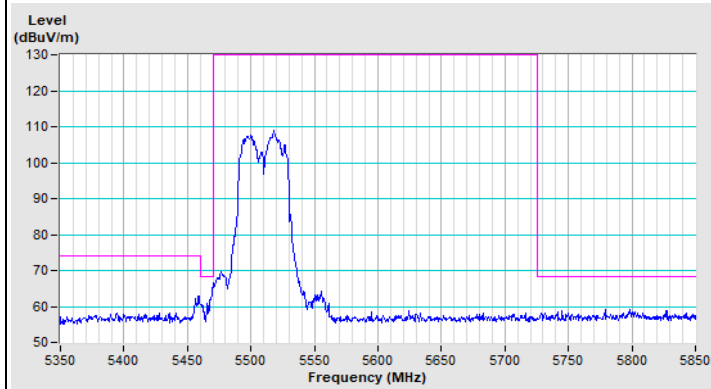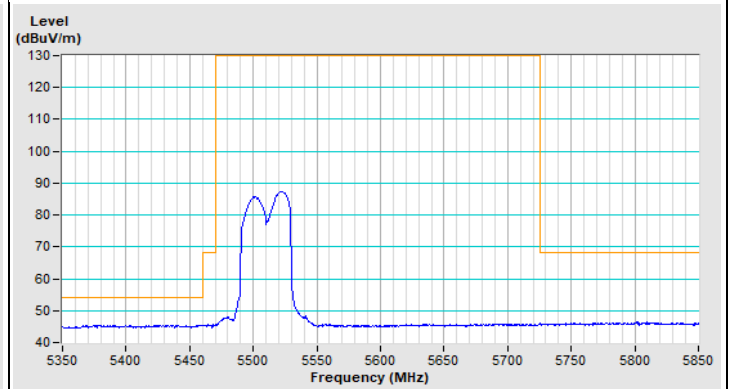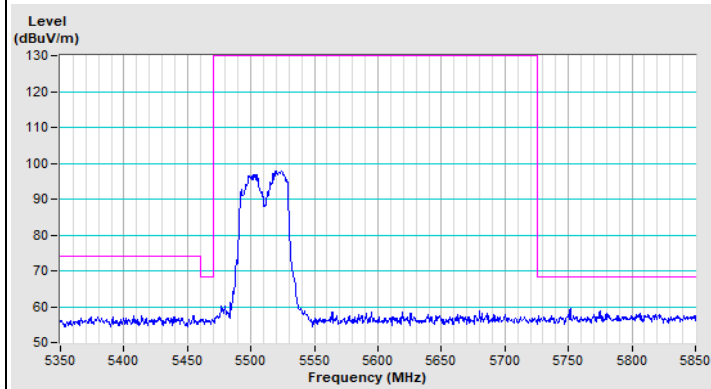


802.11be (EHT40) Channel 134

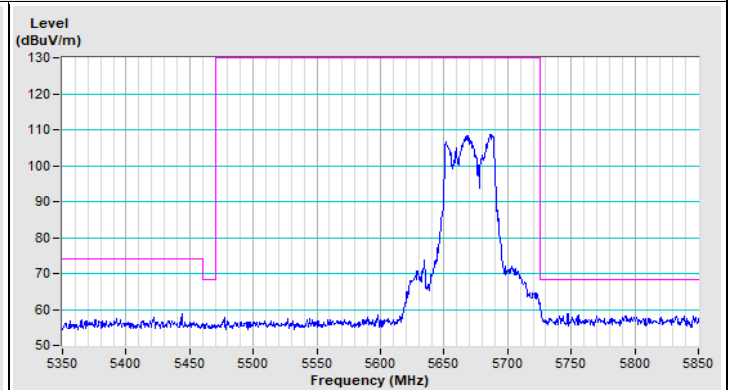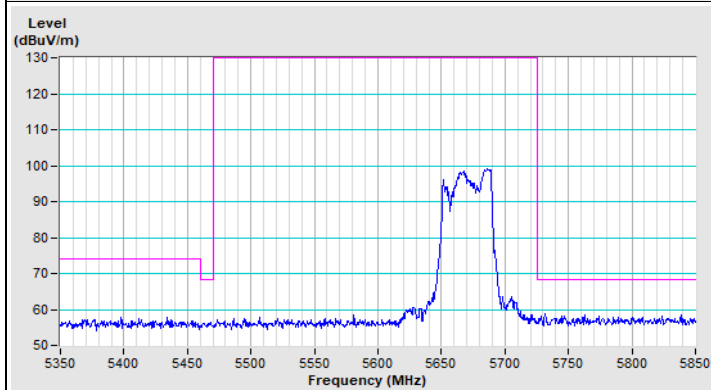


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT40) Channel 142

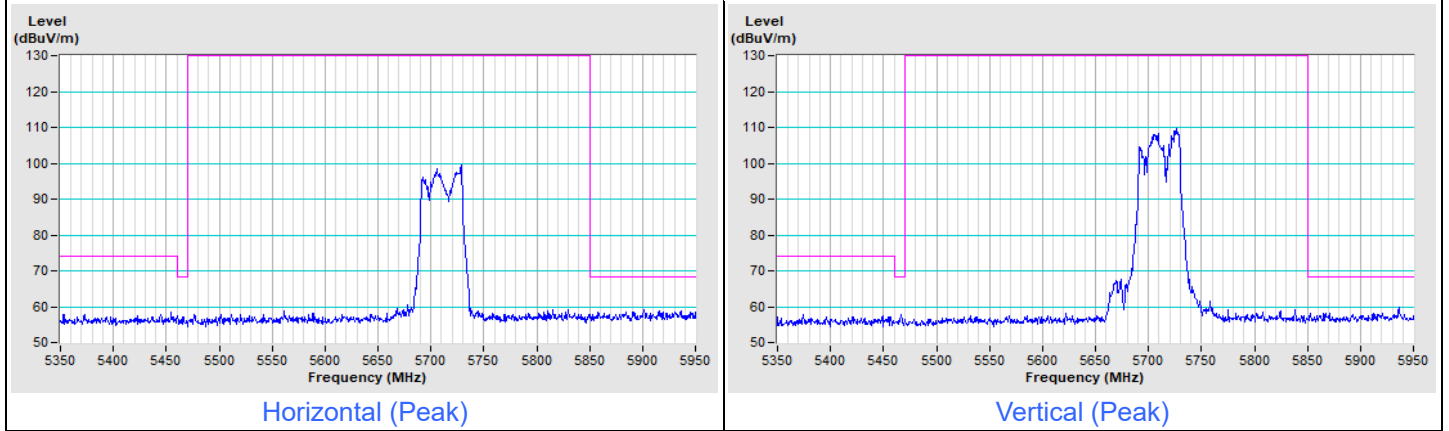


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT40) Channel 151

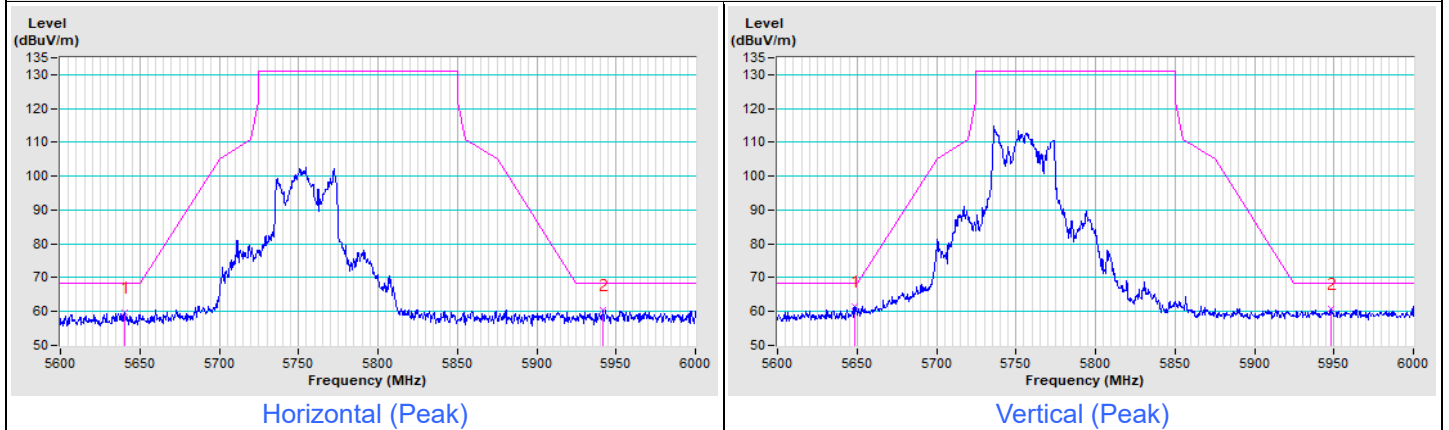


802.11be (EHT40) Channel 159

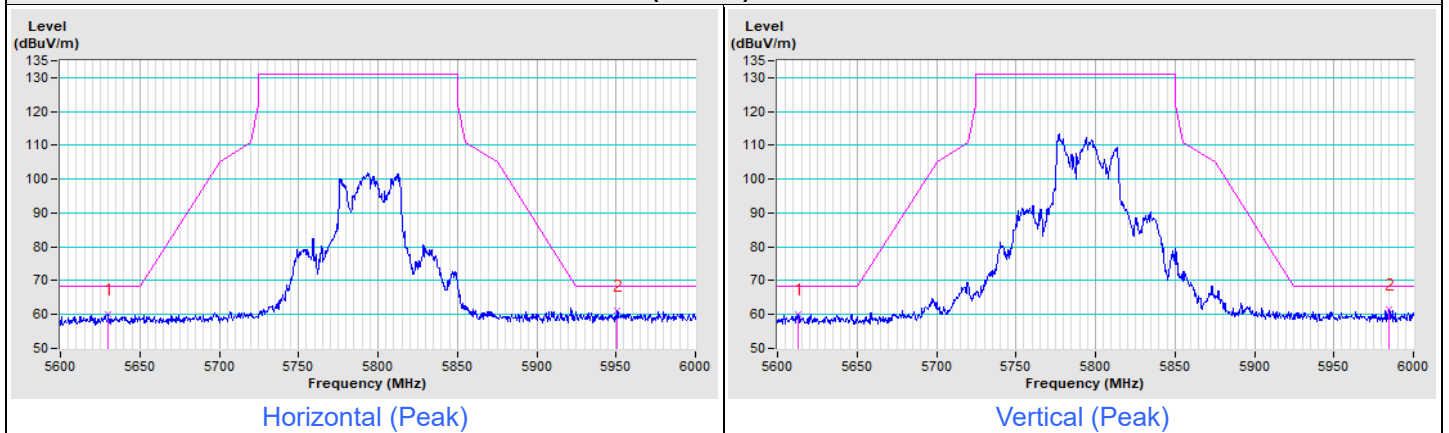


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT80) Channel 42

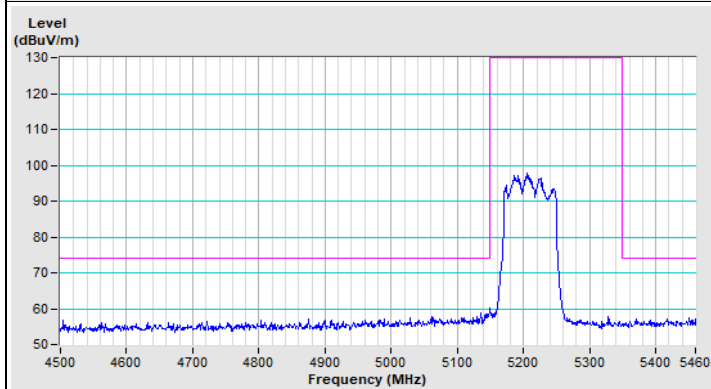


Horizontal (Peak)

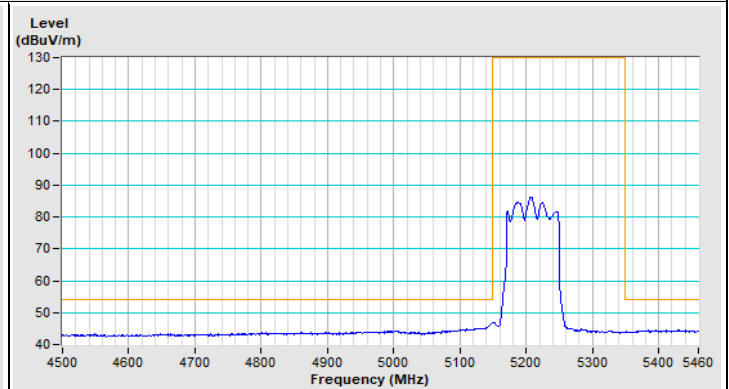

Horizontal (Average)

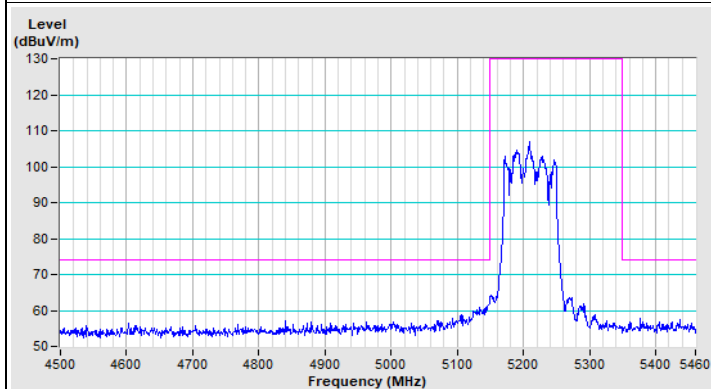


Vertical (Peak)

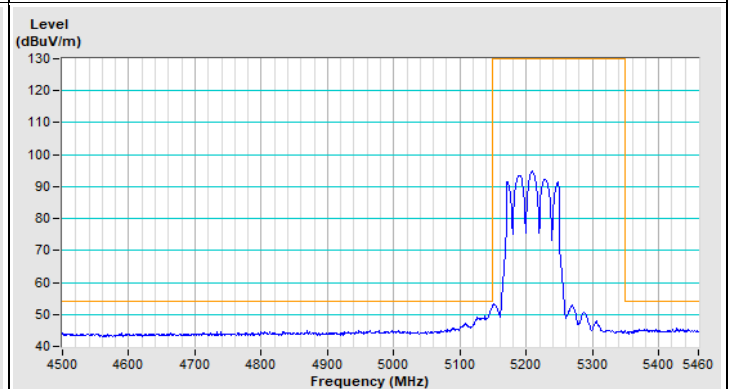


Vertical (Average)


802.11be (EHT80) Channel 58

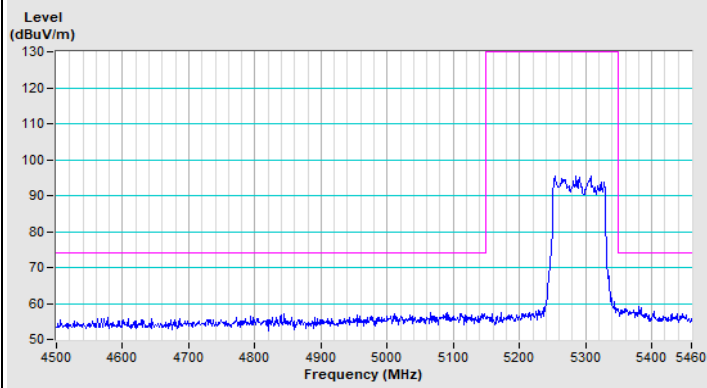


Horizontal (Peak)

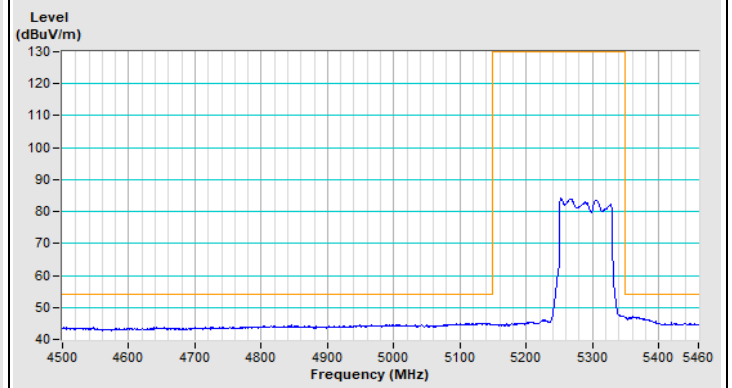

Horizontal (Average)

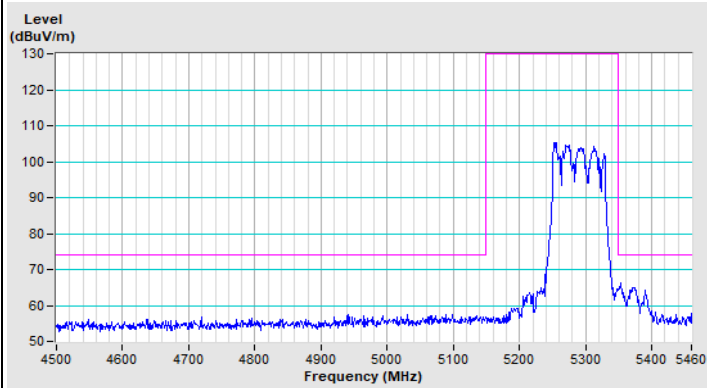





Vertical (Peak)

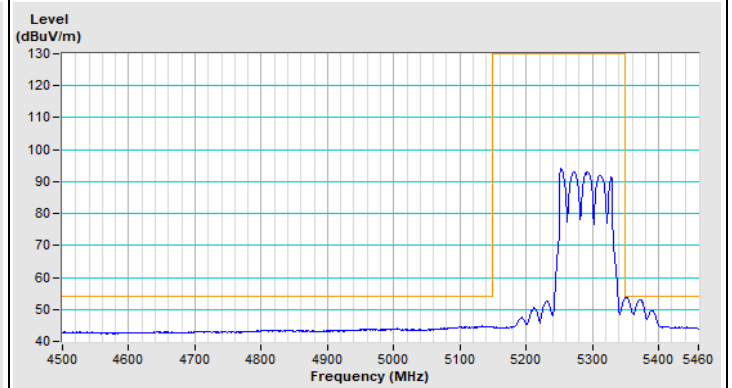



Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 106

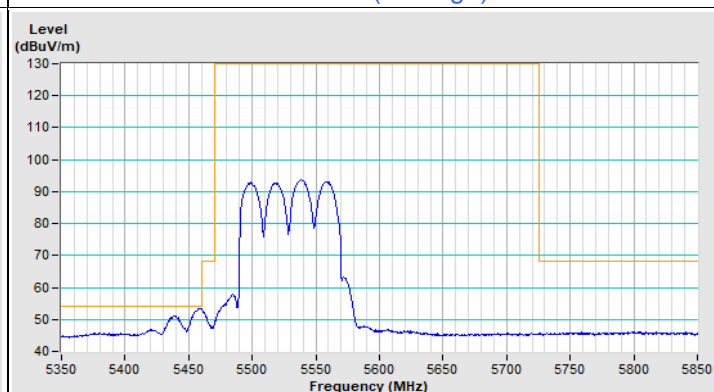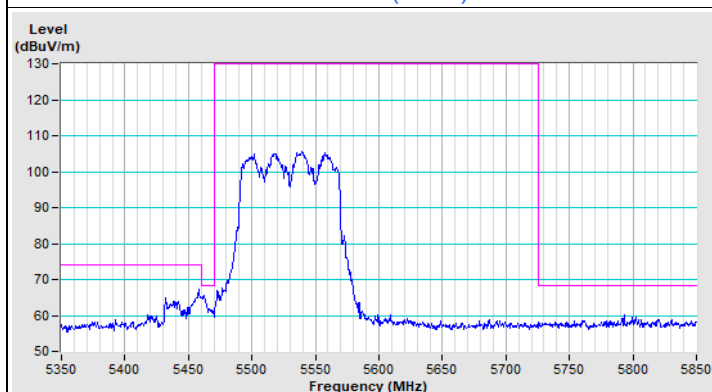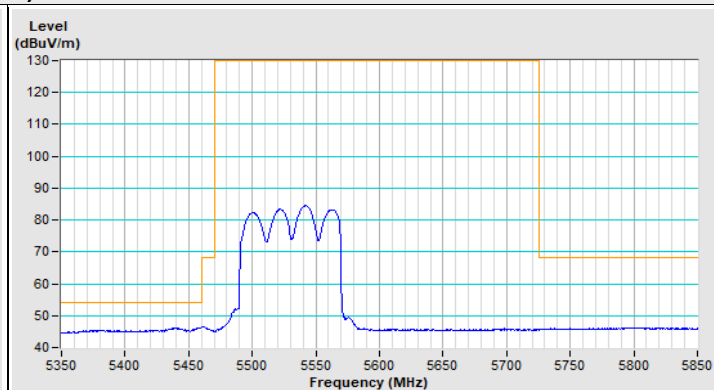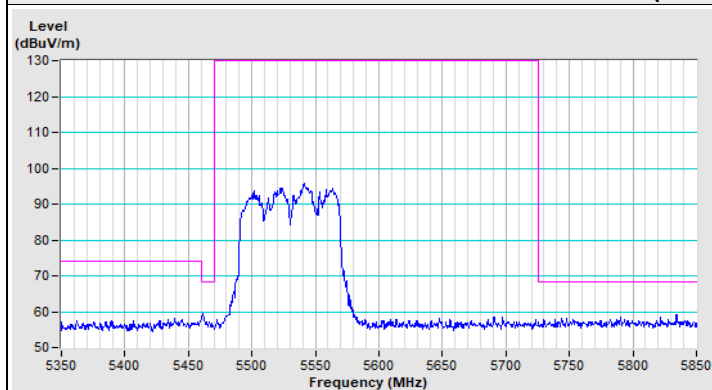


802.11be (EHT80) Channel 122

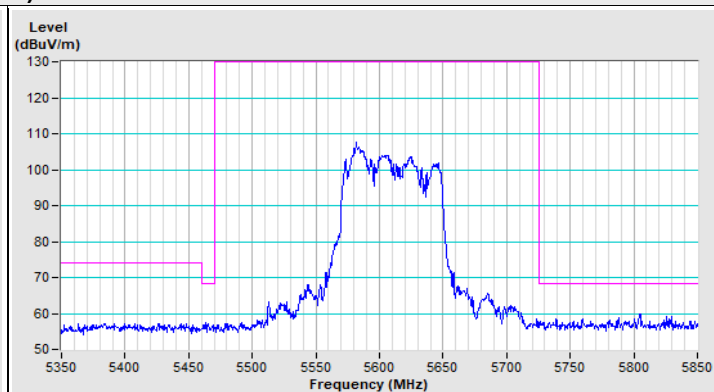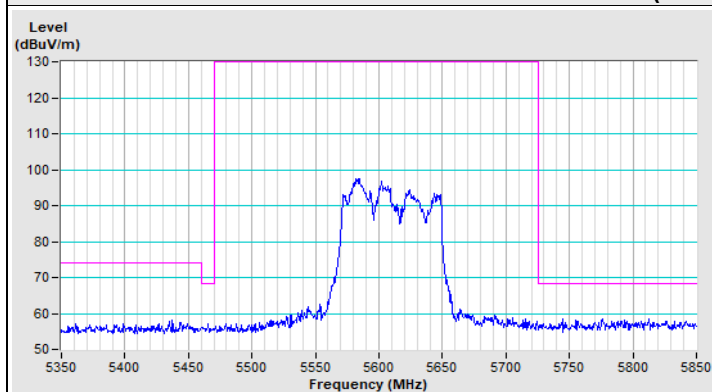


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT80) Channel 138

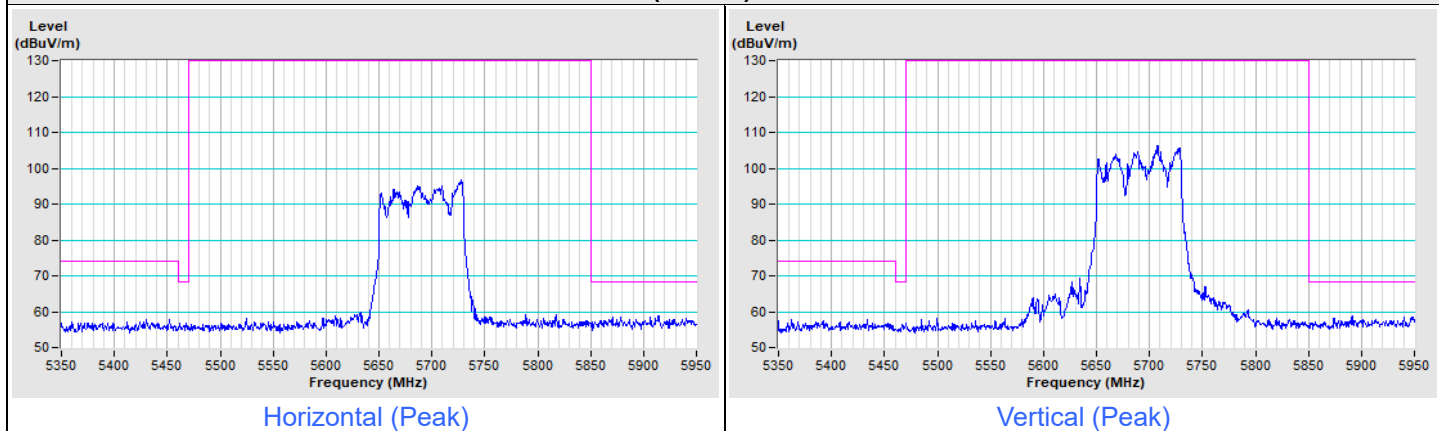


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT80) Channel 155

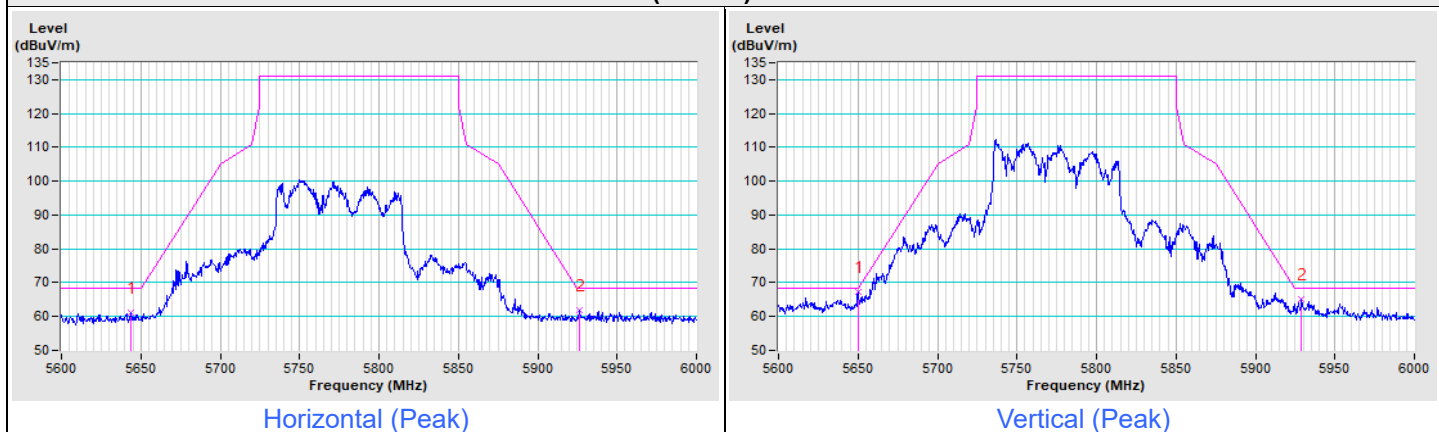


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT160) Channel 50

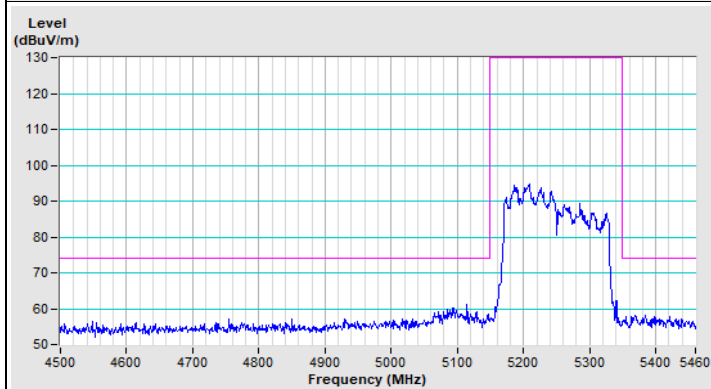


Horizontal (Peak)

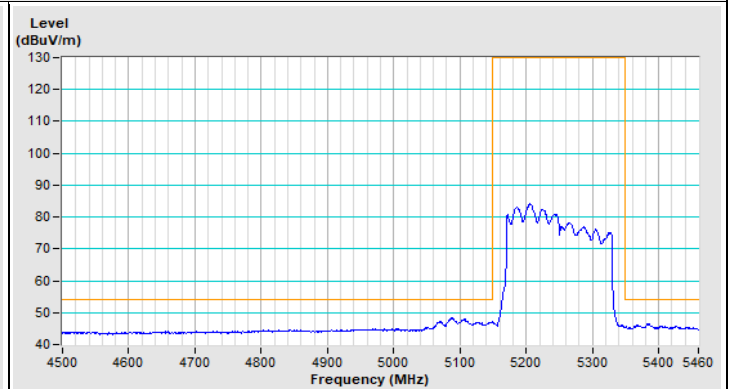

Horizontal (Average)

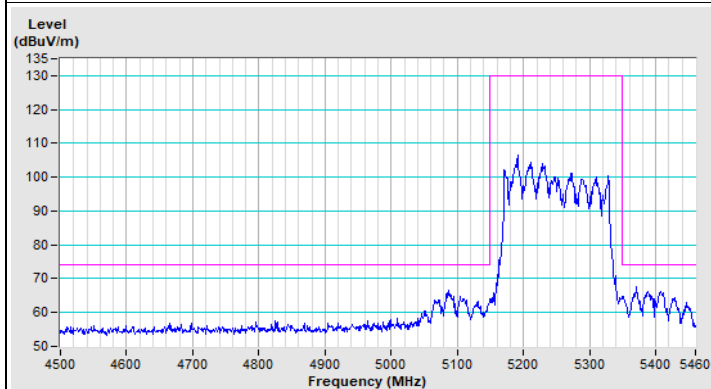


Vertical (Peak)

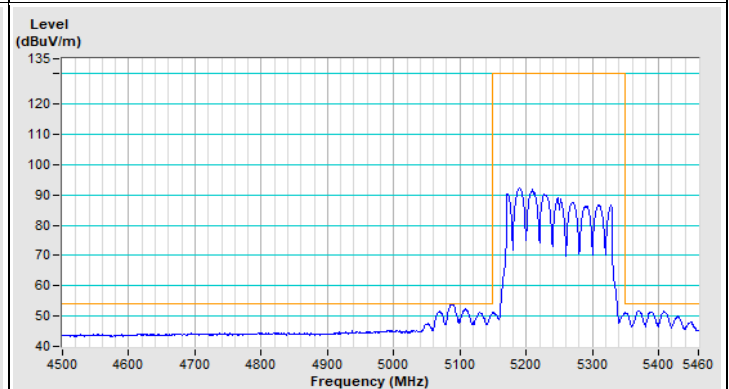

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 114

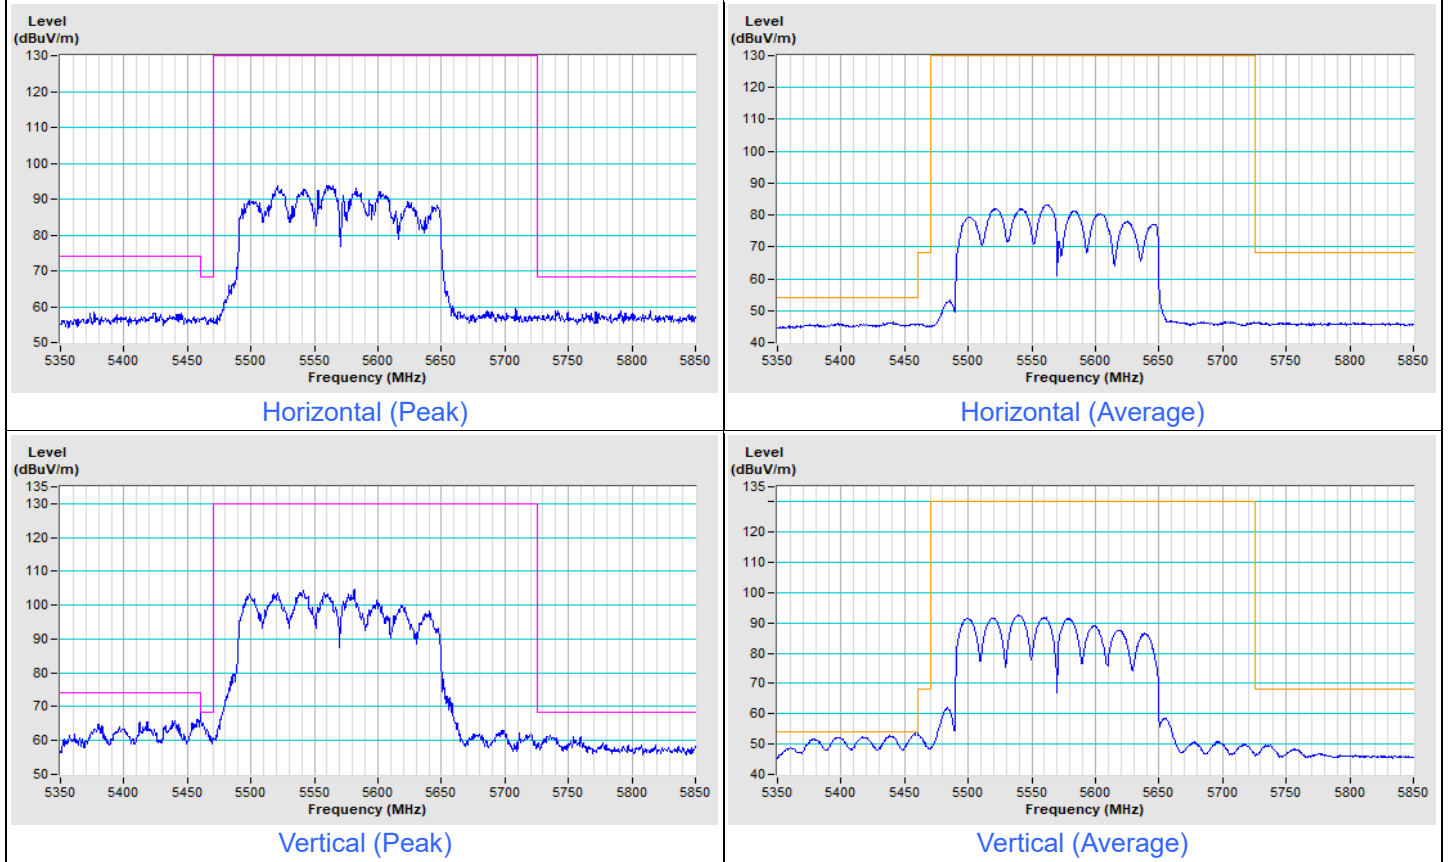

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT240) Channel 114+CH138

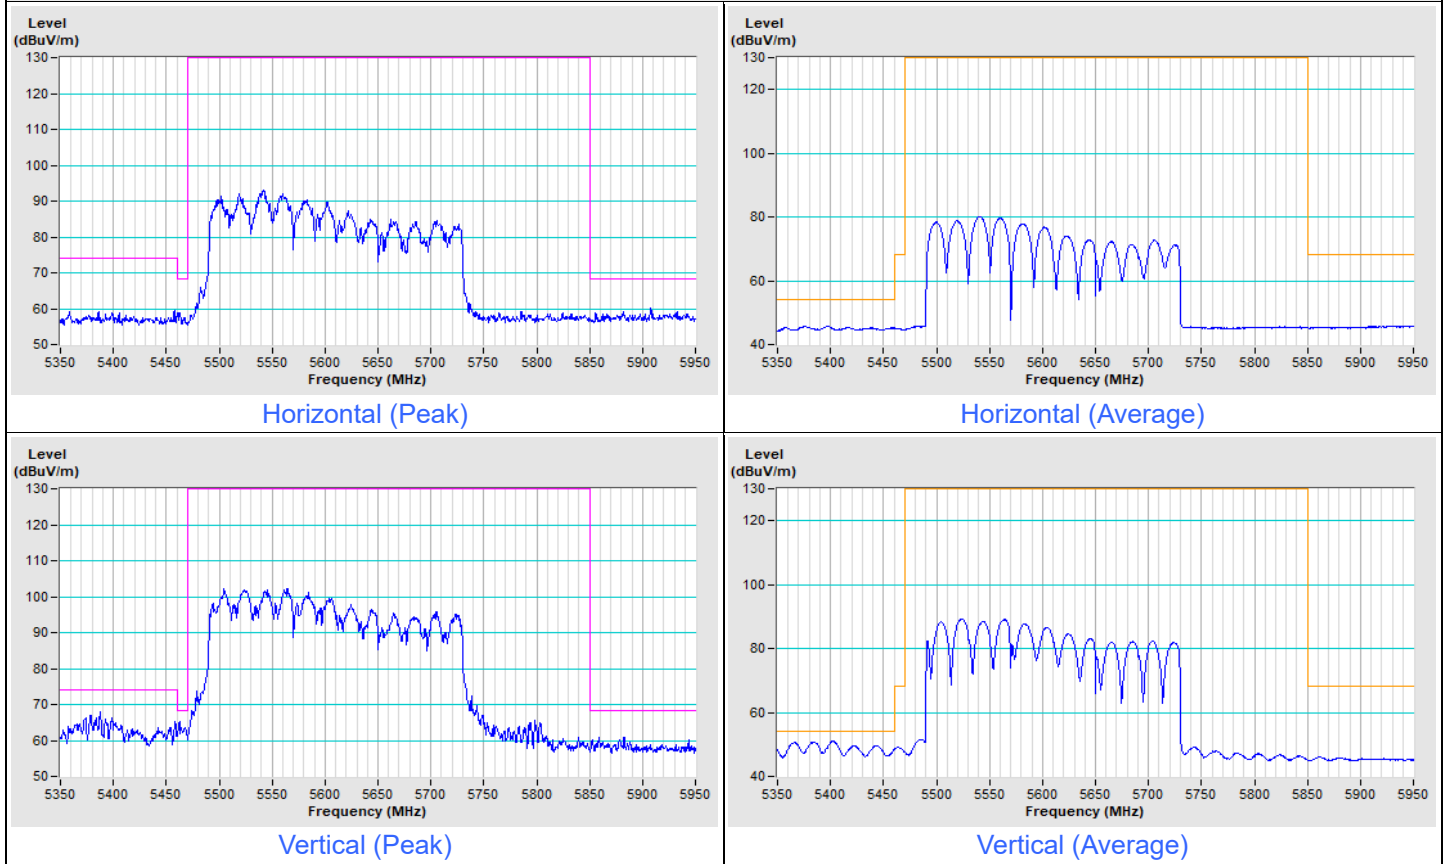

Plot of Other Emission

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

802.11a Channel 149

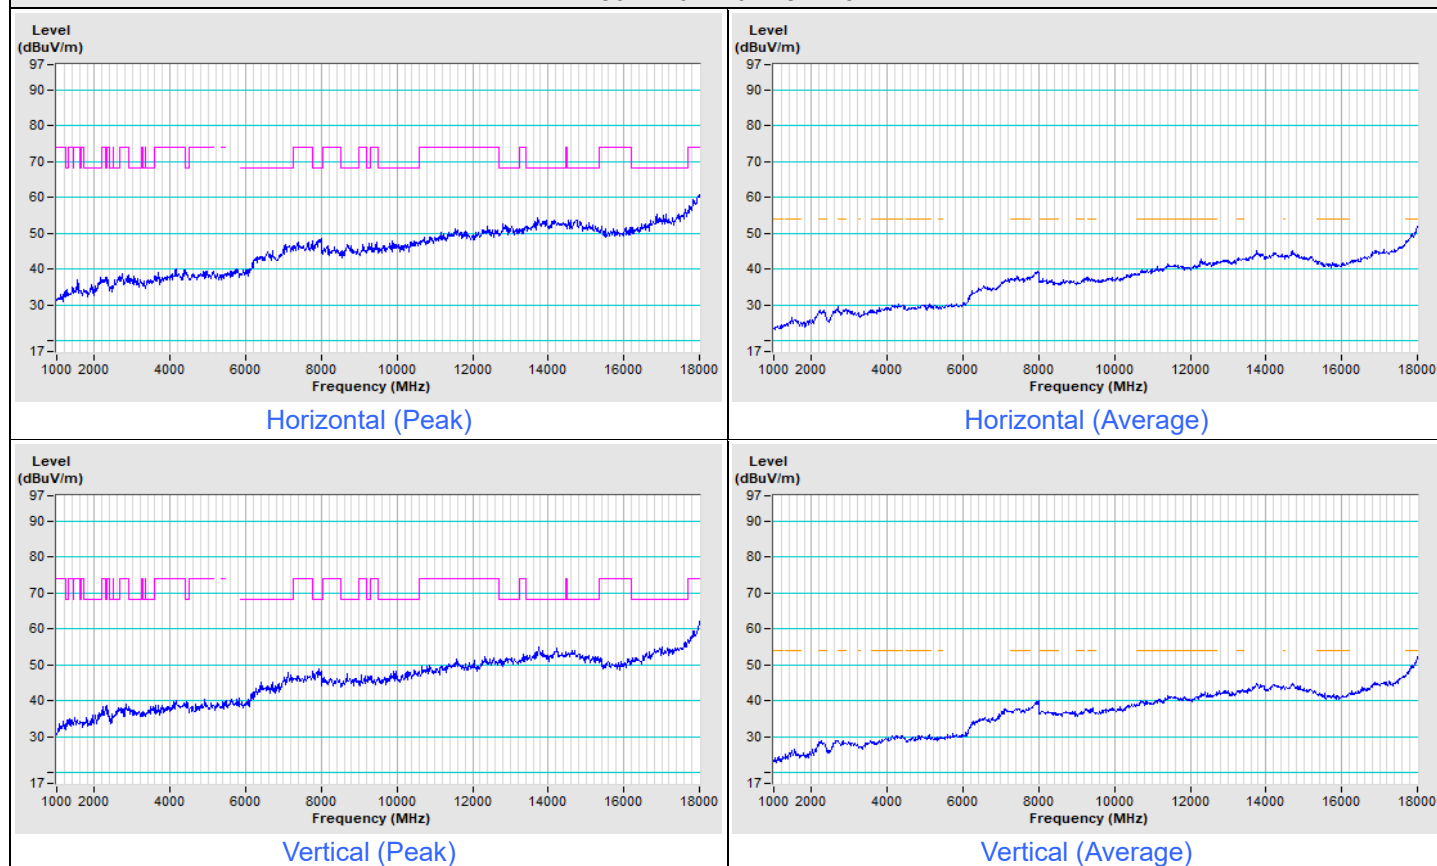


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

802.11be (EHT20) Channel 149

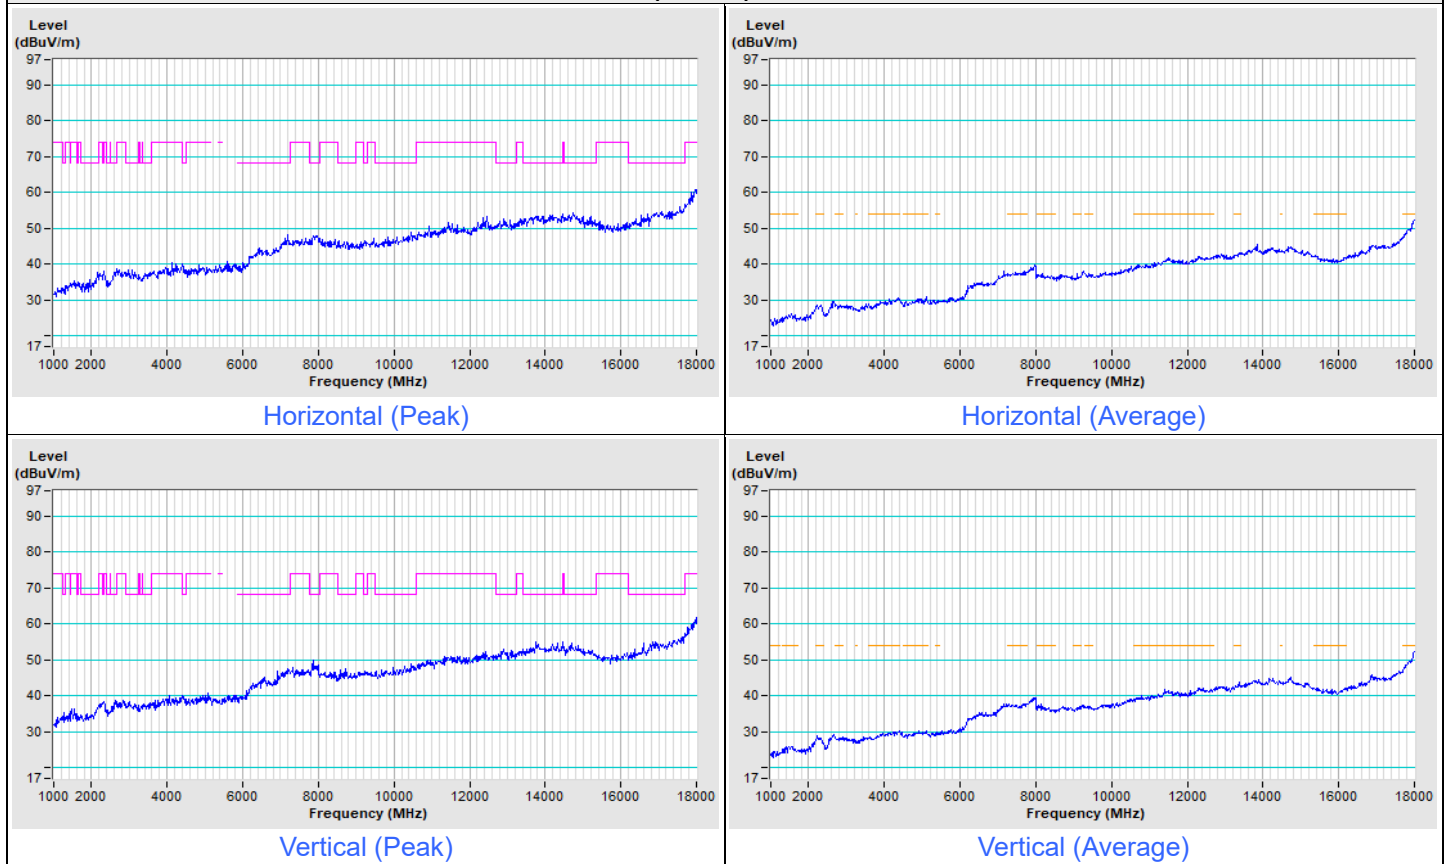


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

802.11be (EHT40) Channel 151

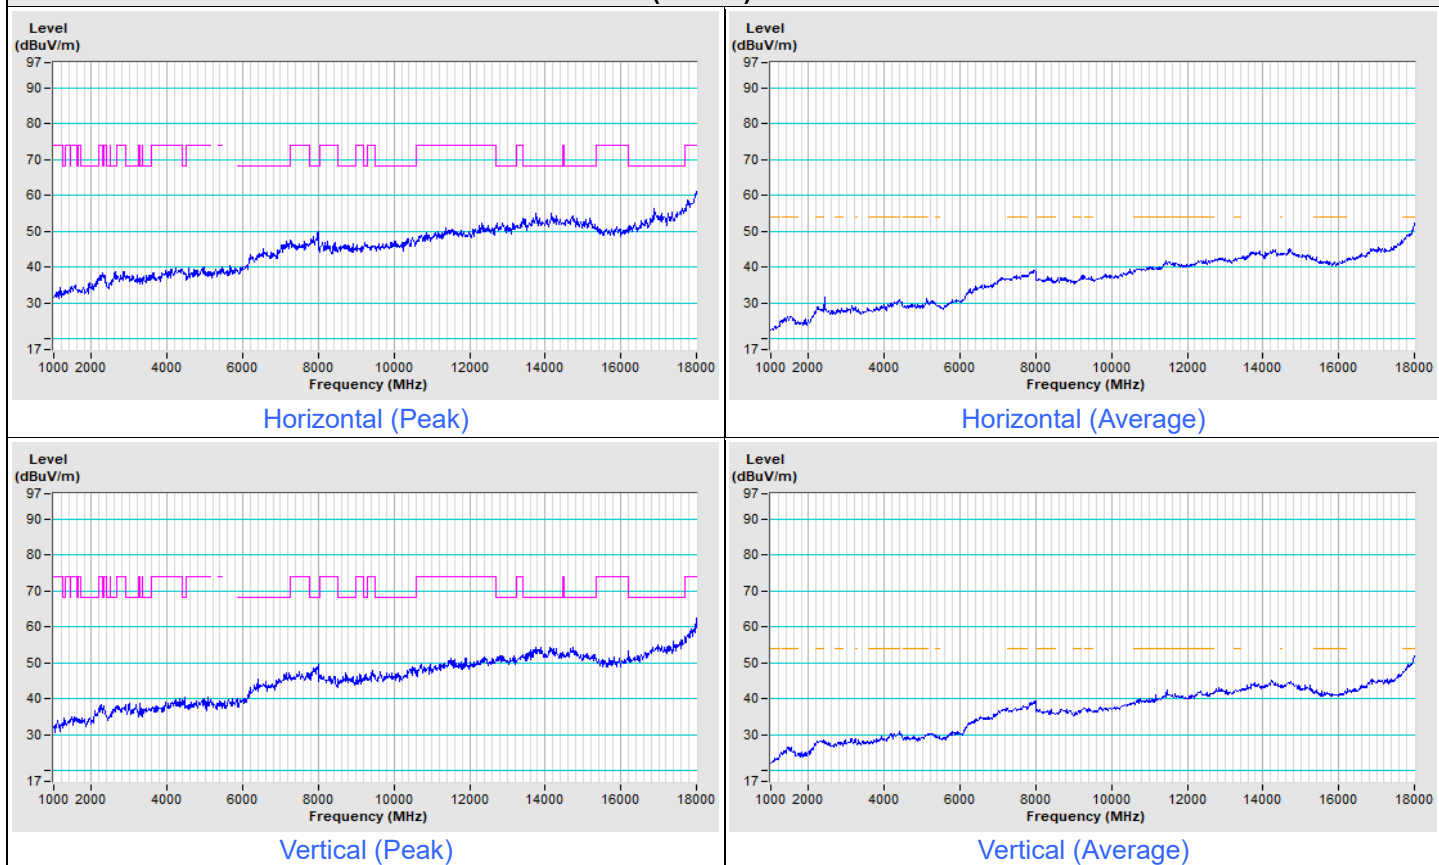


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--


802.11be (EHT80) Channel 155

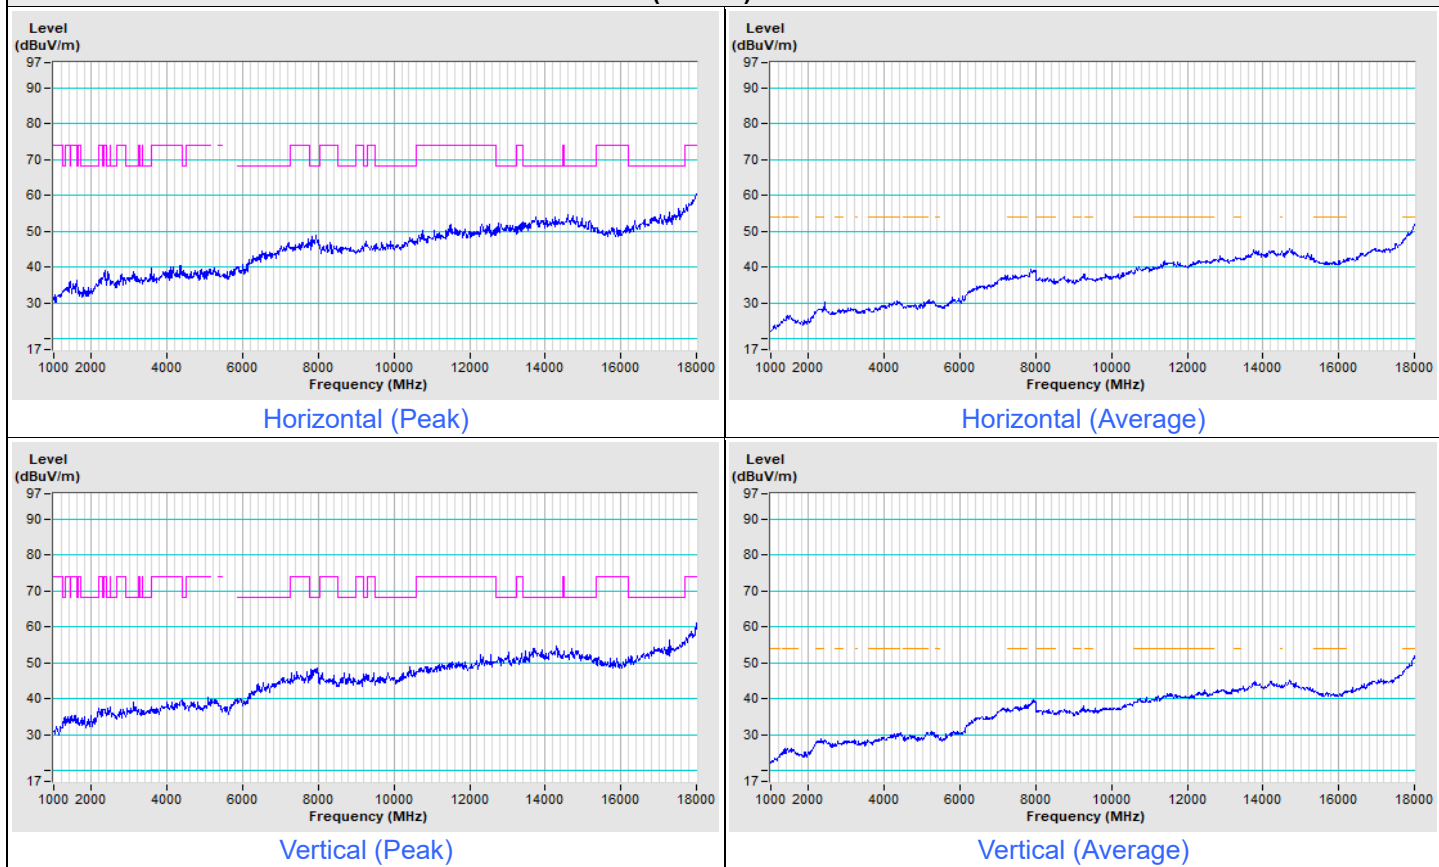

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

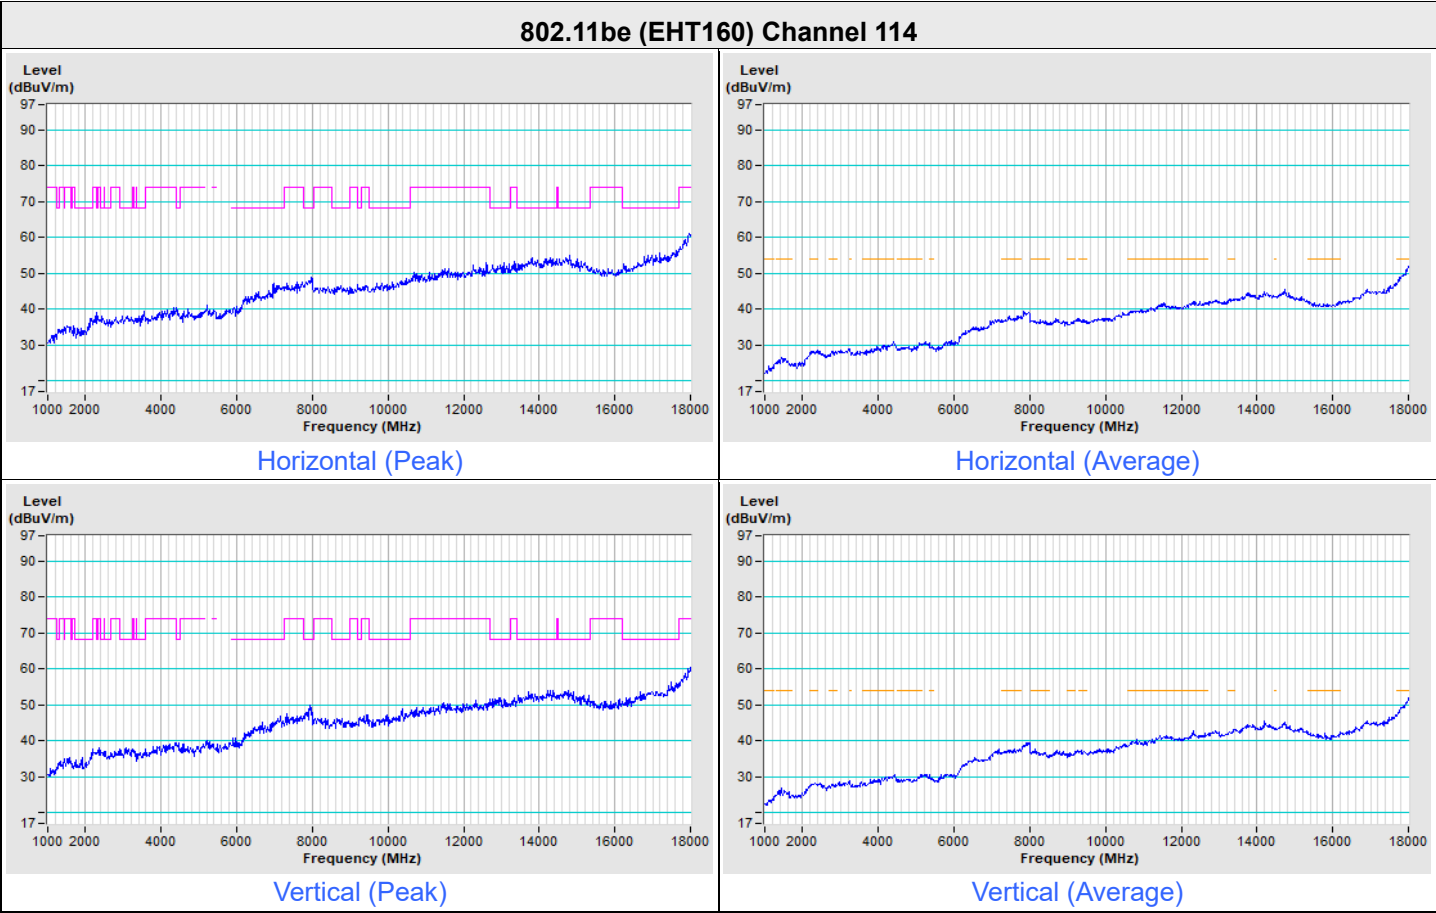

- Notes:
1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
 2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

802.11be (EHT240) Channel 114+CH138

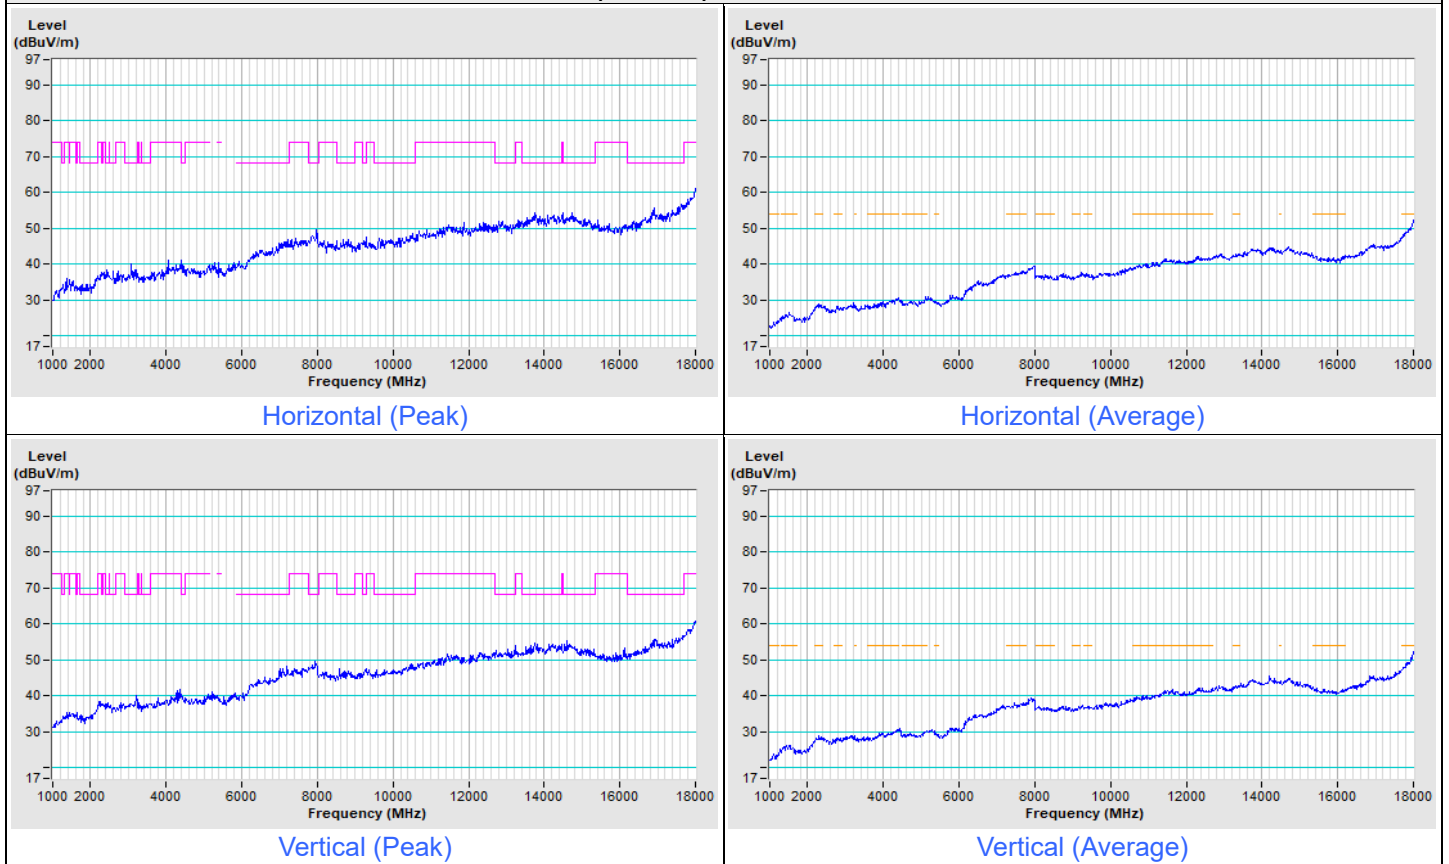

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---