



Plots of EUT ceased transmission in the time domain

CBP

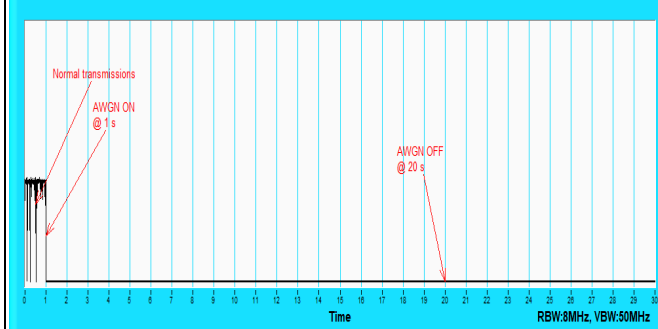


802.11be (EHT20) / CH105

CBP

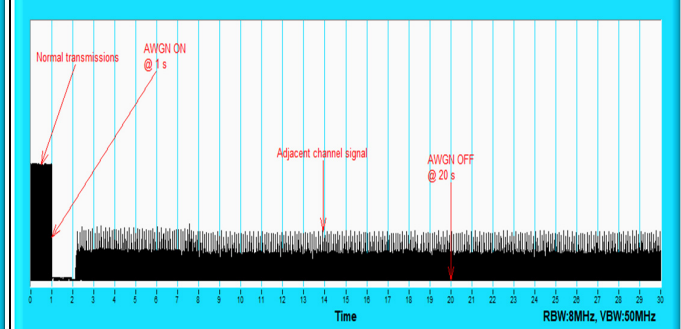


802.11be (EHT320) / CH95(Low Edge)

CBP

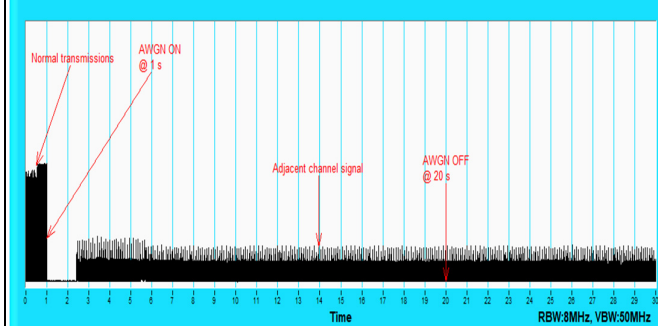

802.11be (EHT320) / CH95(Middle)

CBP

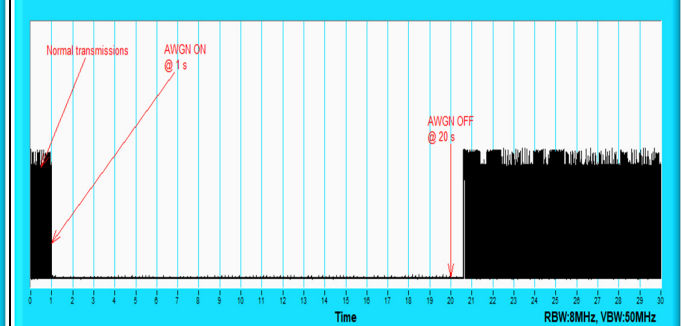

802.11be (EHT320) / CH95(High Edge)

For U-NII-7


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	161	6755	6755	-69	2.22	0	-71.22	-62	OFF
					-73	2.22	0	-75.22	-62	Minimal
					-79.78	2.22	0	-82	-62	ON
	320	159	6745	6590	-60	2.22	0	-62.22	-62	OFF
					-66	2.22	0	-68.22	-62	Minimal
					-79.78	2.22	0	-82	-62	ON
				6745	-60	2.22	0	-62.22	-62	OFF
					-64	2.22	0	-66.22	-62	Minimal
					-79.78	2.22	0	-82	-62	ON
				6900	-60	2.22	0	-62.22	-62	OFF
					-64	2.22	0	-66.22	-62	Minimal
					-79.78	2.22	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing mechanism for incumbent avoidance, but instead employs the bandwidth reduction mechanism to perform its function.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6755	v	x	v	v	v	v	v	v	v	v	90%	90%	Pass
	320	6590	v	v	v	x	v	v	v	v	v	v	90%	90%	Pass
		6745	v	v	v	v	v	x	v	v	v	v	90%	90%	Pass
		6900	v	v	v	x	v	v	v	v	v	v	90%	90%	Pass

Plots of EUT Tx waveform

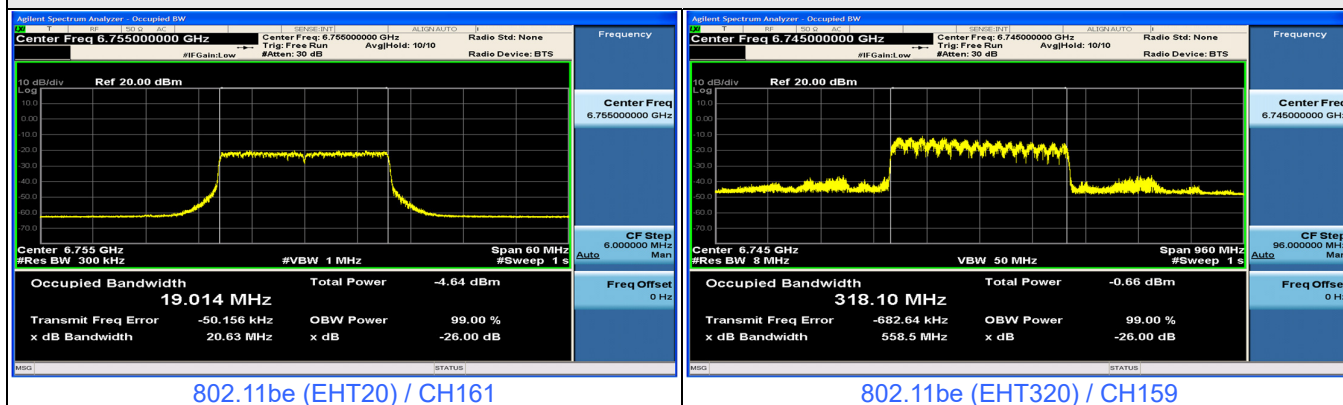


Plots of Injected signal (AWGN) level

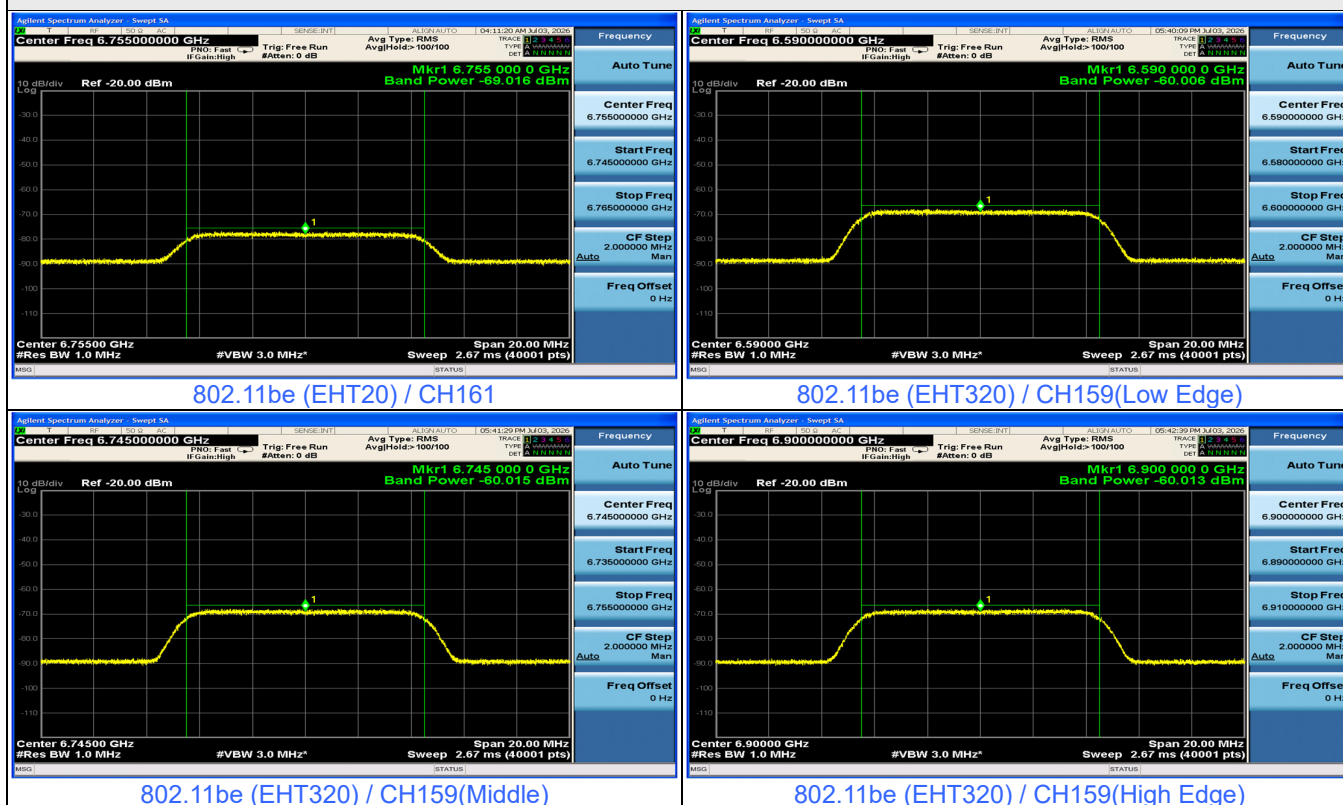


Plots of EUT ceased transmission in the time domain

CBP

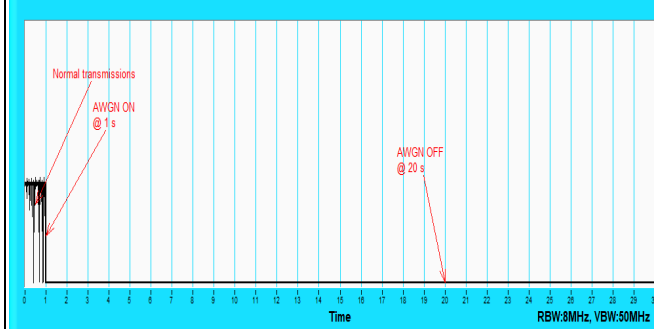


802.11be (EHT20) / CH161

CBP

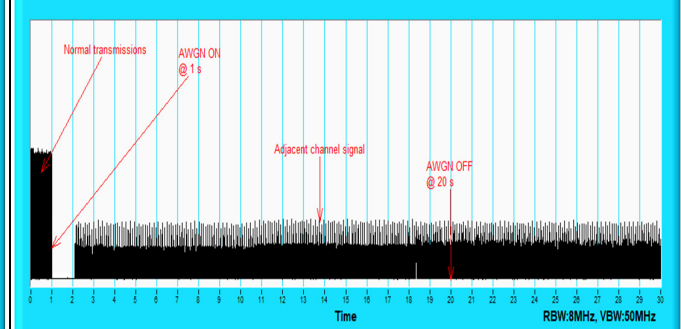


802.11be (EHT320) / CH159(Low Edge)

CBP

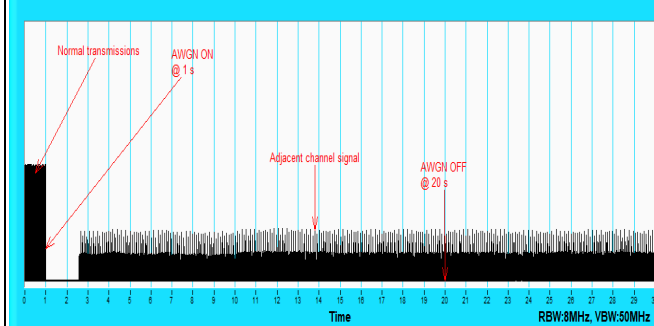

802.11be (EHT320) / CH159(Middle)

CBP

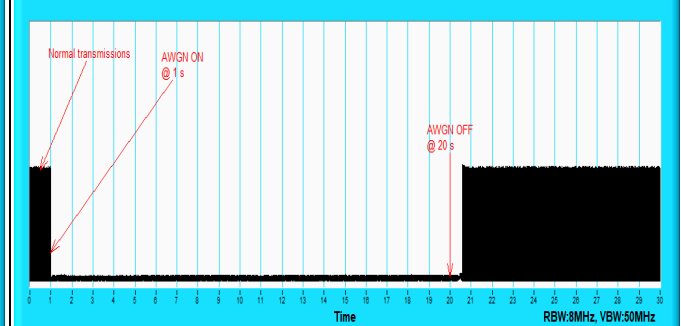

802.11be (EHT320) / CH159(High Edge)

For U-NII-8


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-69	2.22	0	-71.22	-62	OFF
					-73	2.22	0	-75.22	-62	Minimal
					-79.78	2.22	0	-82	-62	ON
	320	191	6905	6750	-61	2.22	0	-63.22	-62	OFF
					-66	2.22	0	-68.22	-62	Minimal
					-79.78	2.22	0	-82	-62	ON
				6905	-60	2.22	0	-62.22	-62	OFF
					-64	2.22	0	-66.22	-62	Minimal
					-79.78	2.22	0	-82	-62	ON
				7060	-61	2.22	0	-63.22	-62	OFF
					-66	2.22	0	-68.22	-62	Minimal
					-79.78	2.22	0	-82	-62	ON

Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing mechanism for incumbent avoidance, but instead employs the bandwidth reduction mechanism to perform its function.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	x	v	v	v	v	90%	90%	Pass
	320	6750	v	v	x	v	v	v	v	v	v	v	90%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	x	90%	90%	Pass
		7060	x	v	v	v	v	v	v	v	v	v	90%	90%	Pass

Plots of EUT Tx waveform

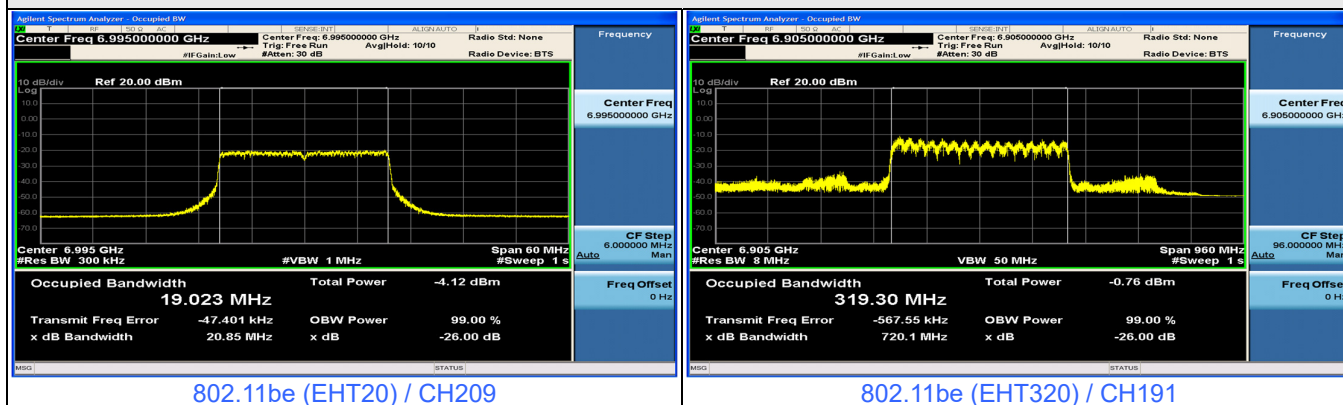


Plots of Injected signal (AWGN) level




Plots of EUT ceased transmission in the time domain

CBP

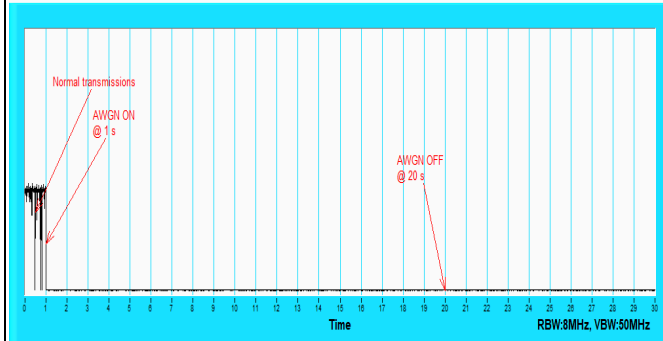


802.11be (EHT20) / CH209

CBP

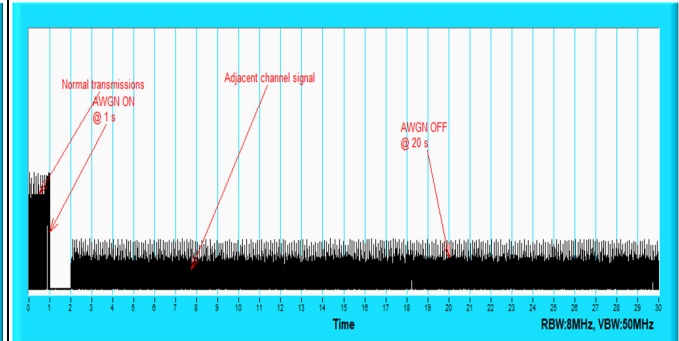


802.11be (EHT320) / CH191(Low Edge)

CBP

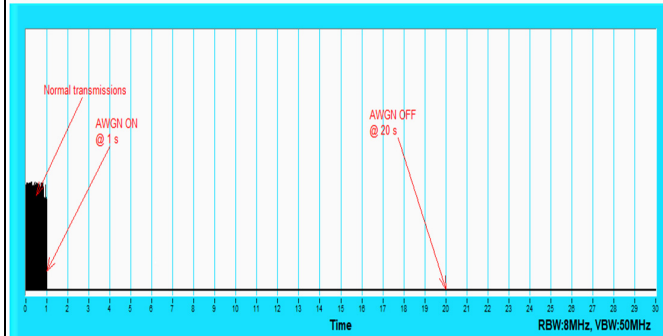

802.11be (EHT320) / CH191(Middle)


CBP

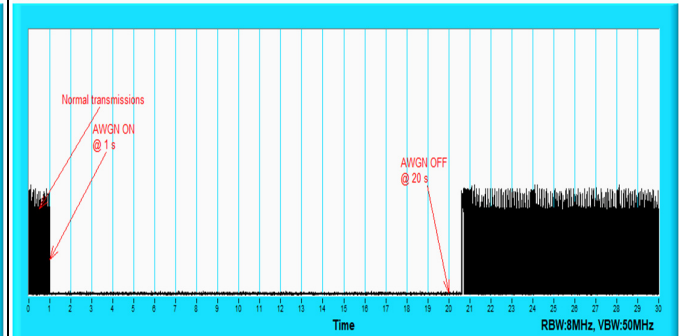

802.11be (EHT320) / CH191(High Edge)

For Verify bandwidth reduction

Plots of EUT ceased transmission in the frequency domain

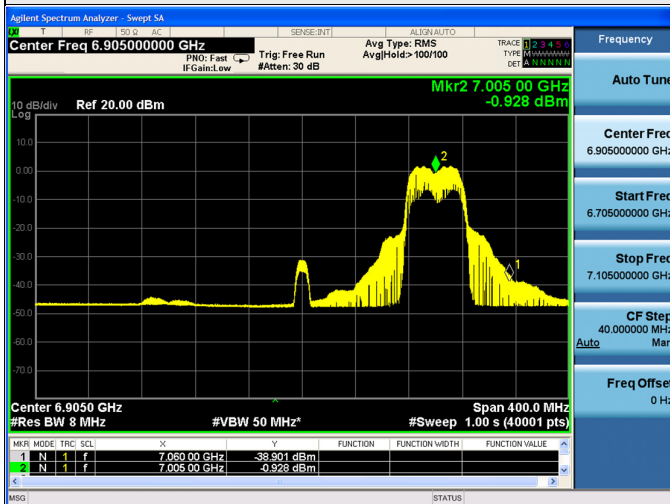

802.11be (EHT320) / CH191(High Edge)

A 10 MHz AWGN signal (centered at 7060 MHz) is injected. (N) The channel reduces to a 40 MHz channel centered around 7005 MHz.

7.7 AC Power Conducted Emissions

Mode A


2T2S

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Luis Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15770	9.78	28.45	9.36	38.23	19.14	65.58	55.58	-27.35	-36.44
2	0.17400	9.77	28.37	12.87	38.14	22.64	64.77	54.77	-26.63	-32.13
3	0.25000	9.77	29.51	21.71	39.28	31.48	61.76	51.76	-22.48	-20.28
4	0.27786	9.77	25.48	20.57	35.25	30.34	60.88	50.88	-25.63	-20.54
5	9.65400	9.97	10.74	4.44	20.71	14.41	60.00	50.00	-39.29	-35.59
6	14.18600	10.02	10.50	5.29	20.52	15.31	60.00	50.00	-39.48	-34.69

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

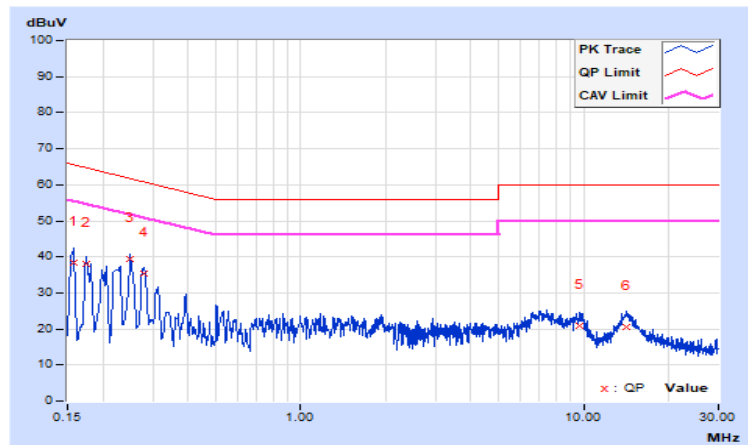


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Luis Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.79	33.00	12.04	42.79	21.83	66.00	56.00	-23.21	-34.17
2	0.16600	9.78	25.81	18.30	35.59	28.08	65.16	55.16	-29.57	-27.08
3	0.25000	9.77	25.26	24.73	35.03	34.50	61.76	51.76	-26.73	-17.26
4	0.42200	9.79	16.60	8.37	26.39	18.16	57.41	47.41	-31.02	-29.25
5	9.58200	10.00	8.30	2.01	18.30	12.01	60.00	50.00	-41.70	-37.99
6	14.57800	10.14	9.40	4.23	19.54	14.37	60.00	50.00	-40.46	-35.63

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

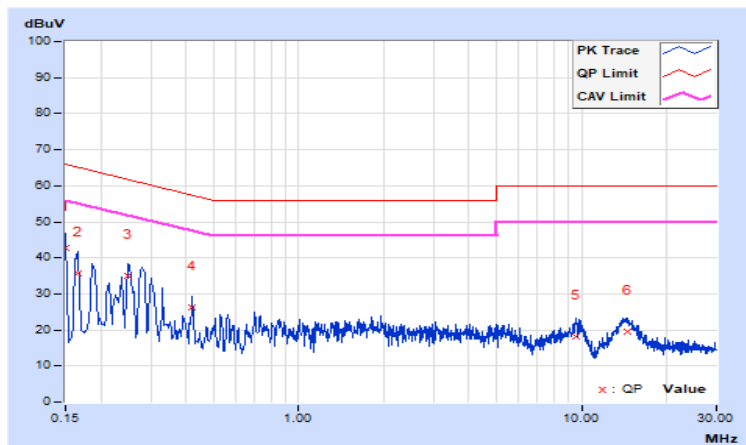

Mode B


2T2S

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Luis Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.78	38.17	22.70	47.95	32.48	65.78	55.78	-17.83	-23.30
2	0.22200	9.76	25.41	10.48	35.17	20.24	62.74	52.74	-27.57	-32.50
3	0.24600	9.76	30.80	21.97	40.56	31.73	61.89	51.89	-21.33	-20.16
4	8.65800	9.96	10.88	3.47	20.84	13.43	60.00	50.00	-39.16	-36.57
5	9.77000	9.97	12.14	4.94	22.11	14.91	60.00	50.00	-37.89	-35.09
6	14.79400	10.03	11.94	5.40	21.97	15.43	60.00	50.00	-38.03	-34.57

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

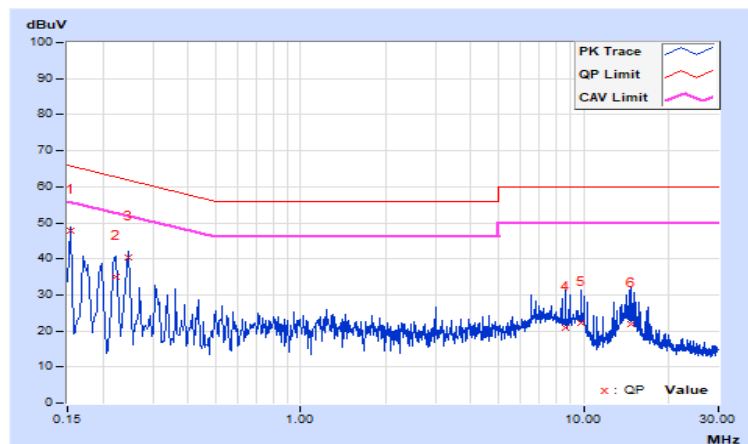


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Luis Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.79	36.14	22.45	45.93	32.24	65.78	55.78	-19.85	-23.54
2	0.24810	9.77	31.76	22.85	41.53	32.62	61.82	51.82	-20.29	-19.20
3	0.28200	9.77	27.64	15.33	37.41	25.10	60.76	50.76	-23.35	-25.66
4	0.40180	9.79	18.49	8.85	28.28	18.64	57.82	47.82	-29.54	-29.18
5	9.56200	10.00	9.94	2.50	19.94	12.50	60.00	50.00	-40.06	-37.50
6	15.13800	10.15	10.05	3.35	20.20	13.50	60.00	50.00	-39.80	-36.50

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

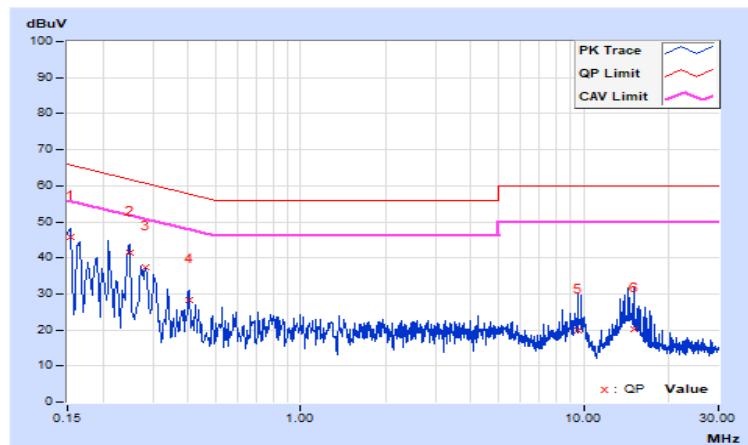

7.8 Unwanted Emissions below 1 GHz

Mode A


2T2S

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.84	20.82 QP	40.00	-19.18	1.00 H	355	30.17	-9.35
2	167.77	18.98 QP	43.50	-24.52	1.50 H	293	27.74	-8.76
3	193.07	23.21 QP	43.50	-20.29	2.00 H	360	34.56	-11.35
4	281.64	28.14 QP	46.00	-17.86	1.50 H	301	35.95	-7.81
5	406.75	28.07 QP	46.00	-17.93	1.00 H	177	33.59	-5.52
6	621.84	27.45 QP	46.00	-18.55	2.00 H	144	27.89	-0.44

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

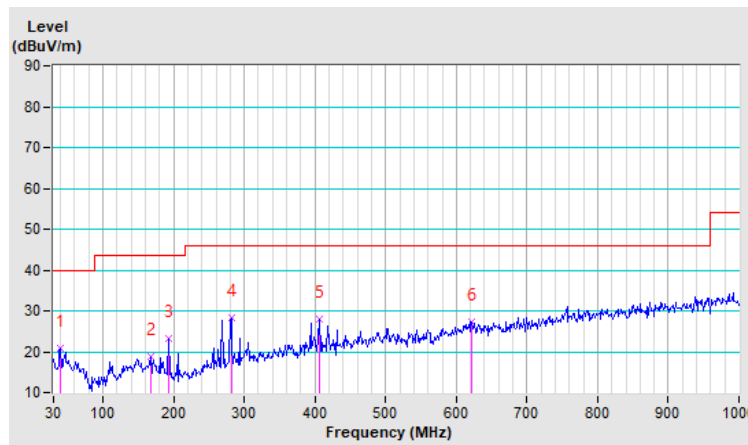


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.09	26.30 QP	40.00	-13.70	1.50 V	200	34.99	-8.69
2	256.33	28.53 QP	46.00	-17.47	1.50 V	124	37.54	-9.01
3	281.64	34.00 QP	46.00	-12.00	1.50 V	174	41.81	-7.81
4	292.88	31.44 QP	46.00	-14.56	1.50 V	239	39.00	-7.56
5	406.75	31.39 QP	46.00	-14.61	1.00 V	214	36.91	-5.52
6	739.93	38.72 QP	46.00	-7.28	2.00 V	1	36.59	2.13

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

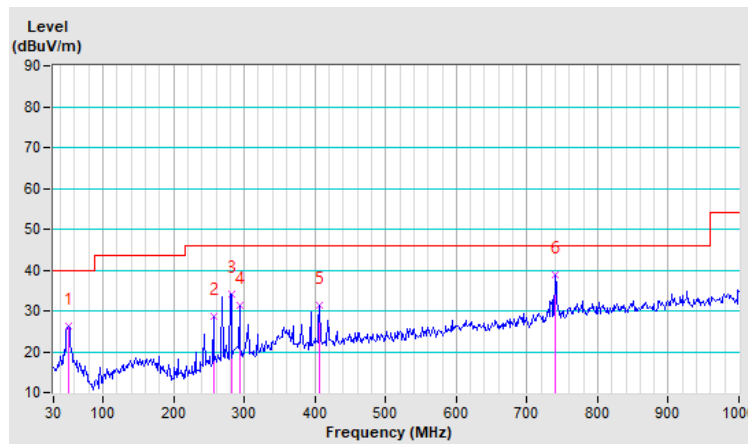

Mode B


2T2S

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.09	18.51 QP	40.00	-21.49	1.00 H	198	27.20	-8.69
2	167.77	18.56 QP	43.50	-24.94	2.00 H	64	27.32	-8.76
3	268.99	34.76 QP	46.00	-11.24	1.50 H	180	43.06	-8.30
4	418.00	27.30 QP	46.00	-18.70	1.50 H	144	32.54	-5.24
5	621.84	28.42 QP	46.00	-17.58	1.00 H	203	28.86	-0.44
6	800.38	30.58 QP	46.00	-15.42	2.00 H	103	27.23	3.35

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

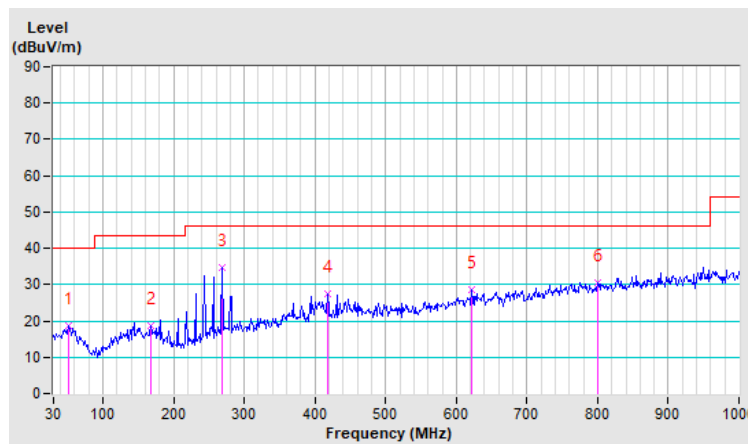


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.09	24.45 QP	40.00	-15.55	2.00 V	200	33.14	-8.69
2	169.17	17.55 QP	43.50	-25.95	1.00 V	145	26.44	-8.89
3	256.33	28.07 QP	46.00	-17.93	1.00 V	280	37.08	-9.01
4	268.99	36.61 QP	46.00	-9.39	1.50 V	360	44.91	-8.30
5	406.75	27.64 QP	46.00	-18.36	1.50 V	206	33.16	-5.52
6	976.10	34.22 QP	54.00	-19.78	1.00 V	75	27.64	6.58

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

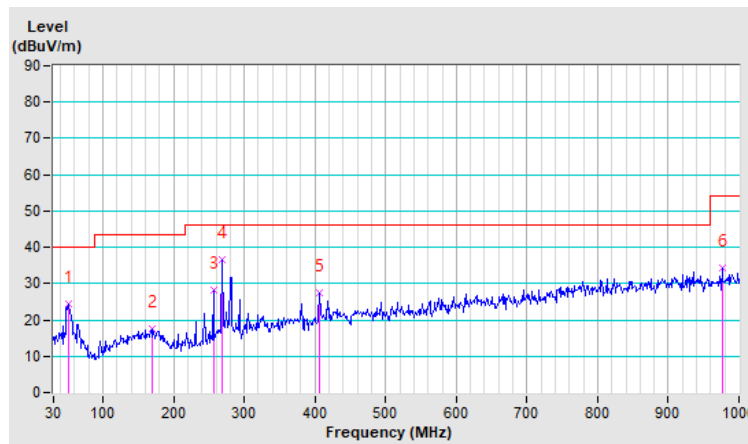

7.9 Unwanted Emissions above 1 GHz

CDD

RF Mode	802.11a	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	47.6 PK	88.2	-40.6	1.69 H	5	37.1	10.5
2	#5925.00	34.5 AV	68.2	-33.7	1.69 H	5	24.0	10.5
3	*6115.00	100.3 PK			1.69 H	5	59.1	41.2
4	*6115.00	91.4 AV			1.69 H	5	50.2	41.2
5	12230.00	60.1 PK	74.0	-13.9	1.92 H	311	40.6	19.5
6	12230.00	46.5 AV	54.0	-7.5	1.92 H	311	27.0	19.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.4 PK	88.2	-39.8	1.21 V	3	37.9	10.5
2	#5925.00	35.0 AV	68.2	-33.2	1.21 V	3	24.5	10.5
3	*6115.00	105.8 PK			1.21 V	3	64.6	41.2
4	*6115.00	96.3 AV			1.21 V	3	55.1	41.2
5	12230.00	60.4 PK	74.0	-13.6	1.77 V	254	40.9	19.5
6	12230.00	46.7 AV	54.0	-7.3	1.77 V	254	27.2	19.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	101.0 PK			1.66 H	15	59.6	41.4
2	*6255.00	91.9 AV			1.66 H	15	50.5	41.4
3	12510.00	60.1 PK	74.0	-13.9	1.92 H	312	40.3	19.8
4	12510.00	46.9 AV	54.0	-7.1	1.92 H	312	27.1	19.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	106.2 PK			1.20 V	5	64.8	41.4
2	*6255.00	96.9 AV			1.20 V	5	55.5	41.4
3	12510.00	60.8 PK	74.0	-13.2	1.72 V	253	41.0	19.8
4	12510.00	47.1 AV	54.0	-6.9	1.72 V	253	27.3	19.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	102.6 PK			1.62 H	2	60.0	42.6
2	*6415.00	102.2 AV			1.62 H	2	59.6	42.6
3	#12830.00	61.3 PK	88.2	-26.9	1.99 H	309	40.5	20.8
4	#12830.00	47.8 AV	68.2	-20.4	1.99 H	305	27.0	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	107.6 PK			1.22 V	12	65.0	42.6
2	*6415.00	98.5 AV			1.22 V	12	55.9	42.6
3	#12830.00	61.6 PK	88.2	-26.6	1.70 V	245	40.8	20.8
4	#12830.00	48.1 AV	68.2	-20.1	1.70 V	245	27.3	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.1 PK			1.66 H	13	59.5	42.6
2	*6435.00	101.6 AV			1.66 H	13	59.0	42.6
3	#12870.00	61.6 PK	88.2	-26.6	1.94 H	313	40.6	21.0
4	#12870.00	48.1 AV	68.2	-20.1	1.94 H	313	27.1	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	106.6 PK			1.28 V	17	64.0	42.6
2	*6435.00	96.5 AV			1.28 V	17	53.9	42.6
3	#12870.00	62.1 PK	88.2	-26.1	1.75 V	252	41.1	21.0
4	#12870.00	48.3 AV	68.2	-19.9	1.75 V	252	27.3	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.8 PK			1.66 H	10	59.0	42.8
2	*6475.00	92.7 AV			1.66 H	10	49.9	42.8
3	#12950.00	61.8 PK	88.2	-26.4	1.99 H	304	40.9	20.9
4	#12950.00	47.9 AV	68.2	-20.3	1.99 H	304	27.0	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	107.1 PK			1.30 V	13	64.3	42.8
2	*6475.00	97.3 AV			1.30 V	13	54.5	42.8
3	#12950.00	62.1 PK	88.2	-26.1	1.73 V	256	41.2	20.9
4	#12950.00	48.2 AV	68.2	-20.0	1.73 V	256	27.3	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.4 PK			1.64 H	15	59.4	43.0
2	*6515.00	93.4 AV			1.64 H	15	50.4	43.0
3	#13030.00	61.9 PK	88.2	-26.3	1.93 H	297	41.0	20.9
4	#13030.00	47.7 AV	68.2	-20.5	1.93 H	297	26.8	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	98.8 PK			1.11 V	11	55.8	43.0
2	*6515.00	107.9 AV			1.11 V	11	64.9	43.0
3	#13030.00	62.3 PK	88.2	-25.9	1.72 V	255	41.4	20.9
4	#13030.00	48.2 AV	68.2	-20.0	1.72 V	255	27.3	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	102.8 PK			1.71 H	13	59.6	43.2
2	*6535.00	93.7 AV			1.71 H	13	50.5	43.2
3	#13070.00	61.8 PK	88.2	-26.4	1.93 H	318	41.0	20.8
4	#13070.00	47.8 AV	68.2	-20.4	1.93 H	318	27.0	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.5 PK			1.14 V	16	65.3	43.2
2	*6535.00	99.2 AV			1.14 V	16	56.0	43.2
3	#13070.00	62.1 PK	88.2	-26.1	1.70 V	261	41.3	20.8
4	#13070.00	48.2 AV	68.2	-20.0	1.70 V	261	27.4	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	102.4 PK			1.65 H	19	59.3	43.1
2	*6695.00	93.2 AV			1.65 H	19	50.1	43.1
3	13390.00	63.1 PK	74.0	-10.9	1.95 H	306	41.1	22.0
4	13390.00	49.2 AV	54.0	-4.8	1.95 H	306	27.2	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.1 PK			1.23 V	9	65.0	43.1
2	*6695.00	98.6 AV			1.23 V	9	55.5	43.1
3	13390.00	63.6 PK	74.0	-10.4	1.72 V	260	41.6	22.0
4	13390.00	49.6 AV	54.0	-4.4	1.72 V	260	27.6	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	102.4 PK			1.69 H	55	59.1	43.3
2	*6855.00	93.7 AV			1.69 H	55	50.4	43.3
3	#13710.00	63.6 PK	88.2	-24.6	1.93 H	301	41.0	22.6
4	#13710.00	49.8 AV	68.2	-18.4	1.93 H	301	27.2	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.5 PK			1.21 V	12	64.2	43.3
2	*6855.00	98.2 AV			1.21 V	12	54.9	43.3
3	#13710.00	64.1 PK	88.2	-24.1	1.76 V	254	41.5	22.6
4	#13710.00	50.1 AV	68.2	-18.1	1.76 V	254	27.5	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.8 PK			1.66 H	52	59.3	43.5
2	*6875.00	93.5 AV			1.66 H	52	50.0	43.5
3	#13750.00	63.8 PK	88.2	-24.4	1.90 H	300	41.1	22.7
4	#13750.00	50.0 AV	68.2	-18.2	1.90 H	300	27.3	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.9 PK			1.24 V	14	64.4	43.5
2	*6875.00	98.5 AV			1.24 V	14	55.0	43.5
3	#13750.00	64.2 PK	88.2	-24.0	1.76 V	252	41.5	22.7
4	#13750.00	50.3 AV	68.2	-17.9	1.76 V	252	27.6	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.0 PK			1.64 H	55	58.5	44.5
2	*6995.00	93.7 AV			1.64 H	55	49.2	44.5
3	#13990.00	64.7 PK	88.2	-23.5	1.90 H	317	41.3	23.4
4	#13990.00	50.7 AV	68.2	-17.5	1.90 H	317	27.3	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	108.0 PK			1.19 V	2	63.5	44.5
2	*6995.00	98.8 AV			1.19 V	2	54.3	44.5
3	#13990.00	65.0 PK	88.2	-23.2	1.77 V	254	41.6	23.4
4	#13990.00	50.9 AV	68.2	-17.3	1.77 V	254	27.5	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	103.6 PK			1.67 H	18	58.5	45.1
2	*7095.00	95.0 AV			1.67 H	18	49.9	45.1
3	#13990.00	64.8 PK	88.2	-23.4	1.92 H	306	41.4	23.4
4	#13990.00	50.7 AV	68.2	-17.5	1.92 H	306	27.3	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	109.0 PK			1.21 V	5	63.9	45.1
2	*7095.00	99.9 AV			1.21 V	5	54.8	45.1
3	#13990.00	65.2 PK	88.2	-23.0	1.72 V	250	41.8	23.4
4	#13990.00	51.0 AV	68.2	-17.2	1.72 V	250	27.6	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	97.6 PK			1.67 H	4	52.5	45.1
2	*7115.00	87.5 AV			1.67 H	4	42.4	45.1
3	#7125.00	77.8 PK	88.2	-10.4	1.67 H	4	64.1	13.7
4	#7125.00	58.4 AV	68.2	-9.8	1.67 H	4	44.7	13.7
5	#14230.00	65.0 PK	88.2	-23.2	1.93 H	316	41.2	23.8
6	#14230.00	51.2 AV	68.2	-17.0	1.93 H	316	27.4	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.9 PK			1.39 V	349	56.8	45.1
2	*7115.00	92.1 AV			1.39 V	349	47.0	45.1
3	#7125.00	83.7 PK	88.2	-4.5	1.39 V	349	70.0	13.7
4	#7125.00	67.8 AV	68.2	-0.4	1.39 V	349	54.1	13.7
5	#14230.00	65.4 PK	88.2	-22.8	1.77 V	250	41.6	23.8
6	#14230.00	51.6 AV	68.2	-16.6	1.77 V	250	27.8	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

2T1S

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	47.7 PK	88.2	-40.5	2.14 H	9	37.2	10.5
2	#5925.00	34.7 AV	68.2	-33.5	2.14 H	9	24.2	10.5
3	*6115.00	104.1 PK			2.14 H	9	62.9	41.2
4	*6115.00	91.2 AV			2.14 H	9	50.0	41.2
5	12230.00	60.0 PK	74.0	-14.0	1.92 H	314	40.5	19.5
6	12230.00	46.3 AV	54.0	-7.7	1.92 H	314	26.8	19.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.7 PK	88.2	-39.5	1.33 V	12	38.2	10.5
2	#5925.00	35.0 AV	68.2	-33.2	1.33 V	12	24.5	10.5
3	*6115.00	109.4 PK			1.33 V	12	68.2	41.2
4	*6115.00	96.7 AV			1.33 V	12	55.5	41.2
5	12230.00	60.3 PK	74.0	-13.7	1.72 V	256	40.8	19.5
6	12230.00	46.6 AV	54.0	-7.4	1.72 V	256	27.1	19.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	103.7 PK			2.10 H	15	62.3	41.4
2	*6255.00	90.9 AV			2.10 H	15	49.5	41.4
3	12510.00	60.2 PK	74.0	-13.8	1.99 H	318	40.4	19.8
4	12510.00	46.4 AV	54.0	-7.6	1.99 H	318	26.6	19.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	108.8 PK			1.06 V	13	67.4	41.4
2	*6255.00	96.6 AV			1.06 V	13	55.2	41.4
3	12510.00	62.7 PK	74.0	-11.3	1.74 V	255	42.9	19.8
4	12510.00	47.0 AV	54.0	-7.0	1.74 V	255	27.2	19.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	104.6 PK			2.05 H	8	62.0	42.6
2	*6415.00	91.7 AV			2.05 H	8	49.1	42.6
3	#12830.00	61.2 PK	88.2	-27.0	1.98 H	319	40.4	20.8
4	#12830.00	47.5 AV	68.2	-20.7	1.98 H	319	26.7	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.2 PK			1.15 V	26	67.6	42.6
2	*6415.00	97.9 AV			1.15 V	26	55.3	42.6
3	#12830.00	61.7 PK	88.2	-26.5	1.77 V	251	40.9	20.8
4	#12830.00	48.1 AV	68.2	-20.1	1.77 V	251	27.3	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	103.6 PK			2.11 H	23	61.0	42.6
2	*6435.00	91.5 AV			2.11 H	23	48.9	42.6
3	#12870.00	61.6 PK	88.2	-26.6	1.97 H	318	40.6	21.0
4	#12870.00	47.8 AV	68.2	-20.4	1.97 H	318	26.8	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	109.2 PK			1.13 V	17	66.6	42.6
2	*6435.00	96.7 AV			1.13 V	17	54.1	42.6
3	#12870.00	62.0 PK	88.2	-26.2	1.70 V	250	41.0	21.0
4	#12870.00	48.3 AV	68.2	-19.9	1.70 V	250	27.3	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	104.0 PK			2.01 H	16	61.2	42.8
2	*6475.00	89.5 AV			2.01 H	16	46.7	42.8
3	#12950.00	61.6 PK	88.2	-26.6	1.99 H	304	40.7	20.9
4	#12950.00	47.8 AV	68.2	-20.4	1.99 H	304	26.9	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	108.9 PK			1.13 V	17	66.1	42.8
2	*6475.00	97.1 AV			1.13 V	17	54.3	42.8
3	#12950.00	61.9 PK	88.2	-26.3	1.74 V	257	41.0	20.9
4	#12950.00	48.3 AV	68.2	-19.9	1.74 V	257	27.4	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	104.5 PK			2.05 H	20	61.5	43.0
2	*6515.00	92.0 AV			2.05 H	20	49.0	43.0
3	#13030.00	61.7 PK	88.2	-26.5	1.93 H	299	40.8	20.9
4	#13030.00	47.8 AV	68.2	-20.4	1.93 H	299	26.9	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	108.2 PK			1.11 V	7	65.2	43.0
2	*6515.00	96.4 AV			1.11 V	7	53.4	43.0
3	#13030.00	62.1 PK	88.2	-26.1	1.72 V	256	41.2	20.9
4	#13030.00	48.0 AV	68.2	-20.2	1.72 V	256	27.1	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	104.5 PK			2.03 H	13	61.3	43.2
2	*6535.00	91.9 AV			2.03 H	13	48.7	43.2
3	#13070.00	61.8 PK	88.2	-26.4	1.92 H	314	41.0	20.8
4	#13070.00	47.8 AV	68.2	-20.4	1.92 H	314	27.0	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.7 PK			1.10 V	15	65.5	43.2
2	*6535.00	96.7 AV			1.10 V	15	53.5	43.2
3	#13070.00	62.1 PK	88.2	-26.1	1.72 V	255	41.3	20.8
4	#13070.00	48.3 AV	68.2	-19.9	1.72 V	255	27.5	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	105.3 PK			2.14 H	19	62.2	43.1
2	*6695.00	92.1 AV			2.14 H	19	49.0	43.1
3	13390.00	62.9 PK	74.0	-11.1	1.99 H	305	40.9	22.0
4	13390.00	49.1 AV	54.0	-4.9	1.99 H	305	27.1	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.3 PK			1.08 V	13	66.2	43.1
2	*6695.00	97.5 AV			1.08 V	13	54.4	43.1
3	13390.00	63.2 PK	74.0	-10.8	1.77 V	259	41.2	22.0
4	13390.00	49.5 AV	54.0	-4.5	1.77 V	259	27.5	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	105.1 PK			2.00 H	11	61.8	43.3
2	*6855.00	92.0 AV			2.00 H	11	48.7	43.3
3	#13710.00	63.6 PK	88.2	-24.6	1.97 H	303	41.0	22.6
4	#13710.00	49.8 AV	68.2	-18.4	1.97 H	303	27.2	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.1 PK			1.13 V	20	65.8	43.3
2	*6855.00	97.1 AV			1.13 V	20	53.8	43.3
3	#13710.00	63.9 PK	88.2	-24.3	1.70 V	256	41.3	22.6
4	#13710.00	50.1 AV	68.2	-18.1	1.70 V	256	27.5	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	105.4 PK			2.14 H	22	61.9	43.5
2	*6875.00	92.0 AV			2.14 H	22	48.5	43.5
3	#13750.00	63.6 PK	88.2	-24.6	1.97 H	320	40.9	22.7
4	#13750.00	49.8 AV	68.2	-18.4	1.97 H	320	27.1	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	110.3 PK			1.05 V	3	66.8	43.5
2	*6875.00	96.7 AV			1.05 V	3	53.2	43.5
3	#13750.00	64.0 PK	88.2	-24.2	1.68 V	254	41.3	22.7
4	#13750.00	50.1 AV	68.2	-18.1	1.68 V	254	27.4	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	105.4 PK			2.13 H	26	60.9	44.5
2	*6995.00	93.1 AV			2.13 H	26	48.6	44.5
3	#13990.00	64.7 PK	88.2	-23.5	1.92 H	312	41.3	23.4
4	#13990.00	50.8 AV	68.2	-17.4	1.92 H	312	27.4	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	111.0 PK			1.00 V	14	66.5	44.5
2	*6995.00	98.6 AV			1.00 V	14	54.1	44.5
3	#13990.00	65.0 PK	88.2	-23.2	1.73 V	251	41.6	23.4
4	#13990.00	51.1 AV	68.2	-17.1	1.73 V	251	27.7	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	105.1 PK			2.16 H	23	60.0	45.1
2	*7095.00	92.3 AV			2.16 H	23	47.2	45.1
3	#14190.00	65.2 PK	88.2	-23.0	2.03 H	303	41.4	23.8
4	#14190.00	51.1 AV	68.2	-17.1	2.03 H	303	27.3	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	109.2 PK			1.26 V	16	64.1	45.1
2	*7095.00	97.9 AV			1.26 V	16	52.8	45.1
3	#14190.00	65.6 PK	88.2	-22.6	1.80 V	253	41.8	23.8
4	#14190.00	51.6 AV	68.2	-16.6	1.80 V	253	27.8	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.5 PK			1.83 H	8	44.4	45.1
2	*7115.00	77.5 AV			1.83 H	8	32.4	45.1
3	#7125.00	75.0 PK	88.2	-13.2	1.83 H	8	61.3	13.7
4	#7125.00	61.4 AV	68.2	-6.8	1.83 H	8	47.7	13.7
5	#14230.00	64.8 PK	88.2	-23.4	2.11 H	302	41.0	23.8
6	#14230.00	50.7 AV	68.2	-17.5	2.11 H	302	26.9	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.5 PK			2.03 V	126	50.4	45.1
2	*7115.00	83.1 AV			2.03 V	126	38.0	45.1
3	#7125.00	81.8 PK	88.2	-6.4	2.03 V	126	68.1	13.7
4	#7125.00	68.1 AV	68.2	-0.1	2.03 V	126	54.4	13.7
5	#14230.00	65.2 PK	88.2	-23.0	1.88 V	253	41.4	23.8
6	#14230.00	51.3 AV	68.2	-16.9	1.88 V	253	27.5	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.0 PK	88.2	-40.2	1.80 H	20	37.5	10.5
2	#5925.00	34.7 AV	68.2	-33.5	1.80 H	20	24.2	10.5
3	*6125.00	104.7 PK			1.80 H	20	63.5	41.2
4	*6125.00	92.6 AV			1.80 H	20	51.4	41.2
5	12330.00	60.3 PK	74.0	-13.7	1.92 H	312	40.5	19.8
6	12330.00	46.4 AV	54.0	-7.6	1.92 H	312	26.6	19.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.8 PK	88.2	-39.4	1.33 V	20	38.3	10.5
2	#5925.00	35.1 AV	68.2	-33.1	1.33 V	20	24.6	10.5
3	*6125.00	109.0 PK			1.33 V	20	67.8	41.2
4	*6125.00	97.8 AV			1.33 V	20	56.6	41.2
5	12330.00	60.5 PK	74.0	-13.5	1.72 V	255	40.7	19.8
6	12330.00	46.8 AV	54.0	-7.2	1.72 V	255	27.0	19.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	103.4 PK			1.83 H	21	62.0	41.4
2	*6245.00	93.3 AV			1.83 H	21	51.9	41.4
3	12490.00	60.3 PK	74.0	-13.7	1.82 H	316	40.5	19.8
4	12490.00	46.6 AV	54.0	-7.4	1.82 H	316	26.8	19.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	109.4 PK			1.36 V	16	68.0	41.4
2	*6245.00	97.9 AV			1.36 V	16	56.5	41.4
3	12490.00	60.8 PK	74.0	-13.2	1.74 V	248	41.0	19.8
4	12490.00	47.1 AV	54.0	-6.9	1.74 V	248	27.3	19.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	104.9 PK			1.89 H	21	62.5	42.4
2	*6405.00	93.6 AV			1.89 H	21	51.2	42.4
3	#12810.00	61.2 PK	88.2	-27.0	1.96 H	306	40.5	20.7
4	#12810.00	47.6 AV	68.2	-20.6	1.96 H	306	26.9	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.7 PK			1.03 V	13	68.3	42.4
2	*6405.00	99.1 AV			1.03 V	13	56.7	42.4
3	#12810.00	61.6 PK	88.2	-26.6	1.74 V	250	40.9	20.7
4	#12810.00	47.9 AV	68.2	-20.3	1.74 V	250	27.2	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	102.7 PK			1.92 H	26	60.0	42.7
2	*6445.00	91.0 AV			1.92 H	26	48.3	42.7
3	#12890.00	61.6 PK	88.2	-26.6	1.94 H	310	40.6	21.0
4	#12890.00	47.9 AV	68.2	-20.3	1.94 H	310	26.9	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	107.9 PK			1.02 V	17	65.2	42.7
2	*6445.00	95.9 AV			1.02 V	17	53.2	42.7
3	#12890.00	62.0 PK	88.2	-26.2	1.70 V	242	41.0	21.0
4	#12890.00	48.3 AV	68.2	-19.9	1.70 V	242	27.3	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	102.6 PK			1.60 H	58	59.8	42.8
2	*6485.00	91.2 AV			1.60 H	58	48.4	42.8
3	#12970.00	62.0 PK	88.2	-26.2	1.99 H	306	41.1	20.9
4	#12970.00	48.0 AV	68.2	-20.2	1.99 H	306	27.1	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	108.5 PK			1.11 V	16	65.7	42.8
2	*6485.00	95.1 AV			1.11 V	16	52.3	42.8
3	#12970.00	62.0 PK	88.2	-26.2	1.69 V	238	41.1	20.9
4	#12970.00	48.4 AV	68.2	-19.8	1.69 V	238	27.5	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	103.0 PK			1.65 H	53	59.8	43.2
2	*6525.00	92.8 AV			1.65 H	53	49.6	43.2
3	#13050.00	61.8 PK	88.2	-26.4	1.97 H	320	40.9	20.9
4	#13050.00	47.9 AV	68.2	-20.3	1.97 H	320	27.0	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	107.8 PK			1.11 V	23	64.6	43.2
2	*6525.00	95.2 AV			1.11 V	23	52.0	43.2
3	#13050.00	62.2 PK	88.2	-26.0	1.72 V	240	41.3	20.9
4	#13050.00	48.2 AV	68.2	-20.0	1.72 V	240	27.3	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	102.1 PK			1.48 H	57	58.9	43.2
2	*6565.00	91.7 AV			1.48 H	57	48.5	43.2
3	#13130.00	61.9 PK	88.2	-26.3	1.92 H	314	40.9	21.0
4	#13130.00	48.0 AV	68.2	-20.2	1.92 H	314	27.0	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	107.1 PK			1.11 V	8	63.9	43.2
2	*6565.00	95.5 AV			1.11 V	8	52.3	43.2
3	#13130.00	62.3 PK	88.2	-25.9	1.73 V	257	41.3	21.0
4	#13130.00	48.4 AV	68.2	-19.8	1.73 V	257	27.4	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	102.8 PK			1.55 H	67	59.6	43.2
2	*6725.00	92.0 AV			1.55 H	67	48.8	43.2
3	#13450.00	62.8 PK	88.2	-25.4	1.96 H	304	40.9	21.9
4	#13450.00	48.9 AV	68.2	-19.3	1.96 H	304	27.0	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	107.9 PK			1.16 V	19	64.7	43.2
2	*6725.00	96.4 AV			1.16 V	19	53.2	43.2
3	#13450.00	63.1 PK	88.2	-25.1	1.70 V	260	41.2	21.9
4	#13450.00	49.3 AV	68.2	-18.9	1.70 V	260	27.4	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	103.3 PK			1.60 H	52	60.0	43.3
2	*6845.00	92.4 AV			1.60 H	52	49.1	43.3
3	#13690.00	63.6 PK	88.2	-24.6	1.99 H	305	41.0	22.6
4	#13690.00	49.7 AV	68.2	-18.5	1.99 H	305	27.1	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	109.3 PK			1.21 V	15	66.0	43.3
2	*6845.00	97.1 AV			1.21 V	15	53.8	43.3
3	#13690.00	64.0 PK	88.2	-24.2	1.78 V	253	41.4	22.6
4	#13690.00	50.1 AV	68.2	-18.1	1.78 V	253	27.5	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	103.4 PK			1.98 H	95	59.9	43.5
2	*6885.00	93.2 AV			1.98 H	95	49.7	43.5
3	#13770.00	63.9 PK	88.2	-24.3	1.95 H	310	41.2	22.7
4	#13770.00	49.9 AV	68.2	-18.3	1.95 H	310	27.2	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	109.5 PK			1.16 V	9	66.0	43.5
2	*6885.00	97.4 AV			1.16 V	9	53.9	43.5
3	#13770.00	64.3 PK	88.2	-23.9	1.72 V	249	41.6	22.7
4	#13770.00	50.3 AV	68.2	-17.9	1.72 V	249	27.6	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	104.8 PK			1.92 H	92	60.1	44.7
2	*7005.00	93.0 AV			1.92 H	92	48.3	44.7
3	#14010.00	64.7 PK	88.2	-23.5	1.99 H	312	41.3	23.4
4	#14010.00	50.6 AV	68.2	-17.6	1.99 H	312	27.2	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	110.4 PK			1.16 V	9	65.7	44.7
2	*7005.00	98.3 AV			1.16 V	9	53.6	44.7
3	#14010.00	65.0 PK	88.2	-23.2	1.73 V	254	41.6	23.4
4	#14010.00	51.1 AV	68.2	-17.1	1.73 V	254	27.7	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	104.3 PK			1.92 H	6	59.3	45.0
2	*7085.00	92.2 AV			1.92 H	6	47.2	45.0
3	#7125.00	53.2 PK	88.2	-35.0	1.92 H	6	39.5	13.7
4	#7125.00	40.4 AV	68.2	-27.8	1.92 H	6	26.7	13.7
5	#14170.00	65.3 PK	88.2	-22.9	1.92 H	304	41.5	23.8
6	#14170.00	51.1 AV	68.2	-17.1	1.92 H	304	27.3	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	109.9 PK			1.32 V	3	64.9	45.0
2	*7085.00	97.0 AV			1.32 V	3	52.0	45.0
3	#7125.00	54.2 PK	88.2	-34.0	1.32 V	3	40.5	13.7
4	#7125.00	40.7 AV	68.2	-27.5	1.32 V	3	27.0	13.7
5	#14170.00	65.4 PK	88.2	-22.8	1.73 V	255	41.6	23.8
6	#14170.00	51.4 AV	68.2	-16.8	1.73 V	255	27.6	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.5 PK	88.2	-39.7	1.60 H	46	38.0	10.5
2	#5925.00	34.5 AV	68.2	-33.7	1.60 H	46	24.0	10.5
3	*6145.00	104.7 PK			1.60 H	46	63.5	41.2
4	*6145.00	91.9 AV			1.60 H	46	50.7	41.2
5	12290.00	60.3 PK	74.0	-13.7	1.90 H	308	40.5	19.8
6	12290.00	46.6 AV	54.0	-7.4	1.90 H	308	26.8	19.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.8 PK	88.2	-39.4	1.26 V	12	38.3	10.5
2	#5925.00	35.0 AV	68.2	-33.2	1.26 V	12	24.5	10.5
3	*6145.00	110.6 PK			1.26 V	12	69.4	41.2
4	*6145.00	97.7 AV			1.26 V	12	56.5	41.2
5	12290.00	60.6 PK	74.0	-13.4	1.70 V	253	40.8	19.8
6	12290.00	46.9 AV	54.0	-7.1	1.70 V	253	27.1	19.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	105.4 PK			1.62 H	37	64.1	41.3
2	*6225.00	92.3 AV			1.62 H	37	51.0	41.3
3	12450.00	60.3 PK	74.0	-13.7	1.97 H	303	40.6	19.7
4	12450.00	46.5 AV	54.0	-7.5	1.97 H	303	26.8	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.9 PK			1.26 V	18	69.6	41.3
2	*6225.00	98.2 AV			1.26 V	18	56.9	41.3
3	12450.00	60.6 PK	74.0	-13.4	1.73 V	260	40.9	19.7
4	12450.00	46.9 AV	54.0	-7.1	1.73 V	260	27.2	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	106.6 PK			1.66 H	6	64.3	42.3
2	*6385.00	93.4 AV			1.66 H	6	51.1	42.3
3	#12770.00	61.3 PK	88.2	-26.9	1.94 H	312	40.6	20.7
4	#12770.00	47.7 AV	68.2	-20.5	1.94 H	312	27.0	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.2 PK			1.23 V	3	69.9	42.3
2	*6385.00	99.1 AV			1.23 V	3	56.8	42.3
3	#12770.00	61.7 PK	88.2	-26.5	1.71 V	258	41.0	20.7
4	#12770.00	48.0 AV	68.2	-20.2	1.71 V	258	27.3	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	105.5 PK			1.62 H	23	62.7	42.8
2	*6465.00	92.3 AV			1.62 H	23	49.5	42.8
3	#12930.00	61.6 PK	88.2	-26.6	1.98 H	303	40.6	21.0
4	#12930.00	48.1 AV	68.2	-20.1	1.98 H	303	27.1	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.1 PK			1.25 V	15	67.3	42.8
2	*6465.00	97.7 AV			1.25 V	15	54.9	42.8
3	#12930.00	62.0 PK	88.2	-26.2	1.77 V	256	41.0	21.0
4	#12930.00	48.3 AV	68.2	-19.9	1.77 V	256	27.3	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	106.0 PK			1.53 H	27	62.7	43.3
2	*6545.00	93.2 AV			1.53 H	27	49.9	43.3
3	#13090.00	61.7 PK	88.2	-26.5	1.99 H	304	40.8	20.9
4	#13090.00	47.7 AV	68.2	-20.5	1.99 H	304	26.8	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.1 PK			1.21 V	7	67.8	43.3
2	*6545.00	98.3 AV			1.21 V	7	55.0	43.3
3	#13090.00	62.2 PK	88.2	-26.0	1.76 V	258	41.3	20.9
4	#13090.00	48.1 AV	68.2	-20.1	1.76 V	258	27.2	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	106.3 PK			1.58 H	36	63.3	43.0
2	*6625.00	94.2 AV			1.58 H	36	51.2	43.0
3	13250.00	62.3 PK	74.0	-11.7	1.90 H	309	40.9	21.4
4	13250.00	48.1 AV	54.0	-5.9	1.90 H	309	26.7	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.1 PK			1.11 V	6	69.1	43.0
2	*6625.00	99.3 AV			1.11 V	6	56.3	43.0
3	13250.00	62.7 PK	74.0	-11.3	1.73 V	255	41.3	21.4
4	13250.00	48.7 AV	54.0	-5.3	1.73 V	255	27.3	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	108.0 PK			1.63 H	35	64.8	43.2
2	*6705.00	95.5 AV			1.63 H	35	52.3	43.2
3	#13410.00	62.8 PK	88.2	-25.4	1.96 H	311	40.8	22.0
4	#13410.00	49.0 AV	68.2	-19.2	1.96 H	311	27.0	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	113.1 PK			1.20 V	15	69.9	43.2
2	*6705.00	100.2 AV			1.20 V	15	57.0	43.2
3	#13410.00	63.5 PK	88.2	-24.7	1.69 V	243	41.5	22.0
4	#13410.00	49.4 AV	68.2	-18.8	1.69 V	243	27.4	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	107.7 PK			1.66 H	24	64.3	43.4
2	*6785.00	95.4 AV			1.66 H	24	52.0	43.4
3	#13570.00	62.9 PK	88.2	-25.3	1.94 H	314	40.9	22.0
4	#13570.00	49.1 AV	68.2	-19.1	1.94 H	314	27.1	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.4 PK			1.25 V	12	70.0	43.4
2	*6785.00	100.8 AV			1.25 V	12	57.4	43.4
3	#13570.00	63.3 PK	88.2	-24.9	1.74 V	259	41.3	22.0
4	#13570.00	49.4 AV	68.2	-18.8	1.74 V	259	27.4	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	108.2 PK			1.69 H	26	64.8	43.4
2	*6865.00	94.9 AV			1.69 H	26	51.5	43.4
3	#13730.00	63.6 PK	88.2	-24.6	1.97 H	318	40.9	22.7
4	#13730.00	49.7 AV	68.2	-18.5	1.97 H	318	27.0	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	112.8 PK			1.22 V	14	69.4	43.4
2	*6865.00	100.4 AV			1.22 V	14	57.0	43.4
3	#13730.00	63.9 PK	88.2	-24.3	1.70 V	253	41.2	22.7
4	#13730.00	50.0 AV	68.2	-18.2	1.70 V	253	27.3	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	109.3 PK			1.69 H	26	65.4	43.9
2	*6945.00	96.1 AV			1.69 H	26	52.2	43.9
3	#13890.00	64.1 PK	88.2	-24.1	1.93 H	304	41.0	23.1
4	#13890.00	50.2 AV	68.2	-18.0	1.93 H	304	27.1	23.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	112.9 PK			1.30 V	21	69.0	43.9
2	*6945.00	100.8 AV			1.30 V	21	56.9	43.9
3	#13890.00	64.5 PK	88.2	-23.7	1.70 V	254	41.4	23.1
4	#13890.00	50.5 AV	68.2	-17.7	1.70 V	254	27.4	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	105.7 PK			1.48 H	1	61.0	44.7
2	*7025.00	92.7 AV			1.48 H	1	48.0	44.7
3	#7125.00	60.8 PK	88.2	-27.4	1.48 H	1	47.1	13.7
4	#7125.00	44.7 AV	68.2	-23.5	1.48 H	1	31.0	13.7
5	#14050.00	64.7 PK	88.2	-23.5	1.95 H	316	41.2	23.5
6	#14050.00	50.8 AV	68.2	-17.4	1.95 H	316	27.3	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.6 PK			1.15 V	14	65.9	44.7
2	*7025.00	97.5 AV			1.15 V	14	52.8	44.7
3	#7125.00	61.7 PK	88.2	-26.5	1.15 V	14	48.0	13.7
4	#7125.00	44.9 AV	68.2	-23.3	1.15 V	14	31.2	13.7
5	#14050.00	65.1 PK	88.2	-23.1	1.73 V	251	41.6	23.5
6	#14050.00	51.0 AV	68.2	-17.2	1.73 V	251	27.5	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.4 PK	88.2	-39.8	1.82 H	36	37.9	10.5
2	#5925.00	34.8 AV	68.2	-33.4	1.82 H	36	24.3	10.5
3	*6185.00	104.5 PK			1.82 H	36	63.3	41.2
4	*6185.00	91.2 AV			1.82 H	36	50.0	41.2
5	12370.00	60.2 PK	74.0	-13.8	1.93 H	315	40.5	19.7
6	12370.00	46.3 AV	54.0	-7.7	1.93 H	315	26.6	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.9 PK	88.2	-39.3	1.19 V	14	38.4	10.5
2	#5925.00	35.0 AV	68.2	-33.2	1.19 V	14	24.5	10.5
3	*6185.00	110.8 PK			1.19 V	14	69.6	41.2
4	*6185.00	97.7 AV			1.19 V	14	56.5	41.2
5	12370.00	60.6 PK	74.0	-13.4	1.95 V	306	40.9	19.7
6	12370.00	46.7 AV	54.0	-7.3	1.95 V	306	27.0	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.6 PK			1.77 H	33	62.5	42.1
2	*6345.00	91.9 AV			1.77 H	33	49.8	42.1
3	12690.00	61.1 PK	74.0	-12.9	1.98 H	310	40.6	20.5
4	12690.00	47.3 AV	54.0	-6.7	1.98 H	310	26.8	20.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.4 PK			1.16 V	9	68.3	42.1
2	*6345.00	98.0 AV			1.16 V	9	55.9	42.1
3	12690.00	61.5 PK	74.0	-12.5	1.73 V	255	41.0	20.5
4	12690.00	47.7 AV	54.0	-6.3	1.73 V	255	27.2	20.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.3 PK			1.80 H	29	60.4	42.9
2	*6505.00	90.8 AV			1.80 H	29	47.9	42.9
3	#13010.00	61.8 PK	88.2	-26.4	1.96 H	304	40.9	20.9
4	#13010.00	47.8 AV	68.2	-20.4	1.96 H	304	26.9	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.5 PK			1.10 V	16	66.6	42.9
2	*6505.00	96.3 AV			1.10 V	16	53.4	42.9
3	#13010.00	62.2 PK	88.2	-26.0	1.75 V	249	41.3	20.9
4	#13010.00	48.2 AV	68.2	-20.0	1.75 V	249	27.3	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.6 PK			1.75 H	36	62.5	43.1
2	*6665.00	92.3 AV			1.75 H	36	49.2	43.1
3	13330.00	62.7 PK	74.0	-11.3	1.97 H	305	41.0	21.7
4	13330.00	48.7 AV	54.0	-5.3	1.97 H	305	27.0	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.4 PK			1.11 V	3	67.3	43.1
2	*6665.00	97.1 AV			1.11 V	3	54.0	43.1
3	13330.00	63.1 PK	74.0	-10.9	1.73 V	246	41.4	21.7
4	13330.00	49.1 AV	54.0	-4.9	1.73 V	246	27.4	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	106.4 PK			1.80 H	33	63.0	43.4
2	*6825.00	92.9 AV			1.80 H	33	49.5	43.4
3	#13650.00	63.6 PK	88.2	-24.6	1.94 H	301	41.2	22.4
4	#13650.00	49.6 AV	68.2	-18.6	1.94 H	301	27.2	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	111.3 PK			1.22 V	14	67.9	43.4
2	*6825.00	98.4 AV			1.22 V	14	55.0	43.4
3	#13650.00	63.9 PK	88.2	-24.3	1.76 V	254	41.5	22.4
4	#13650.00	49.8 AV	68.2	-18.4	1.76 V	254	27.4	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	105.3 PK			1.82 H	4	61.0	44.3
2	*6985.00	92.4 AV			1.82 H	4	48.1	44.3
3	#7125.00	77.2 PK	88.2	-11.0	1.82 H	4	63.5	13.7
4	#7125.00	61.2 AV	68.2	-7.0	1.82 H	4	47.5	13.7
5	#13970.00	64.6 PK	88.2	-23.6	1.90 H	304	41.2	23.4
6	#13970.00	50.6 AV	68.2	-17.6	1.90 H	304	27.2	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	109.5 PK			1.14 V	10	65.2	44.3
2	*6985.00	96.8 AV			1.14 V	10	52.5	44.3
3	#7125.00	84.9 PK	88.2	-3.3	1.14 V	10	71.2	13.7
4	#7125.00	66.5 AV	68.2	-1.7	1.14 V	10	52.8	13.7
5	#13970.00	65.0 PK	88.2	-23.2	1.71 V	253	41.6	23.4
6	#13970.00	50.9 AV	68.2	-17.3	1.71 V	253	27.5	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.1 PK	88.2	-40.1	1.73 H	15	37.6	10.5
2	#5925.00	34.5 AV	68.2	-33.7	1.73 H	15	24.0	10.5
3	*6265.00	105.2 PK			1.73 H	15	63.6	41.6
4	*6265.00	91.9 AV			1.73 H	15	50.3	41.6
5	12530.00	60.4 PK	74.0	-13.6	1.93 H	254	40.5	19.9
6	12530.00	46.7 AV	54.0	-7.3	1.93 H	254	26.8	19.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.7 PK	88.2	-39.5	1.19 V	6	38.2	10.5
2	#5925.00	35.0 AV	68.2	-33.2	1.19 V	6	24.5	10.5
3	*6265.00	110.2 PK			1.19 V	6	68.6	41.6
4	*6265.00	97.5 AV			1.19 V	6	55.9	41.6
5	12530.00	60.8 PK	74.0	-13.2	1.77 V	253	40.9	19.9
6	12530.00	47.0 AV	54.0	-7.0	1.77 V	253	27.1	19.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	104.3 PK			1.73 H	19	61.7	42.6
2	*6425.00	91.1 AV			1.73 H	19	48.5	42.6
3	#12850.00	61.6 PK	88.2	-26.6	1.93 H	299	40.7	20.9
4	#12850.00	47.8 AV	68.2	-20.4	1.93 H	299	26.9	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.0 PK			1.16 V	17	67.4	42.6
2	*6425.00	96.9 AV			1.16 V	17	54.3	42.6
3	#12850.00	61.9 PK	88.2	-26.3	1.73 V	232	41.0	20.9
4	#12850.00	48.1 AV	68.2	-20.1	1.73 V	232	27.2	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	104.2 PK			1.79 H	20	61.1	43.1
2	*6585.00	92.0 AV			1.79 H	20	48.9	43.1
3	#13170.00	62.0 PK	88.2	-26.2	1.92 H	303	40.9	21.1
4	#13170.00	48.2 AV	68.2	-20.0	1.92 H	303	27.1	21.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	110.9 PK			1.20 V	18	67.8	43.1
2	*6585.00	97.7 AV			1.20 V	18	54.6	43.1
3	#13170.00	62.1 PK	88.2	-26.1	1.72 V	256	41.0	21.1
4	#13170.00	48.5 AV	68.2	-19.7	1.72 V	256	27.4	21.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	104.0 PK			1.71 H	26	60.8	43.2
2	*6745.00	91.3 AV			1.71 H	26	48.1	43.2
3	#13490.00	62.9 PK	88.2	-25.3	1.96 H	360	40.9	22.0
4	#13490.00	49.0 AV	68.2	-19.2	1.96 H	360	27.0	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	110.2 PK			1.15 V	5	67.0	43.2
2	*6745.00	97.5 AV			1.15 V	5	54.3	43.2
3	#13490.00	63.2 PK	88.2	-25.0	1.76 V	251	41.2	22.0
4	#13490.00	49.3 AV	68.2	-18.9	1.76 V	251	27.3	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	103.2 PK			1.73 H	25	59.5	43.7
2	*6905.00	90.4 AV			1.73 H	25	46.7	43.7
3	#7125.00	72.2 PK	88.2	-16.0	1.73 H	25	58.5	13.7
4	#7125.00	62.1 AV	68.2	-6.1	1.73 H	25	48.4	13.7
5	7255.75	68.2 PK	74.0	-5.8	1.73 H	25	54.3	13.9
6	7255.75	49.3 AV	54.0	-4.7	1.73 H	25	35.4	13.9
7	#13810.00	64.0 PK	88.2	-24.2	1.90 H	308	41.2	22.8
8	#13810.00	49.9 AV	68.2	-18.3	1.90 H	308	27.1	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.4 PK			1.05 V	11	62.7	43.7
2	*6905.00	95.7 AV			1.05 V	11	52.0	43.7
3	#7125.00	78.2 PK	88.2	-10.0	1.05 V	11	64.5	13.7
4	#7125.00	66.8 AV	68.2	-1.4	1.05 V	11	53.1	13.7
5	7255.75	70.9 PK	74.0	-3.1	1.05 V	11	57.0	13.9
6	7255.75	53.6 AV	54.0	-0.4	1.05 V	11	39.7	13.9
7	#13810.00	64.3 PK	88.2	-23.9	1.70 V	274	41.5	22.8
8	#13810.00	50.2 AV	68.2	-18.0	1.70 V	274	27.4	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

2T2S

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	47.5 PK	88.2	-40.7	1.70 H	16	37.0	10.5
2	#5925.00	35.0 AV	68.2	-33.2	1.70 H	16	24.5	10.5
3	*6115.00	105.6 PK			1.70 H	16	64.4	41.2
4	*6115.00	94.2 AV			1.70 H	16	53.0	41.2
5	12230.00	60.0 PK	74.0	-14.0	1.95 H	312	40.5	19.5
6	12230.00	46.3 AV	54.0	-7.7	1.95 H	312	26.8	19.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.5 PK	88.2	-39.7	1.39 V	8	38.0	10.5
2	#5925.00	35.5 AV	68.2	-32.7	1.39 V	8	25.0	10.5
3	*6115.00	109.6 PK			1.39 V	8	68.4	41.2
4	*6115.00	98.0 AV			1.39 V	8	56.8	41.2
5	12230.00	60.3 PK	74.0	-13.7	1.74 V	254	40.8	19.5
6	12230.00	46.7 AV	54.0	-7.3	1.74 V	254	27.2	19.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	105.4 PK			1.72 H	12	64.0	41.4
2	*6255.00	93.9 AV			1.72 H	12	52.5	41.4
3	12510.00	59.9 PK	74.0	-14.1	1.97 H	312	40.1	19.8
4	12510.00	46.3 AV	54.0	-7.7	1.97 H	312	26.5	19.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	109.9 PK			1.22 V	13	68.5	41.4
2	*6255.00	97.4 AV			1.22 V	13	56.0	41.4
3	12510.00	62.6 PK	74.0	-11.4	1.72 V	256	42.8	19.8
4	12510.00	47.0 AV	54.0	-7.0	1.72 V	256	27.2	19.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	106.7 PK			1.82 H	16	64.1	42.6
2	*6415.00	95.6 AV			1.82 H	16	53.0	42.6
3	#12830.00	61.3 PK	88.2	-26.9	1.99 H	311	40.5	20.8
4	#12830.00	47.5 AV	68.2	-20.7	1.99 H	311	26.7	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	111.0 PK			1.32 V	15	68.4	42.6
2	*6415.00	99.6 AV			1.32 V	15	57.0	42.6
3	#12830.00	61.7 PK	88.2	-26.5	1.72 V	256	40.9	20.8
4	#12830.00	47.9 AV	68.2	-20.3	1.72 V	256	27.1	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	106.1 PK			1.95 H	22	63.5	42.6
2	*6435.00	95.1 AV			1.95 H	22	52.5	42.6
3	#12870.00	61.6 PK	88.2	-26.6	1.95 H	316	40.6	21.0
4	#12870.00	47.8 AV	68.2	-20.4	1.95 H	316	26.8	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	110.0 PK			1.11 V	17	67.4	42.6
2	*6435.00	98.2 AV			1.11 V	17	55.6	42.6
3	#12870.00	62.5 PK	88.2	-25.7	1.74 V	250	41.5	21.0
4	#12870.00	47.6 AV	68.2	-20.6	1.74 V	250	26.6	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	106.0 PK			1.95 H	29	63.2	42.8
2	*6475.00	95.3 AV			1.95 H	29	52.5	42.8
3	#12950.00	61.6 PK	88.2	-26.6	1.96 H	304	40.7	20.9
4	#12950.00	47.8 AV	68.2	-20.4	1.96 H	304	26.9	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.0 PK			1.13 V	17	67.2	42.8
2	*6475.00	98.7 AV			1.13 V	17	55.9	42.8
3	#12950.00	61.9 PK	88.2	-26.3	1.74 V	253	41.0	20.9
4	#12950.00	48.3 AV	68.2	-19.9	1.74 V	253	27.4	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.2 PK			2.01 H	16	64.2	43.0
2	*6515.00	96.0 AV			2.01 H	16	53.0	43.0
3	#13030.00	61.6 PK	88.2	-26.6	1.99 H	304	40.7	20.9
4	#13030.00	47.8 AV	68.2	-20.4	1.99 H	304	26.9	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	110.9 PK			1.25 V	9	67.9	43.0
2	*6515.00	99.5 AV			1.25 V	9	56.5	43.0
3	#13030.00	62.2 PK	88.2	-26.0	1.77 V	264	41.3	20.9
4	#13030.00	48.2 AV	68.2	-20.0	1.77 V	264	27.3	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	106.7 PK			1.95 H	29	63.5	43.2
2	*6535.00	95.5 AV			1.95 H	29	52.3	43.2
3	#13070.00	61.7 PK	88.2	-26.5	1.93 H	304	40.9	20.8
4	#13070.00	47.7 AV	68.2	-20.5	1.93 H	304	26.9	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.3 PK			1.16 V	14	67.1	43.2
2	*6535.00	99.4 AV			1.16 V	14	56.2	43.2
3	#13070.00	62.2 PK	88.2	-26.0	1.75 V	266	41.4	20.8
4	#13070.00	48.2 AV	68.2	-20.0	1.75 V	266	27.4	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.8 PK			1.98 H	36	63.7	43.1
2	*6695.00	95.7 AV			1.98 H	36	52.6	43.1
3	13390.00	62.9 PK	74.0	-11.1	1.99 H	305	40.9	22.0
4	13390.00	49.1 AV	54.0	-4.9	1.99 H	305	27.1	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.0 PK			1.09 V	21	67.9	43.1
2	*6695.00	99.9 AV			1.09 V	21	56.8	43.1
3	13390.00	63.4 PK	74.0	-10.6	1.70 V	253	41.4	22.0
4	13390.00	49.5 AV	54.0	-4.5	1.70 V	253	27.5	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.1 PK			1.93 H	18	63.8	43.3
2	*6855.00	95.5 AV			1.93 H	18	52.2	43.3
3	#13710.00	63.6 PK	88.2	-24.6	1.96 H	301	41.0	22.6
4	#13710.00	49.4 AV	68.2	-18.8	1.96 H	301	26.8	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.4 PK			1.23 V	15	67.1	43.3
2	*6855.00	99.1 AV			1.23 V	15	55.8	43.3
3	#13710.00	64.1 PK	88.2	-24.1	1.75 V	262	41.5	22.6
4	#13710.00	49.8 AV	68.2	-18.4	1.75 V	262	27.2	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.5 PK			1.91 H	28	64.0	43.5
2	*6875.00	96.0 AV			1.91 H	28	52.5	43.5
3	#13750.00	64.0 PK	88.2	-24.2	1.92 H	315	41.3	22.7
4	#13750.00	49.7 AV	68.2	-18.5	1.92 H	315	27.0	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	109.6 PK			1.23 V	4	66.1	43.5
2	*6875.00	98.5 AV			1.23 V	4	55.0	43.5
3	#13750.00	64.1 PK	88.2	-24.1	1.71 V	247	41.4	22.7
4	#13750.00	50.2 AV	68.2	-18.0	1.71 V	247	27.5	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.3 PK			2.00 H	29	62.8	44.5
2	*6995.00	95.6 AV			2.00 H	29	51.1	44.5
3	#13990.00	64.6 PK	88.2	-23.6	1.93 H	310	41.2	23.4
4	#13990.00	50.6 AV	68.2	-17.6	1.93 H	310	27.2	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	111.4 PK			1.06 V	16	66.9	44.5
2	*6995.00	100.1 AV			1.06 V	16	55.6	44.5
3	#13990.00	65.0 PK	88.2	-23.2	1.73 V	250	41.6	23.4
4	#13990.00	51.1 AV	68.2	-17.1	1.73 V	250	27.7	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	107.4 PK			2.03 H	79	62.3	45.1
2	*7095.00	96.2 AV			2.09 H	79	51.1	45.1
3	#14190.00	65.2 PK	88.2	-23.0	1.95 H	308	41.4	23.8
4	#14190.00	51.2 AV	68.2	-17.0	1.95 H	308	27.4	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	110.9 PK			1.22 V	18	65.8	45.1
2	*7095.00	100.0 AV			1.22 V	18	54.9	45.1
3	#14190.00	65.4 PK	88.2	-22.8	1.80 V	255	41.6	23.8
4	#14190.00	51.6 AV	68.2	-16.6	1.80 V	255	27.8	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	91.3 PK			1.90 H	11	46.2	45.1
2	*7115.00	78.9 AV			1.90 H	11	33.8	45.1
3	#7125.00	75.5 PK	88.2	-12.7	1.90 H	11	61.8	13.7
4	#7125.00	63.1 AV	68.2	-5.1	1.90 H	11	49.4	13.7
5	#14230.00	65.3 PK	88.2	-22.9	2.05 H	308	41.5	23.8
6	#14230.00	51.2 AV	68.2	-17.0	2.05 H	308	27.4	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.0 PK			1.37 V	14	49.9	45.1
2	*7115.00	82.9 AV			1.37 V	14	37.8	45.1
3	#7125.00	81.5 PK	88.2	-6.7	1.37 V	14	67.8	13.7
4	#7125.00	68.1 AV	68.2	-0.1	1.37 V	14	54.4	13.7
5	#14230.00	65.6 PK	88.2	-22.6	1.80 V	257	41.8	23.8
6	#14230.00	51.4 AV	68.2	-16.8	1.80 V	257	27.6	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.0 PK	88.2	-40.2	1.76 H	24	37.5	10.5
2	#5925.00	37.5 AV	68.2	-30.7	1.76 H	24	27.0	10.5
3	*6125.00	106.0 PK			1.76 H	24	64.8	41.2
4	*6125.00	93.6 AV			1.76 H	24	52.4	41.2
5	12250.00	60.0 PK	74.0	-14.0	1.89 H	312	40.4	19.6
6	12250.00	46.3 AV	54.0	-7.7	1.89 H	312	26.7	19.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.7 PK	88.2	-39.5	1.30 V	11	38.2	10.5
2	#5925.00	34.9 AV	68.2	-33.3	1.30 V	11	24.4	10.5
3	*6125.00	110.2 PK			1.30 V	11	69.0	41.2
4	*6125.00	97.7 AV			1.30 V	11	56.5	41.2
5	12250.00	60.4 PK	74.0	-13.6	1.73 V	251	40.8	19.6
6	12250.00	46.8 AV	54.0	-7.2	1.73 V	251	27.2	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	105.9 PK			1.78 H	25	64.5	41.4
2	*6245.00	94.4 AV			1.78 H	25	53.0	41.4
3	12490.00	60.3 PK	74.0	-13.7	1.82 H	315	40.5	19.8
4	12490.00	46.6 AV	54.0	-7.4	1.82 H	315	26.8	19.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	110.0 PK			1.36 V	15	68.6	41.4
2	*6245.00	97.6 AV			1.36 V	15	56.2	41.4
3	12490.00	60.9 PK	74.0	-13.1	1.75 V	256	41.1	19.8
4	12490.00	47.1 AV	54.0	-6.9	1.75 V	256	27.3	19.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	106.8 PK			1.89 H	30	64.4	42.4
2	*6405.00	94.5 AV			1.89 H	34	52.1	42.4
3	#12810.00	61.2 PK	88.2	-27.0	1.96 H	305	40.5	20.7
4	#12810.00	47.2 AV	68.2	-21.0	1.96 H	305	26.5	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	111.3 PK			1.36 V	15	68.9	42.4
2	*6405.00	98.7 AV			1.36 V	15	56.3	42.4
3	#12810.00	61.5 PK	88.2	-26.7	1.88 V	252	40.8	20.7
4	#12810.00	47.9 AV	68.2	-20.3	1.88 V	252	27.2	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	107.2 PK			1.93 H	26	64.5	42.7
2	*6445.00	95.2 AV			1.93 H	26	52.5	42.7
3	#12890.00	61.7 PK	88.2	-26.5	1.92 H	310	40.7	21.0
4	#12890.00	47.6 AV	68.2	-20.6	1.92 H	310	26.6	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	111.0 PK			1.32 V	15	68.3	42.7
2	*6445.00	97.8 AV			1.32 V	15	55.1	42.7
3	#12890.00	62.0 PK	88.2	-26.2	1.70 V	245	41.0	21.0
4	#12890.00	48.0 AV	68.2	-20.2	1.70 V	245	27.0	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	106.1 PK			1.74 H	59	63.3	42.8
2	*6485.00	93.9 AV			1.74 H	59	51.1	42.8
3	#12970.00	61.7 PK	88.2	-26.5	1.97 H	301	40.8	20.9
4	#12970.00	47.6 AV	68.2	-20.6	1.97 H	301	26.7	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.8 PK			1.30 V	7	68.0	42.8
2	*6485.00	97.5 AV			1.30 V	7	54.7	42.8
3	#12970.00	62.2 PK	88.2	-26.0	1.62 V	251	41.3	20.9
4	#12970.00	48.1 AV	68.2	-20.1	1.62 V	251	27.2	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	106.2 PK			1.89 H	63	63.0	43.2
2	*6525.00	93.7 AV			1.89 H	63	50.5	43.2
3	#13050.00	61.7 PK	88.2	-26.5	1.99 H	320	40.8	20.9
4	#13050.00	47.8 AV	68.2	-20.4	1.99 H	320	26.9	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	110.0 PK			1.09 V	29	66.8	43.2
2	*6525.00	97.2 AV			1.09 V	29	54.0	43.2
3	#13050.00	62.1 PK	88.2	-26.1	1.76 V	262	41.2	20.9
4	#13050.00	48.2 AV	68.2	-20.0	1.76 V	262	27.3	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	106.1 PK			1.76 H	71	62.9	43.2
2	*6565.00	94.4 AV			1.76 H	71	51.2	43.2
3	#13130.00	61.7 PK	88.2	-26.5	1.95 H	306	40.7	21.0
4	#13130.00	47.5 AV	68.2	-20.7	1.95 H	306	26.5	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.2 PK			1.19 V	12	67.0	43.2
2	*6565.00	97.5 AV			1.19 V	12	54.3	43.2
3	#13130.00	62.1 PK	88.2	-26.1	1.72 V	261	41.1	21.0
4	#13130.00	48.3 AV	68.2	-19.9	1.72 V	261	27.3	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	105.7 PK			1.82 H	95	62.5	43.2
2	*6725.00	94.0 AV			1.82 H	95	50.8	43.2
3	#13450.00	62.9 PK	88.2	-25.3	1.92 H	310	41.0	21.9
4	#13450.00	48.6 AV	68.2	-19.6	1.92 H	310	26.7	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	109.6 PK			1.32 V	5	66.4	43.2
2	*6725.00	96.8 AV			1.32 V	5	53.6	43.2
3	#13450.00	63.3 PK	88.2	-24.9	1.68 V	261	41.4	21.9
4	#13450.00	48.9 AV	68.2	-19.3	1.68 V	261	27.0	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	105.6 PK			1.78 H	87	62.3	43.3
2	*6845.00	93.4 AV			1.78 H	87	50.1	43.3
3	#13690.00	63.6 PK	88.2	-24.6	1.99 H	308	41.0	22.6
4	#13690.00	49.7 AV	68.2	-18.5	1.99 H	308	27.1	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	109.9 PK			1.21 V	17	66.6	43.3
2	*6845.00	97.1 AV			1.21 V	17	53.8	43.3
3	#13690.00	64.0 PK	88.2	-24.2	1.73 V	253	41.4	22.6
4	#13690.00	49.9 AV	68.2	-18.3	1.73 V	253	27.3	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	105.5 PK			1.80 H	92	62.0	43.5
2	*6885.00	93.8 AV			1.80 H	92	50.3	43.5
3	#13770.00	63.8 PK	88.2	-24.4	1.92 H	313	41.1	22.7
4	#13770.00	50.0 AV	68.2	-18.2	1.99 H	308	27.3	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	107.6 PK			1.17 V	10	64.1	43.5
2	*6885.00	97.5 AV			1.17 V	10	54.0	43.5
3	#13770.00	64.2 PK	88.2	-24.0	1.72 V	258	41.5	22.7
4	#13770.00	50.3 AV	68.2	-17.9	1.72 V	258	27.6	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	105.8 PK			1.90 H	95	61.1	44.7
2	*7005.00	95.0 AV			1.90 H	95	50.3	44.7
3	#14010.00	64.5 PK	88.2	-23.7	1.94 H	306	41.1	23.4
4	#14010.00	50.8 AV	68.2	-17.4	1.94 H	306	27.4	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	108.9 PK			1.15 V	16	64.2	44.7
2	*7005.00	97.9 AV			1.15 V	16	53.2	44.7
3	#14010.00	64.9 PK	88.2	-23.3	1.76 V	255	41.5	23.4
4	#14010.00	51.1 AV	68.2	-17.1	1.76 V	255	27.7	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	106.5 PK			1.93 H	98	61.5	45.0
2	*7085.00	94.3 AV			1.93 H	98	49.3	45.0
3	#7125.00	60.7 PK	88.2	-27.5	1.93 H	98	47.0	13.7
4	#7125.00	47.7 AV	68.2	-20.5	1.93 H	98	34.0	13.7
5	#14170.00	64.9 PK	88.2	-23.3	1.98 H	306	41.1	23.8
6	#14170.00	50.8 AV	68.2	-17.4	1.98 H	306	27.0	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	110.7 PK			1.20 V	17	65.7	45.0
2	*7085.00	98.1 AV			1.20 V	17	53.1	45.0
3	#7125.00	65.9 PK	88.2	-22.3	1.20 V	17	52.2	13.7
4	#7125.00	51.9 AV	68.2	-16.3	1.20 V	17	38.2	13.7
5	#14170.00	65.3 PK	88.2	-22.9	1.72 V	256	41.5	23.8
6	#14170.00	51.3 AV	68.2	-16.9	1.72 V	256	27.5	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.3 PK	88.2	-39.9	1.76 H	18	37.8	10.5
2	#5925.00	34.5 AV	68.2	-33.7	1.76 H	18	24.0	10.5
3	*6145.00	105.2 PK			1.76 H	18	64.0	41.2
4	*6145.00	93.4 AV			1.76 H	18	52.2	41.2
5	12290.00	60.3 PK	74.0	-13.7	1.98 H	309	40.5	19.8
6	12290.00	46.4 AV	54.0	-7.6	1.98 H	309	26.6	19.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.2 PK	88.2	-9.0	1.20 V	23	38.5	40.7
2	#5925.00	65.2 AV	68.2	-3.0	1.20 V	23	24.5	40.7
3	*6145.00	109.8 PK			1.20 V	23	68.6	41.2
4	*6145.00	98.1 AV			1.20 V	23	56.9	41.2
5	12290.00	60.6 PK	74.0	-13.4	1.71 V	256	40.8	19.8
6	12290.00	46.9 AV	54.0	-7.1	1.71 V	256	27.1	19.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	105.1 PK			1.78 H	18	63.8	41.3
2	*6225.00	93.4 AV			1.78 H	18	52.1	41.3
3	12450.00	59.9 PK	74.0	-14.1	1.99 H	301	40.2	19.7
4	12450.00	46.2 AV	54.0	-7.8	1.99 H	301	26.5	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.0 PK			1.20 V	28	68.7	41.3
2	*6225.00	98.1 AV			1.20 V	28	56.8	41.3
3	12450.00	60.5 PK	74.0	-13.5	1.72 V	269	40.8	19.7
4	12450.00	46.7 AV	54.0	-7.3	1.72 V	269	27.0	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	106.6 PK			1.63 H	16	64.3	42.3
2	*6385.00	94.6 AV			1.63 H	16	52.3	42.3
3	#12770.00	61.2 PK	88.2	-27.0	1.95 H	312	40.5	20.7
4	#12770.00	47.7 AV	68.2	-20.5	1.95 H	312	27.0	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.1 PK			1.22 V	29	68.8	42.3
2	*6385.00	99.4 AV			1.22 V	29	57.1	42.3
3	#12770.00	61.7 PK	88.2	-26.5	1.74 V	268	41.0	20.7
4	#12770.00	47.9 AV	68.2	-20.3	1.74 V	265	27.2	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	104.8 PK			1.66 H	7	62.0	42.8
2	*6465.00	92.0 AV			1.66 H	7	49.2	42.8
3	#12930.00	61.9 PK	88.2	-26.3	1.95 H	300	40.9	21.0
4	#12930.00	47.6 AV	68.2	-20.6	1.95 H	300	26.6	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	111.0 PK			1.22 V	16	68.2	42.8
2	*6465.00	97.8 AV			1.22 V	16	55.0	42.8
3	#12930.00	62.0 PK	88.2	-26.2	1.72 V	254	41.0	21.0
4	#12930.00	48.2 AV	68.2	-20.0	1.72 V	254	27.2	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	105.5 PK			1.59 H	11	62.2	43.3
2	*6545.00	93.3 AV			1.59 H	11	50.0	43.3
3	#13090.00	61.0 PK	88.2	-27.2	1.92 H	317	40.1	20.9
4	#13090.00	47.5 AV	68.2	-20.7	1.92 H	317	26.6	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	110.8 PK			1.62 V	21	67.5	43.3
2	*6545.00	99.5 AV			1.62 V	21	56.2	43.3
3	#13090.00	61.7 PK	88.2	-26.5	1.74 V	262	40.8	20.9
4	#13090.00	47.9 AV	68.2	-20.3	1.74 V	262	27.0	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	106.9 PK			1.62 H	25	63.9	43.0
2	*6625.00	94.2 AV			1.62 H	25	51.2	43.0
3	13250.00	62.1 PK	74.0	-11.9	1.95 H	311	40.7	21.4
4	13250.00	48.2 AV	54.0	-5.8	1.95 H	311	26.8	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	111.6 PK			1.13 V	19	68.6	43.0
2	*6625.00	98.5 AV			1.13 V	19	55.5	43.0
3	13250.00	62.4 PK	74.0	-11.6	1.78 V	256	41.0	21.4
4	13250.00	48.5 AV	54.0	-5.5	1.78 V	256	27.1	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	108.2 PK			1.63 H	17	65.0	43.2
2	*6705.00	95.4 AV			1.63 H	17	52.2	43.2
3	#13410.00	62.7 PK	88.2	-25.5	1.99 H	302	40.7	22.0
4	#13410.00	48.9 AV	68.2	-19.3	1.99 H	302	26.9	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.4 PK			1.23 V	17	68.2	43.2
2	*6705.00	100.0 AV			1.23 V	17	56.8	43.2
3	#13410.00	63.1 PK	88.2	-25.1	1.65 V	266	41.1	22.0
4	#13410.00	49.2 AV	68.2	-19.0	1.65 V	266	27.2	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	106.9 PK			1.63 H	25	63.5	43.4
2	*6785.00	94.5 AV			1.63 H	25	51.1	43.4
3	#13570.00	62.9 PK	88.2	-25.3	1.90 H	311	40.9	22.0
4	#13570.00	48.9 AV	68.2	-19.3	1.90 H	311	26.9	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.2 PK			1.29 V	19	69.8	43.4
2	*6785.00	100.4 AV			1.29 V	19	57.0	43.4
3	#13570.00	63.0 PK	88.2	-25.2	1.75 V	260	41.0	22.0
4	#13570.00	49.2 AV	68.2	-19.0	1.75 V	260	27.2	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.3 PK			1.66 H	37	63.9	43.4
2	*6865.00	94.4 AV			1.66 H	37	51.0	43.4
3	#13730.00	63.5 PK	88.2	-24.7	1.96 H	306	40.8	22.7
4	#13730.00	49.7 AV	68.2	-18.5	1.96 H	306	27.0	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	112.4 PK			1.17 V	18	69.0	43.4
2	*6865.00	102.0 AV			1.17 V	18	58.6	43.4
3	#13730.00	64.0 PK	88.2	-24.2	1.74 V	250	41.3	22.7
4	#13730.00	50.0 AV	68.2	-18.2	1.74 V	250	27.3	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	106.1 PK			1.70 H	6	62.2	43.9
2	*6945.00	94.2 AV			1.70 H	6	50.3	43.9
3	#13890.00	64.1 PK	88.2	-24.1	1.98 H	310	41.0	23.1
4	#13890.00	50.0 AV	68.2	-18.2	1.98 H	310	26.9	23.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	112.3 PK			1.22 V	19	68.4	43.9
2	*6945.00	100.4 AV			1.22 V	19	56.5	43.9
3	#13890.00	64.4 PK	88.2	-23.8	1.75 V	250	41.3	23.1
4	#13890.00	50.3 AV	68.2	-17.9	1.75 V	250	27.2	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	107.7 PK			2.04 H	96	63.0	44.7
2	*7025.00	94.7 AV			2.04 H	96	50.0	44.7
3	#7125.00	66.2 PK	88.2	-22.0	2.04 H	96	52.5	13.7
4	#7125.00	51.5 AV	68.2	-16.7	2.04 H	96	37.8	13.7
5	#14050.00	64.4 PK	88.2	-23.8	1.72 H	251	40.9	23.5
6	#14050.00	50.5 AV	68.2	-17.7	1.72 H	251	27.0	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.8 PK			1.12 V	19	67.1	44.7
2	*7025.00	99.1 AV			1.12 V	19	54.4	44.7
3	#7125.00	76.3 PK	88.2	-11.9	1.12 V	19	62.6	13.7
4	#7125.00	60.6 AV	68.2	-7.6	1.12 V	19	46.9	13.7
5	#14050.00	65.0 PK	88.2	-23.2	1.70 V	256	41.5	23.5
6	#14050.00	51.0 AV	68.2	-17.2	1.70 V	256	27.5	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.1 PK	88.2	-40.1	1.81 H	12	37.6	10.5
2	#5925.00	34.5 AV	68.2	-33.7	1.81 H	12	24.0	10.5
3	*6185.00	105.0 PK			1.81 H	12	63.8	41.2
4	*6185.00	94.1 AV			1.81 H	12	52.9	41.2
5	12370.00	60.3 PK	74.0	-13.7	1.96 H	302	40.6	19.7
6	12370.00	46.2 AV	54.0	-7.8	1.96 H	302	26.5	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.9 PK	88.2	-39.3	1.21 V	17	38.4	10.5
2	#5925.00	35.0 AV	68.2	-33.2	1.21 V	17	24.5	10.5
3	*6185.00	111.1 PK			1.21 V	17	69.9	41.2
4	*6185.00	98.6 AV			1.21 V	17	57.4	41.2
5	12370.00	60.6 PK	74.0	-13.4	1.75 V	272	40.9	19.7
6	12370.00	46.7 AV	54.0	-7.3	1.75 V	272	27.0	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.3 PK			1.75 H	11	63.2	42.1
2	*6345.00	93.9 AV			1.75 H	11	51.8	42.1
3	12690.00	61.3 PK	74.0	-12.7	1.96 H	307	40.8	20.5
4	12690.00	47.3 AV	54.0	-6.7	1.96 H	307	26.8	20.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.1 PK			1.25 V	19	69.0	42.1
2	*6345.00	98.7 AV			1.25 V	19	56.6	42.1
3	12690.00	61.5 PK	74.0	-12.5	1.77 V	250	41.0	20.5
4	12690.00	47.7 AV	54.0	-6.3	1.77 V	250	27.2	20.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.9 PK			1.88 H	2	63.0	42.9
2	*6505.00	93.2 AV			1.88 H	2	50.3	42.9
3	#13010.00	61.8 PK	88.2	-26.4	1.90 H	300	40.9	20.9
4	#13010.00	47.8 AV	68.2	-20.4	1.90 H	300	26.9	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.7 PK			1.17 V	15	67.8	42.9
2	*6505.00	98.8 AV			1.17 V	15	55.9	42.9
3	#13010.00	62.2 PK	88.2	-26.0	1.79 V	253	41.3	20.9
4	#13010.00	48.1 AV	68.2	-20.1	1.79 V	253	27.2	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.0 PK			1.78 H	9	61.9	43.1
2	*6665.00	94.1 AV			1.78 H	9	51.0	43.1
3	13330.00	62.7 PK	74.0	-11.3	1.95 H	301	41.0	21.7
4	13330.00	48.7 AV	54.0	-5.3	1.95 H	301	27.0	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	111.1 PK			1.20 V	19	68.0	43.1
2	*6665.00	99.3 AV			1.20 V	19	56.2	43.1
3	13330.00	62.9 PK	74.0	-11.1	1.77 V	256	41.2	21.7
4	13330.00	49.0 AV	54.0	-5.0	1.77 V	256	27.3	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	106.9 PK			1.80 H	35	63.5	43.4
2	*6825.00	94.0 AV			1.80 H	35	50.6	43.4
3	#13650.00	63.5 PK	88.2	-24.7	1.90 H	310	41.1	22.4
4	#13650.00	49.5 AV	68.2	-18.7	1.90 H	310	27.1	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	111.4 PK			1.20 V	18	68.0	43.4
2	*6825.00	99.5 AV			1.20 V	18	56.1	43.4
3	#13650.00	63.7 PK	88.2	-24.5	1.77 V	250	41.3	22.4
4	#13650.00	49.7 AV	68.2	-18.5	1.77 V	250	27.3	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	104.4 PK			2.07 H	99	60.1	44.3
2	*6985.00	92.1 AV			2.07 H	99	47.8	44.3
3	#7125.00	73.9 PK	88.2	-14.3	2.07 H	99	60.2	13.7
4	#7125.00	56.7 AV	68.2	-11.5	2.07 H	99	43.0	13.7
5	#13970.00	64.6 PK	88.2	-23.6	1.96 H	301	41.2	23.4
6	#13970.00	50.5 AV	68.2	-17.7	1.96 H	301	27.1	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	108.7 PK			1.46 V	19	64.4	44.3
2	*6985.00	96.9 AV			1.46 V	19	52.6	44.3
3	#7125.00	83.7 PK	88.2	-4.5	1.46 V	19	70.0	13.7
4	#7125.00	68.0 AV	68.2	-0.2	1.46 V	19	54.3	13.7
5	#13970.00	65.0 PK	88.2	-23.2	1.74 V	256	41.6	23.4
6	#13970.00	50.9 AV	68.2	-17.3	1.74 V	256	27.5	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.4 PK	88.2	-39.8	1.76 H	13	37.9	10.5
2	#5925.00	35.3 AV	68.2	-32.9	1.76 H	13	24.8	10.5
3	*6265.00	103.6 PK			1.76 H	16	62.0	41.6
4	*6265.00	91.1 AV			1.76 H	16	49.5	41.6
5	12350.00	60.3 PK	74.0	-13.7	1.97 H	308	40.6	19.7
6	12350.00	46.2 AV	54.0	-7.8	1.97 H	308	26.5	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.0 PK	88.2	-39.2	1.46 V	16	38.5	10.5
2	#5925.00	35.5 AV	68.2	-32.7	1.46 V	16	25.0	10.5
3	*6265.00	107.9 PK			1.46 V	16	66.3	41.6
4	*6265.00	96.0 AV			1.46 V	16	54.4	41.6
5	12350.00	60.7 PK	74.0	-13.3	1.77 V	252	41.0	19.7
6	12350.00	46.8 AV	54.0	-7.2	1.77 V	252	27.1	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	104.9 PK			1.75 H	22	62.3	42.6
2	*6425.00	92.2 AV			1.75 H	22	49.6	42.6
3	#12850.00	61.7 PK	88.2	-26.5	1.92 H	308	40.8	20.9
4	#12850.00	47.6 AV	68.2	-20.6	1.92 H	308	26.7	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.5 PK			1.17 V	18	67.9	42.6
2	*6425.00	98.1 AV			1.17 V	18	55.5	42.6
3	#12850.00	61.9 PK	88.2	-26.3	1.72 V	262	41.0	20.9
4	#12850.00	47.9 AV	68.2	-20.3	1.72 V	262	27.0	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	105.1 PK			1.83 H	26	62.0	43.1
2	*6585.00	93.2 AV			1.83 H	26	50.1	43.1
3	#13170.00	62.0 PK	88.2	-26.2	1.93 H	308	40.9	21.1
4	#13170.00	48.1 AV	68.2	-20.1	1.93 H	308	27.0	21.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	111.2 PK			1.22 V	8	68.1	43.1
2	*6585.00	99.1 AV			1.22 V	8	56.0	43.1
3	#13170.00	62.3 PK	88.2	-25.9	1.75 V	263	41.2	21.1
4	#13170.00	48.3 AV	68.2	-19.9	1.75 V	263	27.2	21.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	105.1 PK			1.70 H	25	61.9	43.2
2	*6745.00	93.2 AV			1.70 H	25	50.0	43.2
3	#13490.00	63.1 PK	88.2	-25.1	1.97 H	312	41.1	22.0
4	#13490.00	49.0 AV	68.2	-19.2	1.97 H	312	27.0	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	111.4 PK			1.13 V	6	68.2	43.2
2	*6745.00	99.8 AV			1.13 V	6	56.6	43.2
3	#13490.00	63.3 PK	88.2	-24.9	1.70 V	257	41.3	22.0
4	#13490.00	49.3 AV	68.2	-18.9	1.70 V	257	27.3	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	100.7 PK			2.33 H	98	57.0	43.7
2	*6905.00	87.2 AV			2.33 H	98	43.5	43.7
3	#7125.00	65.5 PK	88.2	-22.7	2.33 H	98	51.8	13.7
4	#7125.00	48.5 AV	68.2	-19.7	2.33 H	98	34.8	13.7
5	7250.00	57.0 PK	74.0	-17.0	2.33 H	98	43.1	13.9
6	7250.00	44.4 AV	54.0	-9.6	2.33 H	98	30.5	13.9
7	#13810.00	63.9 PK	88.2	-24.3	1.92 H	308	41.1	22.8
8	#13810.00	49.8 AV	68.2	-18.4	1.92 H	308	27.0	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	105.1 PK			1.34 V	20	61.4	43.7
2	*6905.00	91.7 AV			1.34 V	20	48.0	43.7
3	#7125.00	72.1 PK	88.2	-16.1	1.34 V	20	58.4	13.7
4	#7125.00	56.7 AV	68.2	-11.5	1.34 V	20	43.0	13.7
5	7250.00	66.4 PK	74.0	-7.6	1.34 V	20	52.5	13.9
6	7250.00	53.9 AV	54.0	-0.1	1.34 V	20	40.0	13.9
7	#13810.00	64.3 PK	88.2	-23.9	1.70 V	275	41.5	22.8
8	#13810.00	50.3 AV	68.2	-17.9	1.70 V	275	27.5	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge

CDD

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

