



Plots of EUT Tx waveform

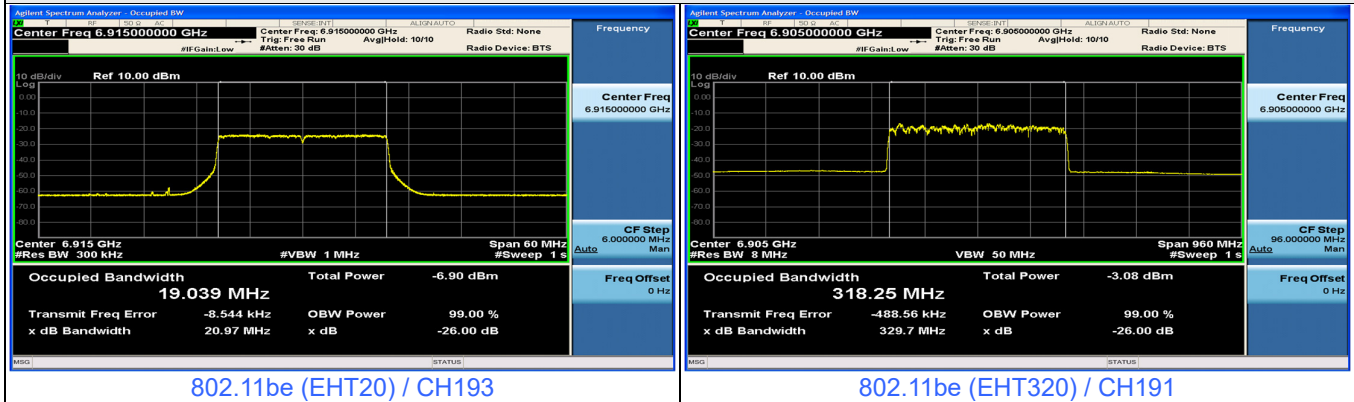


Plots of Injected signal (AWGN) level

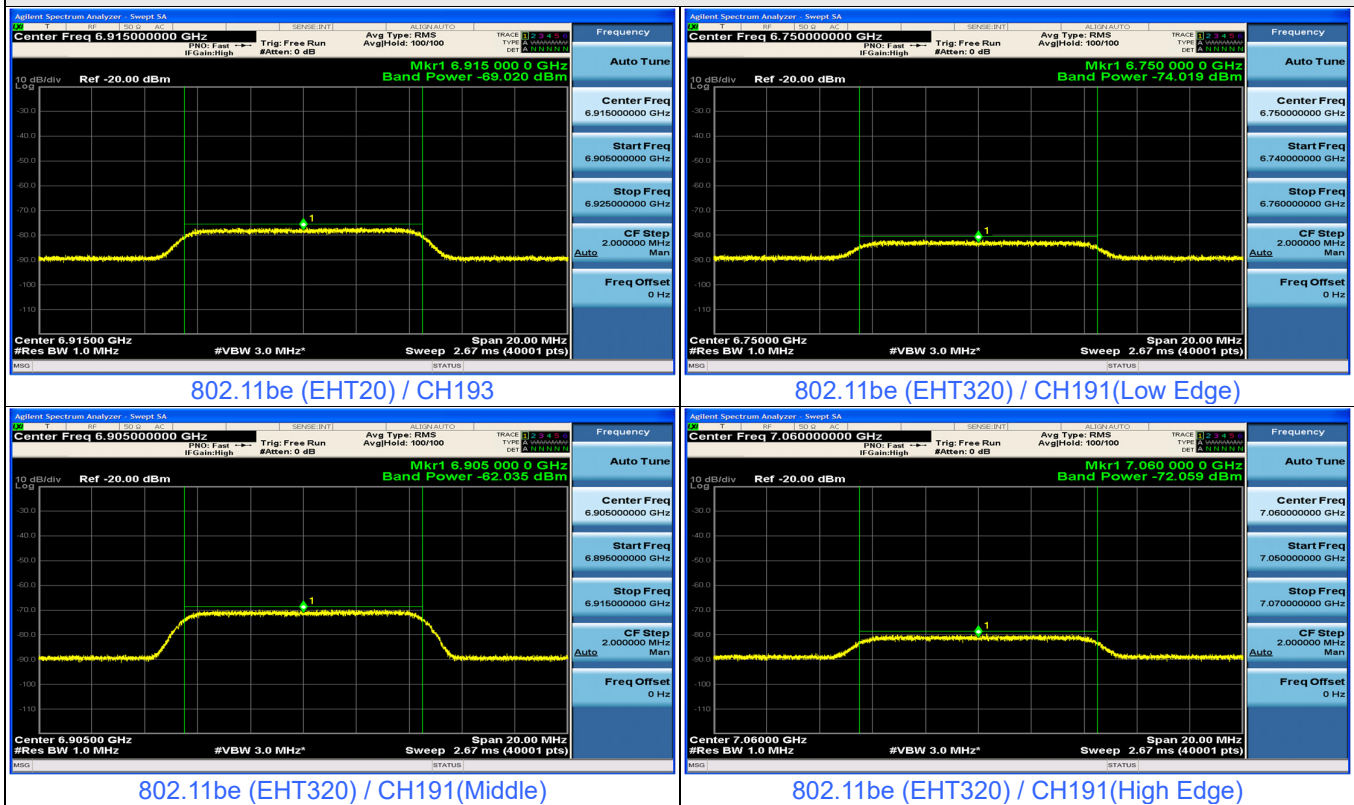


Plots of EUT ceased transmission in the time domain

CBP

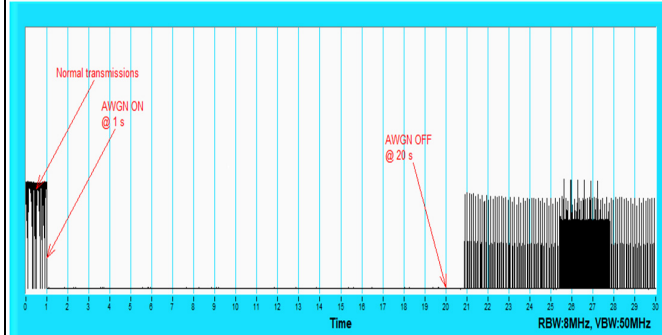


802.11be (EHT20) / CH193

CBP

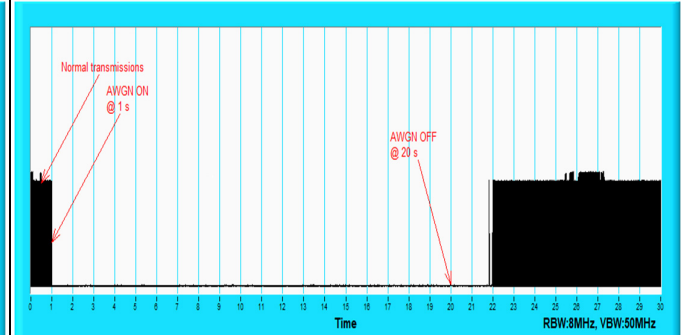


802.11be (EHT320) / CH191(Low Edge)

CBP

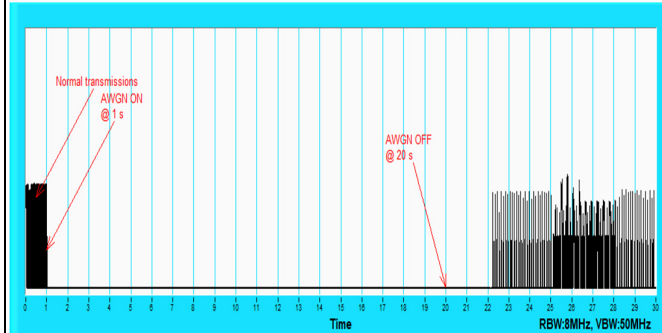

802.11be (EHT320) / CH191(Middle)

CBP

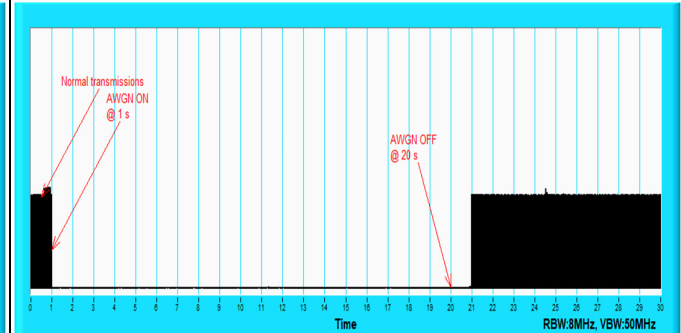

802.11be (EHT320) / CH191(High Edge)

For Verify bandwidth reduction


Plots of EUT ceased transmission in the frequency domain



802.11be (EHT320) / CH191(Low Edge)

A 10 MHz AWGN signal (centered at 6750 MHz) is injected.


The channel reduces to a 160 MHz channel centered around 6985 MHz.

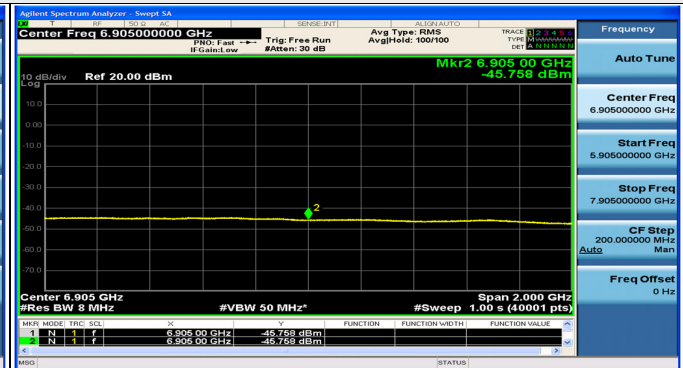

802.11be (EHT320) / CH191(Middle)

A 10 MHz AWGN signal (centered at 6905 MHz) is injected.

The channel completely ceases operation.

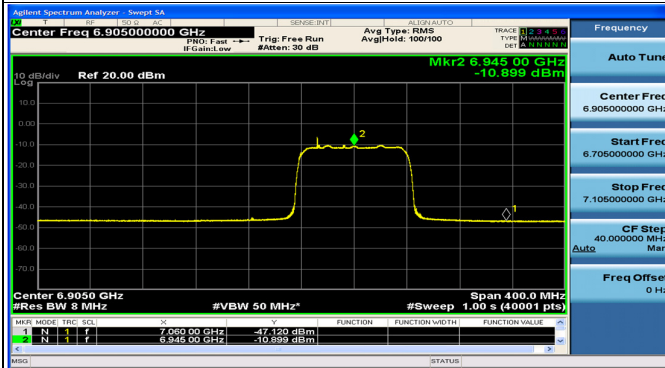

802.11be (EHT320) / CH191(High Edge)

A 10 MHz AWGN signal (centered at 7060 MHz) is injected.

The channel reduces to a 80 MHz channel centered around 6945 MHz.


7.7 AC Power Conducted Emissions

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18910	9.76	29.52	18.18	39.28	27.94	64.08	54.08	-24.80	-26.14
2	0.23586	9.76	29.04	19.50	38.80	29.26	62.24	52.24	-23.44	-22.98
3	0.26836	9.77	25.29	17.64	35.06	27.41	61.17	51.17	-26.11	-23.76
4	0.44273	9.78	20.26	14.65	30.04	24.43	57.01	47.01	-26.97	-22.58
5	0.67003	9.79	24.88	20.71	34.67	30.50	56.00	46.00	-21.33	-15.50
6	1.21505	9.83	20.22	16.67	30.05	26.50	56.00	46.00	-25.95	-19.50

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

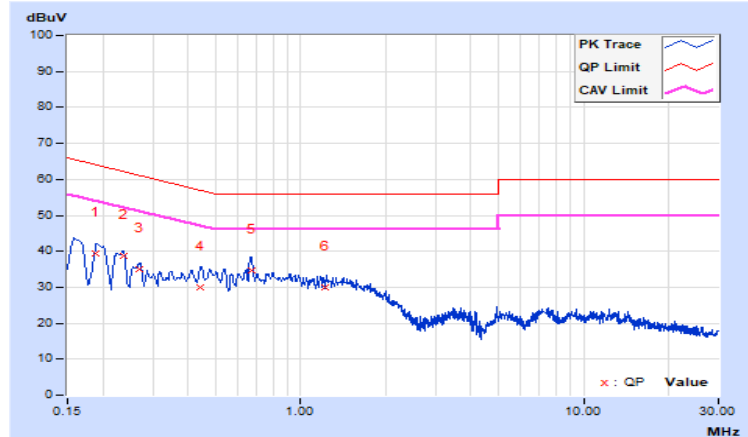


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16096	9.78	30.04	16.59	39.82	26.37	65.41	55.41	-25.59	-29.04
2	0.19301	9.76	26.06	13.47	35.82	23.23	63.91	53.91	-28.09	-30.68
3	0.25557	9.77	17.30	8.16	27.07	17.93	61.57	51.57	-34.50	-33.64
4	0.51313	9.79	16.44	12.17	26.23	21.96	56.00	46.00	-29.77	-24.04
5	0.64657	9.79	19.53	16.51	29.32	26.30	56.00	46.00	-26.68	-19.70
6	1.38318	9.82	19.86	15.96	29.68	25.78	56.00	46.00	-26.32	-20.22

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

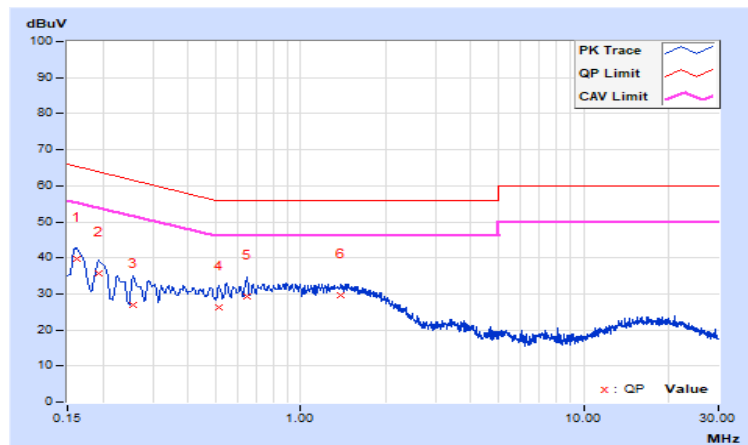

7.8 Unwanted Emissions below 1 GHz


Mode A

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	46.87	22.7 QP	40.0	-17.3	1.50 H	238	31.6	-8.9
2	186.04	23.8 QP	43.5	-19.7	1.00 H	294	34.4	-10.6
3	285.86	26.4 QP	46.0	-19.6	2.00 H	176	34.2	-7.8
4	597.94	28.2 QP	46.0	-17.8	1.00 H	344	29.4	-1.2
5	621.84	28.9 QP	46.0	-17.1	1.00 H	192	29.3	-0.4
6	759.61	33.4 QP	46.0	-12.6	1.50 H	342	30.8	2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

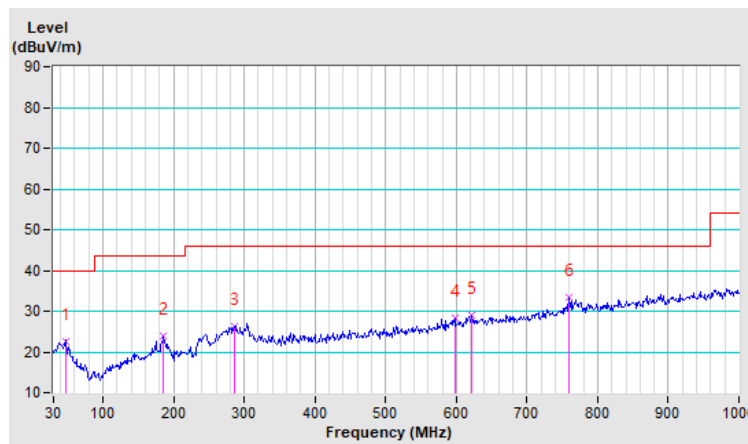


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	27.2 QP	40.0	-12.8	1.50 V	230	37.5	-10.3
2	52.49	27.4 QP	40.0	-12.6	1.00 V	356	36.1	-8.7
3	152.30	20.3 QP	43.5	-23.2	1.00 V	242	28.9	-8.6
4	299.91	23.2 QP	46.0	-22.8	1.00 V	7	30.6	-7.4
5	467.20	25.5 QP	46.0	-20.5	2.00 V	222	29.6	-4.1
6	761.01	32.6 QP	46.0	-13.4	1.00 V	316	30.0	2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

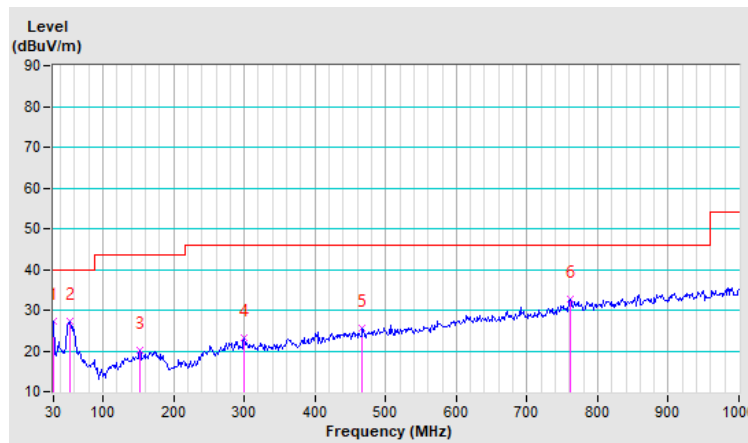


Mode B

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.03	22.0 QP	40.0	-18.0	1.00 H	303	31.7	-9.7
2	186.04	23.8 QP	43.5	-19.7	1.00 H	294	34.4	-10.6
3	304.13	26.8 QP	46.0	-19.2	1.00 H	181	34.0	-7.2
4	759.61	33.4 QP	46.0	-12.6	1.50 H	342	30.8	2.6
5	869.26	33.7 QP	46.0	-12.3	1.00 H	229	29.1	4.6
6	981.72	35.5 QP	54.0	-18.5	1.00 H	42	28.9	6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

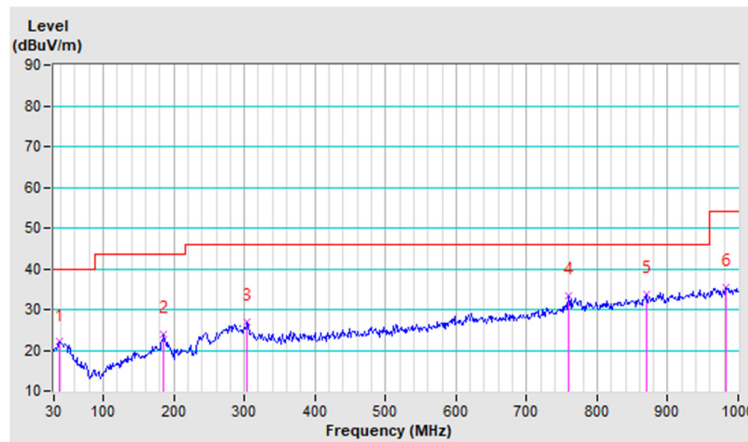


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	27.1 QP	40.0	-12.9	1.50 V	229	37.4	-10.3
2	52.49	27.3 QP	40.0	-12.7	1.00 V	359	36.0	-8.7
3	403.94	24.6 QP	46.0	-21.4	1.00 V	19	30.1	-5.5
4	690.72	30.5 QP	46.0	-15.5	1.00 V	7	29.7	0.8
5	858.01	33.7 QP	46.0	-12.3	1.00 V	178	29.3	4.4
6	990.16	35.4 QP	54.0	-18.6	1.00 V	239	28.6	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

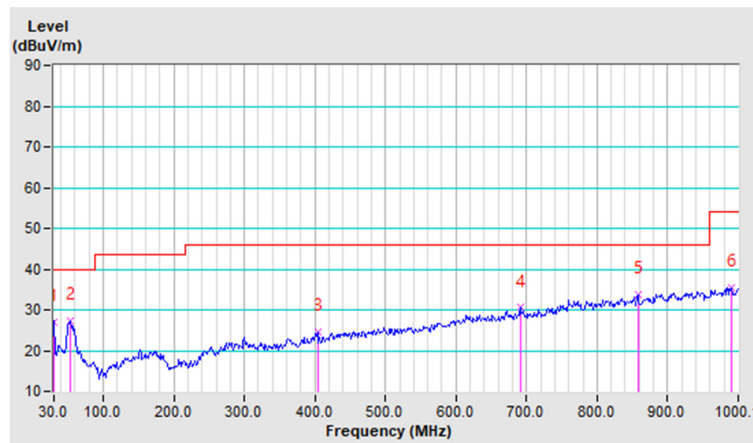

7.9 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.6 PK	88.2	-36.6	1.77 H	208	41.1	10.5
2	#5925.00	38.1 AV	68.2	-30.1	1.77 H	208	27.6	10.5
3	*5955.00	97.0 PK			1.77 H	208	56.2	40.8
4	*5955.00	87.1 AV			1.77 H	208	46.3	40.8
5	11910.00	57.5 PK	74.0	-16.5	1.76 H	92	38.5	19.0
6	11910.00	44.6 AV	54.0	-9.4	1.76 H	92	25.6	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.7 PK	88.2	-37.5	2.97 V	263	40.2	10.5
2	#5925.00	37.0 AV	68.2	-31.2	2.97 V	263	26.5	10.5
3	*5955.00	95.2 PK			2.97 V	263	54.4	40.8
4	*5955.00	85.4 AV			2.97 V	263	44.6	40.8
5	11910.00	57.2 PK	74.0	-16.8	1.60 V	209	38.2	19.0
6	11910.00	44.4 AV	54.0	-9.6	1.60 V	209	25.4	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	96.7 PK			1.49 H	318	55.5	41.2
2	*6175.00	87.0 AV			1.49 H	318	45.8	41.2
3	12350.00	58.4 PK	74.0	-15.6	1.74 H	98	38.7	19.7
4	12350.00	45.4 AV	54.0	-8.6	1.74 H	98	25.7	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	95.2 PK			1.92 V	262	54.0	41.2
2	*6175.00	85.5 AV			1.92 V	262	44.3	41.2
3	12350.00	58.1 PK	74.0	-15.9	1.68 V	208	38.4	19.7
4	12350.00	45.3 AV	54.0	-8.7	1.68 V	208	25.6	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	99.6 PK			1.53 H	315	57.0	42.6
2	*6415.00	90.1 AV			1.53 H	315	47.5	42.6
3	#12830.00	59.2 PK	88.2	-29.0	1.69 H	95	38.4	20.8
4	#12830.00	46.1 AV	68.2	-22.1	1.69 H	95	25.3	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	98.0 PK			1.98 V	264	55.4	42.6
2	*6415.00	88.5 AV			1.98 V	264	45.9	42.6
3	#12830.00	58.9 PK	88.2	-29.3	1.72 V	212	38.1	20.8
4	#12830.00	45.8 AV	68.2	-22.4	1.72 V	212	25.0	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	99.3 PK			1.38 H	315	56.7	42.6
2	*6435.00	89.7 AV			1.38 H	315	47.1	42.6
3	#12870.00	59.5 PK	88.2	-28.7	1.64 H	92	38.5	21.0
4	#12870.00	46.5 AV	68.2	-21.7	1.64 H	92	25.5	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	97.9 PK			2.01 V	260	55.3	42.6
2	*6435.00	88.1 AV			2.01 V	260	45.5	42.6
3	#12870.00	59.1 PK	88.2	-29.1	1.74 V	213	38.1	21.0
4	#12870.00	46.2 AV	68.2	-22.0	1.74 V	213	25.2	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	99.3 PK			1.39 H	317	56.5	42.8
2	*6475.00	89.7 AV			1.39 H	317	46.9	42.8
3	#12950.00	59.4 PK	88.2	-28.8	1.76 H	92	38.5	20.9
4	#12950.00	46.5 AV	68.2	-21.7	1.76 H	92	25.6	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	97.8 PK			1.93 V	260	55.0	42.8
2	*6475.00	88.2 AV			1.93 V	260	45.4	42.8
3	#12950.00	58.9 PK	88.2	-29.3	1.62 V	207	38.0	20.9
4	#12950.00	46.1 AV	68.2	-22.1	1.62 V	207	25.2	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	99.1 PK			1.38 H	308	56.1	43.0
2	*6515.00	89.0 AV			1.38 H	308	46.0	43.0
3	#13030.00	59.6 PK	88.2	-28.6	1.77 H	95	38.7	20.9
4	#13030.00	46.4 AV	68.2	-21.8	1.77 H	95	25.5	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	97.3 PK			1.99 V	270	54.3	43.0
2	*6515.00	87.2 AV			1.99 V	270	44.2	43.0
3	#13030.00	59.3 PK	88.2	-28.9	1.60 V	201	38.4	20.9
4	#13030.00	46.0 AV	68.2	-22.2	1.60 V	201	25.1	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	97.6 PK			1.49 H	316	54.4	43.2
2	*6535.00	88.1 AV			1.49 H	316	44.9	43.2
3	#13070.00	59.6 PK	88.2	-28.6	1.75 H	92	38.8	20.8
4	#13070.00	46.4 AV	68.2	-21.8	1.75 H	92	25.6	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.5 PK			1.90 V	266	53.3	43.2
2	*6535.00	86.9 AV			1.90 V	266	43.7	43.2
3	#13070.00	59.2 PK	88.2	-29.0	1.59 V	204	38.4	20.8
4	#13070.00	46.1 AV	68.2	-22.1	1.59 V	204	25.3	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	97.6 PK			1.48 H	314	54.5	43.1
2	*6695.00	87.2 AV			1.48 H	314	44.1	43.1
3	13390.00	60.9 PK	74.0	-13.1	1.72 H	91	38.9	22.0
4	13390.00	47.6 AV	54.0	-6.4	1.72 H	91	25.6	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	96.0 PK			1.95 V	261	52.9	43.1
2	*6695.00	85.9 AV			1.95 V	261	42.8	43.1
3	13390.00	60.5 PK	74.0	-13.5	1.62 V	209	38.5	22.0
4	13390.00	47.2 AV	54.0	-6.8	1.62 V	209	25.2	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.2 PK			1.12 H	203	53.9	43.3
2	*6855.00	87.2 AV			1.12 H	203	43.9	43.3
3	#13710.00	61.6 PK	88.2	-26.6	1.77 H	89	39.0	22.6
4	#13710.00	48.4 AV	68.2	-19.8	1.77 H	89	25.8	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.3 PK			1.27 V	268	52.0	43.3
2	*6855.00	85.4 AV			1.27 V	268	42.1	43.3
3	#13710.00	61.2 PK	88.2	-27.0	1.61 V	200	38.6	22.6
4	#13710.00	48.1 AV	68.2	-20.1	1.61 V	200	25.5	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	97.5 PK			2.41 H	2	54.0	43.5
2	*6875.00	87.6 AV			2.41 H	2	44.1	43.5
3	#13750.00	61.6 PK	68.2	-6.6	1.73 H	95	38.9	22.7
4	#13750.00	48.4 AV	54.0	-5.6	1.73 H	95	25.7	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.0 PK			1.28 V	253	52.5	43.5
2	*6875.00	85.8 AV			1.28 V	253	42.3	43.5
3	#13750.00	61.2 PK	88.2	-27.0	1.66 V	213	38.5	22.7
4	#13750.00	48.0 AV	68.2	-20.2	1.66 V	213	25.3	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	100.0 PK			2.30 H	357	55.5	44.5
2	*6995.00	90.3 AV			2.30 H	357	45.8	44.5
3	#13990.00	62.5 PK	88.2	-25.7	1.70 H	98	39.1	23.4
4	#13990.00	49.4 AV	68.2	-18.8	1.70 H	98	26.0	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#6695.00	97.6 PK	N/A	N/A	1.39 V	266	54.5	43.1
2	#6695.00	87.3 AV	N/A	N/A	1.39 V	266	44.2	43.1
3	#13990.00	62.1 PK	88.2	-26.1	1.62 V	211	38.7	23.4
4	#13990.00	48.9 AV	68.2	-19.3	1.62 V	211	25.5	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.1 PK			2.55 H	360	56.0	45.1
2	*7115.00	90.8 AV			2.55 H	360	45.7	45.1
3	#7125.00	79.0 PK	88.2	-9.2	2.55 H	360	65.3	13.7
4	#7125.00	64.5 AV	68.2	-3.7	2.55 H	360	50.8	13.7
5	#14230.00	63.1 PK	88.2	-25.1	1.78 H	100	39.3	23.8
6	#14230.00	50.0 AV	68.2	-18.2	1.78 H	100	26.2	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.8 PK			1.41 V	273	53.7	45.1
2	*7115.00	89.3 AV			1.41 V	273	44.2	45.1
3	#7125.00	75.9 PK	88.2	-12.3	1.41 V	273	62.2	13.7
4	#7125.00	59.7 AV	68.2	-8.5	1.41 V	273	46.0	13.7
5	#14230.00	62.7 PK	88.2	-25.5	1.60 V	209	38.9	23.8
6	#14230.00	49.5 AV	68.2	-18.7	1.60 V	209	25.7	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	1.69 H	208	41.0	10.5
2	#5925.00	38.0 AV	68.2	-30.2	1.69 H	208	27.5	10.5
3	*5955.00	99.0 PK			1.69 H	208	58.2	40.8
4	*5955.00	86.6 AV			1.69 H	208	45.8	40.8
5	11910.00	57.4 PK	74.0	-16.6	1.75 H	93	38.4	19.0
6	11910.00	44.5 AV	54.0	-9.5	1.75 H	93	25.5	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.0 PK	88.2	-37.2	2.99 V	251	40.5	10.5
2	#5925.00	37.5 AV	68.2	-30.7	2.99 V	251	27.0	10.5
3	*5955.00	97.5 PK			2.99 V	251	56.7	40.8
4	*5955.00	84.7 AV			2.99 V	251	43.9	40.8
5	11910.00	57.0 PK	74.0	-17.0	1.59 V	210	38.0	19.0
6	11910.00	44.2 AV	54.0	-9.8	1.59 V	210	25.2	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	99.4 PK			1.20 H	318	58.2	41.2
2	*6175.00	86.2 AV			1.20 H	318	45.0	41.2
3	12350.00	58.2 PK	74.0	-15.8	1.75 H	99	38.5	19.7
4	12350.00	45.3 AV	54.0	-8.7	1.75 H	99	25.6	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	98.0 PK			1.92 V	267	56.8	41.2
2	*6175.00	84.6 AV			1.92 V	267	43.4	41.2
3	12350.00	57.9 PK	74.0	-16.1	1.60 V	209	38.2	19.7
4	12350.00	45.1 AV	54.0	-8.9	1.60 V	209	25.4	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	101.9 PK			1.17 H	312	59.3	42.6
2	*6415.00	89.2 AV			1.17 H	312	46.6	42.6
3	#12830.00	59.1 PK	88.2	-29.1	1.79 H	98	38.3	20.8
4	#12830.00	46.0 AV	68.2	-22.2	1.79 H	98	25.2	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	99.8 PK			1.98 V	266	57.2	42.6
2	*6415.00	87.0 AV			1.98 V	266	44.4	42.6
3	#12830.00	58.8 PK	88.2	-29.4	1.62 V	211	38.0	20.8
4	#12830.00	45.8 AV	68.2	-22.4	1.62 V	211	25.0	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.6 PK			1.20 H	313	60.0	42.6
2	*6435.00	89.6 AV			1.20 H	313	47.0	42.6
3	#12870.00	59.3 PK	88.2	-28.9	1.60 H	97	38.3	21.0
4	#12870.00	46.4 AV	68.2	-21.8	1.60 H	97	25.4	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.3 PK			2.00 V	272	58.7	42.6
2	*6435.00	88.0 AV			2.00 V	272	45.4	42.6
3	#12870.00	59.0 PK	88.2	-29.2	1.63 V	222	38.0	21.0
4	#12870.00	46.1 AV	68.2	-22.1	1.63 V	222	25.1	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.3 PK			1.23 H	313	59.5	42.8
2	*6475.00	89.3 AV			1.23 H	313	46.5	42.8
3	#12950.00	59.3 PK	88.2	-28.9	1.77 H	91	38.4	20.9
4	#12950.00	46.4 AV	68.2	-21.8	1.77 H	91	25.5	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.1 PK			1.95 V	261	58.3	42.8
2	*6475.00	87.9 AV			1.95 V	261	45.1	42.8
3	#12950.00	58.9 PK	88.2	-29.3	1.63 V	217	38.0	20.9
4	#12950.00	46.0 AV	68.2	-22.2	1.63 V	217	25.1	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.3 PK			1.33 H	314	58.3	43.0
2	*6515.00	88.5 AV			1.33 H	314	45.5	43.0
3	#13030.00	59.4 PK	88.2	-28.8	1.74 H	90	38.5	20.9
4	#13030.00	46.2 AV	68.2	-22.0	1.74 H	90	25.3	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.1 PK			1.90 V	274	57.1	43.0
2	*6515.00	87.0 AV			1.90 V	274	44.0	43.0
3	#13030.00	59.1 PK	88.2	-29.1	1.58 V	206	38.2	20.9
4	#13030.00	45.9 AV	68.2	-22.3	1.58 V	206	25.0	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	102.1 PK			1.39 H	317	58.9	43.2
2	*6535.00	88.7 AV			1.39 H	317	45.5	43.2
3	#13070.00	59.3 PK	88.2	-28.9	1.74 H	97	38.5	20.8
4	#13070.00	46.2 AV	68.2	-22.0	1.74 H	97	25.4	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	100.7 PK			1.94 V	270	57.5	43.2
2	*6535.00	87.6 AV			1.94 V	270	44.4	43.2
3	#13070.00	59.0 PK	88.2	-29.2	1.64 V	208	38.2	20.8
4	#13070.00	46.0 AV	68.2	-22.2	1.64 V	208	25.2	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	99.7 PK			1.21 H	317	56.6	43.1
2	*6695.00	86.6 AV			1.21 H	317	43.5	43.1
3	13390.00	60.7 PK	74.0	-13.3	1.81 H	89	38.7	22.0
4	13390.00	47.4 AV	54.0	-6.6	1.81 H	89	25.4	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	98.7 PK			1.99 V	262	55.6	43.1
2	*6695.00	85.6 AV			1.99 V	262	42.5	43.1
3	13390.00	60.4 PK	74.0	-13.6	1.61 V	210	38.4	22.0
4	13390.00	47.2 AV	54.0	-6.8	1.61 V	210	25.2	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	100.0 PK			1.21 H	208	56.7	43.3
2	*6855.00	86.8 AV			1.21 H	208	43.5	43.3
3	#13710.00	61.3 PK	88.2	-26.9	1.80 H	99	38.7	22.6
4	#13710.00	48.2 AV	68.2	-20.0	1.80 H	99	25.6	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.6 PK			1.30 V	266	54.3	43.3
2	*6855.00	85.2 AV			1.30 V	266	41.9	43.3
3	#13710.00	61.0 PK	88.2	-27.2	1.62 V	207	38.4	22.6
4	#13710.00	48.0 AV	68.2	-20.2	1.62 V	207	25.4	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	100.5 PK			2.44 H	7	57.0	43.5
2	*6875.00	87.3 AV			2.44 H	7	43.8	43.5
3	#13750.00	61.5 PK	88.2	-26.7	1.70 H	100	38.8	22.7
4	#13750.00	48.2 AV	68.2	-20.0	1.70 H	100	25.5	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	98.9 PK			1.30 V	259	55.4	43.5
2	*6875.00	86.1 AV			1.30 V	259	42.6	43.5
3	#13750.00	61.1 PK	88.2	-27.1	1.67 V	211	38.4	22.7
4	#13750.00	47.8 AV	68.2	-20.4	1.67 V	211	25.1	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.0 PK			1.33 H	355	57.5	44.5
2	*6995.00	89.3 AV			1.33 H	355	44.8	44.5
3	#13990.00	62.1 PK	88.2	-26.1	1.70 H	95	38.7	23.4
4	#13990.00	49.2 AV	68.2	-19.0	1.70 H	95	25.8	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	100.8 PK			1.40 V	267	56.3	44.5
2	*6995.00	88.0 AV			1.40 V	267	43.5	44.5
3	#13990.00	61.9 PK	88.2	-26.3	1.61 V	217	38.5	23.4
4	#13990.00	48.8 AV	68.2	-19.4	1.61 V	217	25.4	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.2 PK			2.74 H	353	50.1	45.1
2	*7115.00	82.1 AV			2.74 H	353	37.0	45.1
3	#7125.00	83.7 PK	88.2	-4.5	2.74 H	353	70.0	13.7
4	#7125.00	67.7 AV	68.2	-0.5	2.74 H	353	54.0	13.7
5	#14230.00	62.7 PK	88.2	-25.5	1.72 H	92	38.9	23.8
6	#14230.00	49.8 AV	68.2	-18.4	1.72 H	92	26.0	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	93.2 PK			1.22 V	261	48.1	45.1
2	*7115.00	80.9 AV			1.22 V	261	35.8	45.1
3	#7125.00	79.6 PK	88.2	-8.6	1.22 V	261	65.9	13.7
4	#7125.00	66.0 AV	68.2	-2.2	1.22 V	261	52.3	13.7
5	#14230.00	62.4 PK	88.2	-25.8	1.62 V	207	38.6	23.8
6	#14230.00	49.3 AV	68.2	-18.9	1.62 V	207	25.5	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.1 PK	88.2	-35.1	1.90 H	217	42.6	10.5
2	#5925.00	40.4 AV	68.2	-27.8	1.90 H	217	29.9	10.5
3	*5965.00	99.2 PK			1.90 H	217	58.4	40.8
4	*5965.00	86.1 AV			1.90 H	217	45.3	40.8
5	11930.00	57.4 PK	74.0	-16.6	1.75 H	92	38.4	19.0
6	11930.00	44.5 AV	54.0	-9.5	1.75 H	92	25.5	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.8 PK	88.2	-35.4	1.37 V	264	42.3	10.5
2	#5925.00	40.0 AV	68.2	-28.2	1.37 V	264	29.5	10.5
3	*5965.00	96.5 PK			1.37 V	264	55.7	40.8
4	*5965.00	84.1 AV			1.37 V	264	43.3	40.8
5	11930.00	57.4 PK	74.0	-16.6	1.63 V	212	38.4	19.0
6	11930.00	44.3 AV	54.0	-9.7	1.63 V	212	25.3	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	98.8 PK			1.24 H	315	57.6	41.2
2	*6165.00	86.8 AV			1.24 H	315	45.6	41.2
3	12330.00	58.3 PK	74.0	-15.7	1.72 H	96	38.5	19.8
4	12330.00	45.3 AV	54.0	-8.7	1.72 H	96	25.5	19.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	97.7 PK			1.99 V	270	56.5	41.2
2	*6165.00	85.2 AV			1.99 V	270	44.0	41.2
3	12330.00	57.9 PK	74.0	-16.1	1.66 V	207	38.1	19.8
4	12330.00	45.1 AV	54.0	-8.9	1.66 V	207	25.3	19.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	101.4 PK			1.27 H	312	59.0	42.4
2	*6405.00	88.9 AV			1.27 H	312	46.5	42.4
3	#12810.00	59.1 PK	88.2	-29.1	1.76 H	95	38.4	20.7
4	#12810.00	46.0 AV	68.2	-22.2	1.76 H	95	25.3	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	99.4 PK			1.92 V	264	57.0	42.4
2	*6405.00	86.9 AV			1.92 V	264	44.5	42.4
3	#12810.00	58.8 PK	88.2	-29.4	1.63 V	216	38.1	20.7
4	#12810.00	45.7 AV	68.2	-22.5	1.63 V	216	25.0	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	102.2 PK			1.24 H	315	59.5	42.7
2	*6445.00	89.2 AV			1.24 H	315	46.5	42.7
3	#12890.00	59.4 PK	88.2	-28.8	1.69 H	101	38.4	21.0
4	#12890.00	46.4 AV	68.2	-21.8	1.69 H	101	25.4	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	100.8 PK			2.03 V	266	58.1	42.7
2	*6445.00	87.9 AV			2.03 V	266	45.2	42.7
3	#12890.00	59.1 PK	88.2	-29.1	1.60 V	223	38.1	21.0
4	#12890.00	46.1 AV	68.2	-22.1	1.60 V	223	25.1	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	102.0 PK			1.22 H	318	59.2	42.8
2	*6485.00	89.5 AV			1.22 H	318	46.7	42.8
3	#12970.00	59.2 PK	88.2	-29.0	1.76 H	90	38.3	20.9
4	#12970.00	46.4 AV	68.2	-21.8	1.76 H	90	25.5	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	101.3 PK			2.03 V	266	58.5	42.8
2	*6485.00	88.1 AV			2.03 V	266	45.3	42.8
3	#12970.00	58.9 PK	88.2	-29.3	1.63 V	217	38.0	20.9
4	#12970.00	46.1 AV	68.2	-22.1	1.63 V	217	25.2	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	101.8 PK			1.36 H	317	58.6	43.2
2	*6525.00	88.9 AV			1.36 H	317	45.7	43.2
3	#13050.00	59.3 PK	88.2	-28.9	1.76 H	95	38.4	20.9
4	#13050.00	46.3 AV	68.2	-21.9	1.76 H	95	25.4	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	101.0 PK			1.96 V	278	57.8	43.2
2	*6525.00	87.6 AV			1.96 V	278	44.4	43.2
3	#13050.00	59.2 PK	88.2	-29.0	1.57 V	203	38.3	20.9
4	#13050.00	46.0 AV	68.2	-22.2	1.57 V	203	25.1	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	101.6 PK			1.09 H	316	58.4	43.2
2	*6565.00	88.9 AV			1.09 H	316	45.7	43.2
3	#13130.00	59.4 PK	88.2	-28.8	1.76 H	95	38.4	21.0
4	#13130.00	46.4 AV	68.2	-21.8	1.76 H	95	25.4	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	100.3 PK			1.98 V	264	57.1	43.2
2	*6565.00	87.1 AV			1.98 V	264	43.9	43.2
3	#13130.00	59.2 PK	88.2	-29.0	1.66 V	204	38.2	21.0
4	#13130.00	46.2 AV	68.2	-22.0	1.66 V	204	25.2	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	102.7 PK			1.27 H	319	59.5	43.2
2	*6725.00	88.9 AV			1.27 H	319	45.7	43.2
3	#13450.00	60.5 PK	88.2	-27.7	1.77 H	97	38.6	21.9
4	#13450.00	47.4 AV	68.2	-20.8	1.77 H	97	25.5	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	101.3 PK			1.93 V	269	58.1	43.2
2	*6725.00	87.6 AV			1.93 V	269	44.4	43.2
3	#13450.00	60.2 PK	88.2	-28.0	1.61 V	217	38.3	21.9
4	#13450.00	47.3 AV	68.2	-20.9	1.61 V	217	25.4	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	100.1 PK			1.18 H	213	56.8	43.3
2	*6845.00	87.0 AV			1.18 H	213	43.7	43.3
3	#13690.00	61.3 PK	88.2	-26.9	1.74 H	96	38.7	22.6
4	#13690.00	48.2 AV	68.2	-20.0	1.74 H	96	25.6	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	98.8 PK			1.54 V	269	55.5	43.3
2	*6845.00	85.8 AV			1.54 V	269	42.5	43.3
3	#13690.00	60.9 PK	88.2	-27.3	1.61 V	206	38.3	22.6
4	#13690.00	48.0 AV	68.2	-20.2	1.61 V	206	25.4	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	102.1 PK			1.34 H	208	58.6	43.5
2	*6885.00	88.6 AV			1.34 H	208	45.1	43.5
3	#13770.00	61.4 PK	88.2	-26.8	1.74 H	88	38.7	22.7
4	#13770.00	48.2 AV	68.2	-20.0	1.74 H	88	25.5	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	89.6 PK			1.23 V	270	46.1	43.5
2	*6885.00	87.4 AV			1.23 V	270	43.9	43.5
3	#13770.00	61.1 PK	88.2	-27.1	1.63 V	211	38.4	22.7
4	#13770.00	48.0 AV	68.2	-20.2	1.63 V	211	25.3	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	101.9 PK			1.38 H	352	57.2	44.7
2	*7005.00	89.0 AV			1.38 H	352	44.3	44.7
3	#14010.00	62.0 PK	88.2	-26.2	1.78 H	98	38.6	23.4
4	#14010.00	49.1 AV	68.2	-19.1	1.78 H	98	25.7	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	100.8 PK			1.23 V	264	56.1	44.7
2	*7005.00	87.6 AV			1.23 V	264	42.9	44.7
3	#14010.00	61.8 PK	88.2	-26.4	1.60 V	213	38.4	23.4
4	#14010.00	48.7 AV	68.2	-19.5	1.60 V	213	25.3	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	101.6 PK			1.49 H	360	56.6	45.0
2	*7085.00	89.1 AV			1.49 H	360	44.1	45.0
3	#7125.00	54.8 PK	88.2	-33.4	1.49 H	360	41.1	13.7
4	#7125.00	41.7 AV	68.2	-26.5	1.49 H	360	28.0	13.7
5	#14170.00	62.7 PK	88.2	-25.5	1.78 H	95	38.9	23.8
6	#14170.00	49.6 AV	68.2	-18.6	1.78 H	95	25.8	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	100.1 PK			1.04 V	262	55.1	45.0
2	*7085.00	87.6 AV			1.04 V	262	42.6	45.0
3	#7125.00	53.5 PK	88.2	-34.7	1.04 V	262	39.8	13.7
4	#7125.00	41.2 AV	68.2	-27.0	1.04 V	262	27.5	13.7
5	#14170.00	62.3 PK	88.2	-25.9	1.66 V	208	38.5	23.8
6	#14170.00	49.3 AV	68.2	-18.9	1.66 V	208	25.5	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.5 PK	88.2	-31.7	2.05 H	217	46.0	10.5
2	#5925.00	43.5 AV	68.2	-24.7	2.05 H	217	33.0	10.5
3	*5985.00	99.8 PK			2.05 H	217	59.0	40.8
4	*5985.00	86.7 AV			2.05 H	217	45.9	40.8
5	11970.00	57.5 PK	74.0	-16.5	1.72 H	90	38.4	19.1
6	11970.00	44.5 AV	54.0	-9.5	1.72 H	90	25.4	19.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.7 PK	88.2	-32.5	1.44 V	267	45.2	10.5
2	#5925.00	43.0 AV	68.2	-25.2	1.44 V	267	32.5	10.5
3	*5985.00	98.3 PK			1.44 V	267	57.5	40.8
4	*5985.00	85.3 AV			1.44 V	267	44.5	40.8
5	11970.00	57.1 PK	74.0	-16.9	1.63 V	222	38.0	19.1
6	11970.00	44.4 AV	54.0	-9.6	1.63 V	222	25.3	19.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	100.8 PK			1.08 H	321	59.6	41.2
2	*6145.00	88.0 AV			1.08 H	321	46.8	41.2
3	12290.00	58.3 PK	74.0	-15.7	1.73 H	98	38.5	19.8
4	12290.00	45.2 AV	54.0	-8.8	1.73 H	98	25.4	19.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	99.5 PK			1.95 V	272	58.3	41.2
2	*6145.00	86.3 AV			1.95 V	272	45.1	41.2
3	12290.00	57.9 PK	74.0	-16.1	1.66 V	200	38.1	19.8
4	12290.00	45.0 AV	54.0	-9.0	1.66 V	200	25.2	19.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	101.5 PK			1.10 H	306	59.2	42.3
2	*6385.00	88.8 AV			1.10 H	306	46.5	42.3
3	#12770.00	59.1 PK	88.2	-29.1	1.77 H	97	38.4	20.7
4	#12770.00	46.2 AV	68.2	-22.0	1.77 H	97	25.5	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	100.9 PK			1.99 V	266	58.6	42.3
2	*6385.00	87.6 AV			1.99 V	266	45.3	42.3
3	#12770.00	58.9 PK	88.2	-29.3	1.65 V	204	38.2	20.7
4	#12770.00	45.9 AV	68.2	-22.3	1.65 V	204	25.2	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	102.5 PK			1.21 H	319	59.7	42.8
2	*6465.00	90.9 AV			1.21 H	319	48.1	42.8
3	#12930.00	59.5 PK	88.2	-28.7	1.72 H	103	38.5	21.0
4	#12930.00	46.4 AV	68.2	-21.8	1.72 H	103	25.4	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	102.3 PK			2.00 V	272	59.5	42.8
2	*6465.00	90.7 AV			2.00 V	272	47.9	42.8
3	#12930.00	59.1 PK	88.2	-29.1	1.62 V	223	38.1	21.0
4	#12930.00	46.2 AV	68.2	-22.0	1.62 V	223	25.2	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	101.4 PK			1.22 H	318	58.1	43.3
2	*6545.00	89.8 AV			1.22 H	318	46.5	43.3
3	#13090.00	59.3 PK	88.2	-28.9	1.72 H	89	38.4	20.9
4	#13090.00	46.4 AV	68.2	-21.8	1.72 H	89	25.5	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	102.2 PK			2.06 V	267	58.9	43.3
2	*6545.00	90.5 AV			2.06 V	267	47.2	43.3
3	#13090.00	59.0 PK	88.2	-29.2	1.65 V	212	38.1	20.9
4	#13090.00	46.1 AV	68.2	-22.1	1.65 V	212	25.2	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	102.6 PK			1.25 H	320	59.4	43.2
2	*6705.00	89.8 AV			1.25 H	320	46.6	43.2
3	#13410.00	60.5 PK	88.2	-27.7	1.75 H	100	38.5	22.0
4	#13410.00	47.6 AV	68.2	-20.6	1.75 H	100	25.6	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	101.9 PK			1.96 V	261	58.7	43.2
2	*6705.00	88.7 AV			1.96 V	261	45.5	43.2
3	#13410.00	60.2 PK	88.2	-28.0	1.63 V	213	38.2	22.0
4	#13410.00	47.3 AV	68.2	-20.9	1.63 V	213	25.3	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	103.3 PK			1.01 H	213	59.9	43.4
2	*6865.00	89.9 AV			1.01 H	213	46.5	43.4
3	#13730.00	61.3 PK	88.2	-26.9	1.75 H	92	38.6	22.7
4	#13730.00	48.2 AV	68.2	-20.0	1.75 H	92	25.5	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	102.2 PK			1.60 V	276	58.8	43.4
2	*6865.00	88.5 AV			1.60 V	276	45.1	43.4
3	#13730.00	61.1 PK	88.2	-27.1	1.65 V	201	38.4	22.7
4	#13730.00	48.0 AV	68.2	-20.2	1.65 V	201	25.3	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	102.7 PK			1.42 H	356	58.8	43.9
2	*6945.00	89.6 AV			1.42 H	356	45.7	43.9
3	#13890.00	61.8 PK	88.2	-26.4	1.73 H	97	38.7	23.1
4	#13890.00	48.7 AV	68.2	-19.5	1.73 H	97	25.6	23.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	101.2 PK			1.35 V	266	57.3	43.9
2	*6945.00	88.4 AV			1.35 V	266	44.5	43.9
3	#13890.00	61.6 PK	88.2	-26.6	1.61 V	211	38.5	23.1
4	#13890.00	48.5 AV	68.2	-19.7	1.61 V	211	25.4	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	102.9 PK			1.44 H	358	58.2	44.7
2	*7025.00	89.4 AV			1.44 H	358	44.7	44.7
3	#7125.00	54.5 PK	88.2	-33.7	1.44 H	358	40.8	13.7
4	#7125.00	40.3 AV	68.2	-27.9	1.44 H	358	26.6	13.7
5	#14050.00	62.2 PK	88.2	-26.0	1.74 H	99	38.7	23.5
6	#14050.00	49.2 AV	68.2	-19.0	1.74 H	99	25.7	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	101.3 PK			1.23 V	266	56.6	44.7
2	*7025.00	88.1 AV			1.23 V	266	43.4	44.7
3	#7125.00	54.2 PK	88.2	-34.0	1.23 V	266	40.5	13.7
4	#7125.00	39.9 AV	68.2	-28.3	1.23 V	266	26.2	13.7
5	#14050.00	62.0 PK	88.2	-26.2	1.62 V	209	38.5	23.5
6	#14050.00	48.9 AV	68.2	-19.3	1.62 V	209	25.4	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.5 PK	88.2	-30.7	1.82 H	213	47.0	10.5
2	#5925.00	43.7 AV	68.2	-24.5	1.82 H	213	33.2	10.5
3	*6025.00	98.9 PK			1.82 H	213	57.9	41.0
4	*6025.00	85.6 AV			1.82 H	213	44.6	41.0
5	12050.00	57.7 PK	74.0	-16.3	1.71 H	86	38.4	19.3
6	12050.00	44.7 AV	54.0	-9.3	1.71 H	86	25.4	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.0 PK	88.2	-32.2	1.60 V	266	45.5	10.5
2	#5925.00	43.1 AV	68.2	-25.1	1.60 V	266	32.6	10.5
3	*6025.00	96.1 PK			1.60 V	266	55.1	41.0
4	*6025.00	84.1 AV			1.60 V	266	43.1	41.0
5	12050.00	57.4 PK	74.0	-16.6	1.65 V	221	38.1	19.3
6	12050.00	44.6 AV	54.0	-9.4	1.65 V	221	25.3	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	99.5 PK			1.05 H	325	58.3	41.2
2	*6185.00	86.7 AV			1.05 H	325	45.5	41.2
3	12370.00	58.2 PK	74.0	-15.8	1.75 H	100	38.5	19.7
4	12370.00	45.2 AV	54.0	-8.8	1.75 H	100	25.5	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	98.3 PK			1.16 V	271	57.1	41.2
2	*6185.00	85.5 AV			1.16 V	271	44.3	41.2
3	12370.00	57.9 PK	74.0	-16.1	1.66 V	203	38.2	19.7
4	12370.00	44.9 AV	54.0	-9.1	1.66 V	203	25.2	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	101.8 PK			1.10 H	305	59.7	42.1
2	*6345.00	89.1 AV			1.10 H	305	47.0	42.1
3	12690.00	58.9 PK	74.0	-15.1	1.77 H	95	38.4	20.5
4	12690.00	46.0 AV	54.0	-8.0	1.77 H	95	25.5	20.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	100.5 PK			1.26 V	275	58.4	42.1
2	*6345.00	88.0 AV			1.26 V	275	45.9	42.1
3	12690.00	58.7 PK	74.0	-15.3	1.62 V	201	38.2	20.5
4	12690.00	45.6 AV	54.0	-8.4	1.62 V	201	25.1	20.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	101.6 PK			1.25 H	329	58.7	42.9
2	*6505.00	88.5 AV			1.25 H	329	45.6	42.9
3	#13010.00	59.3 PK	88.2	-28.9	1.70 H	87	38.4	20.9
4	#13010.00	46.3 AV	68.2	-21.9	1.70 H	87	25.4	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	100.0 PK			2.36 V	269	57.1	42.9
2	*6505.00	87.2 AV			2.36 V	269	44.3	42.9
3	#13010.00	59.0 PK	88.2	-29.2	1.65 V	212	38.1	20.9
4	#13010.00	46.0 AV	68.2	-22.2	1.65 V	212	25.1	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	100.6 PK			1.20 H	321	57.5	43.1
2	*6665.00	87.9 AV			1.20 H	321	44.8	43.1
3	13330.00	60.1 PK	74.0	-13.9	1.71 H	99	38.4	21.7
4	13330.00	47.2 AV	54.0	-6.8	1.71 H	99	25.5	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	99.1 PK			2.12 V	256	56.0	43.1
2	*6665.00	86.6 AV			2.12 V	256	43.5	43.1
3	13330.00	59.9 PK	74.0	-14.1	1.63 V	213	38.2	21.7
4	13330.00	47.0 AV	54.0	-7.0	1.63 V	213	25.3	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	100.0 PK			1.52 H	358	56.6	43.4
2	*6825.00	87.4 AV			1.52 H	358	44.0	43.4
3	#13650.00	61.0 PK	88.2	-27.2	1.72 H	103	38.6	22.4
4	#13650.00	47.9 AV	68.2	-20.3	1.72 H	103	25.5	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	99.0 PK			1.47 V	265	55.6	43.4
2	*6825.00	86.3 AV			1.47 V	265	42.9	43.4
3	#13650.00	60.5 PK	88.2	-27.7	1.67 V	208	38.1	22.4
4	#13650.00	47.7 AV	68.2	-20.5	1.67 V	208	25.3	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	101.1 PK			1.44 H	353	56.8	44.3
2	*6985.00	88.3 AV			1.44 H	353	44.0	44.3
3	#7125.00	63.9 PK	88.2	-24.3	1.44 H	353	50.2	13.7
4	#7125.00	45.2 AV	68.2	-23.0	1.44 H	353	31.5	13.7
5	#13970.00	62.1 PK	88.2	-26.1	1.72 H	103	38.7	23.4
6	#13970.00	49.0 AV	68.2	-19.2	1.72 H	103	25.6	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	99.5 PK			1.46 V	254	55.2	44.3
2	*6985.00	87.0 AV			1.46 V	254	42.7	44.3
3	#7125.00	63.2 PK	88.2	-25.0	1.46 V	254	49.5	13.7
4	#7125.00	44.6 AV	68.2	-23.6	1.46 V	254	30.9	13.7
5	#13970.00	61.8 PK	88.2	-26.4	1.65 V	222	38.4	23.4
6	#13970.00	48.8 AV	68.2	-19.4	1.65 V	222	25.4	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.5 PK	88.2	-30.7	1.26 H	319	47.0	10.5
2	#5925.00	43.2 AV	68.2	-25.0	1.26 H	319	32.7	10.5
3	*6105.00	97.3 PK			1.26 H	319	56.1	41.2
4	*6105.00	84.5 AV			1.26 H	319	43.3	41.2
5	12210.00	58.0 PK	74.0	-16.0	1.69 H	96	38.5	19.5
6	12210.00	44.8 AV	54.0	-9.2	1.69 H	96	25.3	19.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.7 PK	88.2	-31.5	1.62 V	258	46.2	10.5
2	#5925.00	42.5 AV	68.2	-25.7	1.62 V	258	32.0	10.5
3	*6105.00	98.6 PK			1.62 V	258	57.4	41.2
4	*6105.00	85.8 AV			1.62 V	258	44.6	41.2
5	12210.00	57.7 PK	74.0	-16.3	1.61 V	262	38.2	19.5
6	12210.00	44.8 AV	54.0	-9.2	1.61 V	262	25.3	19.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	98.8 PK			1.18 H	318	57.2	41.6
2	*6265.00	86.2 AV			1.18 H	318	44.6	41.6
3	12530.00	58.3 PK	74.0	-15.7	1.72 H	102	38.4	19.9
4	12530.00	45.2 AV	54.0	-8.8	1.72 H	102	25.3	19.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	97.8 PK			1.20 V	272	56.2	41.6
2	*6265.00	84.8 AV			1.20 V	272	43.2	41.6
3	12530.00	58.0 PK	74.0	-16.0	1.62 V	208	38.1	19.9
4	12530.00	44.9 AV	54.0	-9.1	1.62 V	208	25.0	19.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	100.4 PK			1.23 H	345	57.8	42.6
2	*6425.00	87.6 AV			1.23 H	345	45.0	42.6
3	#12850.00	59.4 PK	88.2	-28.8	1.73 H	93	38.5	20.9
4	#12850.00	46.3 AV	68.2	-21.9	1.73 H	93	25.4	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	99.3 PK			1.11 V	262	56.7	42.6
2	*6425.00	86.1 AV			1.11 V	262	43.5	42.6
3	#12850.00	59.2 PK	88.2	-29.0	1.66 V	212	38.3	20.9
4	#12850.00	46.0 AV	68.2	-22.2	1.66 V	212	25.1	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	99.1 PK			1.25 H	319	56.0	43.1
2	*6585.00	86.3 AV			1.25 H	319	43.2	43.1
3	#13170.00	59.6 PK	88.2	-28.6	1.70 H	99	38.5	21.1
4	#13170.00	46.5 AV	68.2	-21.7	1.70 H	99	25.4	21.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	97.6 PK			1.52 V	270	54.5	43.1
2	*6585.00	85.0 AV			1.52 V	270	41.9	43.1
3	#13170.00	59.4 PK	88.2	-28.8	1.61 V	204	38.3	21.1
4	#13170.00	46.3 AV	68.2	-21.9	1.61 V	204	25.2	21.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	100.1 PK			1.32 H	326	56.9	43.2
2	*6745.00	87.3 AV			1.32 H	326	44.1	43.2
3	#13490.00	60.6 PK	88.2	-27.6	1.72 H	95	38.6	22.0
4	#13490.00	47.6 AV	68.2	-20.6	1.72 H	9	25.6	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	98.2 PK			1.52 V	270	55.0	43.2
2	*6745.00	85.5 AV			1.52 V	270	42.3	43.2
3	#13490.00	60.5 PK	88.2	-27.7	1.63 V	210	38.5	22.0
4	#13490.00	47.4 AV	68.2	-20.8	1.63 V	210	25.4	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	97.4 PK			1.34 H	349	53.7	43.7
2	*6905.00	85.0 AV			1.34 H	349	41.3	43.7
3	#7137.00	66.0 PK	88.2	-22.2	1.34 H	349	52.3	13.7
4	#7137.00	51.2 AV	68.2	-17.0	1.34 H	349	37.5	13.7
5	7250.00	59.0 PK	74.0	-15.0	1.34 H	349	45.1	13.9
6	7250.00	46.7 AV	54.0	-7.3	1.34 H	349	32.8	13.9
7	#13810.00	62.0 PK	88.2	-26.2	1.77 H	95	39.2	22.8
8	#13810.00	48.9 AV	68.2	-19.3	1.77 H	95	26.1	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	96.5 PK			1.60 V	267	52.8	43.7
2	*6905.00	83.7 AV			1.60 V	267	40.0	43.7
3	#7137.00	59.3 PK	88.2	-28.9	1.60 V	267	45.6	13.7
4	#7137.00	47.0 AV	68.2	-21.2	1.60 V	267	33.3	13.7
5	7250.00	58.0 PK	74.0	-16.0	1.60 V	267	44.1	13.9
6	7250.00	45.9 AV	54.0	-8.1	1.60 V	267	32.0	13.9
7	#13810.00	61.1 PK	88.2	-27.1	1.66 V	208	38.3	22.8
8	#13810.00	48.2 AV	68.2	-20.0	1.66 V	208	25.4	22.8

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

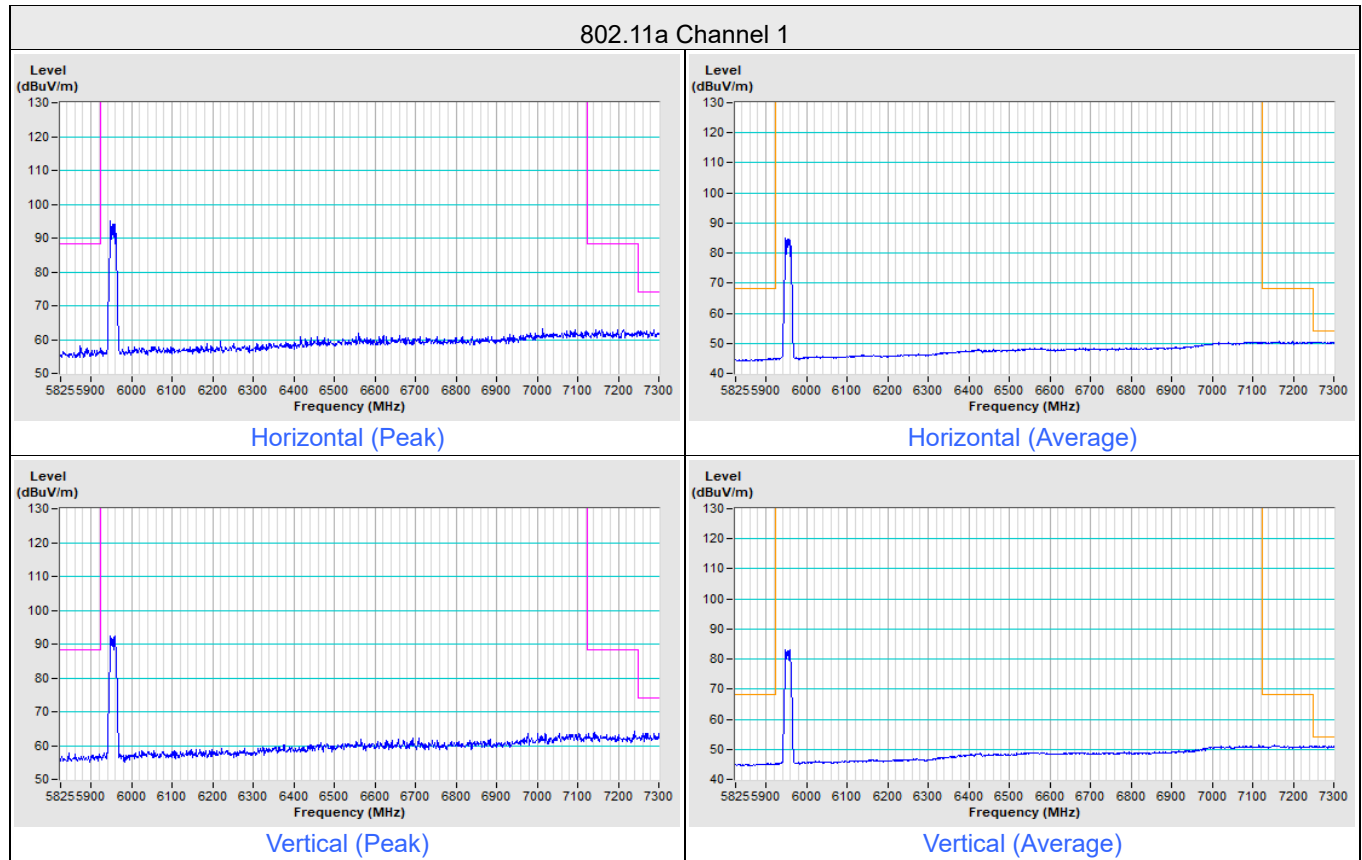


802.11a Channel 233

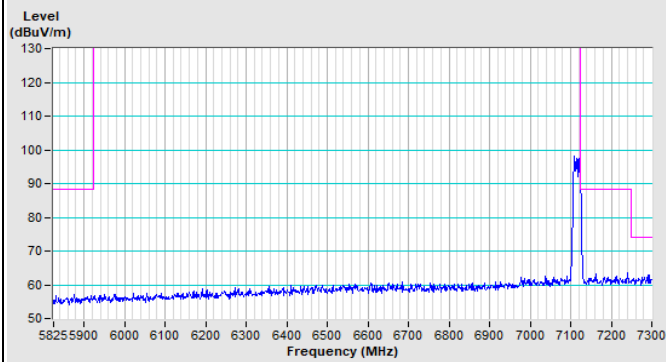


Horizontal (Peak)

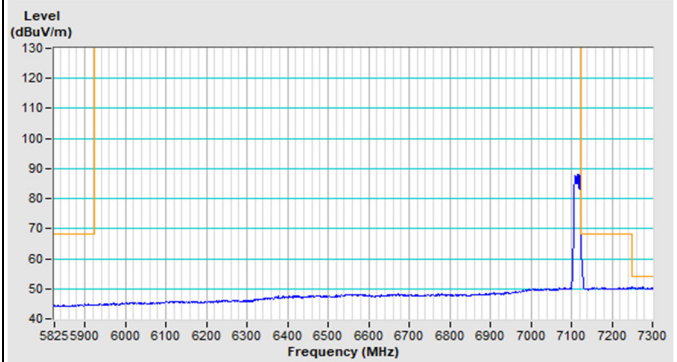

Horizontal (Average)

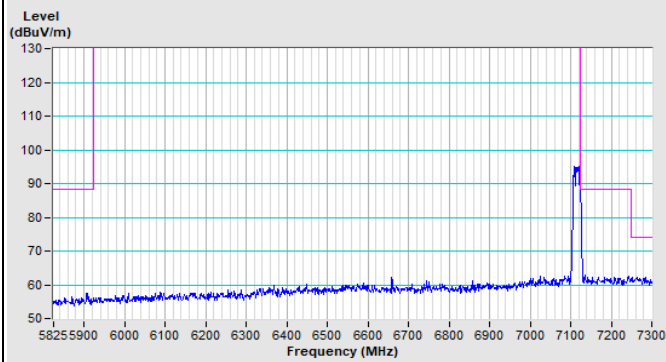


Vertical (Peak)

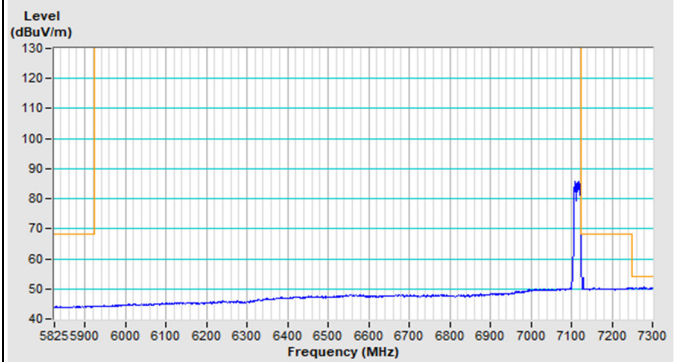


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

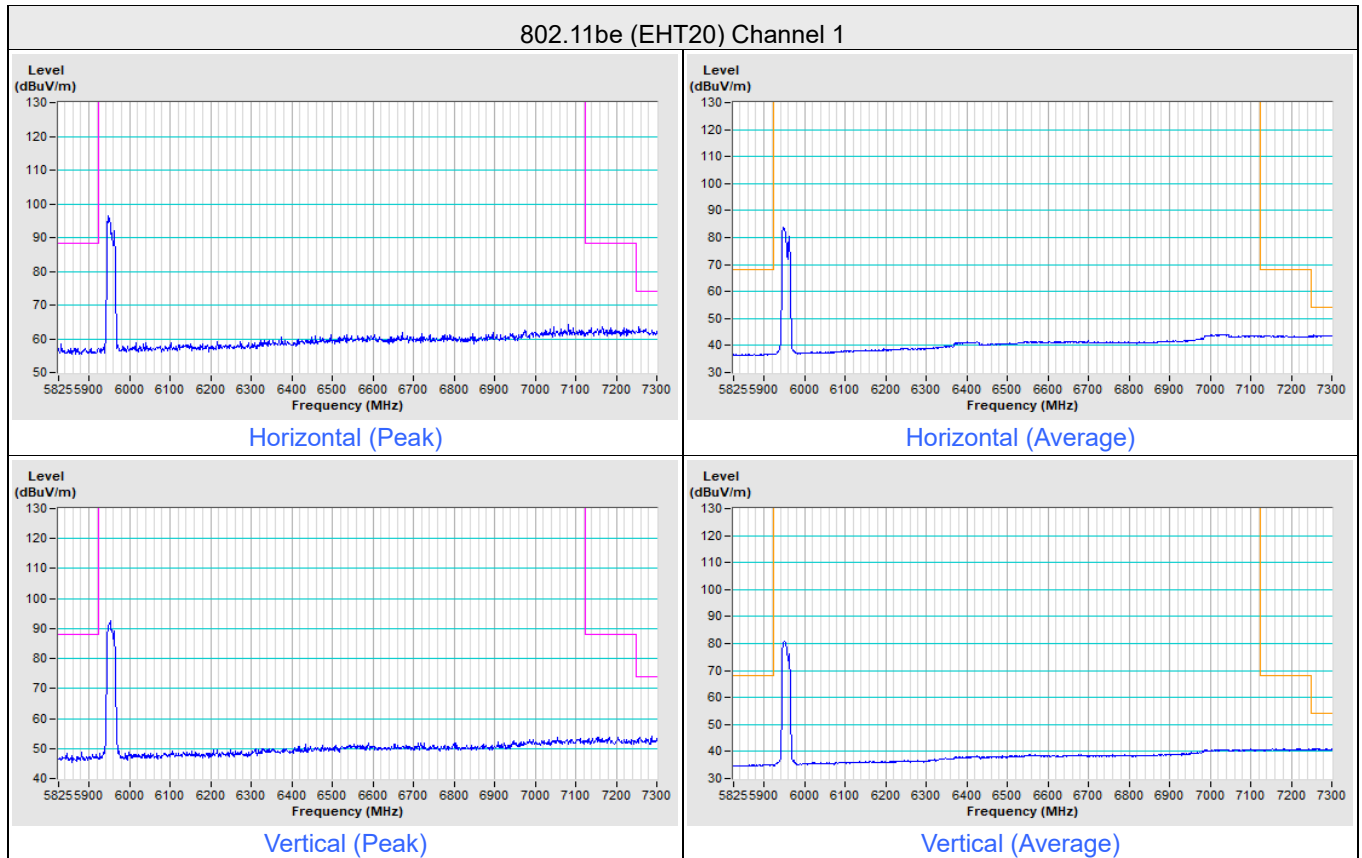


802.11be (EHT20) Channel 233

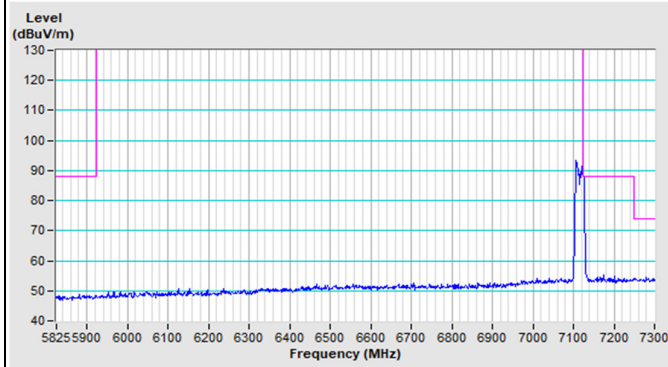


Horizontal (Peak)

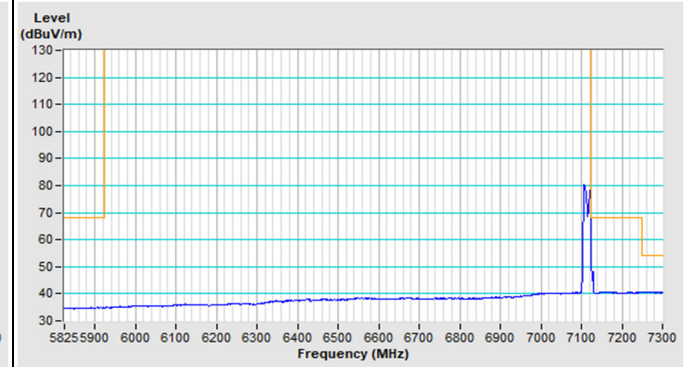

Horizontal (Average)

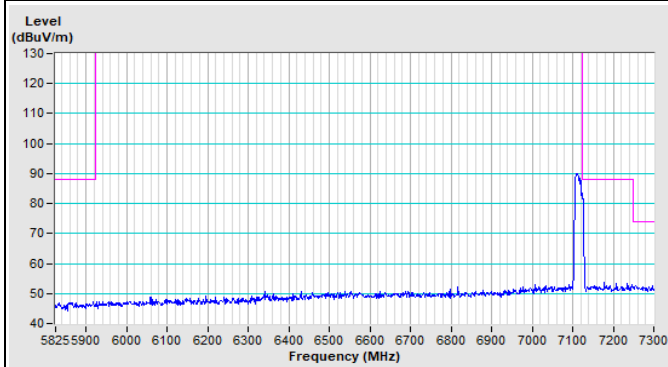


Vertical (Peak)

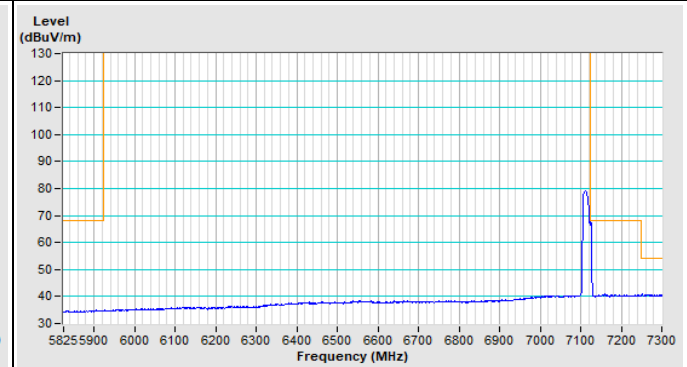


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

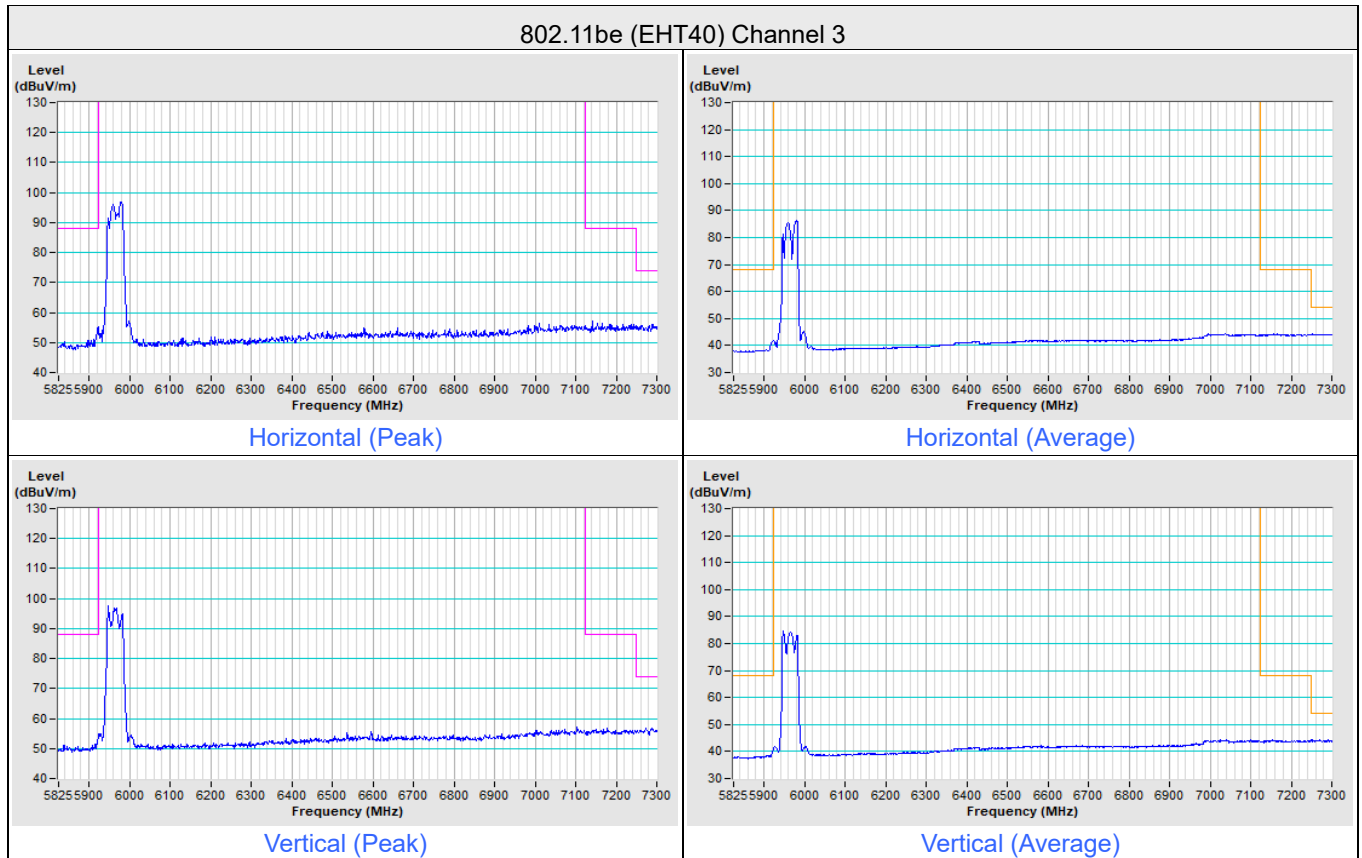


802.11be (EHT40) Channel 227

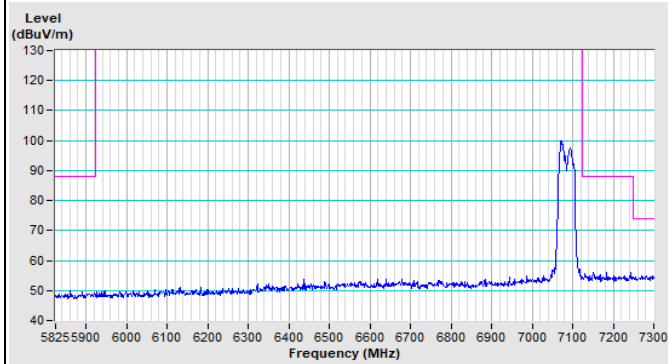


Horizontal (Peak)

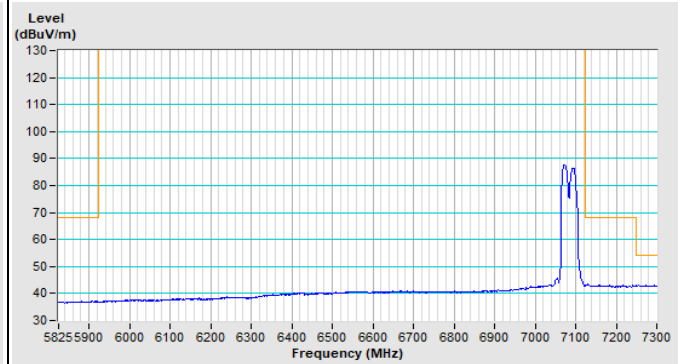

Horizontal (Average)

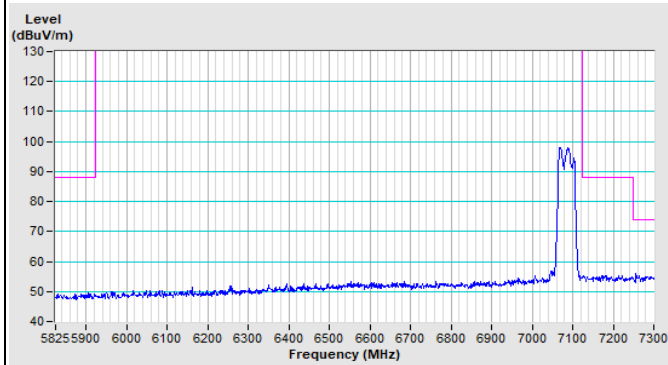


Vertical (Peak)

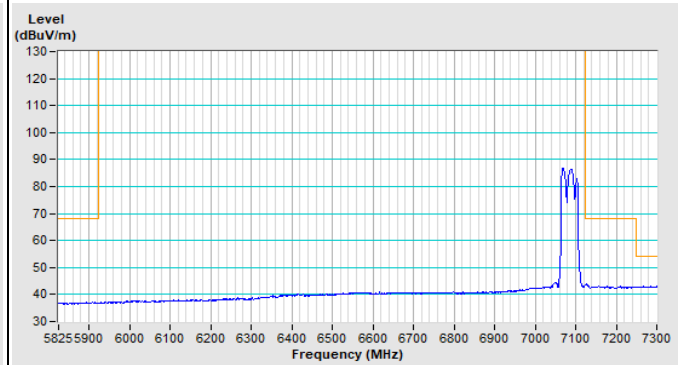


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

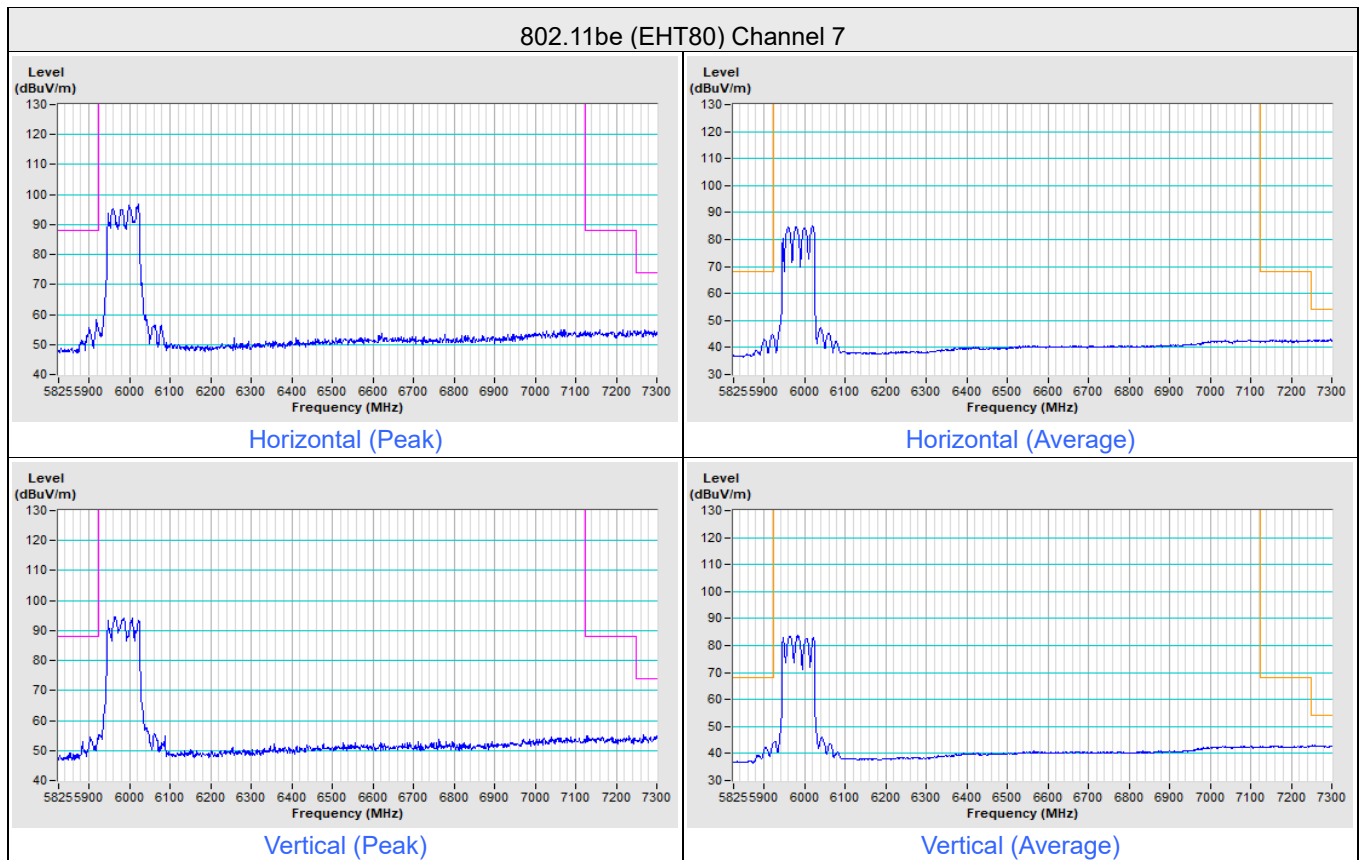


802.11be (EHT80) Channel 215

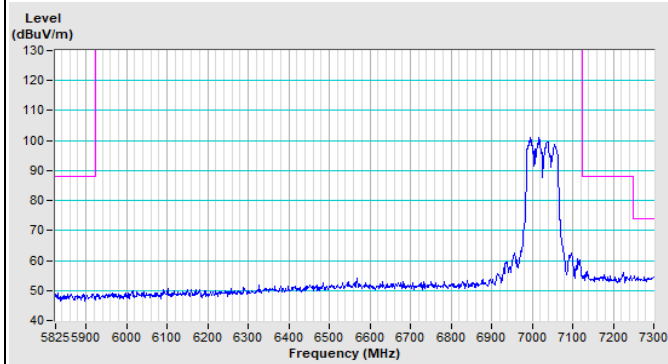


Horizontal (Peak)

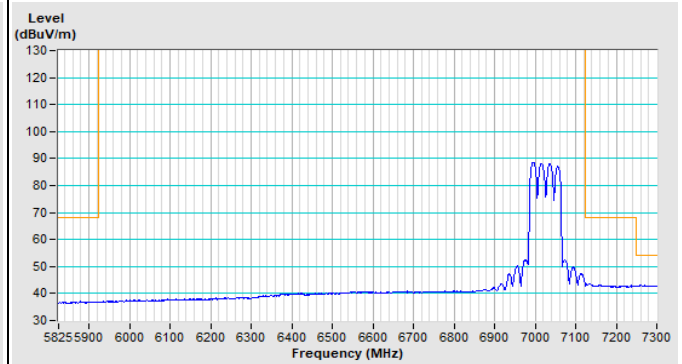

Horizontal (Average)

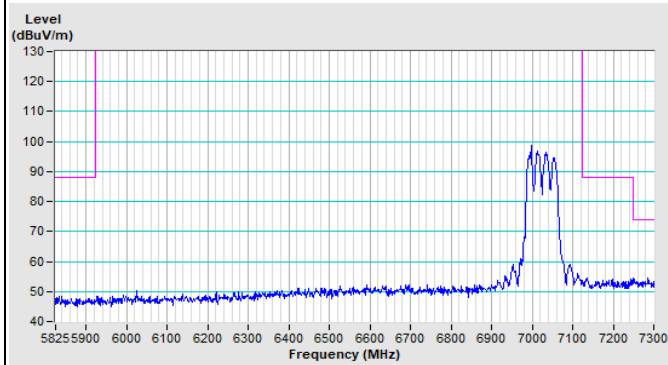


Vertical (Peak)

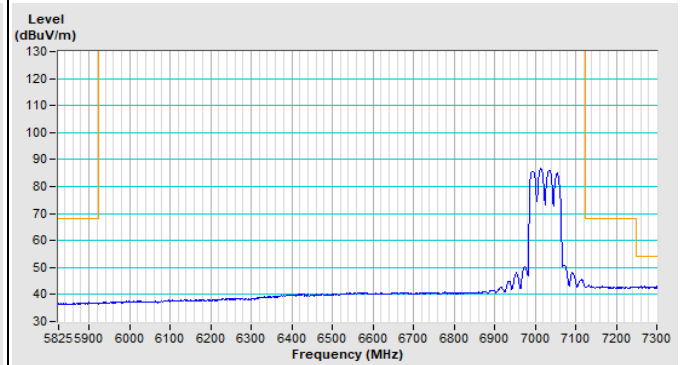


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

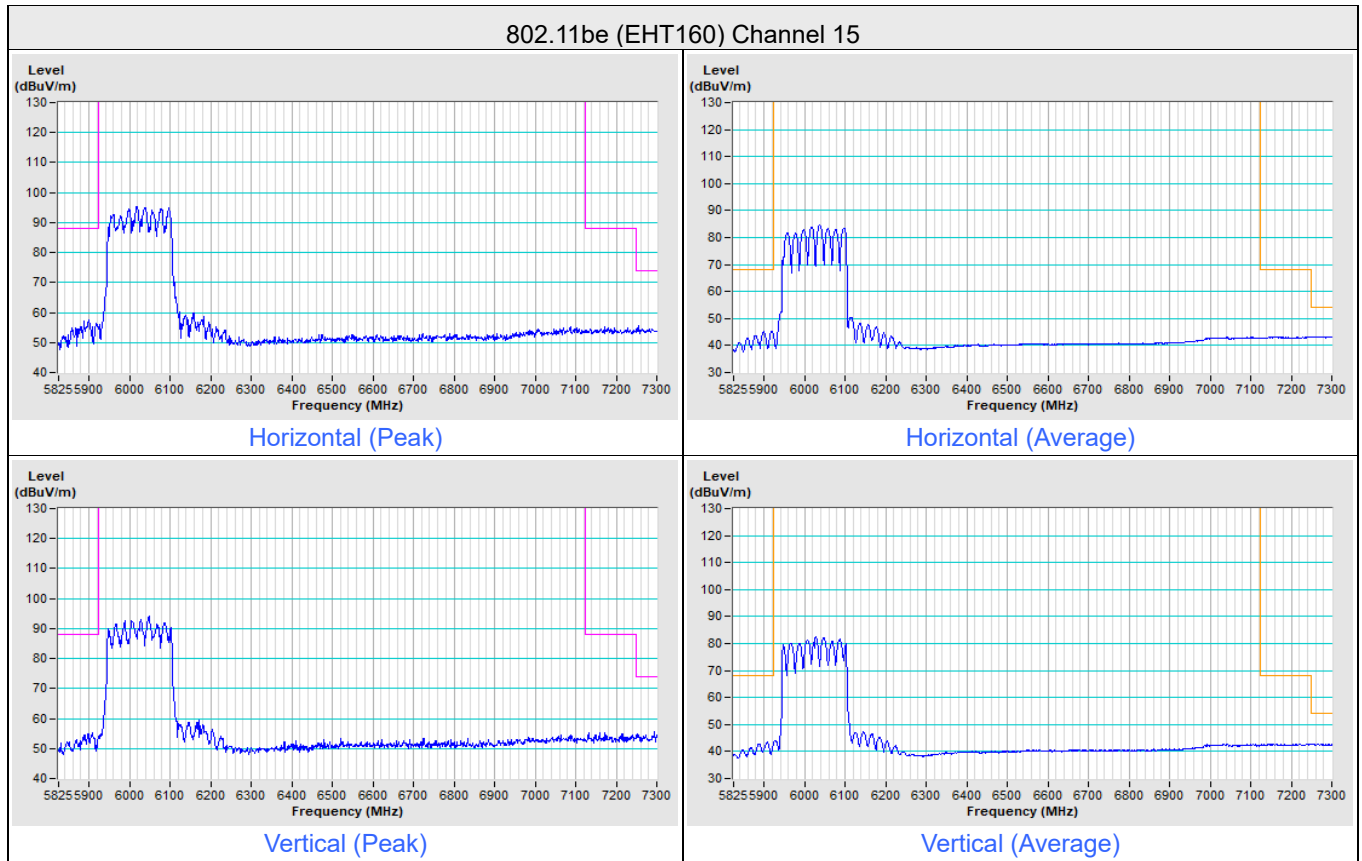


802.11be (EHT160) Channel 207

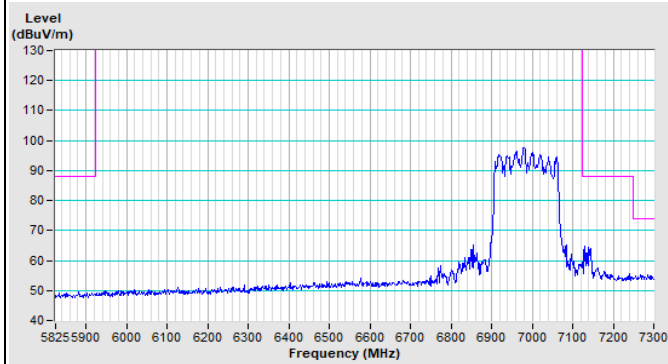


Horizontal (Peak)

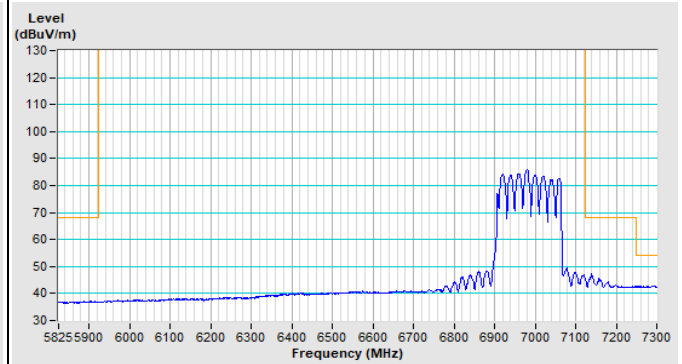

Horizontal (Average)

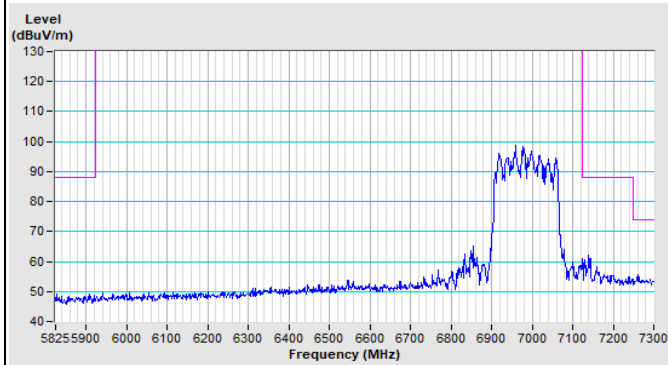


Vertical (Peak)

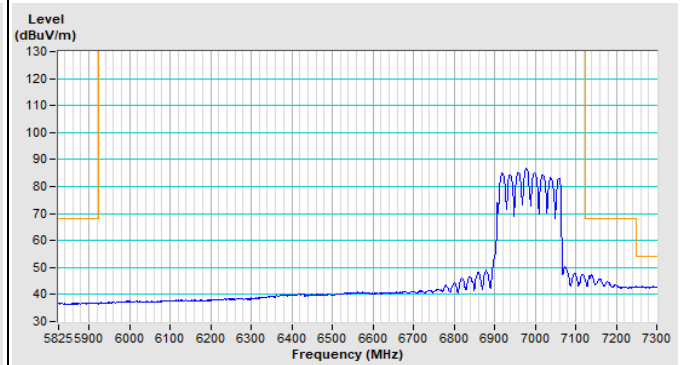


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

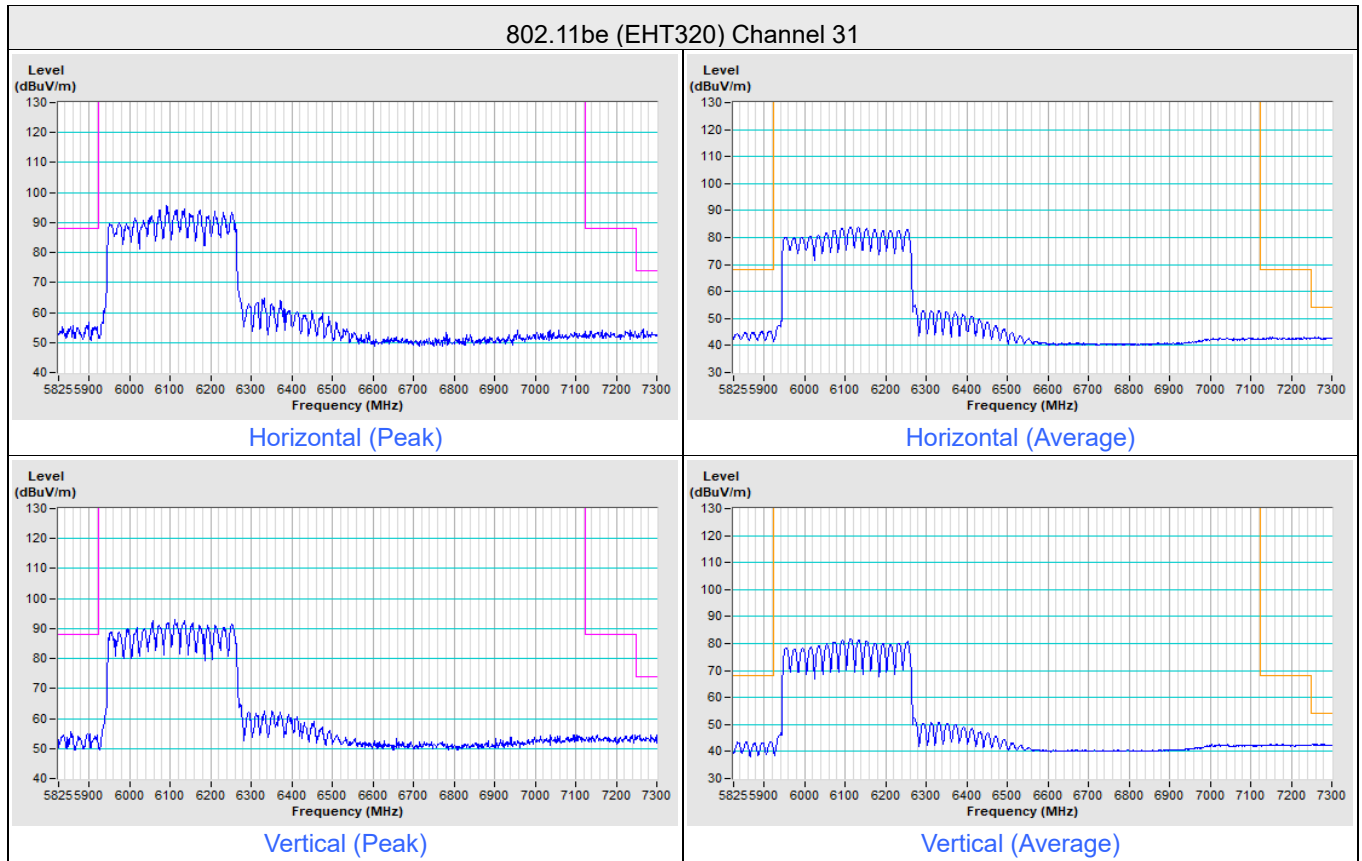


802.11be (EHT320) Channel 191

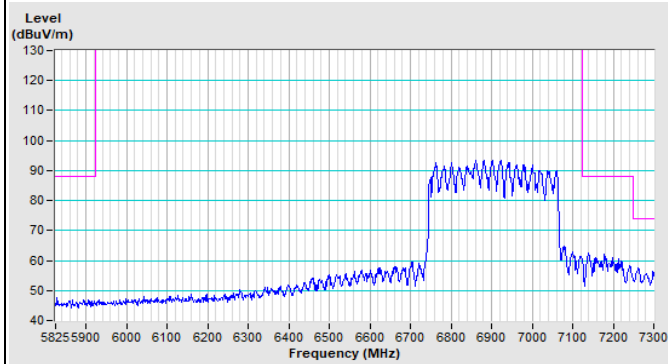


Horizontal (Peak)

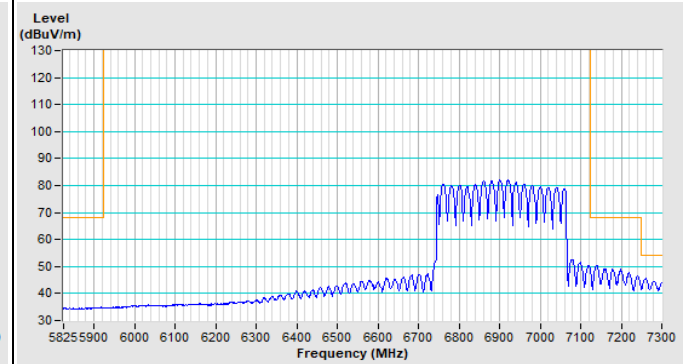

Horizontal (Average)

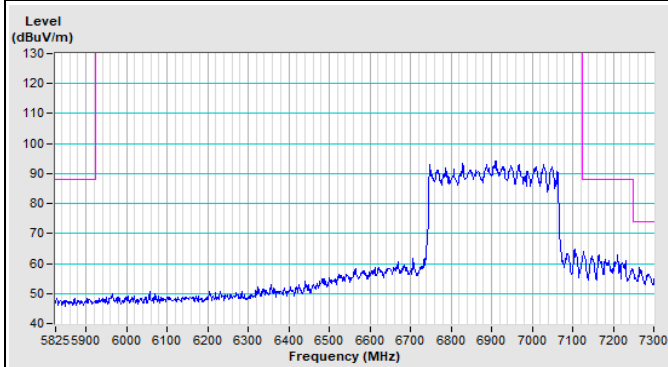


Vertical (Peak)

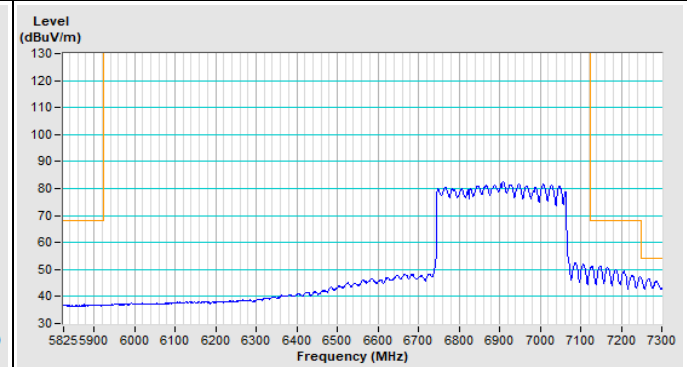

Vertical (Average)

Plot of Other Emission


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

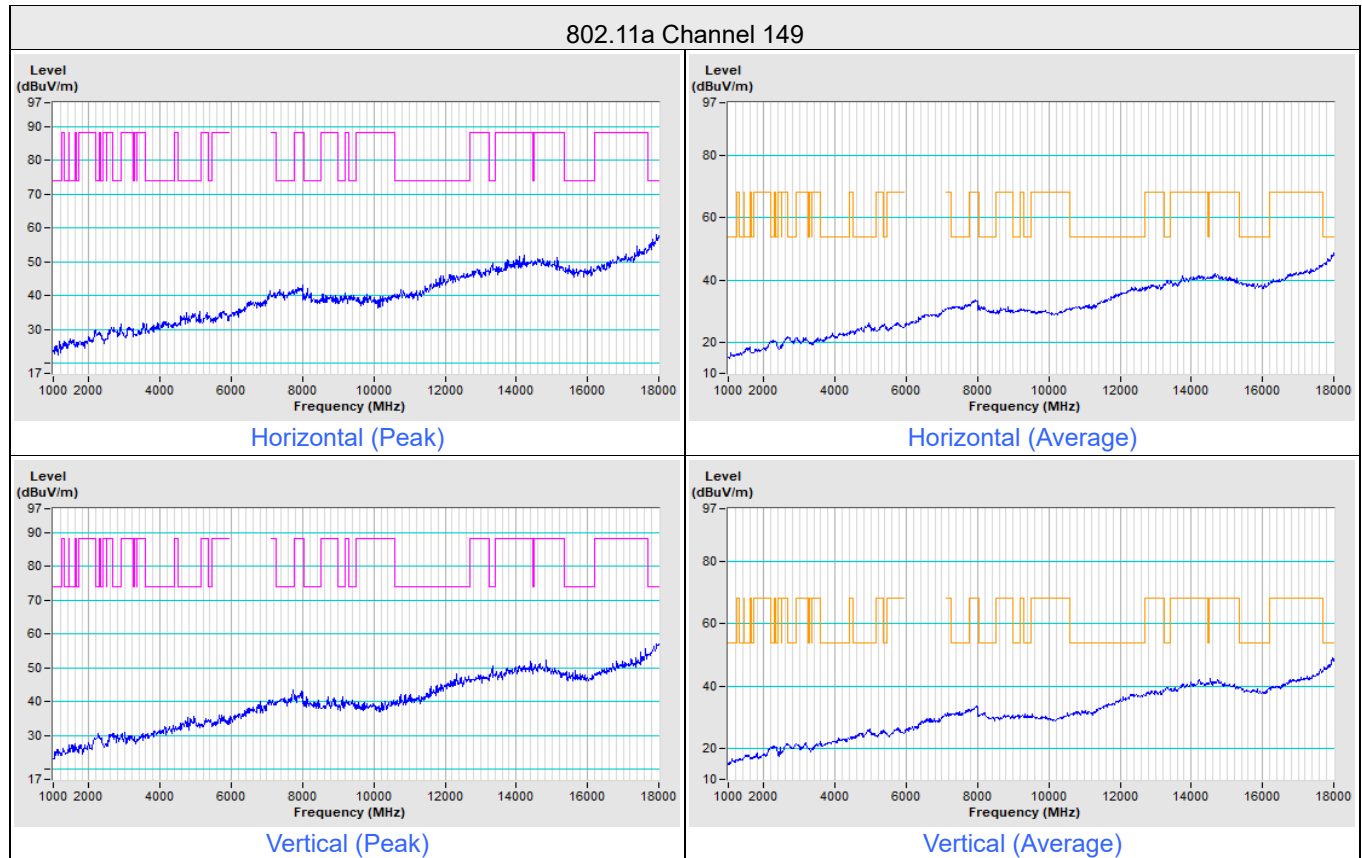

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

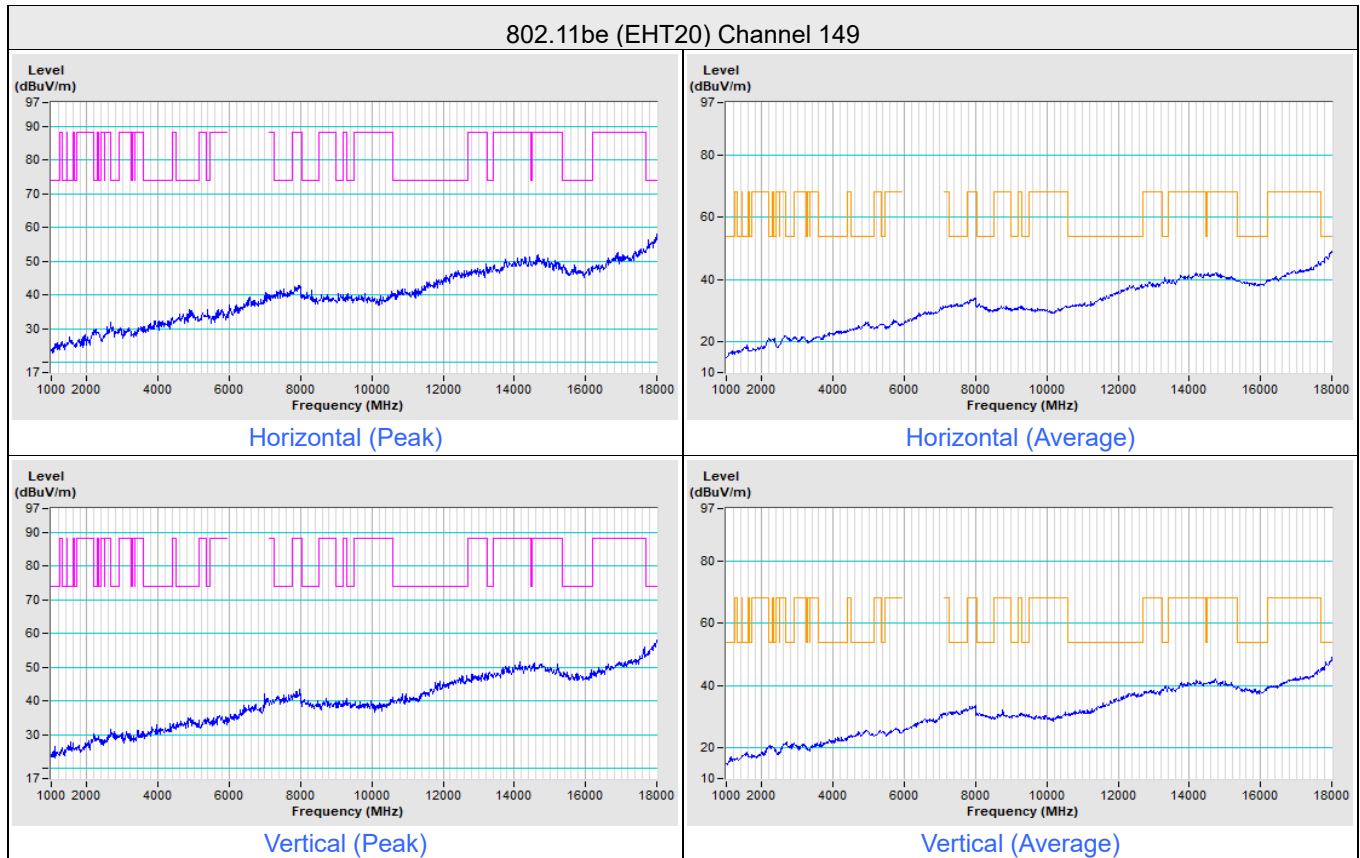

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

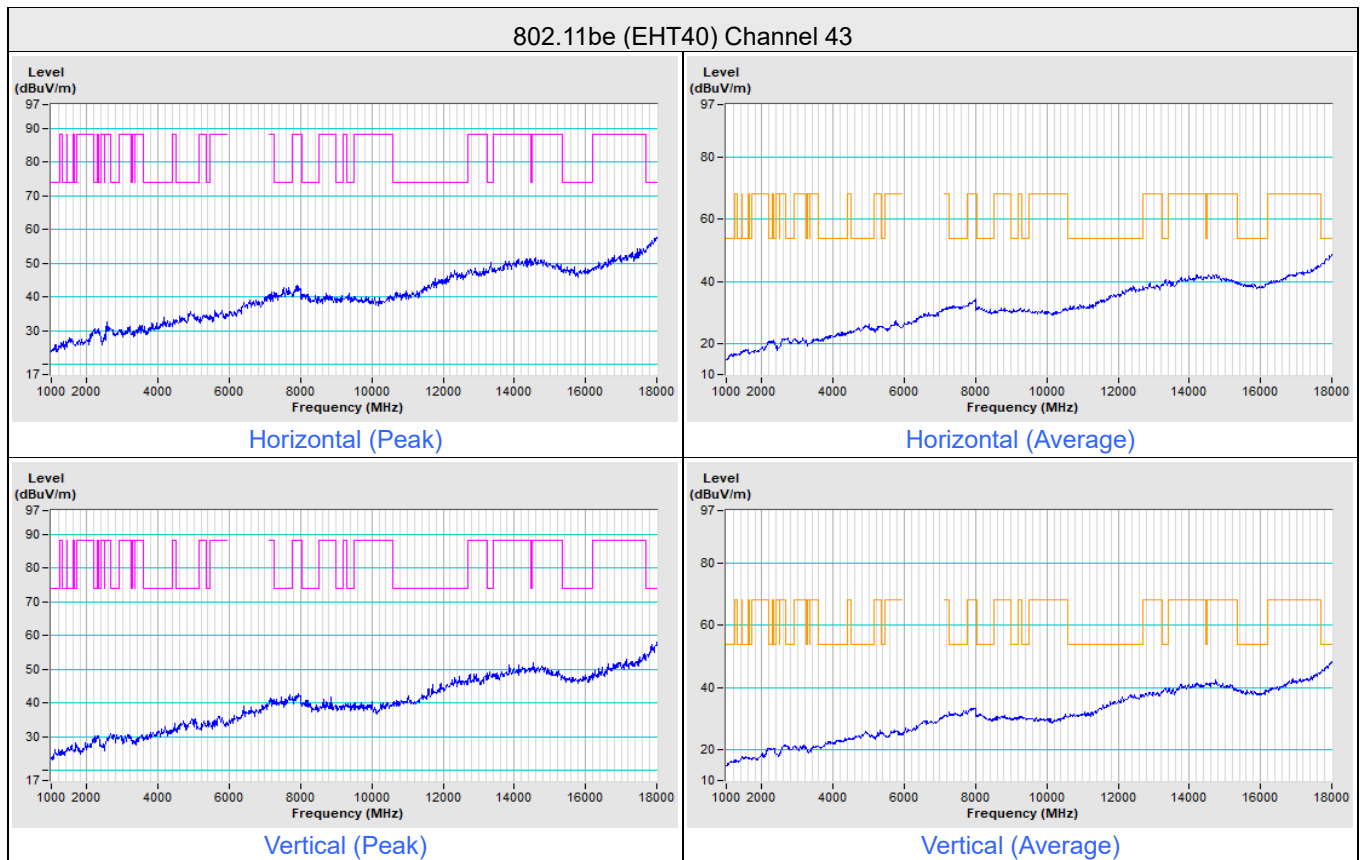

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

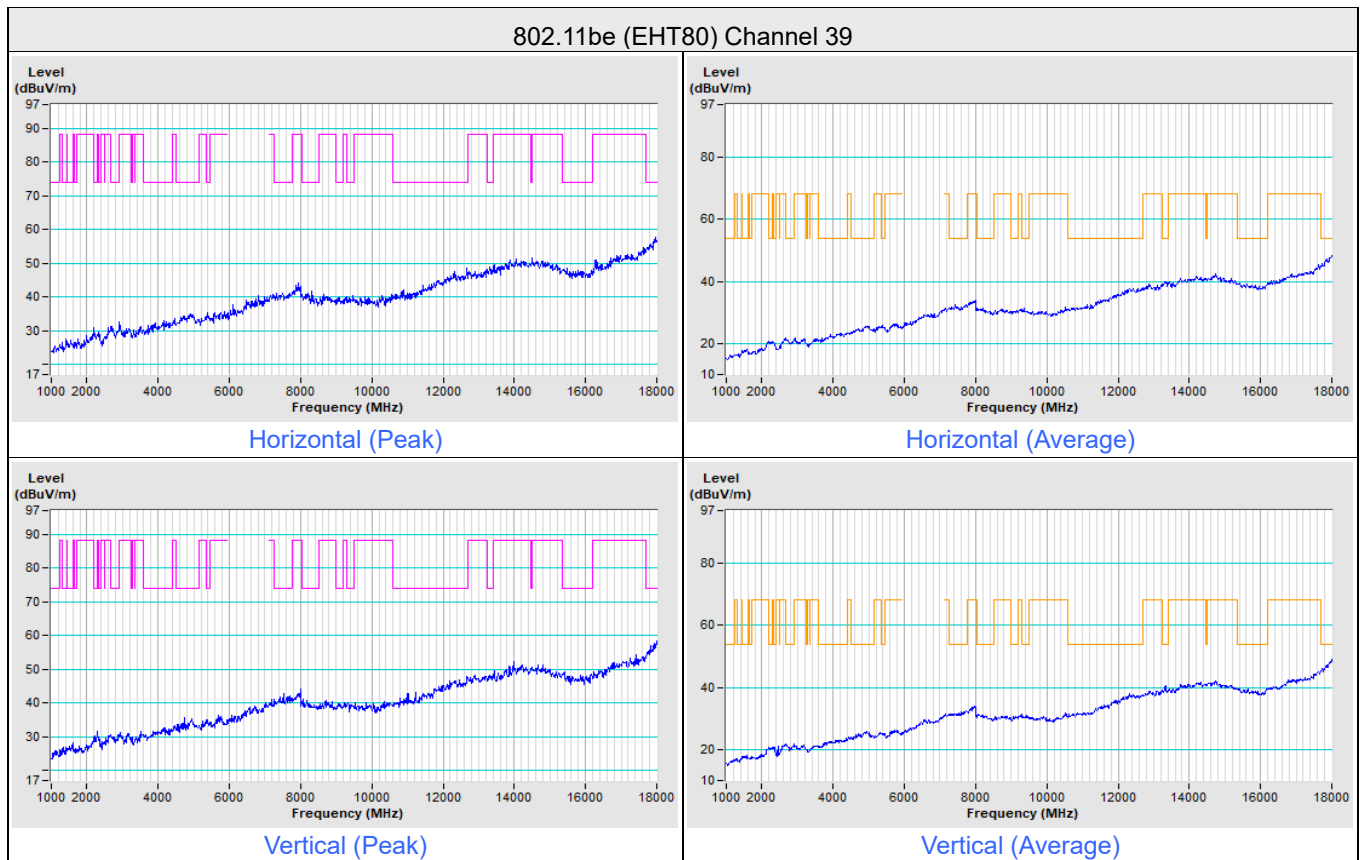

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

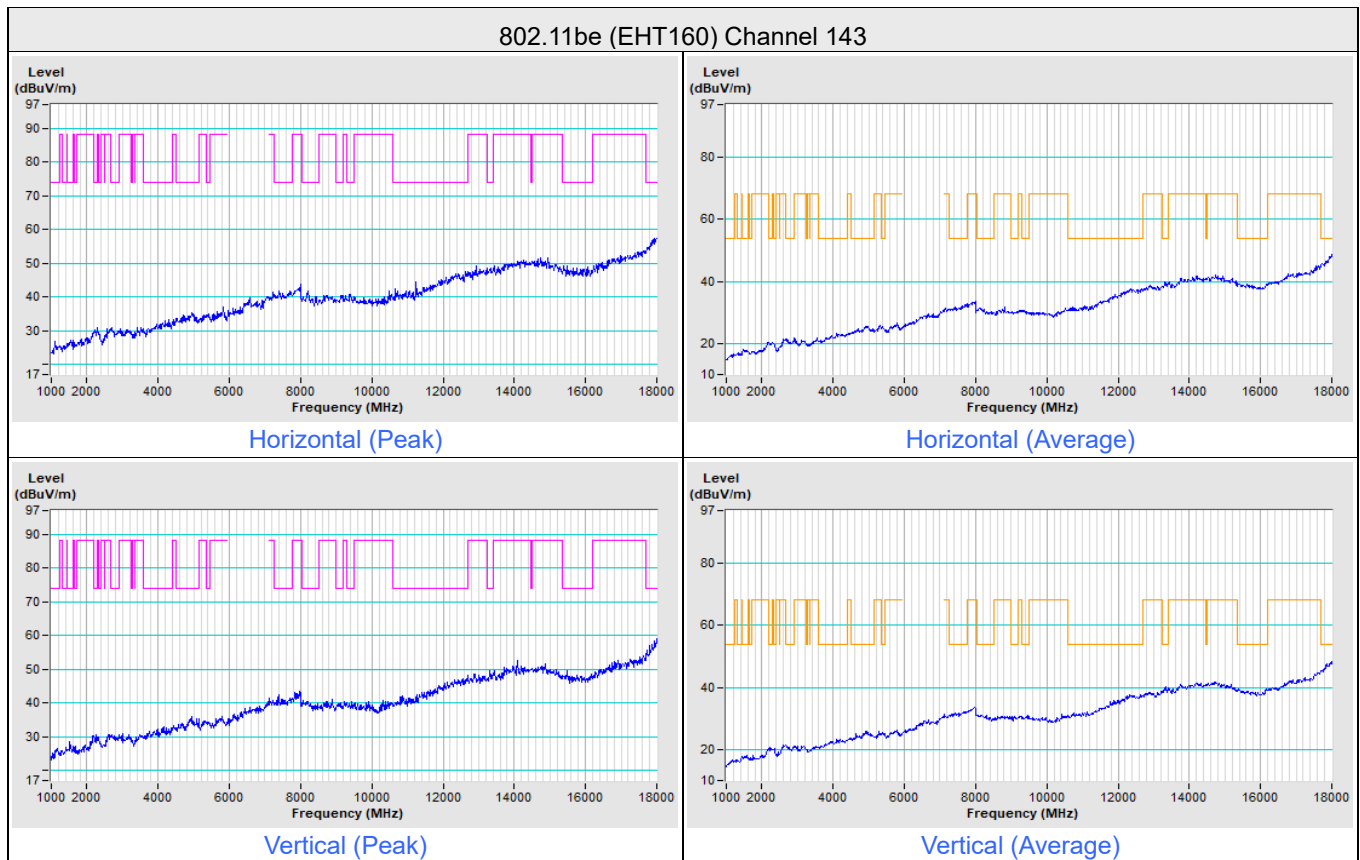

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

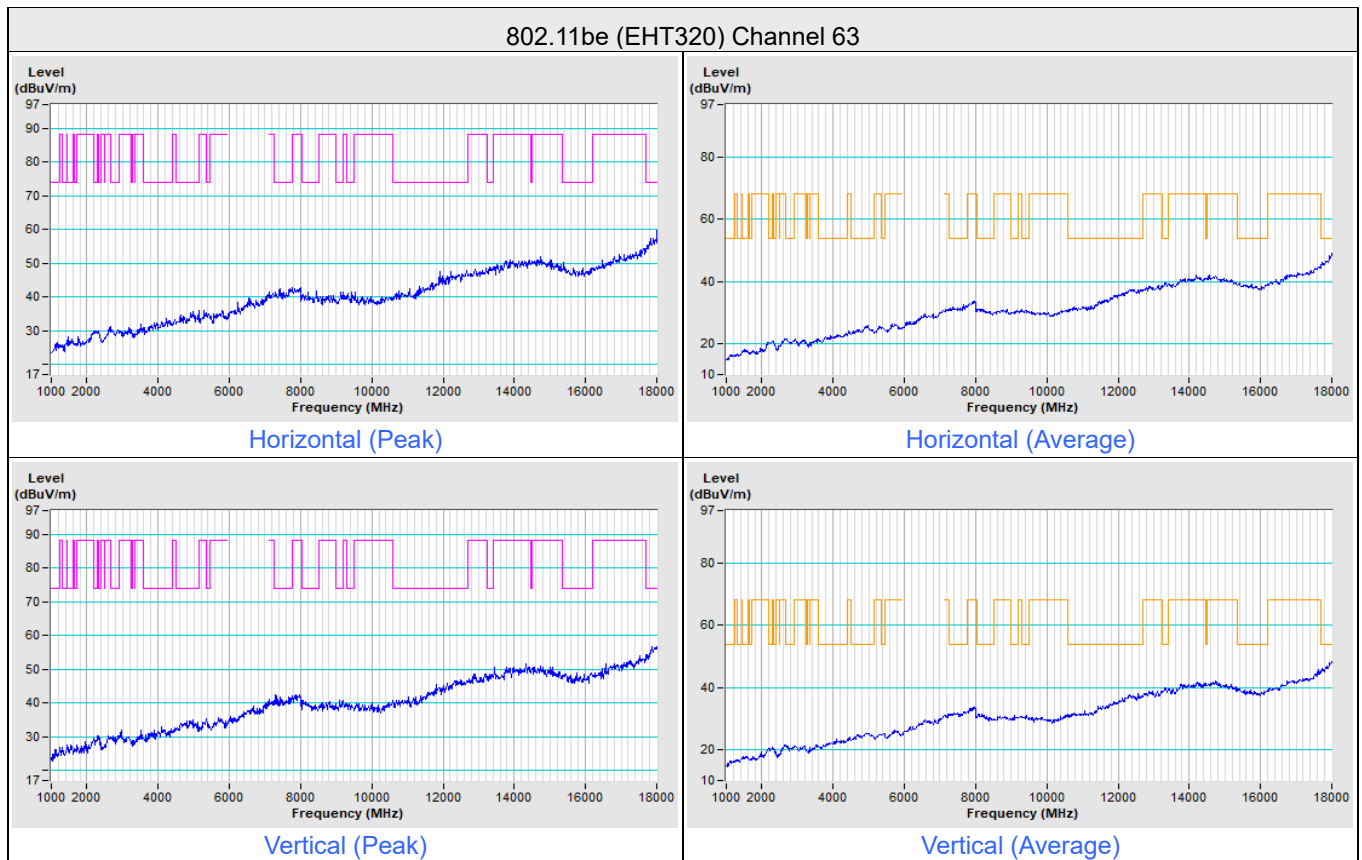

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-(0)2-26052180

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-(0)3-6668565 (SIP)

Tel: 886-(0)3-5120595 (WD)

Hwa Ya EMC/RF/Safety/SAR Lab & Wenming EMC/RF Lab

Tel: 886-(0)3-3183232

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---