

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Report No.: RFBBQZ-WTW-P26040594-3

FCC ID: PY326200664

Product: Nighthawk 5G M8 Pro

Brand: NETGEAR

Model No.: MR8400

Received Date: 2026/5/6

Test Date: 2026/5/15 ~ 2026/7/21

Issued Date: 2026/8/6

Applicant and Manufacturer: NETGEAR, INC.

Address: 3553 N. First St., San Jose, California 95134, United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City 244, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 333, Taiwan

FCC Registration / 788550 / TW0003

Designation Number:

Approved by:

Jeremy Lin

, Date:

2026/8/6

Jeremy Lin / Project Engineer

This test report consists of 163 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Vera Huang / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	7
2.2 Supplementary Information	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Antenna Description of EUT	10
3.3 Channel List.....	11
3.4 Test Mode Applicability and Tested Channel Detail.....	13
3.5 Duty Cycle of Test Signal.....	15
3.6 Test Program Used and Operation Descriptions	16
3.7 Connection Diagram of EUT and Peripheral Devices	16
3.8 Configuration of Peripheral Devices and Cable Connections	16
4 Test Instruments	17
4.1 26 dB Bandwidth	17
4.2 RF Output Power.....	17
4.3 Power Spectral Density	17
4.4 6 dB Bandwidth	17
4.5 Occupied Bandwidth.....	17
4.6 AC Power Conducted Emissions	18
4.7 Unwanted Emissions below 1 GHz	19
4.8 Unwanted Emissions above 1 GHz.....	20
5 Limits of Test Items.....	21
5.1 26 dB Bandwidth	21
5.2 RF Output Power.....	21
5.3 Power Spectral Density	21
5.4 6 dB Bandwidth	22
5.5 Occupied Bandwidth.....	22
5.6 AC Power Conducted Emissions	22
5.7 Unwanted Emissions below 1 GHz	22
5.8 Unwanted Emissions above 1 GHz.....	23
6 Test Arrangements.....	24
6.1 26 dB Bandwidth	24
6.1.1 Test Setup	24
6.1.2 Test Procedure.....	24
6.2 RF Output Power.....	25
6.2.1 Test Setup	25
6.2.2 Test Procedure.....	25
6.3 Power Spectral Density	26
6.3.1 Test Setup	26
6.3.2 Test Procedure.....	26
6.4 6 dB Bandwidth	27
6.4.1 Test Setup	27
6.4.2 Test Procedure.....	27
6.5 Occupied Bandwidth.....	27
6.5.1 Test Setup	27
6.5.2 Test Procedure.....	27
6.6 AC Power Conducted Emissions	28
6.6.1 Test Setup	28
6.6.2 Test Procedure.....	28
6.7 Unwanted Emissions below 1 GHz	29
6.7.1 Test Setup	29
6.7.2 Test Procedure.....	30

6.8	Unwanted Emissions above 1 GHz.....	31
6.8.1	Test Setup	31
6.8.2	Test Procedure	31
7	Test Results of Test Item	32
7.1	26 dB Bandwidth	32
7.2	RF Output Power.....	42
7.3	Power Spectral Density	56
7.4	6 dB Bandwidth	68
7.5	Occupied Bandwidth.....	72
7.6	AC Power Conducted Emissions	84
7.7	Unwanted Emissions below 1 GHz	86
7.8	Unwanted Emissions above 1 GHz.....	90
8	Pictures of Test Arrangements	162
9	Information of the Testing Laboratories	163

Release Control Record

Issue No.	Description	Date Issued
RFBBQZ-WTW-P26040594-3	Original Release	2026/8/6

1 Certificate

Product: Nighthawk 5G M8 Pro

Brand: NETGEAR

Test Model: MR8400

Sample Status: Engineering sample

Applicant and Manufacturer: NETGEAR, INC.

Test Date: 2026/5/15 ~ 2026/7/21

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement procedure: ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024
KDB 789033 D02 General UNII Test Procedure New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(2)	26 dB Bandwidth	Pass	For U-NII-2A U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
---	Occupied Bandwidth	-	Reference only.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -17.08 dB at 0.64703 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -11.7 dB at 773.67 MHz
15.407(b) (1/10) 15.407(b) (2/10) 15.407(b) (3/10) 15.407(b) (4(i)/10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.1 dB at 5728.00 MHz
15.203	Antenna Requirement	Pass	Antenna connector is ipex(MHF) not a standard connector.

Notes:

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. The "Dynamic Frequency Selection measurement" was recorded in DFS test report.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
26 dB Bandwidth	-	206.5 Hz
RF Output Power	-	1.371 dB
Power Spectral Density	-	1.017 dB
6 dB Bandwidth	-	206.5 Hz
Occupied Bandwidth	-	72 Hz
AC Power Conducted Emissions	9 kHz ~ 30 MHz	3.23 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.59 dB
	30 MHz ~ 1 GHz	3.64 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Nighthawk 5G M8 Pro
Brand	NETGEAR
Test Model	MR8400
Status of EUT	Engineering sample
Power Supply Rating	3.85 Vdc from Battery 5 Vdc / 9 Vdc from Adapter
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode 1024QAM for OFDMA in 11ax mode 4096QAM for OFDMA in 11be mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	Up to 2882.4 Mbps
Operating Frequency	5.18 GHz ~ 5.25 GHz 5.25 GHz ~ 5.32 GHz 5.5 GHz ~ 5.72 GHz 5.745 GHz ~ 5.825 GHz
Number of Channel	802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20): 25 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40): 12 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80): 6 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160): 2
Partial RU Mode	Not support
Channel Puncturing	Not support
Output Power	5.18 GHz ~ 5.25 GHz: 55.793 mW (17.47 dBm) 5.25 GHz ~ 5.32 GHz: 55.756 mW (17.46 dBm) 5.5 GHz ~ 5.72 GHz: 56.009 mW (17.48 dBm) 5.745 GHz ~ 5.825 GHz: 55.858 mW (17.47 dBm)
EUT Category	Indoor Access Point

Note:

1. The EUT uses following accessories.

Battery	Brand	NETGEAR
	Model	W-20b
	Power Rating	3.85V, 19.96Wh
AC Adapter 1	Brand	NETGEAR
	Model	2AGD02131
	Part Number	332-11838-01
	AC Input	100-120Vac, 50/60 Hz
	DC Output	5V/9V, 3A/2.34A
	Manufacturer	CHANNEL WELL TECHNOLOGY
AC Adapter 2	Brand	NETGEAR
	Model	ADT-21NPD-09-EPCU
	Part Number	332-11830-01
	AC Input	100-120Vac, 50/60 Hz
	DC Output	5V/9V, 3A/2.34A
	Manufacturer	Honor: Vietnam Honor High Tech Co., Ltd.
Type C Cable	Brand	JI-HAW ELECTRONICS CO., LTD
	Model	310-10092-01
	Signal Line	0.95M

2. There are WLAN (2.4 GHz & 5 GHz & 6 GHz) and WWAN technology used for the EUT.

3. Simultaneously transmission combination.

Combination	Technology			
1	WWAN	WLAN (2.4 GHz)	WLAN (5 GHz)	WLAN (6 GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	RF Chain No.	Antenna Net Gain (dBi)	Frequency range	Antenna Type	Connector Type
WLAN 0	0	0.54	2.4~2.4835GHz	Monopole	ipex(MHF)
		3.04	5.15~5.25GHz		
		3.06	5.25~5.35GHz		
		3.71	5.47~5.725GHz		
		3.65	5.725~5.85GHz		
		3.52	5.850GHz~5.895GHz		
		3.25	5.925GHz~6.425GHz		
		2.45	6.425GHz~6.525GHz		
		2.27	6.525GHz~6.875GHz		
		1.93	6.875Hz~7.125GHz		
WLAN 1	1	0.69	2.4~2.4835GHz	PIFA	ipex(MHF)
		-0.08	5.15~5.25GHz		
		-0.25	5.25~5.35GHz		
		1.44	5.47~5.725GHz		
		1.41	5.725~5.85GHz		
		1.36	5.850GHz~5.895GHz		
		1.67	5.925GHz~6.425GHz		
		1.95	6.425GHz~6.525GHz		
		2.31	6.525GHz~6.875GHz		
		2.01	6.875Hz~7.125GHz		

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ac (VHT160)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX
802.11ax (HE160)	2TX	2RX
802.11be (EHT20)	2TX	2RX
802.11be (EHT40)	2TX	2RX
802.11be (EHT80)	2TX	2RX
802.11be (EHT160)	2TX	2RX

Note: The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), 802.11ac mode for 20 MHz (40 MHz, 80 MHz, 160 MHz), 802.11ax mode for 20 MHz (40 MHz, 80 MHz, 160 MHz) and 802.11be mode for 20 MHz (40 MHz, 80 MHz, 160 MHz). Therefore the investigated worst case is the representative mode in test report.

3.3 Channel List

For 5180 ~ 5320 MHz

8 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	52	5260 MHz
40	5200 MHz	56	5280 MHz
44	5220 MHz	60	5300 MHz
48	5240 MHz	64	5320 MHz

4 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	54	5270 MHz
46	5230 MHz	62	5310 MHz

2 channels are provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz

1 straddle channel is provided for 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
50	5250 MHz

For 5500 ~ 5720 MHz

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	138	5690 MHz
122	5610 MHz		

1 channel is provided for 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
114	5570 MHz

For 5745 ~ 5825 MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency
155	5775 MHz

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT can be used in the following ways: X-axis / Y-axis / Z-axis. Pre-scan these ways and find the worst case as a representative test condition. 2. EUT has the following AC Adapter: AC Adapter 1 / AC Adapter 2. Pre-scan these AC Adapters and find the worst case as a representative test condition. 3. EUT has the following output power mode: Adapter Mode and Battery Mode. The adapter mode is available only when the device is powered by AC adapter connected to AC mains, that also illustrated in the user manual. For unwanted emissions above 1 GHz, pre-scan these power modes and find the worst case as a representative test condition.
Worst Case:	1. X-axis / Y-axis / Z-axis Worst Condition: Y-axis 2. Adapter Worst Condition: AC Adapter 2 3. Power mode Worst Condition for unwanted emissions above 1 GHz: Adapter Mode

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
26 dB Bandwidth	A, B	802.11a	CDD	52, 60, 64, 100, 116, 140, 144	BPSK	6Mb/s
		802.11be (EHT20)	CDD	52, 60, 64, 100, 116, 140, 144	BPSK	MCS0
		802.11be (EHT40)	CDD	54, 62, 102, 110, 134, 142	BPSK	MCS0
		802.11be (EHT80)	CDD	58, 106, 122, 138	BPSK	MCS0
		802.11be (EHT160)	CDD	50, 114	BPSK	MCS0
RF Output Power	A, B	802.11a	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
		802.11be (EHT20)	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
		802.11be (EHT40)	CDD	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
		802.11be (EHT80)	CDD	42, 58, 106, 122, 138, 155	BPSK	MCS0
		802.11be (EHT160)	CDD	50, 114	BPSK	MCS0
Power Spectral Density	A, B	802.11a	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
		802.11be (EHT20)	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
		802.11be (EHT40)	CDD	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
		802.11be (EHT80)	CDD	42, 58, 106, 122, 138, 155	BPSK	MCS0
		802.11be (EHT160)	CDD	50, 114	BPSK	MCS0
6 dB Bandwidth	A, B	802.11a	CDD	144, 149, 157, 165	BPSK	6Mb/s
		802.11be (EHT20)	CDD	144, 149, 157, 165	BPSK	MCS0
		802.11be (EHT40)	CDD	142, 151, 159	BPSK	MCS0
		802.11be (EHT80)	CDD	138, 155	BPSK	MCS0
Occupied Bandwidth	A, B	802.11a	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
		802.11be (EHT20)	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
		802.11be (EHT40)	CDD	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
		802.11be (EHT80)	CDD	42, 58, 106, 122, 138, 155	BPSK	MCS0
		802.11be (EHT160)	CDD	50, 114	BPSK	MCS0

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
AC Power Conducted Emissions	A	802.11be (EHT20)	CDD	116	BPSK	MCS0
Unwanted Emissions below 1 GHz	A	802.11be (EHT20)	CDD	116	BPSK	MCS0
	B	802.11be (EHT20)	CDD	48	BPSK	MCS0
Unwanted Emissions above 1 GHz	A	802.11a	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
		802.11be (EHT20)	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
		802.11be (EHT40)	CDD	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
		802.11be (EHT80)	CDD	42, 58, 106, 122, 138, 155	BPSK	MCS0
		802.11be (EHT160)	CDD	50, 114	BPSK	MCS0
EUT Configure Mode:	A	Adapter Mode				
	B	Battery Mode				

3.5 Duty Cycle of Test Signal


802.11a: Duty cycle = 2.1 ms / 2.11 ms x 100% = 99.5%

802.11be (EHT20): Duty cycle = 100 ms / 100 ms x 100% = 100.0%

802.11be (EHT40): Duty cycle = 100 ms / 100 ms x 100% = 100.0%

802.11be (EHT80): Duty cycle = 100 ms / 100 ms x 100% = 100.0%

802.11be (EHT160): Duty cycle = 100 ms / 100 ms x 100% = 100.0%

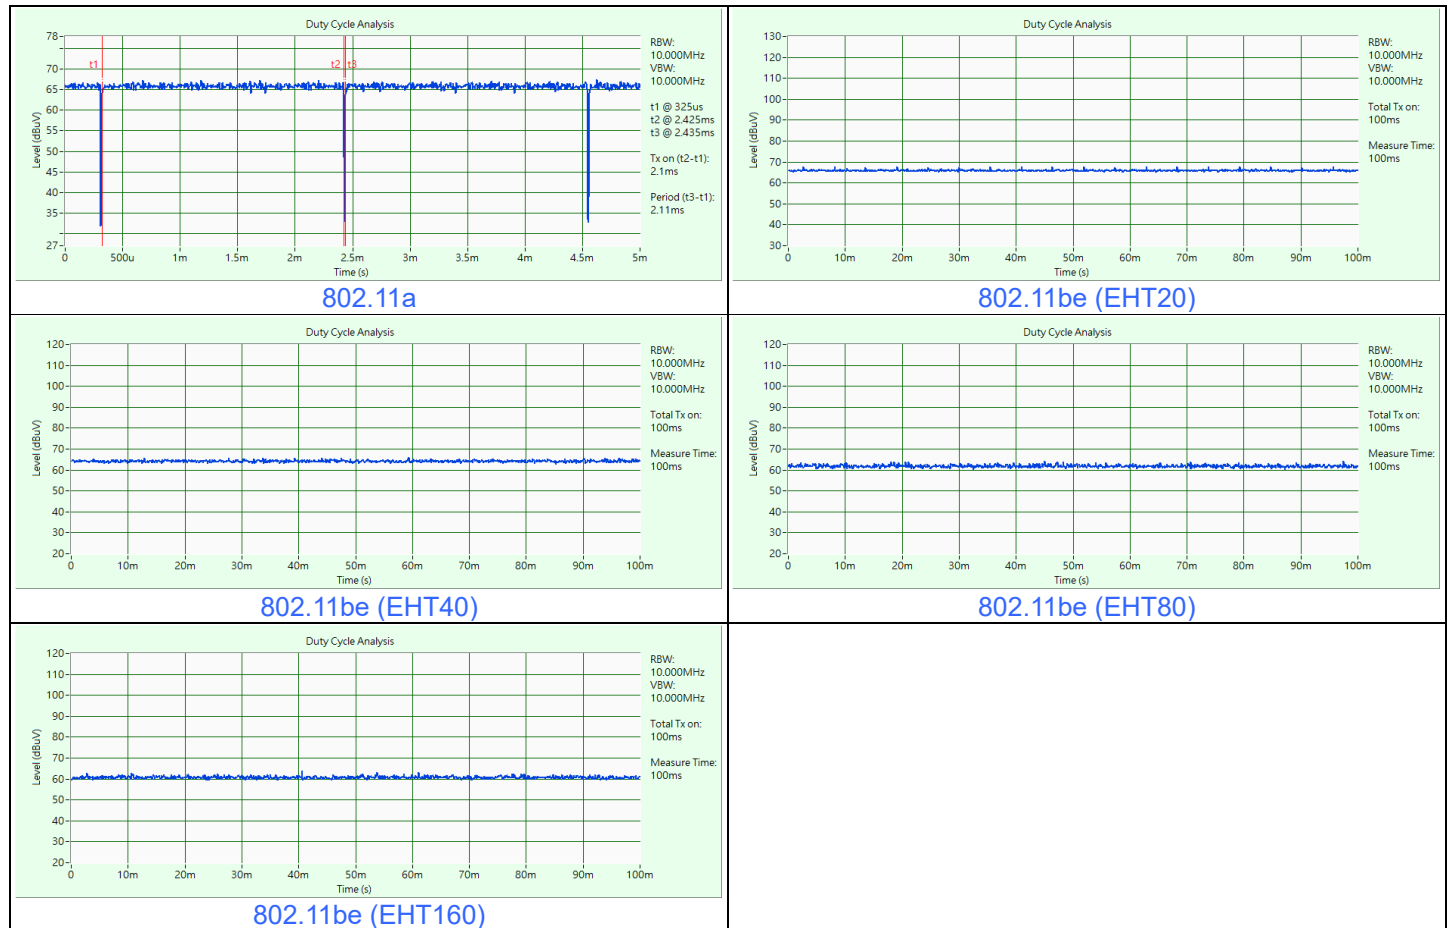


3.6 Test Program Used and Operation Descriptions


Controlling software QRCT_Ver 4.0.210.0 has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

Mode A

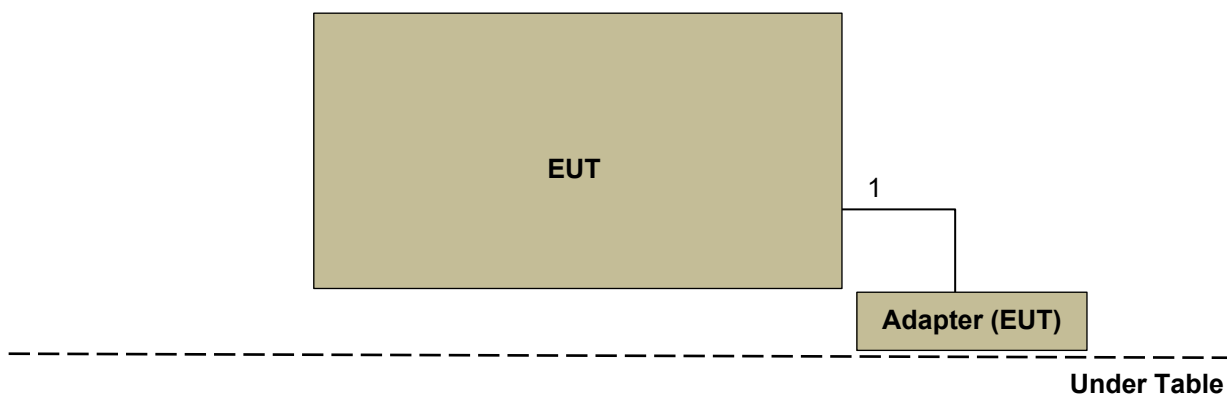

Mode B

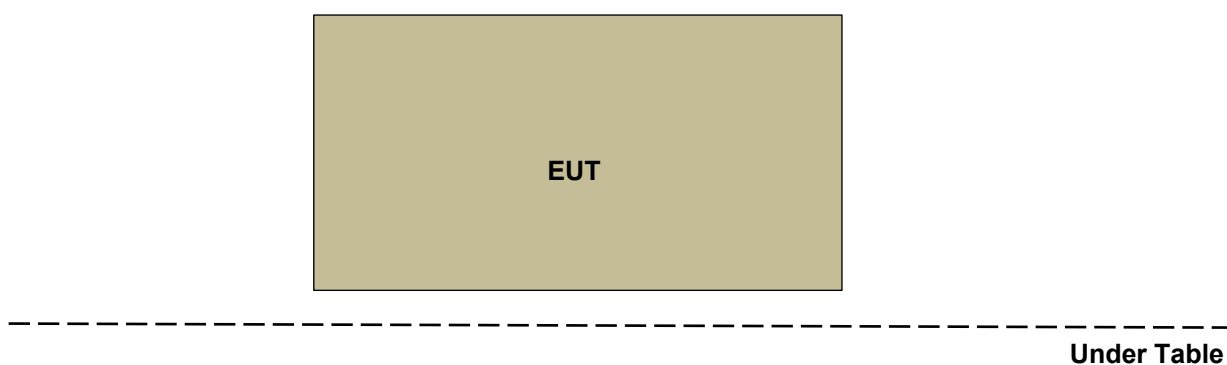

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	Type C Cable	1	0.95	No	0	Accessory of EUT (for RF Setup)

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 26 dB Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2026/5/21	2027/5/20
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Spectrum Analyzer R&S	FSU43	101261	2026/5/4	2027/5/3

Notes:

1. The test was performed in HY - Oven room(Hwaya).
2. Tested Date: 2026/6/17 ~ 2026/6/24

4.2 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2026/5/21	2027/5/20
Peak Power Analyzer Keysight	8990B	MY51000485	2026/1/23	2027/1/22
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Spectrum Analyzer R&S	FSU43	101261	2026/5/4	2027/5/3
USB Power Sensor Anritsu	MA24408A	12994	2025/12/5	2026/12/4
Wideband Power Sensor Keysight	N1923A	MY58020002	2026/1/26	2027/1/25
		MY58140009	2026/1/26	2027/1/25

Notes:

1. The test was performed in HY - Oven room(Hwaya).
2. Tested Date: 2026/6/17 ~ 2026/6/24

4.3 Power Spectral Density

Refer to section 4.1 to get the tested date and information of the instruments.

4.4 6 dB Bandwidth

Refer to section 4.1 to get the tested date and information of the instruments.

4.5 Occupied Bandwidth

Refer to section 4.1 to get the tested date and information of the instruments.

4.6 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance	E1-011279	04	2025/12/4	2026/12/3
	E1-011280	05	2025/12/4	2026/12/3
	E1-011311	09	2025/12/4	2026/12/3
DC LISN Schwarzbeck	NNBM 8126G	8126G-069	2025/11/3	2026/11/2
Diode Pulse Limiter Schwarzbeck	VTSD 9561 F-N	01445	2026/4/18	2027/4/17
EMI Test Receiver R&S	ESCI	100613	2025/11/27	2026/11/26
Extension Power Line EMCI	EMCI-EXP-EU-US	023	2026/3/6	2027/3/5
LISN R&S	ENV216	101826	2026/3/6	2027/3/5
	ESH3-Z5	100311	2025/8/28	2026/8/27
RF Coaxial Cable Woken	5D-FB	Cable-cond1-01	2026/1/3	2027/1/2
Software BVADT	BVADT_Conc_ V7.4.1.0	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2025/8/27	2026/8/26

Notes:

1. The test was performed in HY - Conduction 1.
2. Tested Date: 2026/7/14

4.7 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower inn-co GmbH	MA 4000	010303	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-155	2025/9/16	2026/9/15
EMI Test Receiver R&S	ESR3	102782	2025/12/8	2026/12/7
Loop Antenna TESEQ	HLA 6121	45745	2025/9/1	2026/8/31
Preamplifier Agilent	8447D	2944A10631	2026/4/18	2027/4/17
RF Coaxial Cable Woken	8D-FB	Cable-CH4-01	2026/6/26	2027/6/25
Signal & Spectrum Analyzer R&S	FSW43	101582	2026/5/2	2027/5/1
Software BV ADT	ADT_Radiated_ V7.7.1.1.1	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 3(Hwaya).
2. Tested Date: 2026/7/17

4.8 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower inn-co GmbH	MA 4000	010303	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	5	N/A	N/A
EMI Test Receiver R&S	ESR3	102782	2025/12/8	2026/12/7
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-408	2025/11/9	2026/11/8
	BBHA 9170	9170-480	2025/11/9	2026/11/8
		BBHA9170241	2025/10/28	2026/10/27
		BBHA9170243	2025/11/9	2026/11/8
Preamplifier EMCI	EMC 184045	980116	2025/9/21	2026/9/20
Preamplifier Keysight	83017A	MY53270295	2026/4/18	2027/4/17
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2025/6/30 2026/6/26	2026/6/29 2027/6/25
	EMC102-KM-KM-3000	150929	2025/6/30 2026/6/26	2026/6/29 2027/6/25
RF Coaxial Cable HUBER+SUHNER	EMC104-SM-SM-10000	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-4)	2026/4/18	2027/4/17
	SUCOFLEX 104	Cable-CH4-03(250724)	2026/4/18	2027/4/17
Signal & Spectrum Analyzer R&S	FSW43	101582	2026/5/2	2027/5/1
Software BV ADT	ADT_Radiated_ V7.7.1.1.1	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 3(Hwaya).
2. Tested Date: 2026/5/15 ~ 2026/7/21

5 Limits of Test Items

5.1 26 dB Bandwidth

The results are for reference only.

5.2 RF Output Power

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Points	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Client devices	250mW (24 dBm)

Operation Band	Limit
U-NII-2A	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = 5 log(N_{ANT}/N_{SS}) dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = 10 log(N_{ANT}/N_{SS}) dB.

5.3 Power Spectral Density

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	17 dBm/MHz
	Fixed point-to-point Access Points	
	Indoor Access Point	
	Client devices	11 dBm/MHz

Operation Band	Limit
U-NII-2A	11 dBm/MHz
U-NII-2C	11 dBm/MHz
U-NII-3	30 dBm/500 kHz

5.4 6 dB Bandwidth

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.5 Occupied Bandwidth

The results are for reference only.

5.6 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.7 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.8 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To	Limit	
789033 D02 General UNII Test Procedure New Rules v02r01	Field Strength at 3 m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)

For transmitters operating in the 5.15-5.25 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.25-5.35 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(2)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.47-5.725 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(3)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.725-5.850 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1}	PK: 68.2 (dBμV/m) ^{*1}
	PK: 10 (dBm/MHz) ^{*2}	PK: 105.2 (dBμV/m) ^{*2}
	PK: 15.6 (dBm/MHz) ^{*3}	PK: 110.8 (dBμV/m) ^{*3}
	PK: 27 (dBm/MHz) ^{*4}	PK: 122.2 (dBμV/m) ^{*4}

^{*1} beyond 75 MHz or more above of the band edge.

^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

6 Test Arrangements

6.1 26 dB Bandwidth

6.1.1 Test Setup




Note: The correction factor has already been compensated by the instrument.

6.1.2 Test Procedure

- a. Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = peak.
- d. Trace mode = max-hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.


6.2 RF Output Power

6.2.1 Test Setup

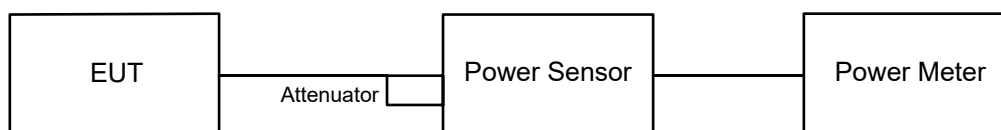

Note: The correction factor has already been compensated by the instrument.

For channel straddling:



Note: The correction factor has already been compensated by the instrument.

6.2.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

For channel straddling:


Method SA-1

- Set span to encompass the entire 99% OBW of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS.
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging (rms) mode.
- Compute power by integrating the spectrum across the 99% OBW of the signal using the instrument's band-power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band-power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 99% OBW of the spectrum.
- Record the max value.

Note: When measuring straddle channel power, use compute power by integrating the spectrum across the 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the 99% OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 99% OBW of the spectrum.

6.3 Power Spectral Density

6.3.1 Test Setup



Note: The correction factor has already been compensated by the instrument.

6.3.2 Test Procedure

For specified measurement bandwidth 1 MHz:

Method SA-1

- Set span to encompass the entire 99% OBW of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS.
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value


For specified measurement bandwidth 500 kHz:

Method SA-1

- Set span to encompass the entire 99% OBW of the signal
- Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS.
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where $\text{BWCF} = 10\log(500 \text{ kHz}/300 \text{ kHz})$.
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value.

6.4 6 dB Bandwidth

6.4.1 Test Setup




Note: The correction factor has already been compensated by the instrument.

6.4.2 Test Procedure

- Set RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.5 Occupied Bandwidth

6.5.1 Test Setup



Note: The correction factor has already been compensated by the instrument.


6.5.2 Test Procedure

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- Step a) through step c) might require iteration to adjust within the specified range.
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

6.6 AC Power Conducted Emissions

6.6.1 Test Setup

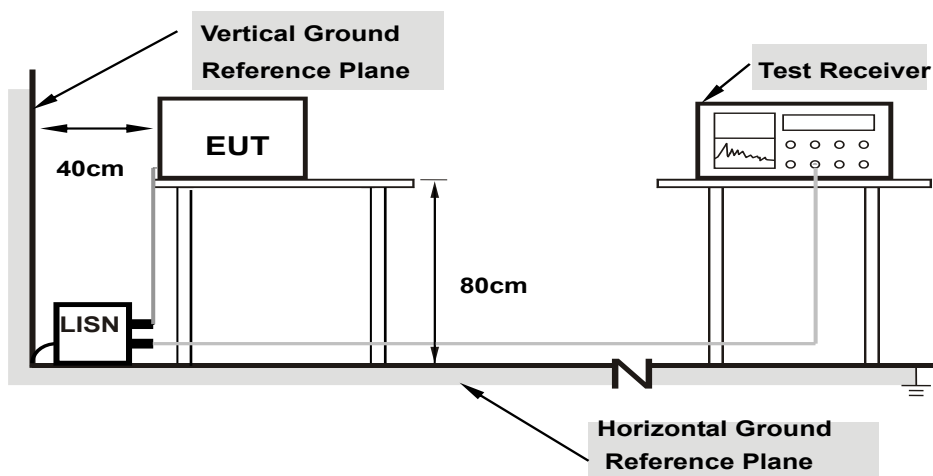

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure


- Exploratory ac power-line conducted emission measurements: The EUT shall be operated on the mid channel and in the mode with highest output power unless the fundamental operates in the AC power-line emission test range then the EUT shall be operated in the range of typical modes of operation.
- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.7 Unwanted Emissions below 1 GHz

6.7.1 Test Setup

For Radiated emission below 30 MHz

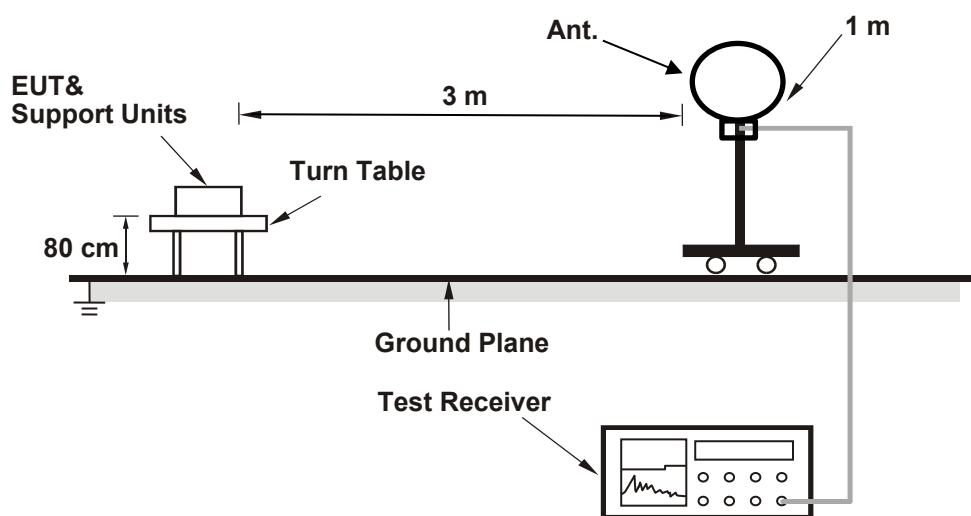

For Radiated emission above 30 MHz

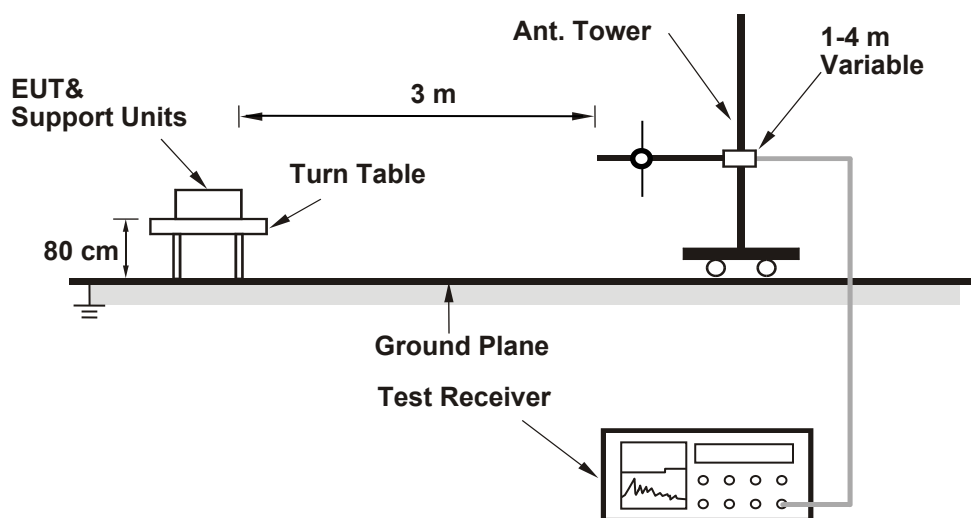

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode (however, peak detector measurements may be used to determine compliance with QP requirements), except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-peak(QP) detect function, Average(AV) detect function, Peak(PK) detect function and specified bandwidth with maximum hold mode when the test frequencies less than or equal to 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz (however, peak detector measurements may be used to determine compliance with QP requirements).
2. All modes of operation were investigated and the worst-case emissions are reported.

6.8 Unwanted Emissions above 1 GHz

6.8.1 Test Setup

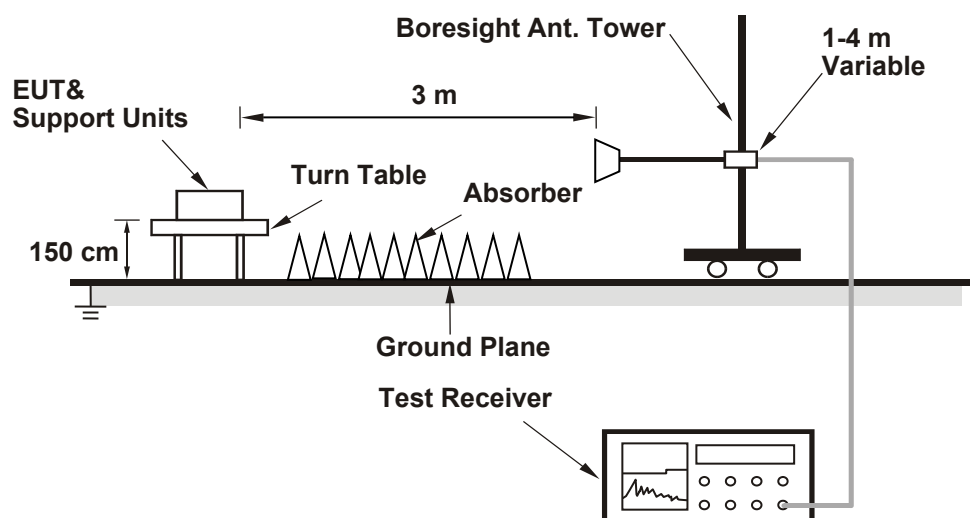

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 26 dB Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Match Tsui
---------------------------	--------------	------------	------------

Mode A

802.11a

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	23.42	23.52
60	5300	23.42	23.32
64	5320	23.46	23.56
100	5500	23.97	23.51
116	5580	23.56	23.50
140	5700	23.64	23.45
144 (U-NII-2C)	5720	16.94	16.55
144 (U-NII-3)	5720	6.69	6.61

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
52	5260	23.42	24.69	>	24
60	5300	23.32	24.67	>	24
64	5320	23.46	24.7	>	24
100	5500	23.51	24.71	>	24
116	5580	23.50	24.71	>	24
140	5700	23.45	24.7	>	24
144 (U-NII-2C)	5720	16.55	23.18	<	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT20)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	23.58	23.68
60	5300	23.50	24.86
64	5320	23.36	23.66
100	5500	23.91	23.86
116	5580	24.88	24.76
140	5700	24.14	24.92
144 (U-NII-2C)	5720	16.82	17.73
144 (U-NII-3)	5720	6.84	7.21

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
52	5260	23.58	24.72	>	24
60	5300	23.50	24.71	>	24
64	5320	23.36	24.68	>	24
100	5500	23.86	24.77	>	24
116	5580	24.76	24.93	>	24
140	5700	24.14	24.82	>	24
144 (U-NII-2C)	5720	16.82	23.25	<	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT40)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
54	5270	45.04	45.07
62	5310	44.01	44.58
102	5510	46.71	46.03
110	5550	45.57	45.07
134	5670	45.45	45.04
142 (U-NII-2C)	5710	38.05	37.47
142 (U-NII-3)	5710	7.67	7.36

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
54	5270	45.04	27.53	>	24
62	5310	44.01	27.43	>	24
102	5510	46.03	27.63	>	24
110	5550	45.07	27.53	>	24
134	5670	45.04	27.53	>	24
142 (U-NII-2C)	5710	37.47	26.73	>	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT80)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
58	5290	90.01	89.30
106	5530	91.23	88.81
122	5610	89.64	86.85
138 (U-NII-2C)	5690	79.68	80.24
138 (U-NII-3)	5690	11.27	10.19

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
58	5290	89.30	30.5	>	24
106	5530	88.81	30.48	>	24
122	5610	86.85	30.38	>	24
138 (U-NII-2C)	5690	79.68	30.01	>	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.






802.11be (EHT160)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1)	5250	85.28	86.66
50 (U-NII-2A)	5250	86.70	87.37
114	5570	176.27	173.67

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
50 (U-NII-2A)	5250	86.70	30.38	>	24
114	5570	173.67	33.39	>	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

Spectrum Plot of Minimum Value

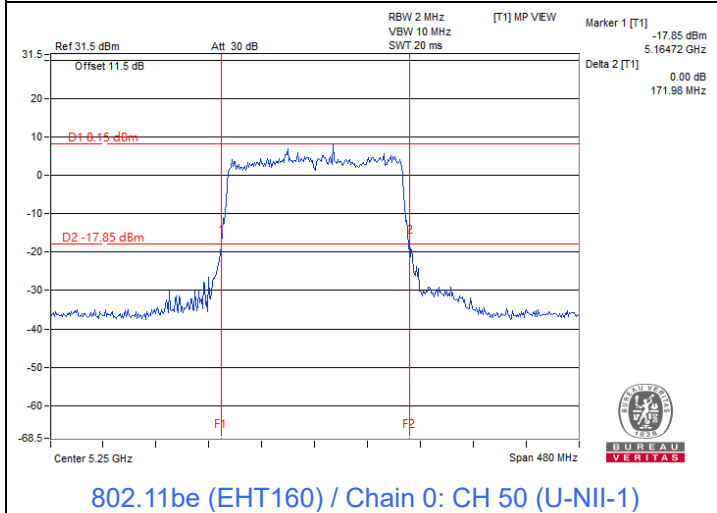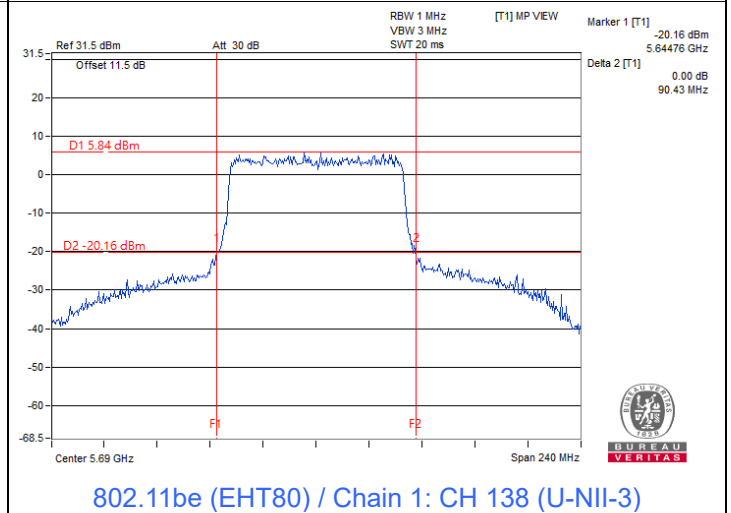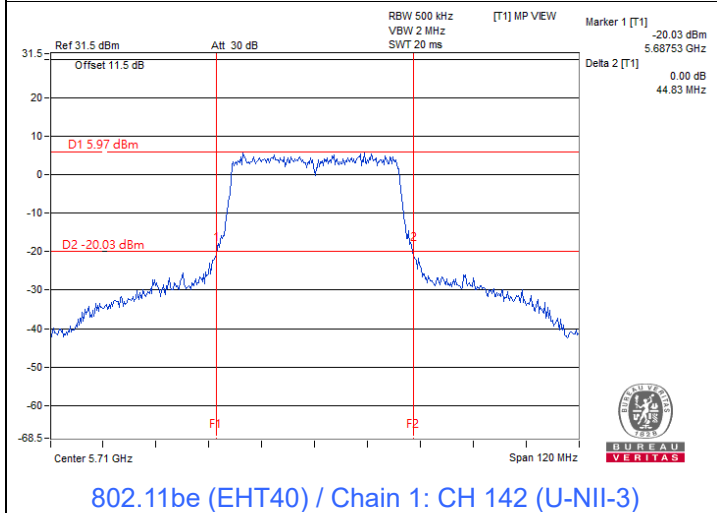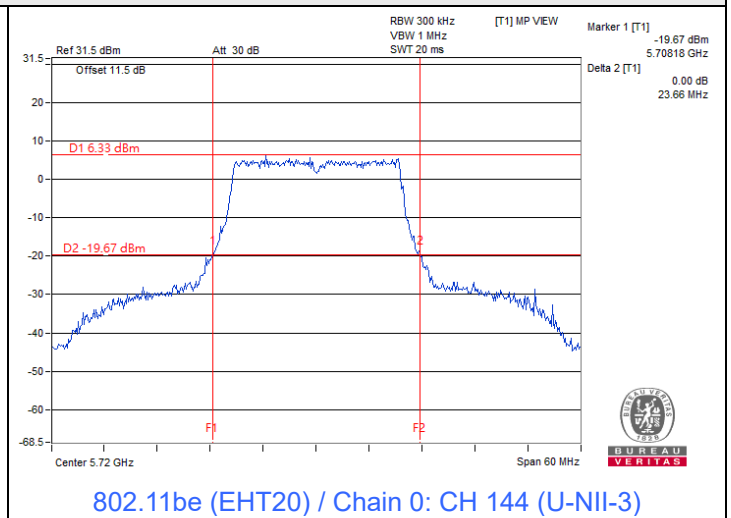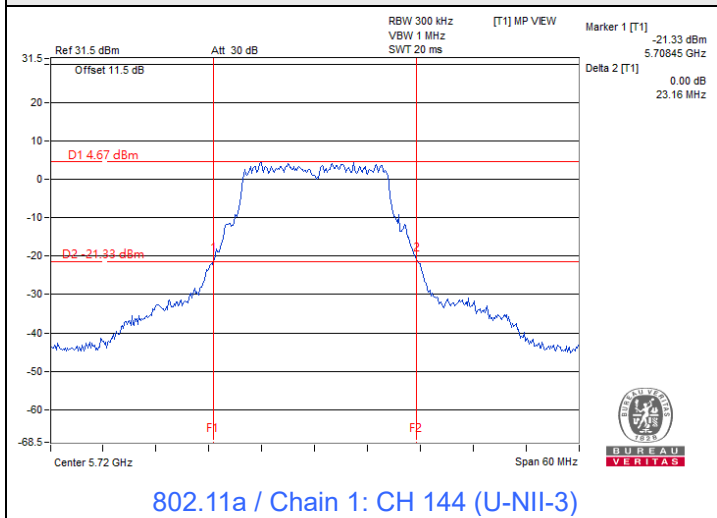

Notes:

1. For U-NII-2C straddle channel = 5725 MHz - Marker 1
2. For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz
3. For U-NII-1 straddle channel = 5250 MHz - Marker 1
4. For U-NII-2A straddle channel = Marker 1 + Delta 2 - 5250 MHz

Mode B

802.11a

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	23.90	23.90
60	5300	23.69	23.49
64	5320	23.24	23.13
100	5500	23.72	23.61
116	5580	23.45	23.46
140	5700	23.82	23.86
144 (U-NII-2C)	5720	16.86	16.74
144 (U-NII-3)	5720	6.86	6.95

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
52	5260	23.90	24.78	>	24
60	5300	23.49	24.7	>	24
64	5320	23.13	24.64	>	24
100	5500	23.61	24.73	>	24
116	5580	23.45	24.7	>	24
140	5700	23.82	24.76	>	24
144 (U-NII-2C)	5720	16.74	23.23	<	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT20)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	23.26	23.33
60	5300	23.65	23.13
64	5320	23.54	23.58
100	5500	23.59	24.65
116	5580	23.95	24.09
140	5700	23.74	24.10
144 (U-NII-2C)	5720	16.52	16.80
144 (U-NII-3)	5720	6.74	7.13

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
52	5260	23.26	24.66	>	24
60	5300	23.13	24.64	>	24
64	5320	23.54	24.71	>	24
100	5500	23.59	24.72	>	24
116	5580	23.95	24.79	>	24
140	5700	23.74	24.75	>	24
144 (U-NII-2C)	5720	16.52	23.18	<	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT40)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
54	5270	45.24	45.18
62	5310	44.44	44.37
102	5510	45.30	45.00
110	5550	44.68	45.05
134	5670	45.00	45.23
142 (U-NII-2C)	5710	37.35	37.21
142 (U-NII-3)	5710	7.91	7.13

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
54	5270	45.18	27.54	>	24
62	5310	44.37	27.47	>	24
102	5510	45.00	27.53	>	24
110	5550	44.68	27.5	>	24
134	5670	45.00	27.53	>	24
142 (U-NII-2C)	5710	37.21	26.7	>	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT80)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
58	5290	88.53	88.90
106	5530	90.37	87.67
122	5610	89.59	88.53
138 (U-NII-2C)	5690	79.83	78.59
138 (U-NII-3)	5690	10.06	8.75

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
58	5290	88.53	30.47	>	24
106	5530	87.67	30.42	>	24
122	5610	88.53	30.47	>	24
138 (U-NII-2C)	5690	78.59	29.95	>	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.






802.11be (EHT160)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1)	5250	86.90	86.53
50 (U-NII-2A)	5250	87.47	87.23
114	5570	175.77	172.41

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
50 (U-NII-2A)	5250	87.23	30.4	>	24
114	5570	172.41	33.36	>	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

Spectrum Plot of Minimum Value

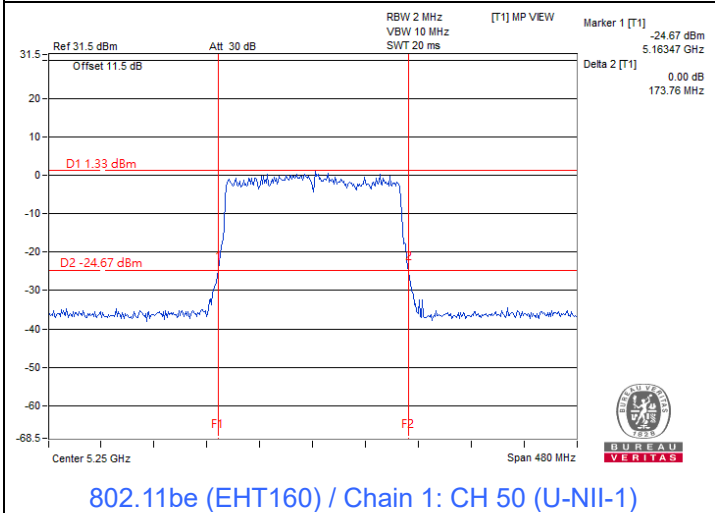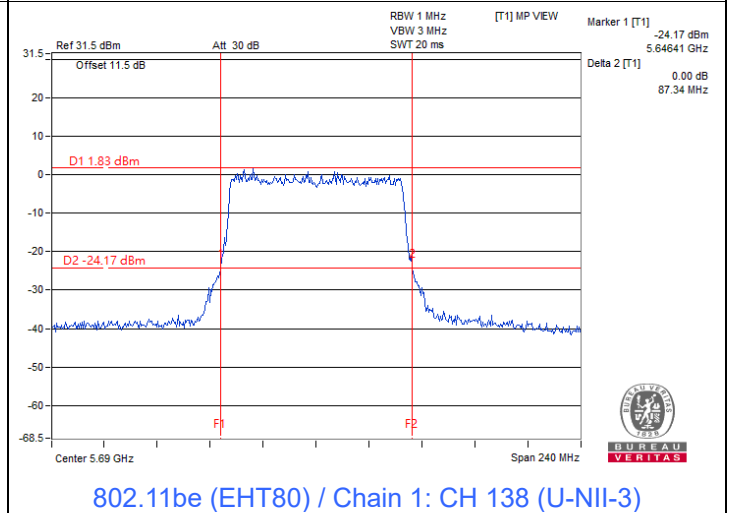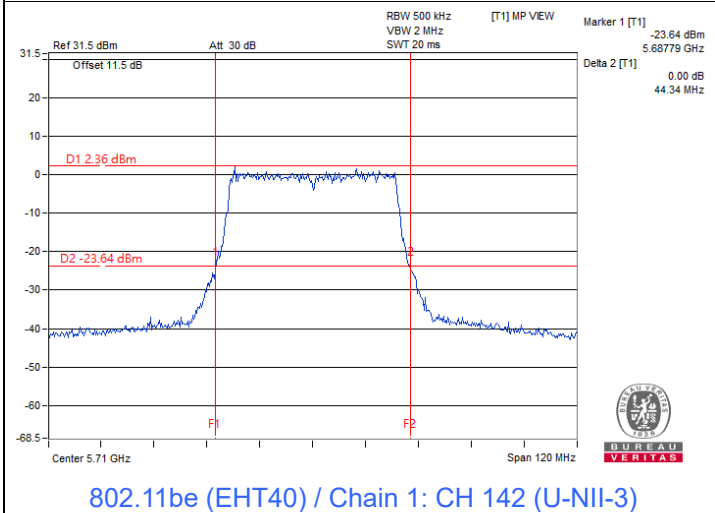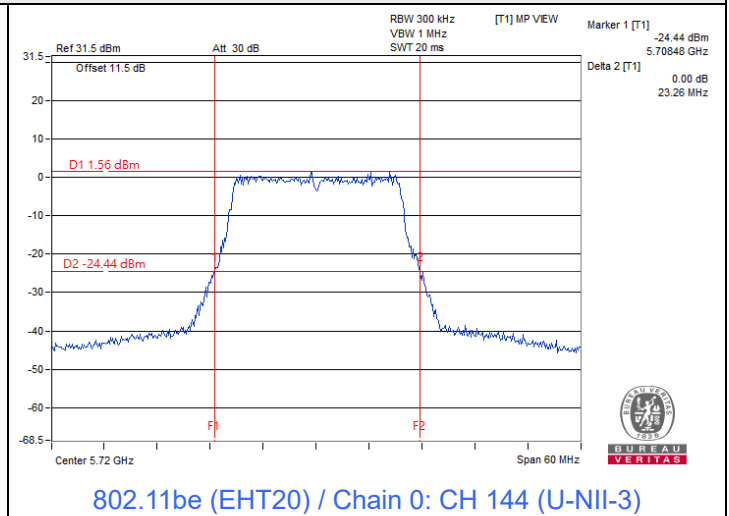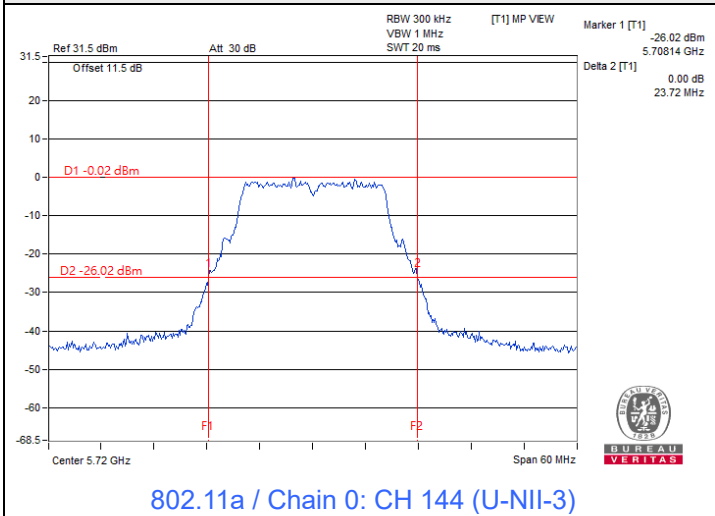

Notes:

1. For U-NII-2C straddle channel = 5725 MHz - Marker 1
2. For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz
3. For U-NII-1 straddle channel = 5250 MHz - Marker 1
4. For U-NII-2A straddle channel = Marker 1 + Delta 2 - 5250 MHz

7.2 RF Output Power

Environmental Conditions:	25°C, 60% RH	Tested By:	Match Tsui
---------------------------	--------------	------------	------------

Mode A

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
36	5180	14.41	14.30	54.521	17.37	30	Pass
40	5200	14.52	14.39	55.793	17.47	30	Pass
48	5240	14.50	14.32	55.223	17.42	30	Pass
52	5260	14.37	14.52	55.667	17.46	24	Pass
60	5300	14.63	14.15	55.042	17.41	24	Pass
64	5320	14.57	14.24	55.188	17.42	24	Pass
100	5500	14.34	14.48	55.219	17.42	24	Pass
116	5580	14.53	14.19	54.621	17.37	24	Pass
140	5700	14.57	14.29	55.495	17.44	24	Pass
*144 (U-NII-2C)	5720	11.89	11.68	30.176	14.80	23.18	Pass
*144 (U-NII-3)	5720	7.59	7.58	11.469	10.60	30	Pass
149	5745	14.49	14.43	55.852	17.47	30	Pass
157	5785	14.45	14.38	55.277	17.43	30	Pass
165	5825	14.36	14.32	54.329	17.35	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.04 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.06 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 3.71 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 3.65 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
36	5180	14.39	14.28	54.271	17.35	30	Pass
40	5200	14.45	14.44	55.658	17.46	30	Pass
48	5240	14.42	14.38	55.085	17.41	30	Pass
52	5260	14.51	14.30	55.164	17.42	24	Pass
60	5300	14.60	14.30	55.756	17.46	24	Pass
64	5320	14.58	14.32	55.747	17.46	24	Pass
100	5500	14.40	14.48	55.597	17.45	24	Pass
116	5580	14.76	14.16	55.984	17.48	24	Pass
140	5700	14.55	14.12	54.333	17.35	24	Pass
*144 (U-NII-2C)	5720	12.17	11.79	31.582	14.99	23.25	Pass
*144 (U-NII-3)	5720	7.11	6.75	9.872	9.94	30	Pass
149	5745	14.46	14.39	55.404	17.44	30	Pass
157	5785	14.48	14.35	55.281	17.43	30	Pass
165	5825	14.50	14.32	55.223	17.42	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.04 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.06 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 3.71 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 3.65 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
38	5190	14.43	14.34	54.898	17.40	30	Pass
46	5230	14.43	14.29	54.587	17.37	30	Pass
54	5270	14.46	14.23	54.41	17.36	24	Pass
62	5310	14.36	14.36	54.58	17.37	24	Pass
102	5510	14.33	14.59	55.876	17.47	24	Pass
110	5550	14.61	14.33	56.009	17.48	24	Pass
134	5670	14.55	14.22	54.934	17.40	24	Pass
*142 (U-NII-2C)	5710	12.96	11.69	34.527	15.38	24	Pass
*142 (U-NII-3)	5710	5.56	4.39	6.345	8.02	30	Pass
151	5755	14.46	14.39	55.404	17.44	30	Pass
159	5795	14.39	14.53	55.858	17.47	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.04 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.06 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 3.71 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 3.65 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
42	5210	14.42	14.29	54.523	17.37	30	Pass
58	5290	14.53	14.34	55.544	17.45	24	Pass
106	5530	14.41	14.49	55.725	17.46	24	Pass
122	5610	14.68	14.19	55.619	17.45	24	Pass
*138 (U-NII-2C)	5690	12.83	12.87	38.551	15.86	24	Pass
*138 (U-NII-3)	5690	2.93	1.99	3.545	5.50	30	Pass
155	5775	14.58	14.22	55.132	17.41	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.04 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.06 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 3.71 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 3.65 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.


802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
*50 (U-NII-1)	5250	11.18	10.31	23.862	13.78	30	Pass
*50 (U-NII-2A)	5250	10.82	9.71	21.432	13.31	24	Pass
114	5570	14.54	14.35	55.672	17.46	24	Pass


Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.04 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.06 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 3.71 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.


Spectrum Plot for channel straddling

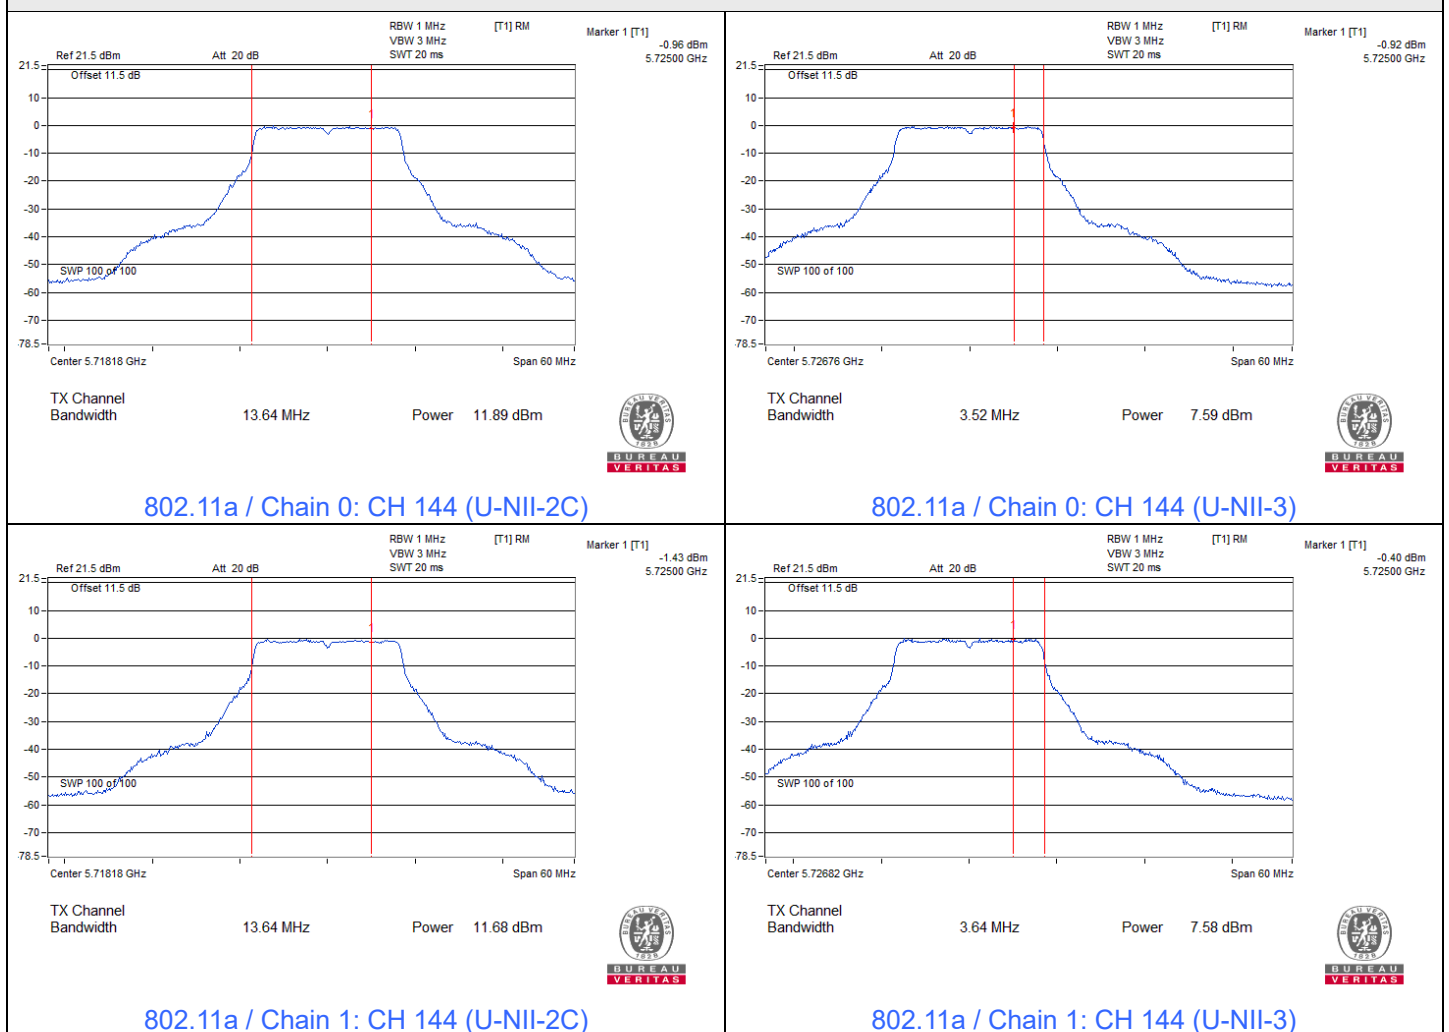


Spectrum Plot for channel straddling

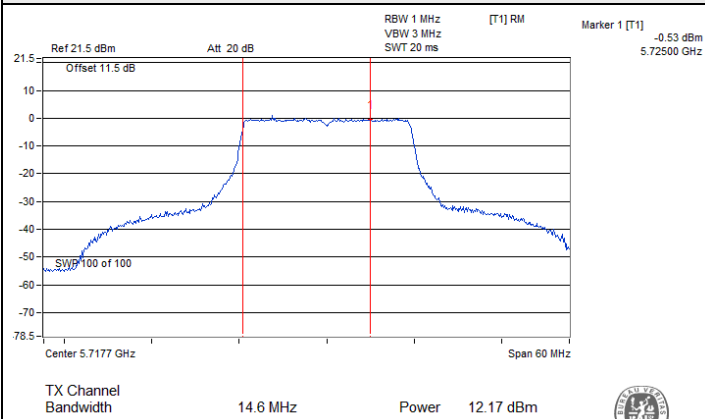


802.11be (EHT20) / Chain 0: CH 144 (U-NII-2C)

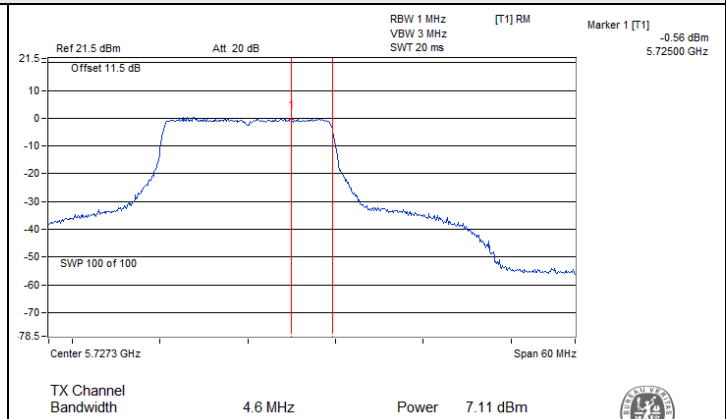


802.11be (EHT20) / Chain 0: CH 144 (U-NII-3)

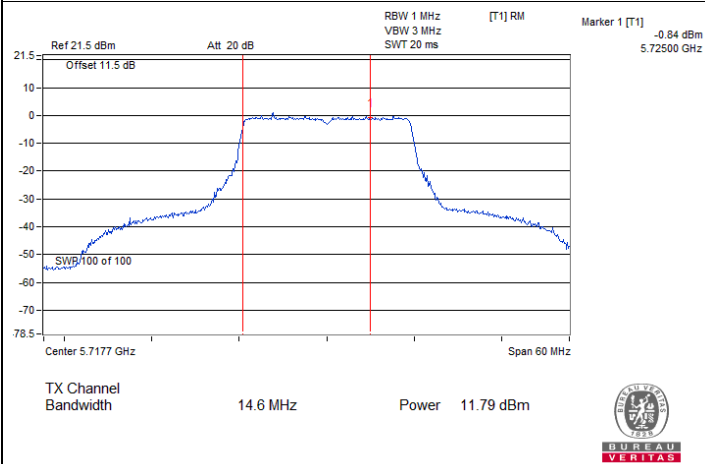


802.11be (EHT20) / Chain 1: CH 144 (U-NII-2C)

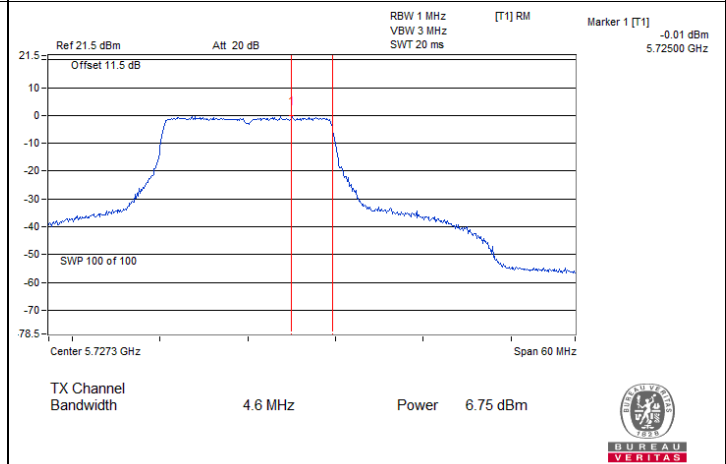

802.11be (EHT20) / Chain 1: CH 144 (U-NII-3)

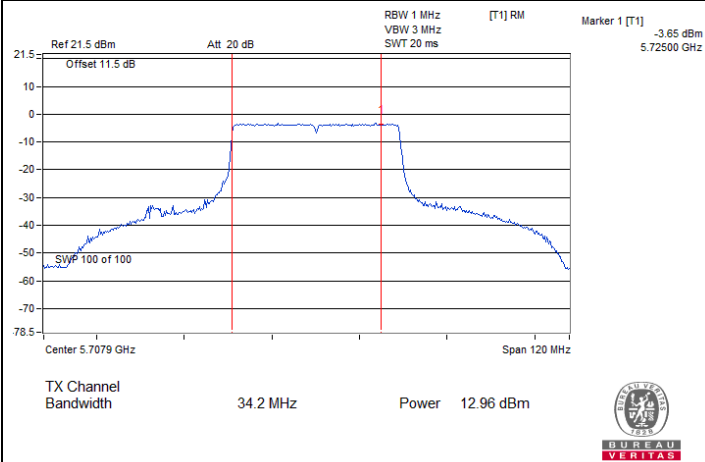


802.11be (EHT40) / Chain 0: CH 142 (U-NII-2C)

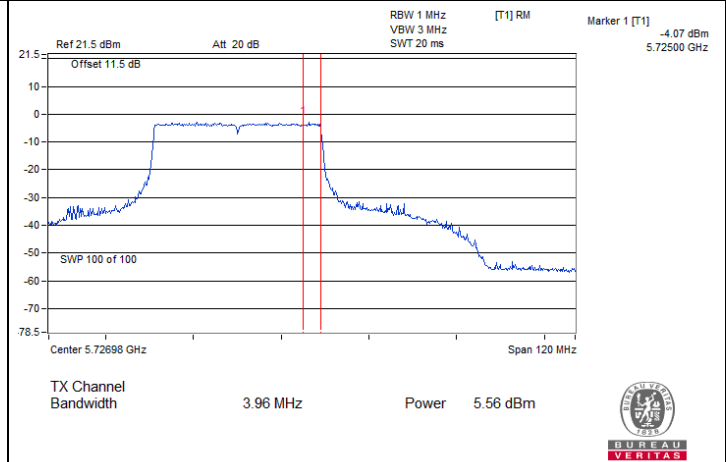


802.11be (EHT40) / Chain 0: CH 142 (U-NII-3)


Spectrum Plot for channel straddling

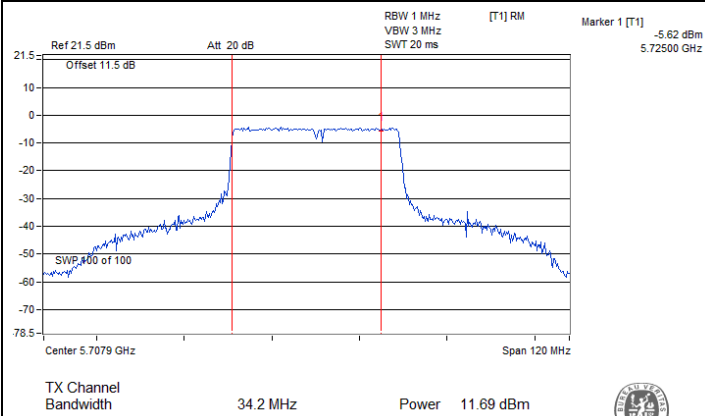


802.11be (EHT40) / Chain 1: CH 142 (U-NII-2C)

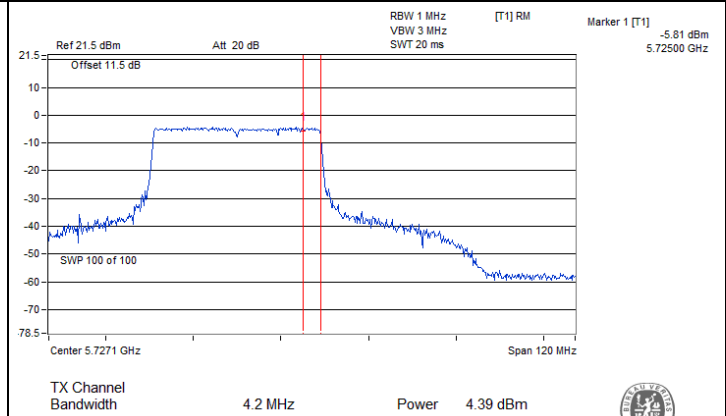


802.11be (EHT40) / Chain 1: CH 142 (U-NII-3)

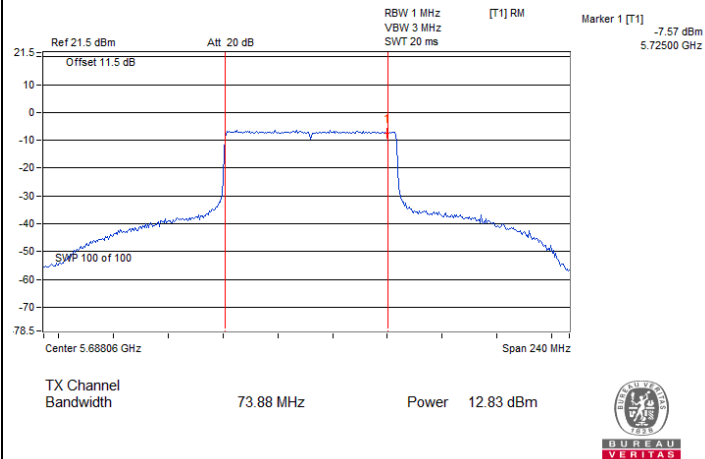


802.11be (EHT80) / Chain 0: CH 138 (U-NII-2C)

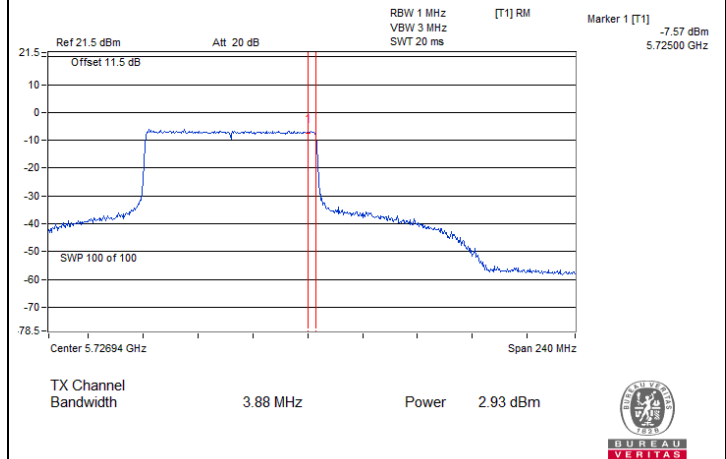

802.11be (EHT80) / Chain 0: CH 138 (U-NII-3)

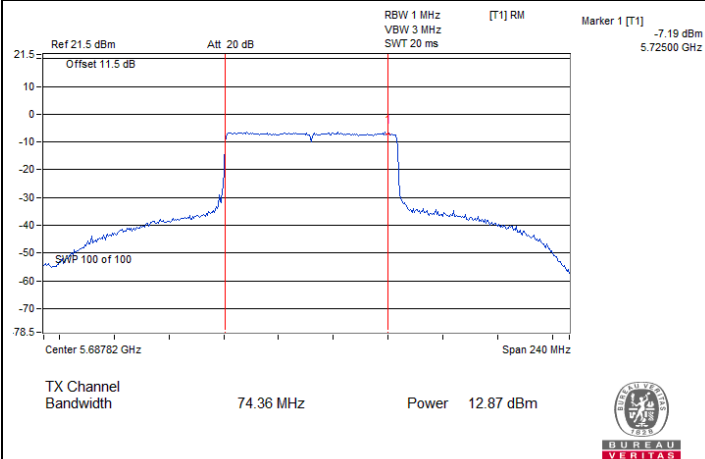


802.11be (EHT80) / Chain 1: CH 138 (U-NII-2C)

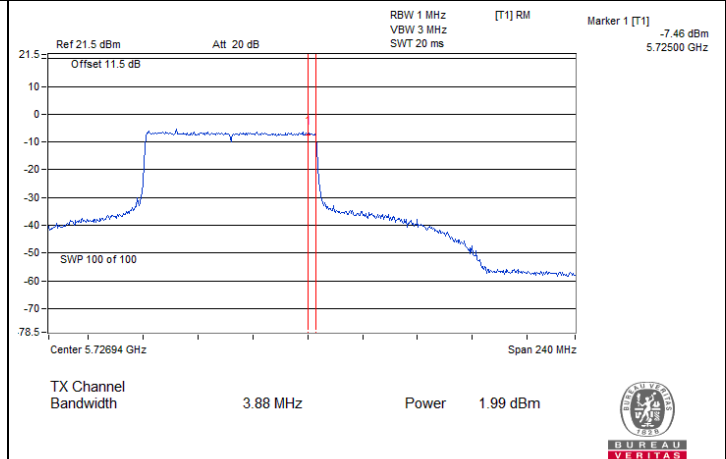


802.11be (EHT80) / Chain 1: CH 138 (U-NII-3)


Spectrum Plot for channel straddling

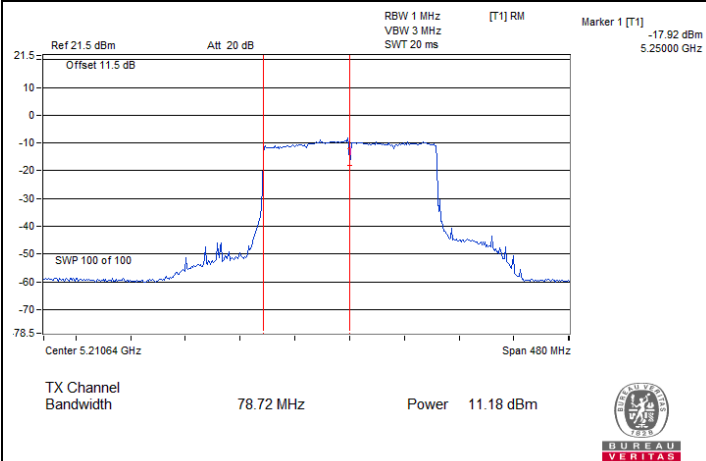


802.11be (EHT160) / Chain 0: CH 50 (U-NII-1)

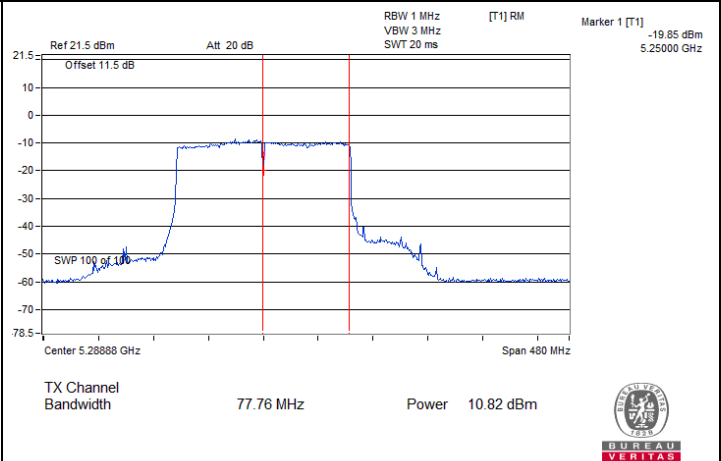

802.11be (EHT160) / Chain 0: CH 50 (U-NII-2A)

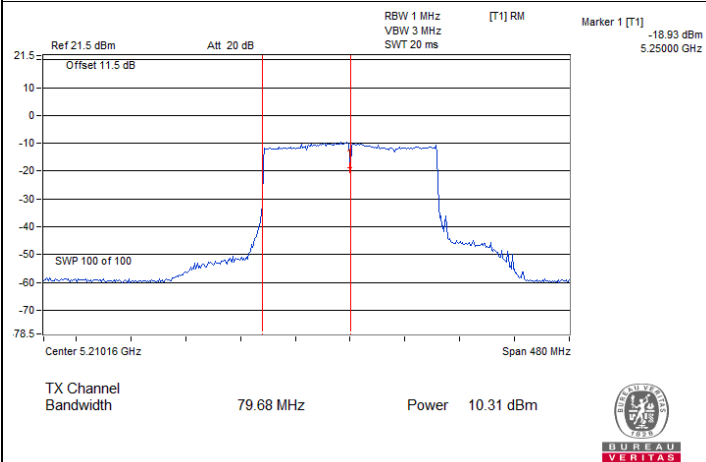

802.11be (EHT160) / Chain 1: CH 50 (U-NII-1)

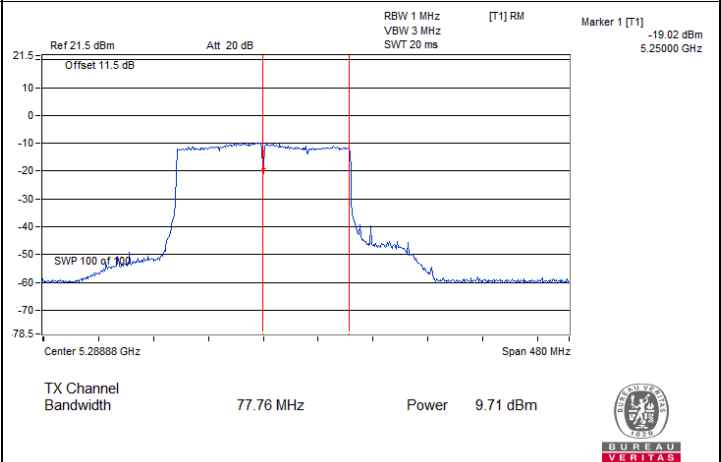

802.11be (EHT160) / Chain 1: CH 50 (U-NII-2A)

Mode B

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
36	5180	9.66	9.54	18.242	12.61	30	Pass
40	5200	9.85	9.69	18.972	12.78	30	Pass
48	5240	9.67	9.54	18.263	12.62	30	Pass
52	5260	9.75	9.95	19.326	12.86	24	Pass
60	5300	9.96	9.53	18.883	12.76	24	Pass
64	5320	9.84	9.55	18.654	12.71	24	Pass
100	5500	9.52	9.68	18.243	12.61	24	Pass
116	5580	9.84	9.49	18.53	12.68	24	Pass
140	5700	9.82	9.51	18.527	12.68	24	Pass
*144 (U-NII-2C)	5720	7.40	7.18	10.719	10.30	23.23	Pass
*144 (U-NII-3)	5720	2.85	2.98	3.914	5.93	30	Pass
149	5745	9.70	9.62	18.495	12.67	30	Pass
157	5785	9.63	9.55	18.199	12.60	30	Pass
165	5825	9.95	9.92	19.703	12.95	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.04 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.06 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 3.71 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 3.65 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
36	5180	9.78	9.61	18.647	12.71	30	Pass
40	5200	9.87	9.77	19.189	12.83	30	Pass
48	5240	9.99	9.93	19.817	12.97	30	Pass
52	5260	9.90	9.75	19.213	12.84	24	Pass
60	5300	9.85	9.57	18.718	12.72	24	Pass
64	5320	9.72	9.55	18.391	12.65	24	Pass
100	5500	9.61	9.62	18.303	12.63	24	Pass
116	5580	9.97	9.37	18.581	12.69	24	Pass
140	5700	9.87	9.46	18.536	12.68	24	Pass
*144 (U-NII-2C)	5720	7.02	7.99	11.33	10.54	23.18	Pass
*144 (U-NII-3)	5720	2.87	4.35	4.659	6.68	30	Pass
149	5745	9.62	9.57	18.22	12.61	30	Pass
157	5785	9.97	9.85	19.592	12.92	30	Pass
165	5825	9.71	9.52	18.308	12.63	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.04 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.06 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 3.71 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 3.65 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
38	5190	9.98	9.93	19.794	12.97	30	Pass
46	5230	9.98	9.91	19.749	12.96	30	Pass
54	5270	9.73	9.49	18.289	12.62	24	Pass
62	5310	9.79	9.80	19.078	12.81	24	Pass
102	5510	9.52	9.76	18.416	12.65	24	Pass
110	5550	9.97	9.60	19.051	12.80	24	Pass
134	5670	9.98	9.65	19.18	12.83	24	Pass
*142 (U-NII-2C)	5710	7.58	7.38	11.198	10.49	24	Pass
*142 (U-NII-3)	5710	0.04	0.82	2.217	3.46	30	Pass
151	5755	9.92	9.87	19.523	12.91	30	Pass
159	5795	9.83	9.90	19.388	12.88	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.04 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.06 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 3.71 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 3.65 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
42	5210	9.97	9.87	19.636	12.93	30	Pass
58	5290	9.75	9.53	18.415	12.65	24	Pass
106	5530	9.86	9.98	19.637	12.93	24	Pass
122	5610	9.89	9.41	18.48	12.67	24	Pass
*138 (U-NII-2C)	5690	7.88	7.36	11.583	10.64	24	Pass
*138 (U-NII-3)	5690	-2.00	-2.57	1.1843	0.73	30	Pass
155	5775	9.94	9.58	18.941	12.77	30	Pass

Notes:


- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.04 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.06 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 3.71 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 3.65 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT160)


Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
*50 (U-NII-1)	5250	6.39	6.14	8.467	9.28	30	Pass
*50 (U-NII-2A)	5250	5.97	5.47	7.477	8.74	24	Pass
114	5570	9.72	9.49	18.268	12.62	24	Pass

Notes:


- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.04 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.06 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 3.71 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

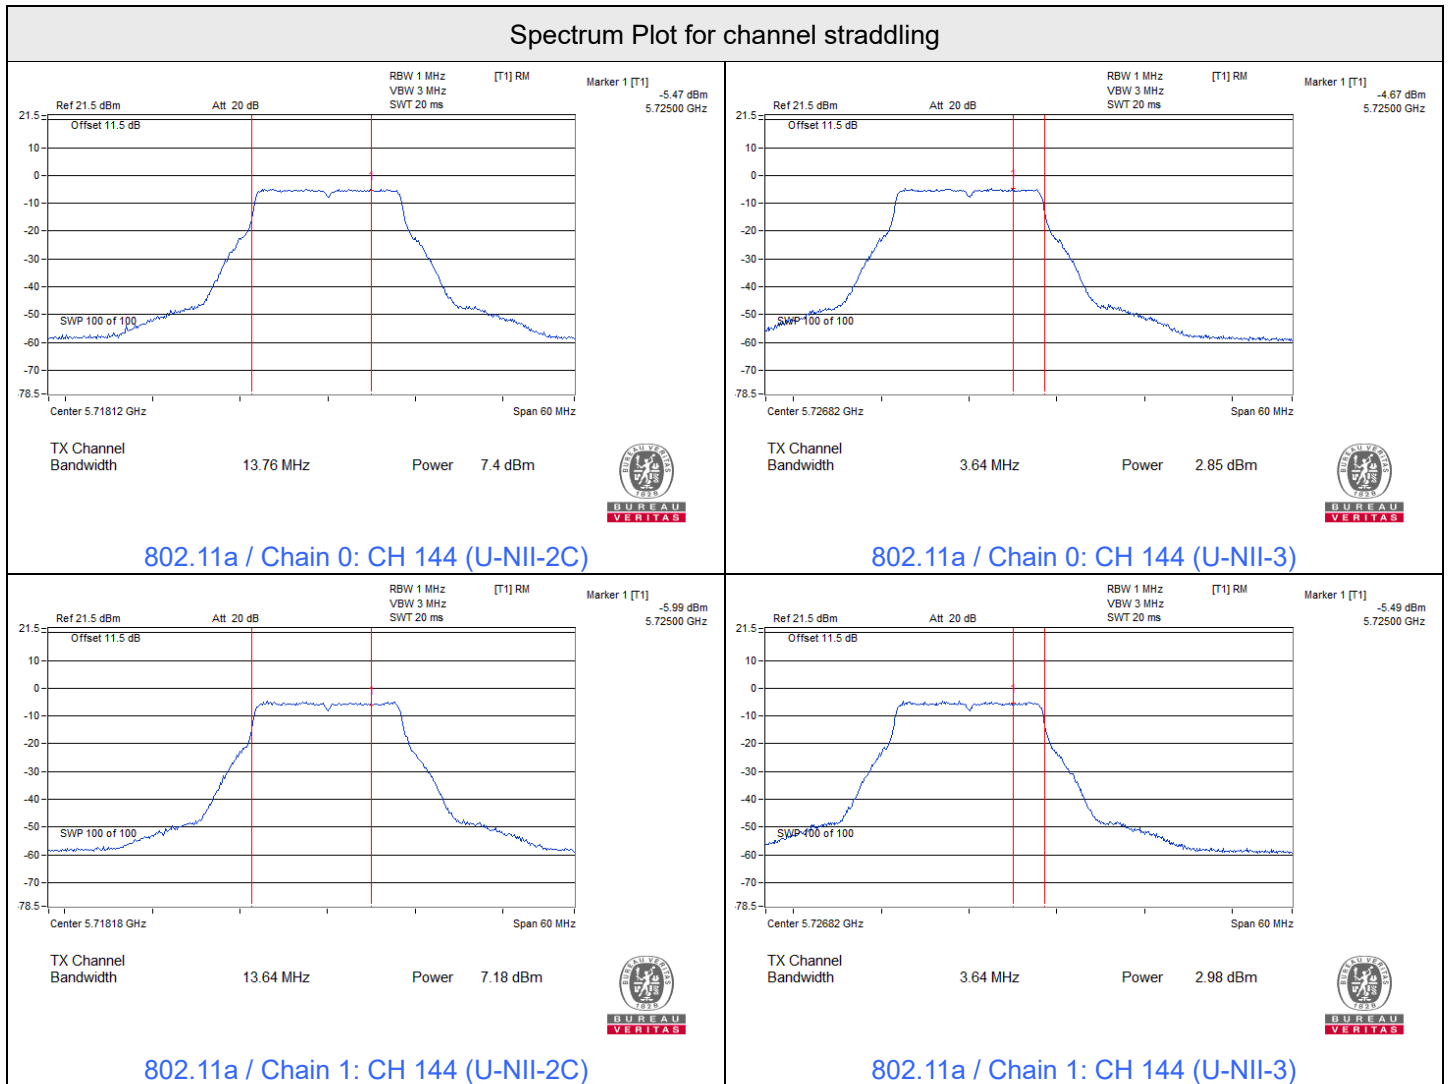


Spectrum Plot for channel straddling

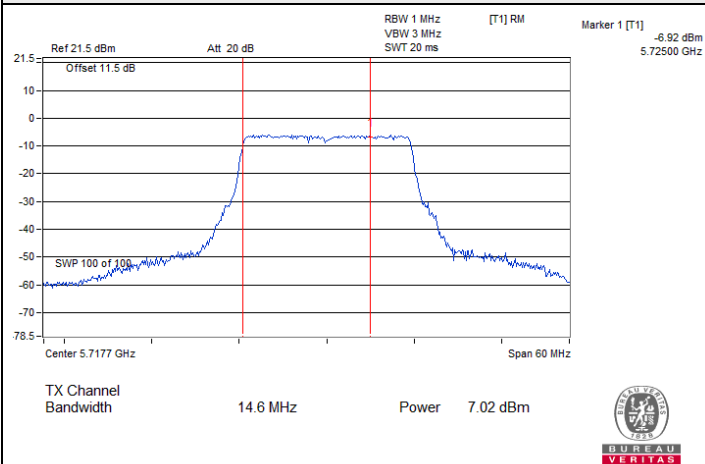


802.11be (EHT20) / Chain 0: CH 144 (U-NII-2C)

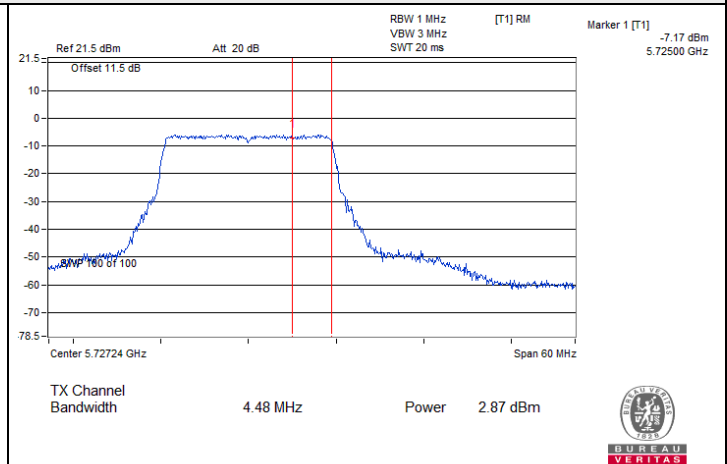


802.11be (EHT20) / Chain 0: CH 144 (U-NII-3)

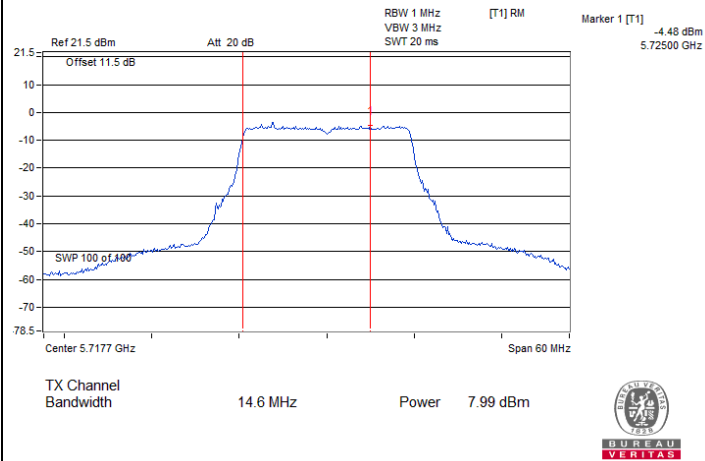


802.11be (EHT20) / Chain 1: CH 144 (U-NII-2C)

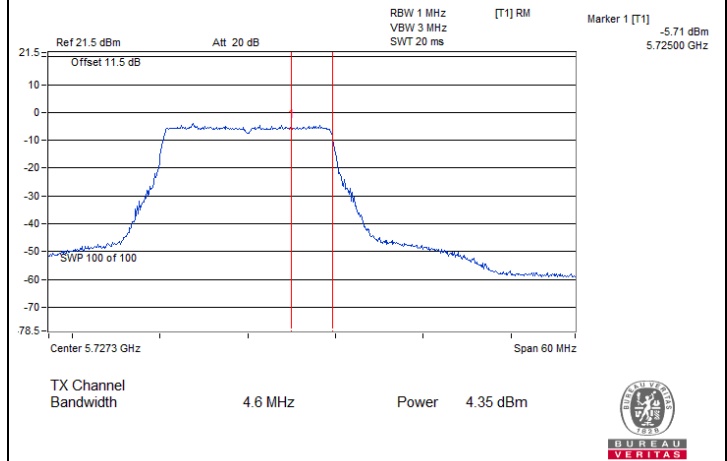

802.11be (EHT20) / Chain 1: CH 144 (U-NII-3)

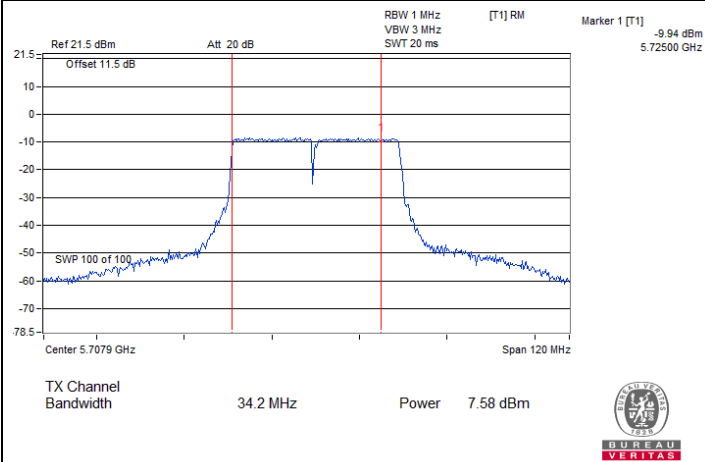


802.11be (EHT40) / Chain 0: CH 142 (U-NII-2C)

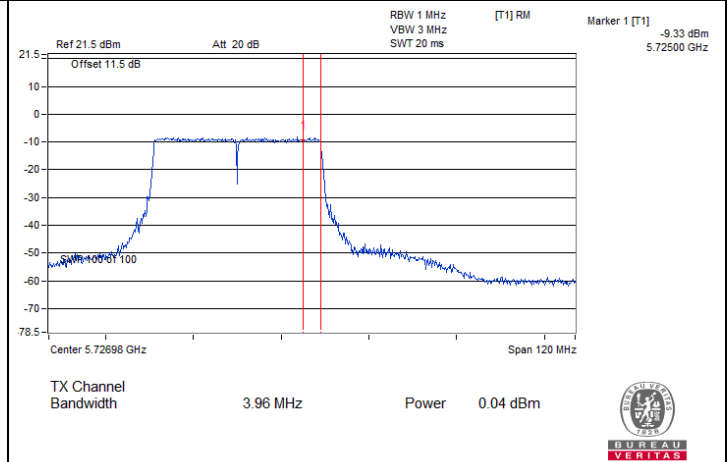


802.11be (EHT40) / Chain 0: CH 142 (U-NII-3)


Spectrum Plot for channel straddling

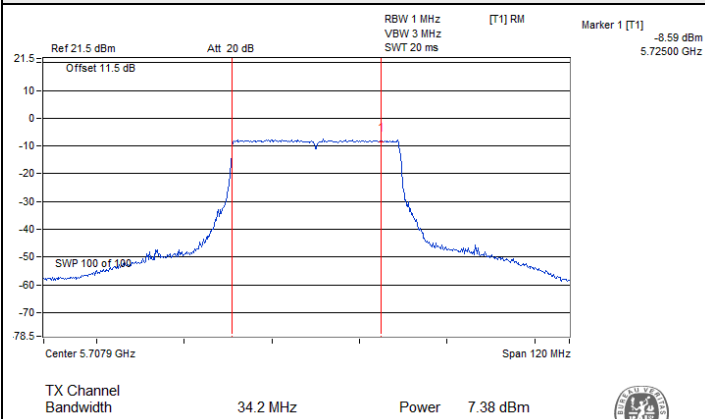


802.11be (EHT40) / Chain 1: CH 142 (U-NII-2C)

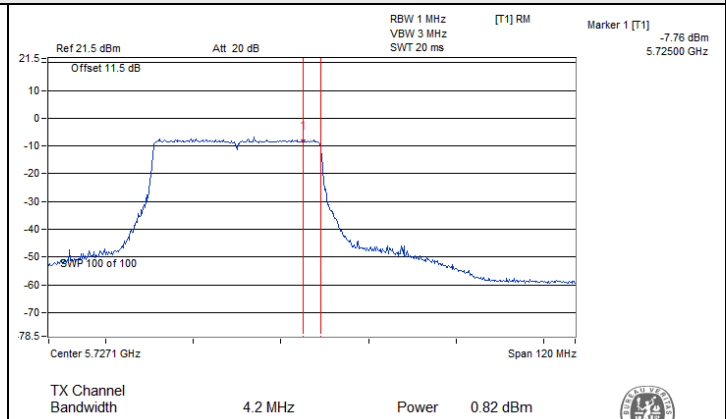


802.11be (EHT40) / Chain 1: CH 142 (U-NII-3)

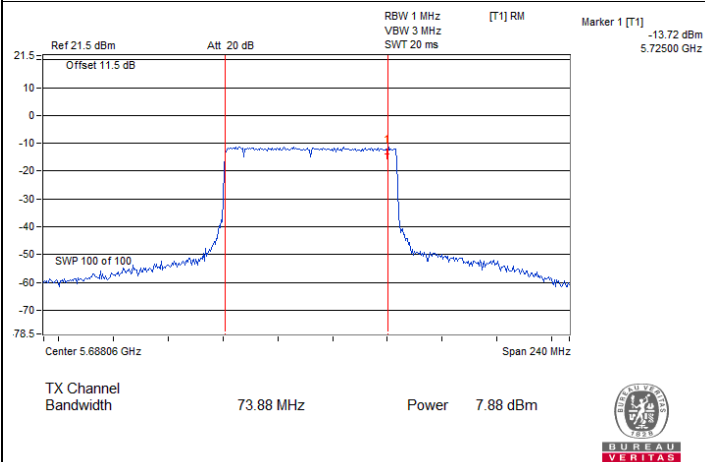


802.11be (EHT80) / Chain 0: CH 138 (U-NII-2C)

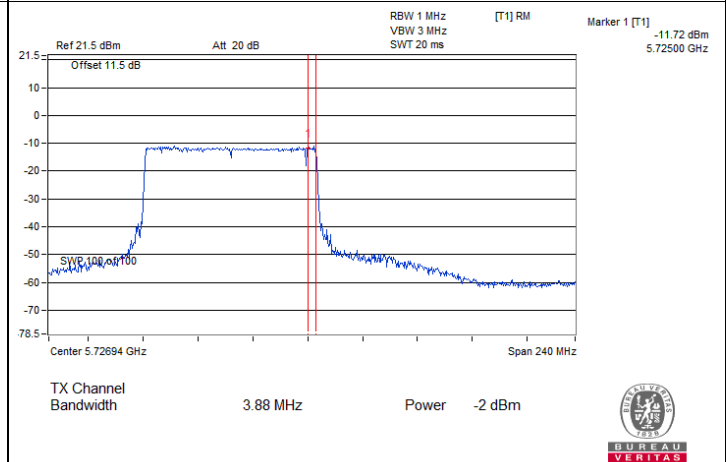

802.11be (EHT80) / Chain 0: CH 138 (U-NII-3)

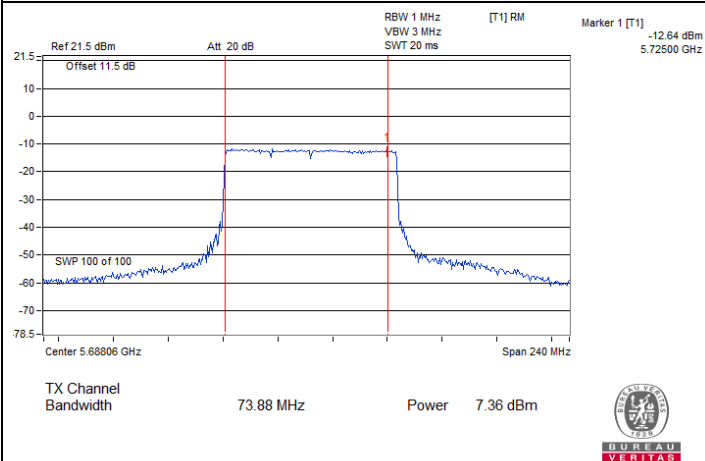


802.11be (EHT80) / Chain 1: CH 138 (U-NII-2C)

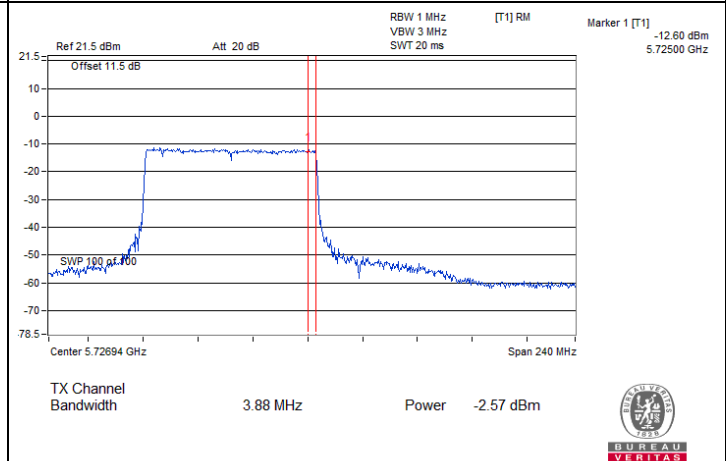


802.11be (EHT80) / Chain 1: CH 138 (U-NII-3)


Spectrum Plot for channel straddling

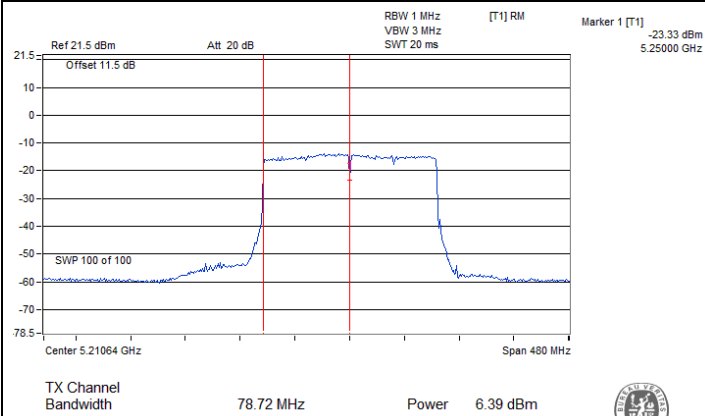


802.11be (EHT160) / Chain 0: CH 50 (U-NII-1)

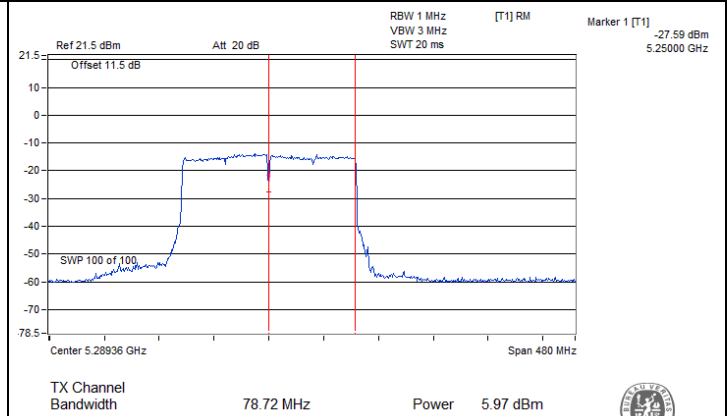

802.11be (EHT160) / Chain 0: CH 50 (U-NII-2A)

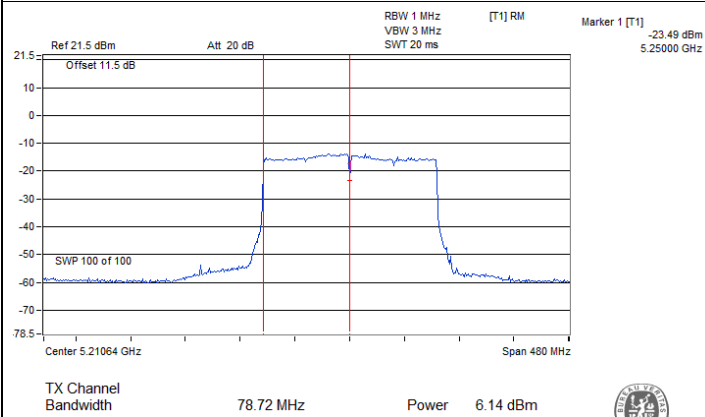

802.11be (EHT160) / Chain 1: CH 50 (U-NII-1)

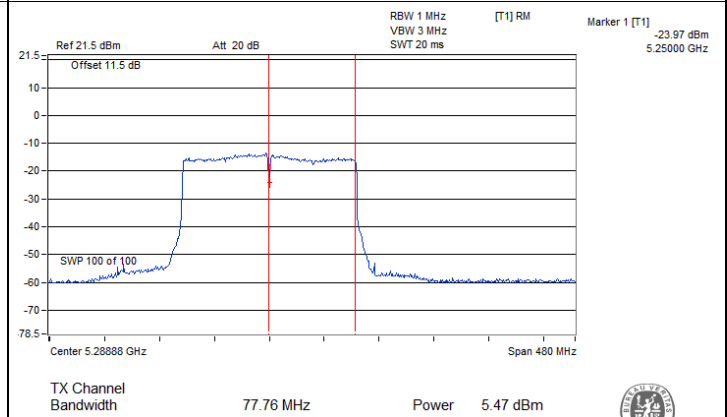

802.11be (EHT160) / Chain 1: CH 50 (U-NII-2A)

7.3 Power Spectral Density

Environmental Conditions:	25°C, 60% RH	Tested By:	Match Tsui
---------------------------	--------------	------------	------------

Mode A

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
36	5180	-1.30	-1.37	1.68	17	Pass
40	5200	-1.05	-0.96	2.01	17	Pass
48	5240	-1.11	-1.08	1.92	17	Pass
52	5260	-1.09	-1.27	1.83	11	Pass
60	5300	-1.00	-1.11	1.96	11	Pass
64	5320	-1.22	-1.03	1.89	11	Pass
100	5500	-1.36	-1.01	1.83	11	Pass
116	5580	-1.13	-1.64	1.63	11	Pass
140	5700	-1.25	-1.51	1.63	11	Pass
144 (U-NII-2C)	5720	-1.51	-1.36	1.58	11	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 4.63 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
4. For U-NII-2A, the directional gain is 4.57 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
5. For U-NII-2C, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
36	5180	-1.45	-1.54	1.52	17	Pass
40	5200	-1.36	-1.13	1.77	17	Pass
48	5240	-1.25	-1.39	1.69	17	Pass
52	5260	-1.26	-1.46	1.65	11	Pass
60	5300	-1.36	-1.09	1.79	11	Pass
64	5320	-1.15	-1.24	1.82	11	Pass
100	5500	-1.55	-1.21	1.63	11	Pass
116	5580	-0.97	-1.40	1.83	11	Pass
140	5700	-1.26	-1.78	1.50	11	Pass
144 (U-NII-2C)	5720	-1.54	-1.65	1.42	11	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 4.63 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
4. For U-NII-2A, the directional gain is 4.57 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
5. For U-NII-2C, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
38	5190	-4.15	-4.77	-1.44	17	Pass
46	5230	-4.42	-4.46	-1.43	17	Pass
54	5270	-4.11	-4.90	-1.48	11	Pass
62	5310	-4.31	-4.34	-1.31	11	Pass
102	5510	-4.04	-4.25	-1.13	11	Pass
110	5550	-4.29	-4.45	-1.36	11	Pass
134	5670	-4.25	-4.73	-1.47	11	Pass
142 (U-NII-2C)	5710	-4.41	-4.64	-1.51	11	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 4.63 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
4. For U-NII-2A, the directional gain is 4.57 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
5. For U-NII-2C, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
42	5210	-7.13	-7.45	-4.28	17	Pass
58	5290	-7.02	-7.23	-4.11	11	Pass
106	5530	-7.18	-6.91	-4.03	11	Pass
122	5610	-7.09	-7.57	-4.31	11	Pass
138 (U-NII-2C)	5690	-7.44	-7.27	-4.34	11	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 4.63 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
4. For U-NII-2A, the directional gain is 4.57 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
5. For U-NII-2C, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
50 (U-NII-1)	5250	-10.05	-10.42	-7.22	17	Pass
50 (U-NII-2A)	5250	-10.11	-10.53	-7.30	11	Pass
114	5570	-9.70	-10.17	-6.92	11	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 4.63 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
4. For U-NII-2A, the directional gain is 4.57 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
5. For U-NII-2C, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
144 (U-NII-3)	5720	-9.11	-9.47	-6.28	-4.06	30	Pass
149	5745	-8.80	-9.28	-6.02	-3.80	30	Pass
157	5785	-8.74	-9.35	-6.02	-3.80	30	Pass
165	5825	-8.57	-9.15	-5.84	-3.62	30	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 5.61 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
144 (U-NII-3)	5720	-10.24	-10.63	-7.42	-5.20	30	Pass
149	5745	-10.28	-10.55	-7.4	-5.18	30	Pass
157	5785	-10.33	-10.69	-7.5	-5.28	30	Pass
165	5825	-10.02	-10.34	-7.17	-4.95	30	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 5.61 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
142 (U-NII-3)	5710	-13.05	-13.55	-10.28	-8.06	30	Pass
151	5755	-13.22	-13.70	-10.44	-8.22	30	Pass
159	5795	-13.14	-13.51	-10.31	-8.09	30	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 5.61 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.


802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
138 (U-NII-3)	5690	-16.27	-16.38	-13.31	-11.09	30	Pass
155	5775	-16.60	-16.88	-13.73	-11.51	30	Pass


Notes:

- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-3, the directional gain is 5.61 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.


Spectrum Plot of Maximum Value

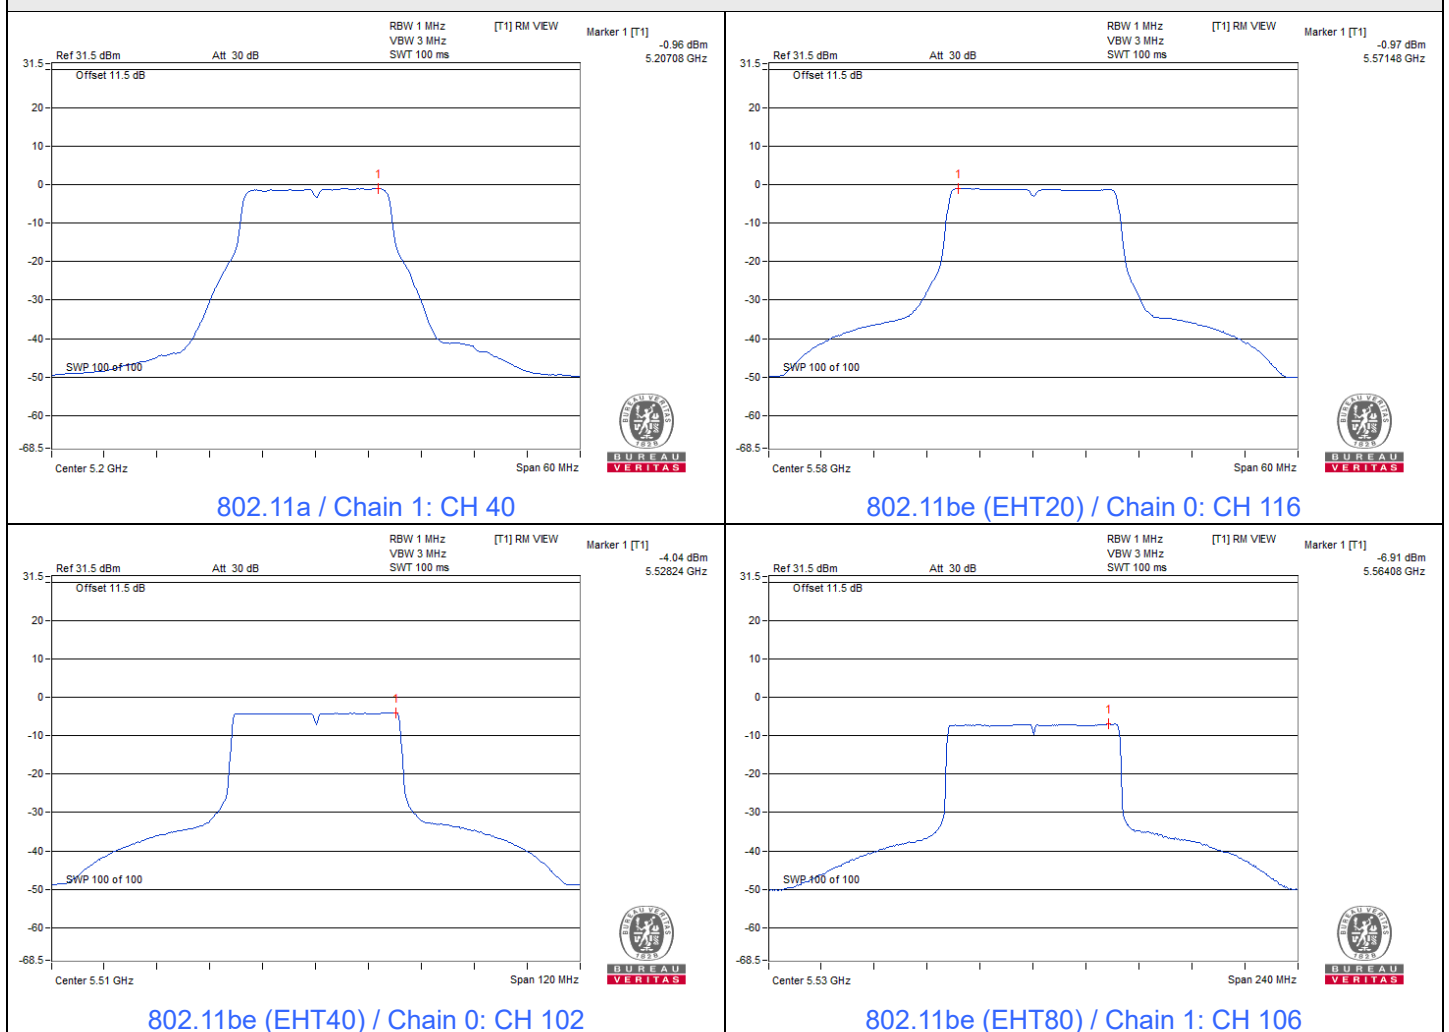


Spectrum Plot of Maximum Value

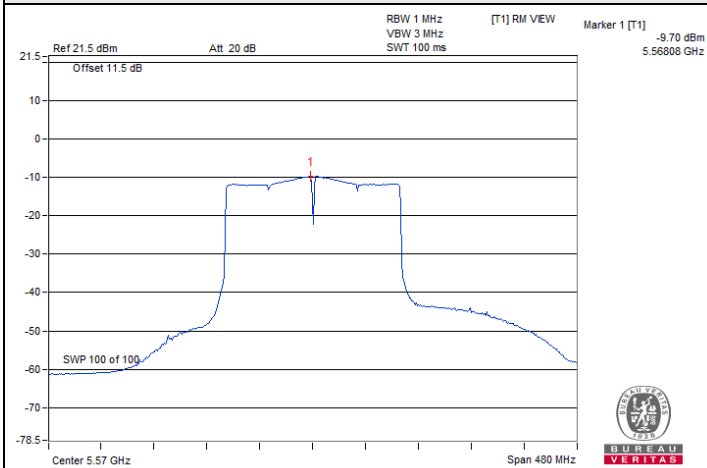


802.11be (EHT160) / Chain 0: CH 114

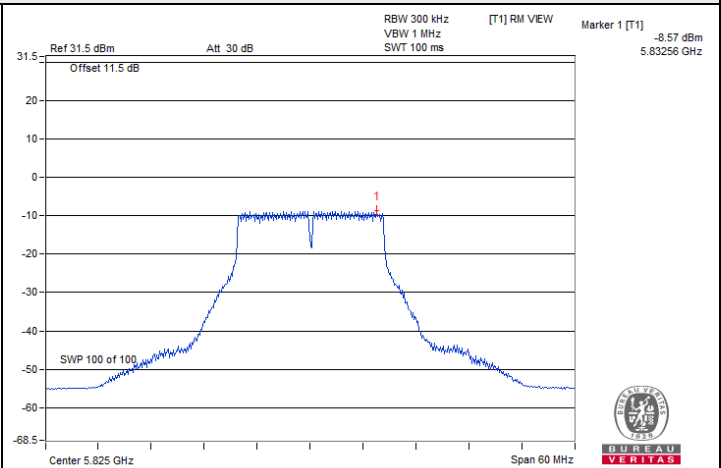


802.11a / Chain 0: CH 165

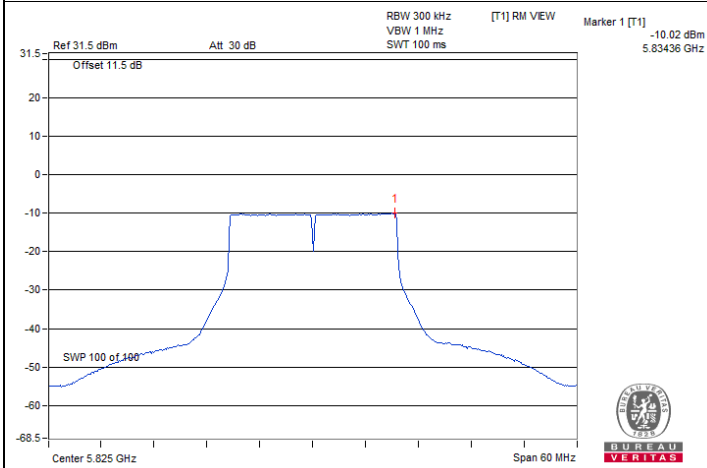

802.11be (EHT20) / Chain 0: CH 165

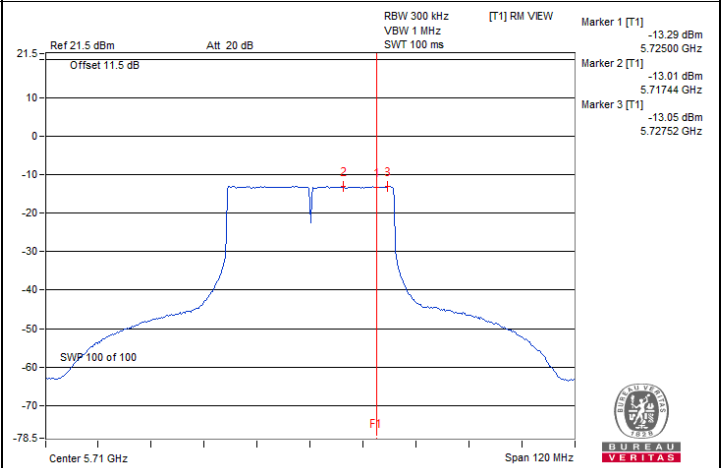

802.11be (EHT40) / Chain 0: CH 142 (U-NII-3)

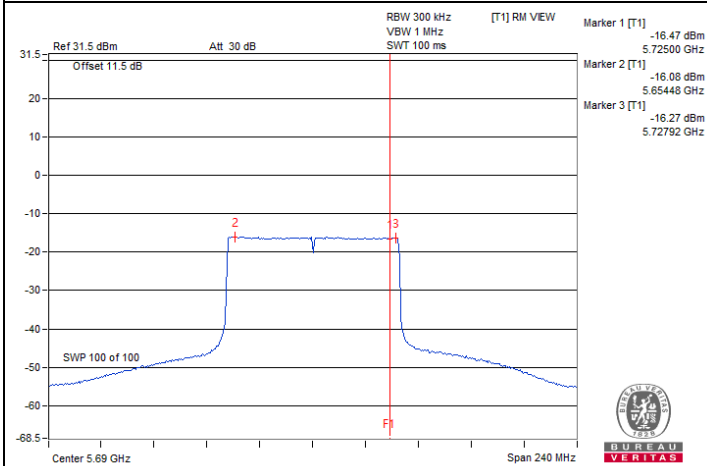

802.11be (EHT80) / Chain 0: CH 138 (U-NII-3)

Mode B

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
36	5180	-6.48	-6.20	-3.33	17	Pass
40	5200	-6.14	-6.36	-3.24	17	Pass
48	5240	-6.29	-6.25	-3.26	17	Pass
52	5260	-6.24	-6.28	-3.25	11	Pass
60	5300	-5.81	-6.00	-2.89	11	Pass
64	5320	-5.28	-5.97	-2.60	11	Pass
100	5500	-5.52	-6.01	-2.75	11	Pass
116	5580	-5.51	-6.06	-2.77	11	Pass
140	5700	-5.82	-6.16	-2.98	11	Pass
144 (U-NII-2C)	5720	-6.15	-6.29	-3.21	11	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 4.63 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
4. For U-NII-2A, the directional gain is 4.57 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
5. For U-NII-2C, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
36	5180	-6.15	-6.20	-3.16	17	Pass
40	5200	-6.03	-6.02	-3.01	17	Pass
48	5240	-5.93	-6.16	-3.03	17	Pass
52	5260	-6.12	-6.15	-3.12	11	Pass
60	5300	-5.45	-5.97	-2.69	11	Pass
64	5320	-6.15	-6.31	-3.22	11	Pass
100	5500	-6.05	-6.23	-3.13	11	Pass
116	5580	-6.02	-6.54	-3.26	11	Pass
140	5700	-5.85	-6.14	-2.98	11	Pass
144 (U-NII-2C)	5720	-6.03	-6.33	-3.17	11	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 4.63 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
4. For U-NII-2A, the directional gain is 4.57 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
5. For U-NII-2C, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
38	5190	-9.10	-9.02	-6.05	17	Pass
46	5230	-9.31	-9.08	-6.18	17	Pass
54	5270	-9.40	-9.12	-6.25	11	Pass
62	5310	-8.79	-8.90	-5.83	11	Pass
102	5510	-9.14	-8.53	-5.81	11	Pass
110	5550	-8.37	-8.86	-5.60	11	Pass
134	5670	-8.93	-9.18	-6.04	11	Pass
142 (U-NII-2C)	5710	-9.08	-9.05	-6.05	11	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 4.63 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
4. For U-NII-2A, the directional gain is 4.57 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
5. For U-NII-2C, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
42	5210	-11.72	-12.03	-8.86	17	Pass
58	5290	-11.93	-12.43	-9.16	11	Pass
106	5530	-11.75	-11.32	-8.52	11	Pass
122	5610	-11.36	-11.43	-8.38	11	Pass
138 (U-NII-2C)	5690	-11.69	-12.09	-8.88	11	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 4.63 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
4. For U-NII-2A, the directional gain is 4.57 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
5. For U-NII-2C, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
50 (U-NII-1)	5250	-14.77	-14.50	-11.62	17	Pass
50 (U-NII-2A)	5250	-14.89	-14.65	-11.76	11	Pass
114	5570	-14.32	-14.51	-11.40	11	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 4.63 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
4. For U-NII-2A, the directional gain is 4.57 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
5. For U-NII-2C, the directional gain is 5.66 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
144 (U-NII-3)	5720	-13.62	-13.94	-10.77	-8.55	30	Pass
149	5745	-13.81	-13.95	-10.87	-8.65	30	Pass
157	5785	-13.95	-13.97	-10.95	-8.73	30	Pass
165	5825	-13.20	-13.14	-10.16	-7.94	30	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 5.61 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
144 (U-NII-3)	5720	-15.21	-14.95	-12.07	-9.85	30	Pass
149	5745	-15.31	-15.01	-12.15	-9.93	30	Pass
157	5785	-15.40	-14.98	-12.17	-9.95	30	Pass
165	5825	-15.00	-14.62	-11.8	-9.58	30	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 5.61 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
142 (U-NII-3)	5710	-17.77	-17.70	-14.72	-12.50	30	Pass
151	5755	-18.08	-17.76	-14.91	-12.69	30	Pass
159	5795	-17.98	-17.64	-14.8	-12.58	30	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 5.61 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.


802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
138 (U-NII-3)	5690	-20.97	-21.33	-18.14	-15.92	30	Pass
155	5775	-21.33	-21.33	-18.32	-16.10	30	Pass






Notes:

- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-3, the directional gain is 5.61 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

Spectrum Plot of Maximum Value

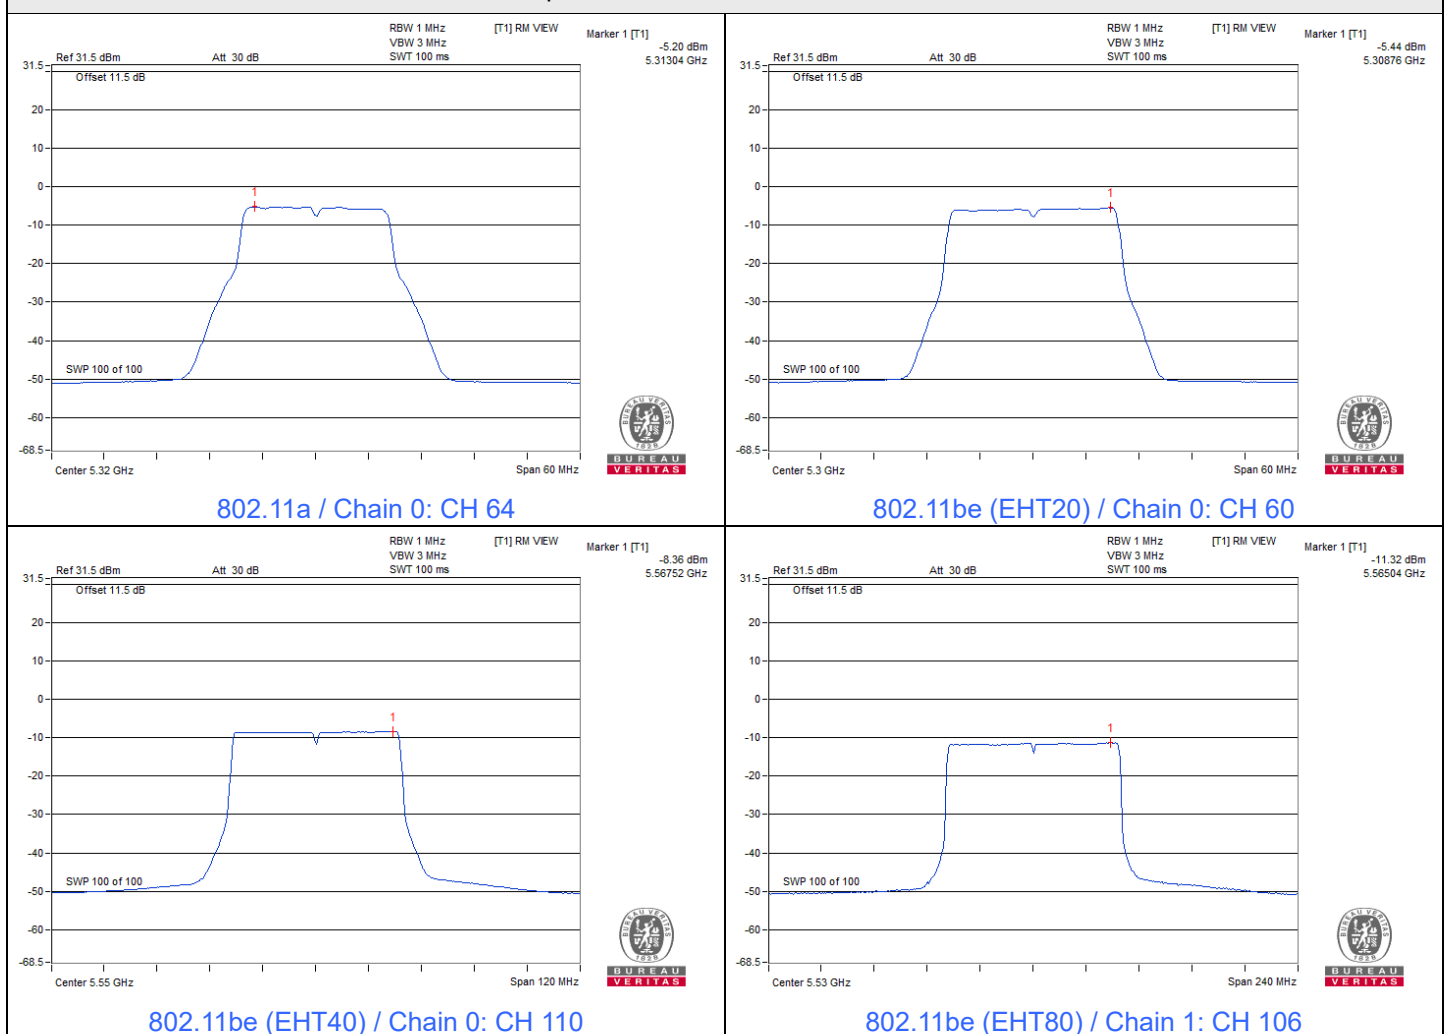

Spectrum Plot of Maximum Value

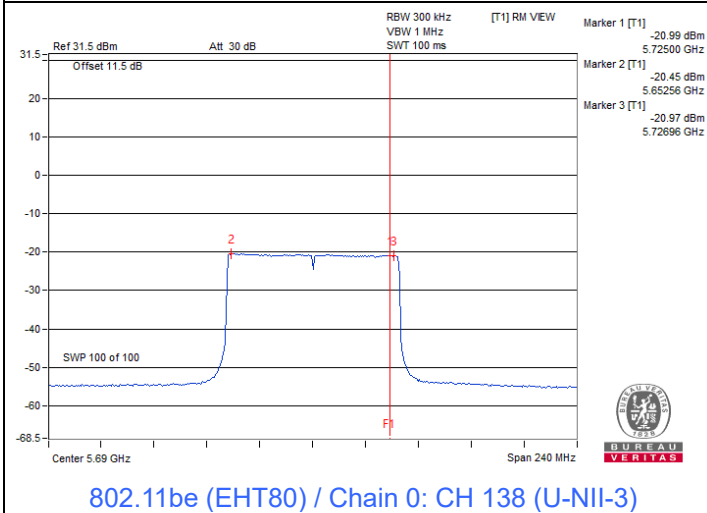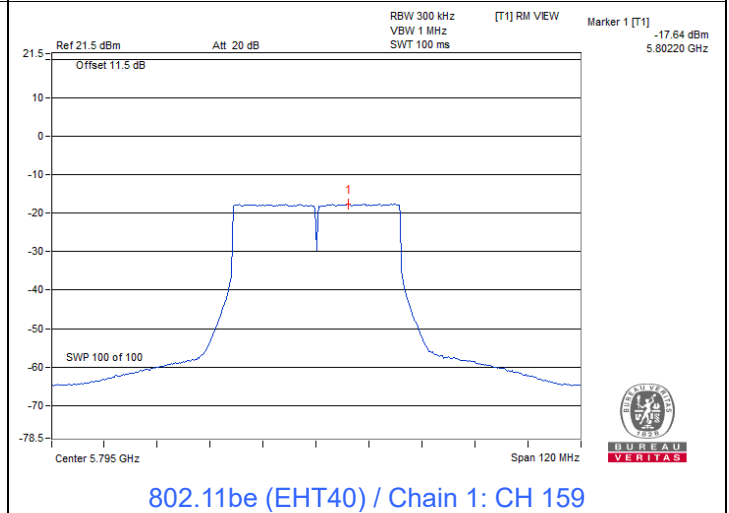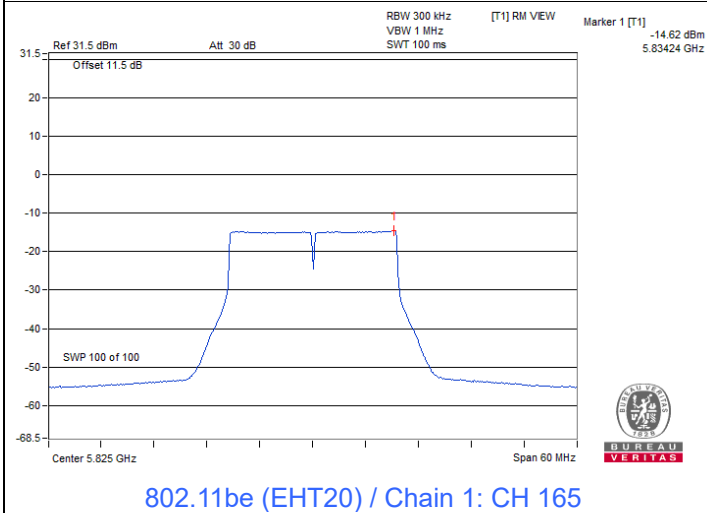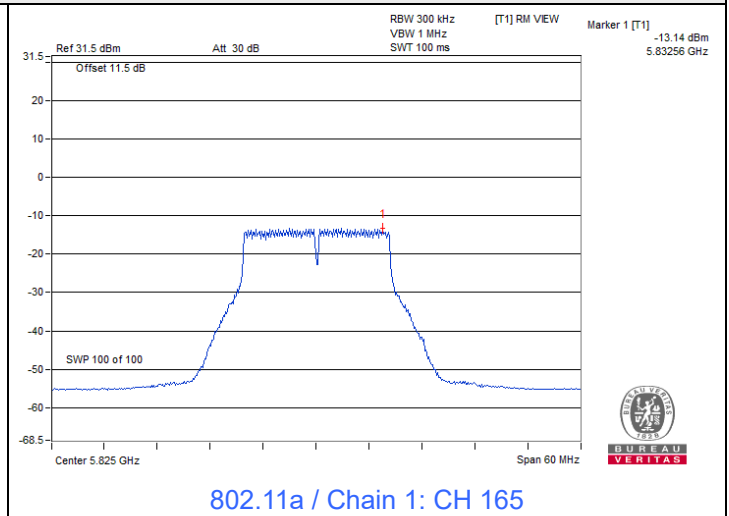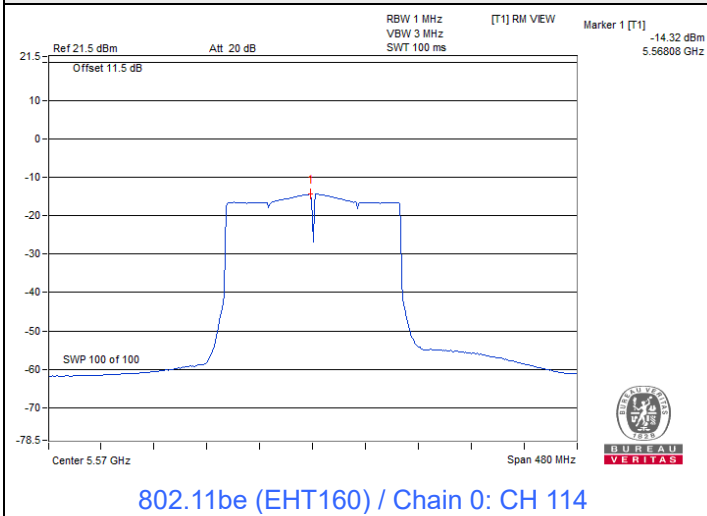

7.4 6 dB Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Match Tsui
---------------------------	--------------	------------	------------

Mode A

802.11a

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
144 (U-NII-3)	5720	3.28	3.31	0.5	Pass
149	5745	16.41	16.44	0.5	Pass
157	5785	16.37	16.40	0.5	Pass
165	5825	16.41	16.38	0.5	Pass

802.11be (EHT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
144 (U-NII-3)	5720	4.62	4.59	0.5	Pass
149	5745	19.07	19.08	0.5	Pass
157	5785	19.08	19.09	0.5	Pass
165	5825	19.02	19.04	0.5	Pass


802.11be (EHT40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
142 (U-NII-3)	5710	4.20	4.21	0.5	Pass
151	5755	38.19	38.06	0.5	Pass
159	5795	38.24	38.30	0.5	Pass

802.11be (EHT80)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
138 (U-NII-3)	5690	4.38	4.30	0.5	Pass
155	5775	78.57	78.52	0.5	Pass

Spectrum Plot of Minimum Value

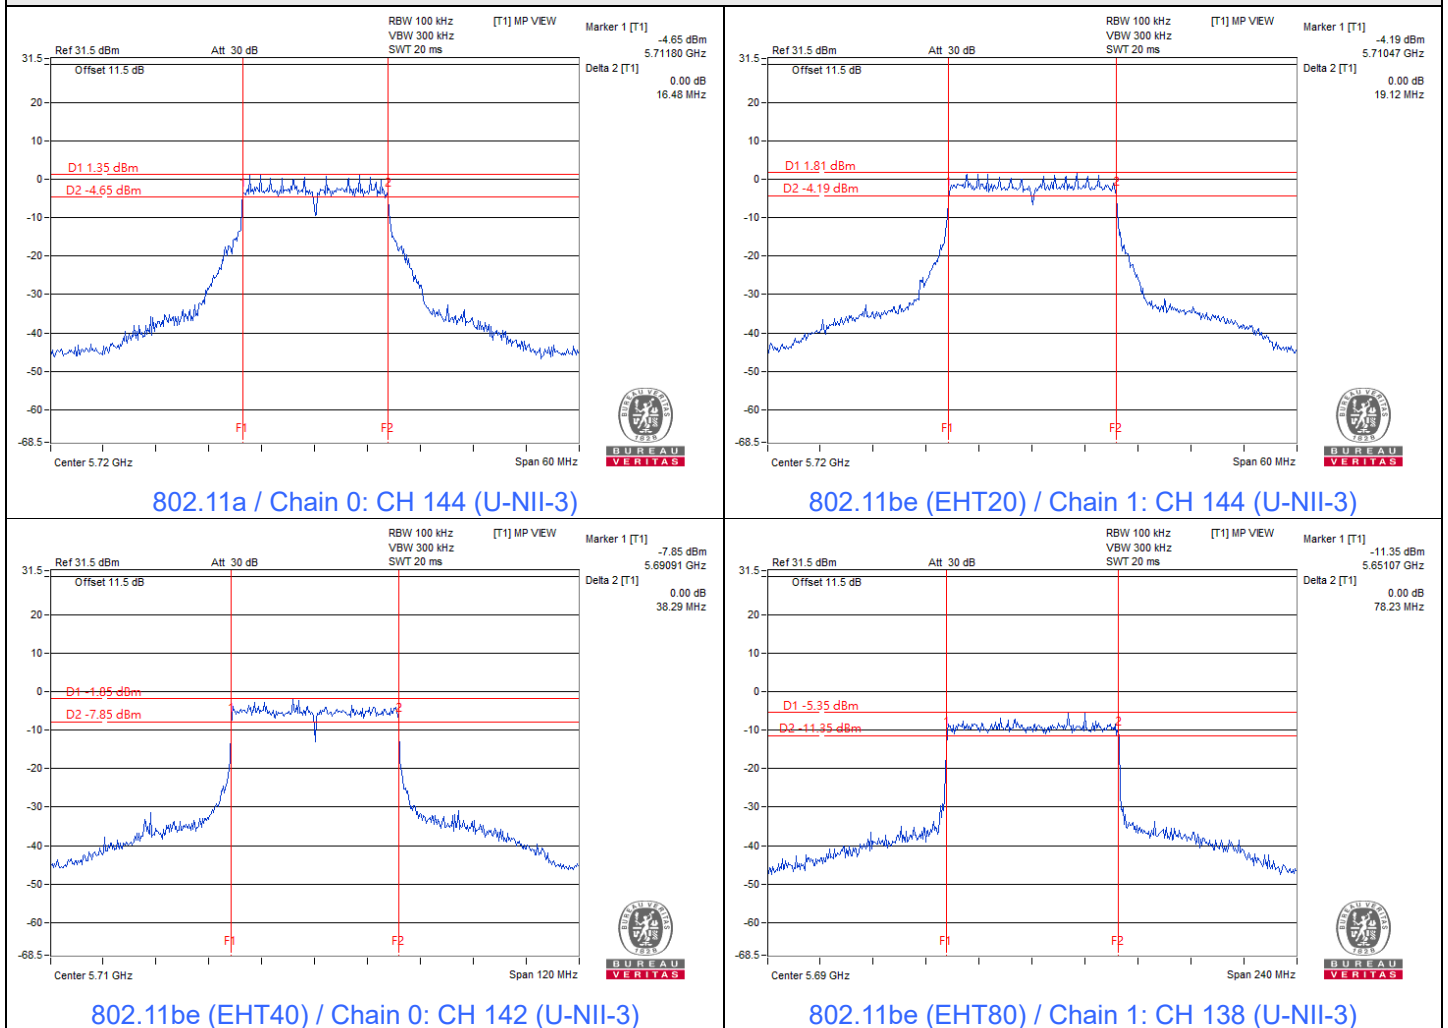

Note: For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz

Mode B

802.11a

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
144 (U-NII-3)	5720	3.25	3.30	0.5	Pass
149	5745	16.43	16.40	0.5	Pass
157	5785	16.38	16.35	0.5	Pass
165	5825	16.37	16.43	0.5	Pass

802.11be (EHT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
144 (U-NII-3)	5720	4.60	4.62	0.5	Pass
149	5745	19.14	19.10	0.5	Pass
157	5785	19.05	19.08	0.5	Pass
165	5825	19.07	19.05	0.5	Pass





802.11be (EHT40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
142 (U-NII-3)	5710	4.22	4.18	0.5	Pass
151	5755	38.18	38.18	0.5	Pass
159	5795	38.22	38.26	0.5	Pass

802.11be (EHT80)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
138 (U-NII-3)	5690	4.37	4.39	0.5	Pass
155	5775	78.48	78.32	0.5	Pass

Spectrum Plot of Minimum Value

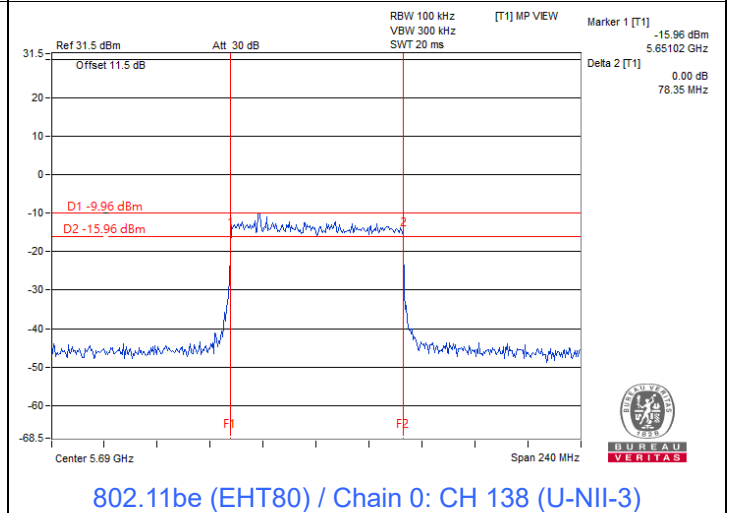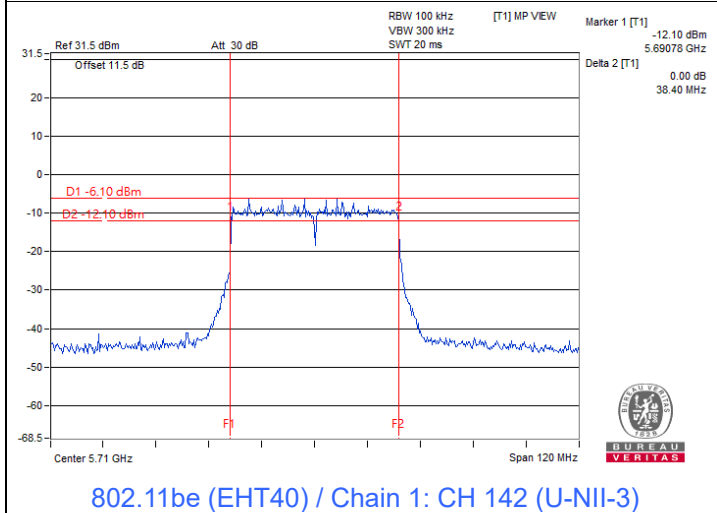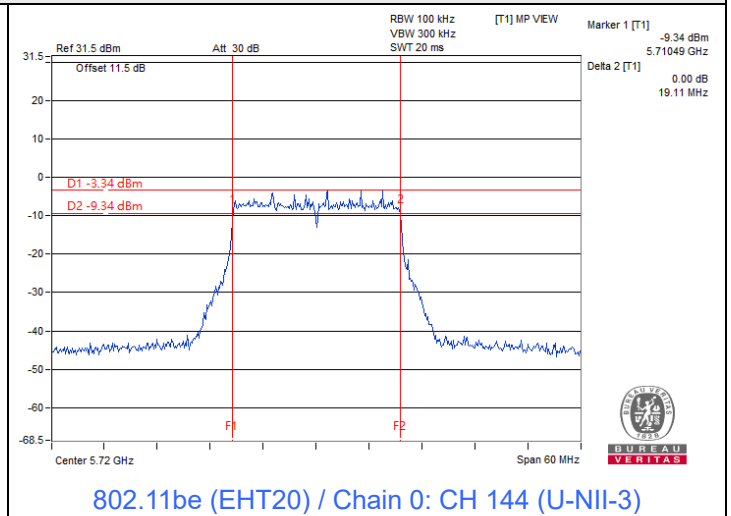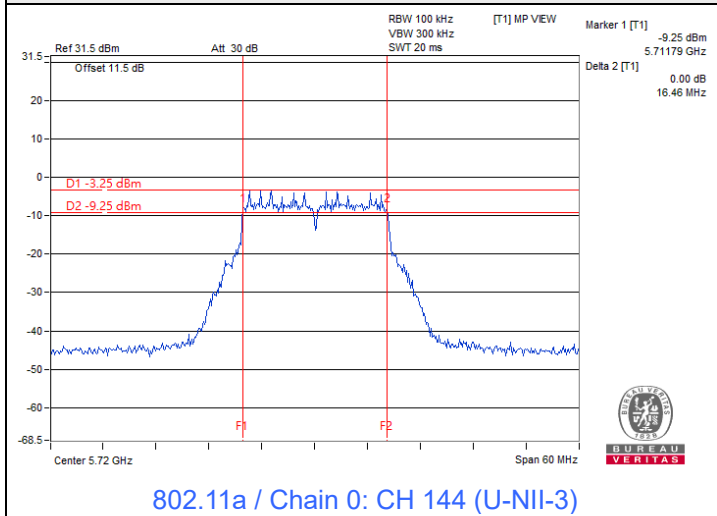

Note: For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz

7.5 Occupied Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Match Tsui
---------------------------	--------------	------------	------------

Mode A

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.16	17.16
40	5200	17.28	17.16
48	5240	17.28	17.16
52	5260	17.28	17.16
60	5300	16.92	17.28
64	5320	17.28	17.28
100	5500	17.64	17.28
116	5580	17.16	17.16
140	5700	17.40	17.40
144 (U-NII-2C)	5720	13.64	13.64
144 (U-NII-3)	5720	3.52	3.64
149	5745	17.30	17.21
157	5785	17.40	17.40
165	5825	17.21	17.21

802.11be (EHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	19.20	19.08
40	5200	19.20	19.32
48	5240	19.20	19.20
52	5260	19.20	19.20
60	5300	19.20	19.20
64	5320	19.08	19.20
100	5500	19.20	19.20
116	5580	19.20	19.20
140	5700	19.20	19.20
144 (U-NII-2C)	5720	14.60	14.60
144 (U-NII-3)	5720	4.60	4.60
149	5745	19.24	19.24
157	5785	19.24	19.24
165	5825	19.24	19.24

802.11be (EHT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	38.64	38.64
46	5230	38.40	38.16
54	5270	38.64	38.64
62	5310	38.40	38.40
102	5510	38.64	38.64
110	5550	38.46	38.27
134	5670	38.65	38.64
142 (U-NII-2C)	5710	34.20	34.20
142 (U-NII-3)	5710	3.96	4.20
151	5755	38.27	38.46
159	5795	38.65	38.65






802.11be (EHT80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	78.24	77.28
58	5290	77.76	77.76
106	5530	78.08	77.70
122	5610	77.76	77.76
138 (U-NII-2C)	5690	73.88	74.36
138 (U-NII-3)	5690	3.88	3.88
155	5775	77.70	78.08







802.11be (EHT160)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1)	5250	78.72	79.68
50 (U-NII-2A)	5250	77.76	77.76
114	5570	157.44	156.48



Spectrum Plot of Maximum Value

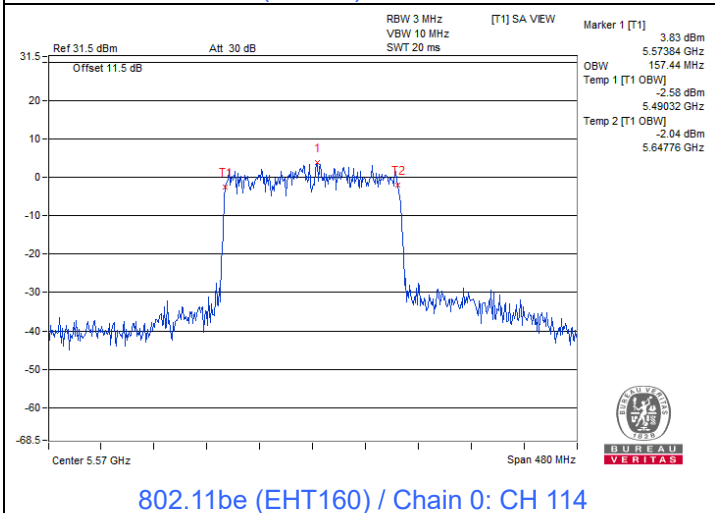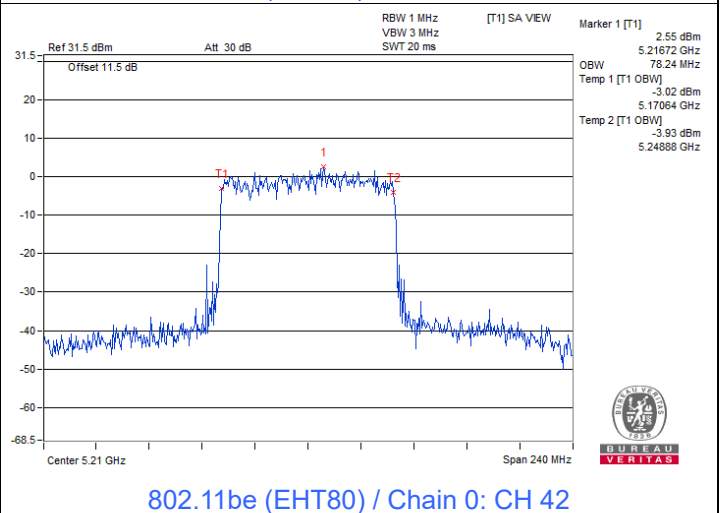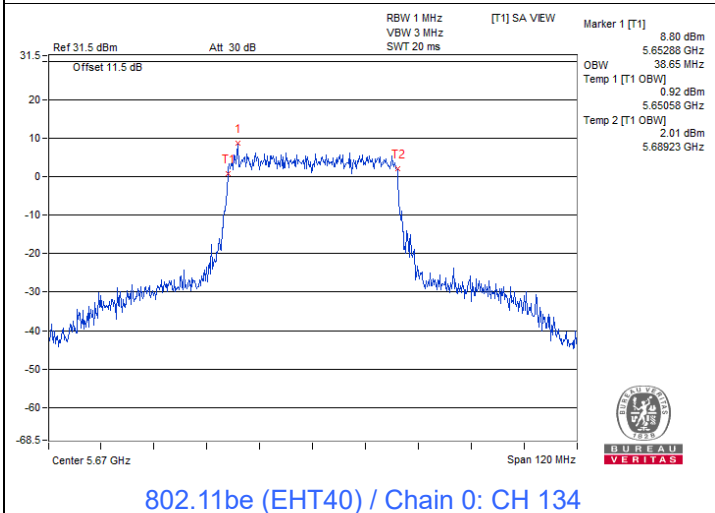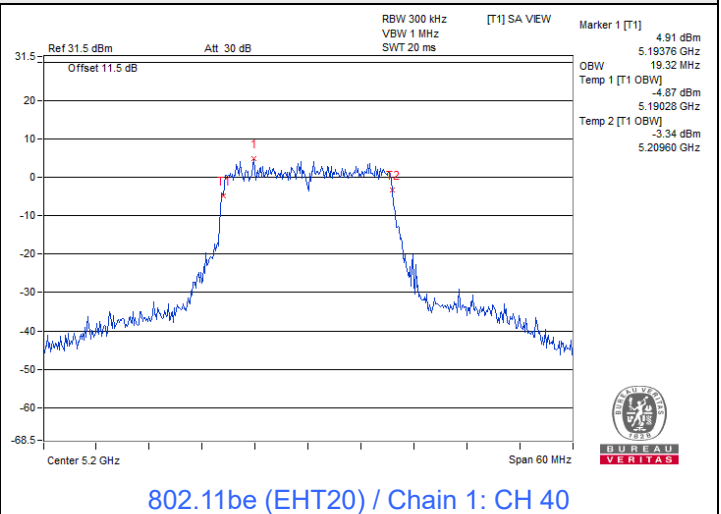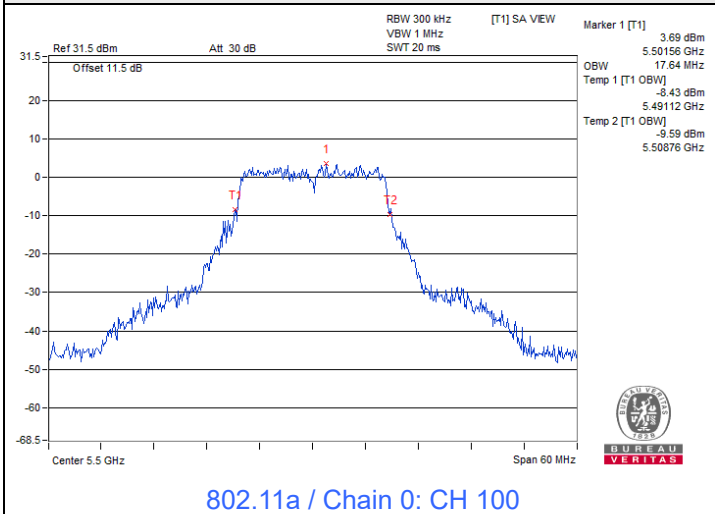





Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

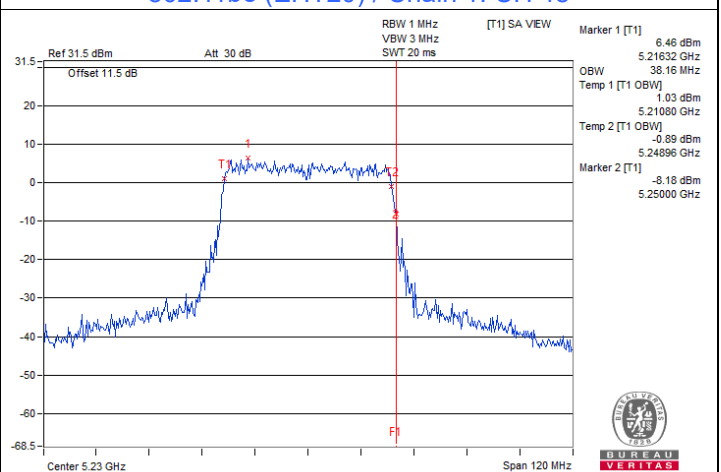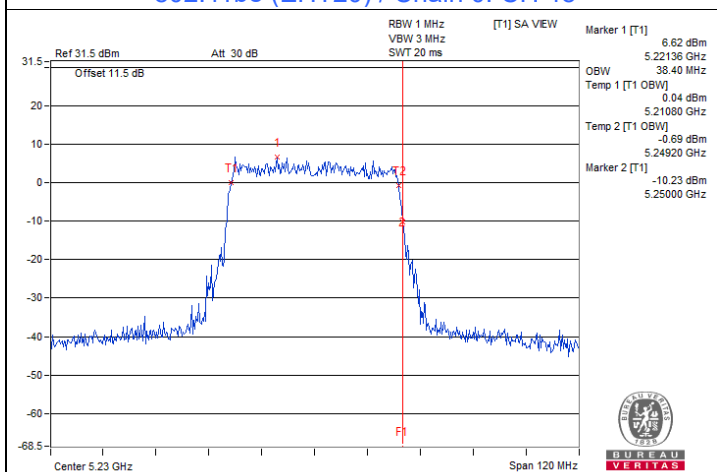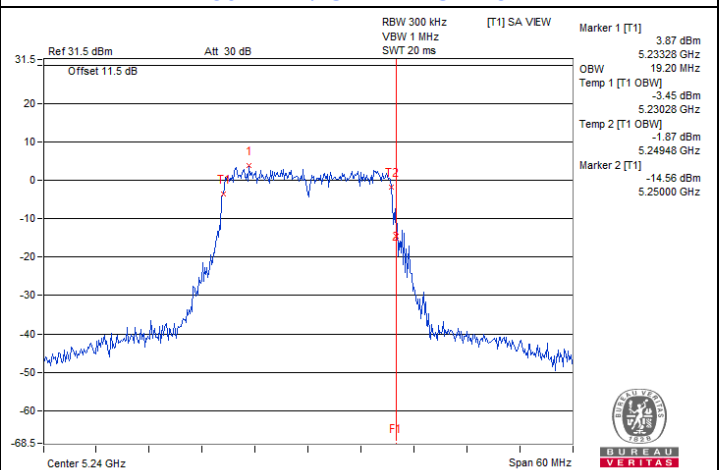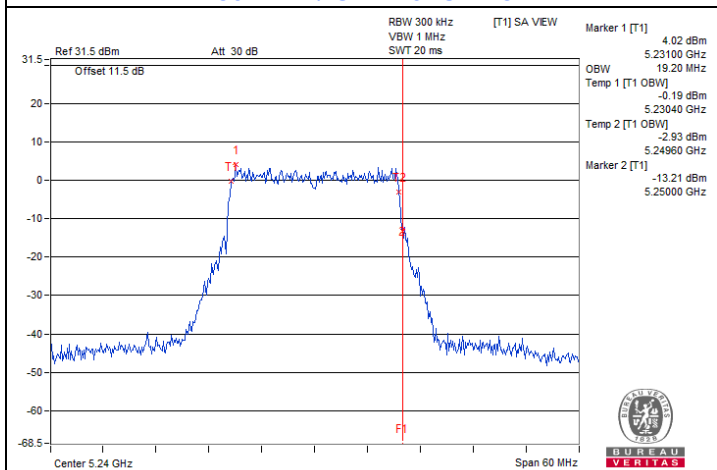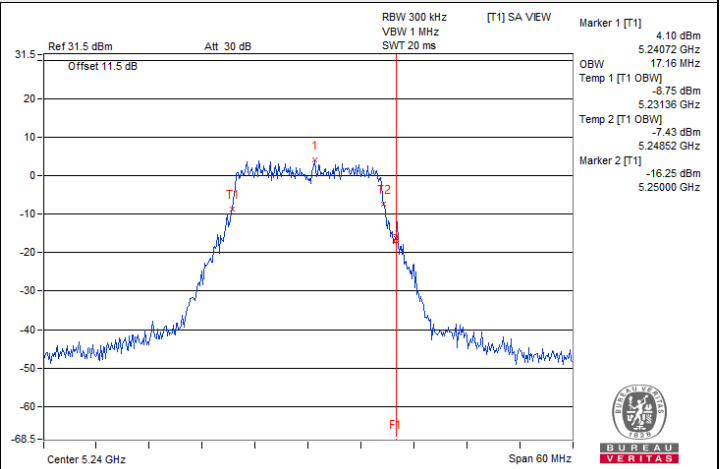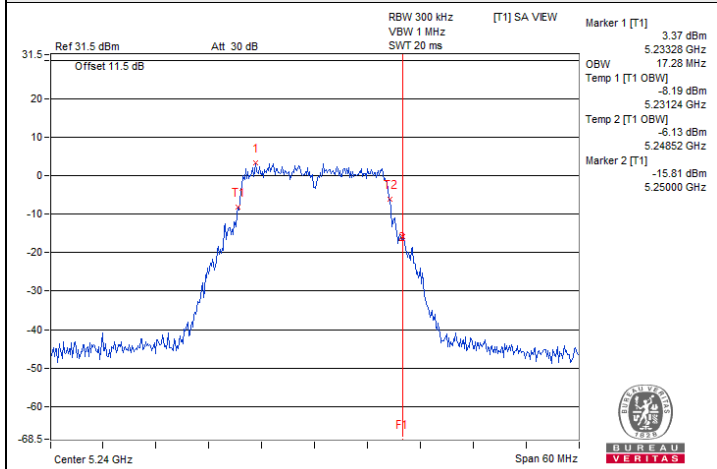


Spectrum Plot for nearby DFS band
(DFS is required, if 99% OCP straddle into U-NII-2A)

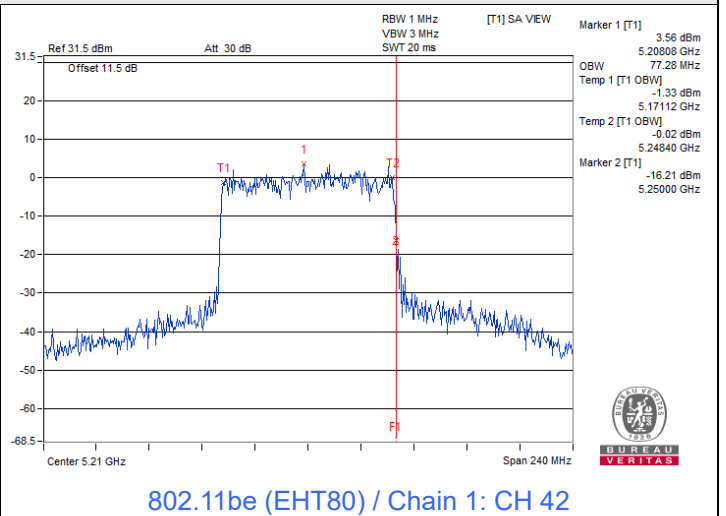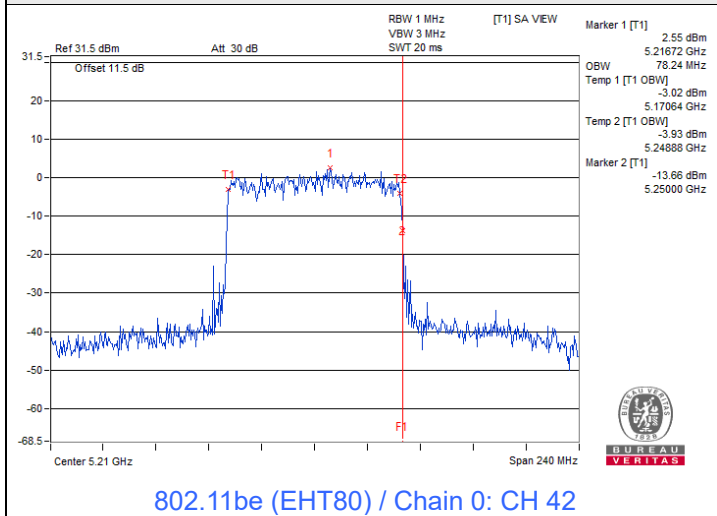


Spectrum Plot for nearby DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C)

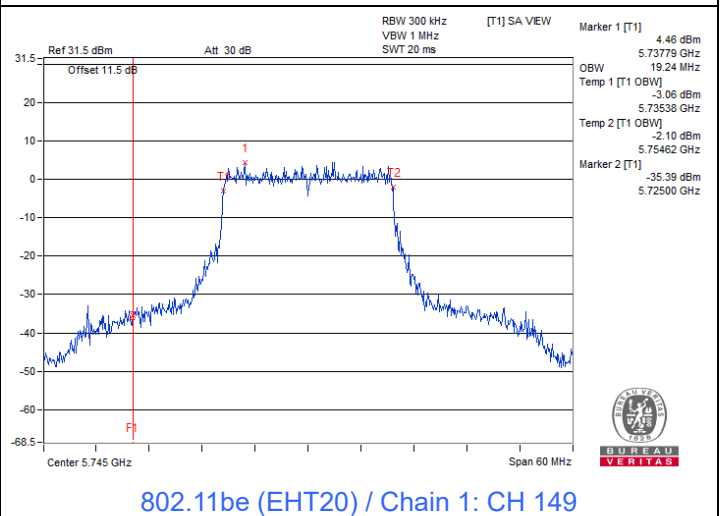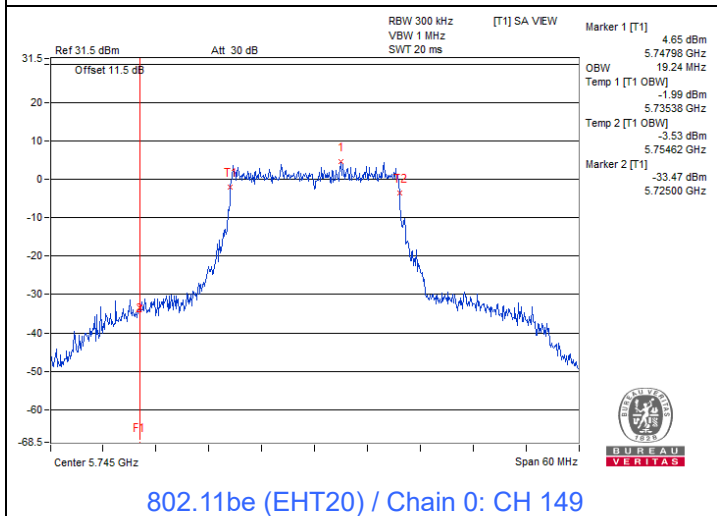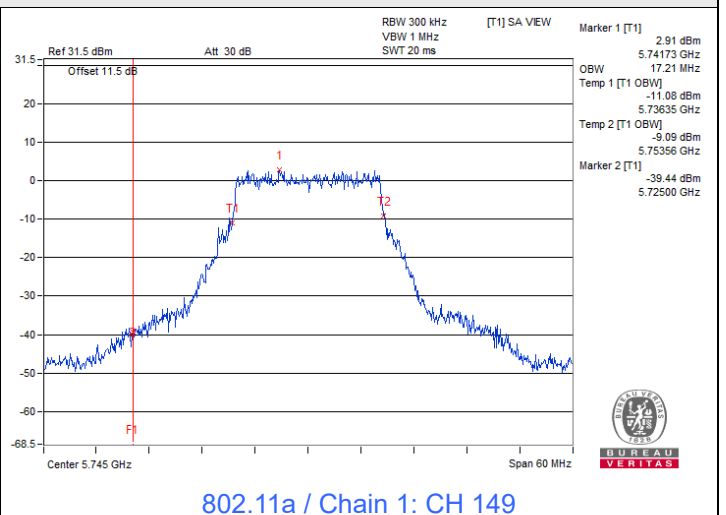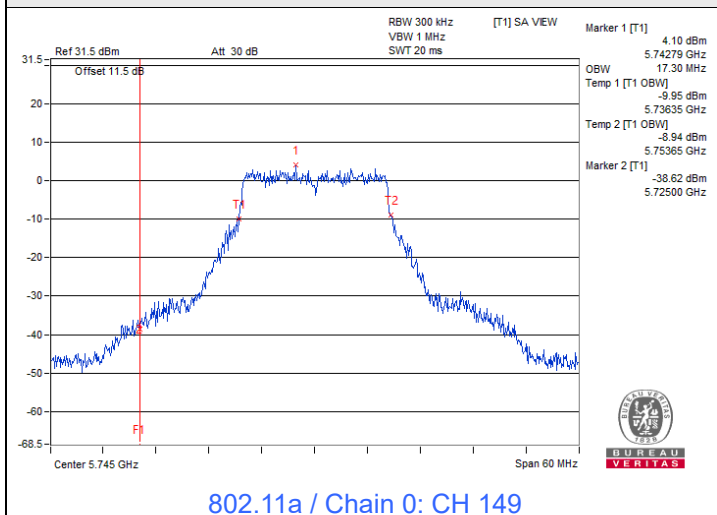


Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

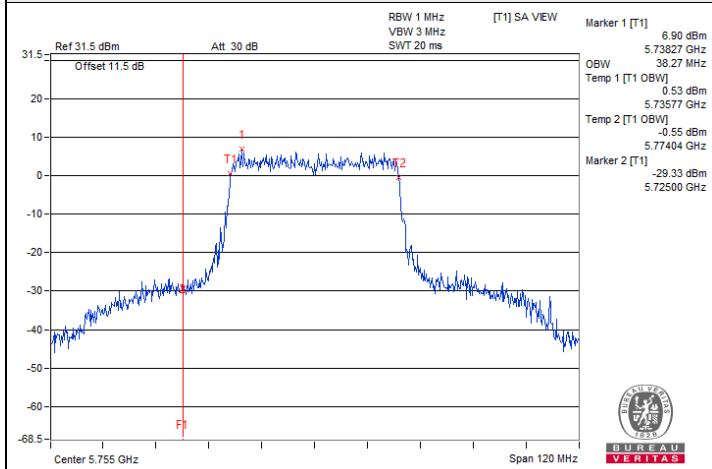


802.11be (EHT40) / Chain 0: CH 151

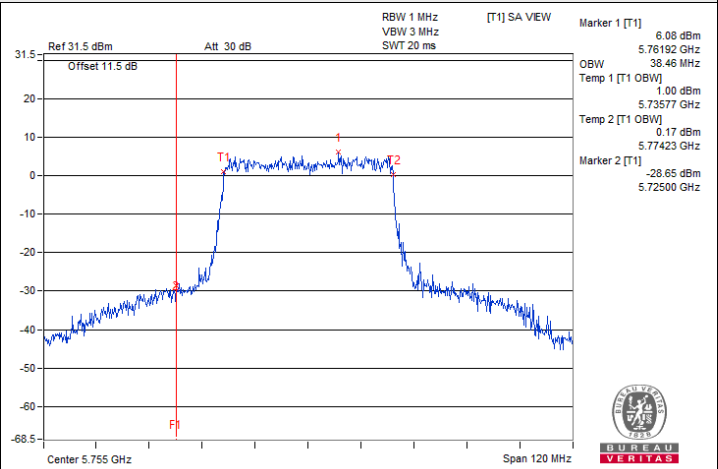

802.11be (EHT40) / Chain 1: CH 151

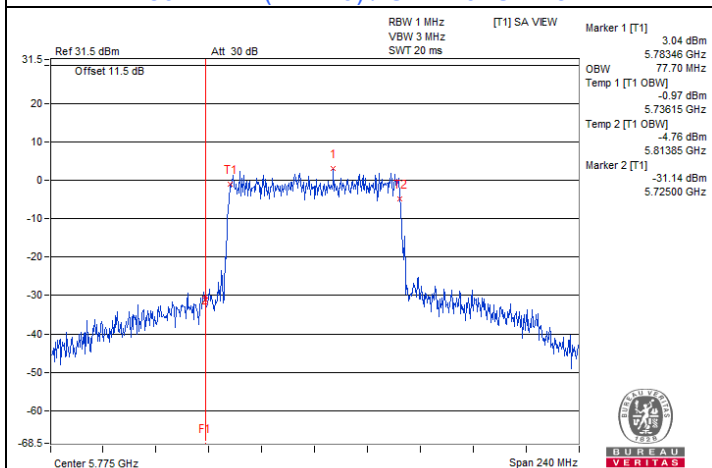

802.11be (EHT80) / Chain 0: CH 155

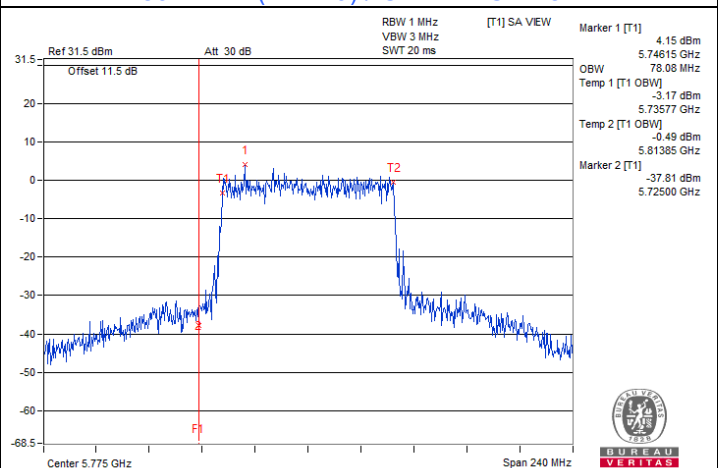

802.11be (EHT80) / Chain 1: CH 155

Mode B

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.28	17.16
40	5200	17.16	17.16
48	5240	17.28	17.52
52	5260	17.28	17.28
60	5300	17.28	17.16
64	5320	17.28	17.16
100	5500	17.16	17.28
116	5580	17.16	17.28
140	5700	17.28	17.04
144 (U-NII-2C)	5720	13.76	13.64
144 (U-NII-3)	5720	3.64	3.64
149	5745	17.40	17.11
157	5785	17.31	17.12
165	5825	17.11	17.12

802.11be (EHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	19.20	19.20
40	5200	19.20	19.20
48	5240	19.20	19.08
52	5260	19.20	19.20
60	5300	19.20	19.20
64	5320	19.20	19.20
100	5500	19.08	19.20
116	5580	19.20	19.20
140	5700	19.20	19.20
144 (U-NII-2C)	5720	14.60	14.60
144 (U-NII-3)	5720	4.48	4.60
149	5745	19.24	19.04
157	5785	19.14	19.24
165	5825	19.24	19.24

802.11be (EHT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	38.64	38.64
46	5230	38.40	38.40
54	5270	38.40	38.16
62	5310	38.40	38.40
102	5510	38.40	38.40
110	5550	38.46	38.27
134	5670	38.16	38.40
142 (U-NII-2C)	5710	34.20	34.20
142 (U-NII-3)	5710	3.96	4.20
151	5755	38.27	38.46
159	5795	38.27	38.46






802.11be (EHT80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	78.24	77.76
58	5290	77.76	77.28
106	5530	77.70	77.70
122	5610	77.76	78.24
138 (U-NII-2C)	5690	73.88	73.88
138 (U-NII-3)	5690	3.88	3.88
155	5775	77.69	77.70


802.11be (EHT160)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1)	5250	78.72	78.72
50 (U-NII-2A)	5250	78.72	77.76
114	5570	156.48	158.40


Spectrum Plot of Maximum Value

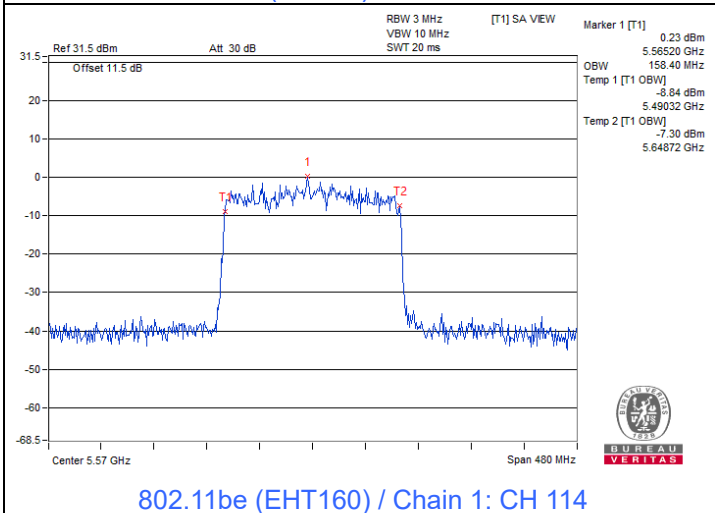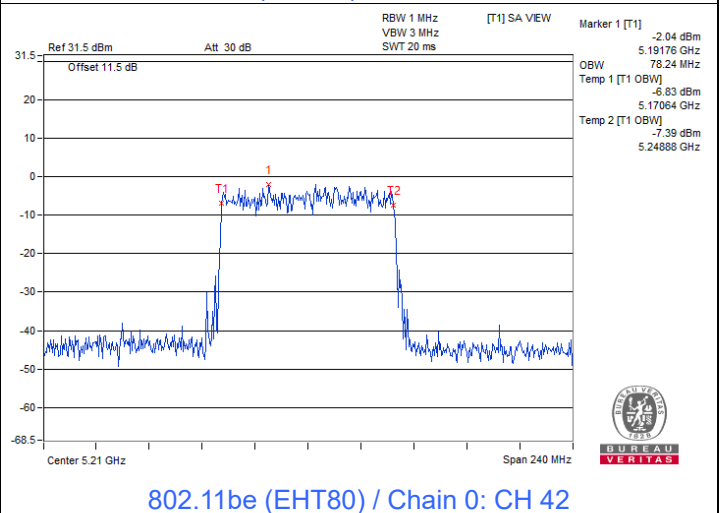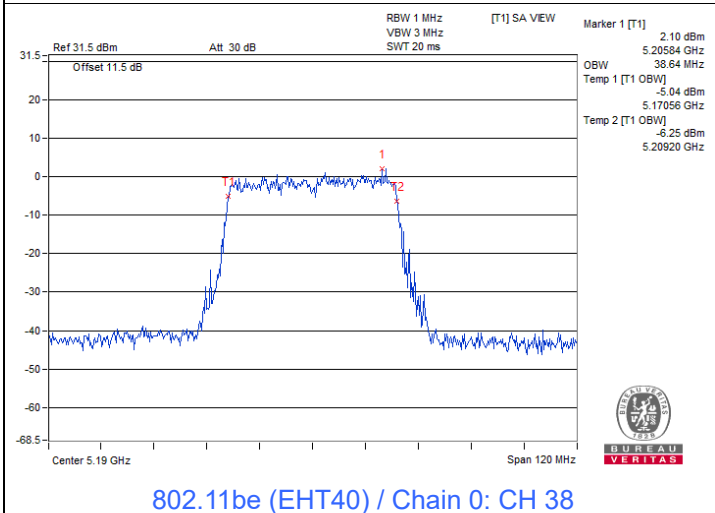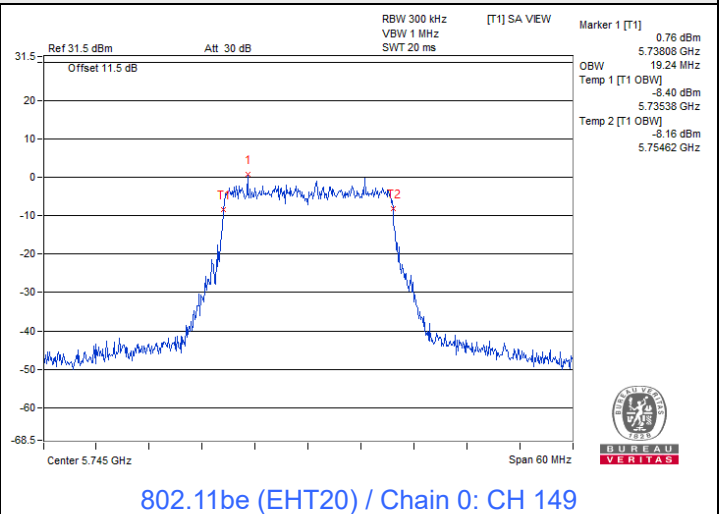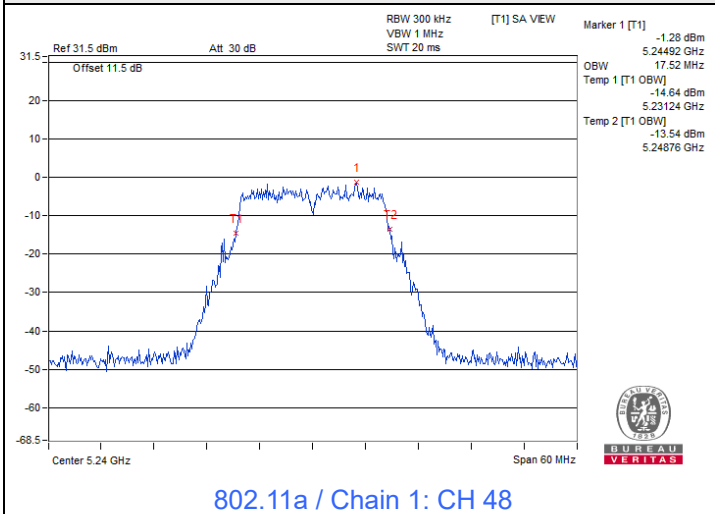


Spectrum Plot for nearby DFS band
(DFS is required, if 99% OCP straddle into U-NII-2A)

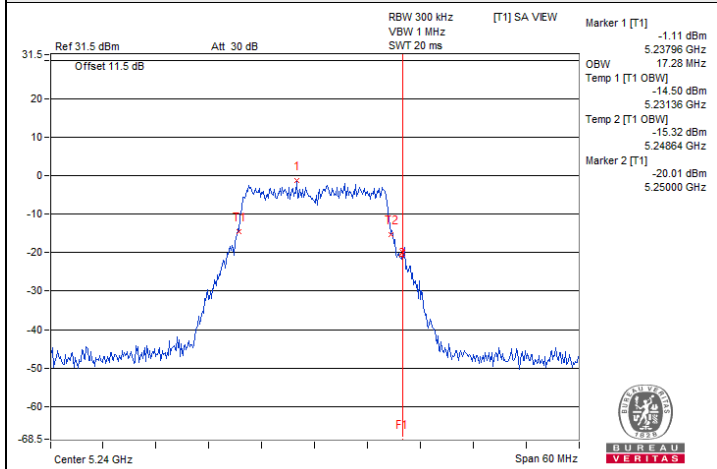


802.11a / Chain 0: CH 48

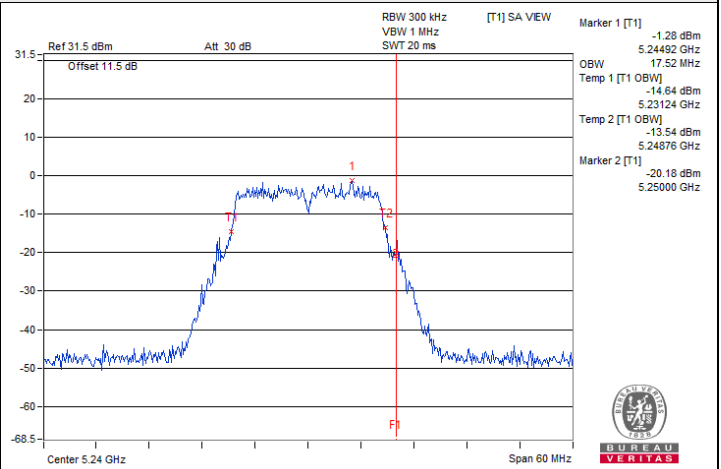


802.11a / Chain 1: CH 48

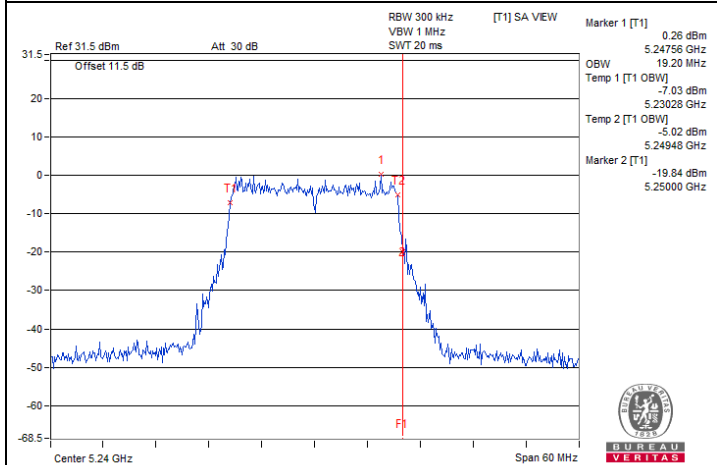


802.11be (EHT20) / Chain 0: CH 48

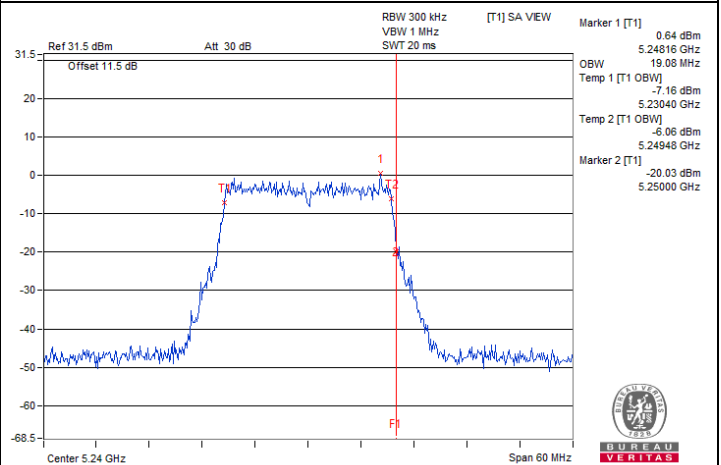

802.11be (EHT20) / Chain 1: CH 48


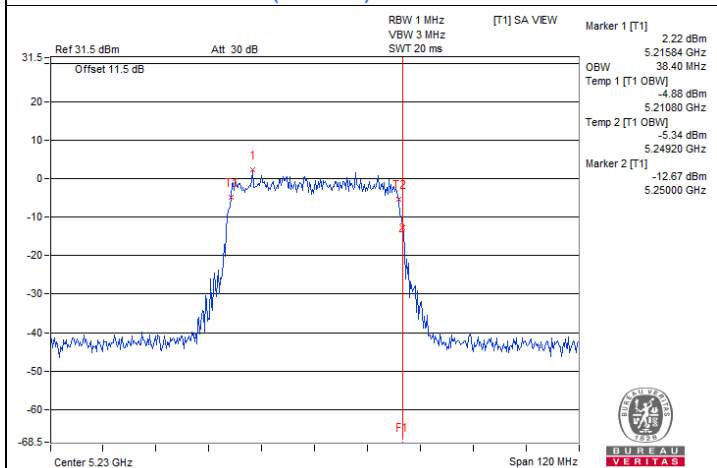


802.11be (EHT40) / Chain 0: CH 46




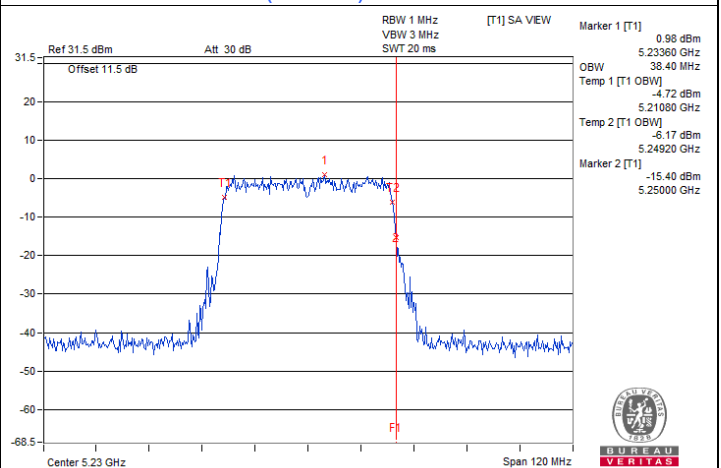


802.11be (EHT40) / Chain 1: CH 46





Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

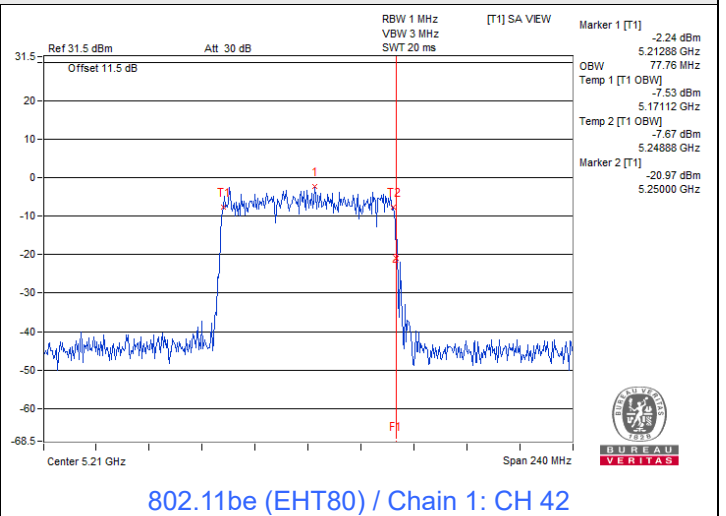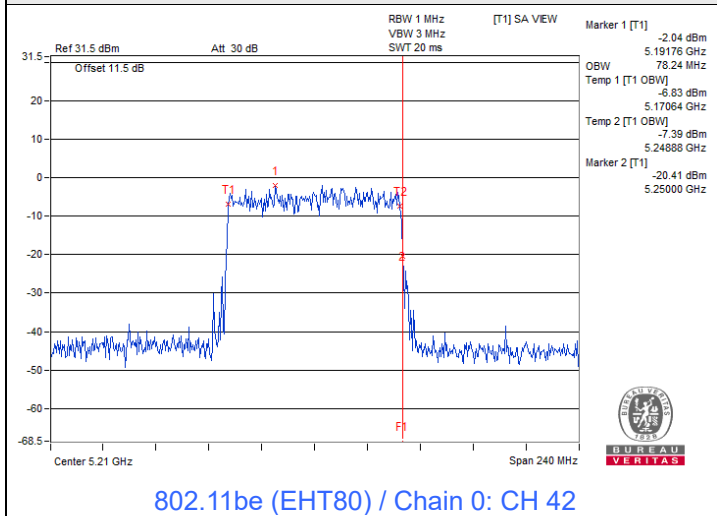

Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

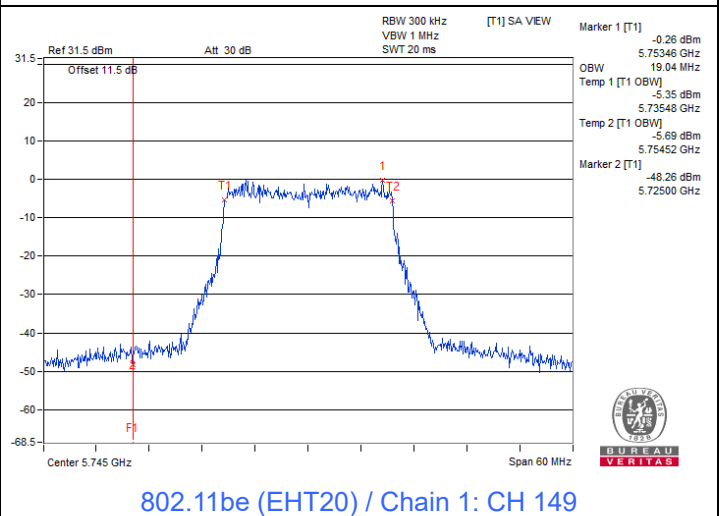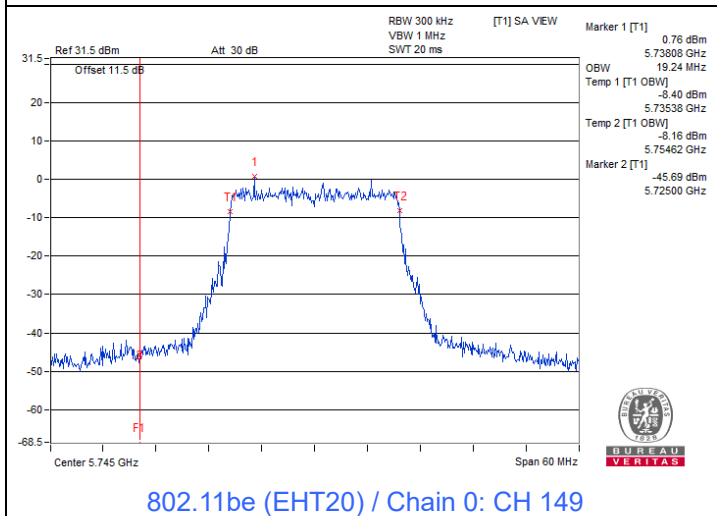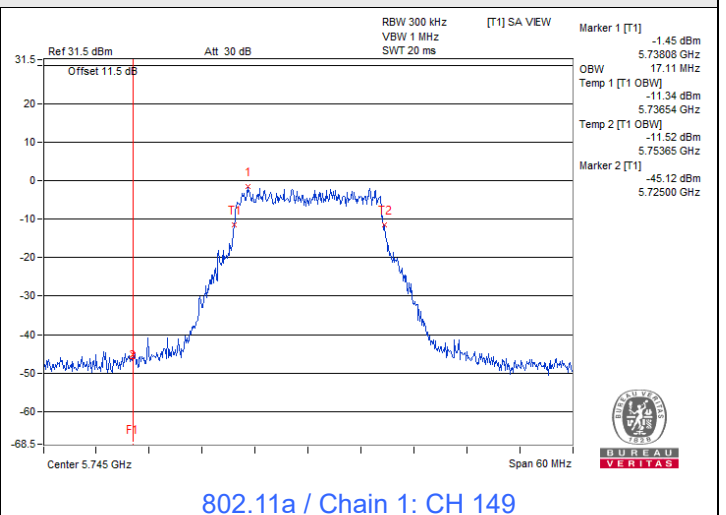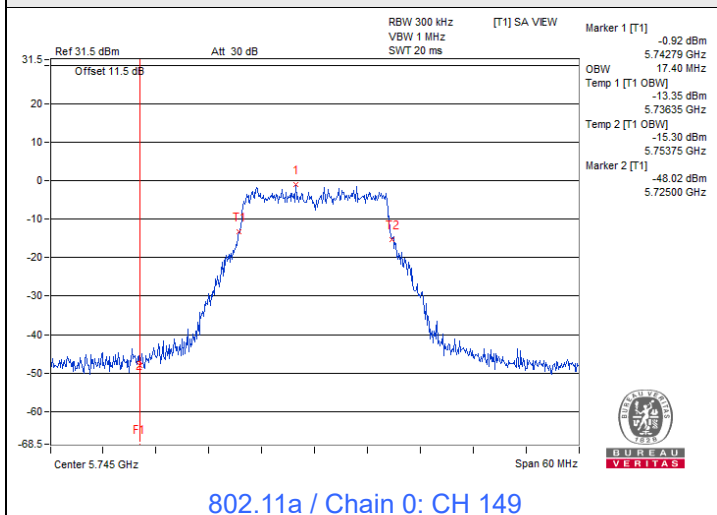

Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

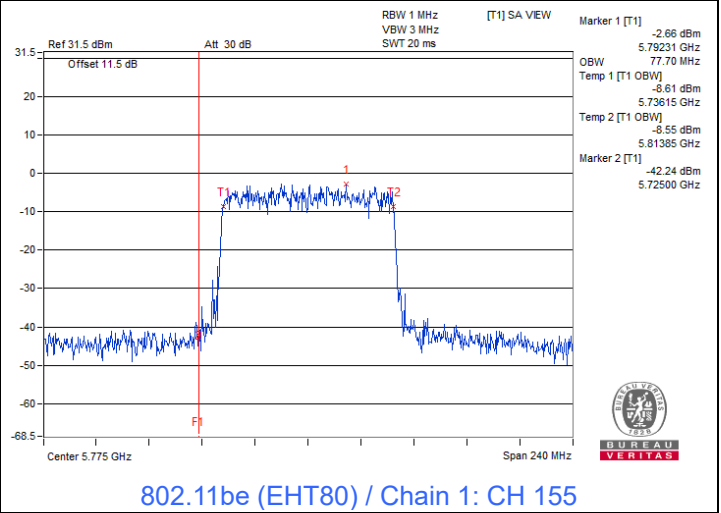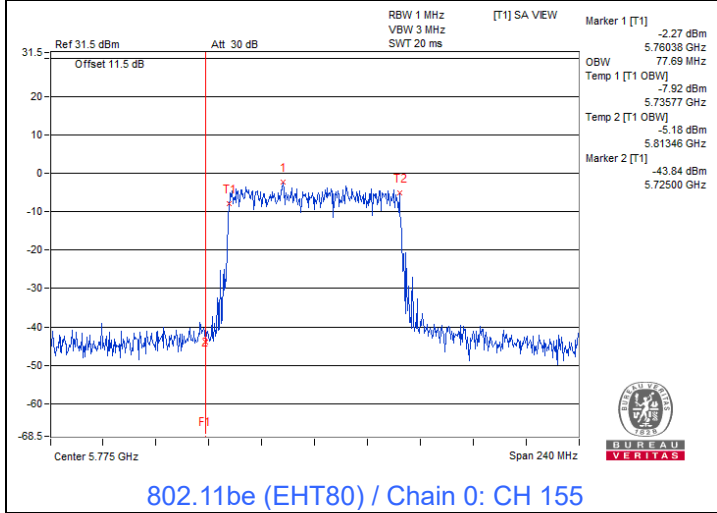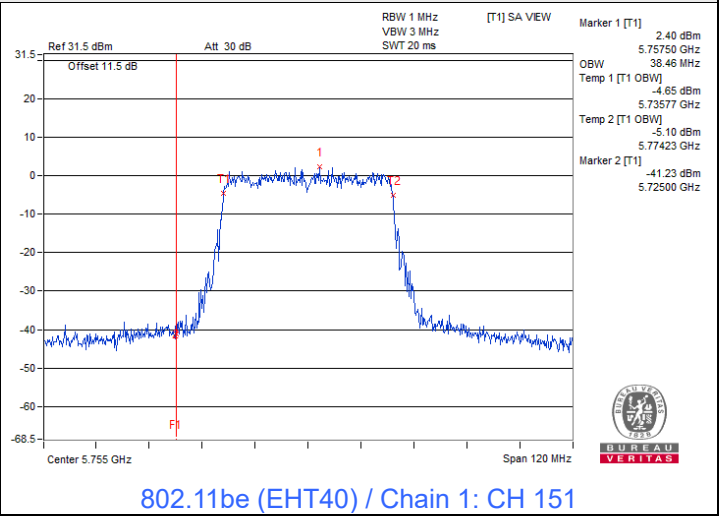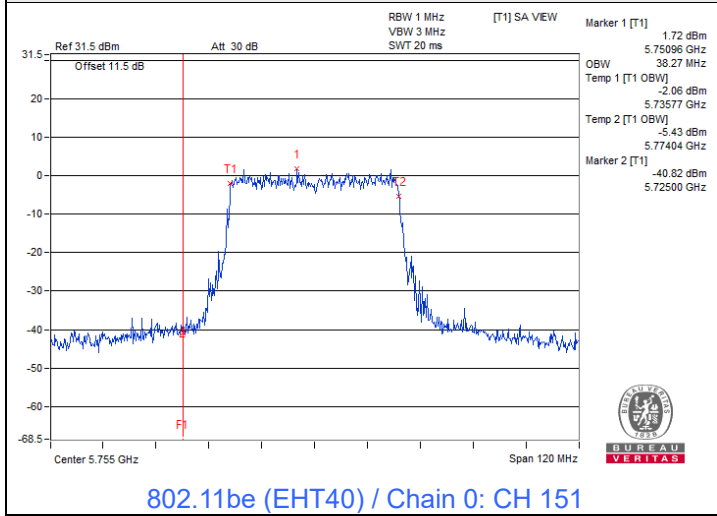


7.6 AC Power Conducted Emissions

RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18266	9.77	31.36	22.72	41.13	32.49	64.36	54.36	-23.23	-21.87
2	0.21621	9.76	27.07	17.32	36.83	27.08	62.96	52.96	-26.13	-25.88
3	0.43152	9.78	23.54	17.59	33.32	27.37	57.22	47.22	-23.90	-19.85
4	0.64703	9.79	25.69	19.13	35.48	28.92	56.00	46.00	-20.52	-17.08
5	0.95546	9.81	22.20	18.02	32.01	27.83	56.00	46.00	-23.99	-18.17
6	1.35581	9.83	21.86	17.50	31.69	27.33	56.00	46.00	-24.31	-18.67

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

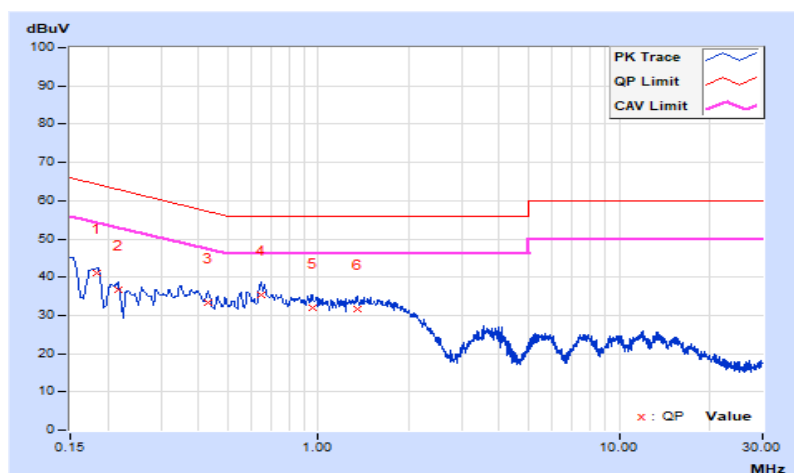


RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17737	9.77	29.06	20.92	38.83	30.69	64.61	54.61	-25.78	-23.92
2	0.20243	9.76	25.85	17.18	35.61	26.94	63.51	53.51	-27.90	-26.57
3	0.43543	9.79	22.29	16.74	32.08	26.53	57.15	47.15	-25.07	-20.62
4	0.67003	9.79	22.40	18.72	32.19	28.51	56.00	46.00	-23.81	-17.49
5	1.68816	9.85	21.99	17.53	31.84	27.38	56.00	46.00	-24.16	-18.62
6	3.78001	9.92	11.78	6.81	21.70	16.73	56.00	46.00	-34.30	-29.27

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

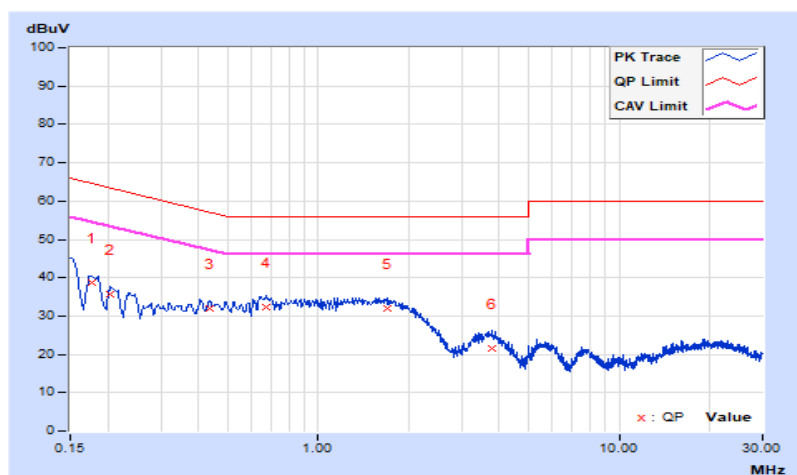

7.7 Unwanted Emissions below 1 GHz


Mode A

RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	23.7 QP	40.0	-16.3	2.00 H	8	32.3	-8.6
2	186.04	22.6 QP	43.5	-20.9	1.00 H	298	33.2	-10.6
3	280.23	26.4 QP	46.0	-19.6	1.00 H	2	34.3	-7.9
4	455.96	25.6 QP	46.0	-20.4	1.50 H	187	29.8	-4.2
5	616.22	29.1 QP	46.0	-16.9	1.00 H	203	29.7	-0.6
6	766.64	32.6 QP	46.0	-13.4	1.00 H	232	29.8	2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

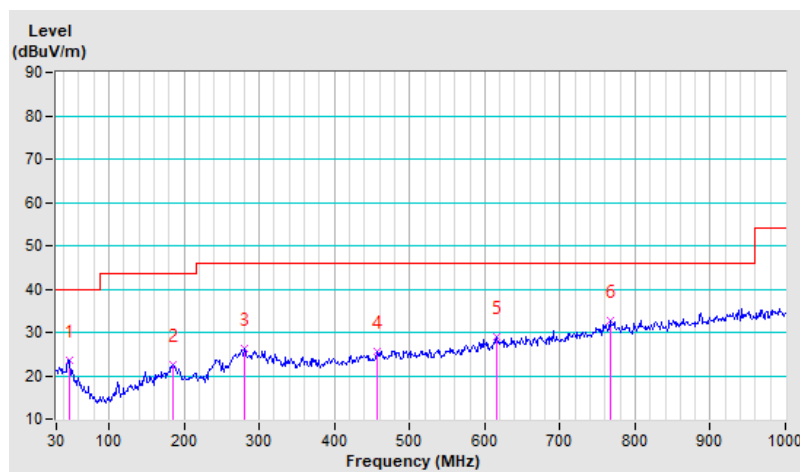


RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.09	27.2 QP	40.0	-12.8	1.50 V	315	35.9	-8.7
2	173.39	20.5 QP	43.5	-23.0	1.00 V	225	29.7	-9.2
3	283.04	23.5 QP	46.0	-22.5	1.00 V	33	31.3	-7.8
4	458.77	25.4 QP	46.0	-20.6	2.00 V	344	29.5	-4.1
5	603.57	28.7 QP	46.0	-17.3	1.50 V	55	29.6	-0.9
6	769.45	33.3 QP	46.0	-12.7	1.00 V	269	30.4	2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

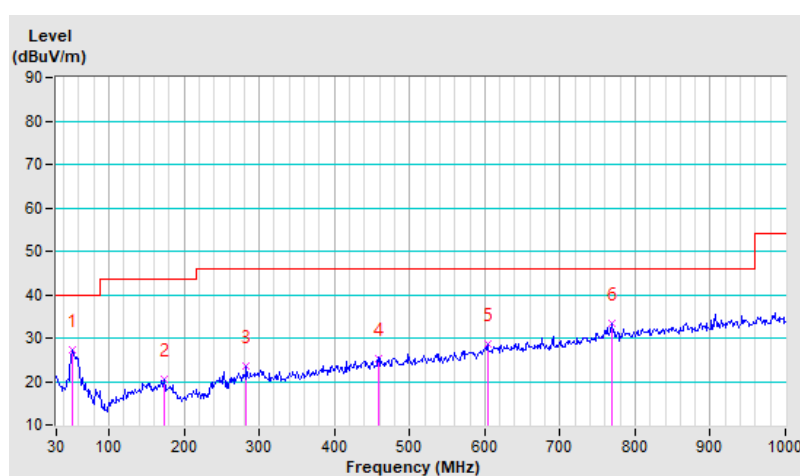


Mode B

RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	18.9 QP	40.0	-21.1	1.50 H	50	27.6	-8.7
2	164.96	20.2 QP	43.5	-23.3	1.00 H	92	28.8	-8.6
3	322.41	22.8 QP	46.0	-23.2	1.00 H	92	29.6	-6.8
4	458.77	25.9 QP	46.0	-20.1	1.00 H	6	30.0	-4.1
5	631.68	28.8 QP	46.0	-17.2	1.00 H	212	29.1	-0.3
6	751.17	30.4 QP	46.0	-15.6	2.00 H	30	27.9	2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

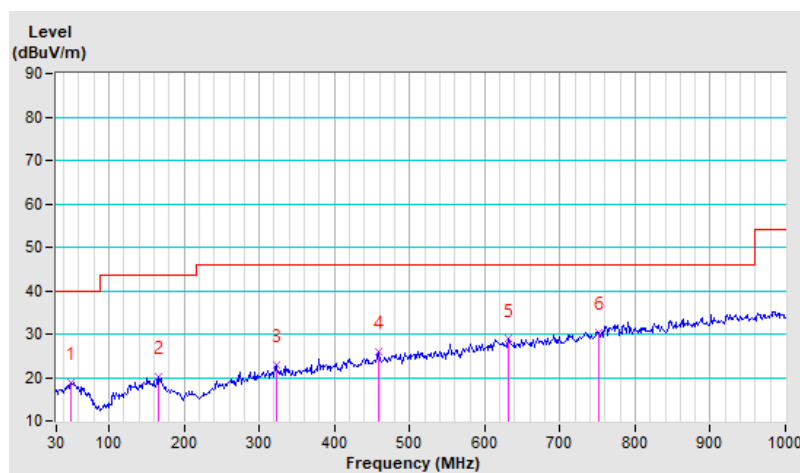


RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	52.49	21.2 QP	40.0	-18.8	1.50 V	341	29.9	-8.7
2	148.09	20.3 QP	43.5	-23.2	1.00 V	338	29.0	-8.7
3	299.91	21.3 QP	46.0	-24.7	2.00 V	212	28.7	-7.4
4	450.33	24.5 QP	46.0	-21.5	1.00 V	173	28.9	-4.4
5	617.62	28.3 QP	46.0	-17.7	2.00 V	134	28.8	-0.5
6	773.67	34.3 QP	46.0	-11.7	1.00 V	296	31.4	2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

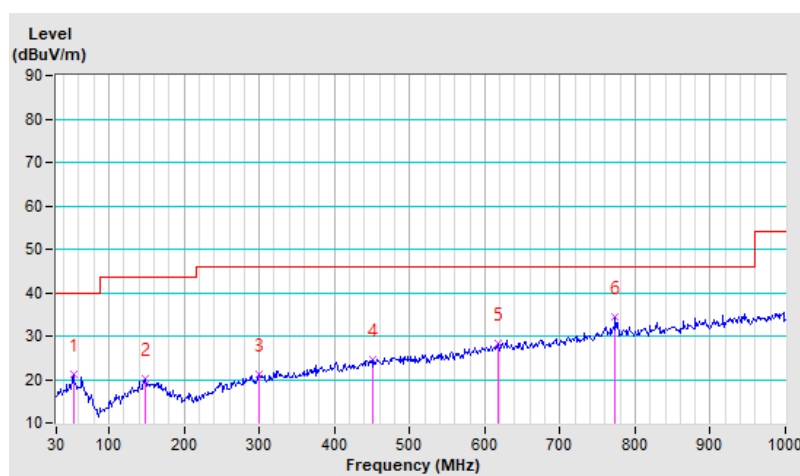

7.8 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.2 PK	74.0	-15.8	1.42 H	312	48.5	9.7
2	5150.00	44.4 AV	54.0	-9.6	1.42 H	312	34.7	9.7
3	*5180.00	104.7 PK			1.41 H	312	65.3	39.4
4	*5180.00	95.0 AV			1.41 H	312	55.6	39.4
5	#10360.00	56.5 PK	68.2	-11.7	1.82 H	85	36.8	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.3 PK	74.0	-15.7	2.71 V	106	48.6	9.7
2	5150.00	44.4 AV	54.0	-9.6	2.71 V	106	34.7	9.7
3	*5180.00	106.9 PK			2.71 V	106	67.5	39.4
4	*5180.00	97.2 AV			2.71 V	106	57.8	39.4
5	#10360.00	56.5 PK	68.2	-11.7	1.85 V	77	36.8	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	105.2 PK			1.43 H	314	65.9	39.3
2	*5200.00	95.3 AV			1.43 H	314	56.0	39.3
3	#10400.00	56.3 PK	68.2	-11.9	1.82 H	77	36.5	19.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	107.8 PK			2.71 V	105	68.5	39.3
2	*5200.00	97.6 AV			2.71 V	105	58.3	39.3
3	#10400.00	56.5 PK	68.2	-11.7	1.63 V	207	36.7	19.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	105.9 PK			1.52 H	310	66.4	39.5
2	*5240.00	96.1 AV			1.52 H	310	56.6	39.5
3	5350.00	57.2 PK	74.0	-16.8	1.52 H	310	47.5	9.7
4	5350.00	43.7 AV	54.0	-10.3	1.52 H	310	34.0	9.7
5	#10480.00	56.3 PK	68.2	-11.9	1.80 H	95	36.2	20.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	108.3 PK			2.72 V	108	68.8	39.5
2	*5240.00	98.0 AV			2.72 V	108	58.5	39.5
3	5350.00	57.7 PK	74.0	-16.3	2.72 V	108	48.0	9.7
4	5350.00	44.2 AV	54.0	-9.8	2.72 V	108	34.5	9.7
5	#10480.00	56.9 PK	68.2	-11.3	1.62 V	211	36.8	20.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.3 PK	74.0	-16.7	1.36 H	315	47.6	9.7
2	5150.00	44.1 AV	54.0	-9.9	1.36 H	315	34.4	9.7
3	*5260.00	106.1 PK			1.36 H	315	66.5	39.6
4	*5260.00	96.4 AV			1.36 H	315	56.8	39.6
5	#10520.00	56.8 PK	68.2	-11.4	1.92 H	77	36.6	20.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.0 PK	74.0	-16.0	2.58 V	105	48.3	9.7
2	5150.00	44.7 AV	54.0	-9.3	2.58 V	105	35.0	9.7
3	*5260.00	109.0 PK			2.58 V	105	69.4	39.6
4	*5260.00	99.3 AV			2.58 V	105	59.7	39.6
5	#10520.00	57.0 PK	68.2	-11.2	1.63 V	201	36.8	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	106.2 PK			1.36 H	317	66.6	39.6
2	*5300.00	95.7 AV			1.33 H	312	56.1	39.6
3	10600.00	56.4 PK	74.0	-17.6	1.82 H	88	36.5	19.9
4	10600.00	44.9 AV	54.0	-9.1	1.82 H	88	25.0	19.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	109.4 PK			2.66 V	106	69.8	39.6
2	*5300.00	99.2 AV			2.66 V	106	59.6	39.6
3	10600.00	56.7 PK	74.0	-17.3	1.67 V	205	36.8	19.9
4	10600.00	45.1 AV	54.0	-8.9	1.67 V	205	25.2	19.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	105.6 PK			1.49 H	318	66.0	39.6
2	*5320.00	95.7 AV			1.49 H	318	56.1	39.6
3	5350.00	57.2 PK	74.0	-16.8	1.49 H	318	47.5	9.7
4	5350.00	44.3 AV	54.0	-9.7	1.49 H	318	34.6	9.7
5	10640.00	56.7 PK	74.0	-17.3	1.82 H	82	36.5	20.2
6	10640.00	45.3 AV	54.0	-8.7	1.82 H	82	25.1	20.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	108.5 PK			2.51 V	106	68.9	39.6
2	*5320.00	98.8 AV			2.51 V	106	59.2	39.6
3	5350.00	58.2 PK	74.0	-15.8	2.51 V	105	48.5	9.7
4	5350.00	44.7 AV	54.0	-9.3	2.51 V	105	35.0	9.7
5	10640.00	56.9 PK	74.0	-17.1	1.67 V	207	36.7	20.2
6	10640.00	45.4 AV	54.0	-8.6	1.67 V	207	25.2	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.3 PK	74.0	-16.7	1.26 H	320	47.5	9.8
2	5460.00	44.5 AV	54.0	-9.5	1.26 H	320	34.7	9.8
3	#5470.00	57.6 PK	68.2	-10.6	1.26 H	320	47.8	9.8
4	*5500.00	104.1 PK			1.26 H	320	64.4	39.7
5	*5500.00	94.0 AV			1.26 H	320	54.3	39.7
6	11000.00	56.8 PK	74.0	-17.2	1.87 H	83	36.5	20.3
7	11000.00	44.9 AV	54.0	-9.1	1.87 H	83	24.6	20.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.8 PK	74.0	-16.2	2.53 V	102	48.0	9.8
2	5460.00	44.8 AV	54.0	-9.2	2.53 V	102	35.0	9.8
3	#5470.00	58.5 PK	68.2	-9.7	2.53 V	102	48.7	9.8
4	*5500.00	105.4 PK			2.53 V	106	65.7	39.7
5	*5500.00	95.8 AV			2.53 V	106	56.1	39.7
6	11000.00	57.1 PK	74.0	-16.9	1.67 V	208	36.8	20.3
7	11000.00	45.3 AV	54.0	-8.7	1.67 V	208	25.0	20.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	102.7 PK			1.26 H	313	62.8	39.9
2	*5580.00	93.0 AV			1.26 H	313	53.1	39.9
3	11160.00	56.8 PK	74.0	-17.2	1.84 H	93	36.5	20.3
4	11160.00	45.3 AV	54.0	-8.7	1.84 H	93	25.0	20.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	105.7 PK			2.57 V	102	65.8	39.9
2	*5580.00	95.9 AV			2.57 V	102	56.0	39.9
3	11160.00	57.1 PK	74.0	-16.9	1.61 V	203	36.8	20.3
4	11160.00	45.5 AV	54.0	-8.5	1.61 V	203	25.2	20.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	102.6 PK			1.28 H	322	62.5	40.1
2	*5700.00	93.5 AV			1.28 H	322	53.4	40.1
3	#5725.00	58.2 PK	68.2	-10.0	1.28 H	322	48.0	10.2
4	11400.00	57.6 PK	74.0	-16.4	1.88 H	91	36.5	21.1
5	11400.00	46.3 AV	54.0	-7.7	1.88 H	91	25.2	21.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	105.8 PK			2.58 V	96	65.7	40.1
2	*5700.00	96.1 AV			2.58 V	96	56.0	40.1
3	#5725.00	58.5 PK	68.2	-9.7	2.58 V	96	48.3	10.2
4	11400.00	57.8 PK	74.0	-16.2	1.63 V	203	36.7	21.1
5	11400.00	46.5 AV	54.0	-7.5	1.63 V	203	25.4	21.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	58.8 PK	68.2	-9.4	1.17 H	330	49.0	9.8
2	*5720.00	104.8 PK			1.17 H	330	64.6	40.2
3	*5720.00	94.2 AV			1.17 H	330	54.0	40.2
4	#5850.00	57.7 PK	68.2	-10.5	1.17 H	330	47.5	10.2
5	11440.00	57.6 PK	74.0	-16.4	1.86 H	89	36.5	21.1
6	11440.00	46.1 AV	54.0	-7.9	1.86 H	89	25.0	21.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	59.0 PK	68.2	-9.2	2.58 V	94	49.2	9.8
2	*5720.00	105.8 PK			2.58 V	94	65.6	40.2
3	*5720.00	96.1 AV			2.58 V	94	55.9	40.2
4	#5850.00	58.0 PK	68.2	-10.2	2.58 V	94	47.8	10.2
5	11440.00	57.8 PK	74.0	-16.2	1.66 V	201	36.7	21.1
6	11440.00	46.3 AV	54.0	-7.7	1.66 V	201	25.2	21.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	101.6 PK			1.30 H	346	61.3	40.3
2	*5745.00	91.6 AV			1.30 H	346	51.3	40.3
3	11490.00	55.8 PK	74.0	-18.2	1.85 H	91	34.8	21.0
4	11490.00	44.4 AV	54.0	-9.6	1.85 H	91	23.4	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	104.7 PK			2.50 V	105	64.4	40.3
2	*5745.00	95.0 AV			2.50 V	105	54.7	40.3
3	11490.00	57.8 PK	74.0	-16.2	1.63 V	211	36.8	21.0
4	11490.00	46.2 AV	54.0	-7.8	1.63 V	211	25.2	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	103.7 PK			1.05 H	337	63.2	40.5
2	*5785.00	95.1 AV			1.05 H	337	54.6	40.5
3	11570.00	56.9 PK	74.0	-17.1	1.88 H	87	36.2	20.7
4	11570.00	45.3 AV	54.0	-8.7	1.88 H	87	24.6	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	105.5 PK			2.49 V	107	65.0	40.5
2	*5785.00	97.2 AV			2.49 V	107	56.7	40.5
3	11570.00	57.7 PK	74.0	-16.3	1.62 V	212	37.0	20.7
4	11570.00	46.2 AV	54.0	-7.8	1.62 V	212	25.5	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	103.6 PK			1.05 H	342	63.2	40.4
2	*5825.00	95.2 AV			1.05 H	342	54.8	40.4
3	11650.00	56.9 PK	74.0	-17.1	1.74 H	85	36.6	20.3
4	11650.00	45.0 AV	54.0	-9.0	1.74 H	85	24.7	20.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	105.5 PK			2.48 V	104	65.1	40.4
2	*5825.00	96.6 AV			2.48 V	104	56.2	40.4
3	11650.00	57.1 PK	74.0	-16.9	1.66 V	203	36.8	20.3
4	11650.00	45.5 AV	54.0	-8.5	1.66 V	203	25.2	20.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.9 PK	74.0	-17.1	1.26 H	314	47.2	9.7
2	5150.00	44.3 AV	54.0	-9.7	1.26 H	314	34.6	9.7
3	*5180.00	106.1 PK			1.26 H	314	66.7	39.4
4	*5180.00	93.9 AV			1.26 H	314	54.5	39.4
5	#10360.00	56.1 PK	68.2	-12.1	1.74 H	90	36.4	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.5 PK	74.0	-16.5	2.69 V	107	47.8	9.7
2	5150.00	44.9 AV	54.0	-9.1	2.69 V	107	35.2	9.7
3	*5180.00	109.3 PK			2.69 V	107	69.9	39.4
4	*5180.00	96.9 AV			2.69 V	107	57.5	39.4
5	#10360.00	56.5 PK	68.2	-11.7	1.66 V	208	36.8	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	106.5 PK			1.33 H	325	67.2	39.3
2	*5200.00	93.2 AV			1.33 H	325	53.9	39.3
3	#10400.00	56.4 PK	68.2	-11.8	1.79 H	88	36.6	19.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	110.1 PK			2.73 V	107	70.8	39.3
2	*5200.00	97.1 AV			2.73 V	107	57.8	39.3
3	#10400.00	56.6 PK	68.2	-11.6	1.65 V	208	36.8	19.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	107.3 PK			1.40 H	317	67.8	39.5
2	*5240.00	95.1 AV			1.40 H	317	55.6	39.5
3	5350.00	56.7 PK	74.0	-17.3	1.40 H	317	47.0	9.7
4	5350.00	44.1 AV	54.0	-9.9	1.40 H	317	34.4	9.7
5	#10480.00	56.6 PK	68.2	-11.6	1.86 H	77	36.5	20.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	111.0 PK			2.64 V	105	71.5	39.5
2	*5240.00	98.3 AV			2.64 V	105	58.8	39.5
3	5350.00	57.2 PK	74.0	-16.8	2.64 V	105	47.5	9.7
4	5350.00	44.3 AV	54.0	-9.7	2.64 V	105	34.6	9.7
5	#10480.00	57.0 PK	68.2	-11.2	1.62 V	207	36.9	20.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.3 PK	74.0	-16.7	1.55 H	316	47.6	9.7
2	5150.00	44.1 AV	54.0	-9.9	1.55 H	316	34.4	9.7
3	*5260.00	108.1 PK			1.55 H	316	68.5	39.6
4	*5260.00	95.4 AV			1.55 H	316	55.8	39.6
5	#10520.00	56.6 PK	68.2	-11.6	1.86 H	89	36.4	20.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.7 PK	74.0	-16.3	2.58 V	102	48.0	9.7
2	5150.00	44.3 AV	54.0	-9.7	2.58 V	102	34.6	9.7
3	*5260.00	110.8 PK			2.58 V	102	71.2	39.6
4	*5260.00	98.4 AV			2.58 V	102	58.8	39.6
5	#10520.00	56.9 PK	68.2	-11.3	1.62 V	203	36.7	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	108.5 PK			1.52 H	314	68.9	39.6
2	*5300.00	95.7 AV			1.52 H	314	56.1	39.6
3	10600.00	56.0 PK	74.0	-18.0	1.88 H	90	36.1	19.9
4	10600.00	45.0 AV	54.0	-9.0	1.88 H	90	25.1	19.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	111.1 PK			2.62 V	104	71.5	39.6
2	*5300.00	98.9 AV			2.62 V	104	59.3	39.6
3	10600.00	56.4 PK	74.0	-17.6	1.70 V	203	36.5	19.9
4	10600.00	45.2 AV	54.0	-8.8	1.70 V	203	25.3	19.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	107.6 PK			1.47 H	317	68.0	39.6
2	*5320.00	95.5 AV			1.47 H	317	55.9	39.6
3	5350.00	57.0 PK	74.0	-17.0	1.47 H	317	47.3	9.7
4	5350.00	44.2 AV	54.0	-9.8	1.47 H	317	34.5	9.7
5	10640.00	56.6 PK	74.0	-17.4	1.83 H	84	36.4	20.2
6	10640.00	45.3 AV	54.0	-8.7	1.83 H	84	25.1	20.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	109.9 PK			2.59 V	106	70.3	39.6
2	*5320.00	97.7 AV			2.59 V	106	58.1	39.6
3	5350.00	57.7 PK	74.0	-16.3	2.59 V	106	48.0	9.7
4	5350.00	44.7 AV	54.0	-9.3	2.59 V	106	35.0	9.7
5	10640.00	56.9 PK	74.0	-17.1	1.62 V	205	36.7	20.2
6	10640.00	45.5 AV	54.0	-8.5	1.62 V	205	25.3	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.8 PK	74.0	-16.2	1.03 H	335	48.0	9.8
2	5460.00	44.2 AV	54.0	-9.8	1.03 H	335	34.4	9.8
3	#5470.00	58.2 PK	68.2	-10.0	1.03 H	335	48.4	9.8
4	*5500.00	104.4 PK			1.03 H	335	64.7	39.7
5	*5500.00	91.7 AV			1.03 H	335	52.0	39.7
6	11000.00	56.9 PK	74.0	-17.1	1.83 H	73	36.6	20.3
7	11000.00	45.2 AV	54.0	-8.8	1.83 H	73	24.9	20.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.3 PK	74.0	-15.7	2.66 V	79	48.5	9.8
2	5460.00	44.4 AV	54.0	-9.6	2.66 V	79	34.6	9.8
3	#5470.00	58.3 PK	68.2	-9.9	2.66 V	79	48.5	9.8
4	*5500.00	108.2 PK			2.66 V	79	68.5	39.7
5	*5500.00	94.7 AV			2.66 V	79	55.0	39.7
6	11000.00	57.1 PK	74.0	-16.9	1.63 V	209	36.8	20.3
7	11000.00	45.3 AV	54.0	-8.7	1.63 V	209	25.0	20.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	106.0 PK			1.09 H	316	66.1	39.9
2	*5580.00	92.2 AV			1.09 H	316	52.3	39.9
3	11160.00	56.9 PK	74.0	-17.1	1.84 H	86	36.6	20.3
4	11160.00	44.9 AV	54.0	-9.1	1.84 H	86	24.6	20.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	108.9 PK			2.62 V	95	69.0	39.9
2	*5580.00	95.4 AV			2.62 V	95	55.5	39.9
3	11160.00	57.1 PK	74.0	-16.9	1.69 V	210	36.8	20.3
4	11160.00	45.0 AV	54.0	-9.0	1.69 V	210	24.7	20.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	104.1 PK			1.12 H	309	64.0	40.1
2	*5700.00	91.4 AV			1.12 H	309	51.3	40.1
3	#5725.00	61.7 PK	68.2	-6.5	1.12 H	309	51.5	10.2
4	11400.00	57.7 PK	74.0	-16.3	1.82 H	87	36.6	21.1
5	11400.00	46.1 AV	54.0	-7.9	1.82 H	87	25.0	21.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	107.5 PK			2.55 V	95	67.4	40.1
2	*5700.00	94.9 AV			2.55 V	95	54.8	40.1
3	#5725.00	63.1 PK	68.2	-5.1	2.55 V	95	52.9	10.2
4	11400.00	57.9 PK	74.0	-16.1	1.69 V	203	36.8	21.1
5	11400.00	46.3 AV	54.0	-7.7	1.69 V	203	25.2	21.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.4 PK	68.2	-10.8	1.03 H	334	47.6	9.8
2	*5720.00	106.5 PK			1.03 H	334	66.3	40.2
3	*5720.00	93.2 AV			1.03 H	334	53.0	40.2
4	#5850.00	57.8 PK	68.2	-10.4	1.03 H	334	47.6	10.2
5	11440.00	57.4 PK	74.0	-16.6	1.86 H	83	36.3	21.1
6	11440.00	45.9 AV	54.0	-8.1	1.86 H	83	24.8	21.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.7 PK	68.2	-10.5	2.59 V	94	47.9	9.8
2	*5720.00	109.3 PK			2.59 V	94	69.1	40.2
3	*5720.00	95.4 AV			2.59 V	94	55.2	40.2
4	#5850.00	58.4 PK	68.2	-9.8	2.59 V	94	48.2	10.2
5	11440.00	57.6 PK	74.0	-16.4	1.66 V	207	36.5	21.1
6	11440.00	46.1 AV	54.0	-7.9	1.66 V	207	25.0	21.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	104.8 PK			1.22 H	326	64.5	40.3
2	*5745.00	92.7 AV			1.22 H	326	52.4	40.3
3	11490.00	57.7 PK	74.0	-16.3	1.86 H	83	36.7	21.0
4	11490.00	46.1 AV	54.0	-7.9	1.86 H	83	25.1	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	106.9 PK			2.56 V	104	66.6	40.3
2	*5745.00	94.7 AV			2.56 V	104	54.4	40.3
3	11490.00	57.9 PK	74.0	-16.1	1.62 V	208	36.9	21.0
4	11490.00	46.4 AV	54.0	-7.6	1.62 V	208	25.4	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	105.4 PK			1.09 H	337	64.9	40.5
2	*5785.00	93.4 AV			1.09 H	337	52.9	40.5
3	11570.00	57.2 PK	74.0	-16.8	1.83 H	81	36.5	20.7
4	11570.00	45.9 AV	54.0	-8.1	1.83 H	81	25.2	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	107.5 PK			2.58 V	98	67.0	40.5
2	*5785.00	95.1 AV			2.58 V	98	54.6	40.5
3	11570.00	57.7 PK	74.0	-16.3	1.66 V	202	37.0	20.7
4	11570.00	46.2 AV	54.0	-7.8	1.66 V	202	25.5	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	104.8 PK			1.11 H	339	64.4	40.4
2	*5825.00	92.6 AV			1.11 H	339	52.2	40.4
3	11650.00	56.8 PK	74.0	-17.2	1.82 H	75	36.5	20.3
4	11650.00	45.2 AV	54.0	-8.8	1.82 H	75	24.9	20.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	106.8 PK			2.49 V	98	66.4	40.4
2	*5825.00	94.7 AV			2.49 V	98	54.3	40.4
3	11650.00	56.9 PK	74.0	-17.1	1.66 V	210	36.6	20.3
4	11650.00	45.4 AV	54.0	-8.6	1.66 V	210	25.1	20.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.7 PK	74.0	-15.3	1.40 H	312	49.0	9.7
2	5150.00	45.2 AV	54.0	-8.8	1.40 H	312	35.5	9.7
3	*5190.00	103.4 PK			1.40 H	312	64.1	39.3
4	*5190.00	91.3 AV			1.40 H	312	52.0	39.3
5	#10380.00	56.1 PK	68.2	-12.1	1.79 H	76	36.4	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.9 PK	74.0	-12.1	2.64 V	106	52.2	9.7
2	5150.00	47.9 AV	54.0	-6.1	2.64 V	106	38.2	9.7
3	*5190.00	106.1 PK			2.64 V	106	66.8	39.3
4	*5190.00	93.5 AV			2.64 V	106	54.2	39.3
5	#10380.00	56.5 PK	68.2	-11.7	1.62 V	207	36.8	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5230.00	105.2 PK			1.43 H	314	65.8	39.4
2	*5230.00	92.0 AV			1.43 H	314	52.6	39.4
3	5350.00	57.6 PK	74.0	-16.4	1.43 H	314	47.9	9.7
4	5350.00	43.9 AV	54.0	-10.1	1.43 H	314	34.2	9.7
5	#10460.00	56.6 PK	68.2	-11.6	1.87 H	90	36.5	20.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5230.00	107.0 PK			2.61 V	105	67.6	39.4
2	*5230.00	94.1 AV			2.61 V	105	54.7	39.4
3	5350.00	57.9 PK	74.0	-16.1	2.61 V	105	48.2	9.7
4	5350.00	44.2 AV	54.0	-9.8	2.61 V	105	34.5	9.7
5	#10460.00	56.8 PK	68.2	-11.4	1.66 V	208	36.7	20.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.3 PK	74.0	-16.7	1.48 H	316	47.6	9.7
2	5150.00	44.0 AV	54.0	-10.0	1.48 H	316	34.3	9.7
3	*5270.00	105.2 PK			1.48 H	316	65.6	39.6
4	*5270.00	92.7 AV			1.48 H	316	53.1	39.6
5	#10540.00	56.6 PK	68.2	-11.6	1.83 H	81	36.4	20.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.8 PK	74.0	-16.2	2.62 V	103	48.1	9.7
2	5150.00	44.3 AV	54.0	-9.7	2.62 V	103	34.6	9.7
3	*5270.00	107.8 PK			2.62 V	103	68.2	39.6
4	*5270.00	95.2 AV			2.62 V	103	55.6	39.6
5	#10540.00	57.4 PK	68.2	-10.8	1.66 V	205	37.2	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	104.6 PK			1.49 H	317	65.1	39.5
2	*5310.00	92.6 AV			1.49 H	317	53.1	39.5
3	5350.00	62.4 PK	74.0	-11.6	1.49 H	317	52.7	9.7
4	5350.00	46.2 AV	54.0	-7.8	1.49 H	317	36.5	9.7
5	10620.00	56.3 PK	74.0	-17.7	1.82 H	76	36.3	20.0
6	10620.00	44.6 AV	54.0	-9.4	1.82 H	76	24.6	20.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	107.4 PK			2.61 V	104	67.9	39.5
2	*5310.00	94.7 AV			2.61 V	104	55.2	39.5
3	5350.00	69.2 PK	74.0	-4.8	2.53 V	104	59.5	9.7
4	5350.00	53.6 AV	54.0	-0.4	2.53 V	104	43.9	9.7
5	10620.00	56.7 PK	74.0	-17.3	1.62 V	206	36.7	20.0
6	10620.00	45.0 AV	54.0	-9.0	1.62 V	206	25.0	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.6 PK	74.0	-13.4	1.15 H	325	50.8	9.8
2	5460.00	44.8 AV	54.0	-9.2	1.15 H	325	35.0	9.8
3	#5470.00	59.8 PK	68.2	-8.4	1.15 H	325	50.0	9.8
4	*5510.00	102.9 PK			1.15 H	325	63.2	39.7
5	*5510.00	89.8 AV			1.15 H	325	50.1	39.7
6	11020.00	57.0 PK	74.0	-17.0	1.78 H	79	36.7	20.3
7	11020.00	45.2 AV	54.0	-8.8	1.78 H	79	24.9	20.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.1 PK	74.0	-11.9	2.60 V	96	52.3	9.8
2	5460.00	47.3 AV	54.0	-6.7	2.60 V	96	37.5	9.8
3	#5470.00	67.8 PK	68.2	-0.4	2.60 V	96	58.0	9.8
4	*5510.00	105.9 PK			2.60 V	96	66.2	39.7
5	*5510.00	92.4 AV			2.60 V	96	52.7	39.7
6	11020.00	57.1 PK	74.0	-16.9	1.63 V	207	36.8	20.3
7	11020.00	45.3 AV	54.0	-8.7	1.63 V	207	25.0	20.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	103.3 PK			1.16 H	327	63.5	39.8
2	*5550.00	90.3 AV			1.16 H	327	50.5	39.8
3	11100.00	56.9 PK	74.0	-17.1	1.81 H	80	36.6	20.3
4	11100.00	45.3 AV	54.0	-8.7	1.81 H	80	25.0	20.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	106.4 PK			2.66 V	103	66.6	39.8
2	*5550.00	92.7 AV			2.66 V	103	52.9	39.8
3	11100.00	57.2 PK	74.0	-16.8	1.62 V	212	36.9	20.3
4	11100.00	45.7 AV	54.0	-8.3	1.62 V	212	25.4	20.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	102.6 PK			1.08 H	330	62.6	40.0
2	*5670.00	90.3 AV			1.08 H	330	50.3	40.0
3	#5725.00	57.7 PK	68.2	-10.5	1.08 H	336	47.5	10.2
4	11340.00	57.1 PK	74.0	-16.9	1.85 H	84	36.4	20.7
5	11340.00	45.5 AV	54.0	-8.5	1.85 H	84	24.8	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	105.6 PK			2.53 V	99	65.6	40.0
2	*5670.00	92.2 AV			2.53 V	99	52.2	40.0
3	#5725.00	59.0 PK	68.2	-9.2	2.53 V	99	48.8	10.2
4	11340.00	57.4 PK	74.0	-16.6	1.60 V	209	36.7	20.7
5	11340.00	45.6 AV	54.0	-8.4	1.60 V	209	24.9	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	58.3 PK	68.2	-9.9	1.15 H	312	48.5	9.8
2	*5710.00	102.3 PK			1.15 H	312	62.2	40.1
3	*5710.00	89.2 AV			1.15 H	312	49.1	40.1
4	#5850.00	58.3 PK	68.2	-9.9	1.15 H	312	48.1	10.2
5	11420.00	57.8 PK	74.0	-16.2	1.80 H	86	36.6	21.2
6	11420.00	46.2 AV	54.0	-7.8	1.80 H	86	25.0	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	58.5 PK	68.2	-9.7	2.51 V	104	48.7	9.8
2	*5710.00	105.5 PK			2.51 V	104	65.4	40.1
3	*5710.00	92.2 AV			2.51 V	104	52.1	40.1
4	#5850.00	58.7 PK	68.2	-9.5	2.51 V	104	48.5	10.2
5	11420.00	58.1 PK	74.0	-15.9	1.62 V	200	36.9	21.2
6	11420.00	46.5 AV	54.0	-7.5	1.62 V	200	25.3	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	102.3 PK			1.10 H	352	62.0	40.3
2	*5755.00	89.3 AV			1.10 H	352	49.0	40.3
3	11510.00	57.5 PK	74.0	-16.5	1.82 H	79	36.7	20.8
4	11510.00	46.0 AV	54.0	-8.0	1.82 H	79	25.2	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	104.7 PK			2.53 V	105	64.4	40.3
2	*5755.00	91.9 AV			2.53 V	105	51.6	40.3
3	11510.00	57.6 PK	74.0	-16.4	1.64 V	213	36.8	20.8
4	11510.00	46.2 AV	54.0	-7.8	1.64 V	213	25.4	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	102.7 PK			1.17 H	344	62.1	40.6
2	*5795.00	89.5 AV			1.17 H	344	48.9	40.6
3	11590.00	57.2 PK	74.0	-16.8	1.89 H	90	36.6	20.6
4	11590.00	45.9 AV	54.0	-8.1	1.89 H	90	25.3	20.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	104.7 PK			2.55 V	96	64.1	40.6
2	*5795.00	92.6 AV			2.55 V	96	52.0	40.6
3	11590.00	57.6 PK	74.0	-16.4	1.73 V	209	37.0	20.6
4	11590.00	46.1 AV	54.0	-7.9	1.73 V	209	25.5	20.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.1 PK	74.0	-15.9	1.42 H	313	48.4	9.7
2	5150.00	45.3 AV	54.0	-8.7	1.42 H	313	35.6	9.7
3	*5210.00	101.8 PK			1.42 H	313	62.5	39.3
4	*5210.00	88.7 AV			1.42 H	313	49.4	39.3
5	#10420.00	56.2 PK	68.2	-12.0	1.90 H	83	36.4	19.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.4 PK	74.0	-13.6	2.72 V	104	50.7	9.7
2	5150.00	47.7 AV	54.0	-6.3	2.72 V	104	38.0	9.7
3	*5210.00	104.3 PK			2.72 V	104	65.0	39.3
4	*5210.00	90.6 AV			2.72 V	104	51.3	39.3
5	#10420.00	56.6 PK	68.2	-11.6	1.66 V	207	36.8	19.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	102.6 PK			1.49 H	317	63.0	39.6
2	*5290.00	89.2 AV			1.49 H	317	49.6	39.6
3	5350.00	63.9 PK	74.0	-10.1	1.49 H	317	54.2	9.7
4	5350.00	50.3 AV	54.0	-3.7	1.49 H	317	40.6	9.7
5	#10580.00	56.1 PK	68.2	-12.1	1.76 H	86	36.1	20.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	105.6 PK			2.69 V	106	66.0	39.6
2	*5290.00	92.3 AV			2.69 V	106	52.7	39.6
3	5350.00	66.7 PK	74.0	-7.3	2.69 V	106	57.0	9.7
4	5350.00	53.5 AV	54.0	-0.5	2.69 V	106	43.8	9.7
5	#10580.00	56.4 PK	68.2	-11.8	1.72 V	219	36.4	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.4 PK	74.0	-12.6	1.17 H	316	51.6	9.8
2	5460.00	47.8 AV	54.0	-6.2	1.17 H	316	38.0	9.8
3	#5464.50	61.8 PK	68.2	-6.4	1.17 H	316	52.0	9.8
4	*5530.00	100.5 PK			1.17 H	316	60.7	39.8
5	*5530.00	87.1 AV			1.17 H	316	47.3	39.8
6	11060.00	56.8 PK	74.0	-17.2	1.78 H	81	36.5	20.3
7	11060.00	45.3 AV	54.0	-8.7	1.78 H	81	25.0	20.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.3 PK	74.0	-8.7	2.56 V	100	55.5	9.8
2	5460.00	52.8 AV	54.0	-1.2	2.56 V	100	43.0	9.8
3	#5464.50	67.7 PK	68.2	-0.5	2.56 V	100	57.9	9.8
4	*5530.00	102.6 PK			2.56 V	100	62.8	39.8
5	*5530.00	90.5 AV			2.56 V	100	50.7	39.8
6	11060.00	57.0 PK	74.0	-17.0	1.66 V	206	36.7	20.3
7	11060.00	45.5 AV	54.0	-8.5	1.66 V	206	25.2	20.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	99.5 PK			1.00 H	326	59.5	40.0
2	*5610.00	86.9 AV			1.00 H	326	46.9	40.0
3	#5725.00	58.2 PK	68.2	-10.0	1.00 H	326	48.0	10.2
4	11220.00	56.9 PK	74.0	-17.1	1.80 H	76	36.6	20.3
5	11220.00	45.3 AV	54.0	-8.7	1.80 H	76	25.0	20.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	102.3 PK			2.55 V	103	62.3	40.0
2	*5610.00	89.4 AV			2.55 V	103	49.4	40.0
3	#5725.00	58.7 PK	68.2	-9.5	2.55 V	103	48.5	10.2
4	11220.00	57.0 PK	74.0	-17.0	1.69 V	200	36.7	20.3
5	11220.00	45.6 AV	54.0	-8.4	1.69 V	200	25.3	20.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	58.2 PK	68.2	-10.0	1.17 H	340	48.4	9.8
2	*5690.00	99.8 PK			1.17 H	340	59.8	40.0
3	*5690.00	86.5 AV			1.17 H	340	46.5	40.0
4	#5850.00	58.2 PK	68.2	-10.0	1.17 H	340	48.0	10.2
5	11380.00	57.5 PK	74.0	-16.5	1.85 H	91	36.6	20.9
6	11380.00	45.9 AV	54.0	-8.1	1.85 H	91	25.0	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	58.4 PK	68.2	-9.8	2.55 V	88	48.6	9.8
2	*5690.00	103.0 PK			2.55 V	88	63.0	40.0
3	*5690.00	89.3 AV			2.55 V	88	49.3	40.0
4	#5850.00	58.5 PK	68.2	-9.7	2.55 V	88	48.3	10.2
5	11380.00	57.7 PK	74.0	-16.3	1.65 V	201	36.8	20.9
6	11380.00	46.1 AV	54.0	-7.9	1.65 V	201	25.2	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	99.9 PK			1.09 H	337	59.4	40.5
2	*5775.00	86.8 AV			1.09 H	337	46.3	40.5
3	11550.00	57.5 PK	74.0	-16.5	1.86 H	80	36.8	20.7
4	11550.00	45.9 AV	54.0	-8.1	1.86 H	80	25.2	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	102.5 PK			2.50 V	106	62.0	40.5
2	*5775.00	89.4 AV			2.50 V	106	48.9	40.5
3	11550.00	57.7 PK	74.0	-16.3	1.70 V	212	37.0	20.7
4	11550.00	46.2 AV	54.0	-7.8	1.70 V	212	25.5	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5116.00	63.0 PK	74.0	-11.0	1.35 H	134	53.0	10.0
2	5116.00	46.2 AV	54.0	-7.8	1.35 H	134	36.2	10.0
3	*5250.00	99.9 PK			1.35 H	314	60.3	39.6
4	*5250.00	87.8 AV			1.35 H	314	48.2	39.6
5	5350.00	61.4 PK	74.0	-12.6	1.35 H	314	51.7	9.7
6	5350.00	49.7 AV	54.0	-4.3	1.35 H	314	40.0	9.7
7	#10500.00	56.8 PK	68.2	-11.4	1.83 H	71	36.5	20.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5116.00	68.1 PK	74.0	-5.9	2.68 V	106	58.1	10.0
2	5116.00	47.6 AV	54.0	-6.4	2.68 V	106	37.6	10.0
3	*5250.00	103.6 PK			2.68 V	106	64.0	39.6
4	*5250.00	91.1 AV			2.68 V	106	51.5	39.6
5	5350.00	67.3 PK	74.0	-6.7	2.68 V	106	57.6	9.7
6	5350.00	52.7 AV	54.0	-1.3	2.68 V	106	43.0	9.7
7	#10500.00	57.0 PK	68.2	-11.2	1.66 V	360	36.7	20.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 61% RH
Tested By	Edison Lee		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5439.00	60.3 PK	74.0	-13.7	1.34 H	307	50.5	9.8
2	5439.00	44.6 AV	54.0	-9.4	1.34 H	307	34.8	9.8
3	#5470.00	59.1 PK	68.2	-9.1	1.34 H	307	49.3	9.8
4	*5570.00	98.8 PK			1.34 H	307	58.9	39.9
5	*5570.00	86.5 AV			1.34 H	307	46.6	39.9
6	#5728.00	66.9 PK	68.2	-1.3	1.34 H	307	56.7	10.2
7	11140.00	56.7 PK	74.0	-17.3	1.87 H	73	36.3	20.4
8	11140.00	45.1 AV	54.0	-8.9	1.87 H	73	24.7	20.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5439.00	66.4 PK	74.0	-7.6	2.69 V	94	56.6	9.8
2	5439.00	48.9 AV	54.0	-5.1	2.69 V	94	39.1	9.8
3	#5470.00	64.6 PK	68.2	-3.6	2.69 V	94	54.8	9.8
4	*5570.00	102.1 PK			2.69 V	94	62.2	39.9
5	*5570.00	89.4 AV			2.69 V	94	49.5	39.9
6	#5728.00	68.1 PK	68.2	-0.1	2.69 V	94	57.9	10.2
7	11140.00	56.9 PK	74.0	-17.1	1.77 V	218	36.5	20.4
8	11140.00	45.4 AV	54.0	-8.6	1.77 V	218	25.0	20.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

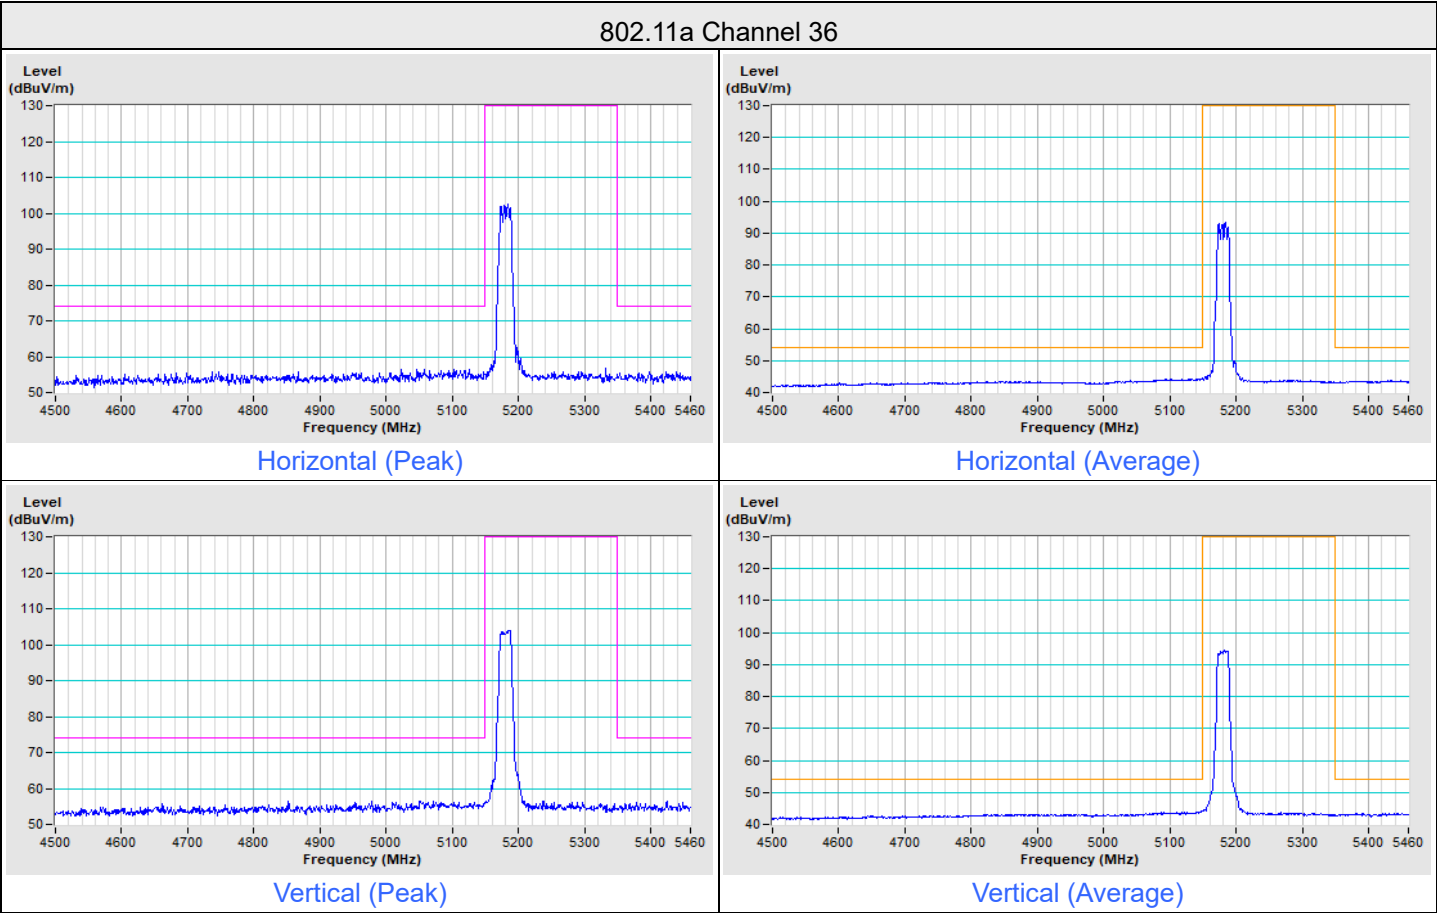


802.11a Channel 48

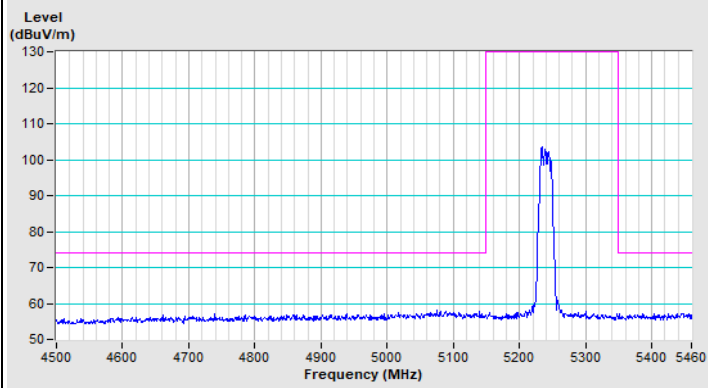


Horizontal (Peak)

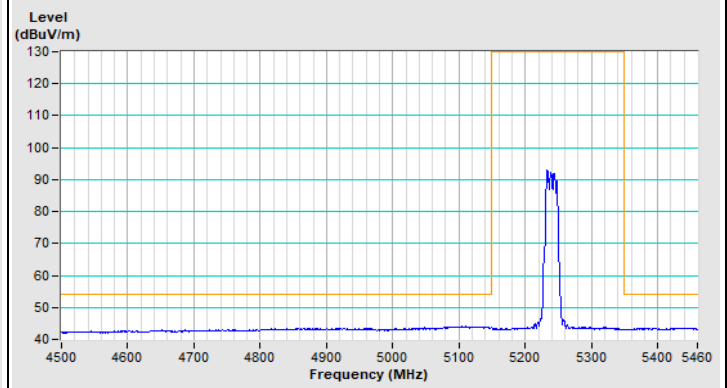

Horizontal (Average)

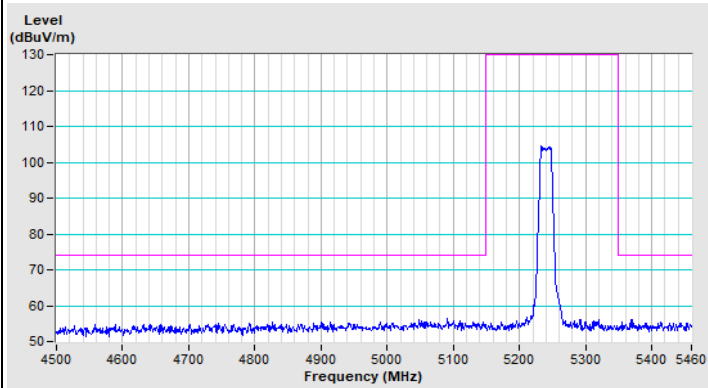


Vertical (Peak)

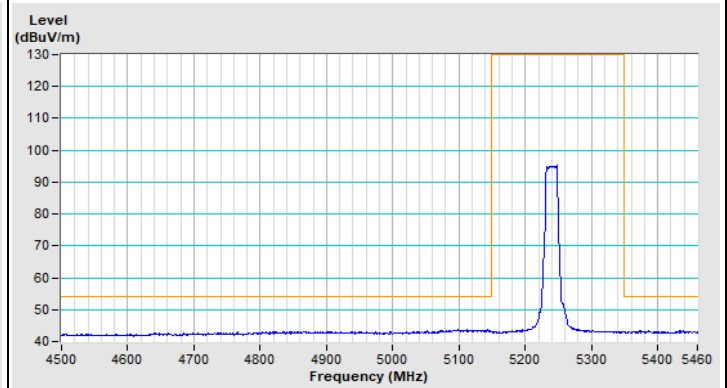


Vertical (Average)


802.11a Channel 52

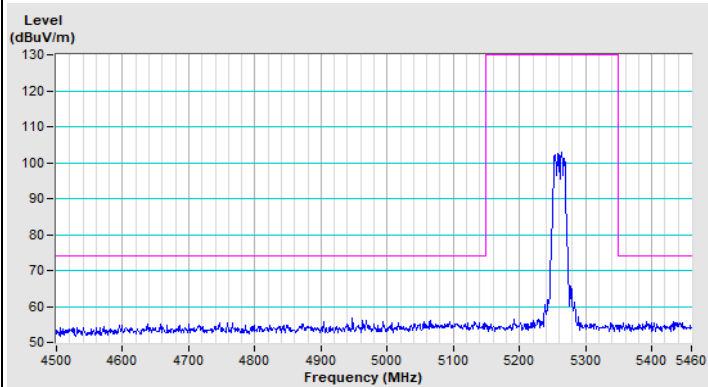


Horizontal (Peak)

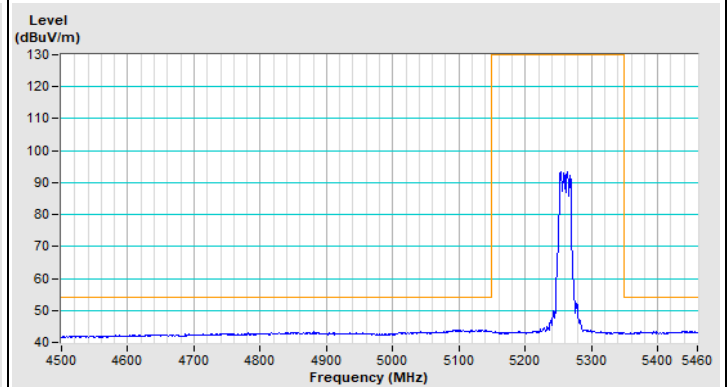

Horizontal (Average)

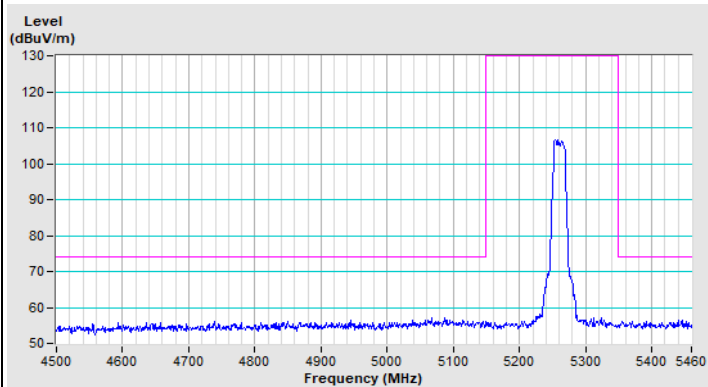


Vertical (Peak)

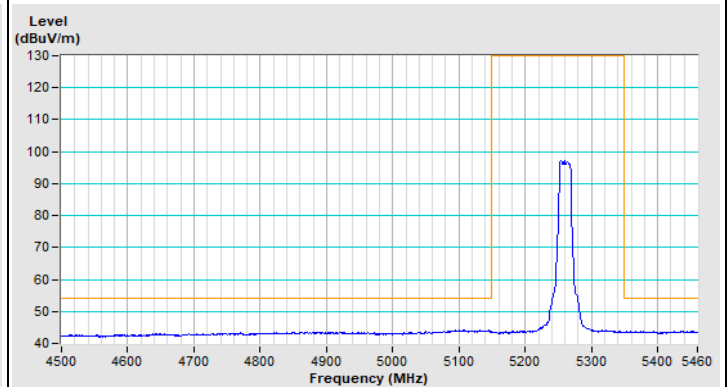


Vertical (Average)


802.11a Channel 64

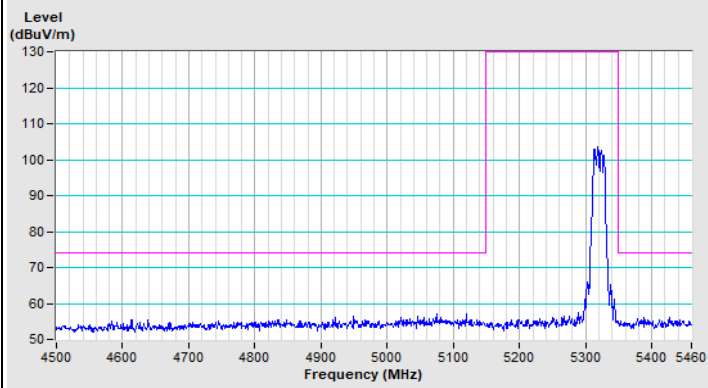


Horizontal (Peak)

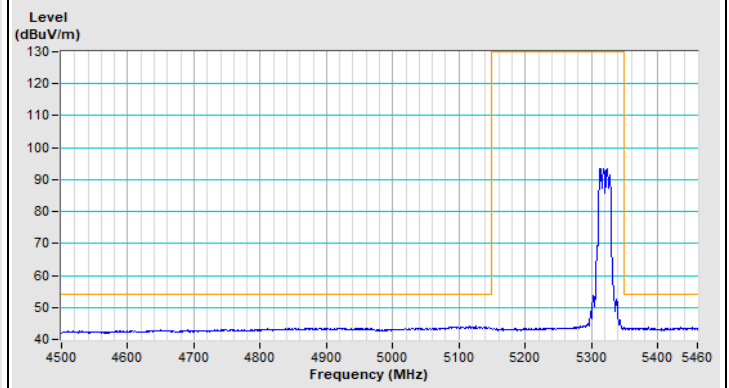

Horizontal (Average)

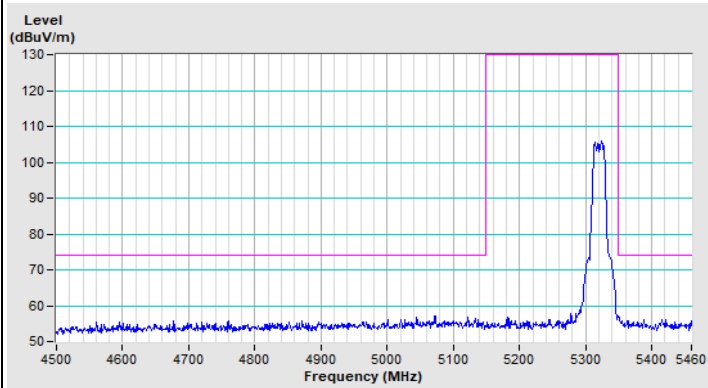


Vertical (Peak)

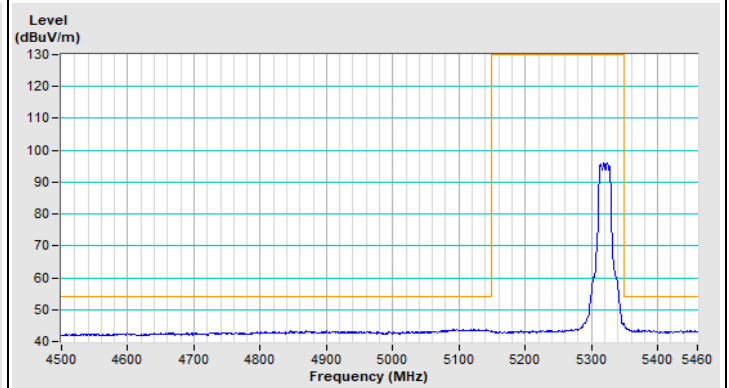


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11a Channel 100

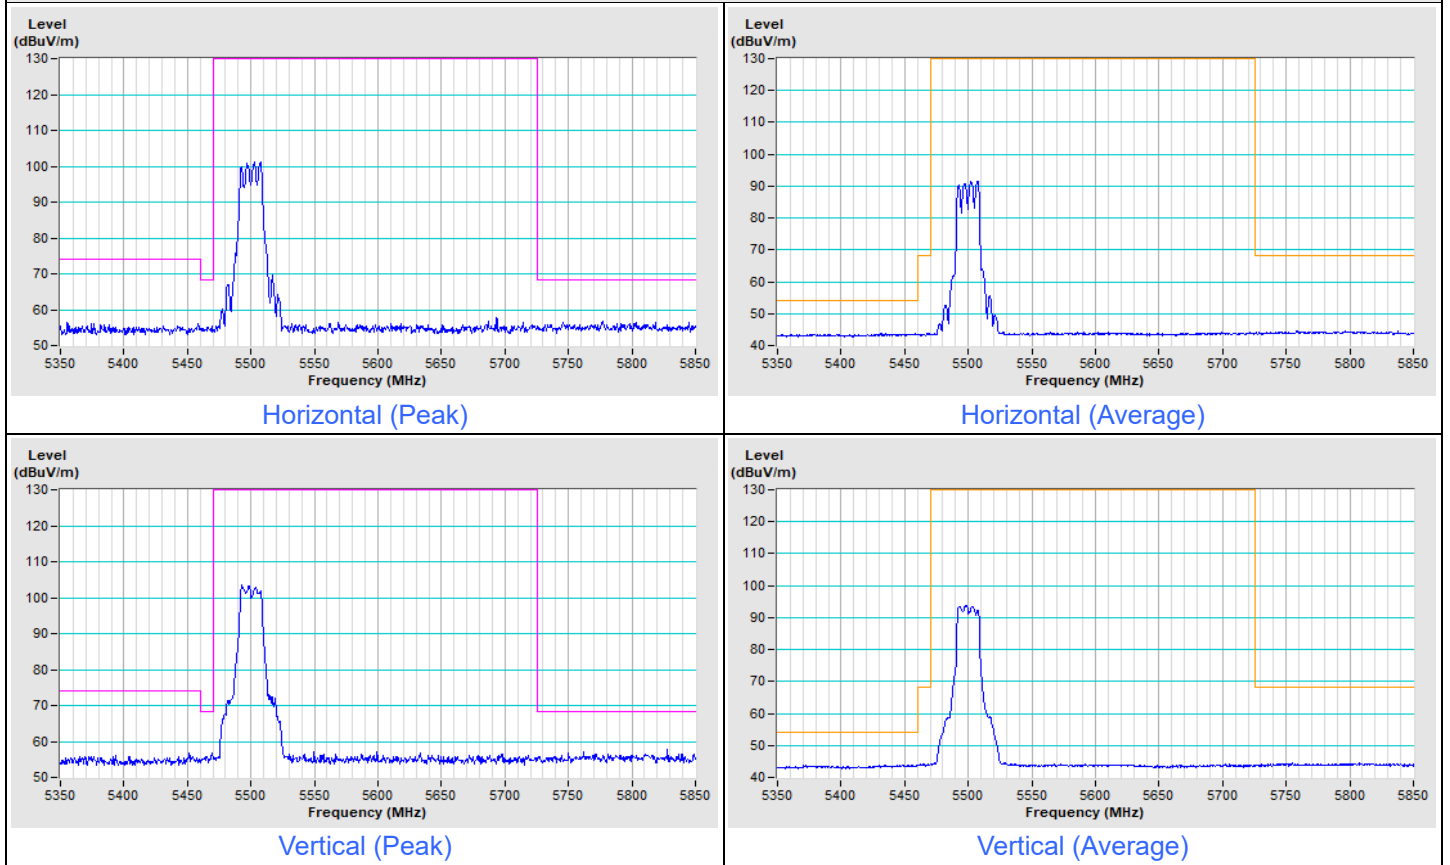


802.11a Channel 140

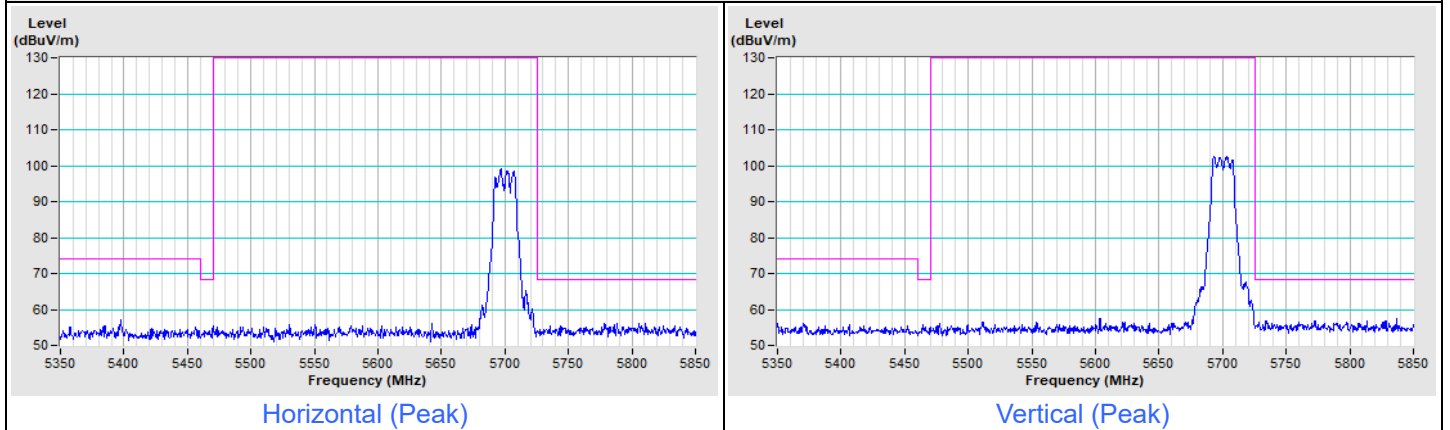


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11a Channel 144

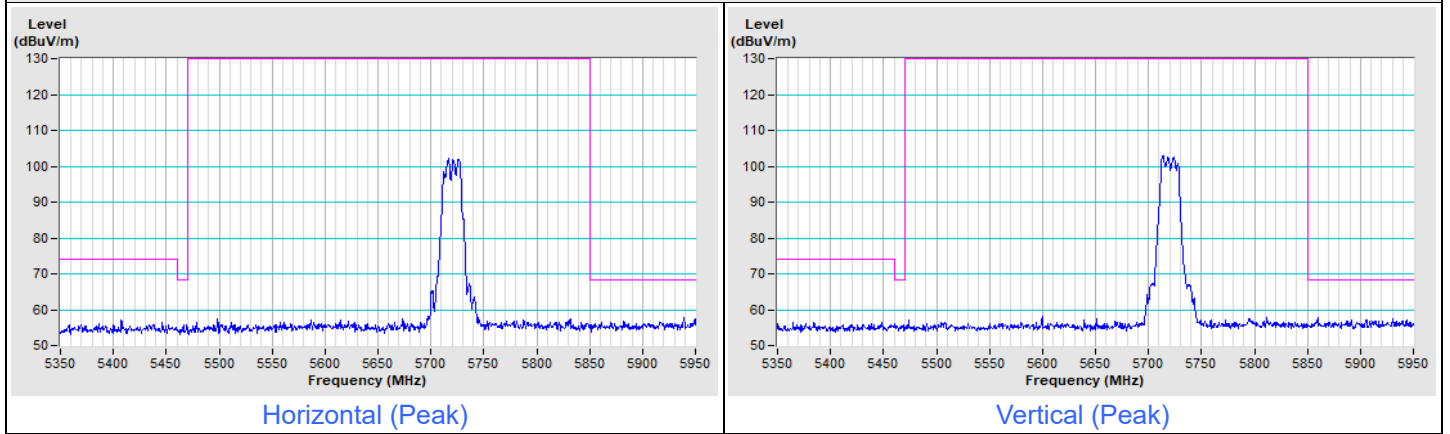


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11a Channel 149

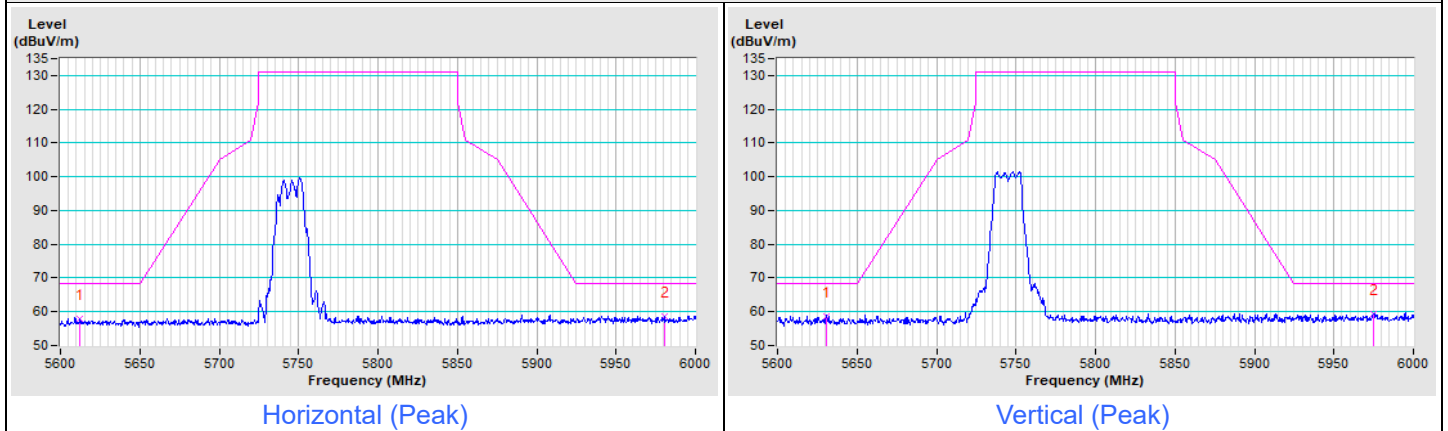

802.11a Channel 157

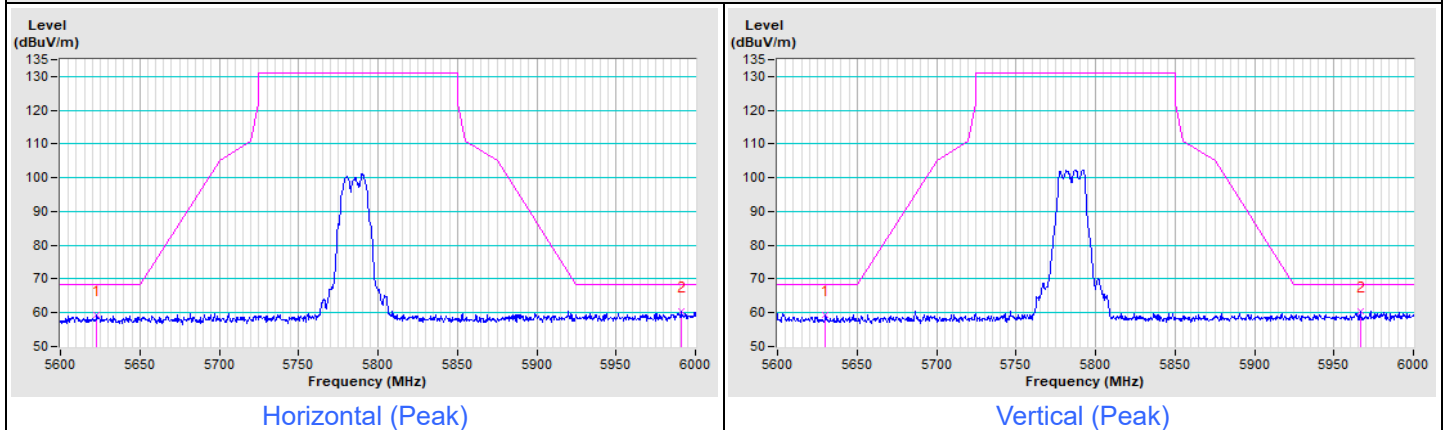


802.11a Channel 165




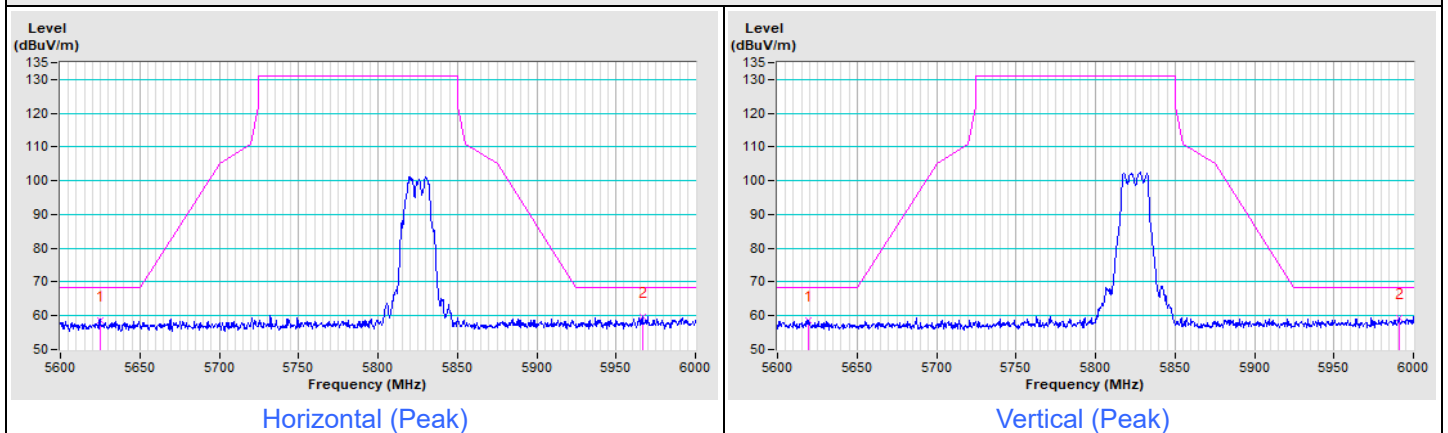


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT20) Channel 36

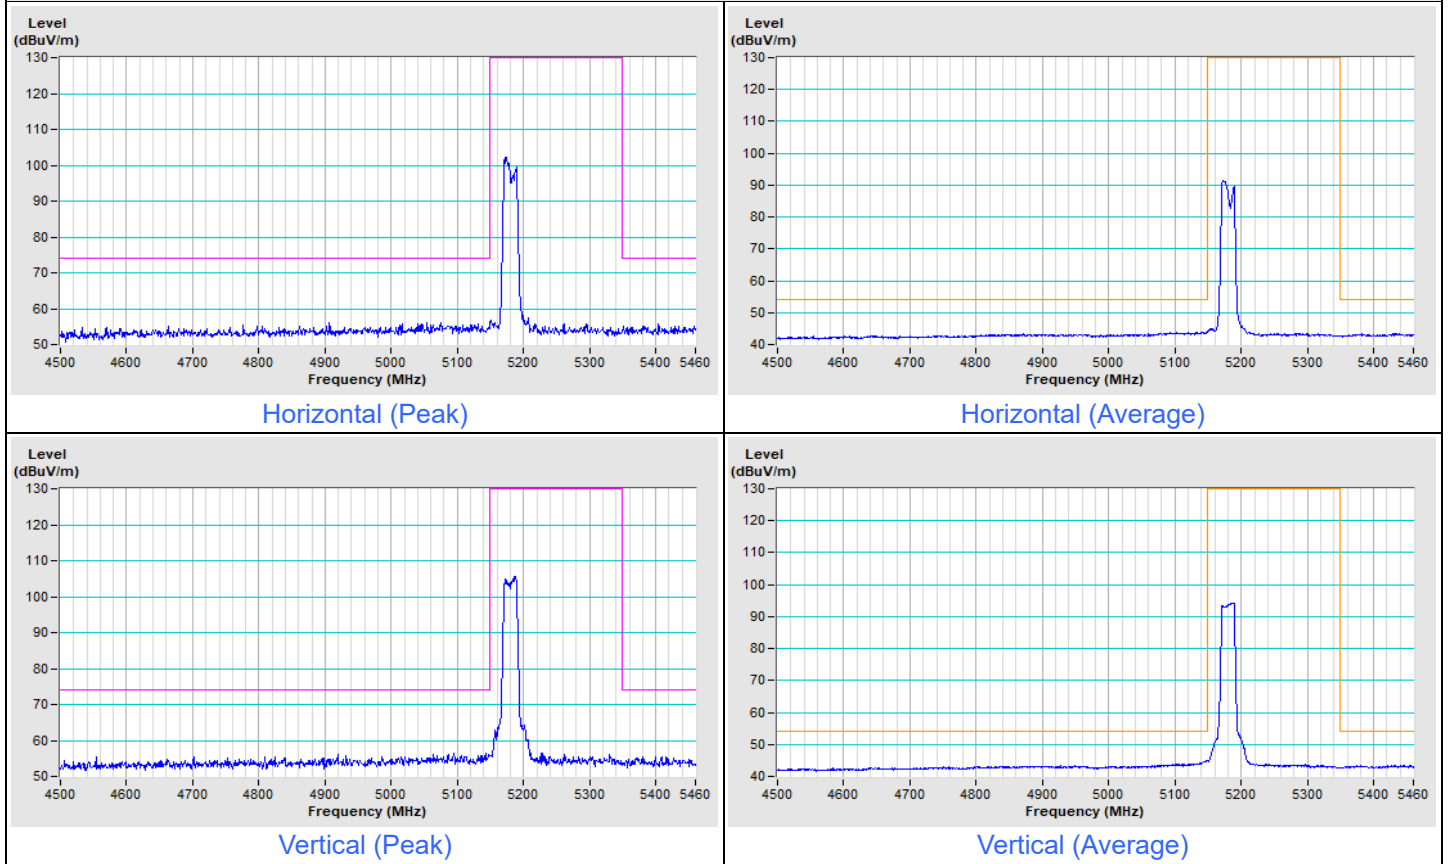





802.11be (EHT20) Channel 48

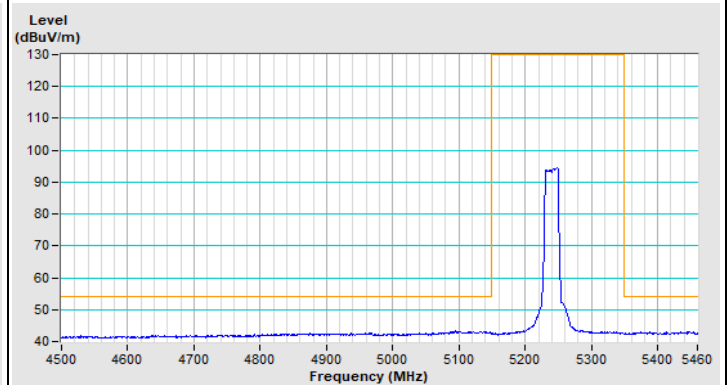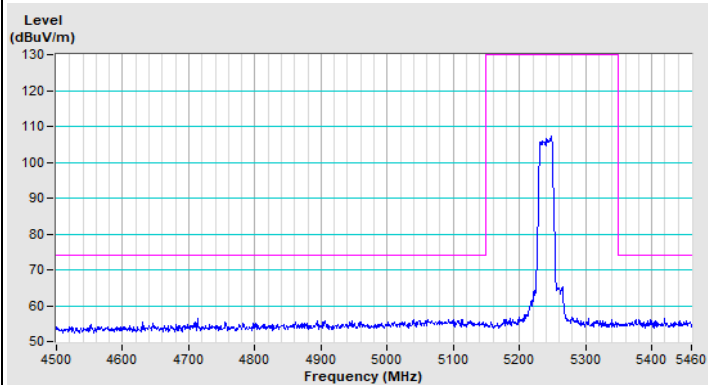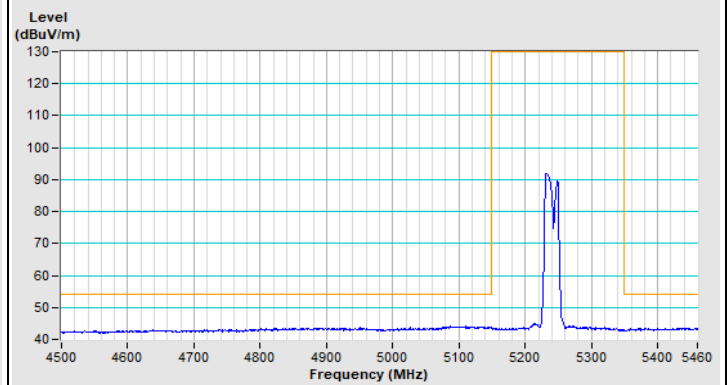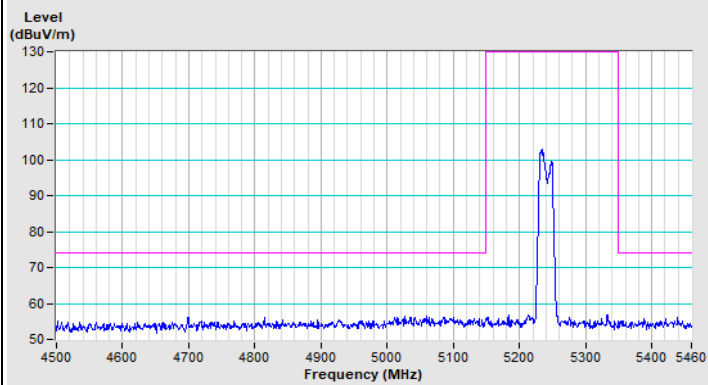

802.11be (EHT20) Channel 52

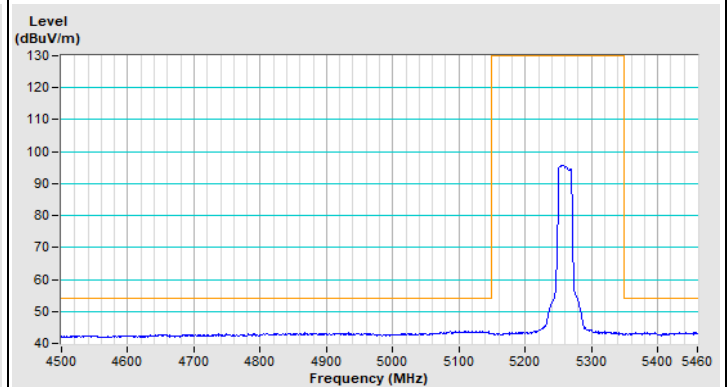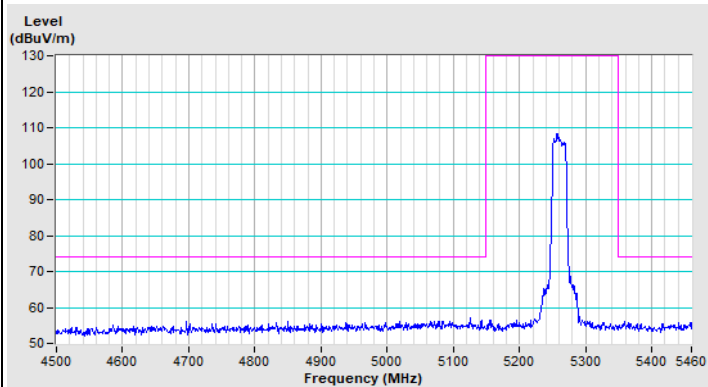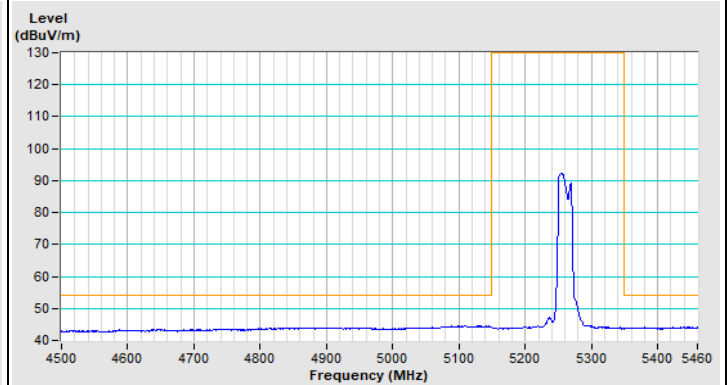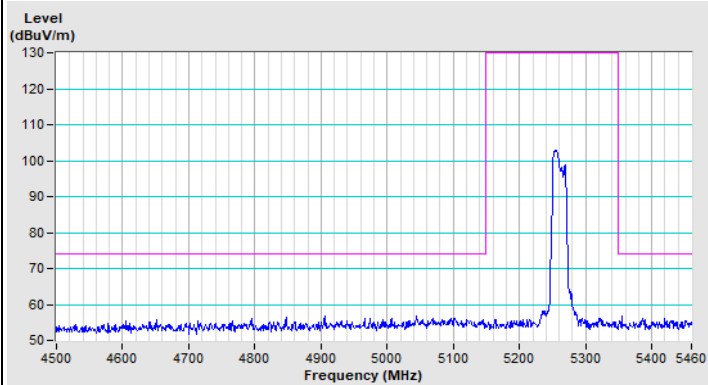


802.11be (EHT20) Channel 64

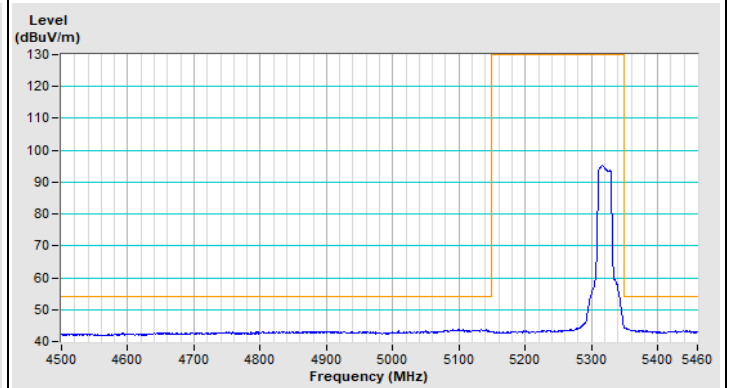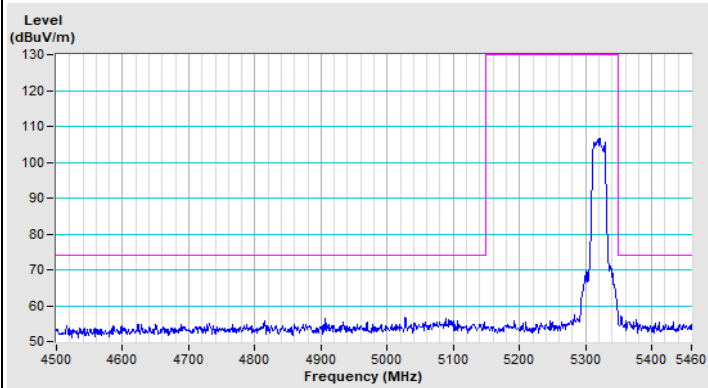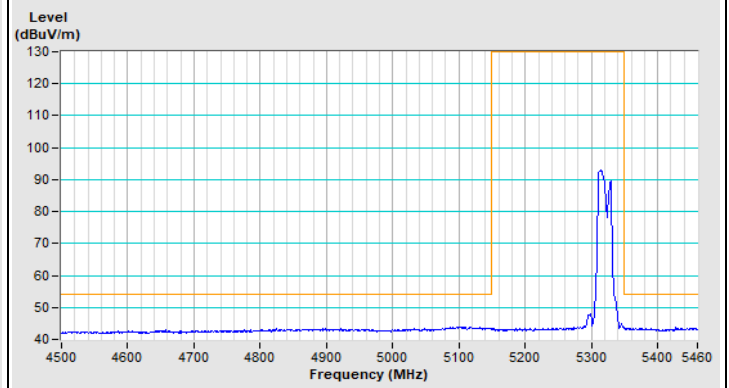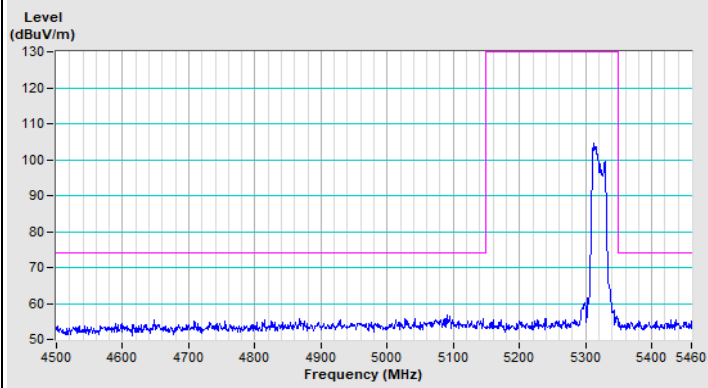


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 100

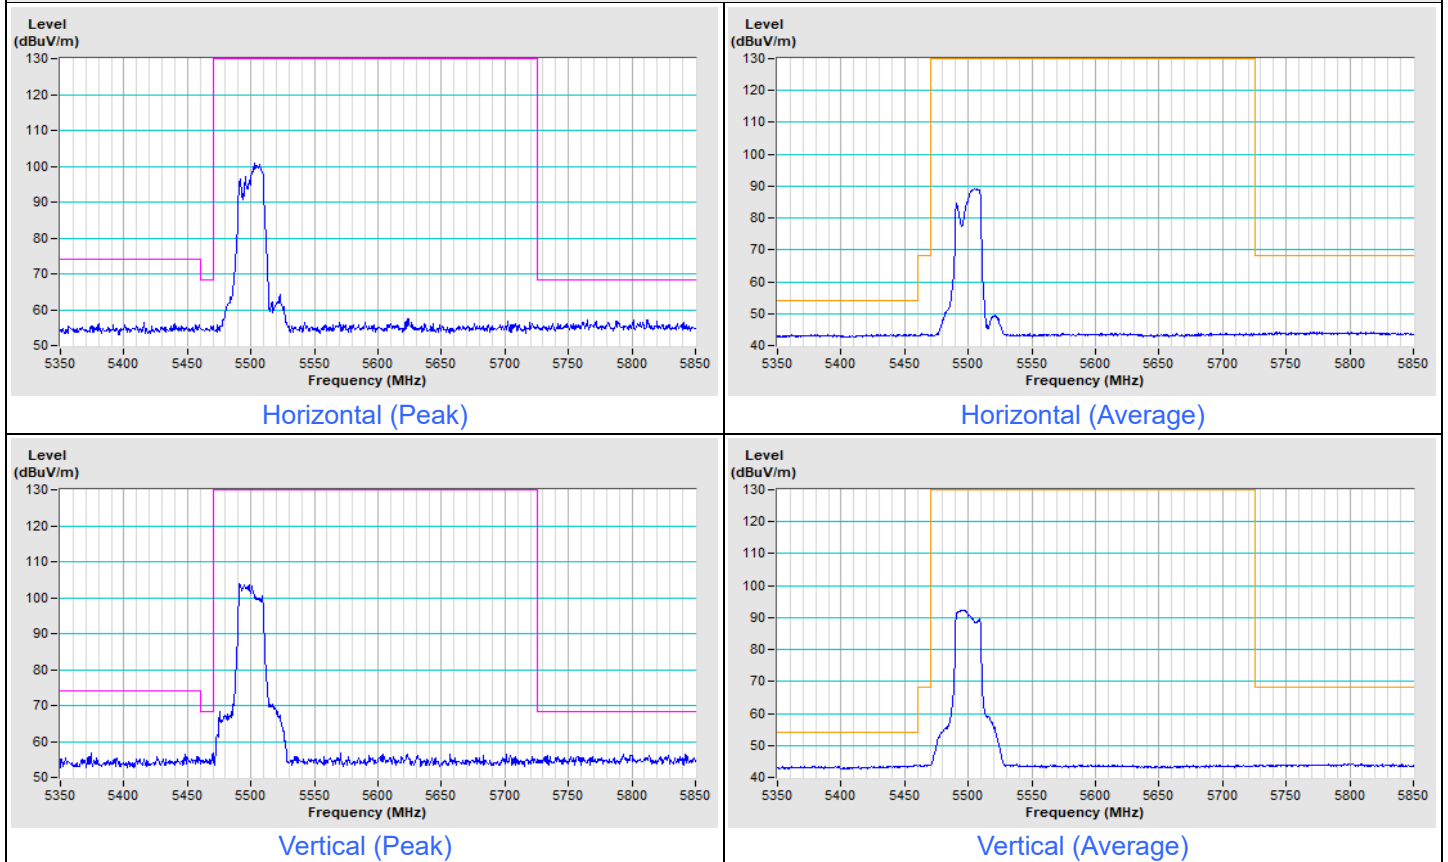

802.11be (EHT20) Channel 140

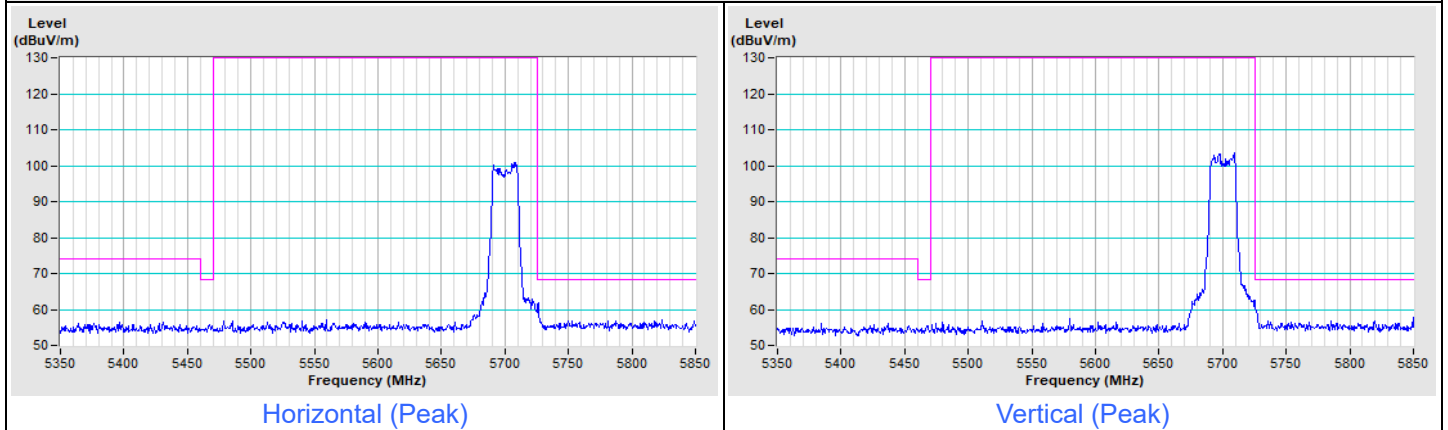


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

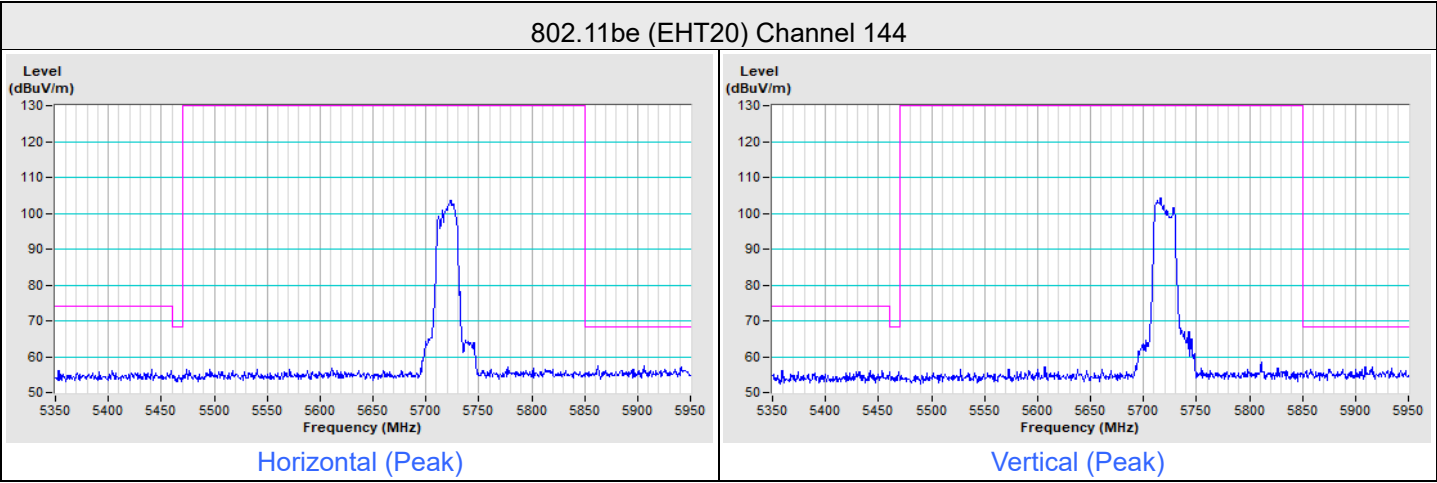


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) Channel 149

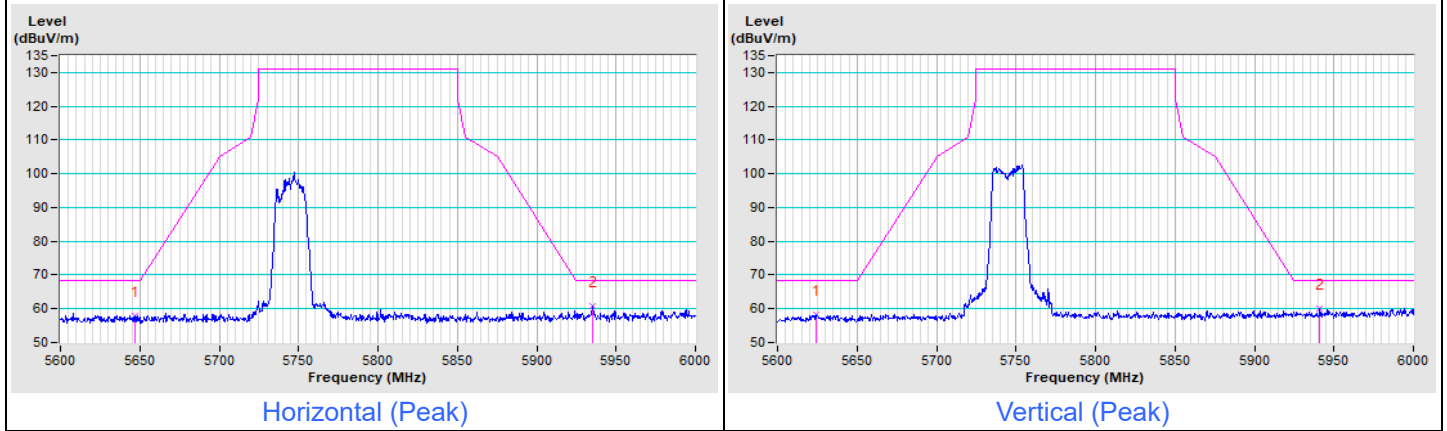

802.11be (EHT20) Channel 157

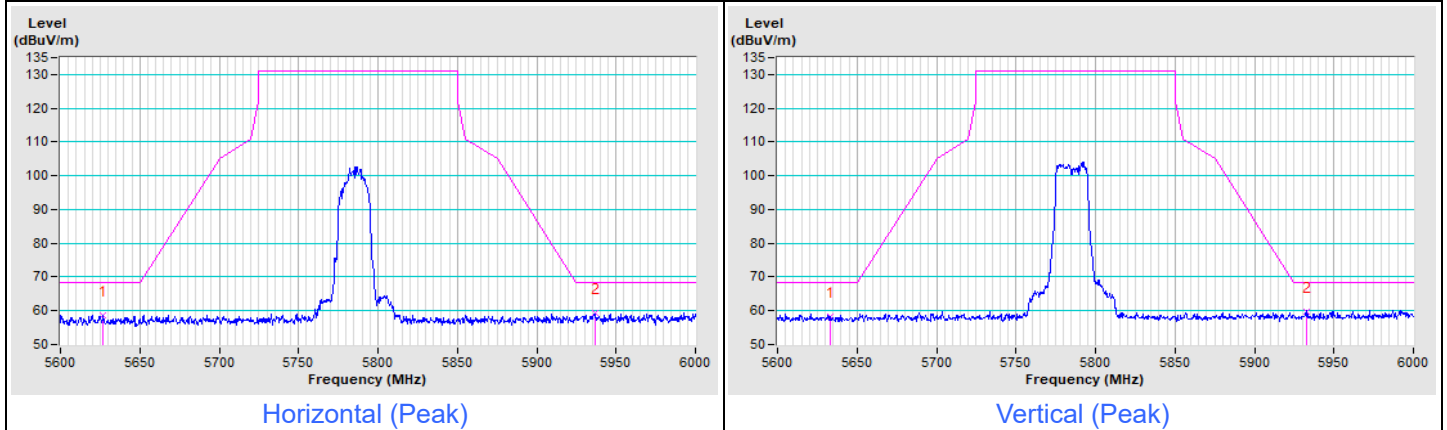


802.11be (EHT20) Channel 165

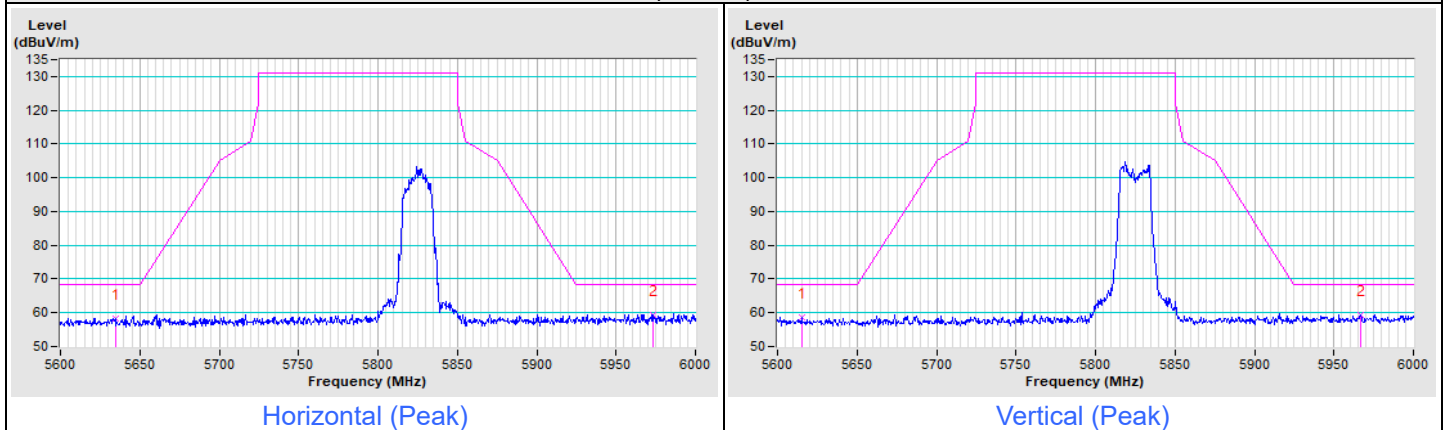


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 38

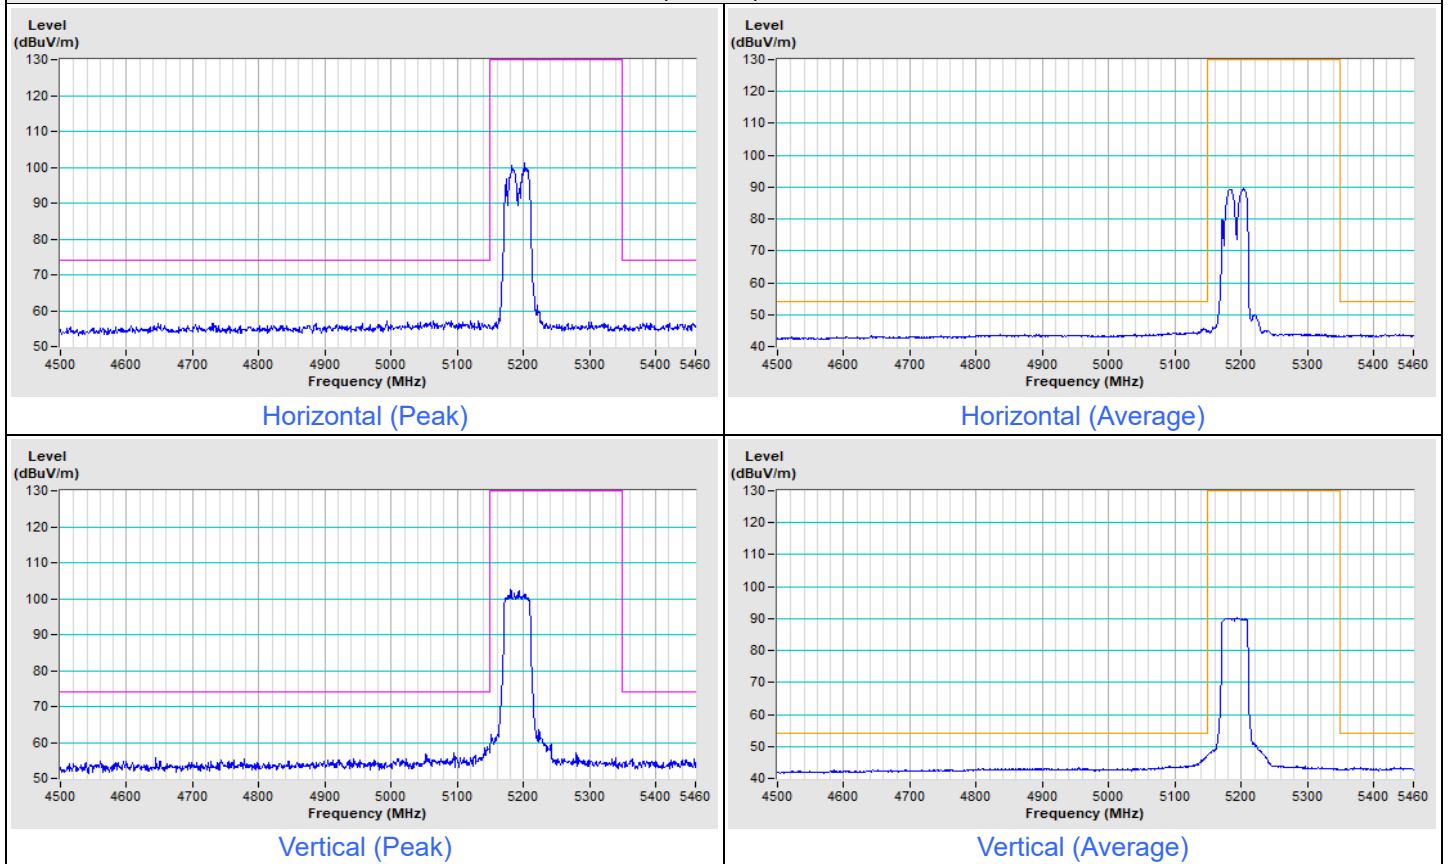


802.11be (EHT40) Channel 46

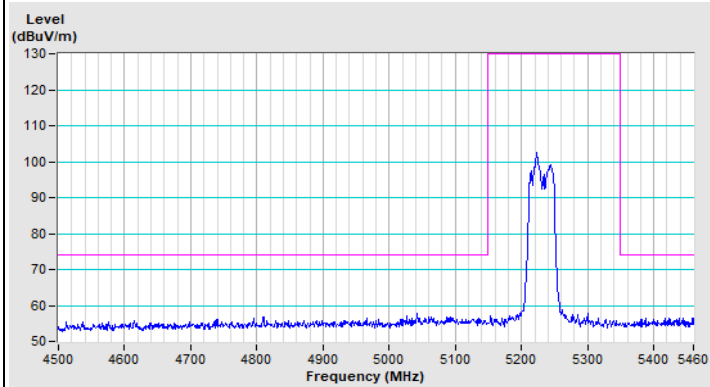


Horizontal (Peak)

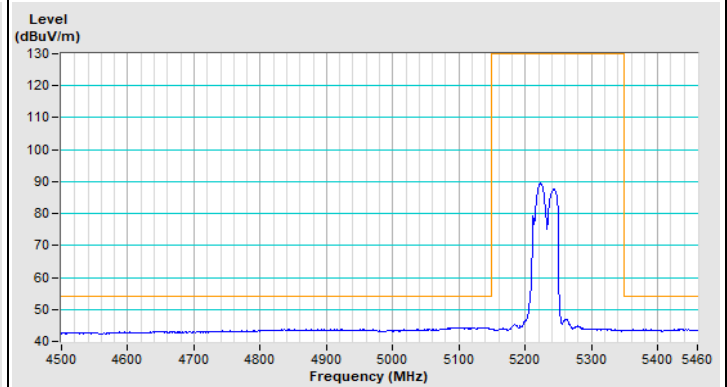

Horizontal (Average)

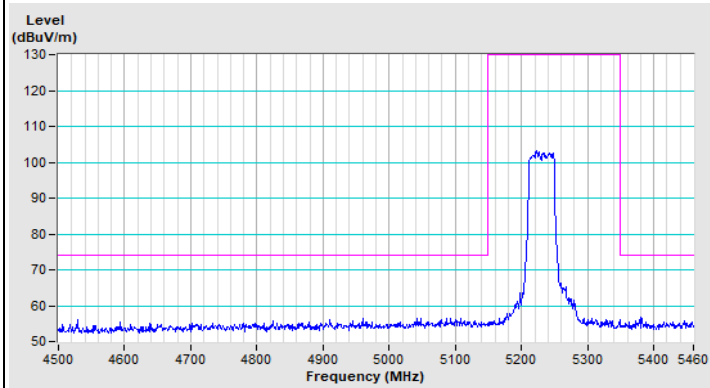


Vertical (Peak)

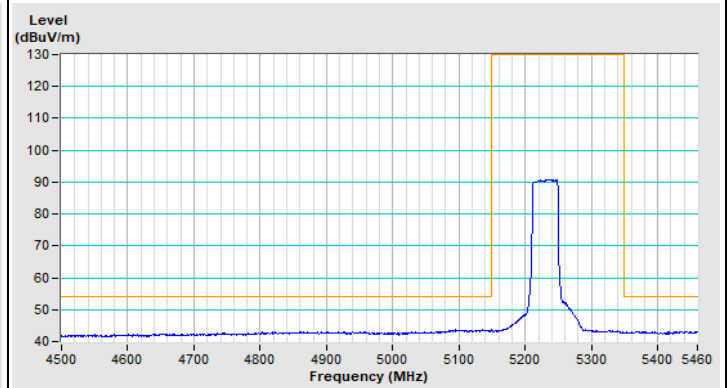


Vertical (Average)


802.11be (EHT40) Channel 54

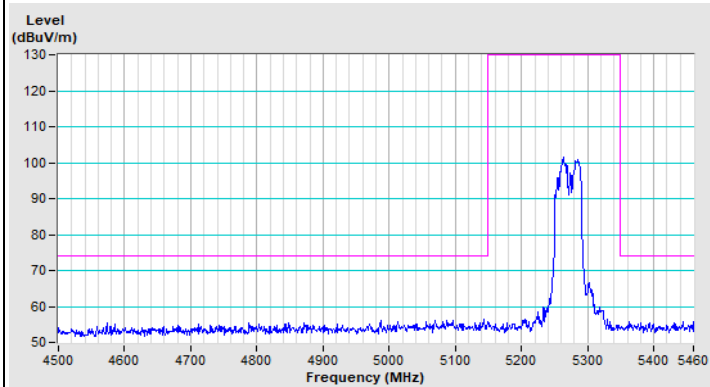


Horizontal (Peak)

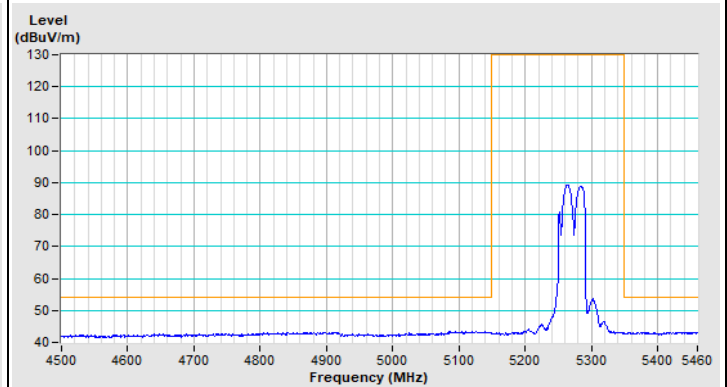

Horizontal (Average)

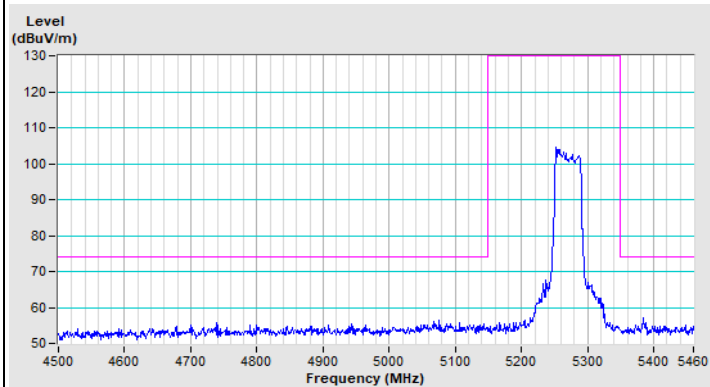


Vertical (Peak)

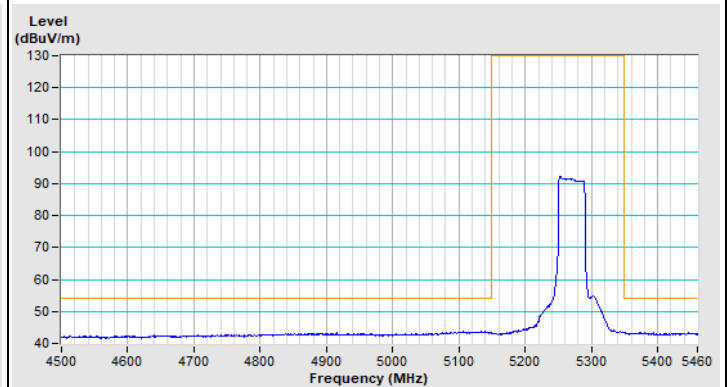


Vertical (Average)


802.11be (EHT40) Channel 62

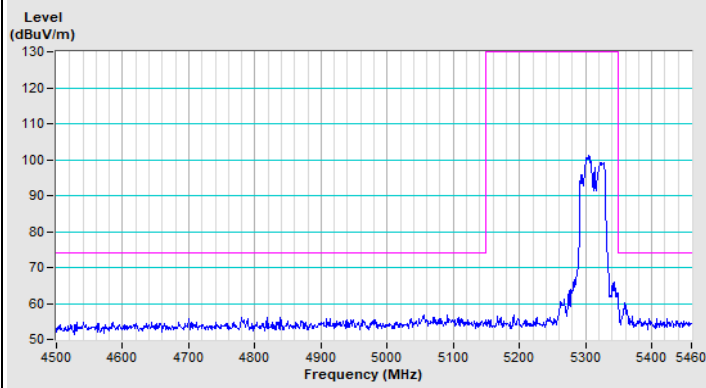


Horizontal (Peak)

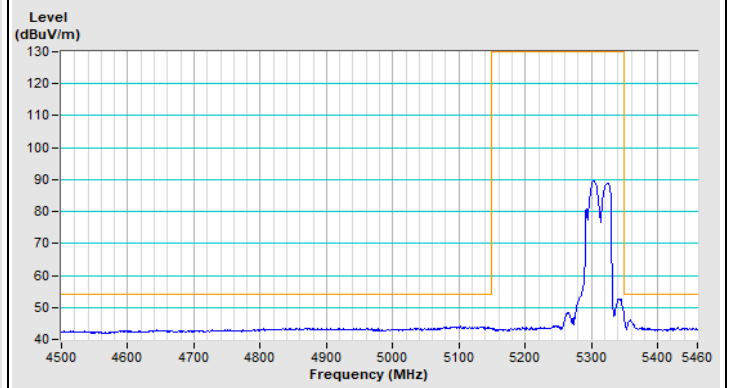

Horizontal (Average)

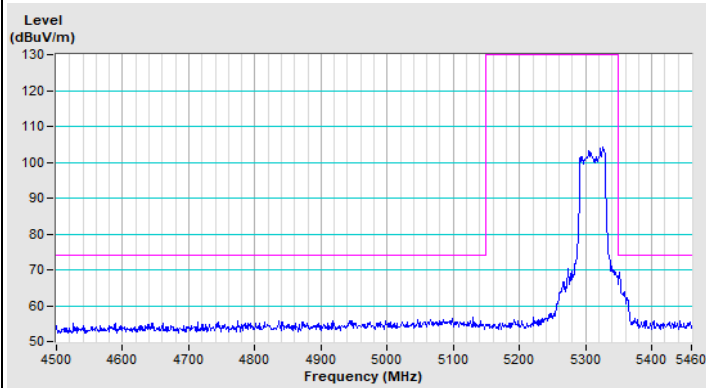


Vertical (Peak)

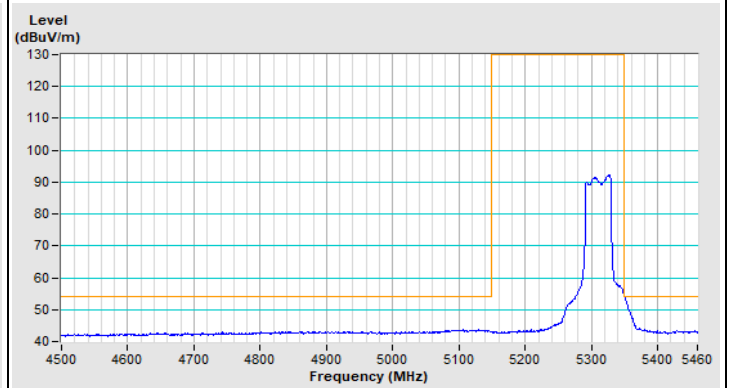


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 102

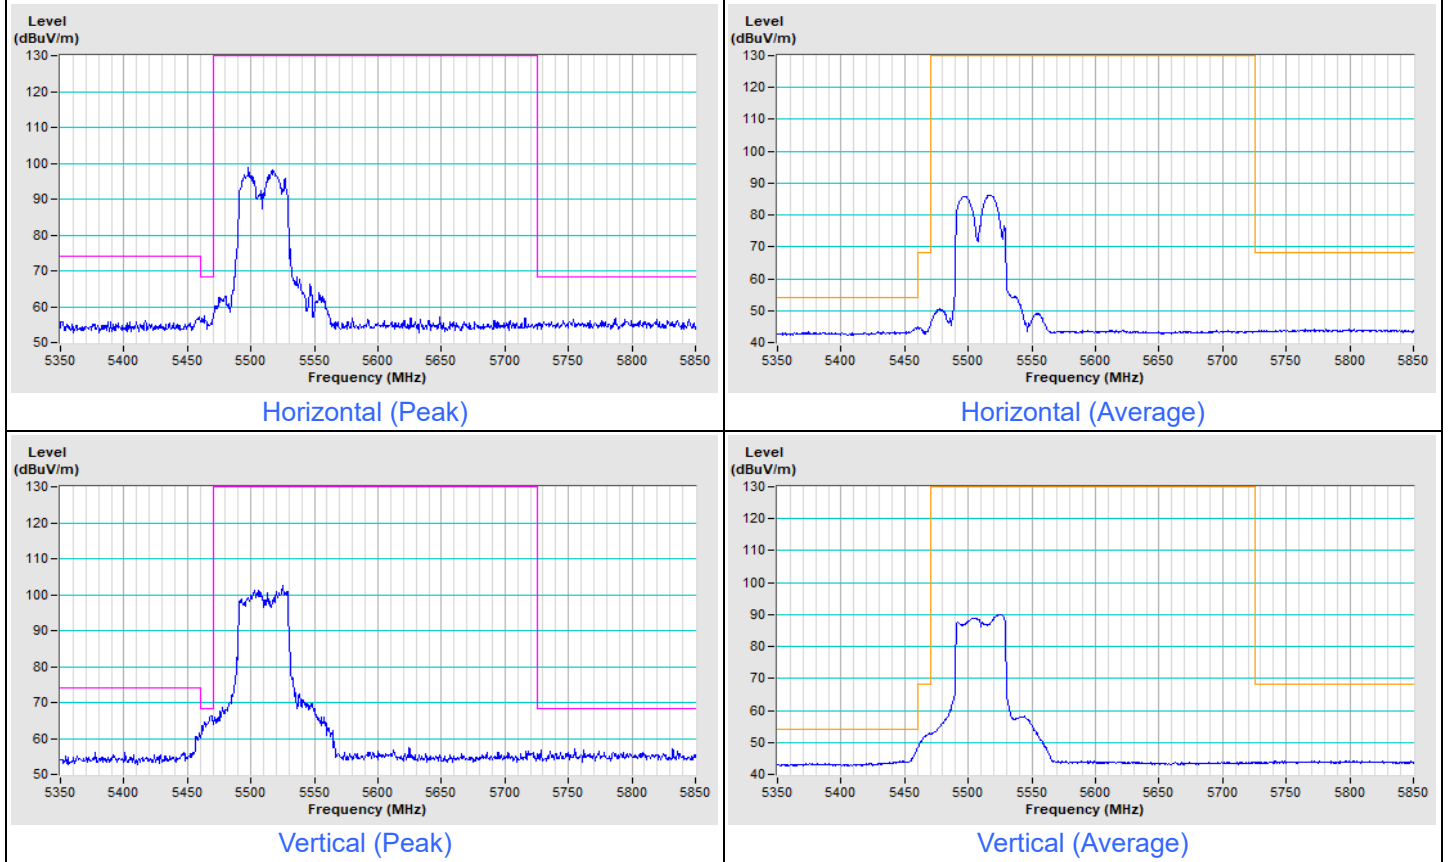


802.11be (EHT40) Channel 134

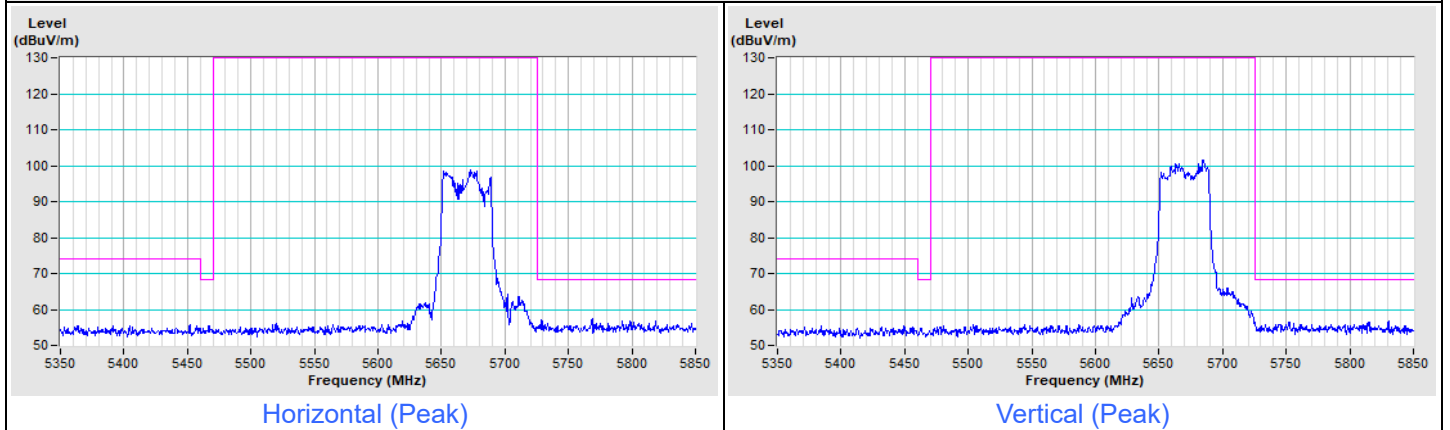


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT40) Channel 142

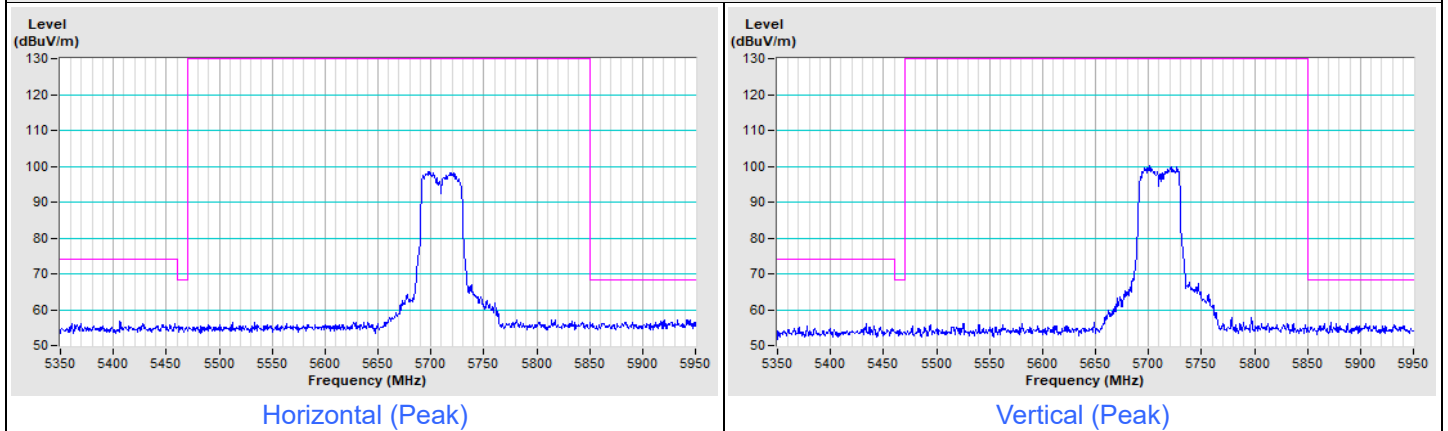


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT40) Channel 151

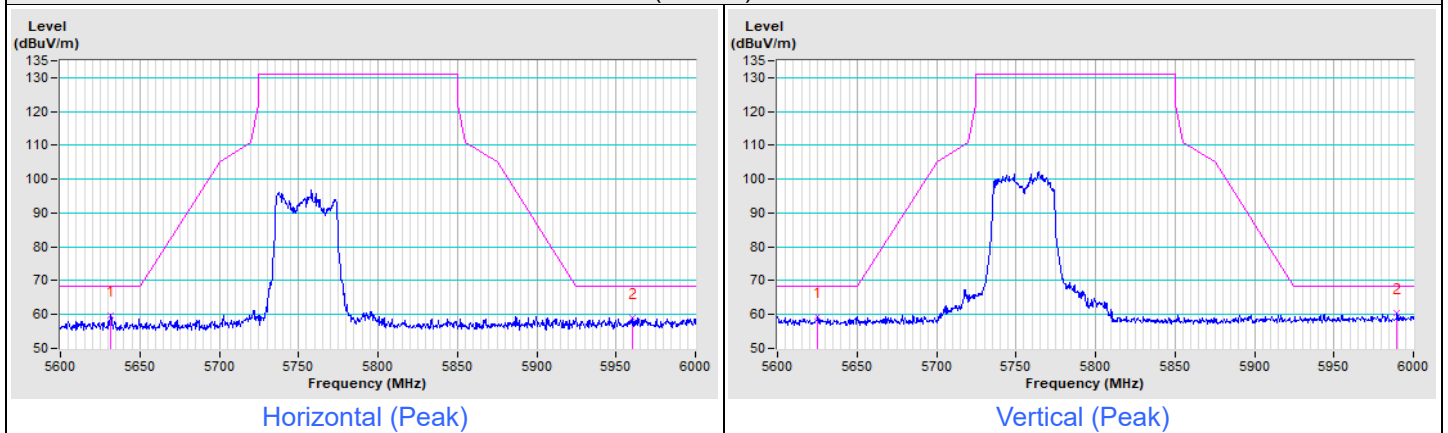


802.11be (EHT40) Channel 159

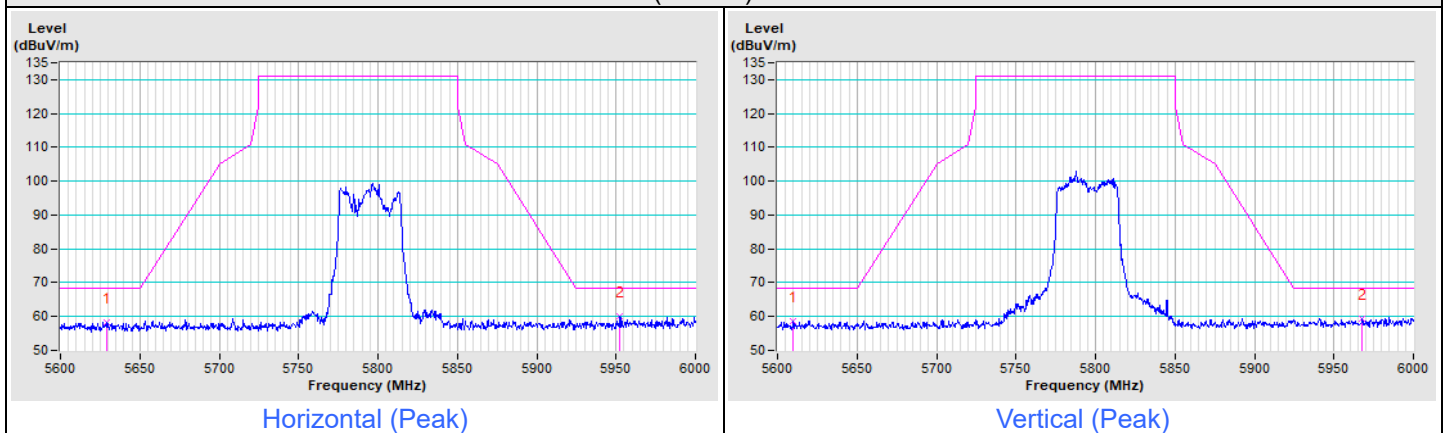


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT80) Channel 42

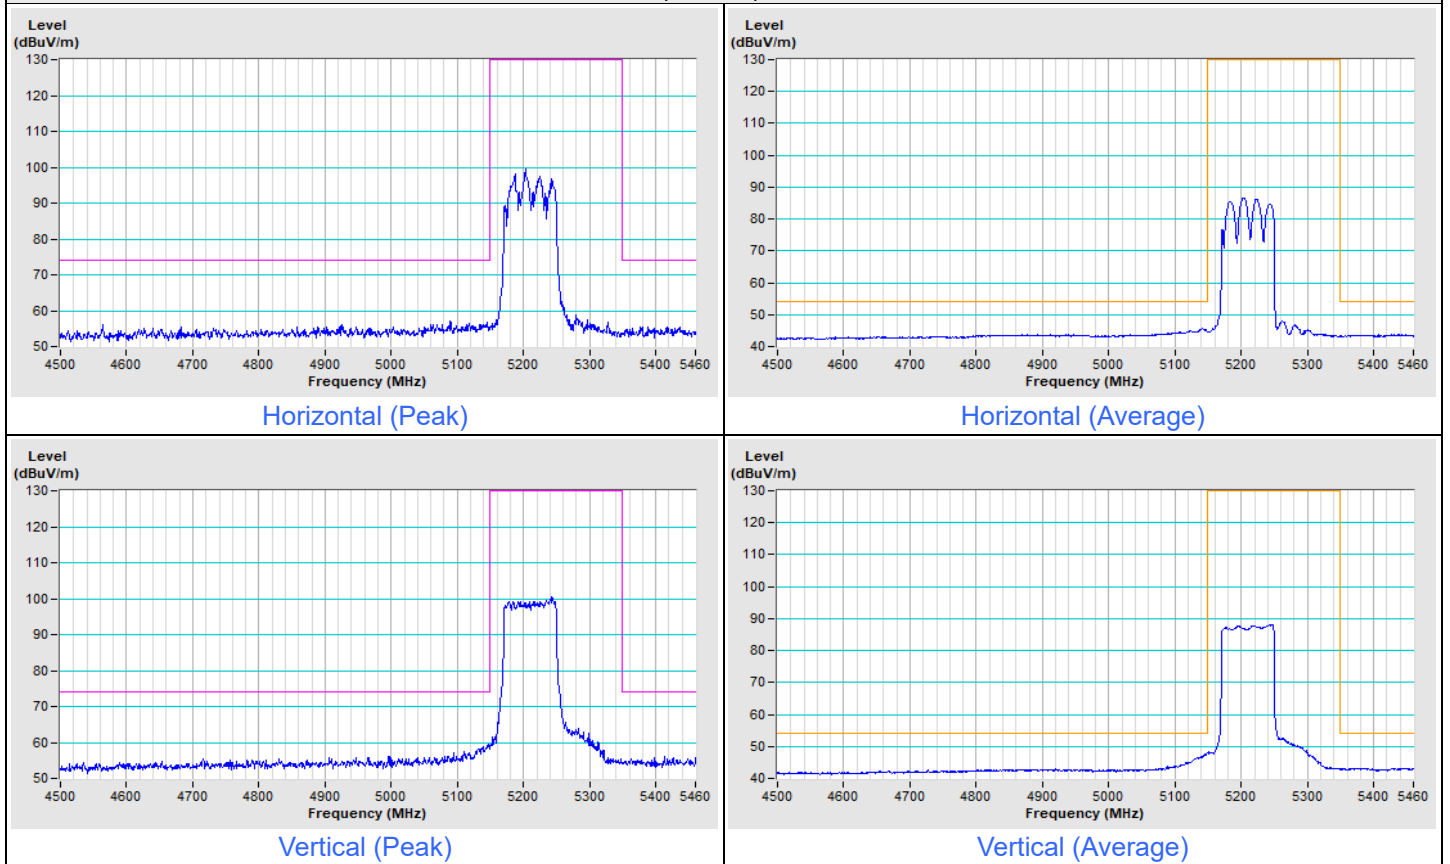


802.11be (EHT80) Channel 58

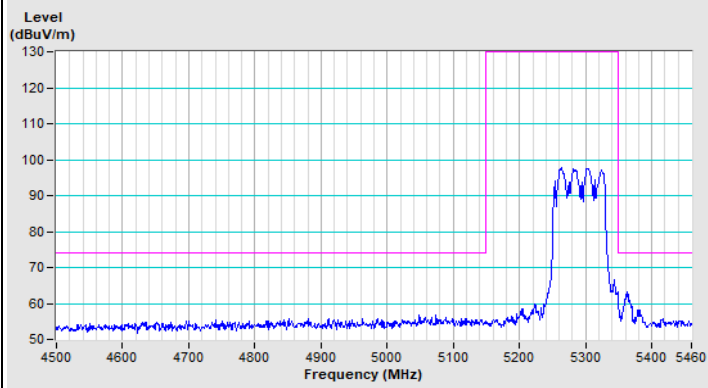


Horizontal (Peak)

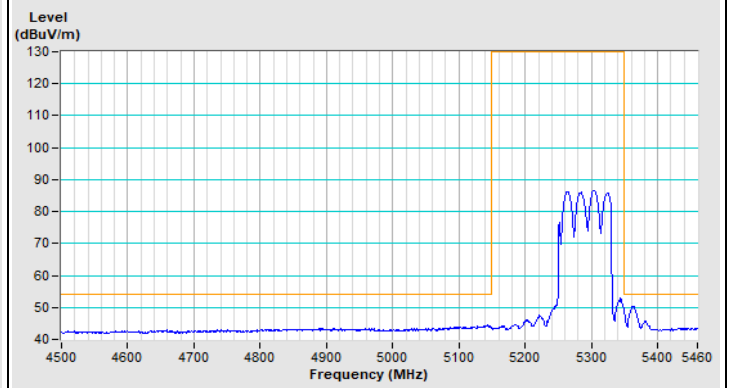

Horizontal (Average)

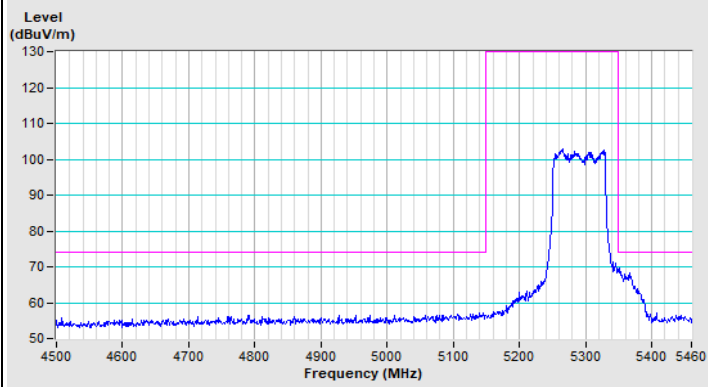


Vertical (Peak)

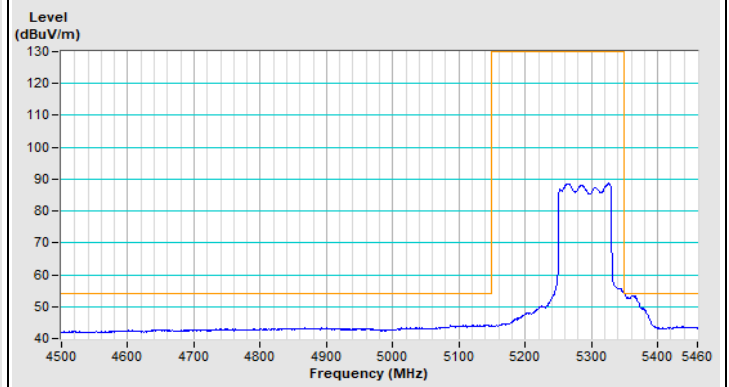


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 106

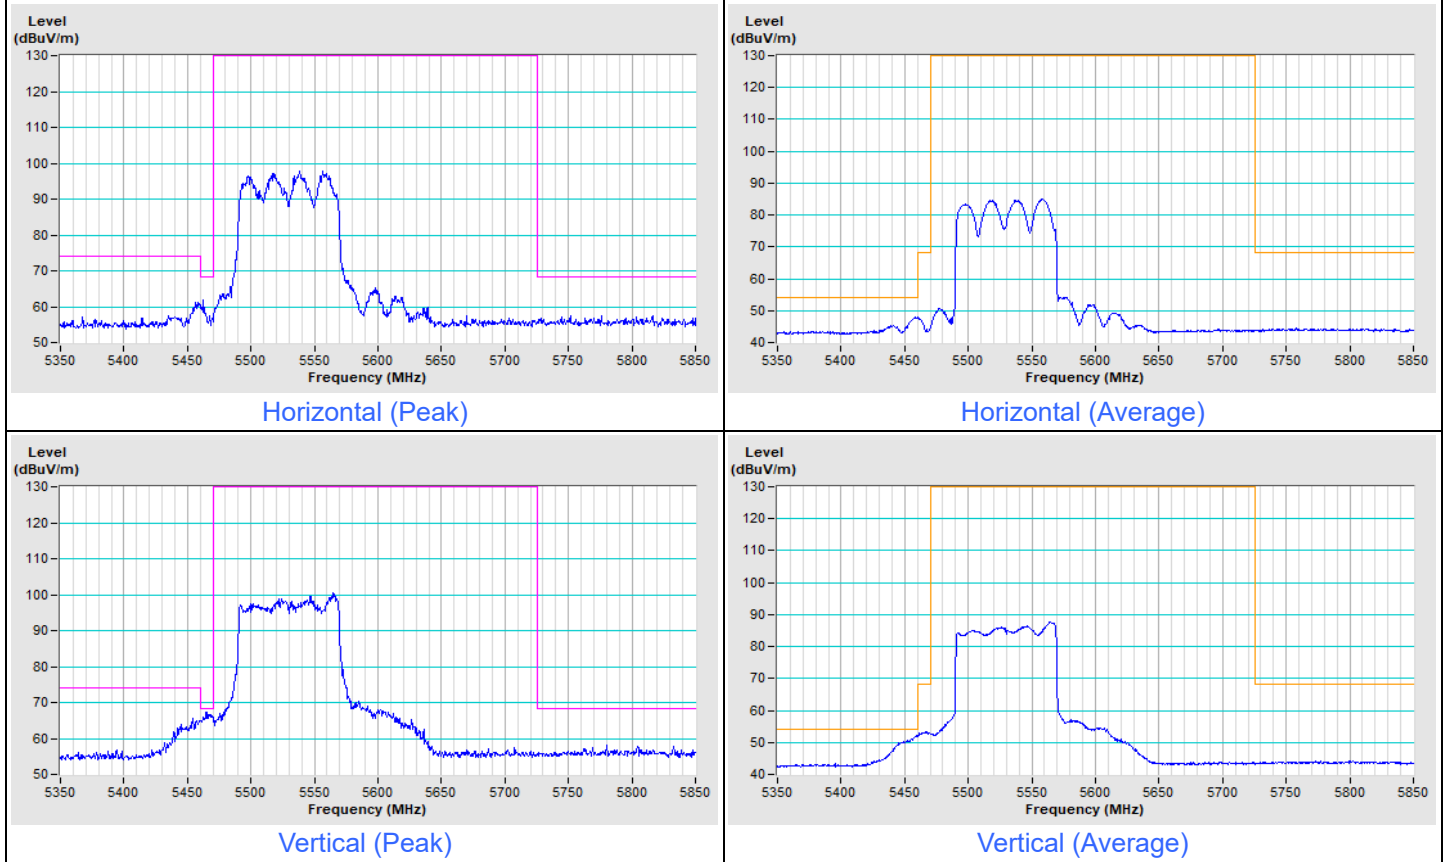


802.11be (EHT80) Channel 122

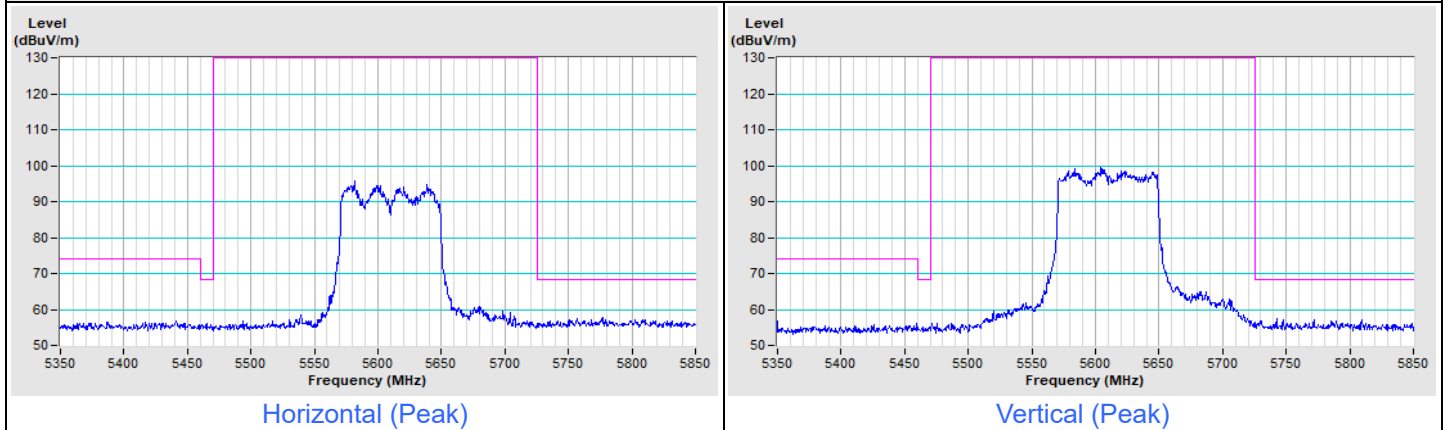


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT80) Channel 138

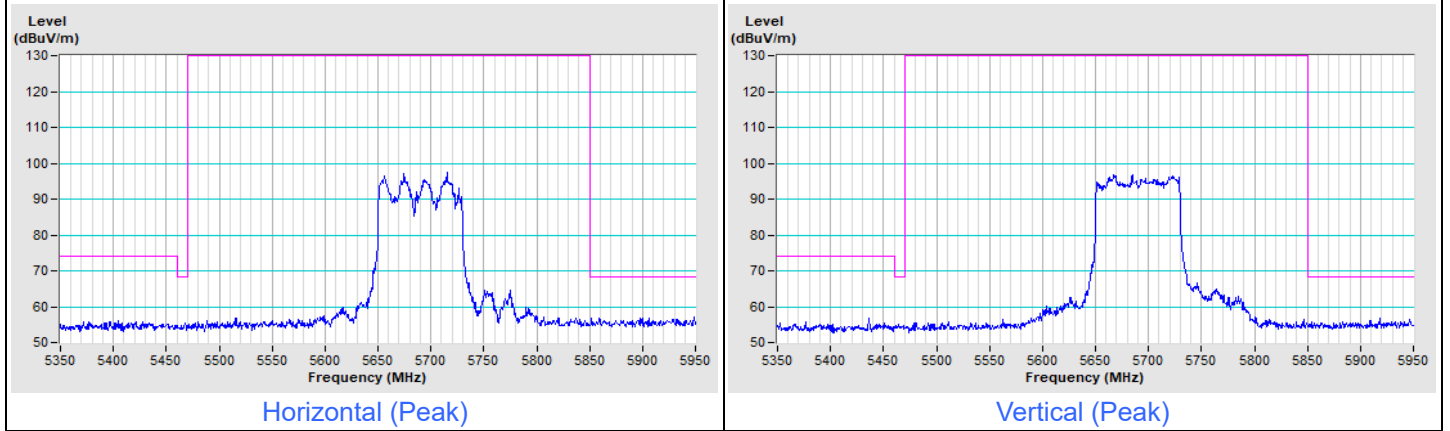


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT80) Channel 155

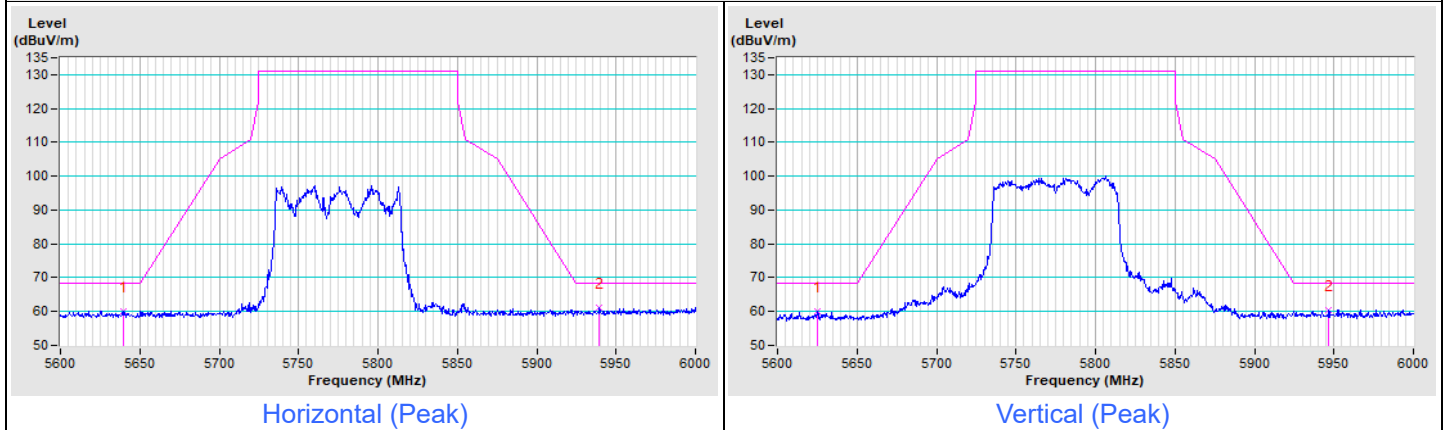


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) Channel 50

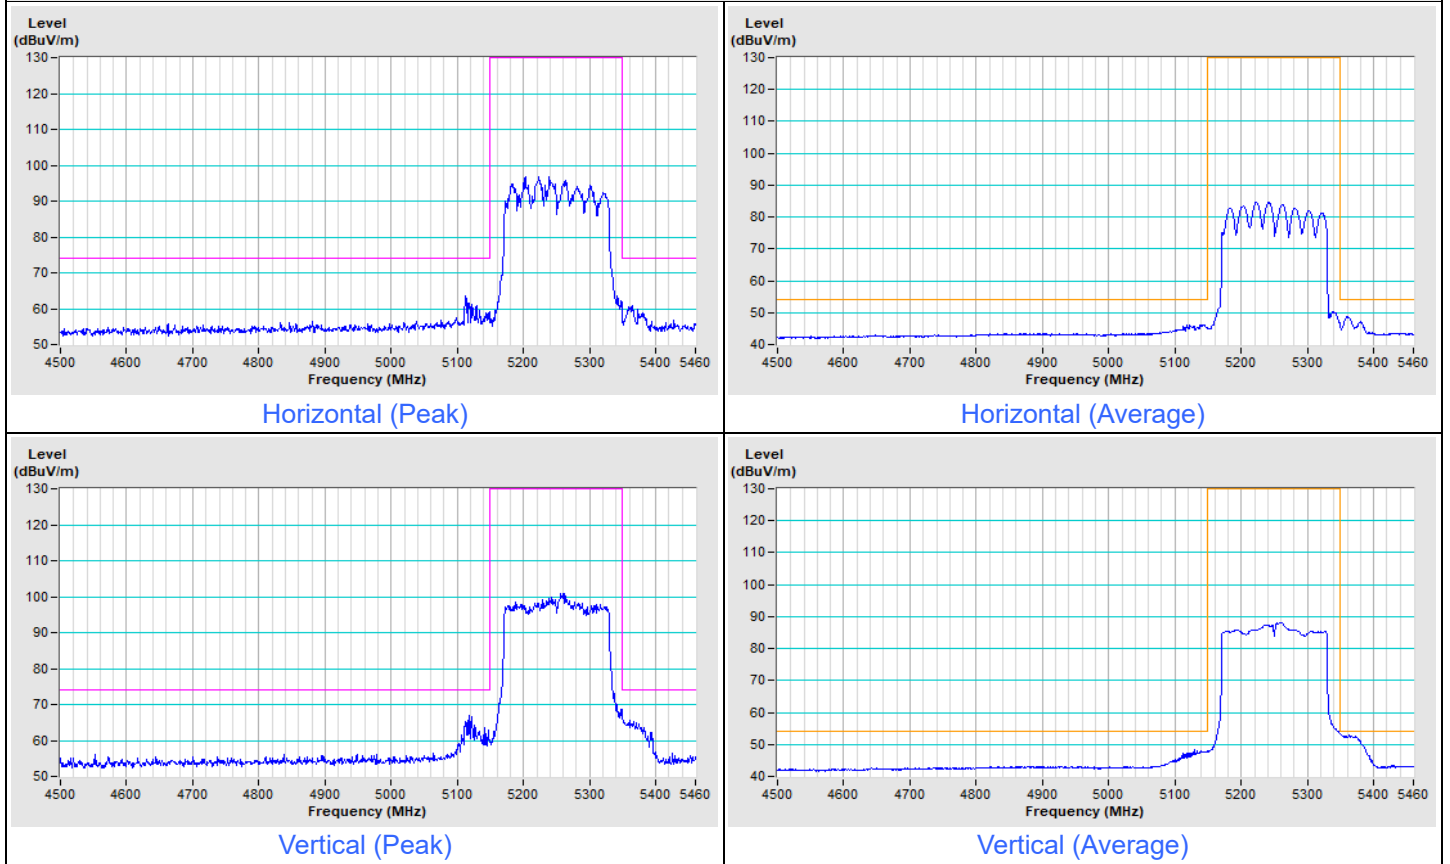

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 114

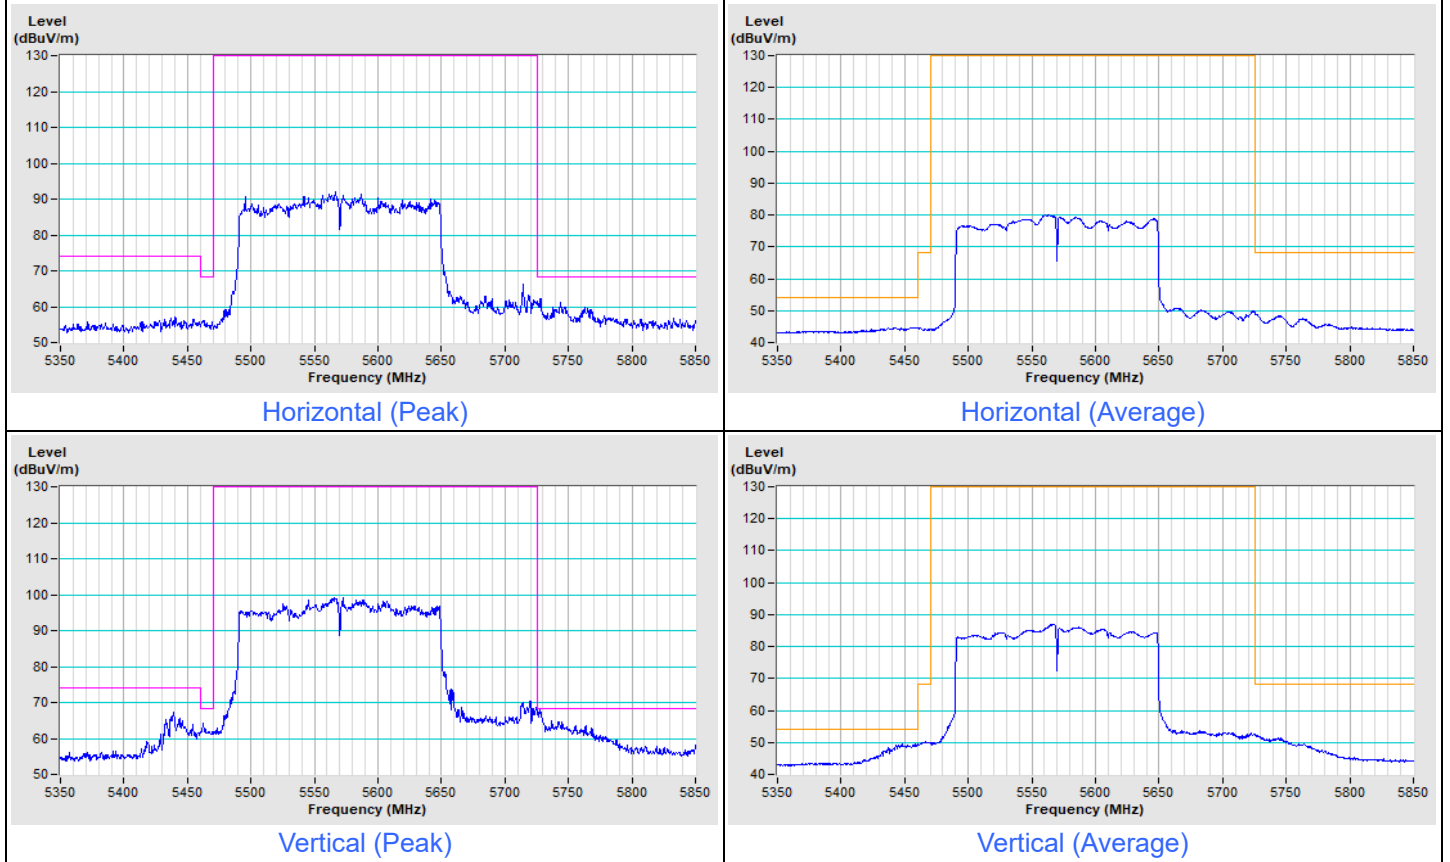

Plot of Other Emission

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11a Channel 140

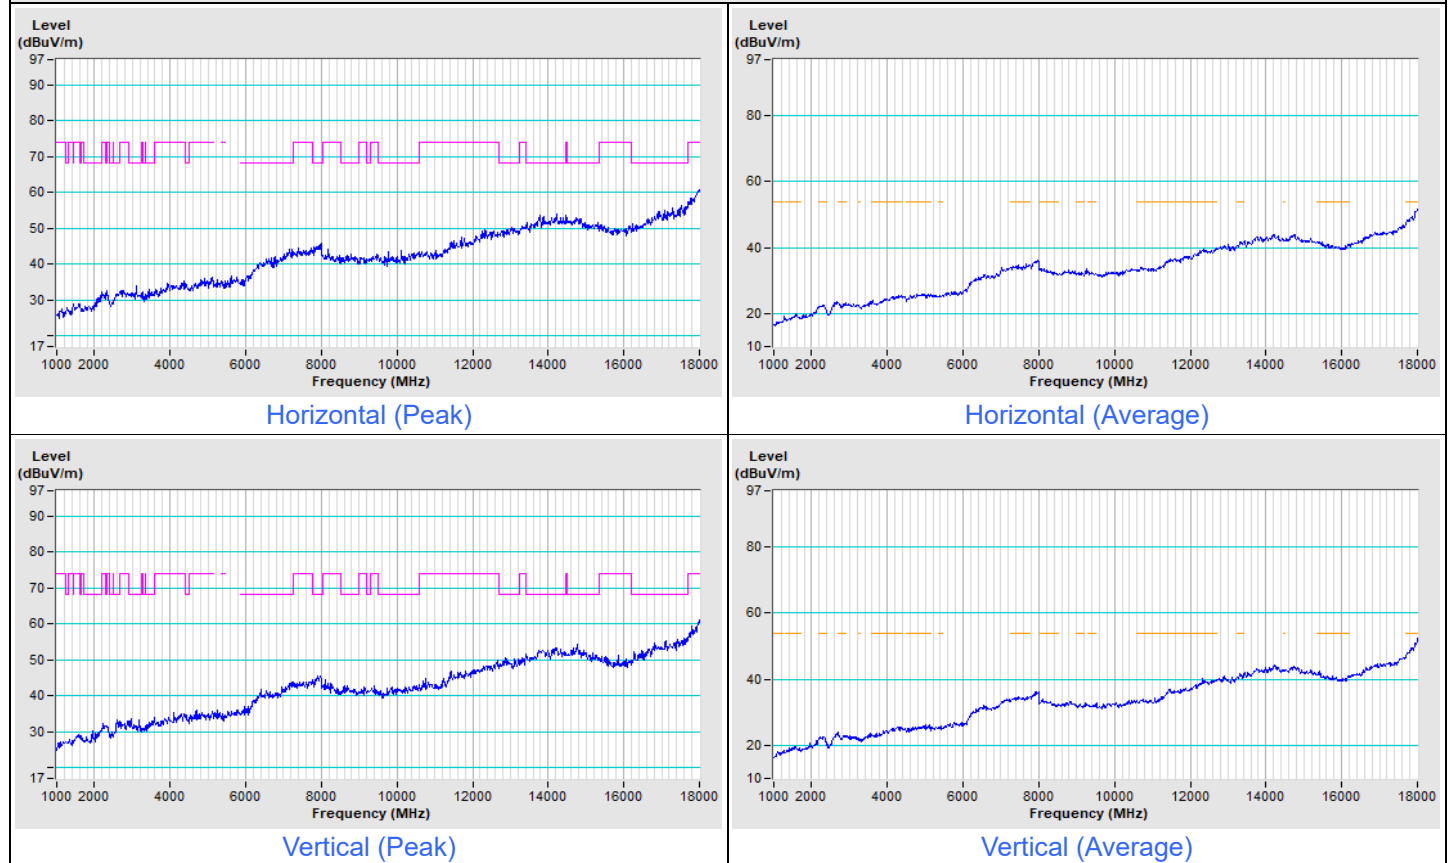


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT20) Channel 140

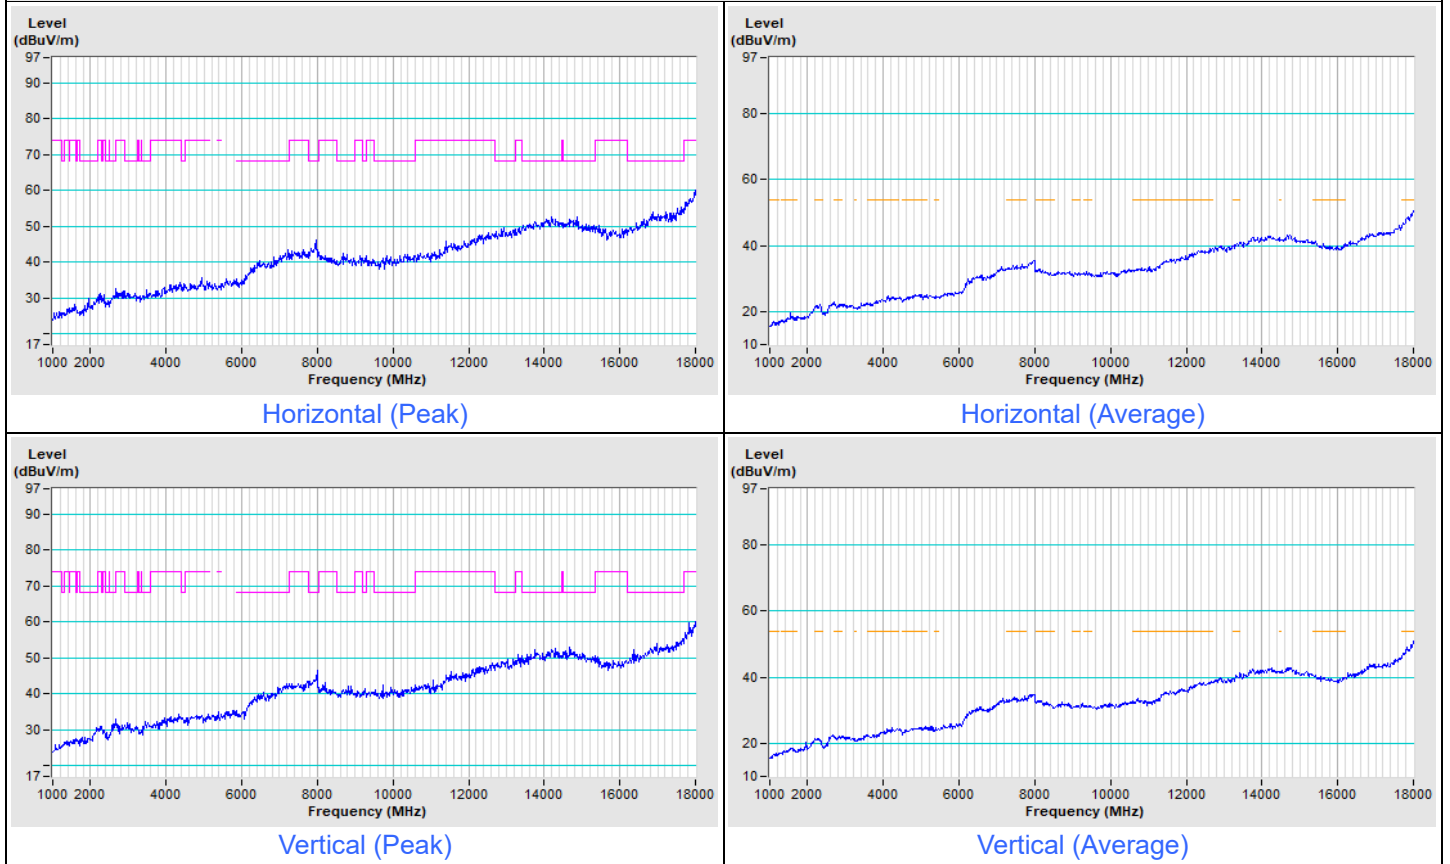


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT40) Channel 142

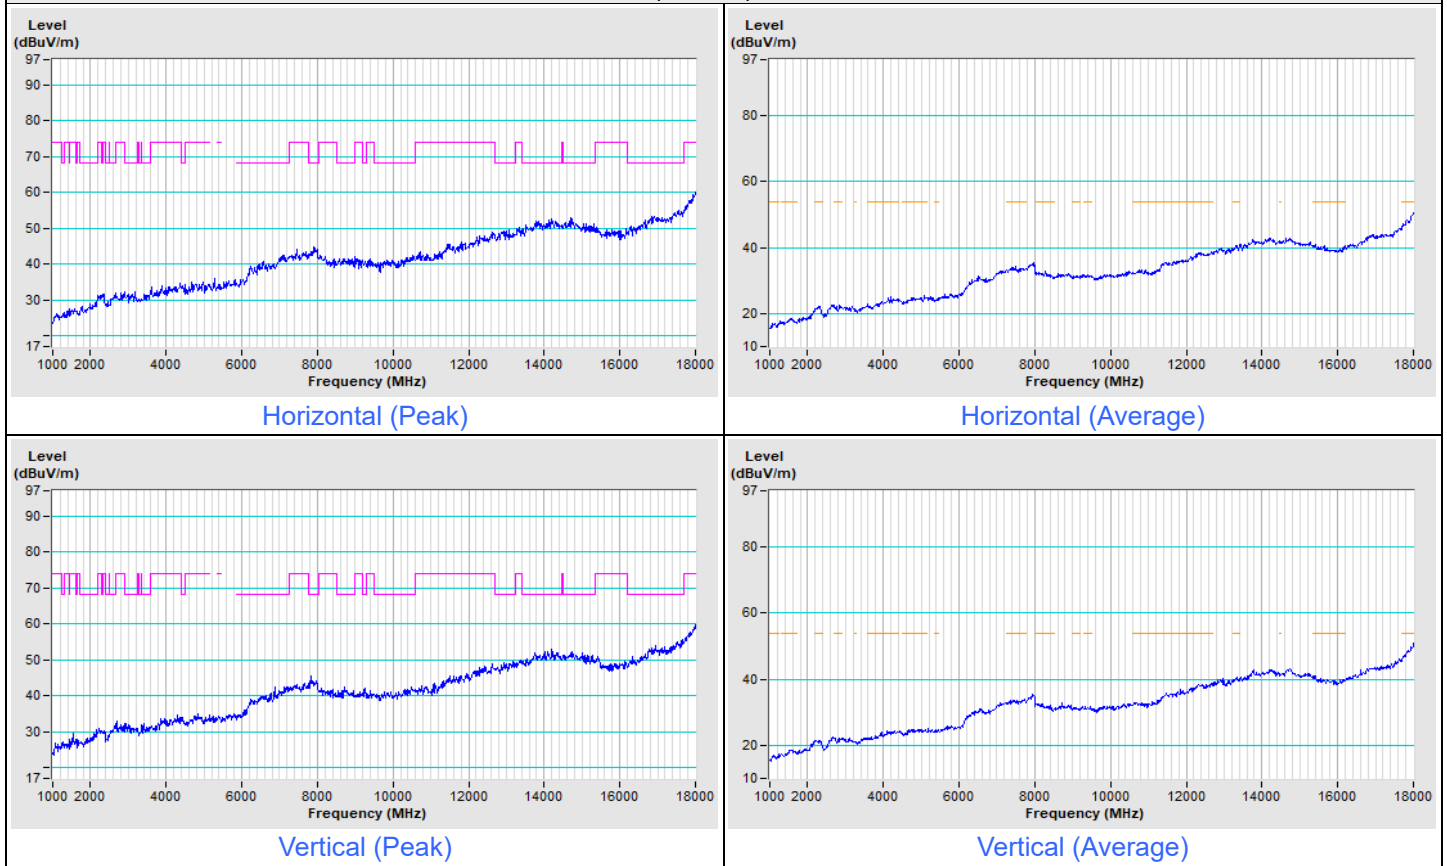


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT80) Channel 138

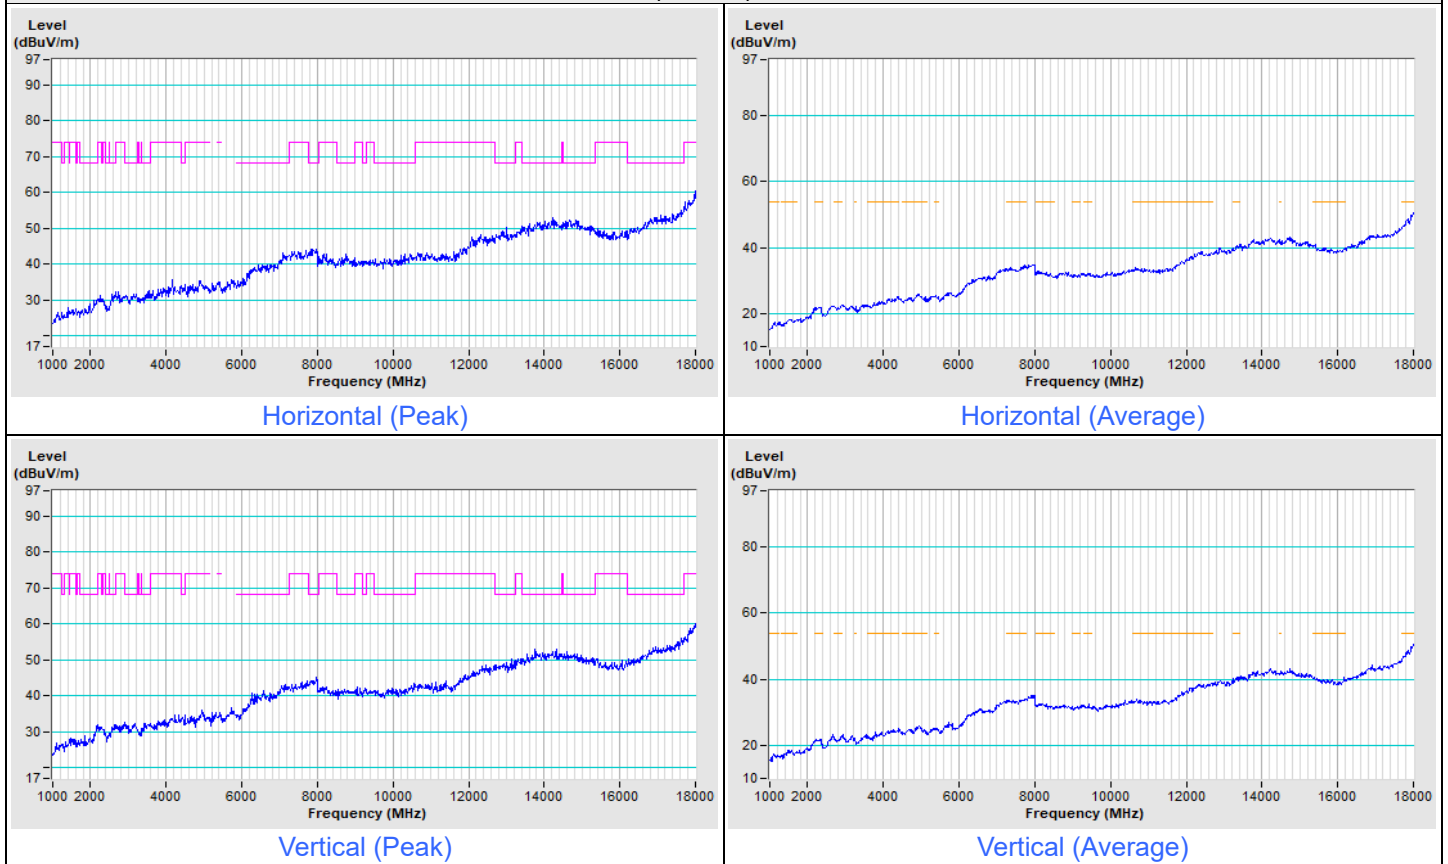


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT160) Channel 114

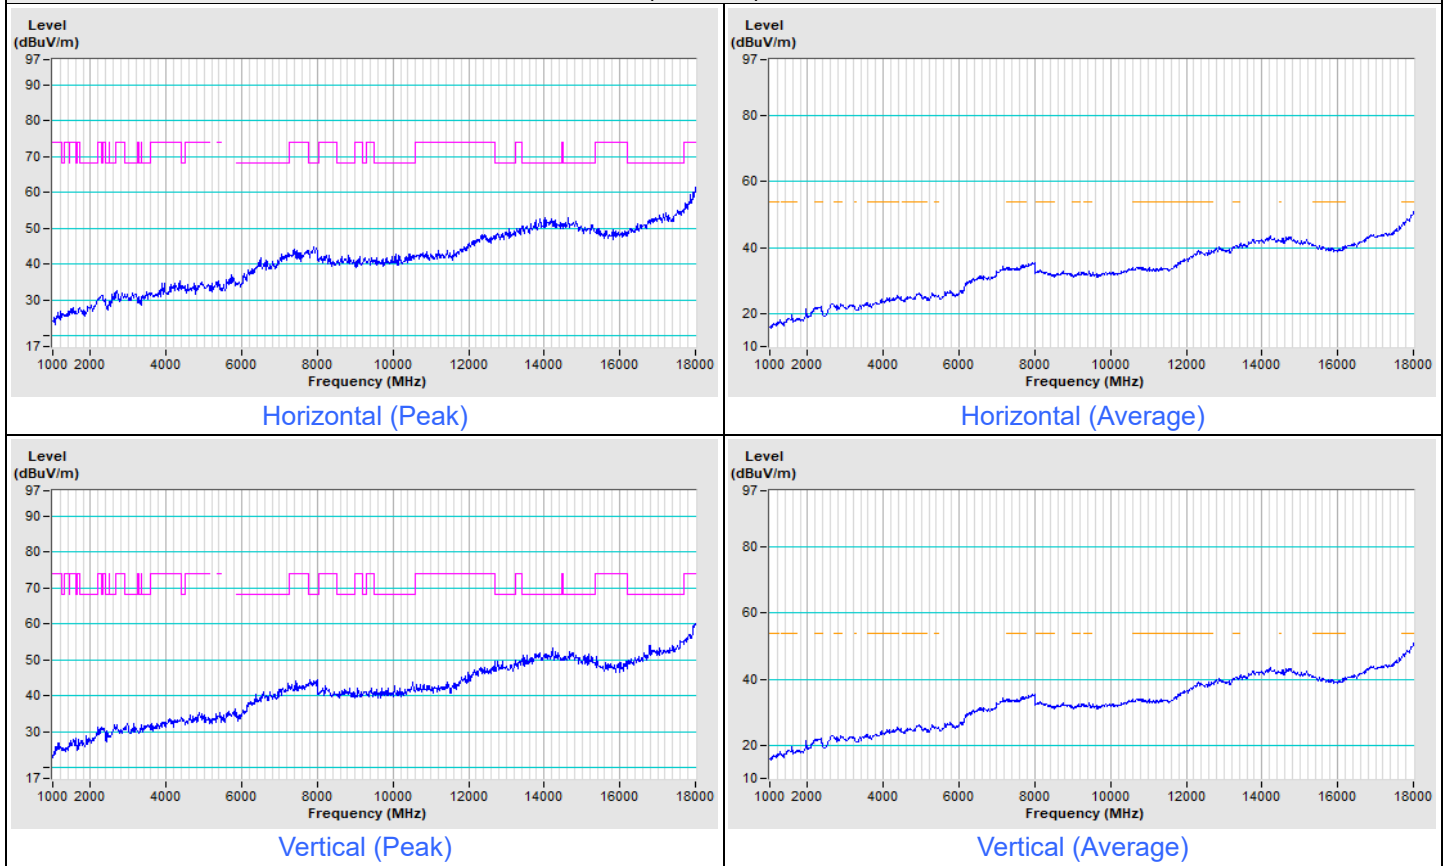

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-(0)2-26052180

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-(0)3-6668565 (SIP)

Tel: 886-(0)3-5120595 (WD)

Hwa Ya EMC/RF/Safety/SAR Lab & Wenming EMC/RF Lab

Tel: 886-(0)3-3183232

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---