



NR n38 SCS 30 kHz, Channel Bandwidth: 30 MHz

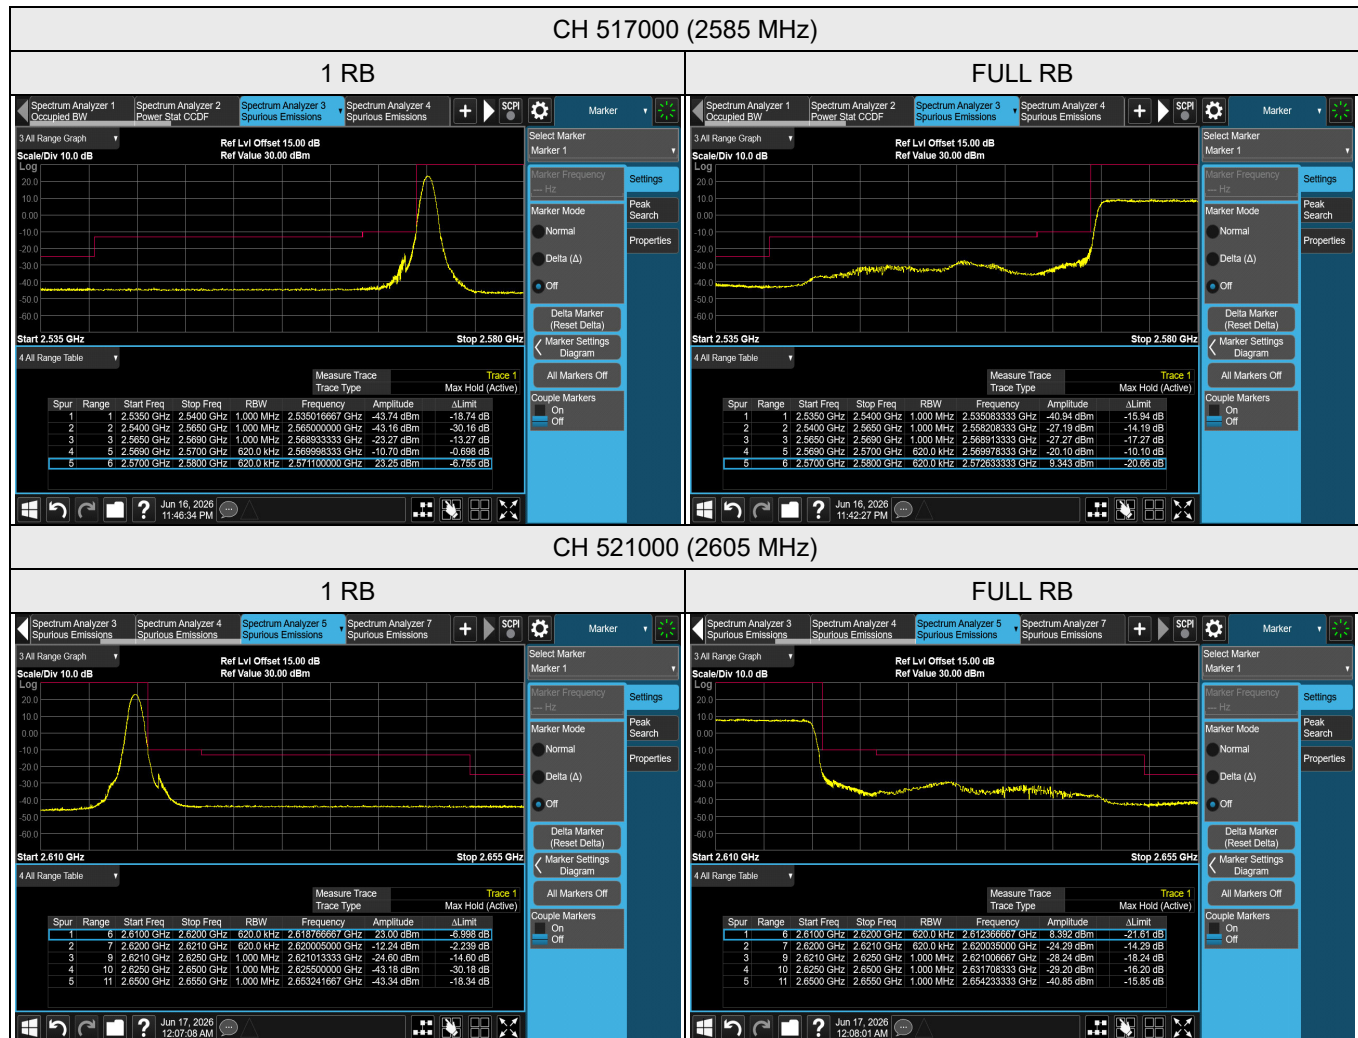



NR n38 SCS 30 kHz, Channel Bandwidth: 40 MHz

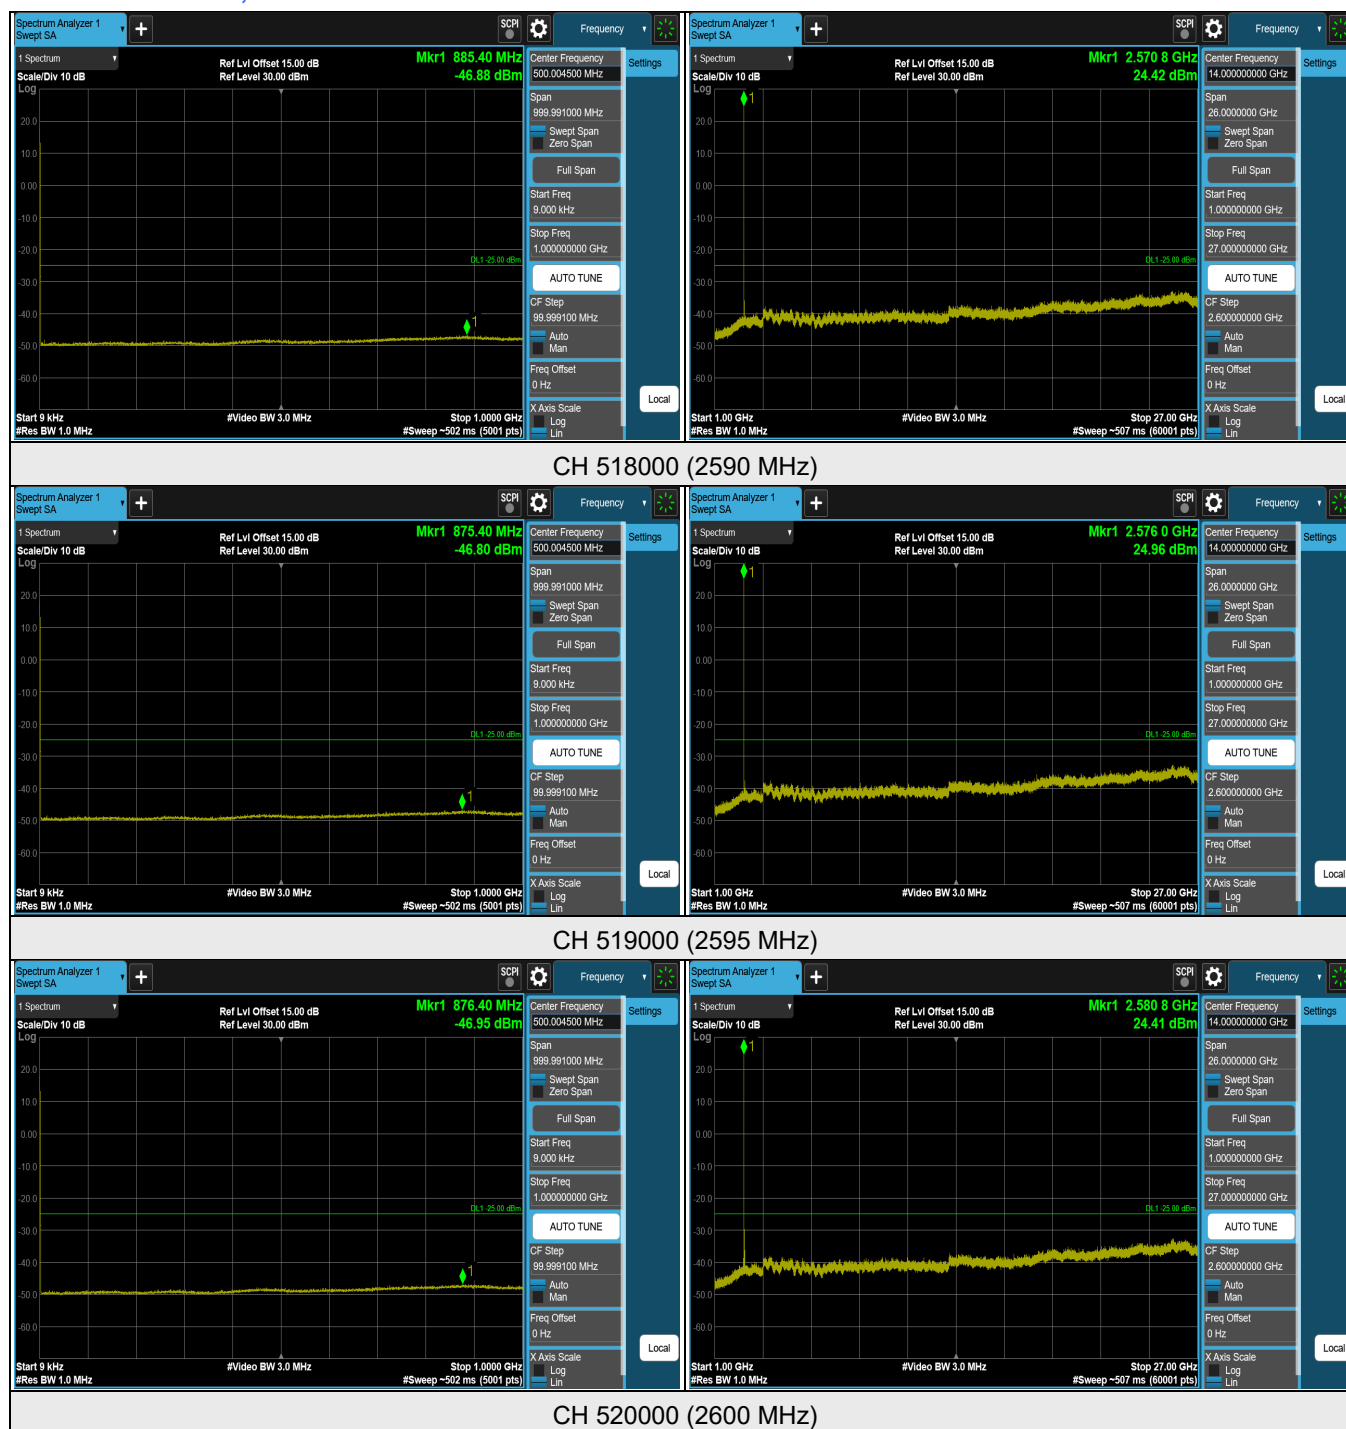

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n38 SCS 30 kHz, Channel Bandwidth: 40 MHz

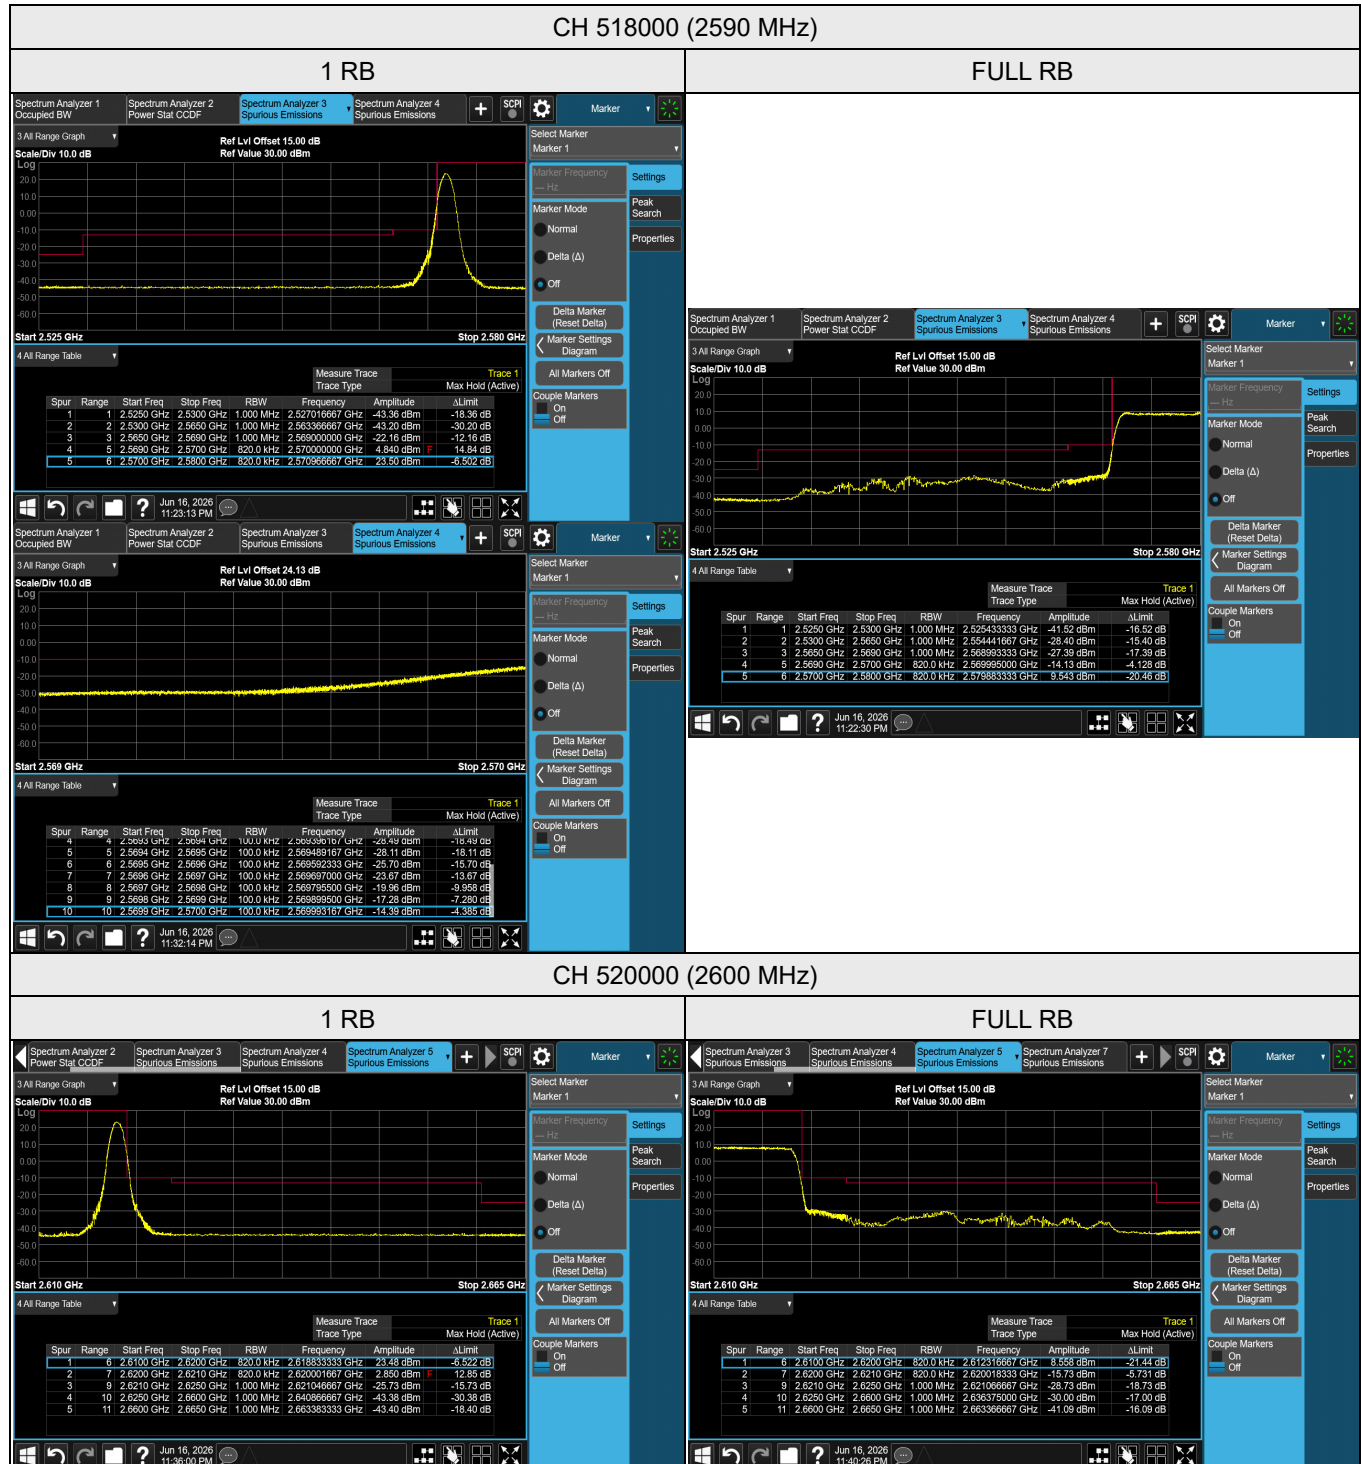

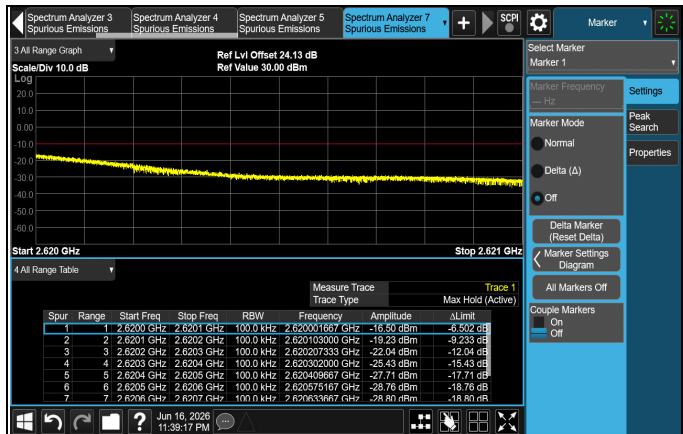

RBW = 100 kHz / Reference RBW = 820 kHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=820kHz] + 10log(820/100)


To compensate for this integration before comparison to the limit, 9.13 dB was added to Ref Lvl Offset.

i.e. 15 dB CF + 9.13 dB integration compensation factor = 24.13 dB Ref Lvl Offset

7.5.3 NR n40 SCS 30 kHz (2.35 GHz ~ 2.36 GHz)


Input Power:	3.85 Vdc	Environmental Conditions:	25°C, 68% RH	Tested By:	Duke Wu
--------------	----------	---------------------------	--------------	------------	---------

NR n40 SCS 30 kHz (2.35 GHz ~ 2.36 GHz), Channel Bandwidth: 10 MHz

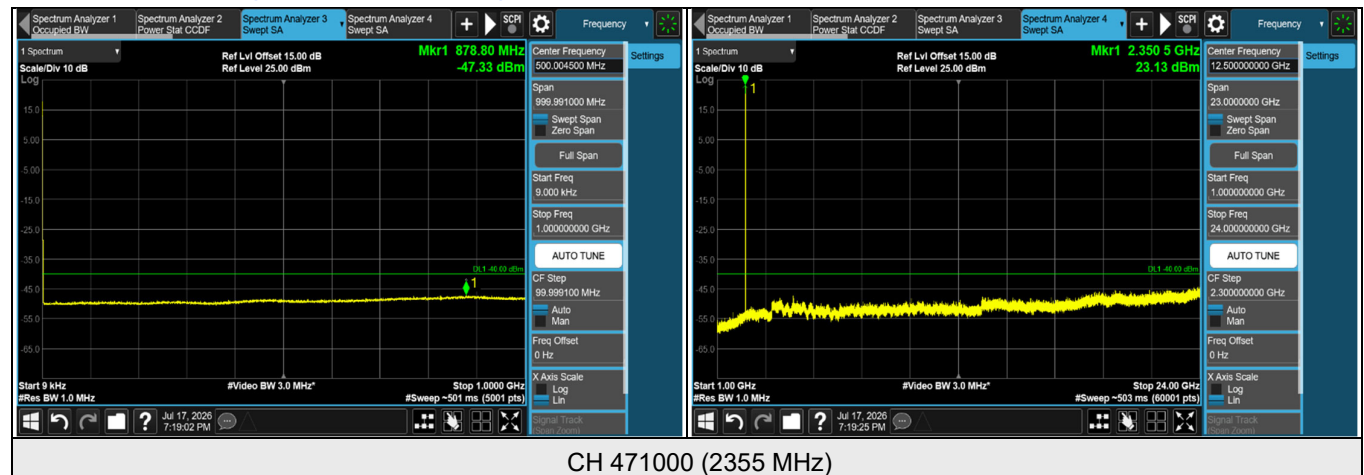

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n40 SCS 30 kHz (2.35 GHz ~ 2.36 GHz), Channel Bandwidth: 10 MHz

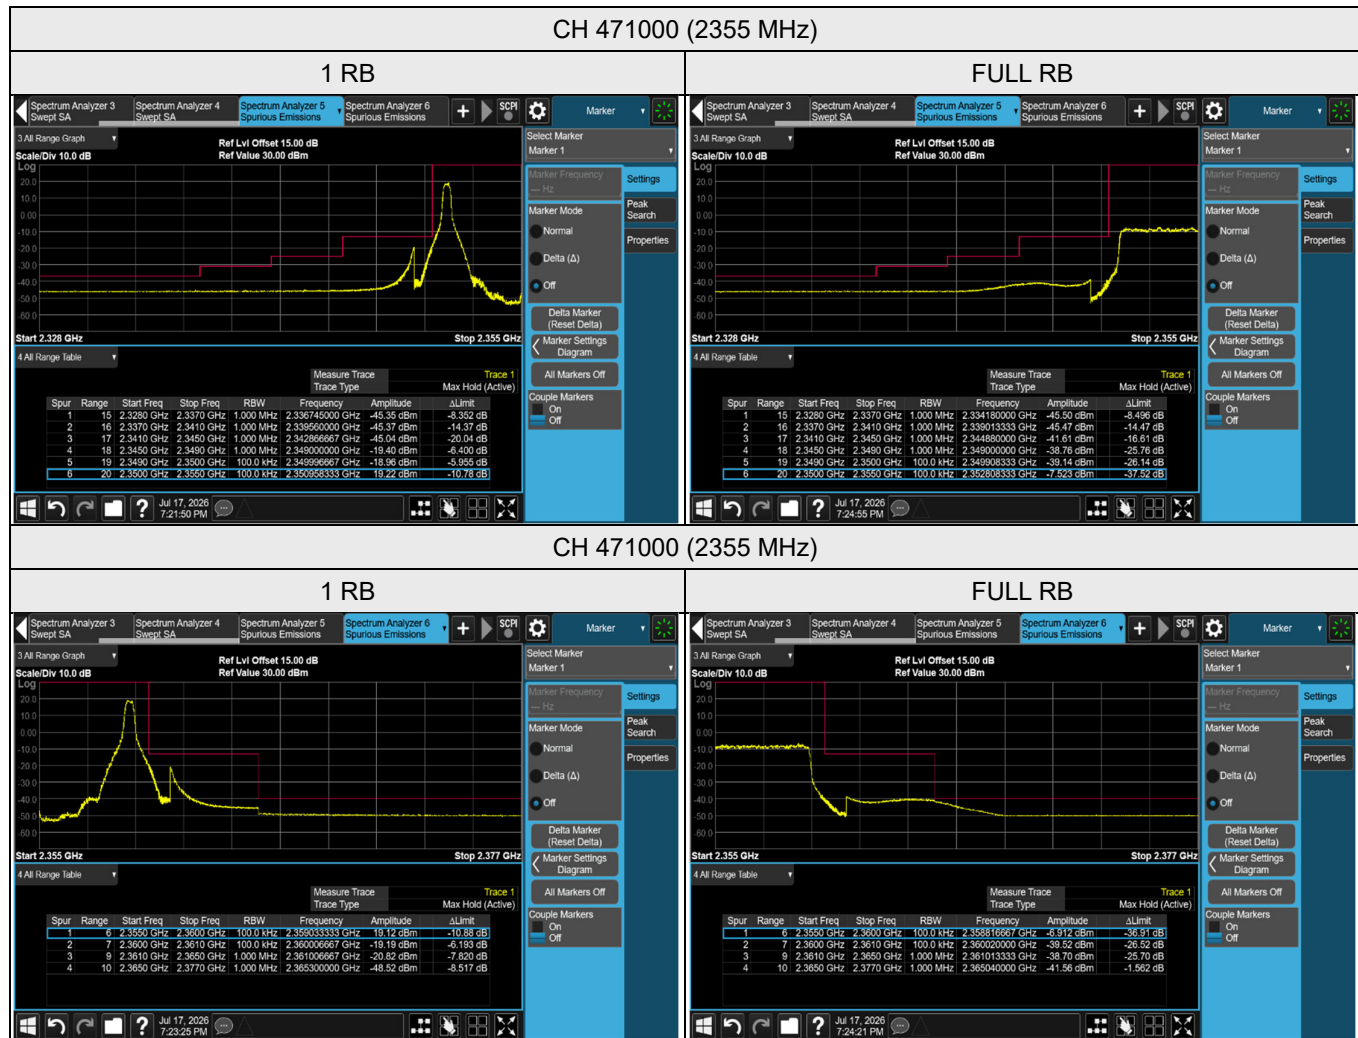

7.5.4 NR n41 SCS 30 kHz


2TX_Ant. 0

NR n41 SCS 30 kHz, Channel Bandwidth: 10 MHz



Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n41 SCS 30 kHz, Channel Bandwidth: 10 MHz

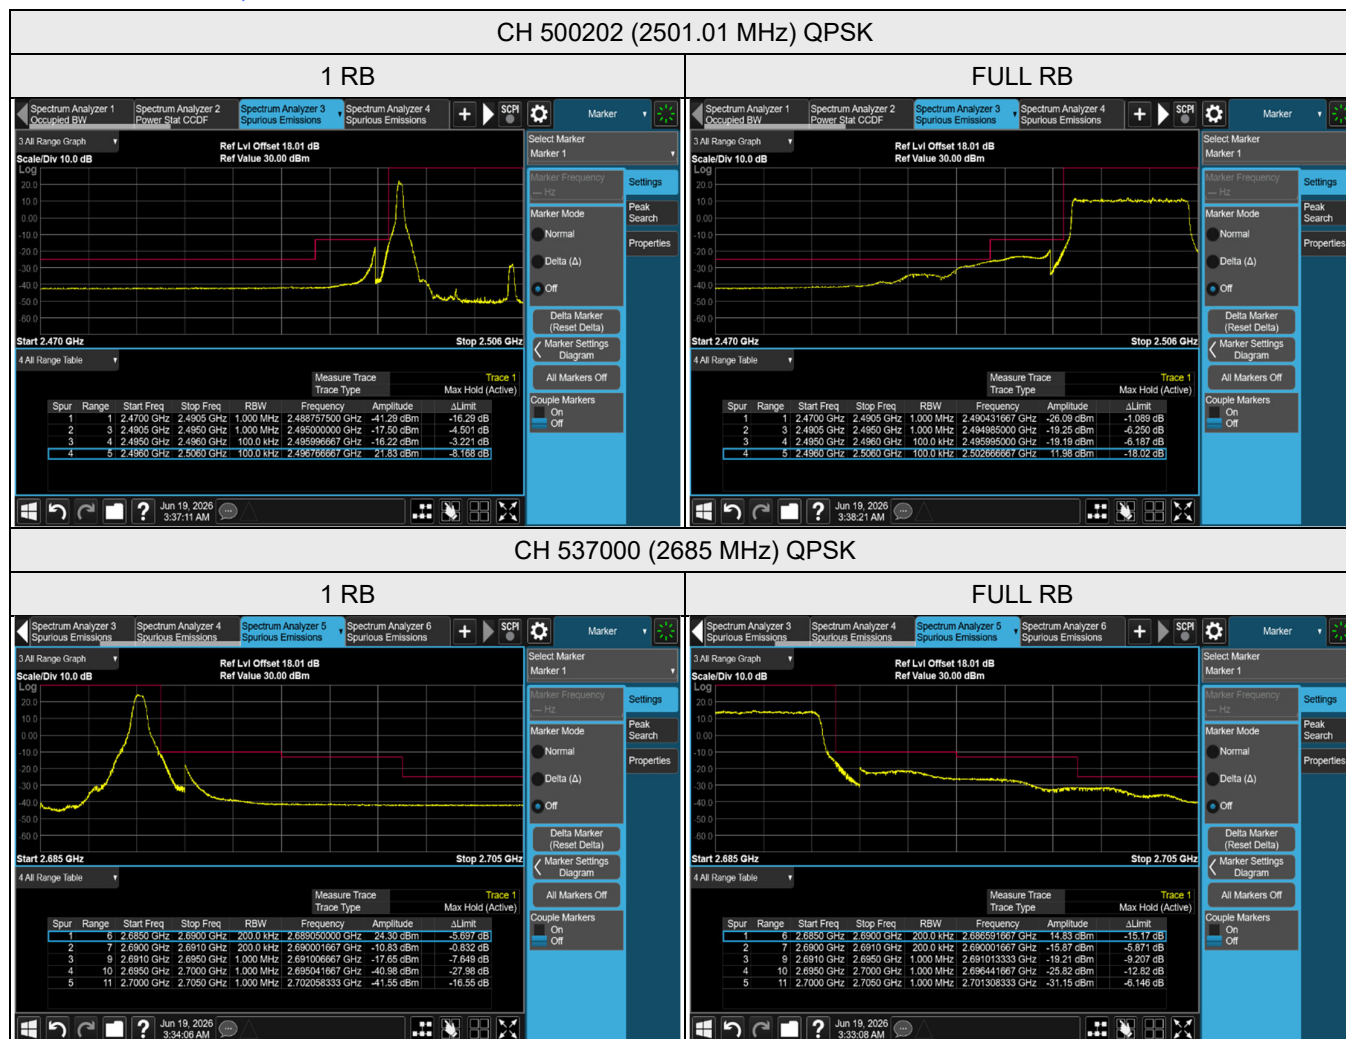

NR n41 SCS 30 kHz, Channel Bandwidth: 15 MHz

