FCC 47 CFR PART 15 SUBPART C

Product Type	:	WWAN Mobile Hotspot Portable Device
Applicant	:	Netgear Inc.
Address	:	350 East Plumeria Drive, San Jose, California 95134 United States
Trade Name	:	Netgear
Model Number	:	AC785S-500
Test Specification	:	FCC 47 CFR PART 15 SUBPART C: Oct., 2013 Canada RSS-210 ISSUE 8: Dec., 2010 Canada RSS-Gen ISSUE 4: Nov., 2014 ANSI C63.4:2014
Receive Date	:	Sep. 11, 2014
Test Period	:	Sep.18~Sep.24, 2014
Issue Date	:	Dec. 31, 2014

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel：+886-3-2710188 / Fax：+886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330
FCC Test Firm Information: 510205
IC Test Firm Information: 7381A-1

Note: *This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.*

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Oct. 07, 2014	Initial Issue	
01	Nov. 04, 2014	Revised report information.	Nina Lin
02	Nov. 27, 2014	Revised report information.	Peggy Chang
03	Dec. 31, 2014	Revised report information.	Peggy Chang

Verification of Compliance

Issued Date: 12/31/2014

Product Type	:	WWAN Mobile Hotspot Portable Device
Applicant	:	Netgear Inc.
Address	:	350 East Plumeria Drive, San Jose, California 95134 United States
Trade Name	:	Netgear
Model Number	:	AC785S-500
FCC ID	:	PY3AC785S
EUT Rated Voltage	:	DC 5.0V, 1.0A
Test Voltage	:	120 Vac / 60 Hz
Applicable Standard	:	FCC 47 CFR PART 15 SUBPART C: Oct., 2013 Canada RSS-210 ISSUE 8: Dec., 2010 Canada RSS-Gen ISSUE 4: Nov., 2014 ANSI C63.4:2014
Test Result	:	Complied
Performing Lab.	:	A Test Lab Techno Corp. No. 140-1, Changan Street, Bade City, Taoyuan County 334, Taiwan R.O.C. Tel：+886-3-2710188 / Fax：+886-3-2710190 Taiwan Accreditation Foundation accreditation number: 1330 FCC Test Firm Information: 510205 IC Test Firm Information: 7381A-1 http://www.atl-lab.com.tw/e-index.htm

The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2014 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .

The test results of this report relate only to the tested sample identified in this report.

Approved By	: Fly Lu	Reviewed By	: Eric Ou Yang
(Manager)	(Fly Lu)	(Testing Engineer)	(Eric Ou Yang)

TABLE OF CONTENTS

1 General Information 6
2 EUT Description 7
3 Test Methodology 8
3.1. Mode of Operation 8
3.2. EUT Exercise Software 8
3.3. Configuration of Test System Details 9
3.4. Test Site Environment 9
4 Conducted Emission Measurement 10
4.1. Limit 10
4.2. Test Instruments 10
4.3. Test Setup 10
4.4. Test Procedure 11
4.5. Test Result 12
5 Radiated Emission Measurement 16
5.1. Limit 16
5.2. Test Instruments 16
5.3. Setup 17
5.4. Test Procedure 18
5.5. Test Result 20
6 Maximum Conducted Output Power Measurement 29
6.1. Limit 29
6.2. Test Setup 29
6.3. Test Instruments 29
6.4. Test Procedure 29
6.5. Test Result 30
7 6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement 34
7.1. Limit 34
7.2. Test Setup 34
7.3. Test Instruments 34
7.4. Test Procedure 34
7.5. Test Result 35
7.6. Test Graphs 37
8 Maximum Power Density Measurement 53
8.1. Limit 53
8.2. Test Setup 53
8.3. Test Instruments 53
8.4. Test Procedure 53
8.5. Test Result 54
8.6. Test Graphs 56

9 Out of Band Conducted Emissions Measurement 64
9.1. Limit 64
9.2. Test Setup 64
9.3. Test Instruments 64
9.4. Test Procedure 64
9.5. Test Graphs 65
10 Band Edges Measurement 89
10.1. Limit 89
10.2. Test Setup 89
10.3. Test Instruments 89
10.4. Test Procedure 90
10.5. Test Result 91
11 Antenna Measurement 95
11.1. Limit 95
11.2. Antenna Connector Construction 95

1 General Information

1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	8.8	AC Power Conducted Emission	PASS	-----
-----	7.1	Receiver Radiated Emissions	PASS	-----
-----	6.6	99 % Occupied Bandwidth	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	A8.4	Max. Output Power	PASS	-----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	-----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	-----
15.247(d)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	A8.5	Band Edge Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range		Uncertainty (dB)
Conducted Emission	9kHz ~ 30MHz		± 2.02
Radiated Emission	30MHz ~ 1000MHz	Horizontal	± 3.98
		Vertical	± 3.62
	1000MHz ~ 18000MHz	Horizontal	± 3.11
		Vertical	± 3.07
	18000MHz ~ 40000MHz	Horizontal	± 3.66
		Vertical	± 3.54

2 EUT Description

Product Type	WWAN Mobile Hotspot Portable Device
Trade Name	Netgear
Model No.	AC785S-500
Applicant	Netgear Inc. 350 East Plumeria Drive, San Jose, California 95134 United States
Manufacturer	Netgear Inc. Suite 168 – 10760 Shellbridge Way, Richmond, BC Canada V6X 3H1
IMEI No.	014197000002053
FCC ID	PY3AC785S
Frequency Range	IEEE 802.11b / 802.11g / 802.11n 2.4GHz 20MHz: 2412 ~ 2462 MHz IEEE 802.11n 2.4GHz 40MHz: 2422 ~ 2452 MHz
Modulation Type	IEEE 802.11b:DSSS IEEE 802.11g:DSSS + OFDM IEEE 802.11n 2.4GHz 20MHz: OFDM IEEE 802.11n 2.4GHz 40MHz: OFDM
Antenna Delivery	2*TX + 2*RX
Antenna Used	Item / Antenna Port / Type / Max Gain 1 / Ant-1 / IFA Antenna / 2.2dBi 2 / Ant-2 / IFA Antenna / 2.2dBi
RF Output Power	IEEE 802.11b: 0.021 W / 13.19 dBm IEEE 802.11g: 0.118 W / 20.73 dBm IEEE 802.11n 2.4GHz 20MHz: 0.121 W / 20.84 dBm IEEE 802.11n 2.4GHz 40MHz: 0.133 W / 21.23 dBm
99 % Occupied Bandwidth	IEEE 802.11b: 12.76 MHz IEEE 802.11g: 17.49 MHz IEEE 802.11n 2.4GHz 20MHz: 18.26 MHz IEEE 802.11n 2.4GHz 40MHz: 37.35 MHz
Emission Designator	IEEE 802.11b: 12M8G7D IEEE 802.11g: 17M5D7D IEEE 802.11n 2.4GHz 20MHz: 18M3D7D IEEE 802.11n 2.4GHz 40MHz: 37M4D7D

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: IEEE 802.11b Link Mode
Mode 3: IEEE 802.11g Link Mode
Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode
Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode
Mode 6: Receiver Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode: (Ant-1+2)
Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE 802.11g mode: (Ant-1+2)
Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE 802.11n 2.4GHz 20MHz mode: (Ant-1+2)
Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n 2.4GHz 40MHz mode: (Ant-1+2)
Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 54Mbps data rate were chosen for full testing.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “X axis” position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

3.2. EUT Exercise Software

1. Setup the EUT shown on 3.3.
2. Turn on the power of all equipment.
3. Turn on Wi-Fi function link to AP.
4. EUT run test program.

3.3. Configuration of Test System Details

Conducted Emission

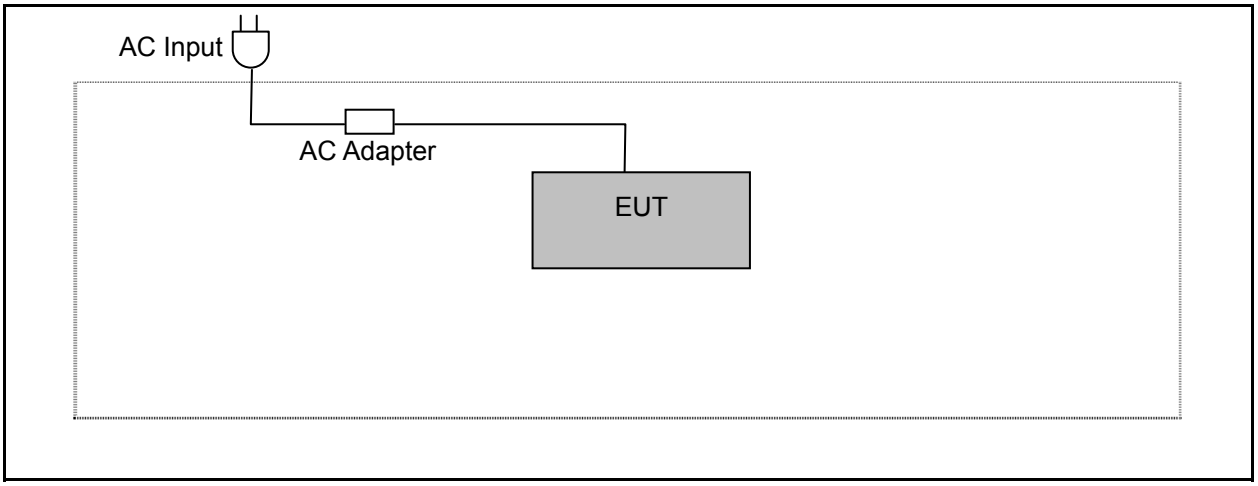

Radiated Emission

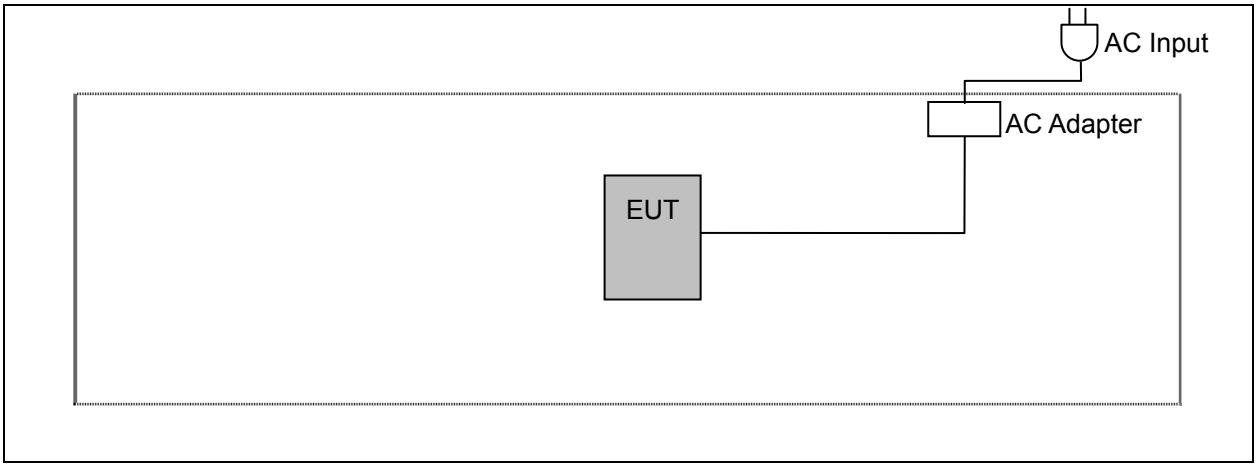

3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/12/2014	(1)
LISN	R&S	ENV216	101040	03/07/2014	(1)
LISN	R&S	ENV216	101041	03/07/2014	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

4.3. Test Setup

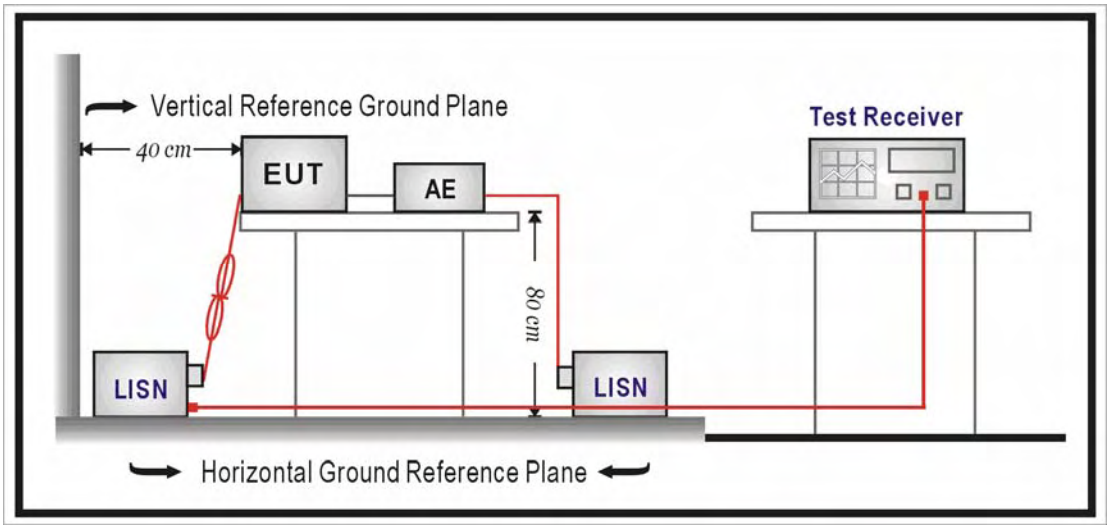

4.4. Test Procedure

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	1	Date:	09/17/2014
		Test By:	Eric Ou Yang
Description:	Adapter Model: AD2015F21		

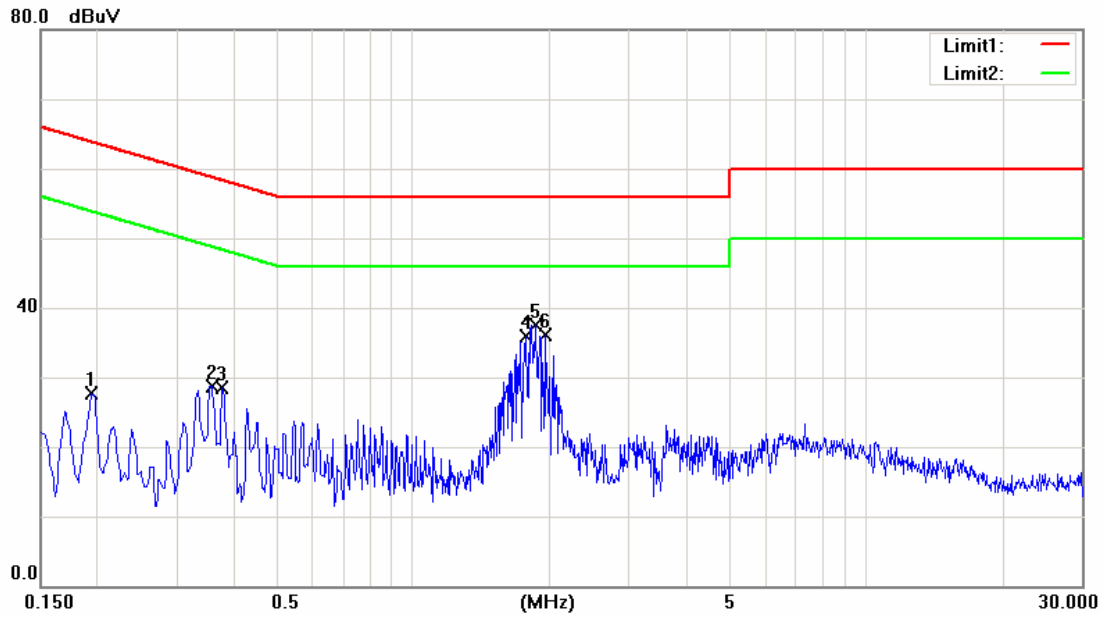

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1940	10.85	-0.55	9.60	20.45	9.05	63.86	53.86	-43.41	-44.81	Pass
2	0.3580	14.29	2.36	9.61	23.90	11.97	58.77	48.77	-34.87	-36.80	Pass
3	0.3780	13.54	1.85	9.61	23.15	11.46	58.32	48.32	-35.17	-36.86	Pass
4	1.7740	21.46	14.70	9.68	31.14	24.38	56.00	46.00	-24.86	-21.62	Pass
5	1.8660	22.87	14.67	9.68	32.55	24.35	56.00	46.00	-23.45	-21.65	Pass
6	1.9580	23.64	12.12	9.69	33.33	21.81	56.00	46.00	-22.67	-24.19	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	1	Date:	09/17/2014
		Test By:	Eric Ou Yang
Description:	Adapter Model: AD2015F21		

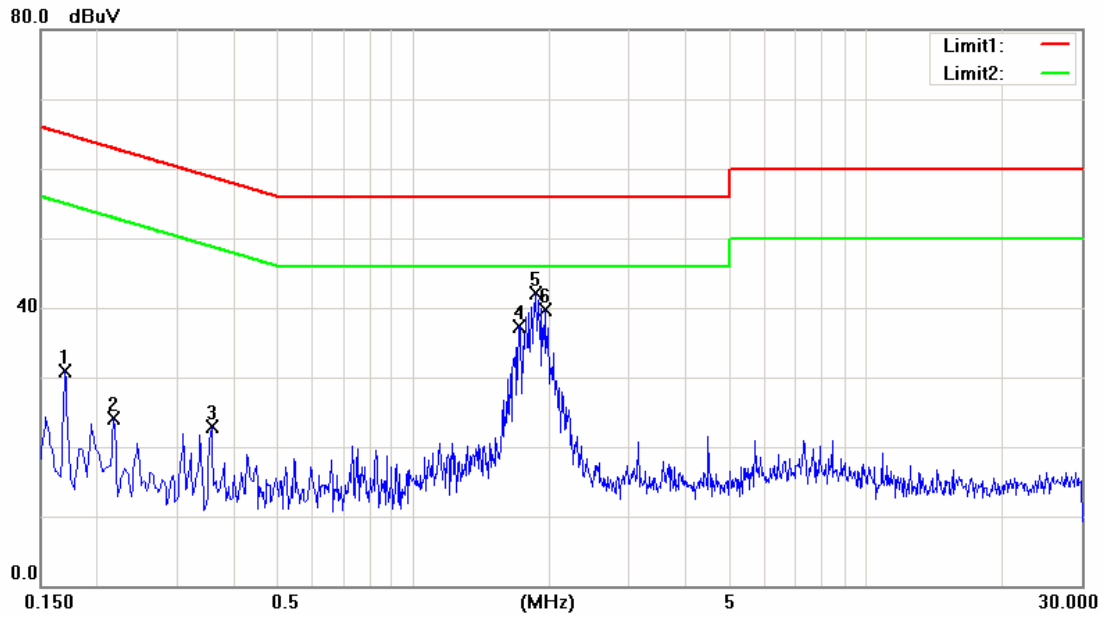

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1700	13.18	4.67	9.60	22.78	14.27	64.96	54.96	-42.18	-40.69	Pass
2	0.2180	8.90	4.78	9.60	18.50	14.38	62.89	52.89	-44.39	-38.51	Pass
3	0.3580	5.68	-2.01	9.61	15.29	7.60	58.77	48.77	-43.48	-41.17	Pass
4	1.7100	24.23	14.71	9.69	33.92	24.40	56.00	46.00	-22.08	-21.60	Pass
5	1.8660	29.83	18.88	9.69	39.52	28.57	56.00	46.00	-16.48	-17.43	Pass
6	1.9580	27.64	15.74	9.70	37.34	25.44	56.00	46.00	-18.66	-20.56	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	1	Date:	09/17/2014
		Test By:	Eric Ou Yang
Description:	Adapter Model: MU05BM050100-A1		

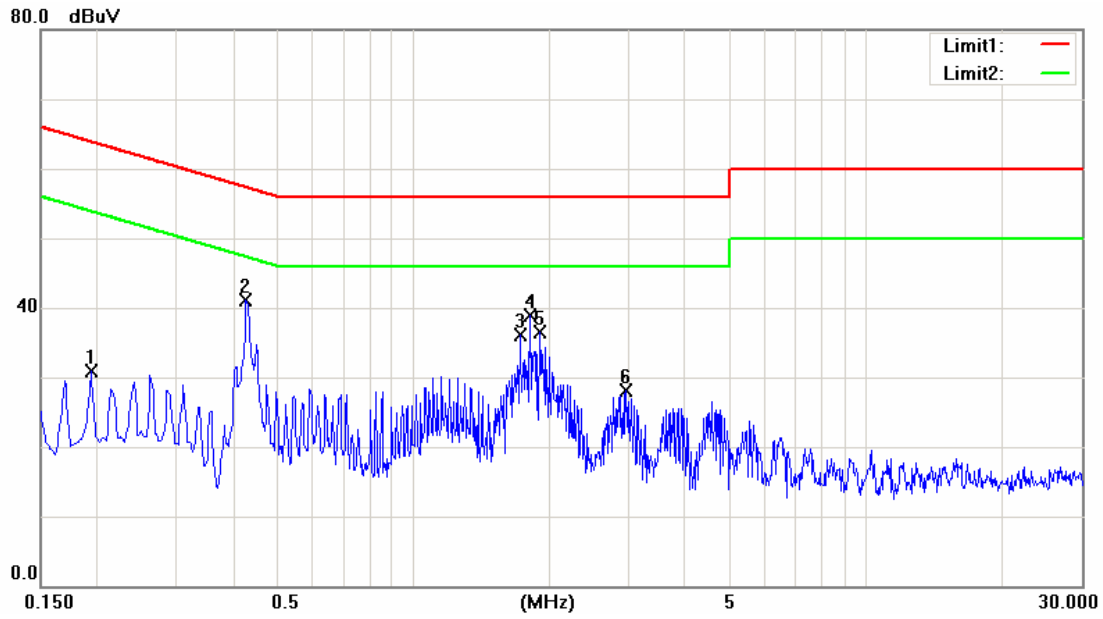

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1940	13.51	3.01	9.60	23.11	12.61	63.86	53.86	-40.75	-41.25	Pass
2	0.4260	27.69	16.73	9.61	37.30	26.34	57.33	47.33	-20.03	-20.99	Pass
3	1.7220	20.63	12.55	9.68	30.31	22.23	56.00	46.00	-25.69	-23.77	Pass
4	1.8140	25.42	15.45	9.68	35.10	25.13	56.00	46.00	-20.90	-20.87	Pass
5	1.9060	24.77	14.12	9.69	34.46	23.81	56.00	46.00	-21.54	-22.19	Pass
6	2.9580	11.53	1.61	9.73	21.26	11.34	56.00	46.00	-34.74	-34.66	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	1	Date:	09/17/2014
		Test By:	Eric Ou Yang
Description:	Adapter Model: MU05BM050100-A1		

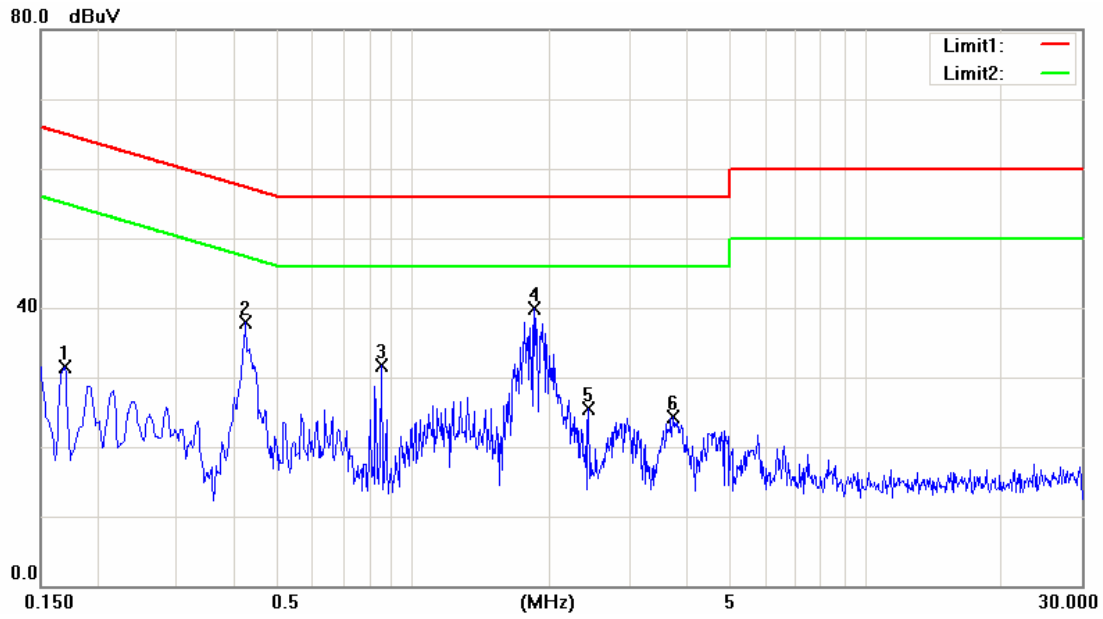

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1700	14.44	5.63	9.60	24.04	15.23	64.96	54.96	-40.92	-39.73	Pass
2	0.4260	23.69	14.41	9.61	33.30	24.02	57.33	47.33	-24.03	-23.31	Pass
3	0.8500	12.93	-1.52	9.64	22.57	8.12	56.00	46.00	-33.43	-37.88	Pass
4	1.8580	25.58	16.35	9.69	35.27	26.04	56.00	46.00	-20.73	-19.96	Pass
5	2.4420	4.41	-2.36	9.73	14.14	7.37	56.00	46.00	-41.86	-38.63	Pass
6	3.7500	7.72	-0.87	9.79	17.51	8.92	56.00	46.00	-38.49	-37.08	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5 Radiated Emission Measurement

5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

5.2. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/10/2014	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/10/2014	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2014	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2014	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/22/2014	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/11/2014	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	07/02/2014	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2012	(3)
Test Site	ATL	TE01	888001	08/28/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.
Note: N.C.R. = No Calibration Request.

5.3. Setup

Below 1GHz

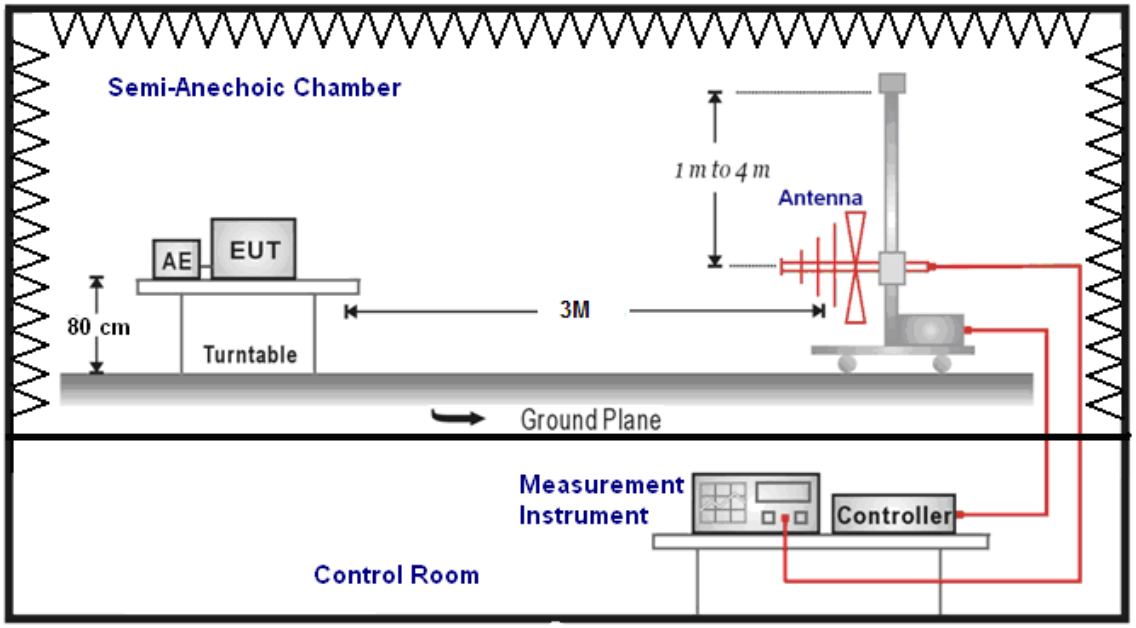

Above 1GHz

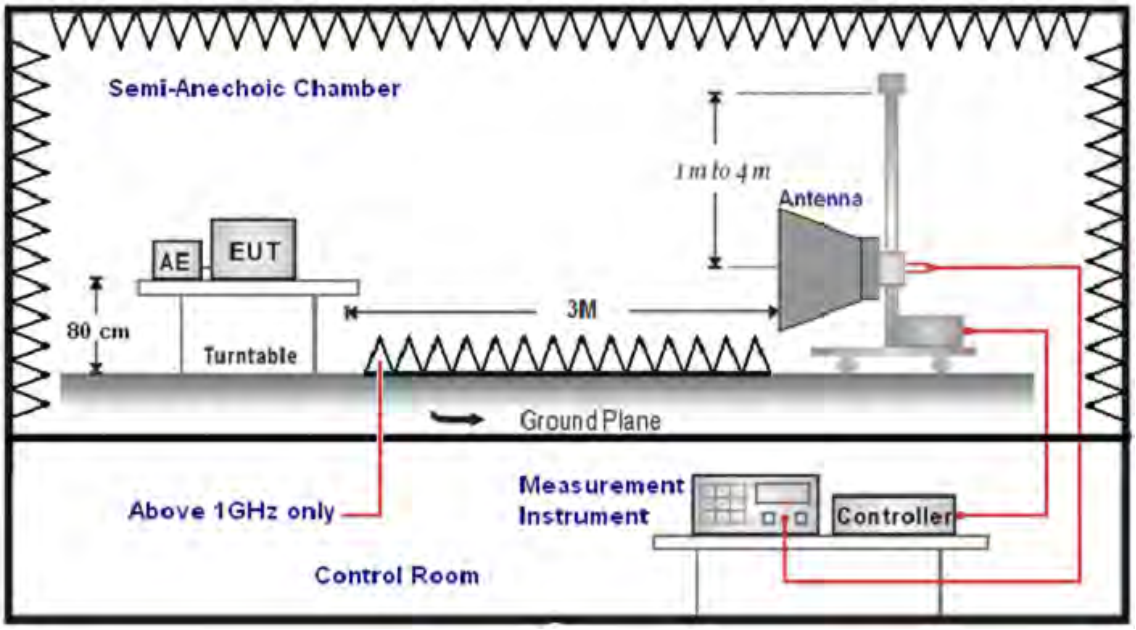

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on tree orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro colts per meter (dBuV/m).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)
FI= Reading of the field intensity.
AF= Antenna factor.
CL= Cable loss.
P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)
The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:
(a) For fundamental frequency : Transmitter Output < +30dBm
(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5. Test Result

Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	1	Date:	09/24/2014
Description:	Adapter Model: AD2015F21	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
171.0000	44.99	-12.23	32.76	43.50	-10.74	QP	H
309.5000	37.68	-10.09	27.59	46.00	-18.41	QP	H
419.5000	33.34	-7.78	25.56	46.00	-20.44	QP	H
515.5000	32.64	-6.03	26.61	46.00	-19.39	QP	H
661.5000	31.63	-3.07	28.56	46.00	-17.44	QP	H
780.0000	30.86	-0.65	30.21	46.00	-15.79	QP	H
134.5000	41.84	-12.86	28.98	43.50	-14.52	QP	V
246.5000	43.82	-12.22	31.60	46.00	-14.40	QP	V
358.0000	42.13	-9.19	32.94	46.00	-13.06	QP	V
508.0000	38.02	-6.16	31.86	46.00	-14.14	QP	V
584.0000	32.94	-4.48	28.46	46.00	-17.54	QP	V
852.0000	26.59	0.63	27.22	46.00	-18.78	QP	V

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	1	Date:	09/24/2014
Description:	Adapter Model: MU05BM050100-A1	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
167.0000	48.00	-12.03	35.97	43.50	-7.53	QP	H
299.0000	40.92	-10.26	30.66	46.00	-15.34	QP	H
451.0000	32.81	-6.99	25.82	46.00	-20.18	QP	H
572.5000	32.45	-4.82	27.63	46.00	-18.37	QP	H
720.0000	32.05	-1.92	30.13	46.00	-15.87	QP	H
799.5000	32.87	-0.25	32.62	46.00	-13.38	QP	H
129.5000	43.46	-13.39	30.07	43.50	-13.43	QP	V
258.0000	44.42	-11.84	32.58	46.00	-13.42	QP	V
368.5000	43.20	-8.93	34.27	46.00	-11.73	QP	V
515.5000	39.37	-6.03	33.34	46.00	-12.66	QP	V
572.5000	33.69	-4.82	28.87	46.00	-17.13	QP	V
860.0000	28.43	0.78	29.21	46.00	-16.79	QP	V

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	09/18/2014
Frequency:	2412MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3009.000	38.64	-0.17	38.47	74.00	-35.53	peak	H
4824.000	43.42	5.03	48.45	74.00	-25.55	peak	H
6670.000	34.25	9.95	44.20	74.00	-29.80	peak	H
2974.000	36.14	-0.27	35.87	74.00	-38.13	peak	V
4824.000	55.50	5.03	60.53	74.00	-13.47	peak	V
4824.000	46.11	5.03	51.14	54.00	-2.86	AVG	V
6670.000	33.58	9.95	43.53	74.00	-30.47	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	09/18/2014
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	39.23	-0.14	39.09	74.00	-34.91	peak	H
4874.000	41.63	5.16	46.79	74.00	-27.21	peak	H
6719.000	34.40	10.09	44.49	74.00	-29.51	peak	H
2995.000	40.20	-0.22	39.98	74.00	-34.02	peak	V
4874.000	45.23	5.16	50.39	74.00	-23.61	peak	V
6635.000	33.27	9.86	43.13	74.00	-30.87	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	09/18/2014
Frequency:	2462MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	40.48	-0.14	40.34	74.00	-33.66	peak	H
4924.000	41.28	5.29	46.57	74.00	-27.43	peak	H
6698.000	34.15	10.03	44.18	74.00	-29.82	peak	H
3030.000	39.58	-0.11	39.47	74.00	-34.53	peak	V
4924.000	48.36	5.29	53.65	74.00	-20.35	peak	V
4924.000	46.95	5.29	52.24	54.00	-1.76	AVG	V
6719.000	33.79	10.09	43.88	74.00	-30.12	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	09/18/2014
Frequency:	2412MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	39.48	-0.11	39.37	74.00	-34.63	peak	H
4824.000	39.16	5.03	44.19	74.00	-29.81	peak	H
6698.000	33.46	10.03	43.49	74.00	-30.51	peak	H
2939.000	38.70	-0.36	38.34	74.00	-35.66	peak	V
4824.000	43.85	5.03	48.88	74.00	-25.12	peak	V
6677.000	33.64	9.97	43.61	74.00	-30.39	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	09/18/2014
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	37.36	-0.10	37.26	74.00	-36.74	peak	H
4874.000	38.74	5.16	43.90	74.00	-30.10	peak	H
6705.000	33.73	10.05	43.78	74.00	-30.22	peak	H
2995.000	40.28	-0.22	40.06	74.00	-33.94	peak	V
4874.000	44.26	5.16	49.42	74.00	-24.58	peak	V
6726.000	34.75	10.10	44.85	74.00	-29.15	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	09/18/2014
Frequency:	2462MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3009.000	38.31	-0.17	38.14	74.00	-35.86	peak	H
4563.000	35.02	4.36	39.38	74.00	-34.62	peak	H
6691.000	33.43	10.01	43.44	74.00	-30.56	peak	H
2967.000	38.46	-0.29	38.17	74.00	-35.83	peak	V
4924.000	45.14	5.29	50.43	74.00	-23.57	peak	V
6726.000	33.68	10.10	43.78	74.00	-30.22	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	09/18/2014
Frequency:	2412MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3009.000	38.51	-0.17	38.34	74.00	-35.66	peak	H
4577.000	34.80	4.39	39.19	74.00	-34.81	peak	H
6670.000	34.32	9.95	44.27	74.00	-29.73	peak	H
2974.000	37.39	-0.27	37.12	74.00	-36.88	peak	V
4577.000	34.52	4.39	38.91	74.00	-35.09	peak	V
6677.000	33.25	9.97	43.22	74.00	-30.78	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	09/18/2014
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	37.01	-0.10	36.91	74.00	-37.09	peak	H
4577.000	35.18	4.39	39.57	74.00	-34.43	peak	H
6698.000	33.54	10.03	43.57	74.00	-30.43	peak	H
3009.000	39.92	-0.17	39.75	74.00	-34.25	peak	V
4577.000	34.12	4.39	38.51	74.00	-35.49	peak	V
6691.000	32.56	10.01	42.57	74.00	-31.43	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	09/18/2014
Frequency:	2462MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	38.86	-0.10	38.76	74.00	-35.24	peak	H
4570.000	34.89	4.38	39.27	74.00	-34.73	peak	H
6649.000	34.73	9.90	44.63	74.00	-29.37	peak	H
2981.000	36.85	-0.25	36.60	74.00	-37.40	peak	V
4577.000	35.30	4.39	39.69	74.00	-34.31	peak	V
6705.000	35.15	10.05	45.20	74.00	-28.80	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	09/18/2014
Frequency:	2422MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3002.000	38.34	-0.20	38.14	74.00	-35.86	peak	H
4549.000	34.07	4.33	38.40	74.00	-35.60	peak	H
6719.000	33.74	10.09	43.83	74.00	-30.17	peak	H
2925.000	38.47	-0.39	38.08	74.00	-35.92	peak	V
4626.000	34.43	4.52	38.95	74.00	-35.05	peak	V
6698.000	33.73	10.03	43.76	74.00	-30.24	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	09/18/2014
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3051.000	37.52	-0.06	37.46	74.00	-36.54	peak	H
4654.000	34.75	4.60	39.35	74.00	-34.65	peak	H
6670.000	33.61	9.95	43.56	74.00	-30.44	peak	H
3002.000	39.70	-0.20	39.50	74.00	-34.50	peak	V
4598.000	35.02	4.45	39.47	74.00	-34.53	peak	V
6698.000	33.28	10.03	43.31	74.00	-30.69	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	09/18/2014
Frequency:	2452MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3002.000	35.69	-0.20	35.49	74.00	-38.51	peak	H
4570.000	34.19	4.38	38.57	74.00	-35.43	peak	H
6670.000	32.46	9.95	42.41	74.00	-31.59	peak	H
2981.000	37.80	-0.25	37.55	74.00	-36.45	peak	V
4570.000	34.79	4.38	39.17	74.00	-34.83	peak	V
6726.000	32.90	10.10	43.00	74.00	-31.00	peak	V

Standard:	RSS-Gen	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	6	Date:	09/18/2014
Modulation:	IEEE 802.11b	Test By:	Eric Ou Yang
Frequency:	2437MHz		

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/	Peak (dBuV/m)	AVG. (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3065.000	36.66	-0.01	36.65	74.00	54.00	-37.35	peak	H
4549.000	34.23	4.33	38.56	74.00	54.00	-35.44	peak	H
6670.000	33.50	9.95	43.45	74.00	54.00	-30.55	peak	H
2995.000	39.97	-0.22	39.75	74.00	54.00	-34.25	peak	V
4626.000	34.60	4.52	39.12	74.00	54.00	-34.88	peak	V
6726.000	33.18	10.10	43.28	74.00	54.00	-30.72	peak	V

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

6.2. Test Setup

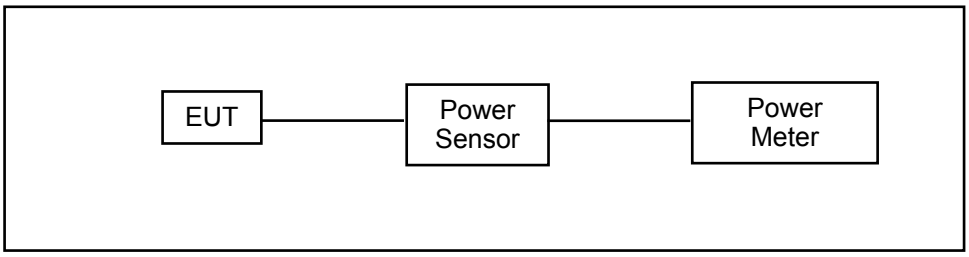

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Power Sensor	Anritsu	MA2411B	1126022	08/21/2014	(1)
Power Meter	Anritsu	ML2495A	1135009	08/21/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.
Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

6.5. Test Result

Model Number	AC785S-500									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 2: IEEE 802.11b Link Mode									
Date of Test	09/18/2014					Test Site		TE05		
Frequency (MHz)	Data Rate	Ant-1				Ant-2				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	1M	6.81	0.005	9.59	0.009	7.46	0.006	10.70	0.012	< 30
2437		6.75	0.005	9.38	0.009	7.28	0.005	10.14	0.010	< 30
2462		7.14	0.005	9.82	0.010	6.98	0.005	9.85	0.010	< 30
2437	2M	6.63	0.005	9.15	0.008	7.25	0.005	10.16	0.010	< 30
2437	5.5M	6.58	0.005	6.23	0.004	7.33	0.005	10.21	0.010	< 30
2437	11M	6.51	0.004	6.14	0.004	7.37	0.005	10.23	0.011	< 30

Frequency (MHz)	Data Rate	Ant- 1+2				Limit (dBm)
		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	
2412	1M	10.16	0.010	**13.19**	**0.021**	< 30
2437		10.03	0.010	12.79	0.019	< 30
2462		10.07	0.010	12.85	0.019	< 30
2437	2M	9.96	0.010	12.69	0.019	< 30
2437	5.5M	9.98	0.010	11.67	0.015	< 30
2437	11M	9.97	0.010	11.66	0.015	< 30

Model Number	AC785S-500									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 3: IEEE 802.11g Link Mode									
Date of Test	09/18/2014					Test Site		TE05		
Frequency (MHz)	Data Rate	Ant-1				Ant-2				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	6M	7.97	0.006	17.49	0.056	7.87	0.006	17.73	0.059	< 30
2437		7.67	0.006	17.20	0.052	8.38	0.007	18.18	0.066	< 30
2462		7.73	0.006	17.08	0.051	7.84	0.006	17.57	0.057	< 30
2437	9M	7.65	0.006	17.17	0.052	8.31	0.007	18.14	0.065	< 30
2437	12M	7.59	0.006	17.10	0.051	8.25	0.007	18.09	0.064	< 30
2437	18M	7.56	0.006	17.07	0.051	8.12	0.006	18.06	0.064	< 30
2437	24M	7.53	0.006	17.03	0.050	8.05	0.006	18.02	0.063	< 30
2437	36M	7.45	0.006	16.99	0.050	7.99	0.006	17.97	0.063	< 30
2437	48M	7.42	0.006	16.96	0.050	7.88	0.006	17.92	0.062	< 30
2437	54M	7.36	0.005	16.87	0.049	7.85	0.006	17.86	0.061	< 30

Frequency (MHz)	Data Rate	Ant- 1+2				Limit (dBm)
		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	
2412	6M	10.93	0.012	20.62	0.115	< 30
2437		11.05	0.013	**20.73**	**0.118**	< 30
2462		10.80	0.012	20.34	0.108	< 30
2437	9M	11.00	0.013	20.69	0.117	< 30
2437	12M	10.94	0.012	20.63	0.116	< 30
2437	18M	10.86	0.012	20.60	0.115	< 30
2437	24M	10.81	0.012	20.56	0.114	< 30
2437	36M	10.74	0.012	20.52	0.113	< 30
2437	48M	10.67	0.012	20.48	0.112	< 30
2437	54M	10.62	0.012	20.40	0.110	< 30

Model Number	AC785S-500									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode									
Date of Test	09/18/2014					Test Site	TE05			
Frequency (MHz)	Data Rate	Ant-1				Ant-2				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	13M	7.89	0.006	17.67	0.058	8.12	0.006	17.92	0.062	< 30
2437		7.78	0.006	17.44	0.055	8.49	0.007	18.18	0.066	< 30
2462		7.59	0.006	17.29	0.054	7.86	0.006	17.56	0.057	< 30
2437	26M	7.76	0.006	16.52	0.045	8.43	0.007	18.15	0.065	< 30
2437	39M	7.73	0.006	16.49	0.045	8.39	0.007	18.13	0.065	< 30
2437	52M	7.67	0.006	16.47	0.044	8.33	0.007	18.11	0.065	< 30
2437	78M	7.59	0.006	16.44	0.044	8.28	0.007	18.06	0.064	< 30
2437	104M	7.50	0.006	16.40	0.044	8.26	0.007	18.03	0.064	< 30
2437	117M	7.48	0.006	16.39	0.044	8.17	0.007	17.99	0.063	< 30
2437	130M	7.45	0.006	16.35	0.043	8.12	0.006	17.95	0.062	< 30

Frequency (MHz)	Data Rate	Ant- 1+2				Limit (dBm)
		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	
2412	13M	11.02	0.013	20.81	0.120	< 30
2437		11.16	0.013	**20.84**	**0.121**	< 30
2462		10.74	0.012	20.44	0.111	< 30
2437	26M	11.12	0.013	20.42	0.110	< 30
2437	39M	11.08	0.013	20.40	0.110	< 30
2437	52M	11.02	0.013	20.38	0.109	< 30
2437	78M	10.96	0.012	20.34	0.108	< 30
2437	104M	10.91	0.012	20.30	0.107	< 30
2437	117M	10.85	0.012	20.27	0.107	< 30
2437	130M	10.81	0.012	20.23	0.106	< 30

Model Number	AC785S-500									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode									
Date of Test	09/18/2014					Test Site		TE05		
Frequency (MHz)	Data Rate	Ant-1				Ant-2				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2422	27M	8.38	0.007	18.36	0.069	8.07	0.006	17.39	0.055	< 30
2437		8.59	0.007	18.57	0.072	8.77	0.008	17.69	0.059	< 30
2452		7.83	0.006	17.82	0.061	7.73	0.006	17.21	0.053	< 30
2437	54M	8.53	0.007	18.42	0.070	9.06	0.008	18.02	0.063	< 30
2437	81M	8.46	0.007	18.38	0.069	8.99	0.008	17.99	0.063	< 30
2437	108M	8.40	0.007	18.34	0.068	8.92	0.008	17.94	0.062	< 30
2437	162M	8.44	0.007	18.33	0.068	8.84	0.008	17.91	0.062	< 30
2437	216M	8.32	0.007	18.30	0.068	8.78	0.008	17.89	0.062	< 30
2437	243M	8.26	0.007	18.25	0.067	8.72	0.007	17.87	0.061	< 30
2437	270M	8.22	0.007	18.23	0.067	8.62	0.007	17.83	0.061	< 30

Frequency (MHz)	Data Rate	Ant- 1+2				Limit (dBm)
		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	
2422	27M	11.24	0.013	20.91	0.123	< 30
2437		11.69	0.015	21.16	0.131	< 30
2452		10.79	0.012	20.54	0.113	< 30
2437	54M	11.81	0.015	**21.23**	**0.133**	< 30
2437	81M	11.74	0.015	21.20	0.132	< 30
2437	108M	11.68	0.015	21.15	0.130	< 30
2437	162M	11.65	0.015	21.14	0.130	< 30
2437	216M	11.57	0.014	21.11	0.129	< 30
2437	243M	11.51	0.014	21.07	0.128	< 30
2437	270M	11.43	0.014	21.04	0.127	< 30

7 6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement

7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.
99 % Occupied Bandwidth: N/A

7.2. Test Setup

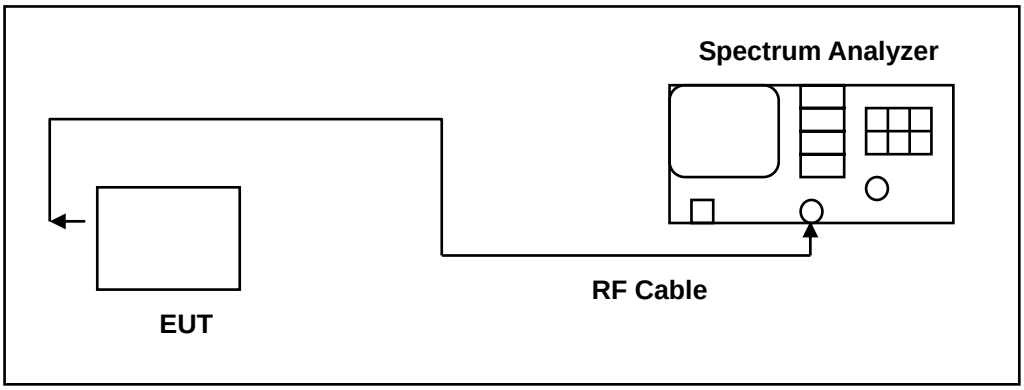

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

dRemark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.
Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT was setup to ANSI C63.4:2014; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.
6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.
The test was performed at 3 channels (Channel low, middle, high)
99 % Occupied Bandwidth: The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.
The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

7.5. Test Result

Model Number	AC785S-500					
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth					
Test Mode	Mode 2: IEEE 802.11b Link Mode					
Date of Test	09/18/2014				Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)		99 % Occupied Bandwidth (MHz)		6dB RF Bandwidth Limit (MHz)	
	Ant-1	Ant-2	Ant-1	Ant-2		
2412	7.213	7.613	12.7575	12.1987	> 0.500	
2437	7.129	7.178	12.4242	12.1480	> 0.500	
2462	6.640	6.690	12.1794	11.8417	> 0.500	

Model Number	AC785S-500					
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth					
Test Mode	Mode 3: IEEE 802.11g Link Mode					
Date of Test	09/18/2014				Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)		99 % Occupied Bandwidth (MHz)		6dB RF Bandwidth Limit (MHz)	
	Ant-1	Ant-2	Ant-1	Ant-2		
2412	16.439	16.437	17.3891	16.9723	> 0.500	
2437	16.431	16.157	17.4936	16.9545	> 0.500	
2462	15.767	15.788	17.1597	16.8008	> 0.500	

Model Number	AC785S-500					
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth					
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode					
Date of Test	09/18/2014				Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)		99 % Occupied Bandwidth (MHz)		6dB RF Bandwidth Limit (MHz)	
	Ant-1	Ant-2	Ant-1	Ant-2		
2412	17.756	17.694	18.2575	18.2135	> 0.500	
2437	17.743	16.470	18.2237	18.1315	> 0.500	
2462	17.666	16.413	18.0631	18.0214	> 0.500	

Model Number	AC785S-500					
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth					
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode					
Date of Test	09/18/2014				Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)		99 % Occupied Bandwidth (MHz)		6dB RF Bandwidth Limit (MHz)	
	Ant-1	Ant-2	Ant-1	Ant-2		
2422	35.122	35.213	36.8144	36.7834	> 0.500	
2437	35.523	35.805	37.2082	37.1947	> 0.500	
2452	35.140	35.482	37.1018	37.3469	> 0.500	

7.6. Test Graphs

6dB RF Bandwidth

Mode 2: IEEE 802.11b Link Mode _Ant-1	
2412	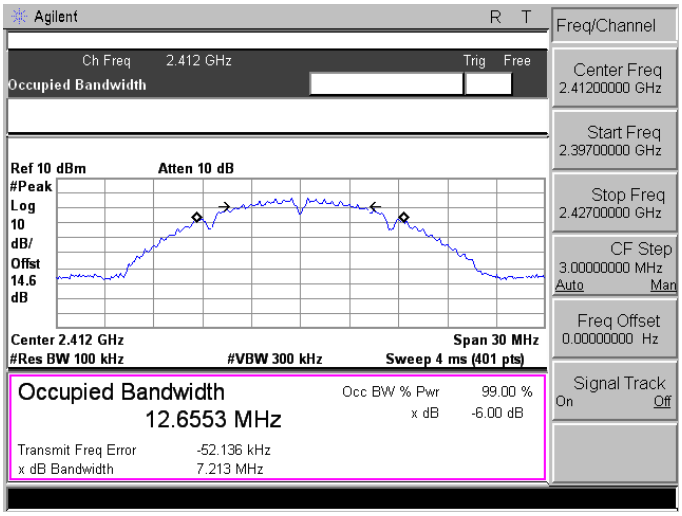
2437	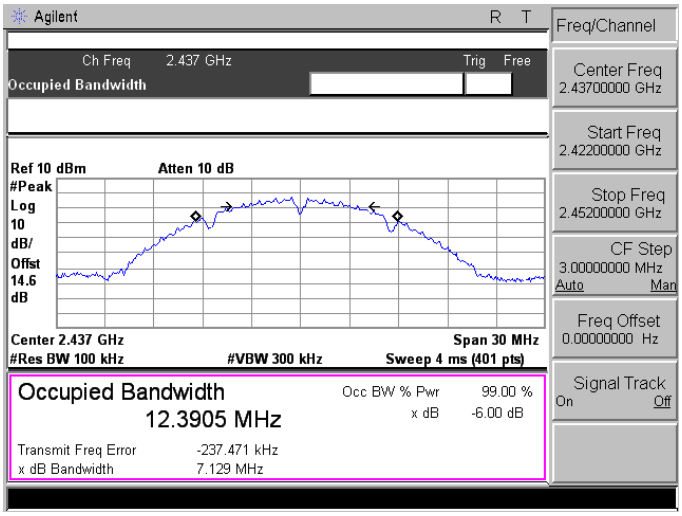
2462	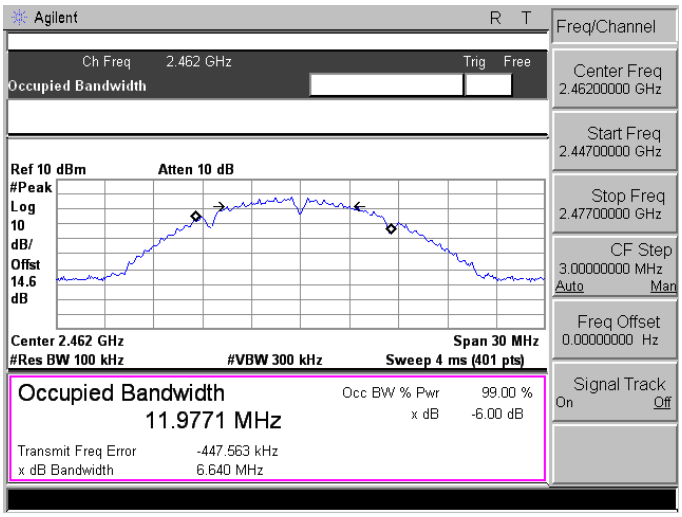

Mode 2: IEEE 802.11b Link Mode_Ant-2	
2412	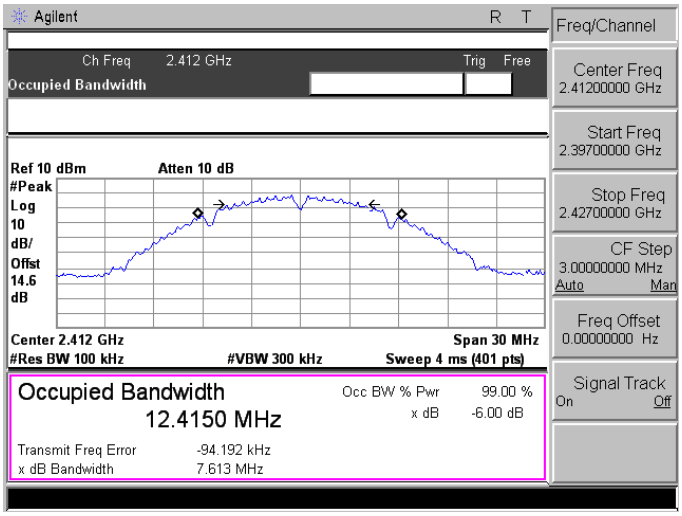
2437	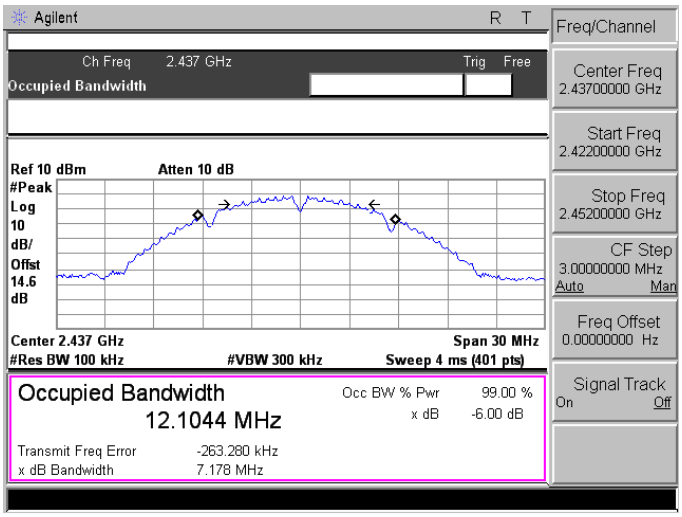
2462	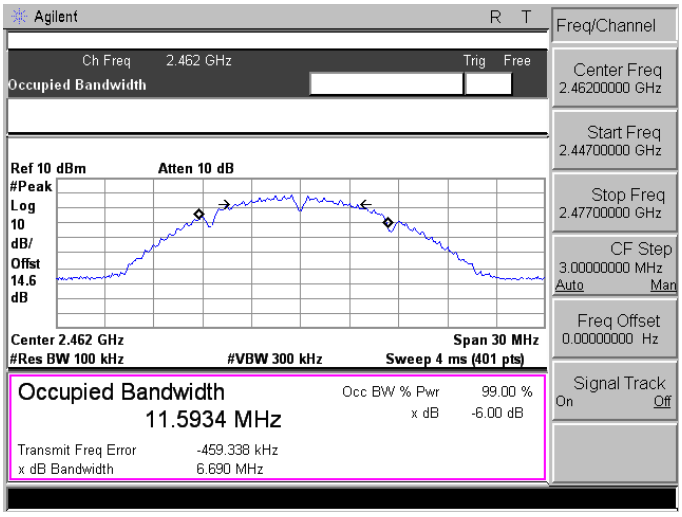

Mode 3: IEEE 802.11g Link Mode_Ant-1	
2412	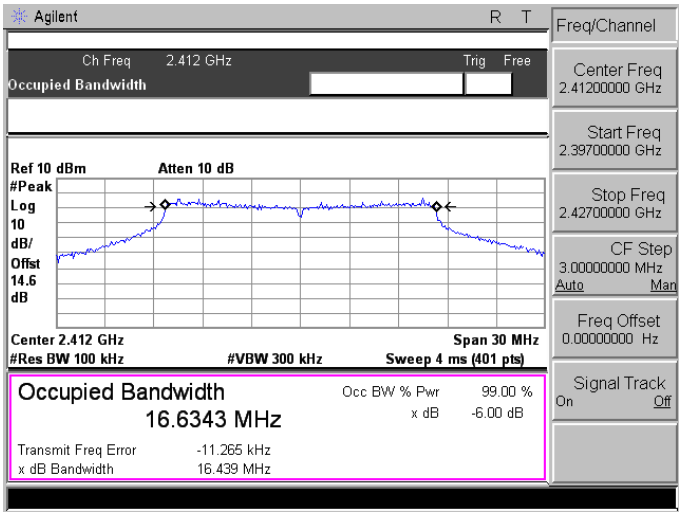
2437	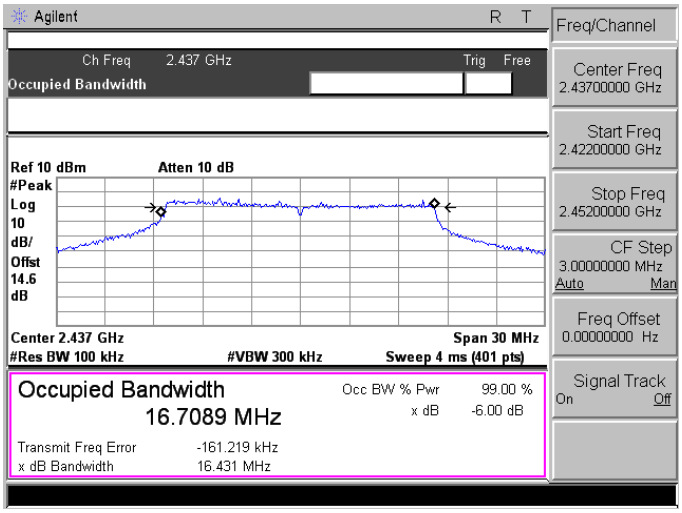
2462	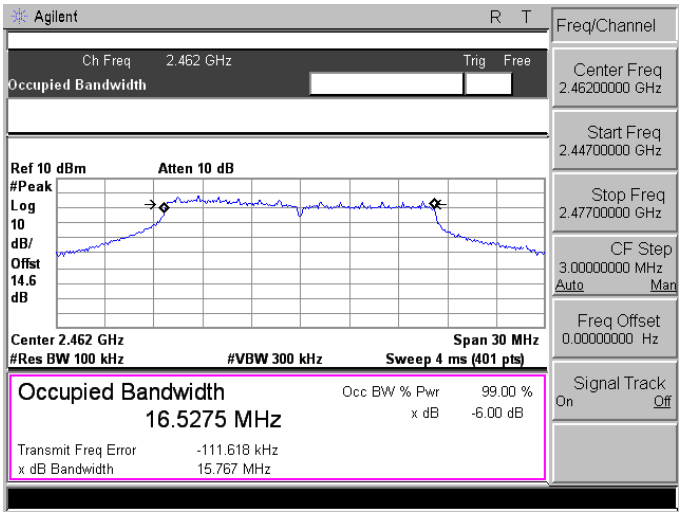

Mode 3: IEEE 802.11g Link Mode_ Ant-2	
2412	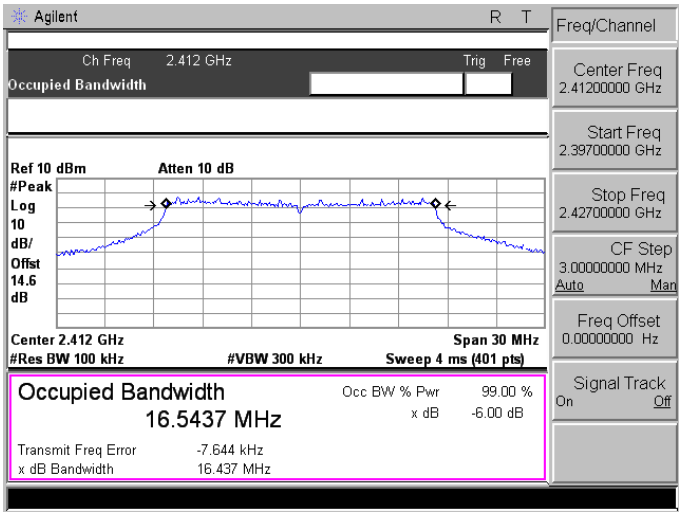
2437	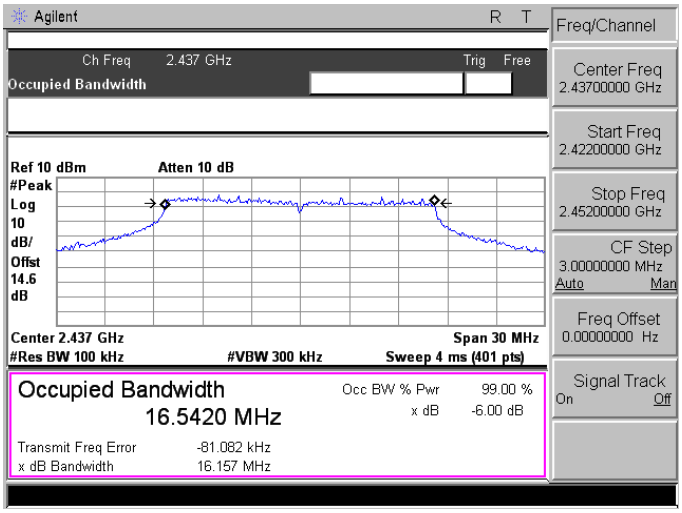
2462	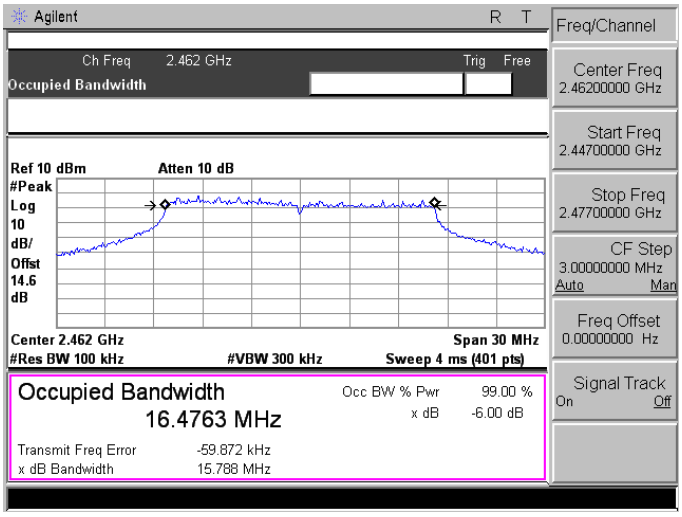

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ Ant-1	
2412	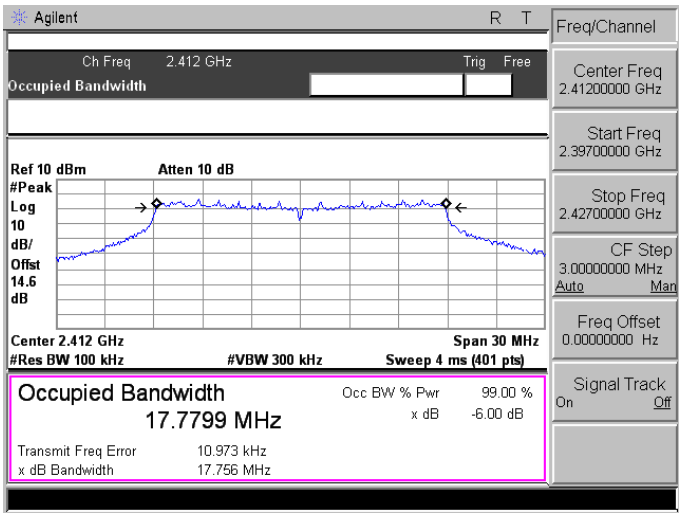
2437	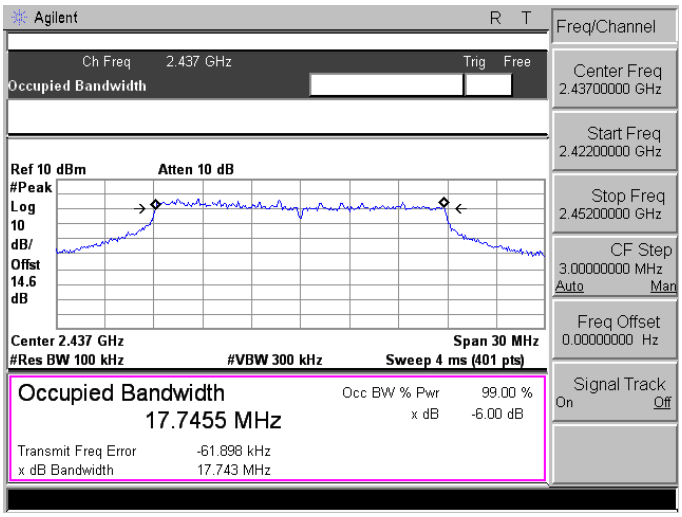
2462	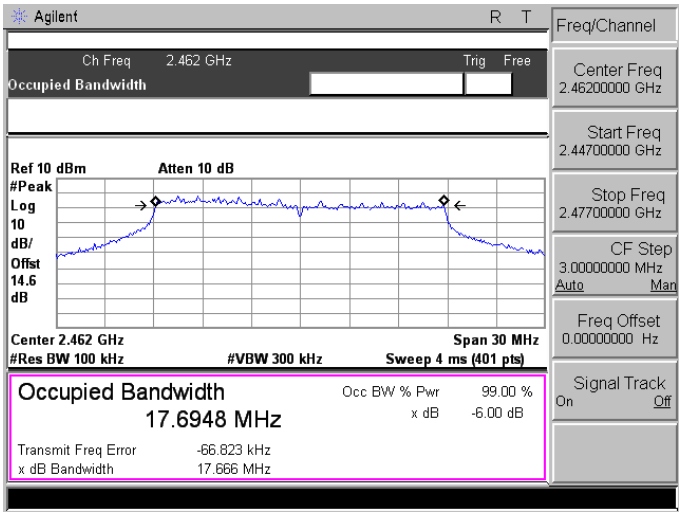

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ Ant-2	
2412	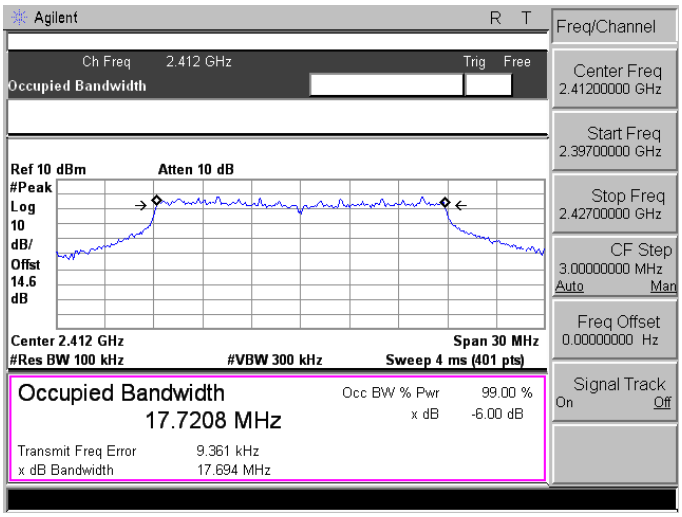
2437	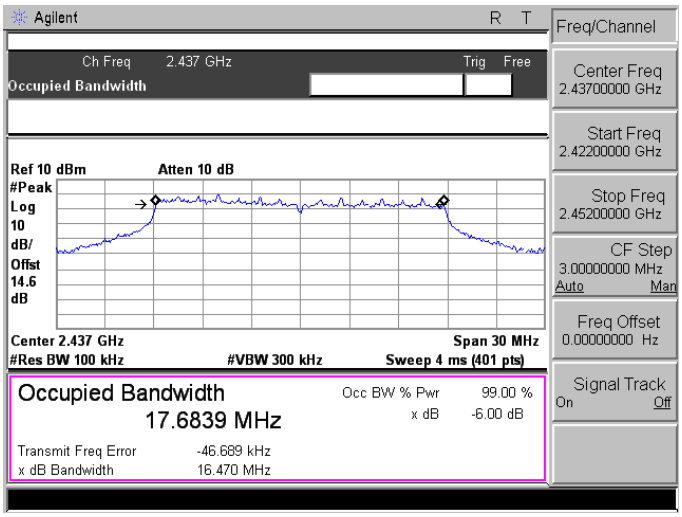
2462	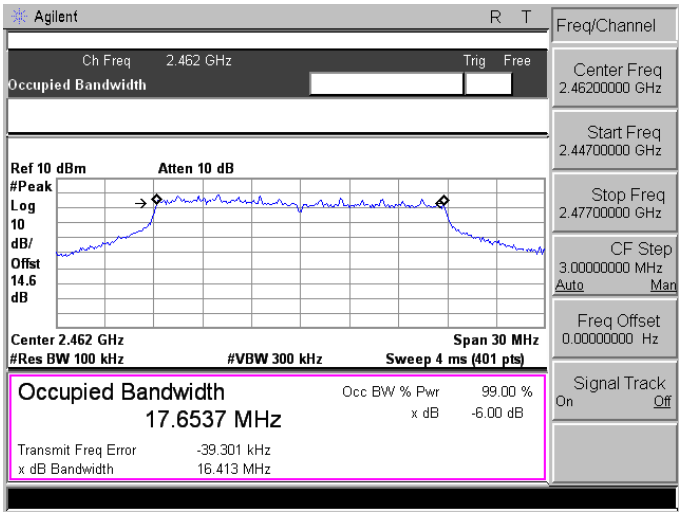

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ Ant-1	
2422	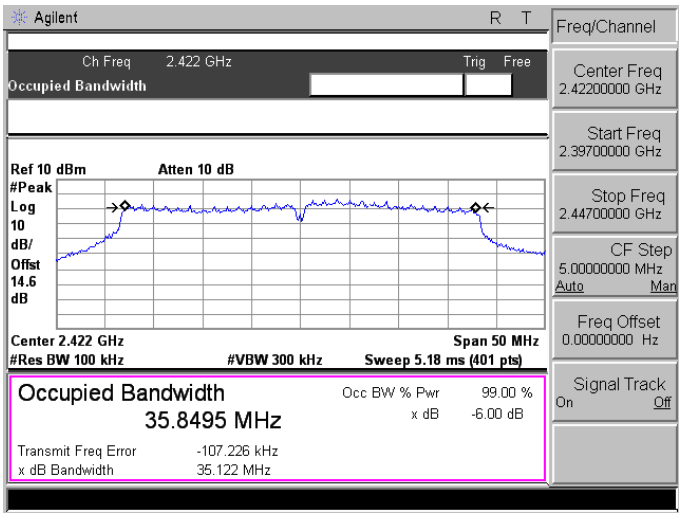
2437	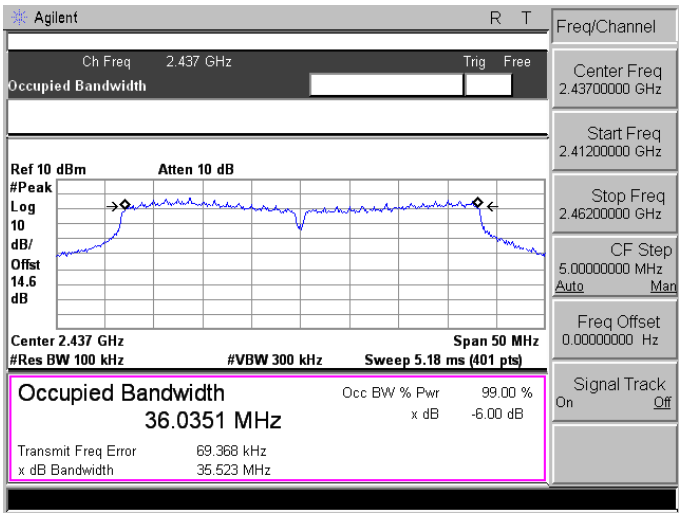
2452	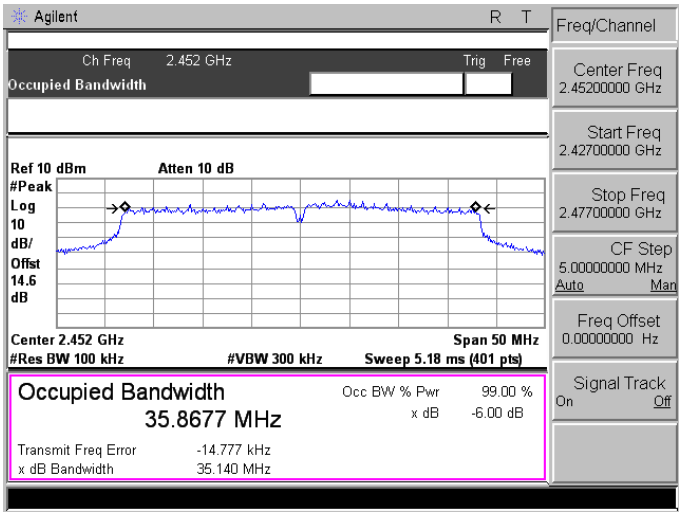

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_Ant-2	
2422	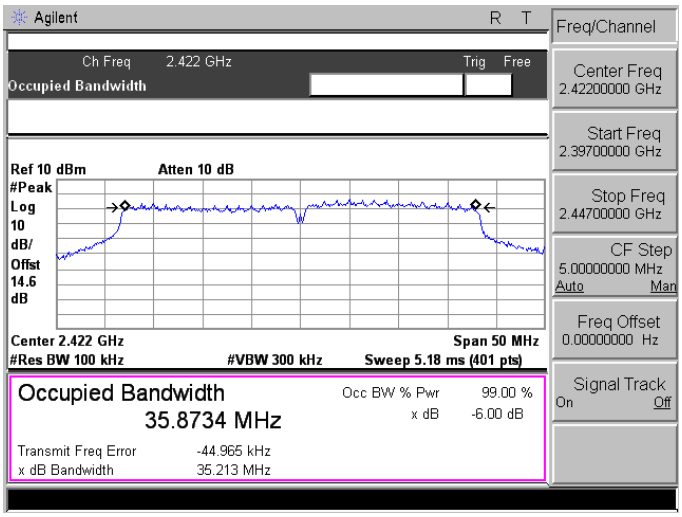
2437	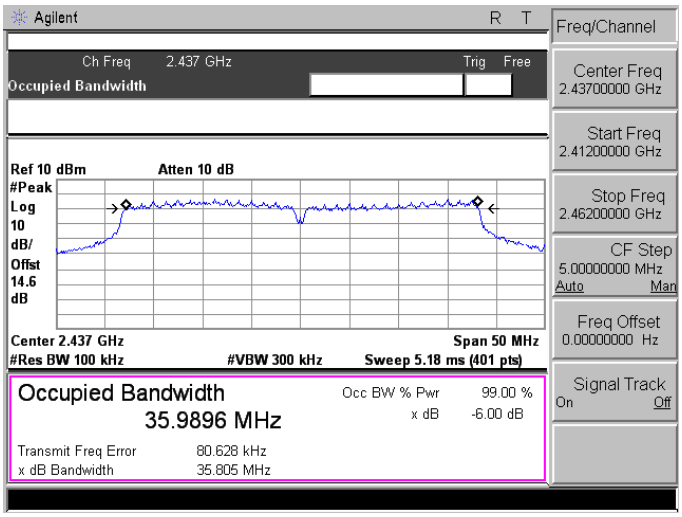
2452	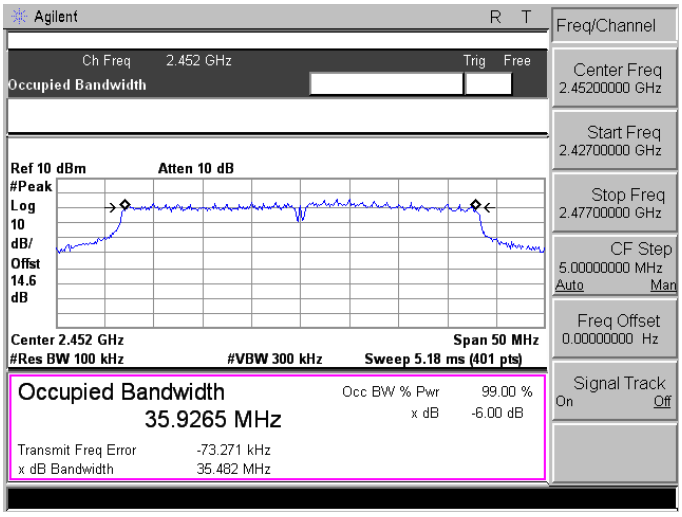

99 % Occupied Bandwidth

Mode 2: IEEE 802.11b Link Mode_Ant-1	
2412	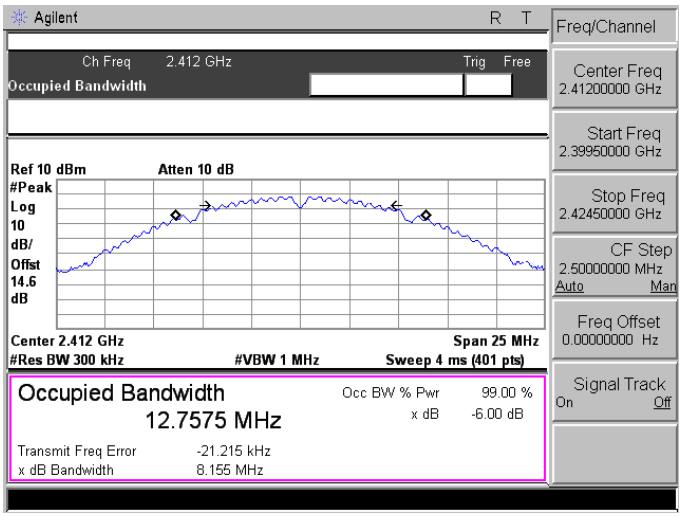
2437	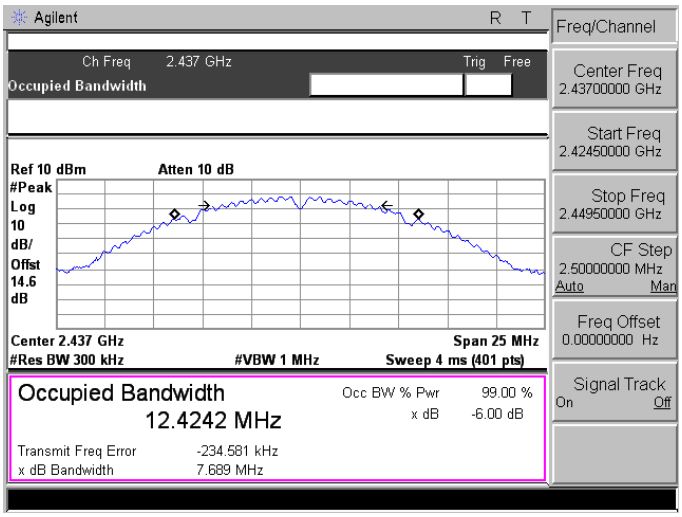
2462	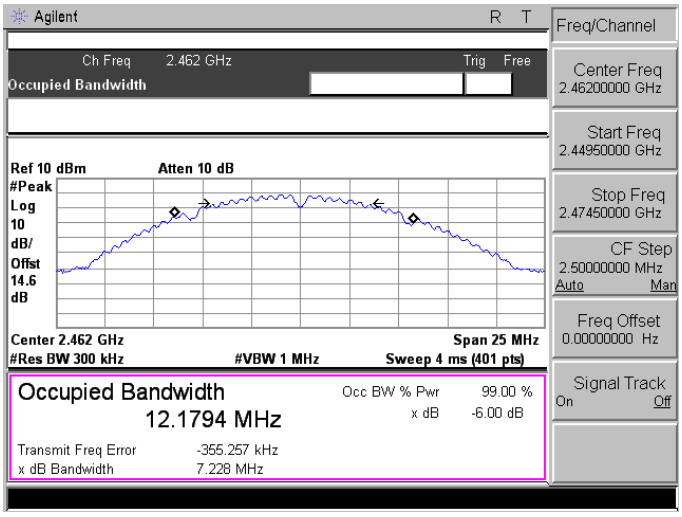

Mode 2: IEEE 802.11b Link Mode_Ant-2	
2412	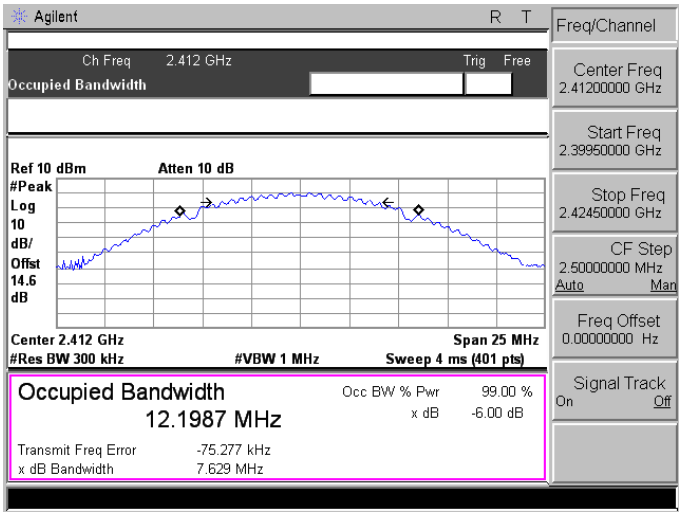
2437	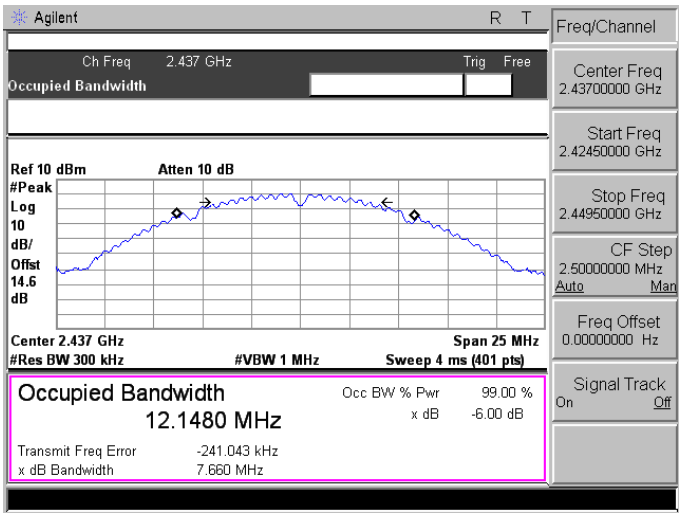
2462	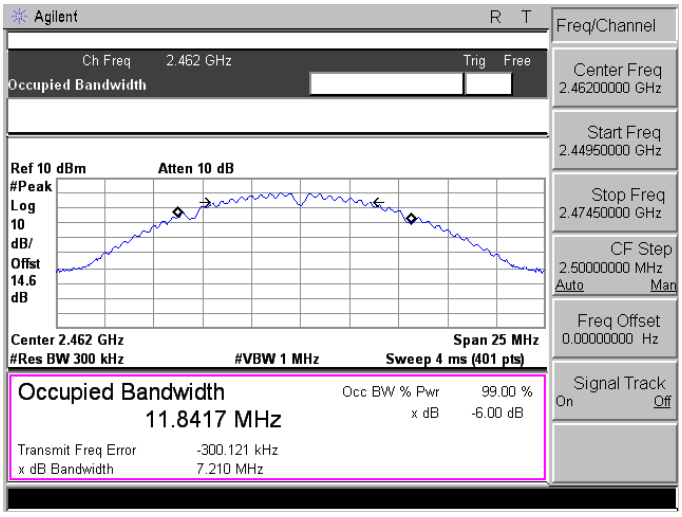

Mode 3: IEEE 802.11g Link Mode_Ant-1	
2412	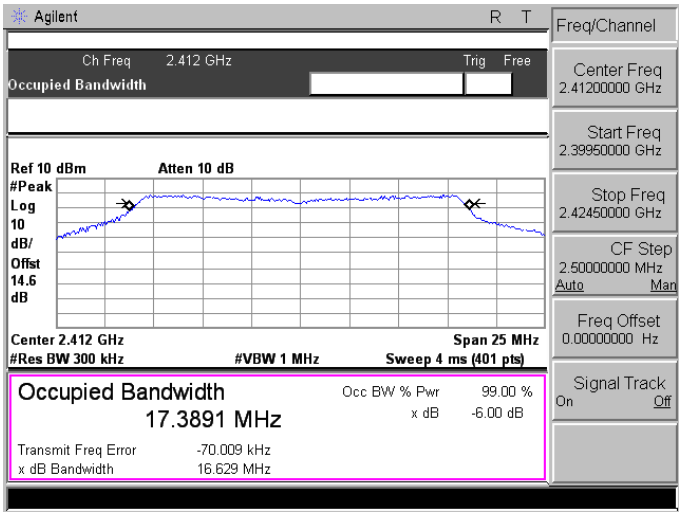
2437	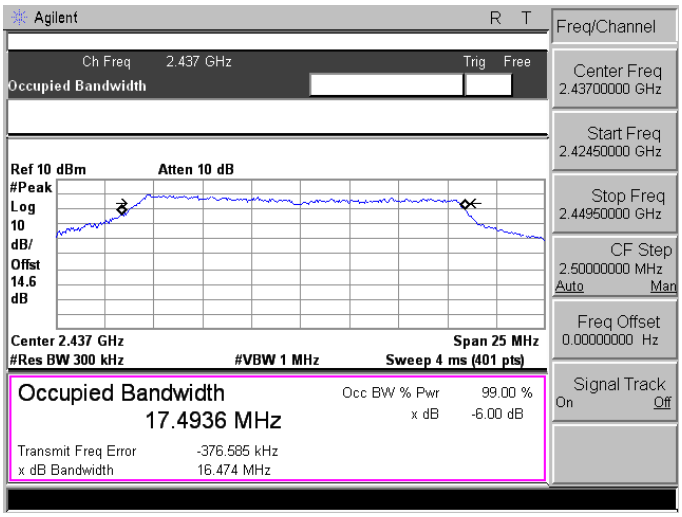
2462	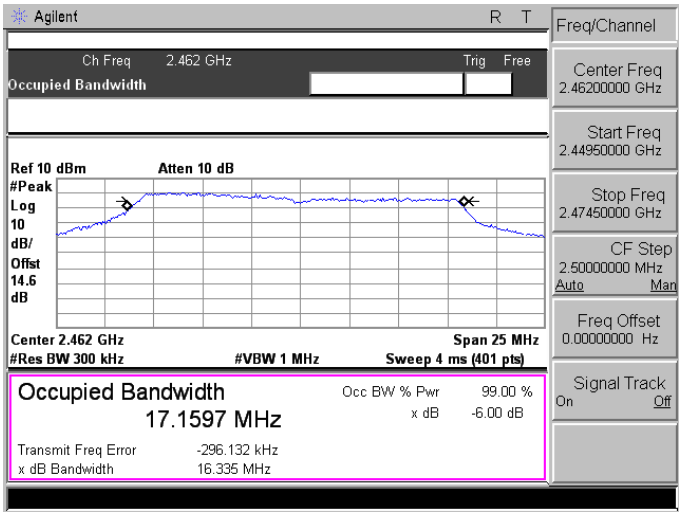

Mode 3: IEEE 802.11g Link Mode_ Ant-2	
2412	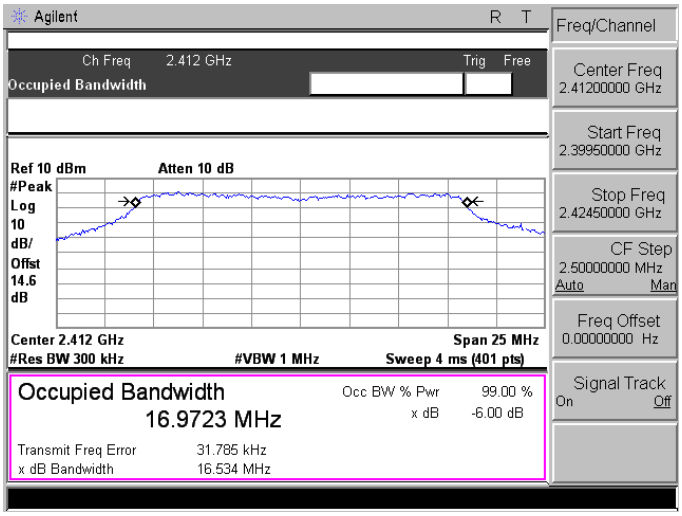
2437	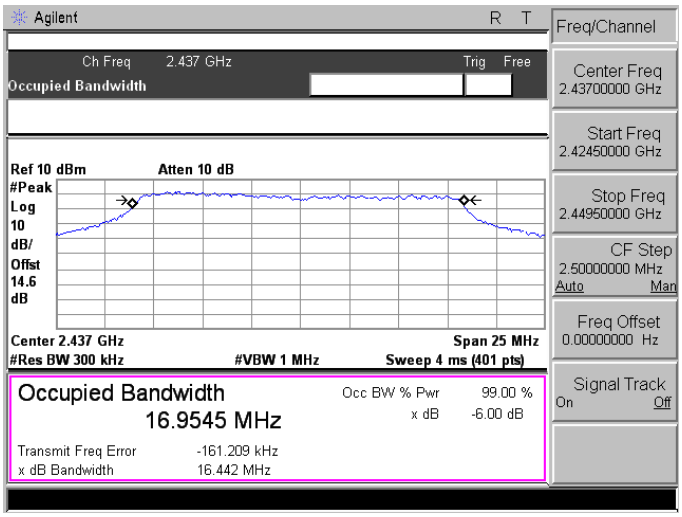
2462	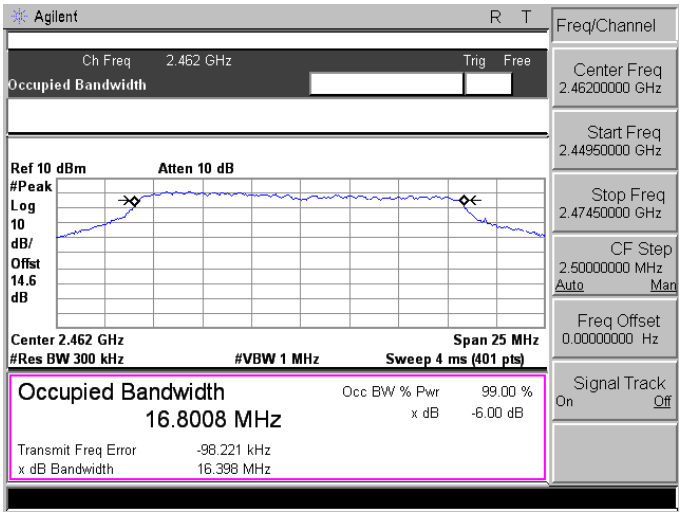

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_Ant-1	
2412	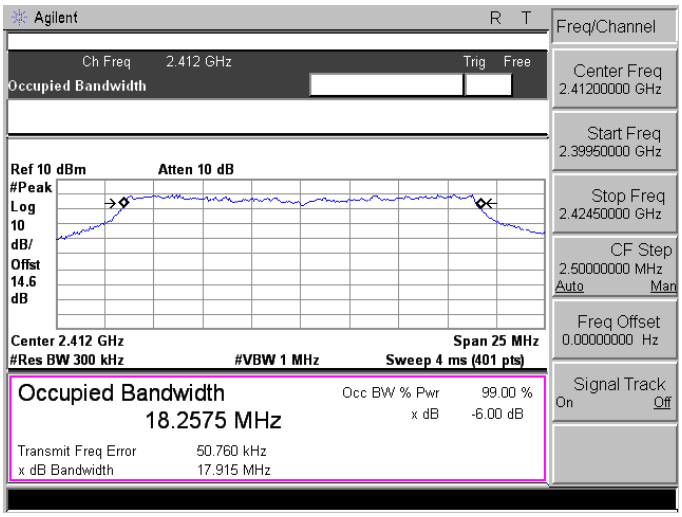
2437	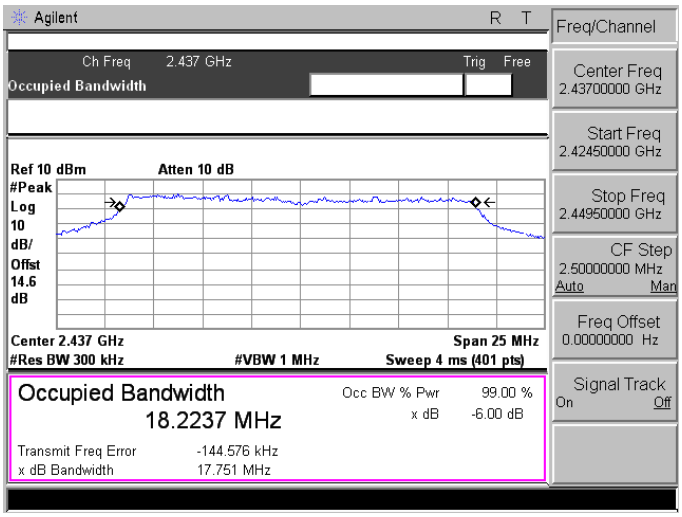
2462	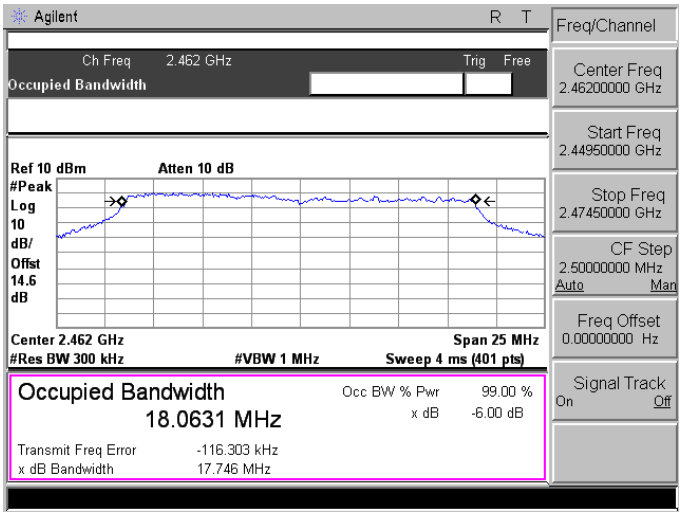

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_Ant-2	
2412	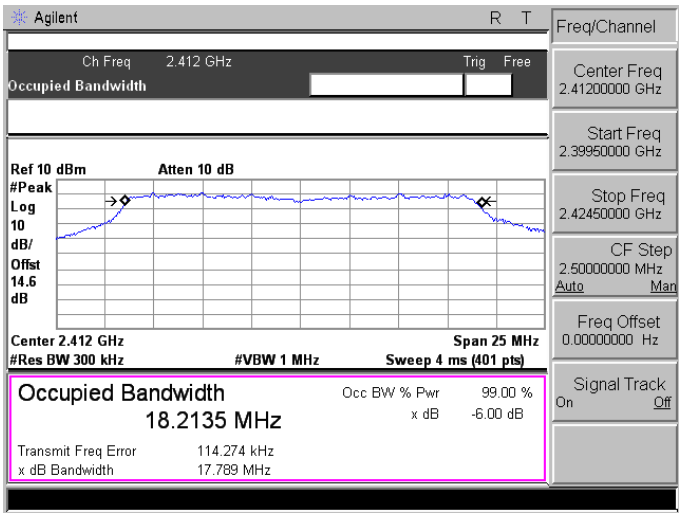
2437	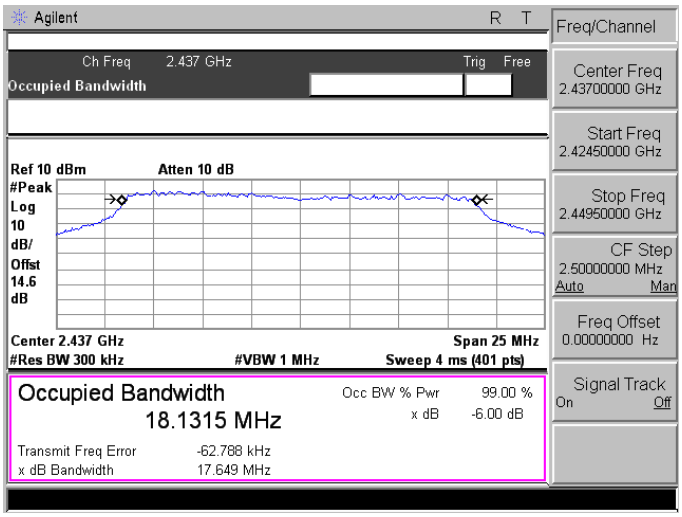
2462	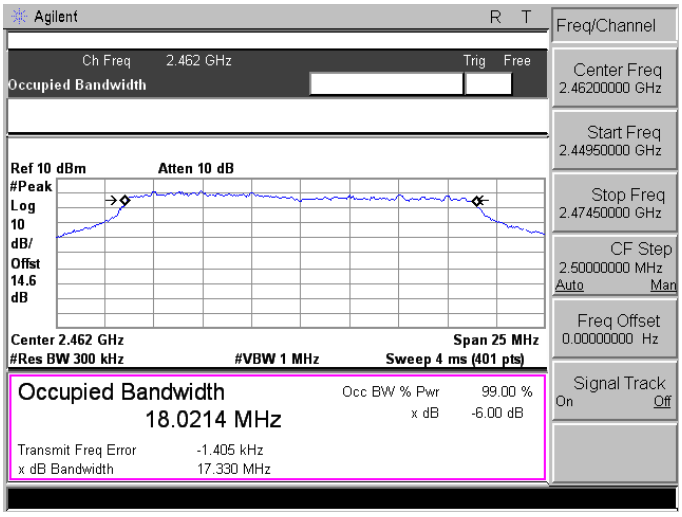

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_Ant-1	
2422	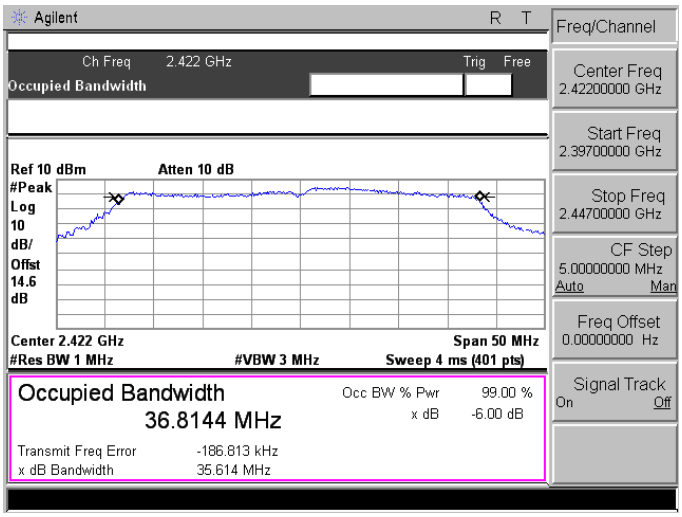
2437	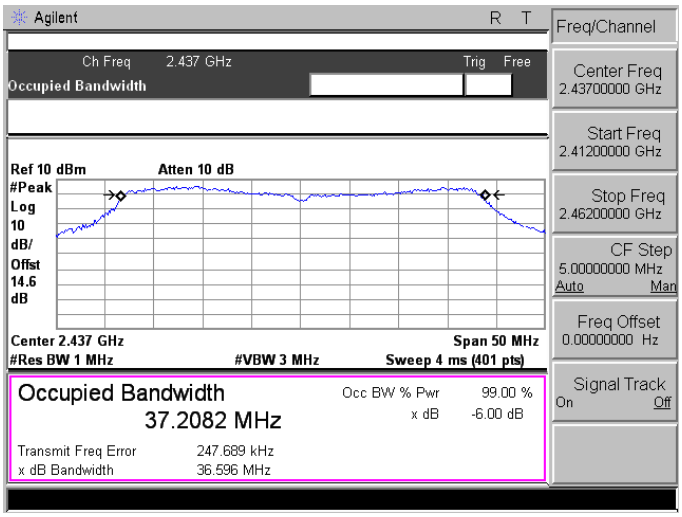
2452	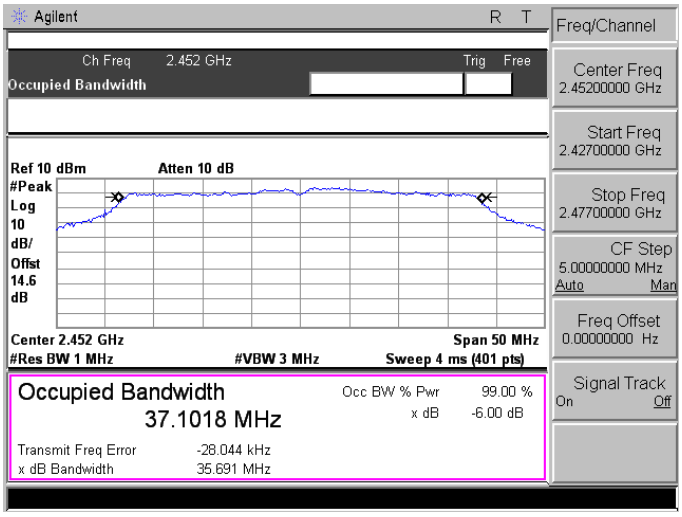

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ Ant-2	
2422	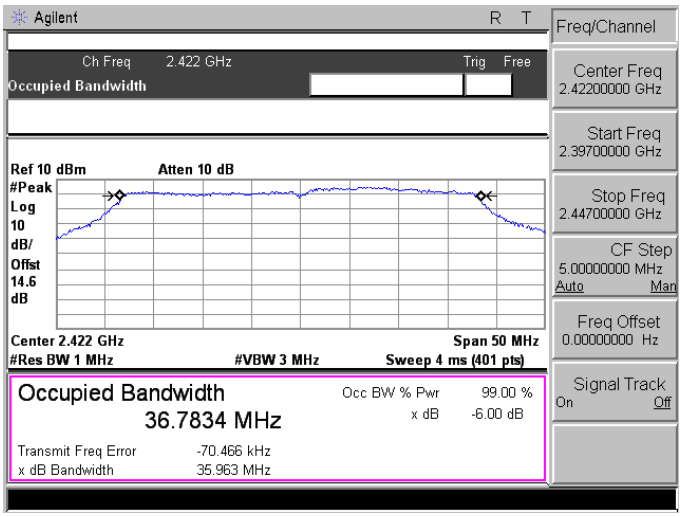
2437	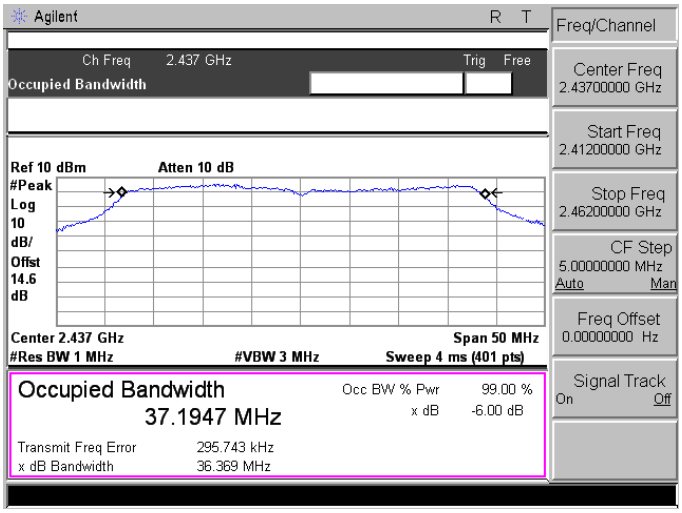
2452	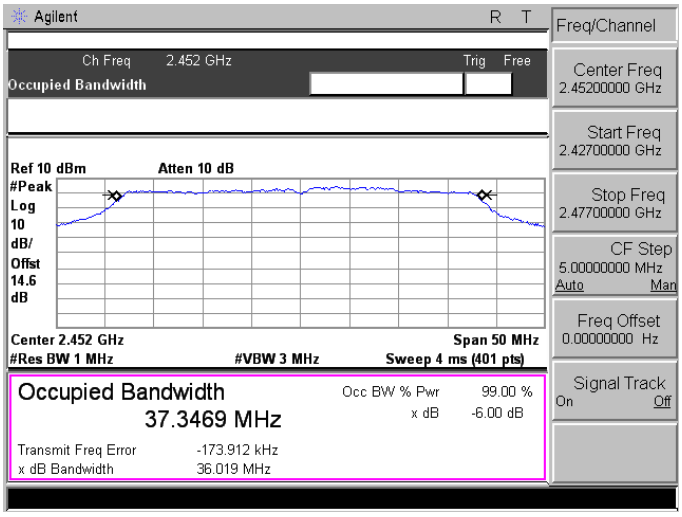

8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2. Test Setup

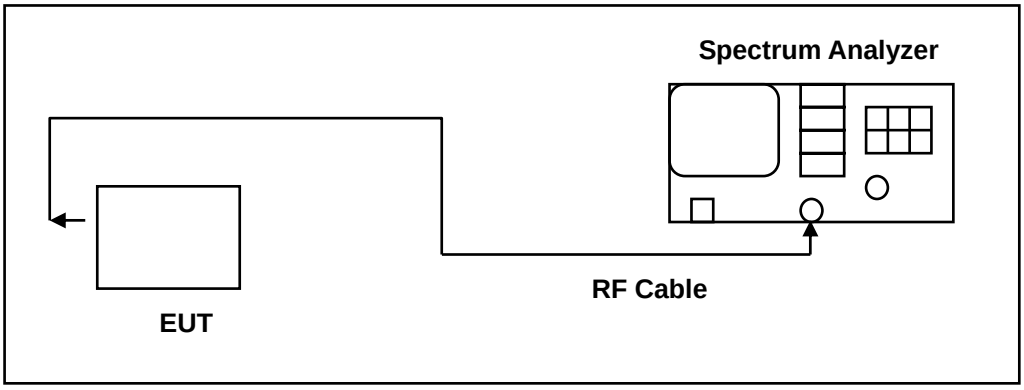

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.
Note: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT was setup to ANSI C63.4:2014; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
4. Set the VBW ≥ 3 × RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.5. Test Result

Model Number	AC785S-500			
Test Item	Maximum Power Density			
Test Mode	Mode 2: IEEE 802.11b Link Mode			
Date of Test	09/19/2014		Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)			Limit (dBm)
	Ant-1	Ant-2	Ant-1+2	
2412	-18.41	-16.37	-14.26	< 8
2437	-16.96	-16.31	-13.61	< 8
2462	-16.42	-15.77	-13.07	< 8

Model Number	AC785S-500			
Test Item	Maximum Power Density			
Test Mode	Mode 3: IEEE 802.11g Link Mode			
Date of Test	09/19/2014		Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)			Limit (dBm)
	Ant-1	Ant-2	Ant-1+2	
2412	-18.52	-18.06	-15.27	< 8
2437	-17.30	-17.82	-14.54	< 8
2462	-17.76	-19.48	-15.53	< 8

Model Number	AC785S-500			
Test Item	Maximum Power Density			
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode			
Date of Test	09/19/2014		Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)			Limit (dBm)
	Ant-1	Ant-2	Ant-1+2	
2412	-17.83	-17.54	-14.67	< 8
2437	-17.28	-15.96	-13.56	< 8
2462	-17.76	-17.20	-14.46	< 8

Model Number	AC785S-500			
Test Item	Maximum Power Density			
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode			
Date of Test	09/19/2014		Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)			Limit (dBm)
	Ant-1	Ant-2	Ant-1+2	
2422	-17.47	-13.49	-12.03	< 8
2437	-17.72	-14.46	-12.78	< 8
2452	-19.30	-12.85	-11.96	< 8

8.6. Test Graphs

Mode 2: IEEE 802.11b Link Mode_Ant1	
2412	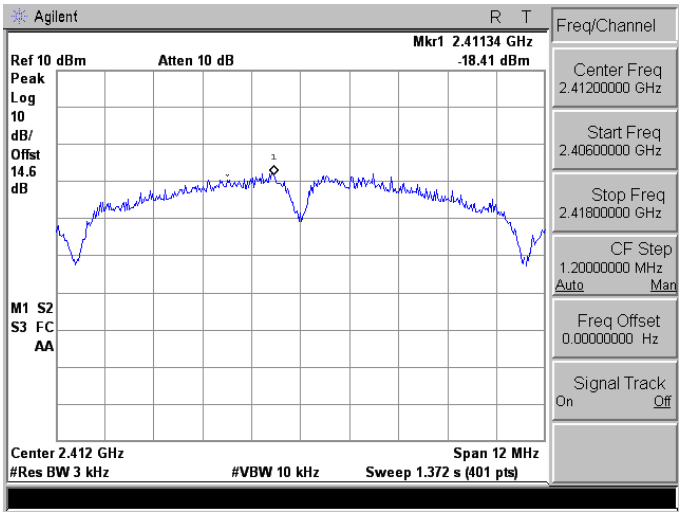
2437	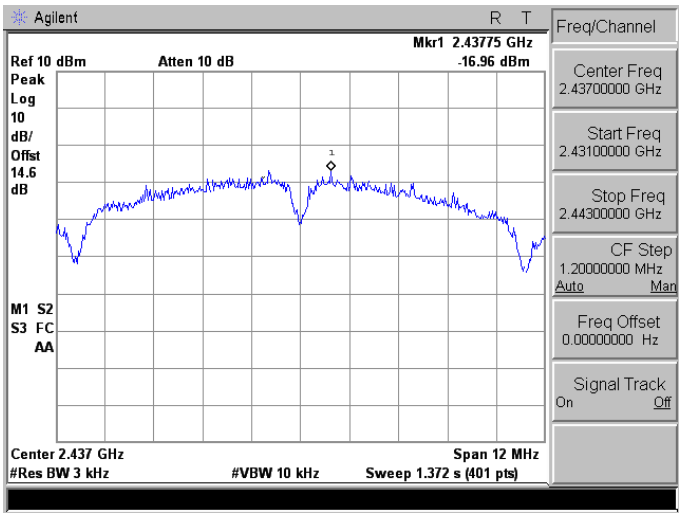
2462	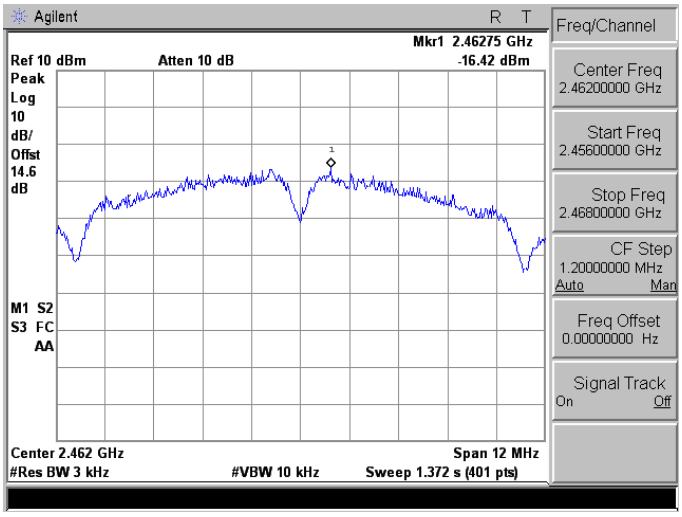

Mode 2: IEEE 802.11b Link Mode_Ant2	
2412	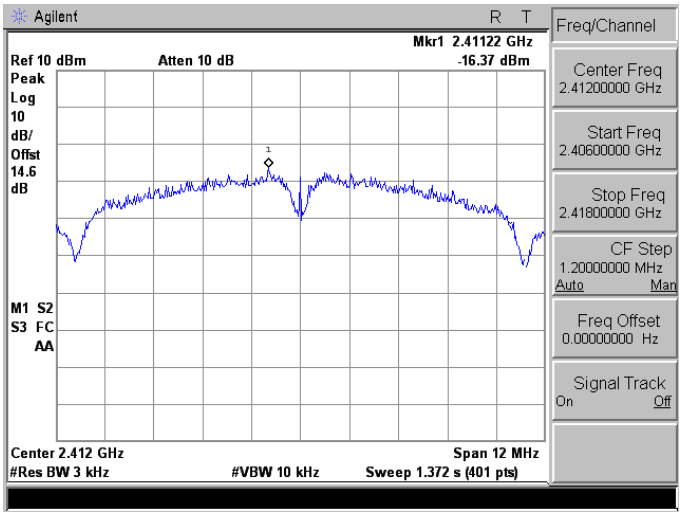
2437	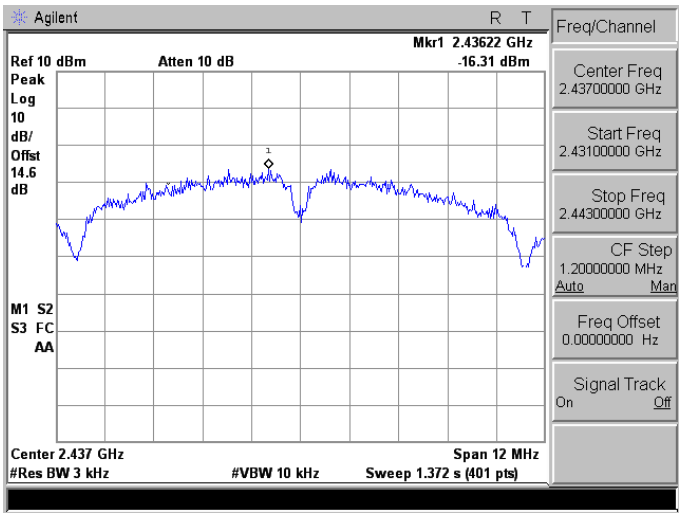
2462	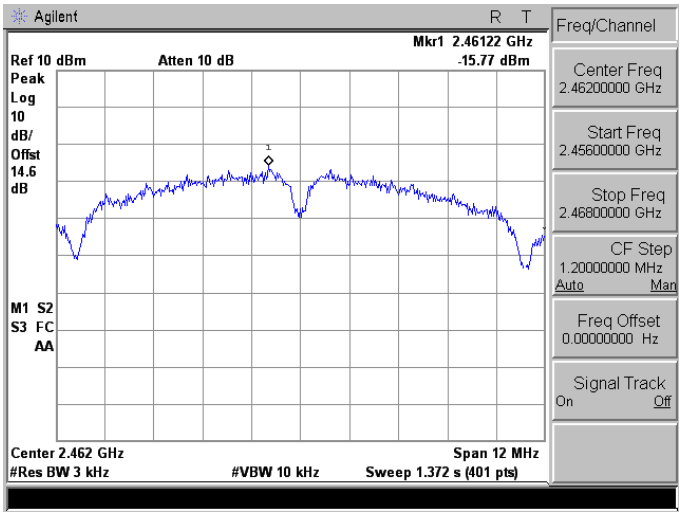

Mode 3: IEEE 802.11g Link Mode_Ant-1	
2412	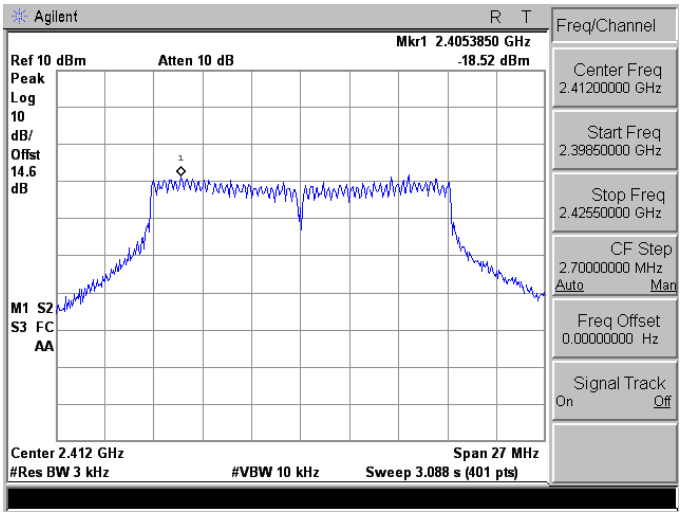
2437	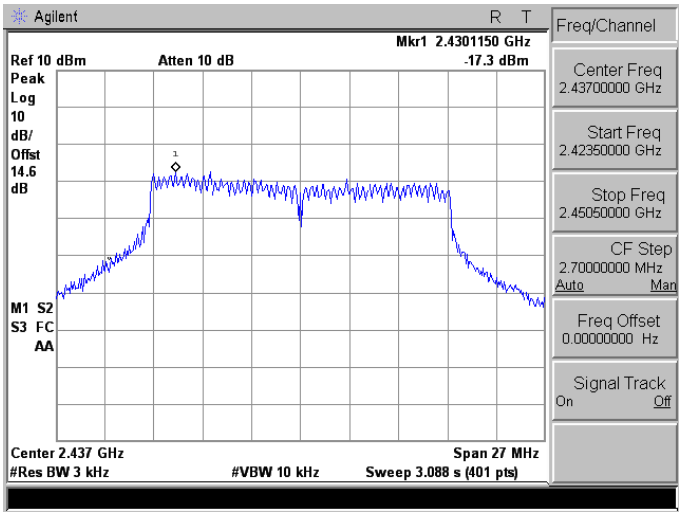
2462	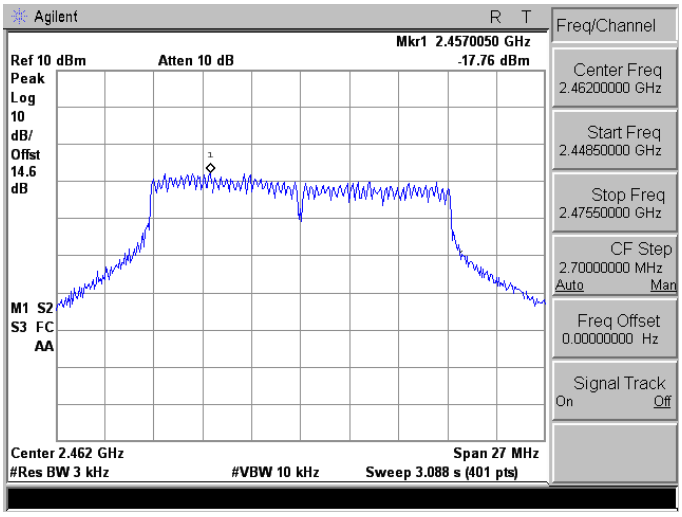

Mode 3: IEEE 802.11g Link Mode_Ant-2	
2412	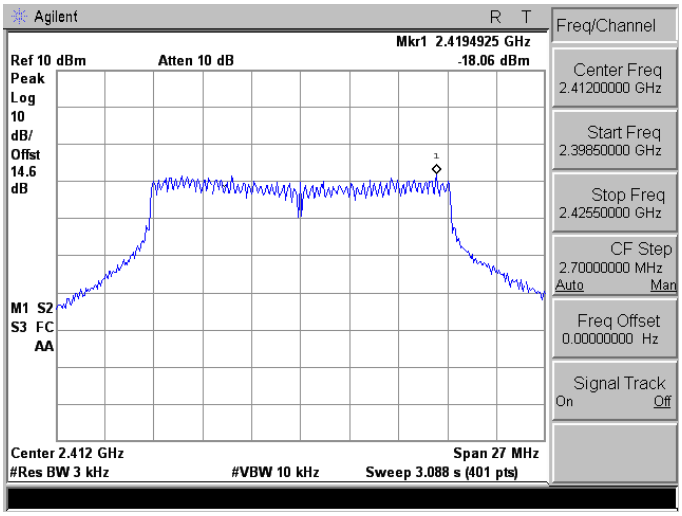
2437	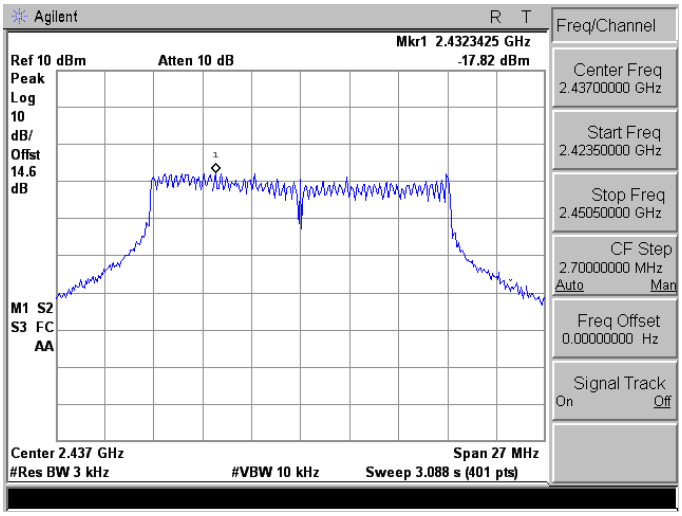
2462	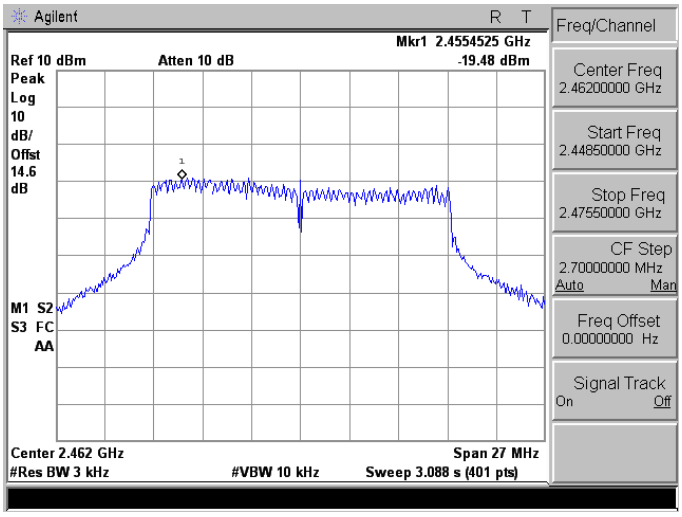

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_Ant-1	
2412	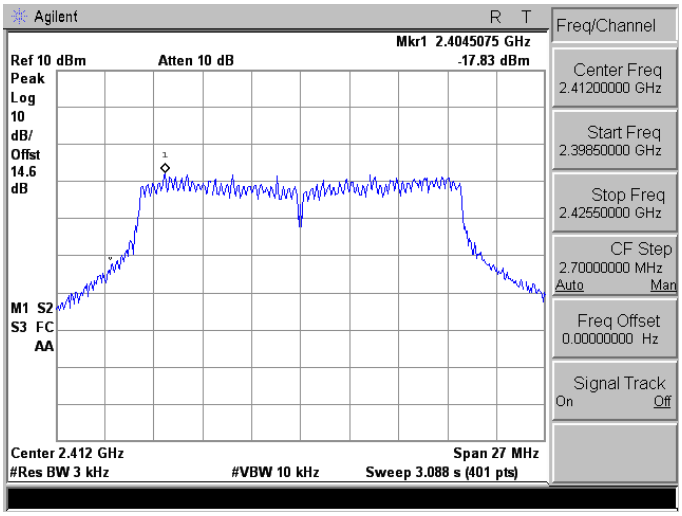
2437	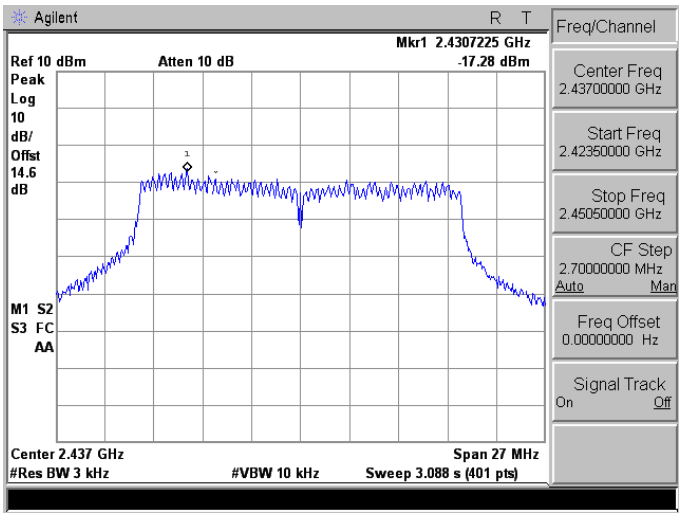
2462	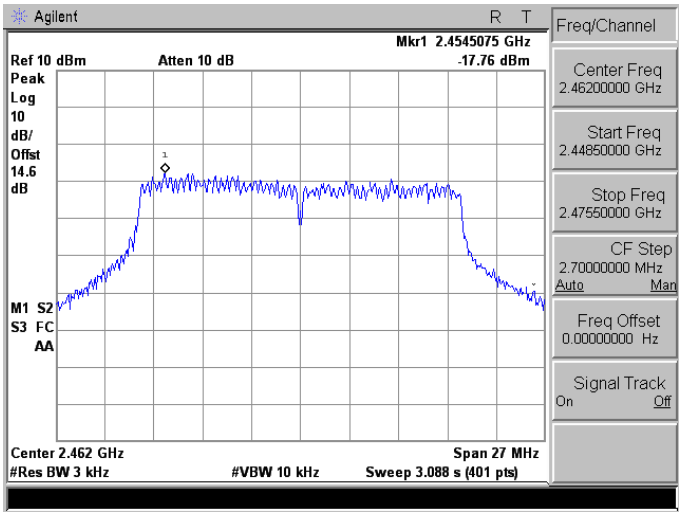

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_Ant-2	
2412	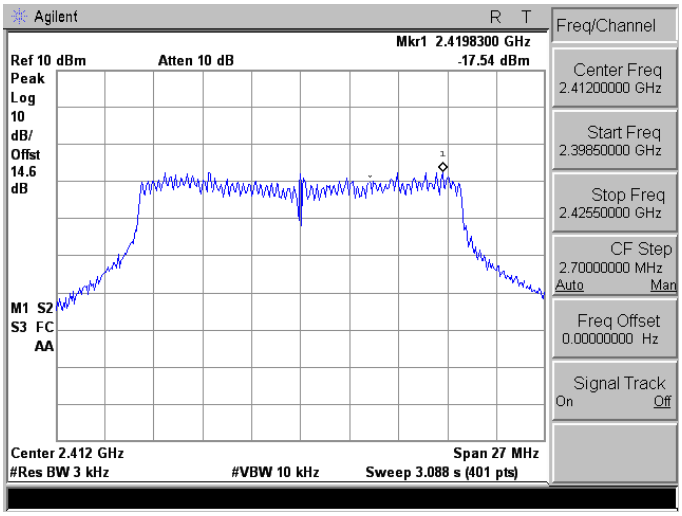
2437	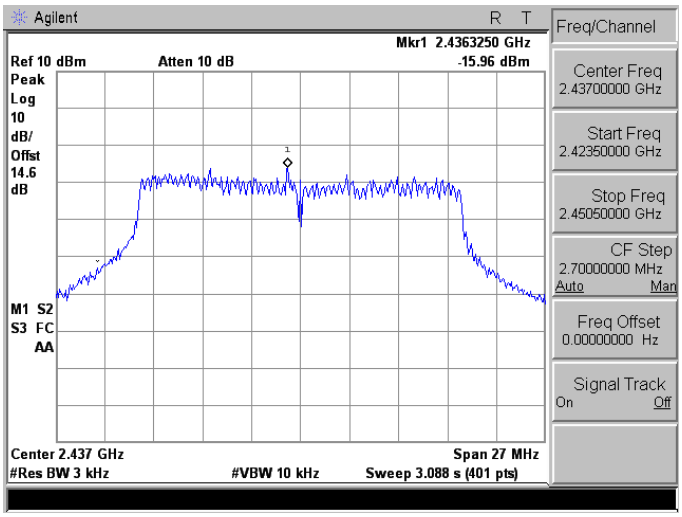
2462	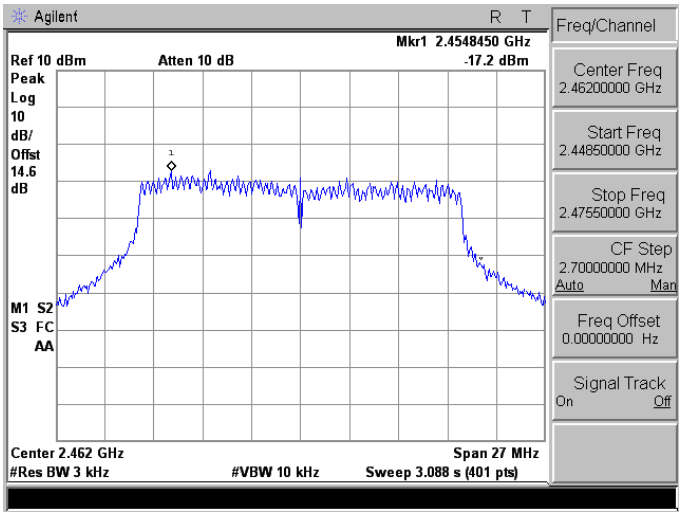

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_Ant-1	
2422	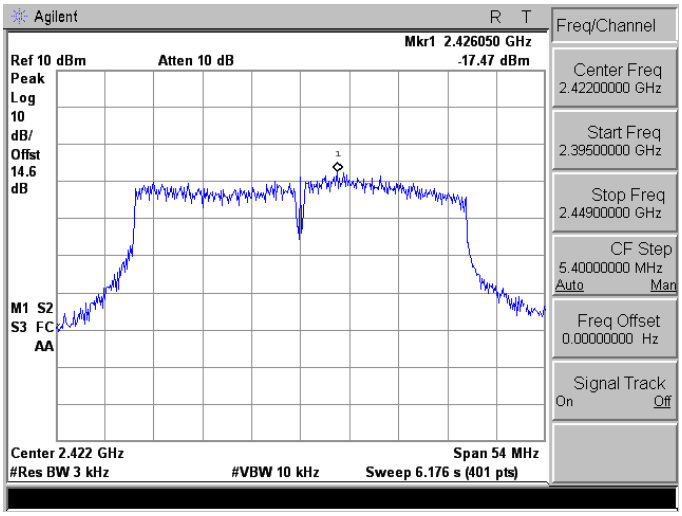
2437	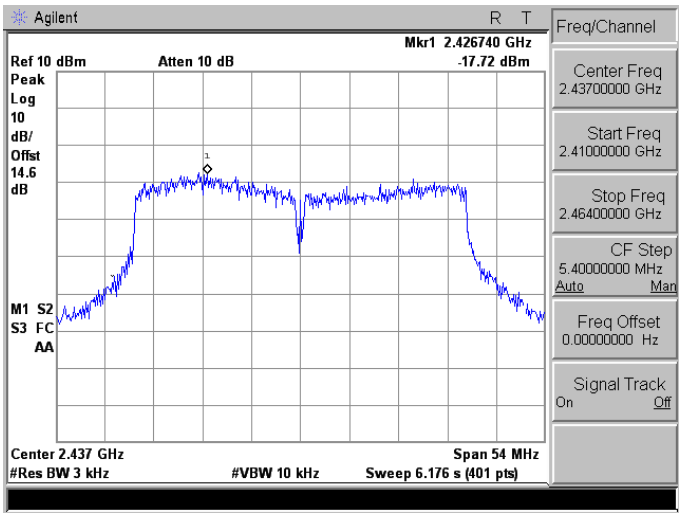
2452	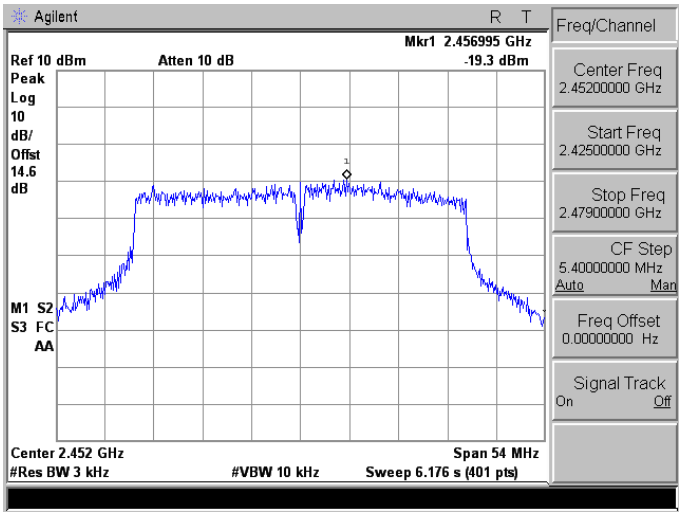

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_Ant-2	
2422	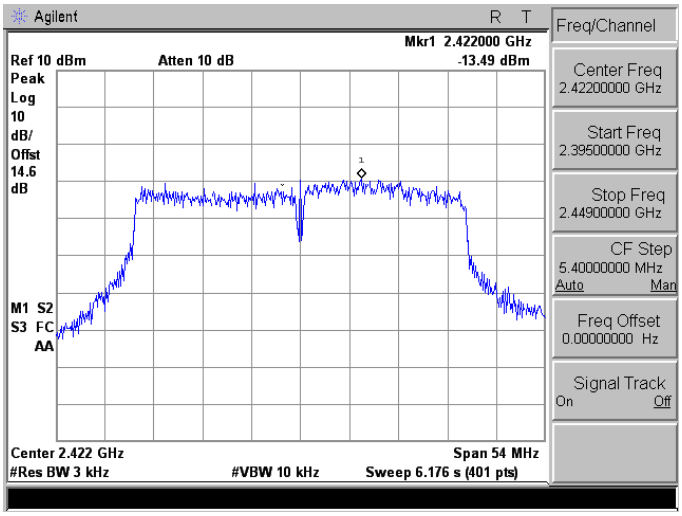
2437	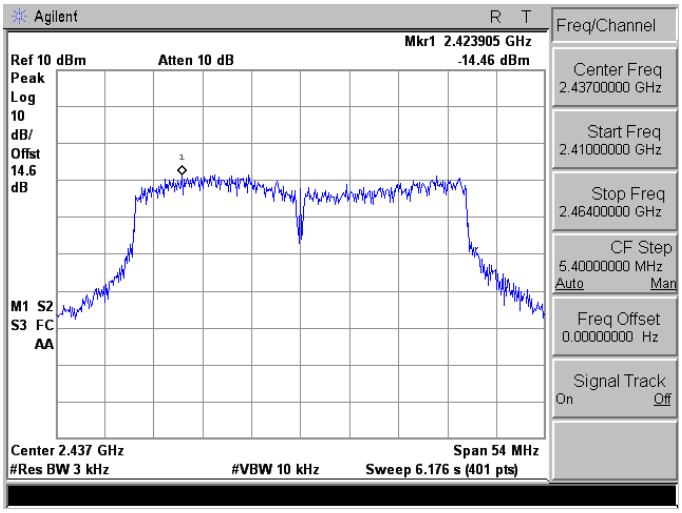
2452	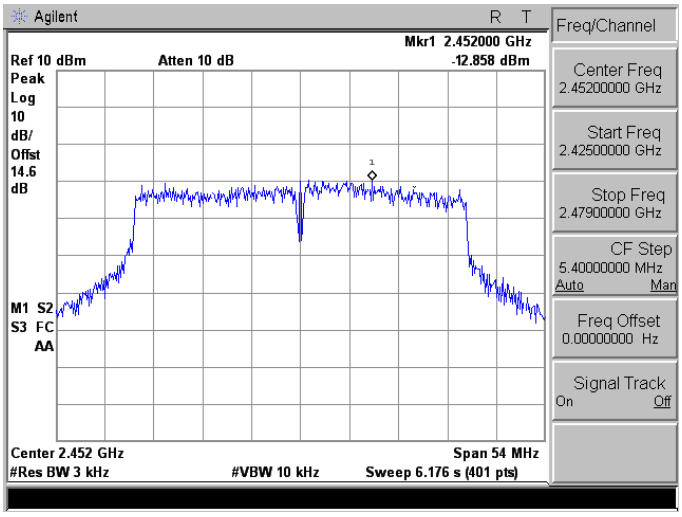

9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

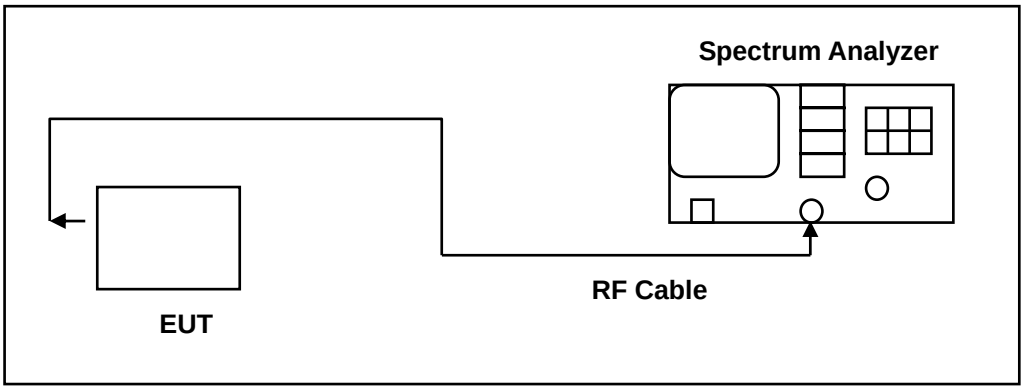

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/24/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.
Note: N.C.R. = No Calibration Request.

9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.
All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.
The test was performed at 3 channels.

9.5. Test Graphs

Reference level

Mode 2: IEEE 802.11b Link Mode_Ant-1	
2412	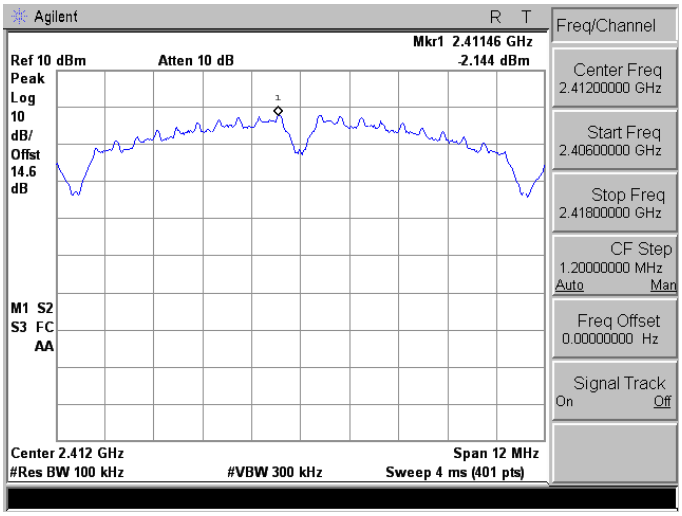
2437	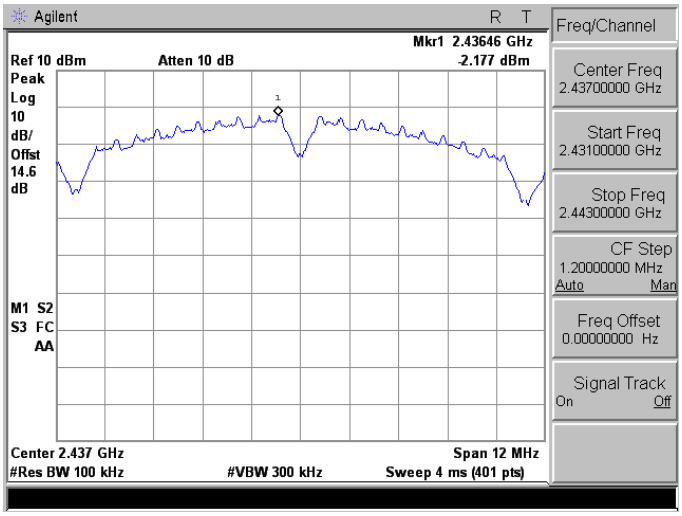
2462	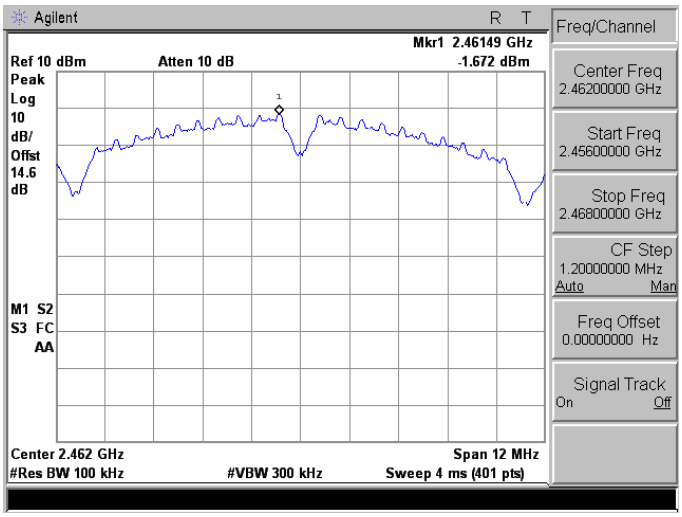

Mode 2: IEEE 802.11b Link Mode_Ant-2	
2412	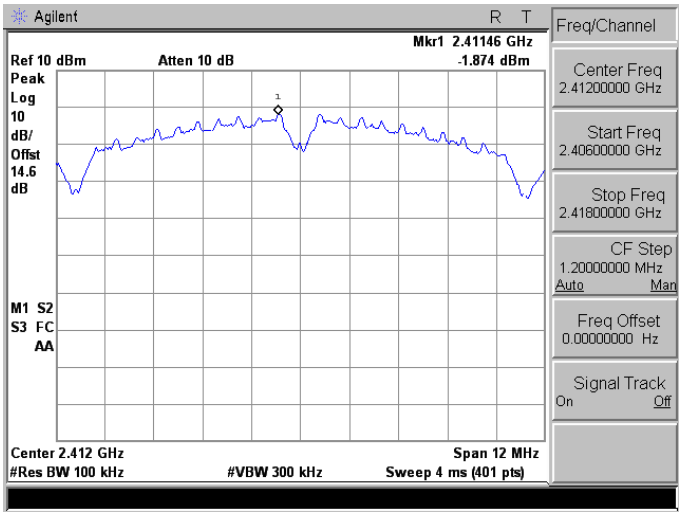
2437	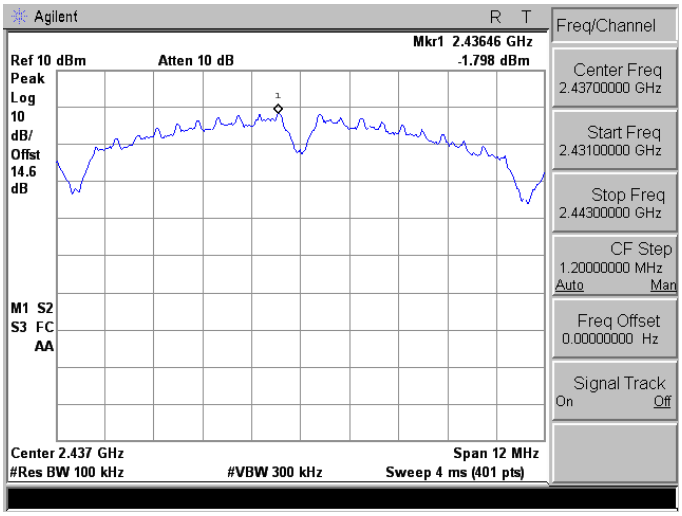
2462	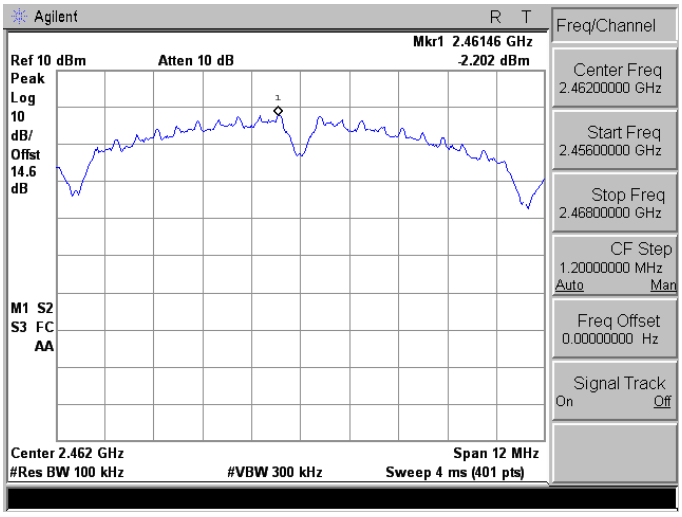

Mode 3: IEEE 802.11g Link Mode_Ant-1	
2412	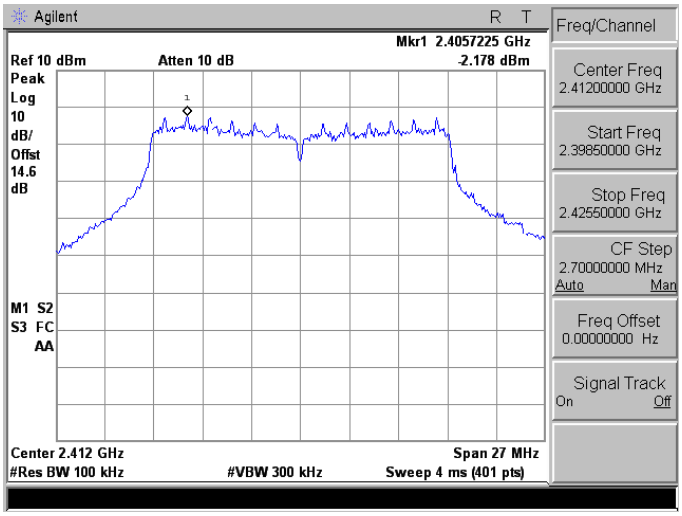
2437	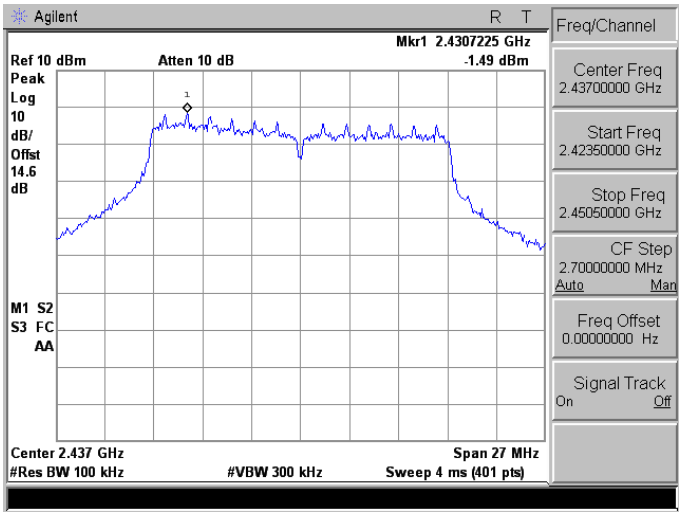
2462	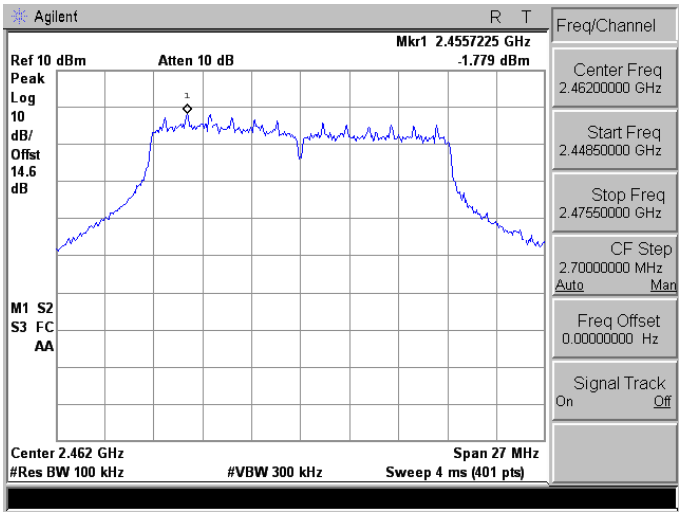

Mode 3: IEEE 802.11g Link Mode_Ant-2	
2412	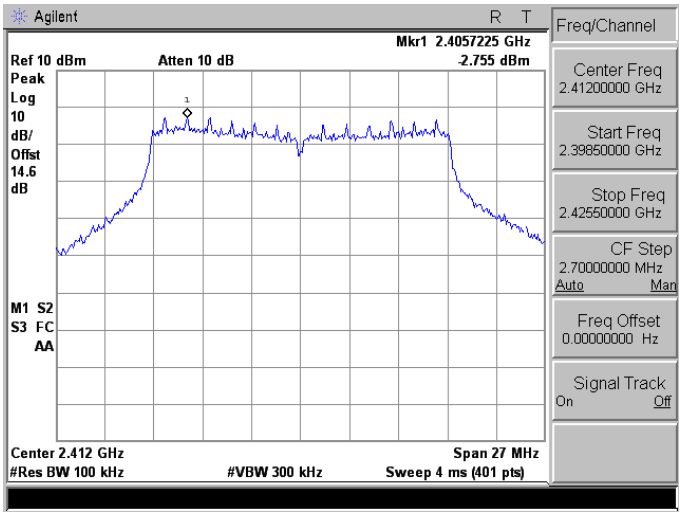
2437	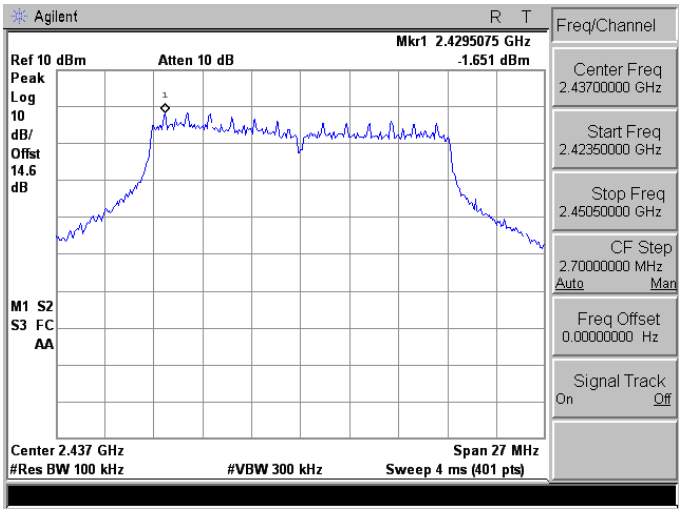
2462	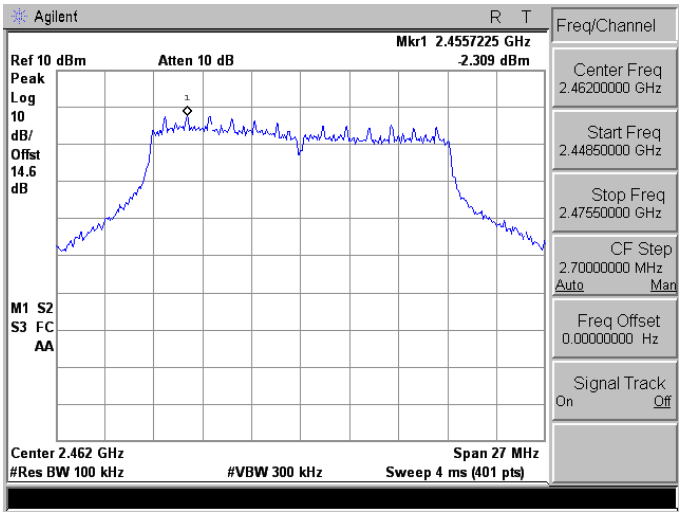

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_Ant-1	
2412	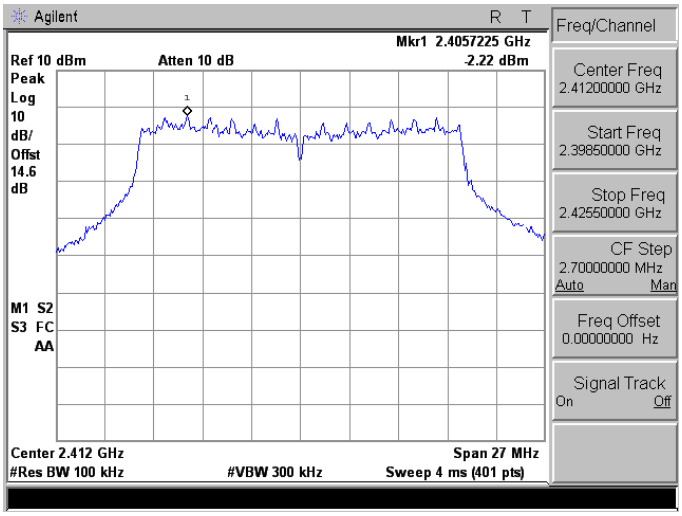
2437	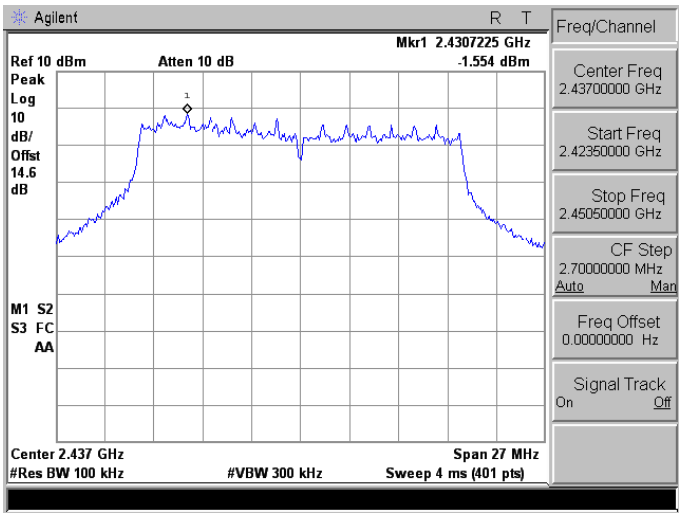
2462	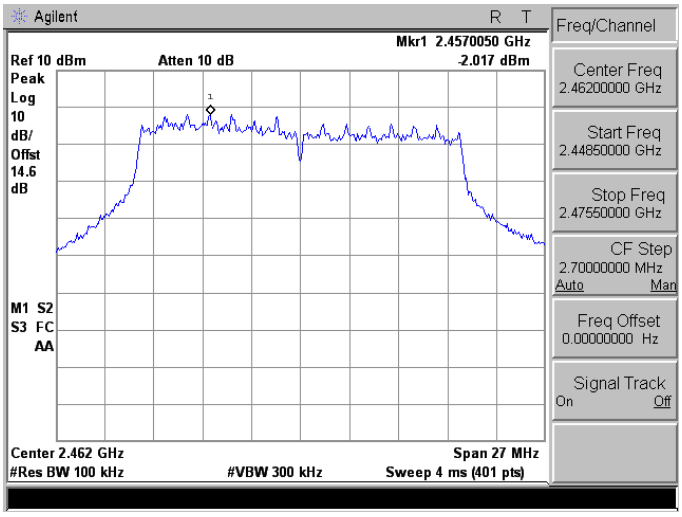

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_Ant-2	
2412	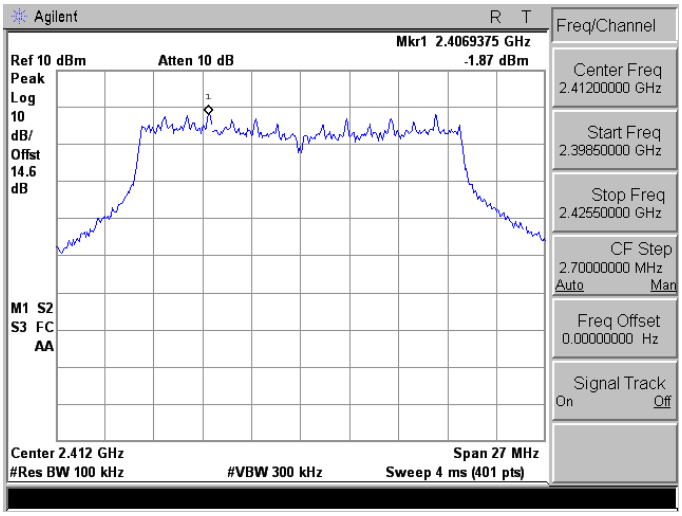
2437	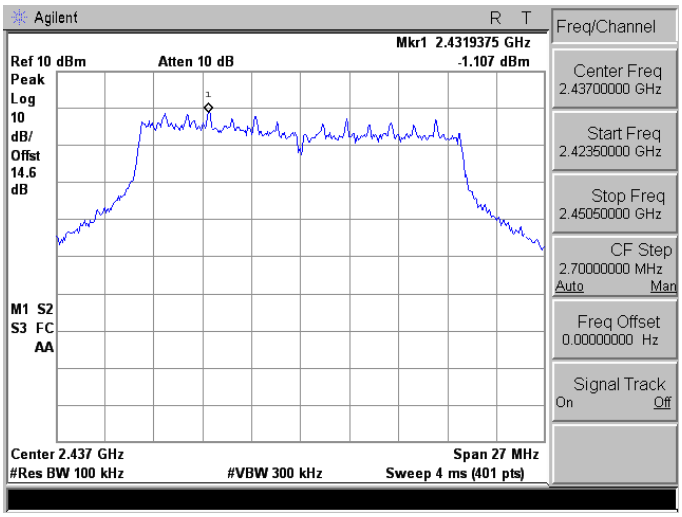
2462	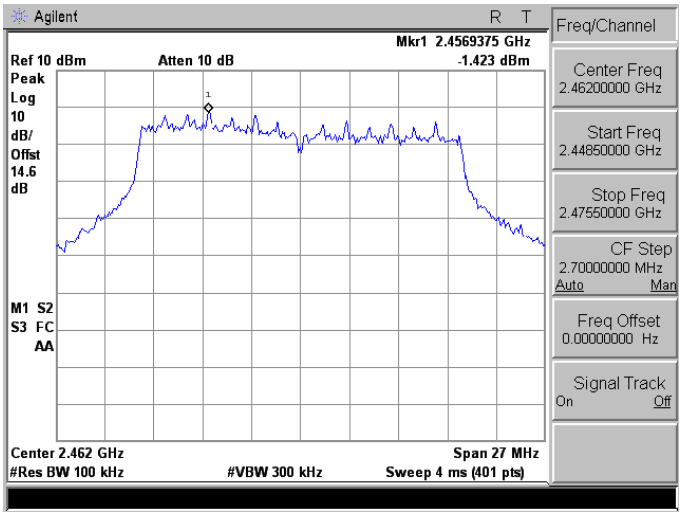

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_Ant-1	
2422	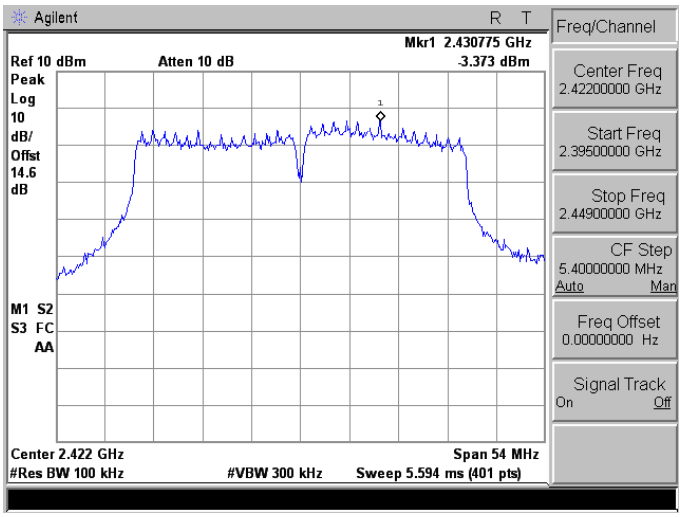
2437	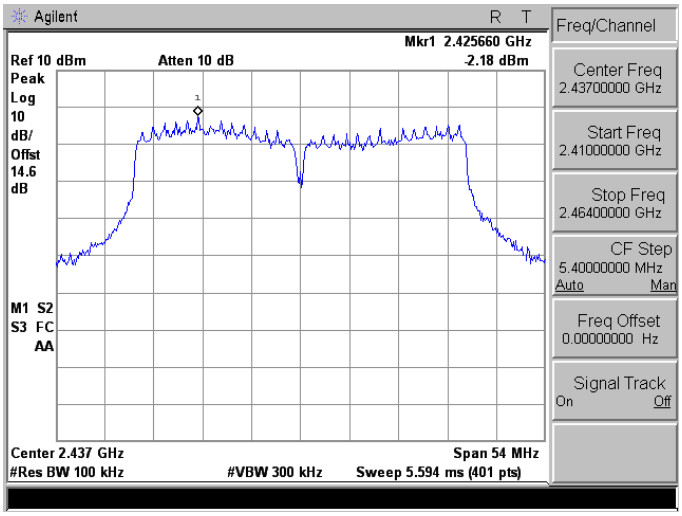
2452	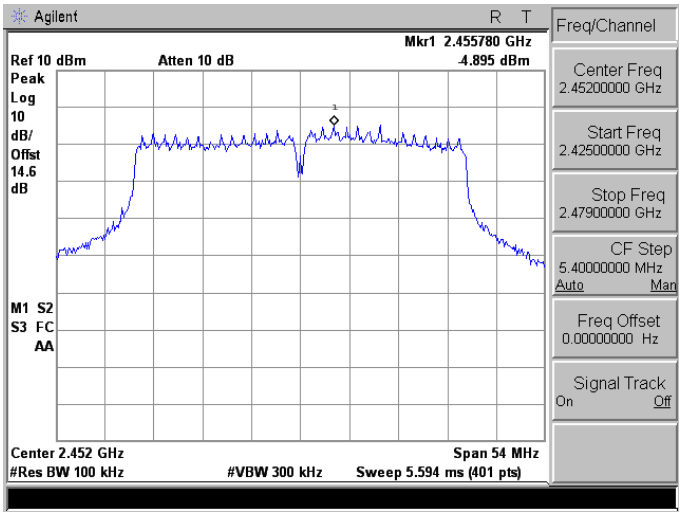

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_Ant-2	
2422	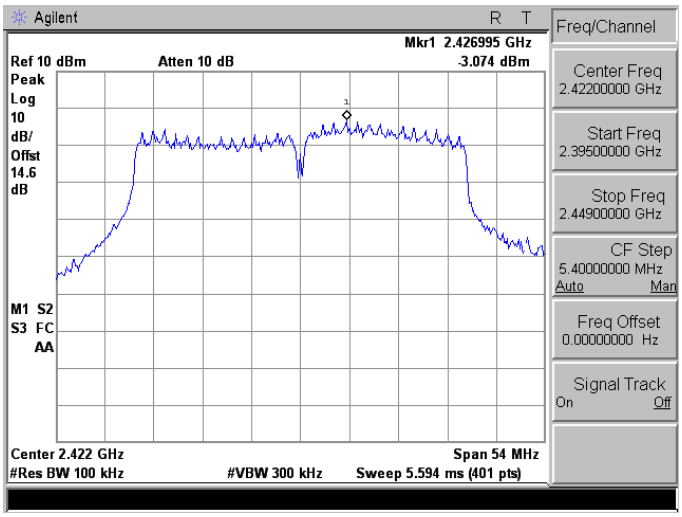
2437	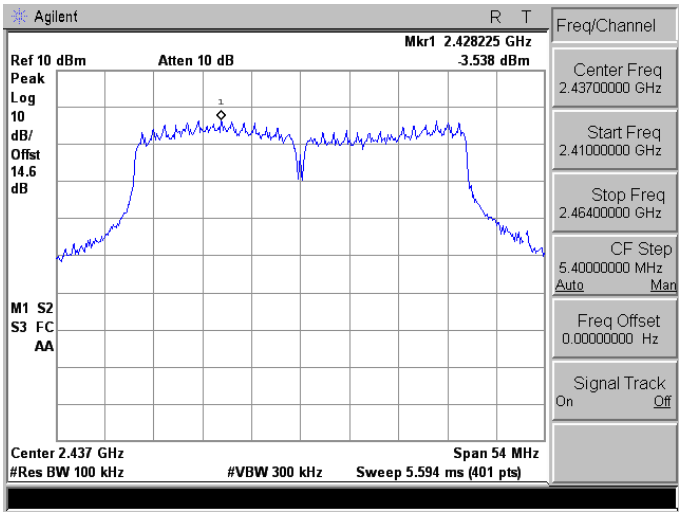
2452	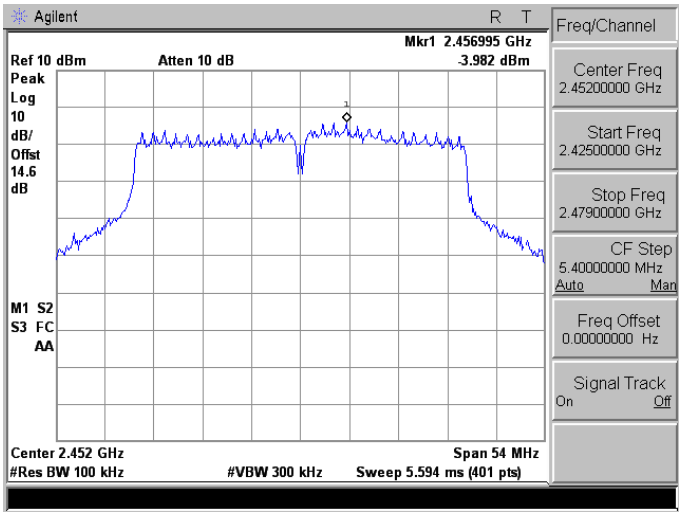

Out of Band Conducted Emissions

Mode 2: IEEE 802.11b Link Mode_Ant-1	
2412	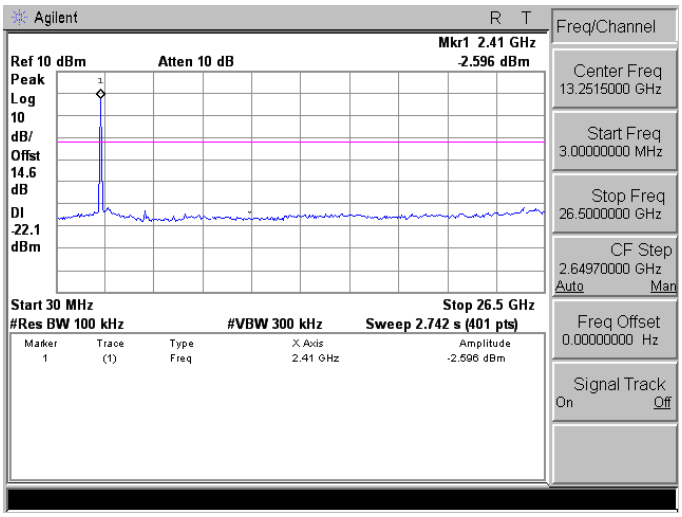
2437	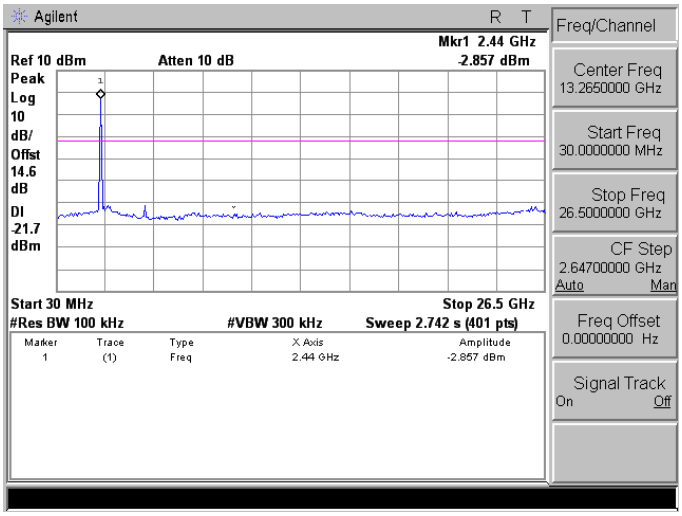
2462	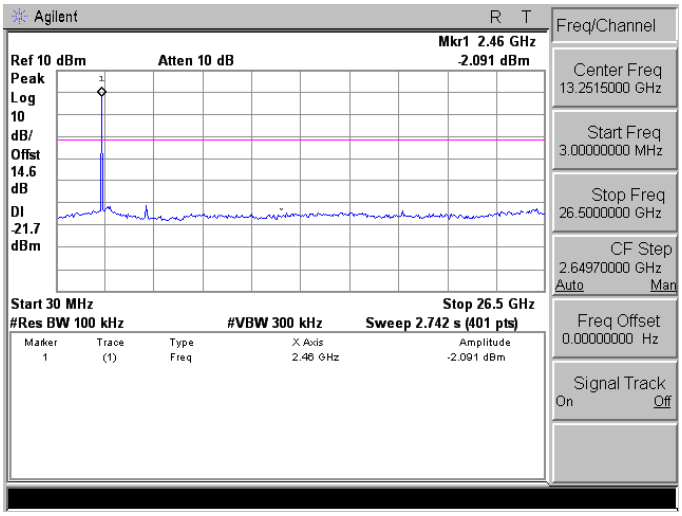

Mode 2: IEEE 802.11b Link Mode_Ant-2	
2412	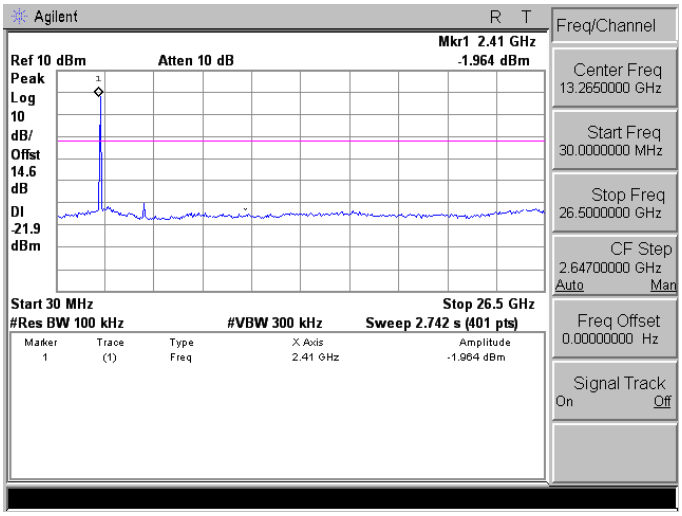
2437	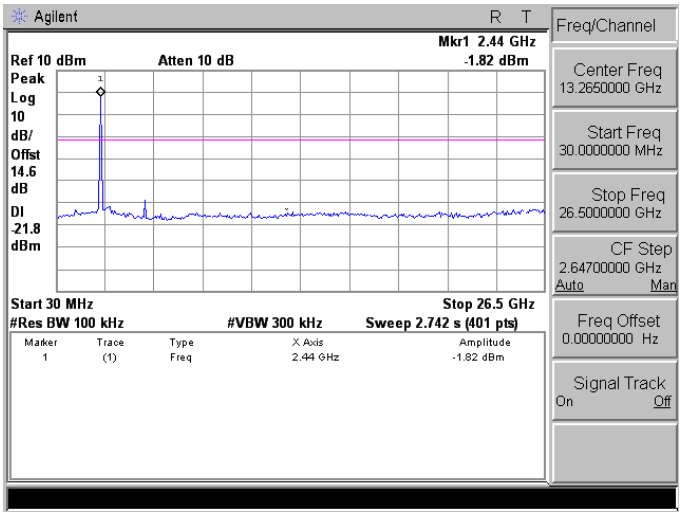
2462	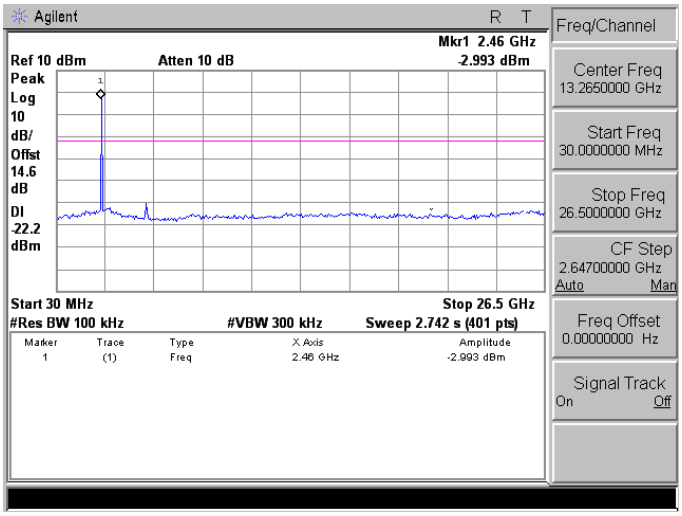

Mode 3: IEEE 802.11g Link Mode_Ant-1	
2412	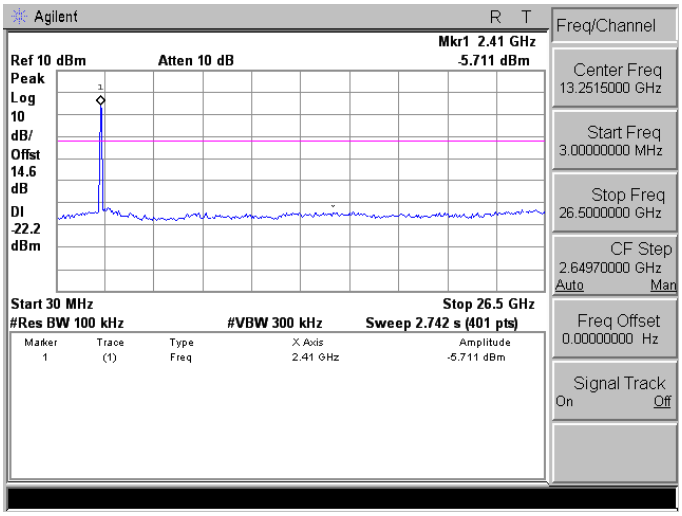
2437	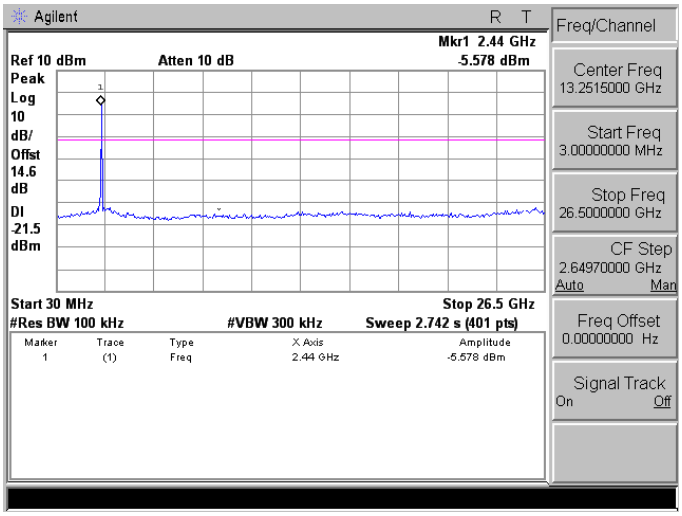
2462	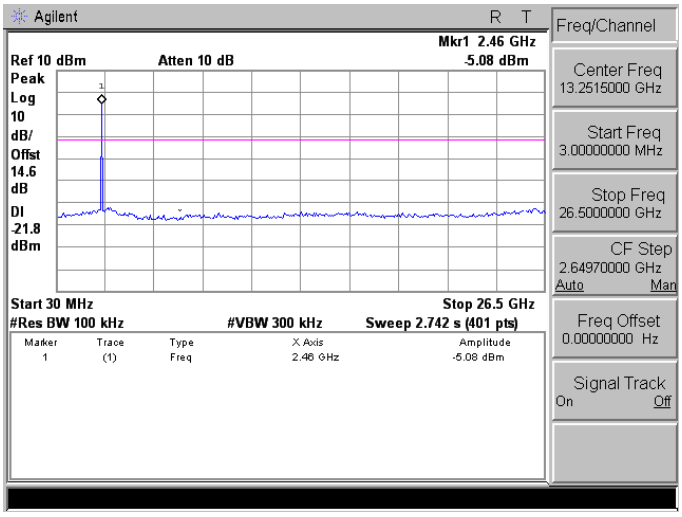

Mode 3: IEEE 802.11g Link Mode_Ant-2	
2412	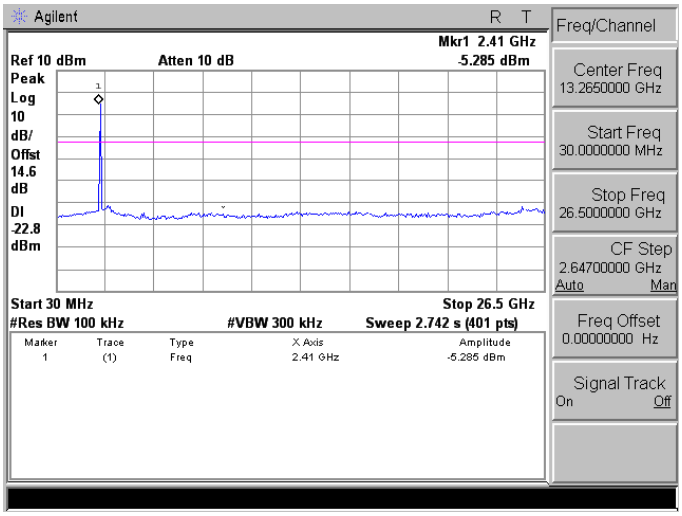
2437	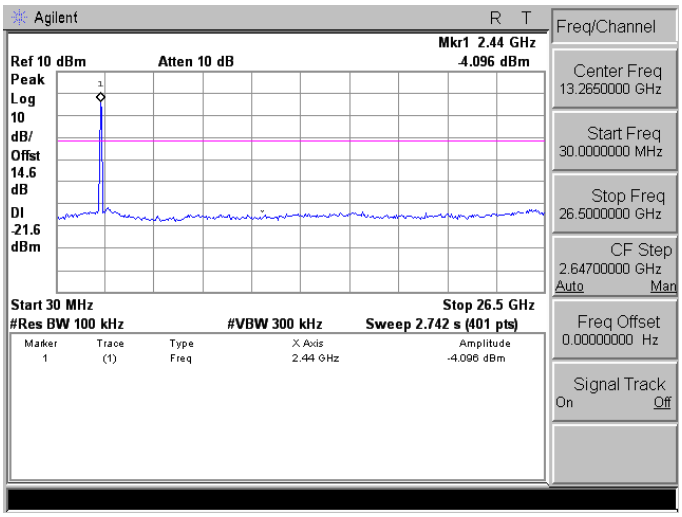
2462	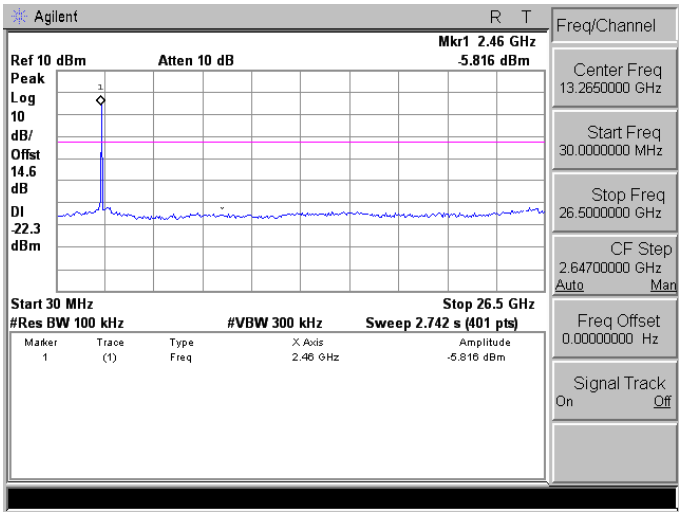

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_Ant-1	
2412	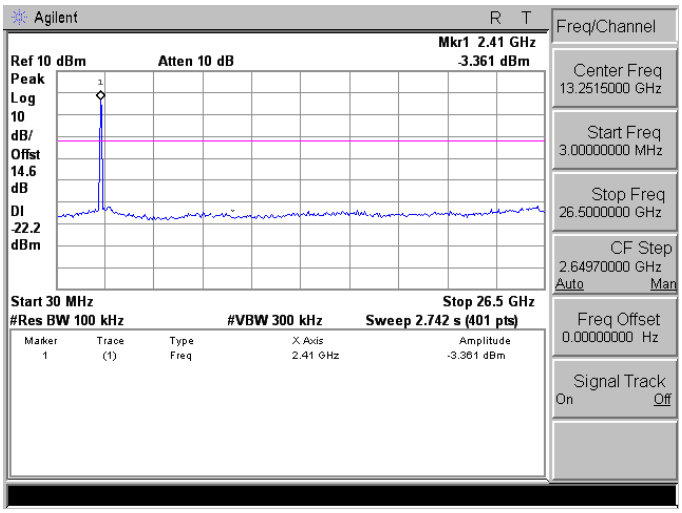
2437	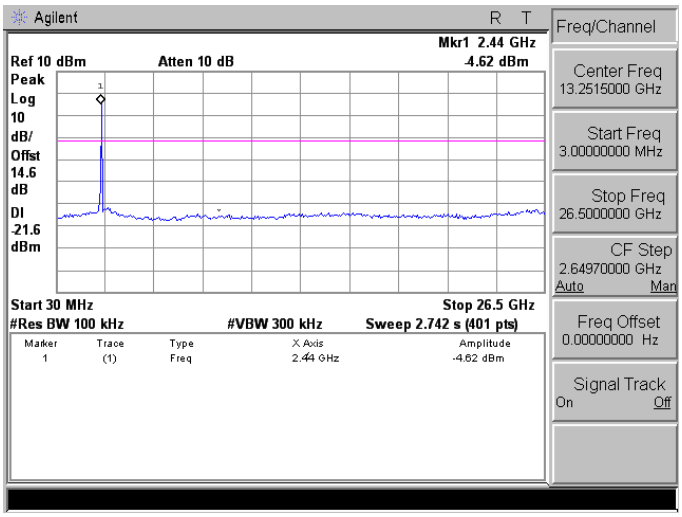
2462	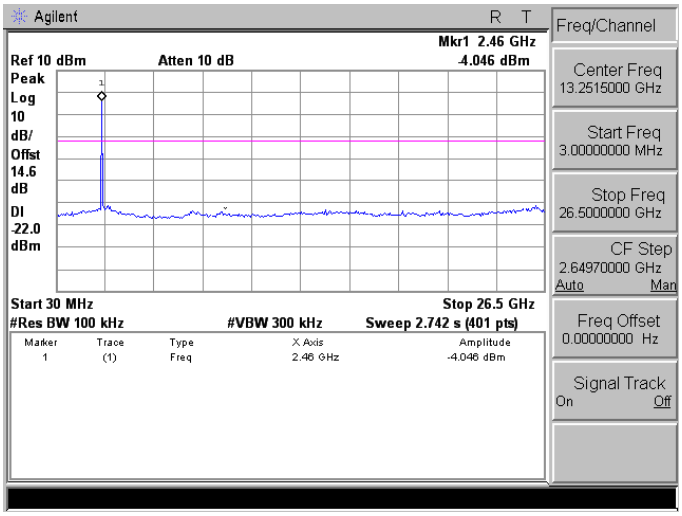

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_Ant-2	
2412	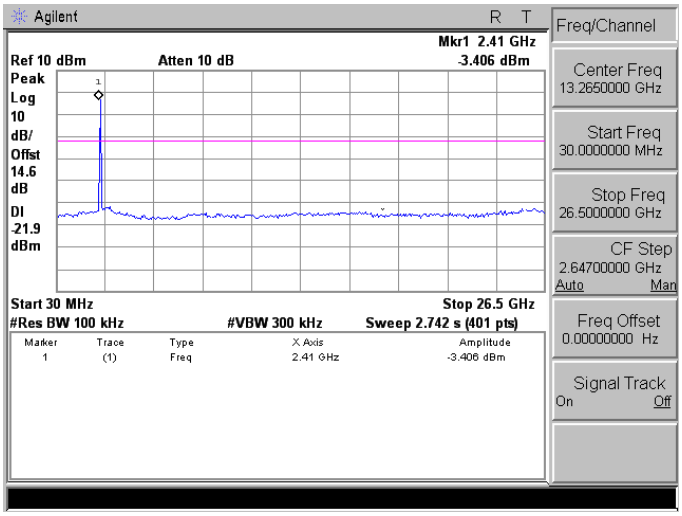
2437	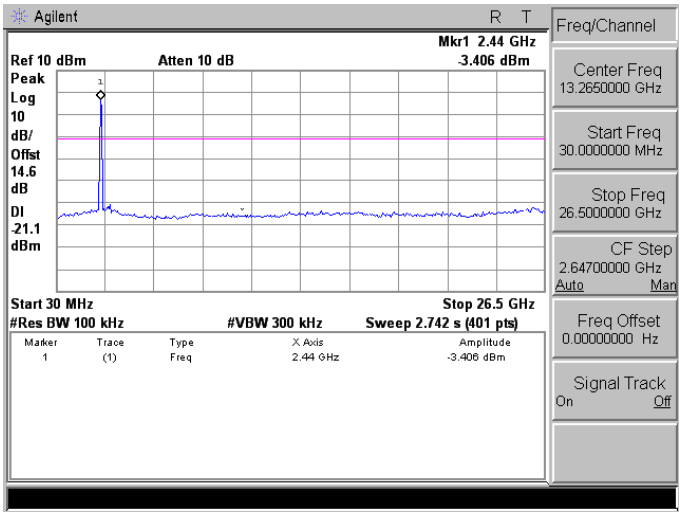
2462	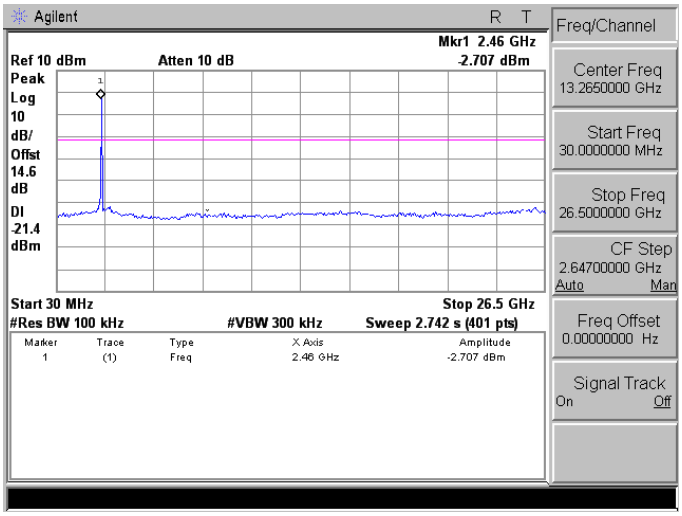

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_Ant-1	
2422	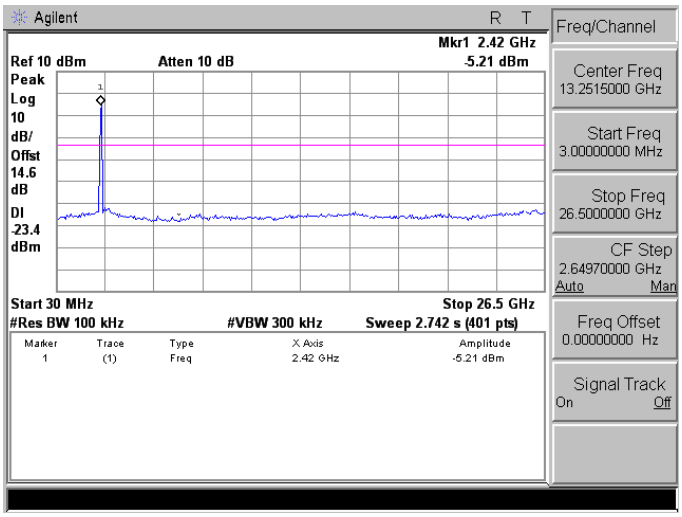
2437	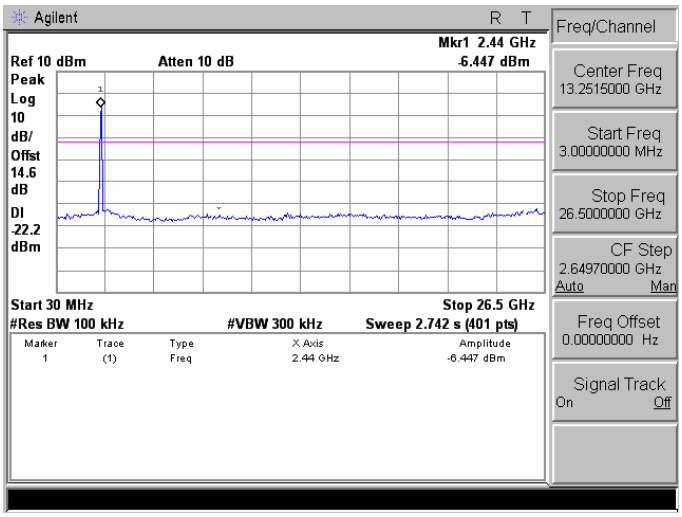
2452	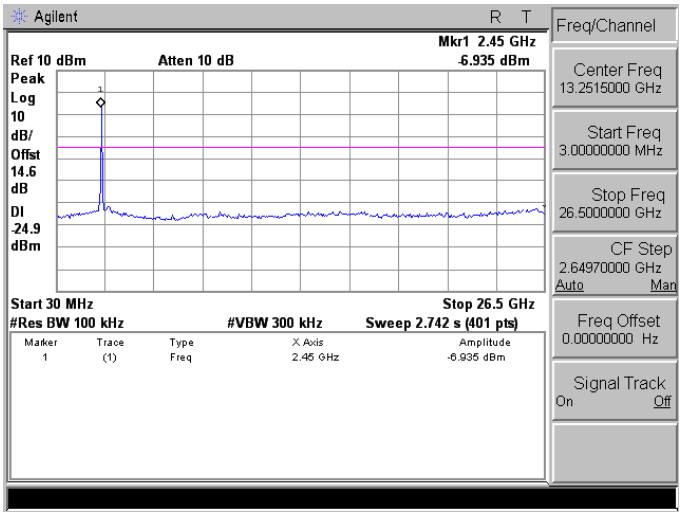

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_Ant-2	
2422	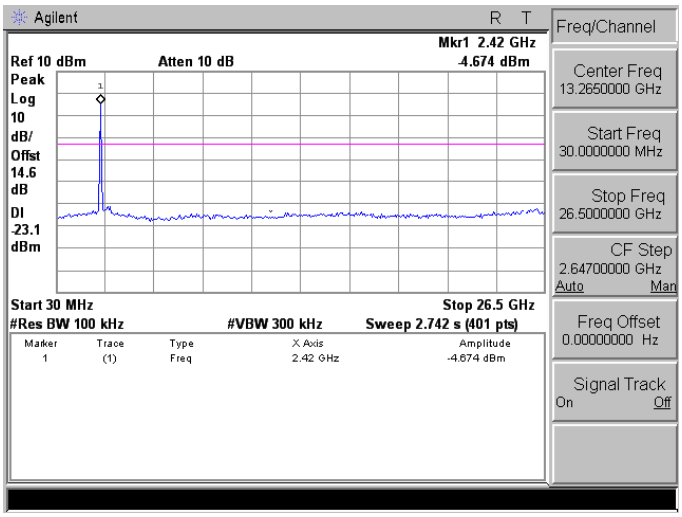
2437	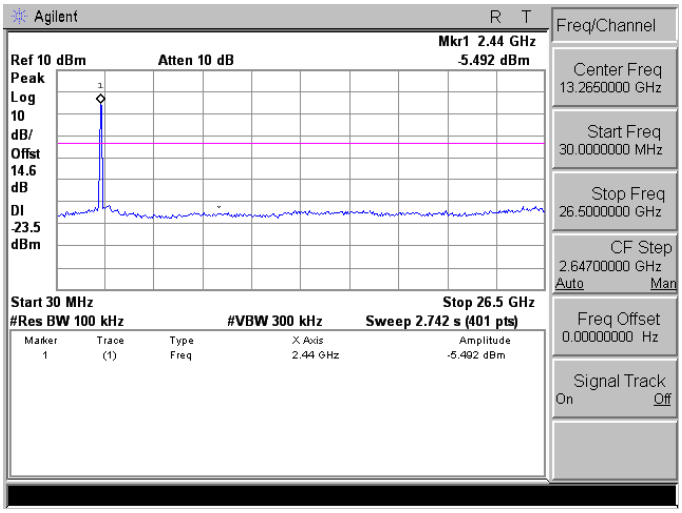
2452	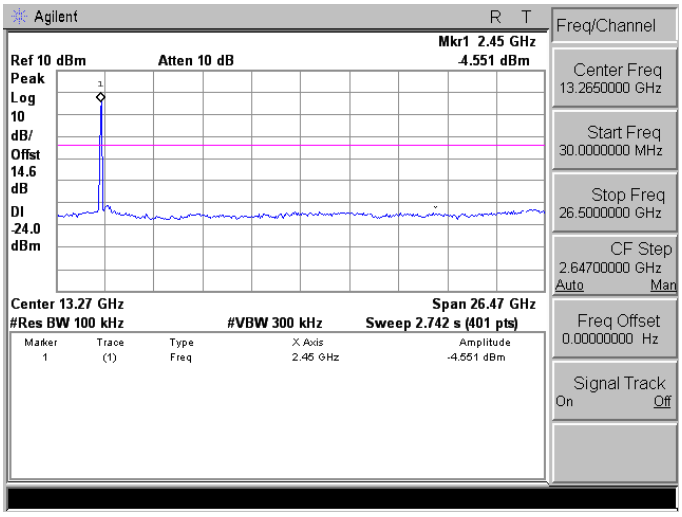

Conducted Band Edge

Mode 2: IEEE 802.11b Link Mode_Ant-1	
2412	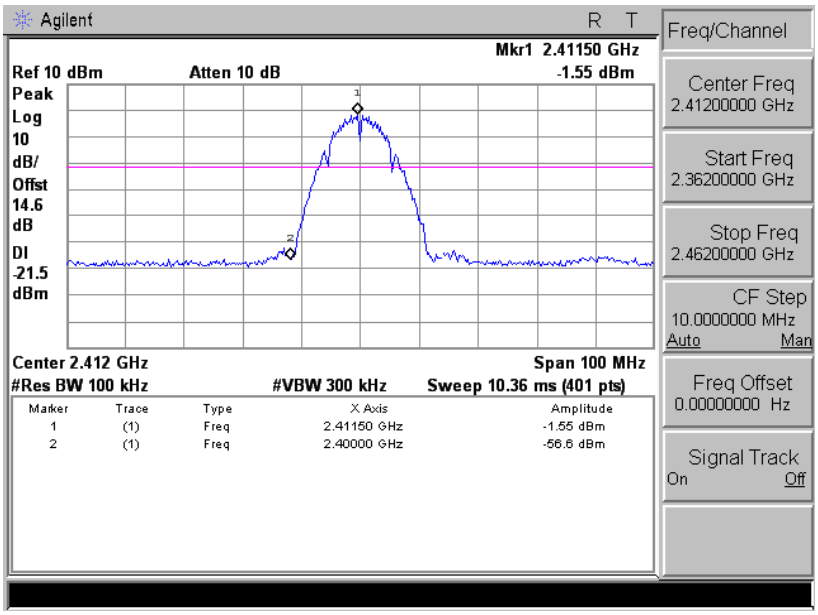
2462	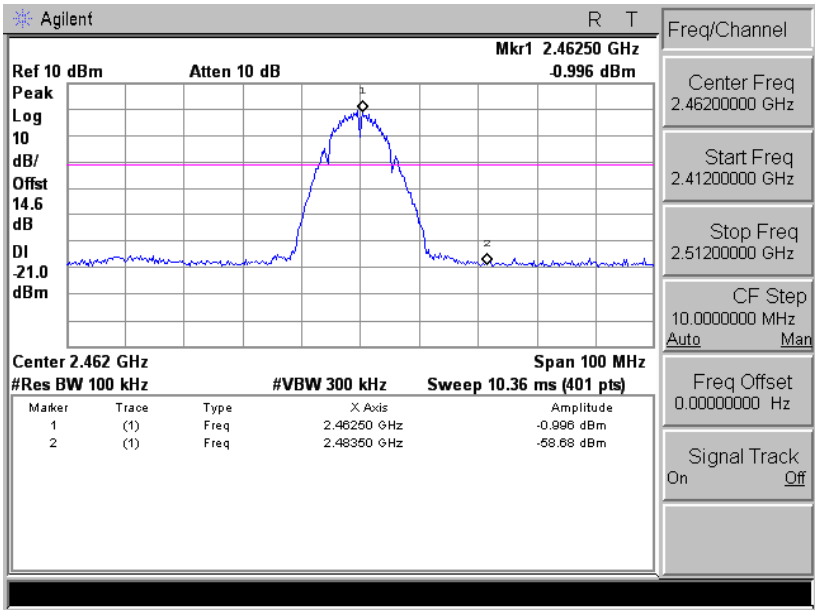

Mode 2: IEEE 802.11b Link Mode_Ant-2	
2412	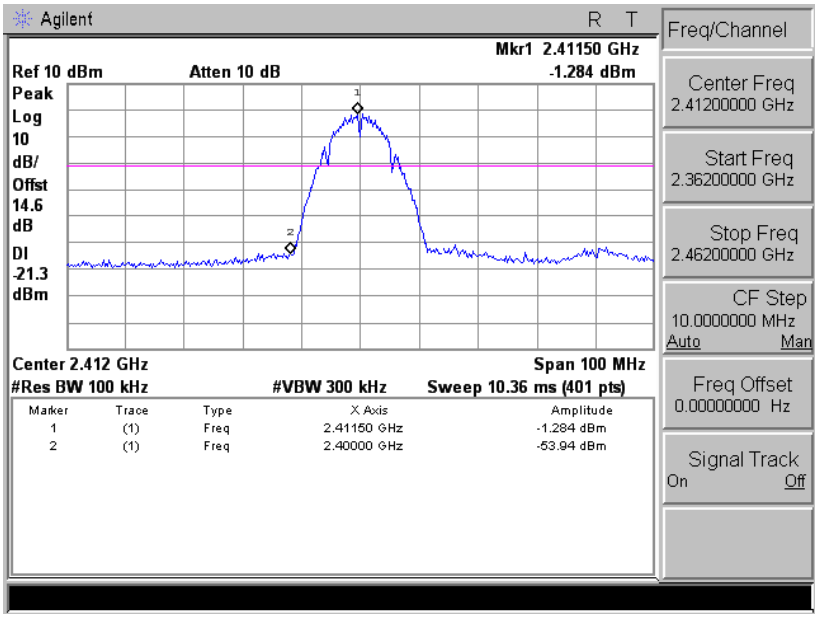
2462	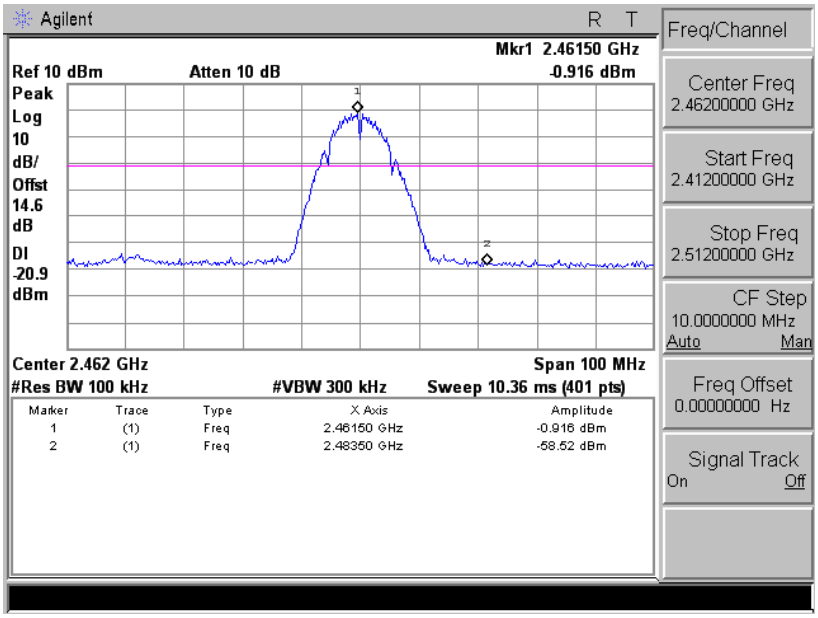

Mode 3: IEEE 802.11g Link Mode_Ant-1	
2412	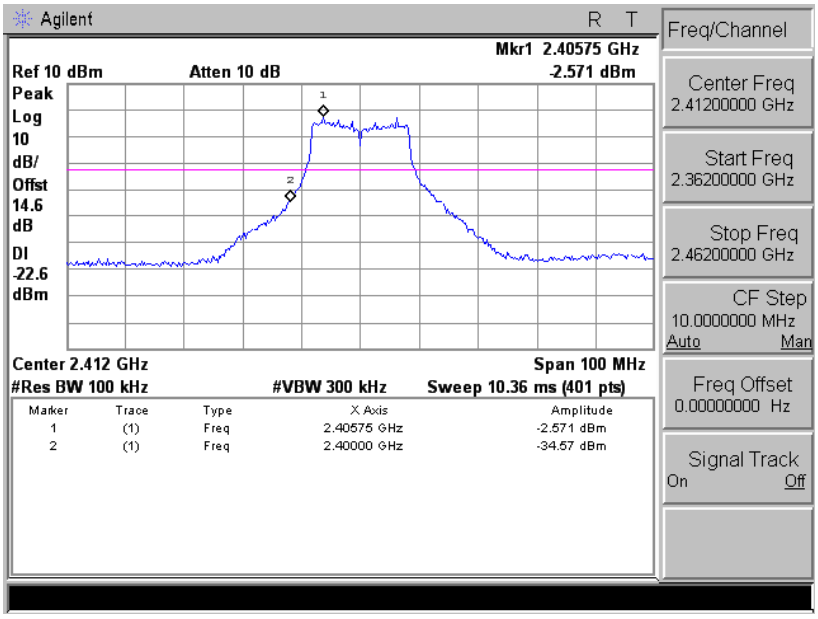
2462	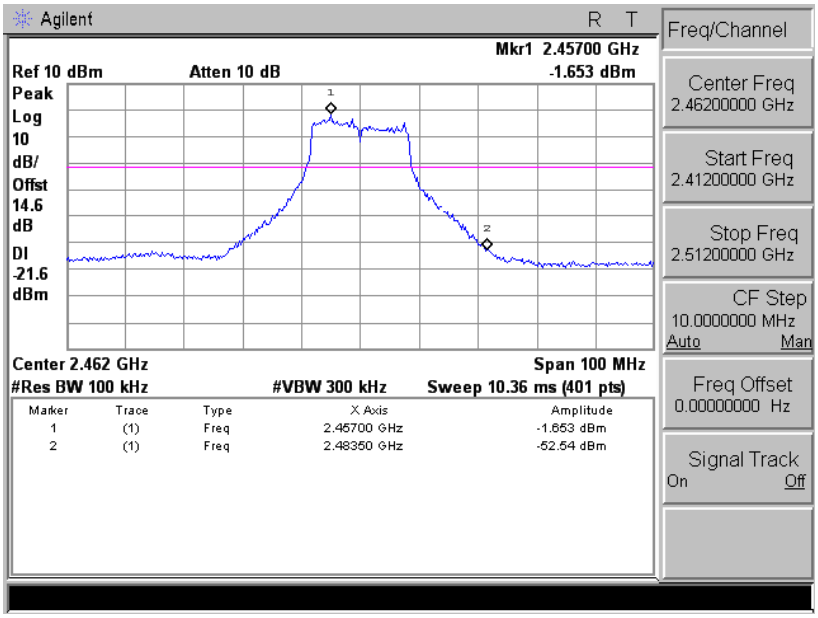

Mode 3: IEEE 802.11g Link Mode_Ant-2	
2412	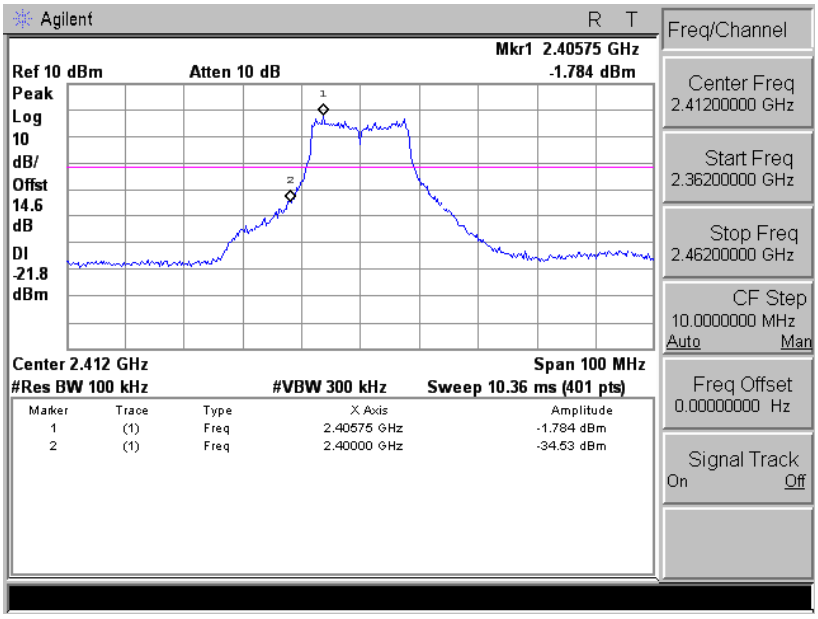
2462	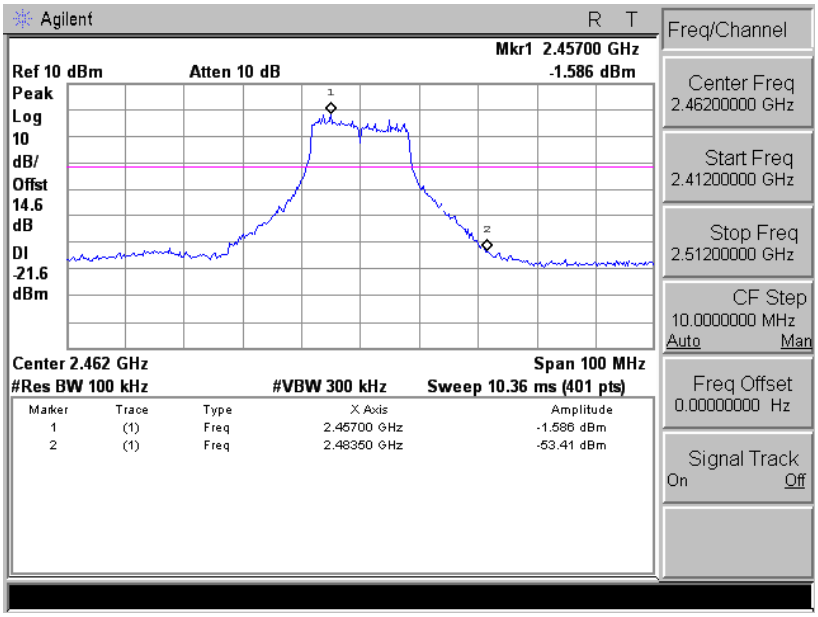

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_Ant-1	
2412	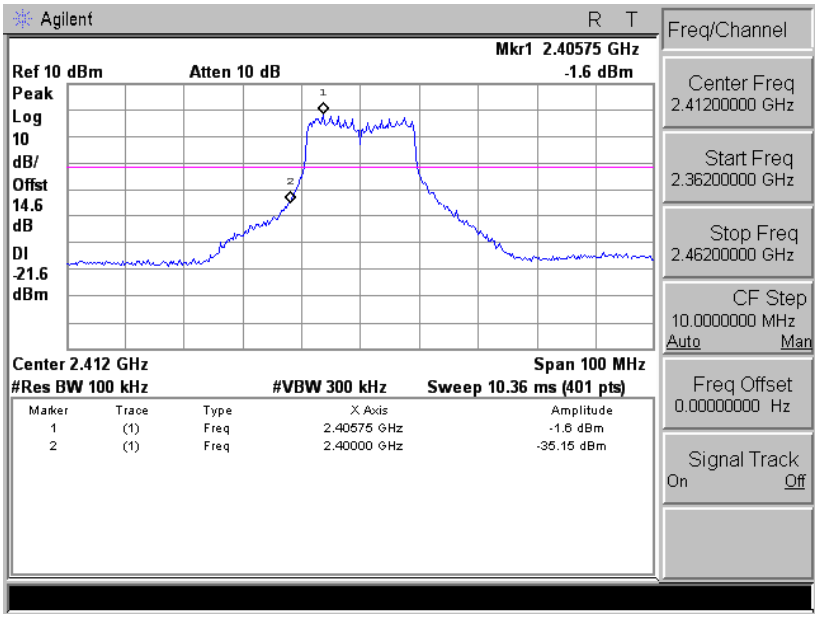
2462	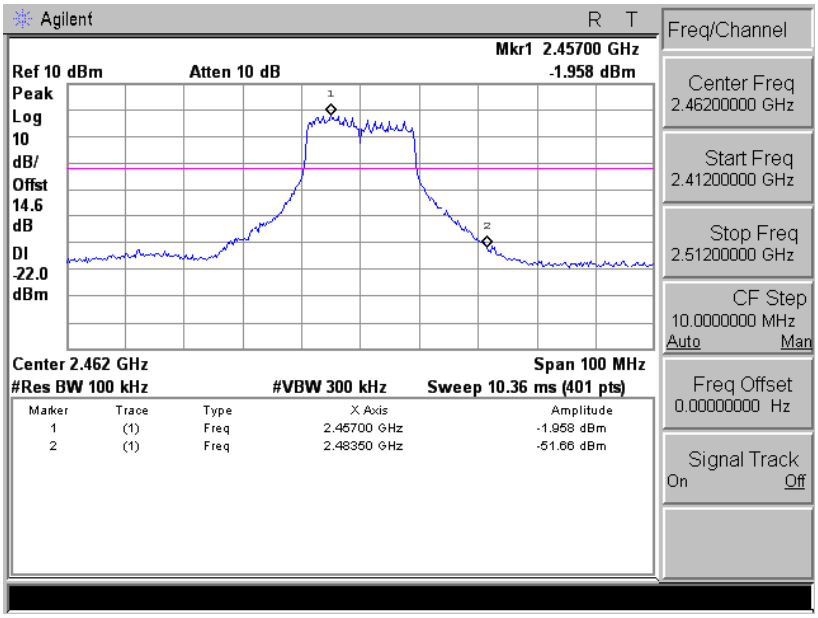

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_Ant-2	
2412	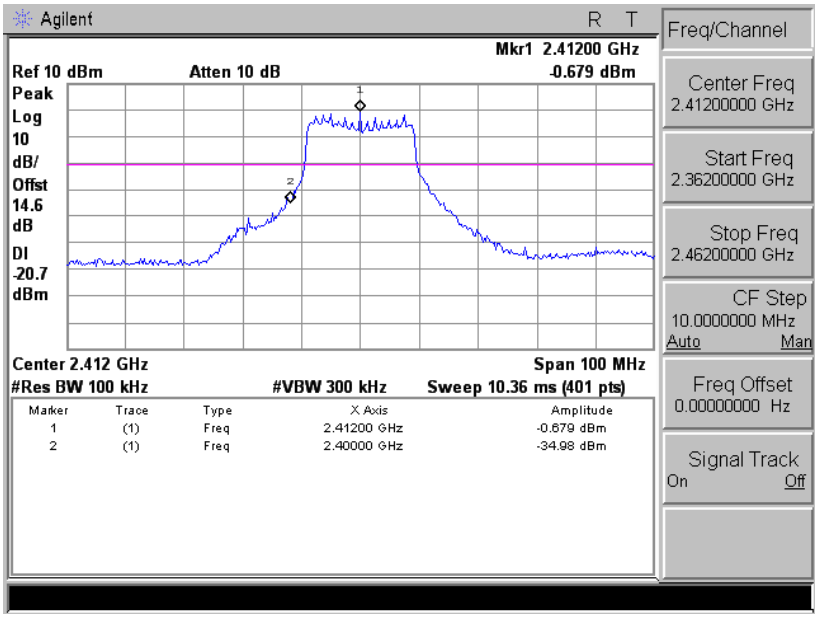
2462	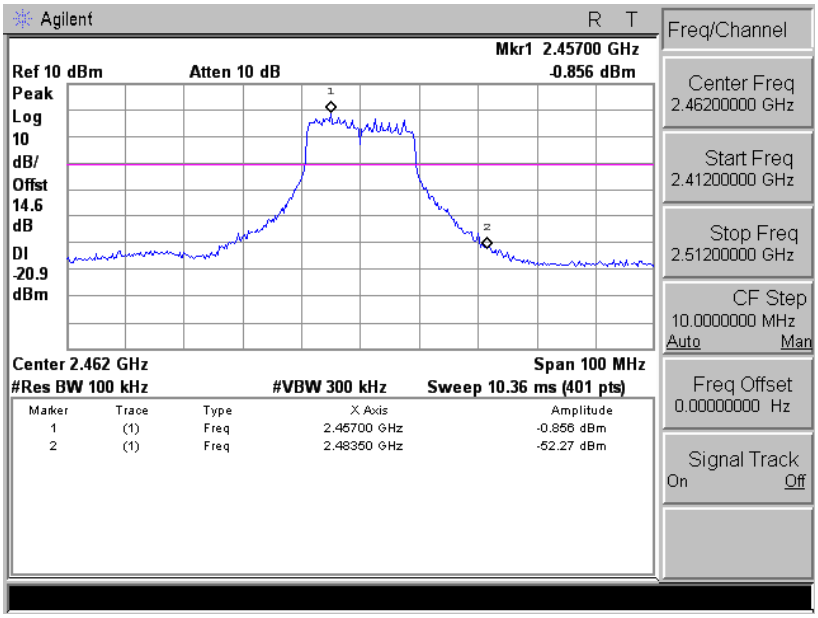

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_Ant-1	
2422	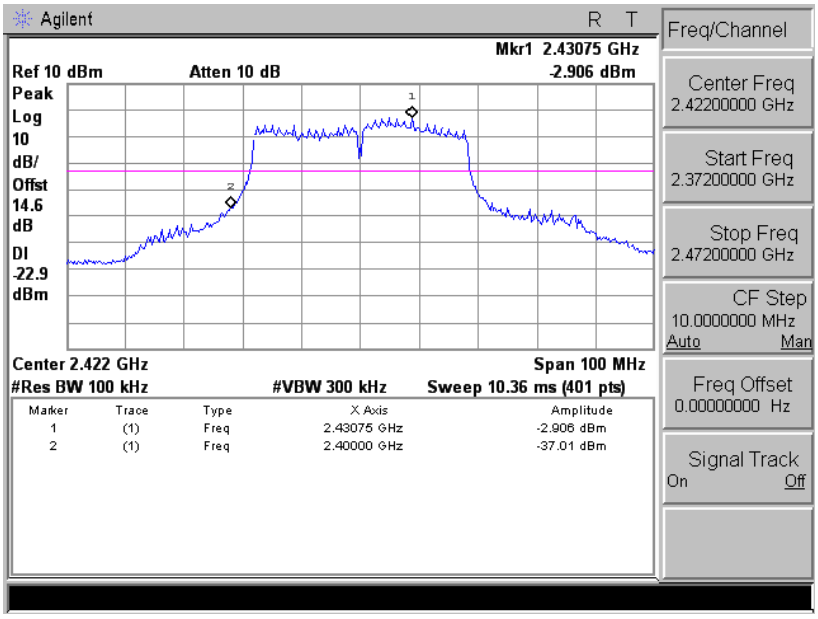
2452	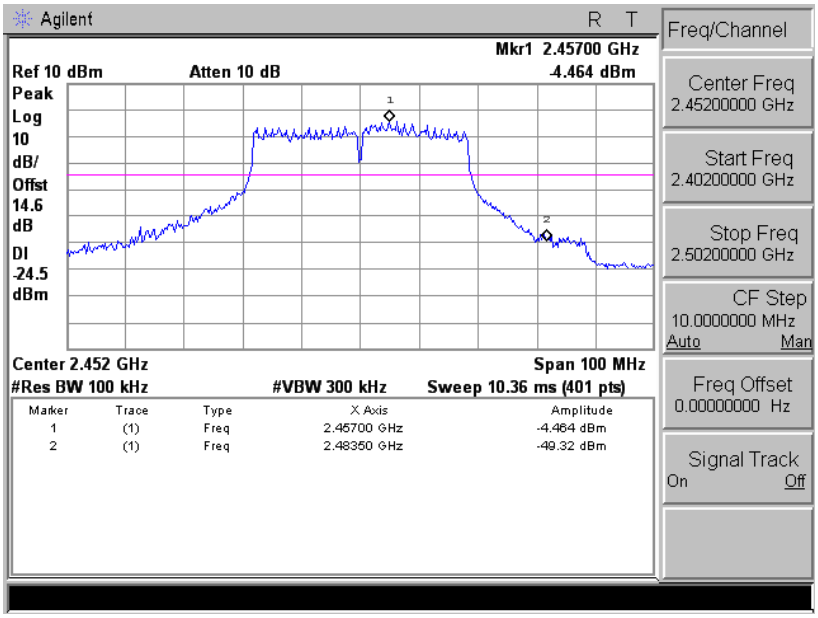

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_Ant-2	
2422	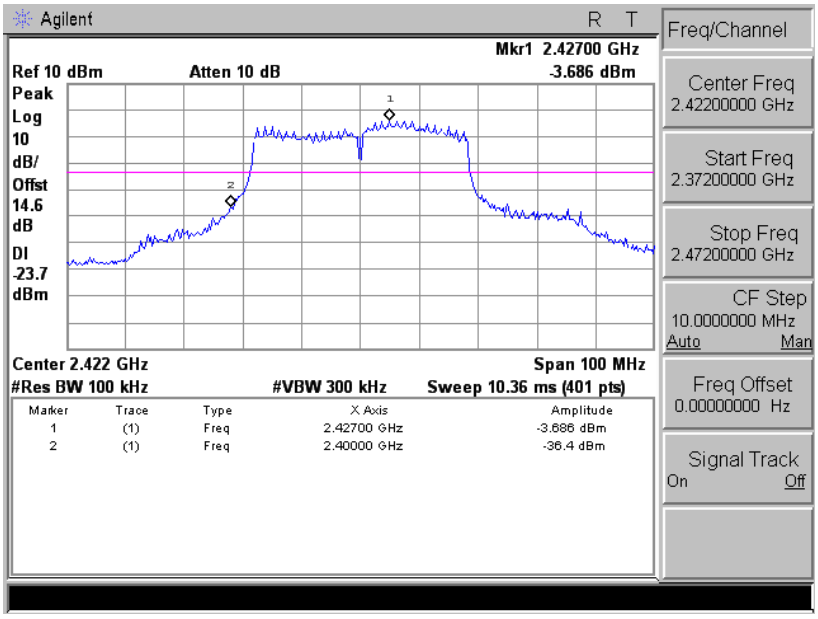
2452	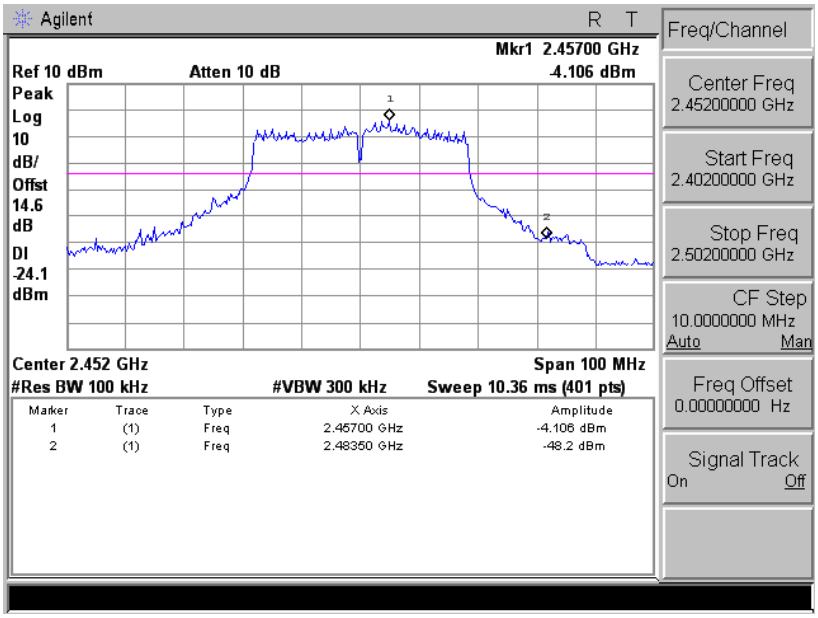

10 Band Edges Measurement

10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

10.2.Test Setup

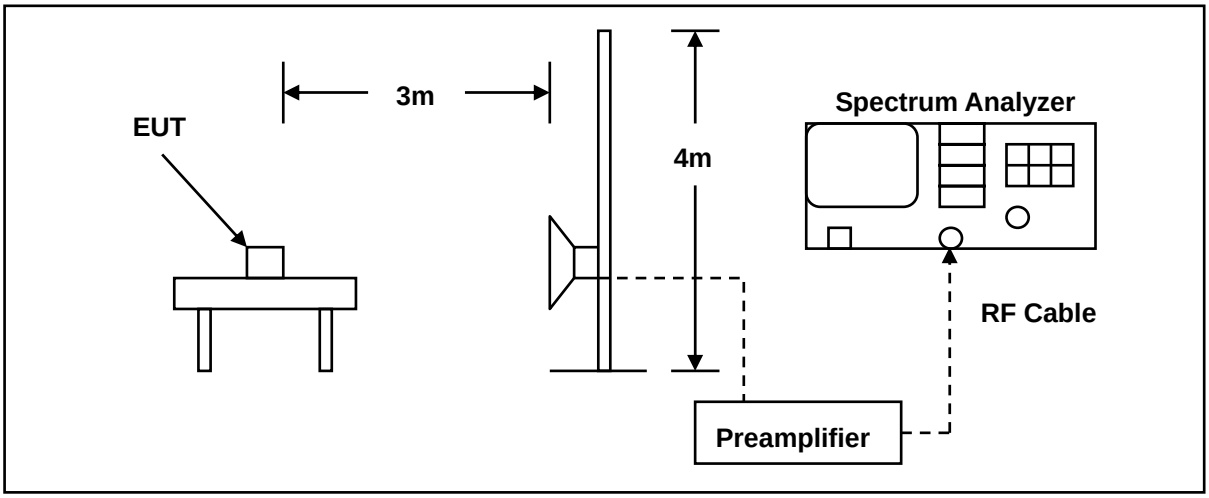

10.3.Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/10/2014	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/10/2014	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2014	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2014	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/11/2014	(1)
Test Site	ATL	TE01	888001	08/28/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.
Note: N.C.R. = No Calibration Request.

10.4. Test Procedure

The EUT was setup to ANSI C63.4:2014; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

10.5.Test Result

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	09/19/2014
Frequency:	2412 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2387.220	56.21	-1.96	54.25	74.00	-19.75	peak	H
2387.220	50.59	-1.96	48.63	54.00	-5.37	AVG	H
2390.000	55.10	-1.94	53.16	74.00	-20.84	peak	H
2390.000	47.02	-1.94	45.08	54.00	-8.92	AVG	H
2388.760	58.65	-1.96	56.69	74.00	-17.31	peak	V
2388.760	53.60	-1.96	51.64	54.00	-2.36	AVG	V
2390.000	55.82	-1.94	53.88	74.00	-20.12	peak	V
2390.000	49.10	-1.94	47.16	54.00	-6.84	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	09/19/2014
Frequency:	2462 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	54.60	-1.52	53.08	74.00	-20.92	peak	H
2483.500	50.21	-1.52	48.69	54.00	-5.31	AVG	H
2486.760	59.73	-1.51	58.22	74.00	-15.78	peak	H
2486.760	52.17	-1.51	50.66	54.00	-3.34	AVG	H
2483.500	53.03	-1.52	51.51	74.00	-22.49	peak	V
2486.760	55.78	-1.51	54.27	74.00	-19.73	peak	V
2486.760	50.81	-1.51	49.30	54.00	-4.70	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	09/19/2014
Frequency:	2412 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2389.750	74.12	-1.94	72.18	74.00	-1.82	peak	H
2389.750	53.36	-1.94	51.42	54.00	-2.58	AVG	H
2390.000	71.43	-1.94	69.49	74.00	-4.51	peak	H
2390.000	53.81	-1.94	51.87	54.00	-2.13	AVG	H
2389.530	70.39	-1.95	68.44	74.00	-5.56	peak	V
2389.530	52.13	-1.95	50.18	54.00	-3.82	AVG	V
2390.000	70.09	-1.94	68.15	74.00	-5.85	peak	V
2390.000	52.99	-1.94	51.05	54.00	-2.95	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	09/19/2014
Frequency:	2462 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	64.71	-1.52	63.19	74.00	-10.81	peak	H
2483.500	47.43	-1.52	45.91	54.00	-8.09	AVG	H
2484.120	64.96	-1.51	63.45	74.00	-10.55	peak	H
2484.120	46.71	-1.51	45.20	54.00	-8.80	AVG	H
2483.500	63.11	-1.52	61.59	74.00	-12.41	peak	V
2483.500	46.27	-1.52	44.75	54.00	-9.25	AVG	V
2484.600	61.96	-1.51	60.45	74.00	-13.55	peak	V
2484.600	44.58	-1.51	43.07	54.00	-10.93	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	09/19/2014
Frequency:	2412 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2388.870	62.82	-1.96	60.86	74.00	-13.14	peak	H
2388.870	49.16	-1.96	47.20	54.00	-6.80	AVG	H
2390.000	64.92	-1.94	62.98	74.00	-11.02	peak	H
2390.000	52.82	-1.94	50.88	54.00	-3.12	AVG	H
2389.200	69.37	-1.96	67.41	74.00	-6.59	peak	V
2389.200	49.74	-1.96	47.78	54.00	-6.22	AVG	V
2390.000	70.35	-1.94	68.41	74.00	-5.59	peak	V
2390.000	52.33	-1.94	50.39	54.00	-3.61	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	09/19/2014
Frequency:	2462 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	60.47	-1.52	58.95	74.00	-15.05	peak	H
2483.500	46.60	-1.52	45.08	54.00	-8.92	AVG	H
2483.880	60.95	-1.51	59.44	74.00	-14.56	peak	H
2483.880	46.09	-1.51	44.58	54.00	-9.42	AVG	H
2483.500	55.64	-1.52	54.12	74.00	-19.88	peak	V
2483.500	44.91	-1.52	43.39	54.00	-10.61	AVG	V
2483.720	62.24	-1.52	60.72	74.00	-13.28	peak	V
2483.720	44.66	-1.52	43.14	54.00	-10.86	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	09/19/2014
Frequency:	2422 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2387.280	67.91	-1.96	65.95	74.00	-8.05	peak	H
2387.280	50.03	-1.96	48.07	54.00	-5.93	AVG	H
2390.000	65.53	-1.94	63.59	74.00	-10.41	peak	H
2390.000	53.17	-1.94	51.23	54.00	-2.77	AVG	H
2389.560	66.80	-1.95	64.85	74.00	-9.15	peak	V
2389.560	51.97	-1.95	50.02	54.00	-3.98	AVG	V
2390.000	65.14	-1.94	63.20	74.00	-10.80	peak	V
2390.000	52.49	-1.94	50.55	54.00	-3.45	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC785S-500	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	09/19/2014
Frequency:	2452 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	64.91	-1.52	63.39	74.00	-10.61	peak	H
2483.500	50.24	-1.52	48.72	54.00	-5.28	AVG	H
2488.400	66.55	-1.49	65.06	74.00	-8.94	peak	H
2488.400	48.45	-1.49	46.96	54.00	-7.04	AVG	H
2483.500	61.03	-1.52	59.51	74.00	-14.49	peak	V
2483.500	48.80	-1.52	47.28	54.00	-6.72	AVG	V
2487.500	65.67	-1.50	64.17	74.00	-9.83	peak	V
2487.500	47.70	-1.50	46.20	54.00	-7.80	AVG	V

11 Antenna Measurement

11.1. Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Antenna Connector Construction

The antenna used in this product is IFA antenna. And the maximum Gain of this antenna is only 2.2 dBi.