


Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C)
Approval Holder:	Netgear Inc.	11G CH6
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 11.271GHz, Emax: 49.12dBμV/m, RBW: 1MHz	

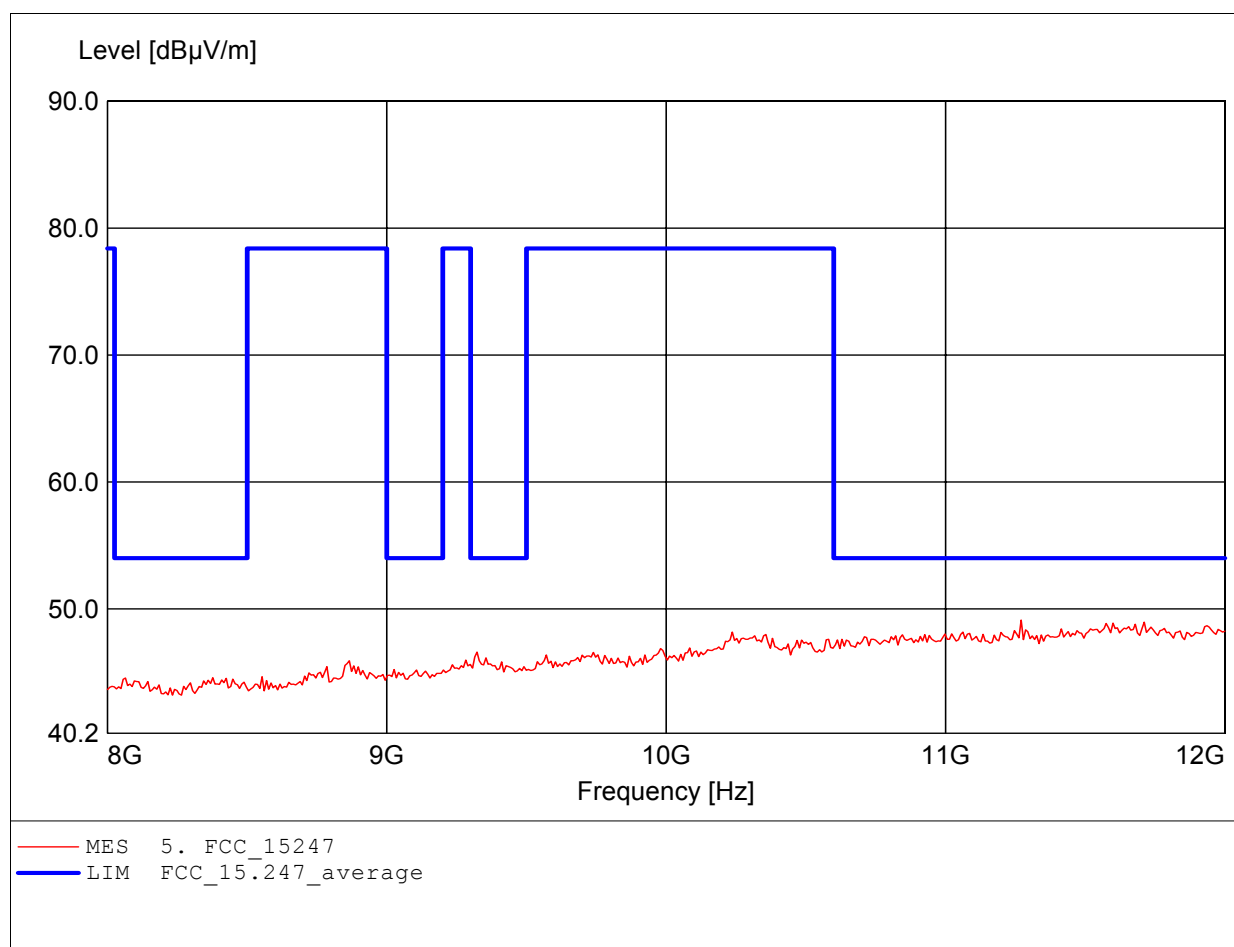

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 11.880GHz, Emax: 49.23dBμV/m, RBW: 1MHz	

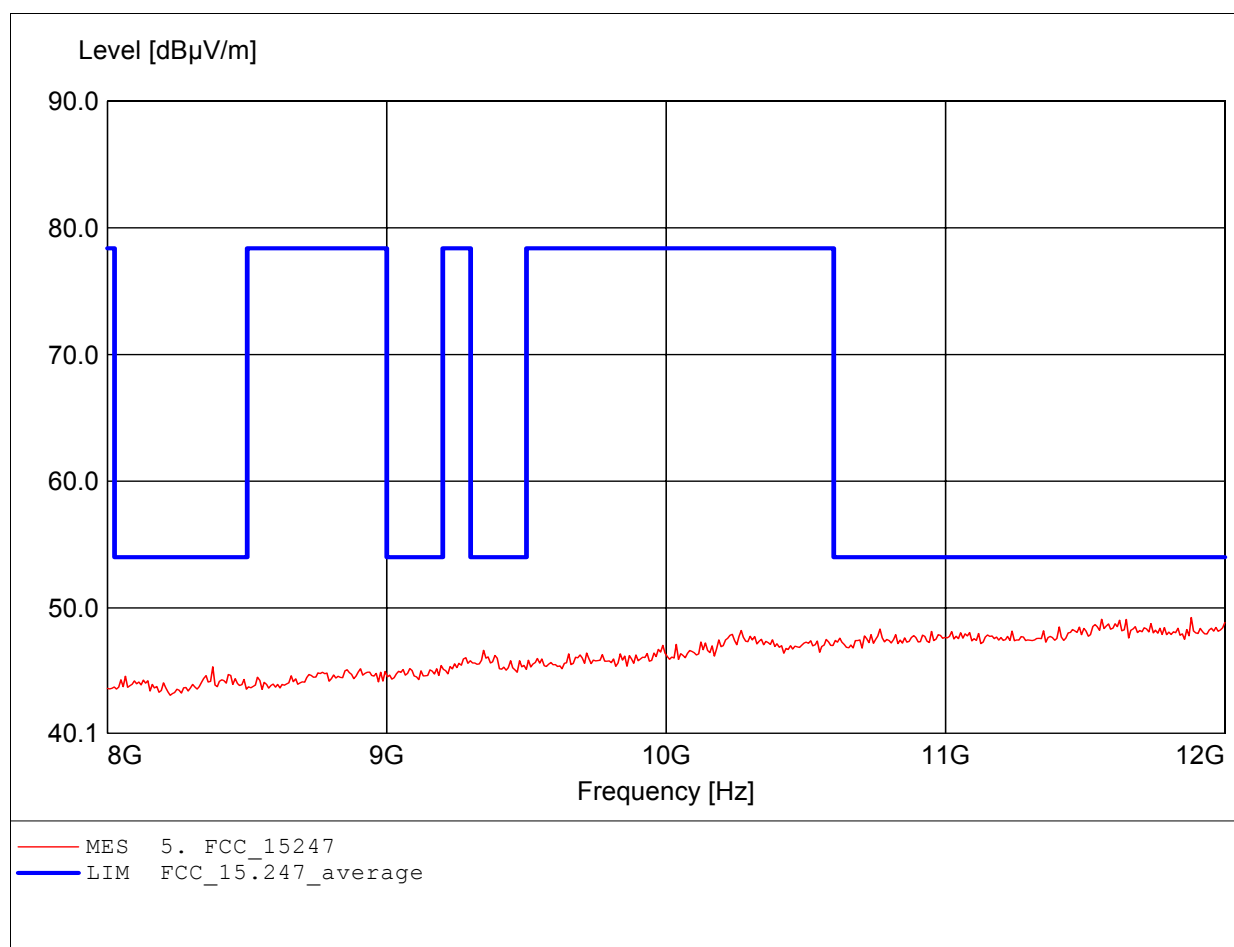

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: WIRELESS ADSL FIREWALL ROUTER
MODEL NO.: DG834G V2 Type of Antenna (C) 11G CH6
Approval Holder: Netgear Inc.
Test Site / Operator: ETS / Orville Chang
Temperature/Voltage: Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.784GHz, Emax: 53.21dBμV/m, RBW: 1MHz

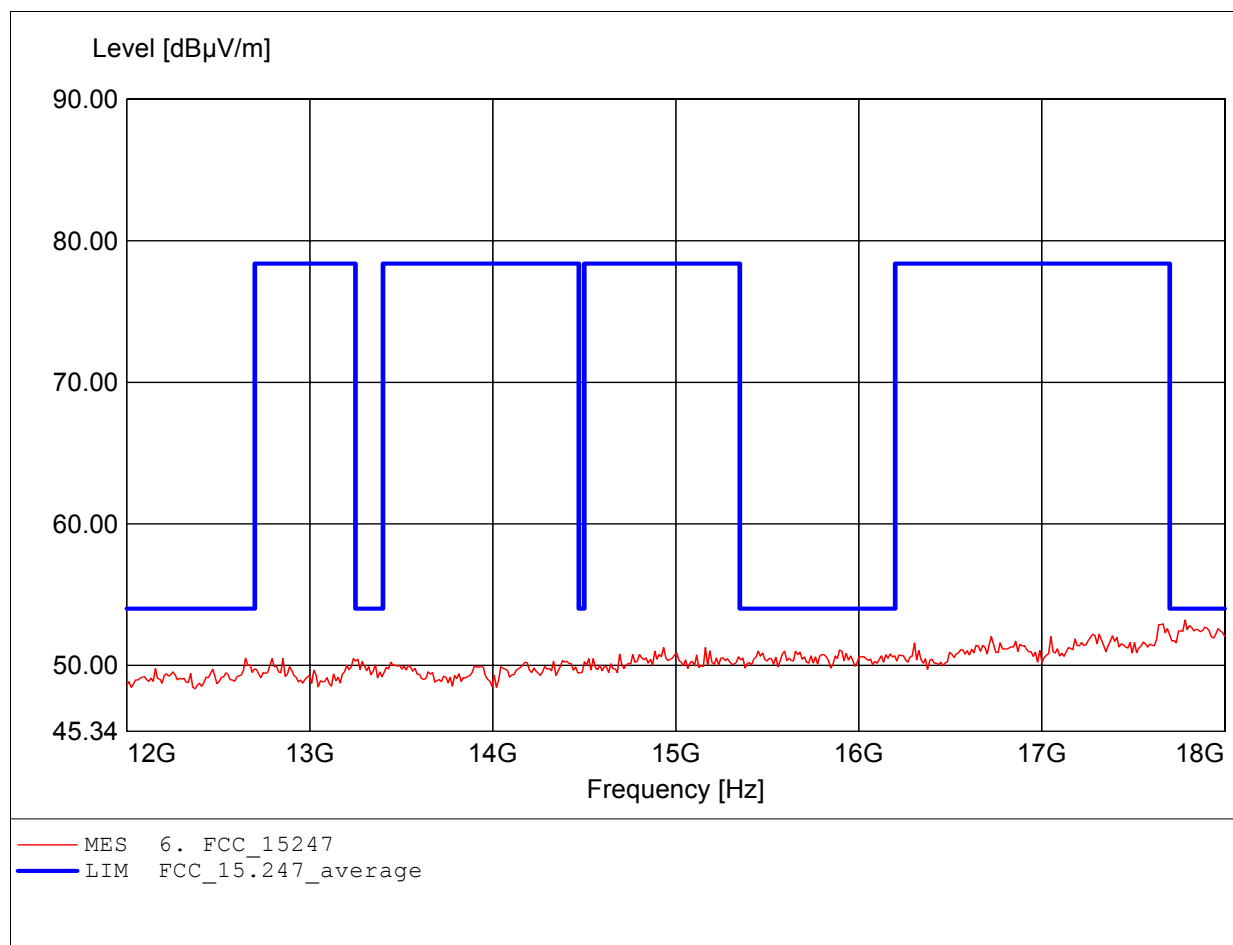

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C)
Approval Holder:	Netgear Inc.	11G CH6
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 17.832GHz, Emax: 53.22dBμV/m, RBW: 1MHz	

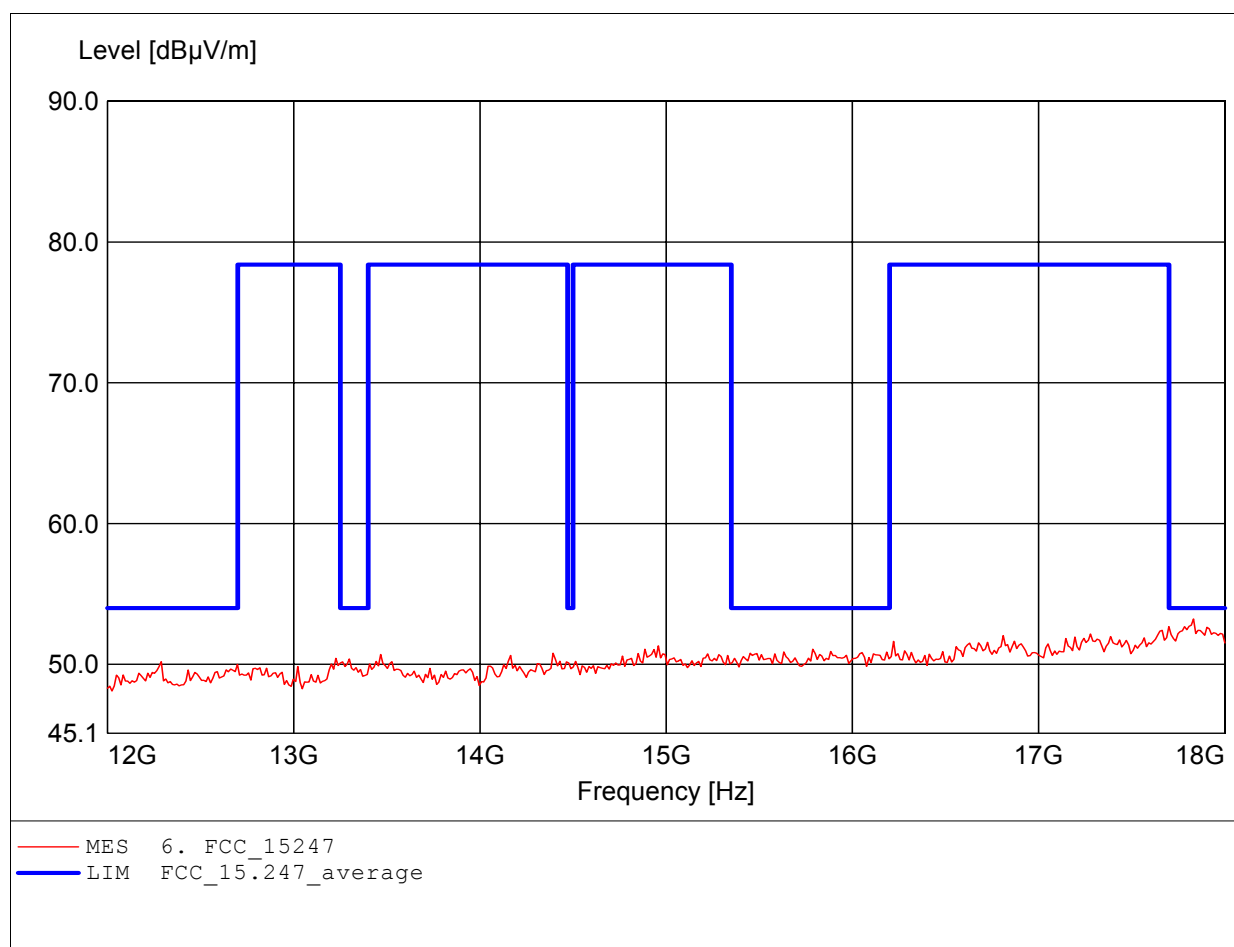

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C)
Approval Holder:	Netgear Inc.	11G CH6
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 25.597GHz, Emax: 53.31dBμV/m, RBW: 1MHz	

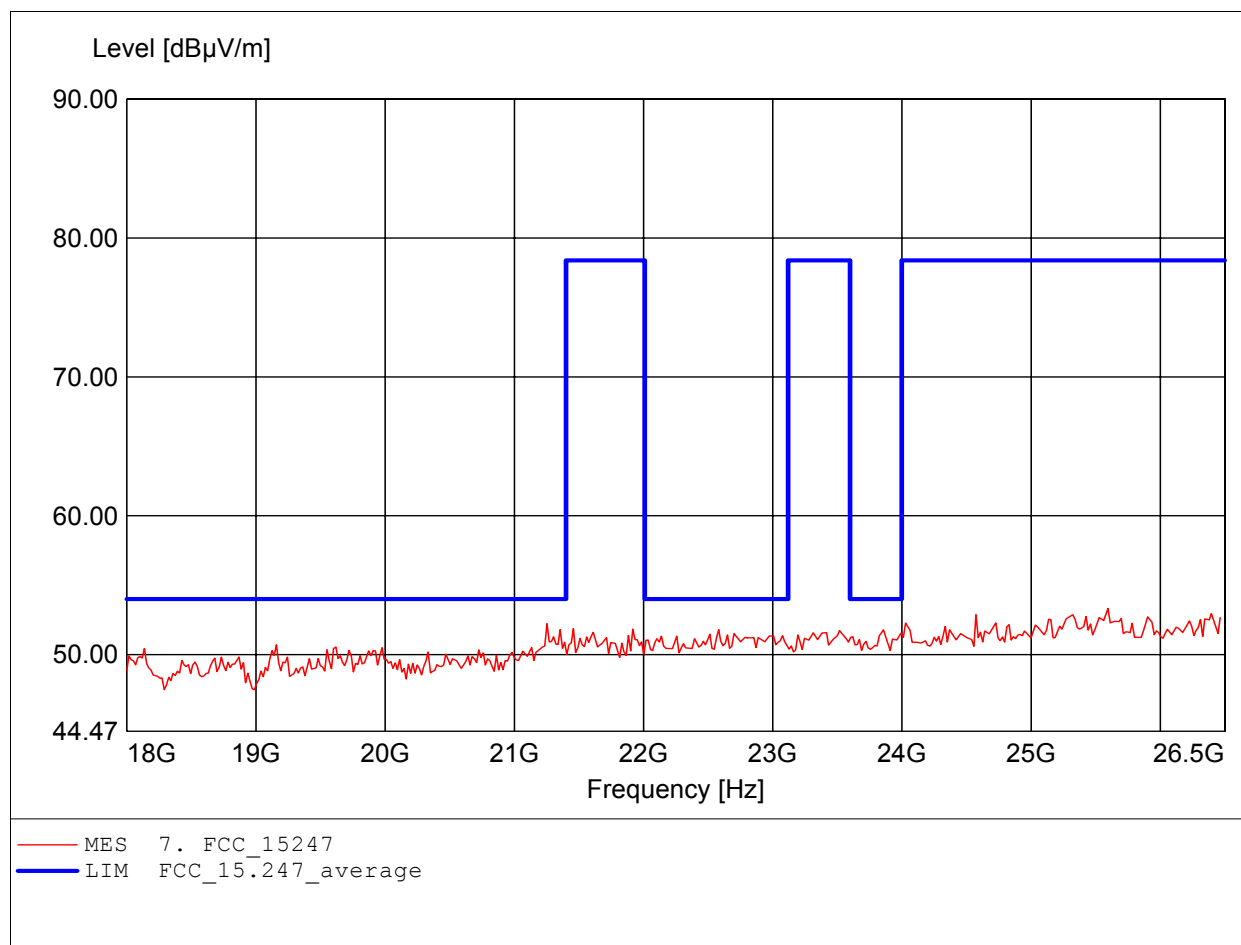

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 25.546GHz, Emax: 53.38dBμV/m, RBW: 1MHz	

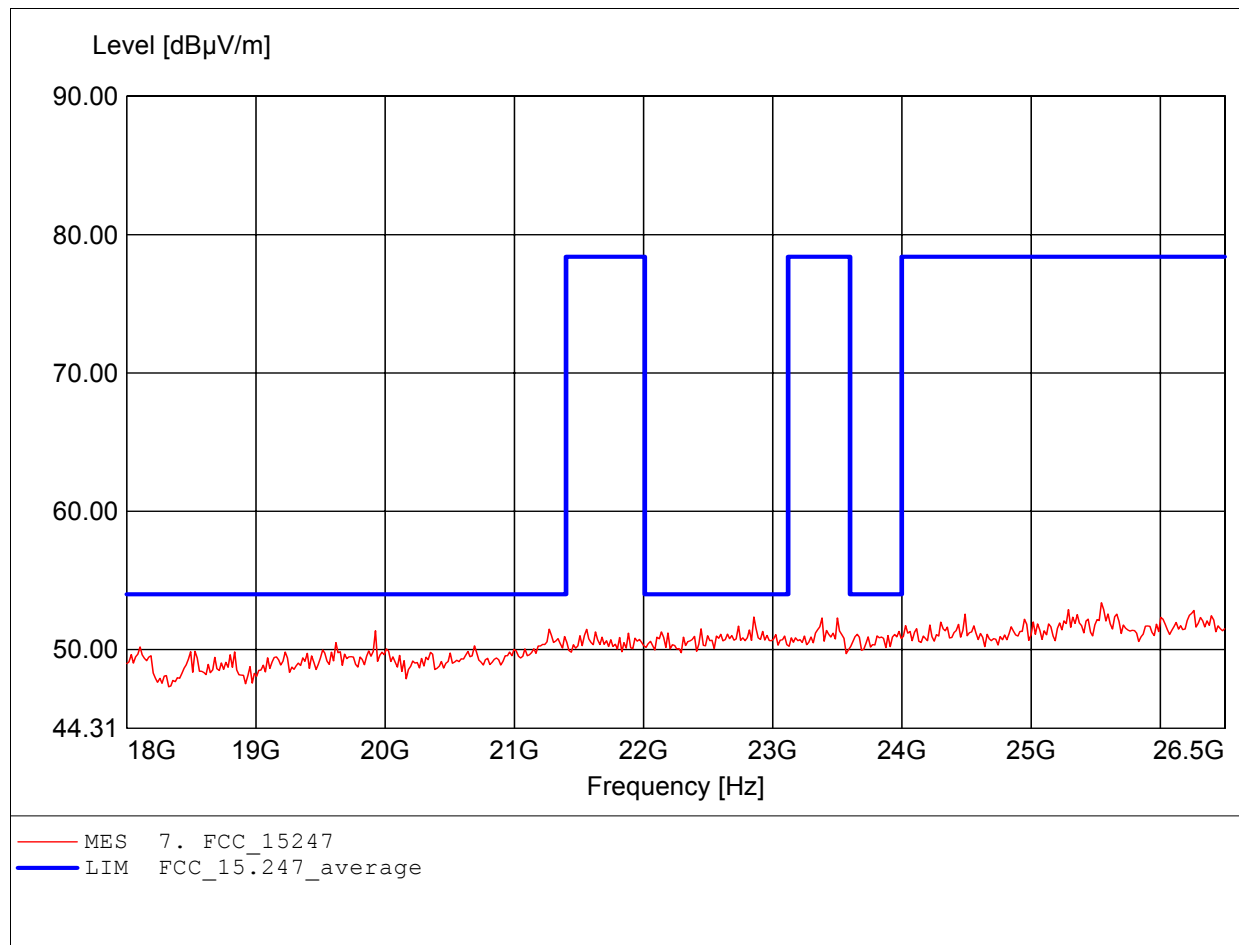

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C)
Approval Holder:	Netgear Inc.	11G CH11
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HK 116	
	Freq: 187.735MHz, Emax: 42.62dBµV/m, RBW: 100kHz	

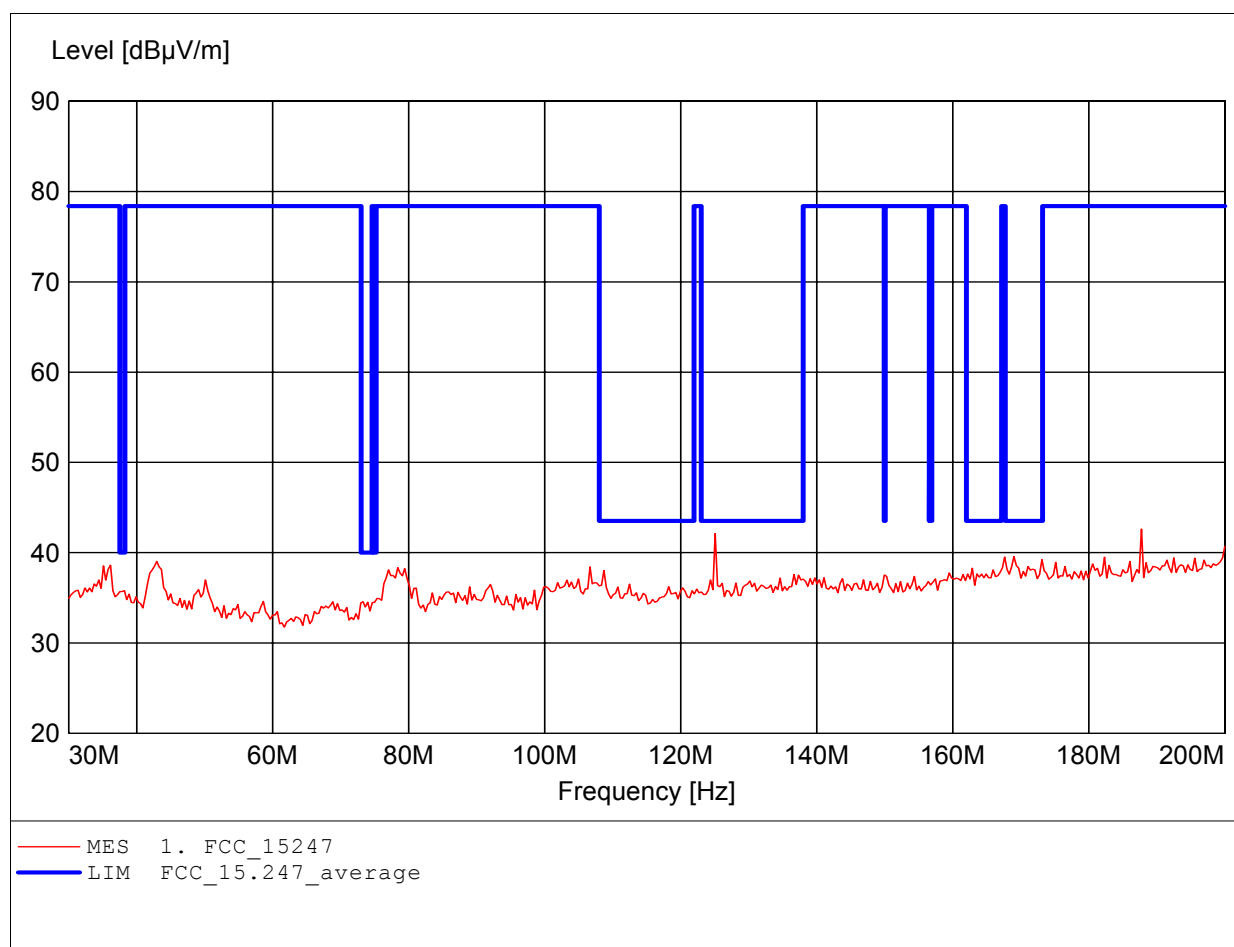

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HK 116	
	Freq: 187.735MHz, Emax: 42.91dBµV/m, RBW: 100kHz	

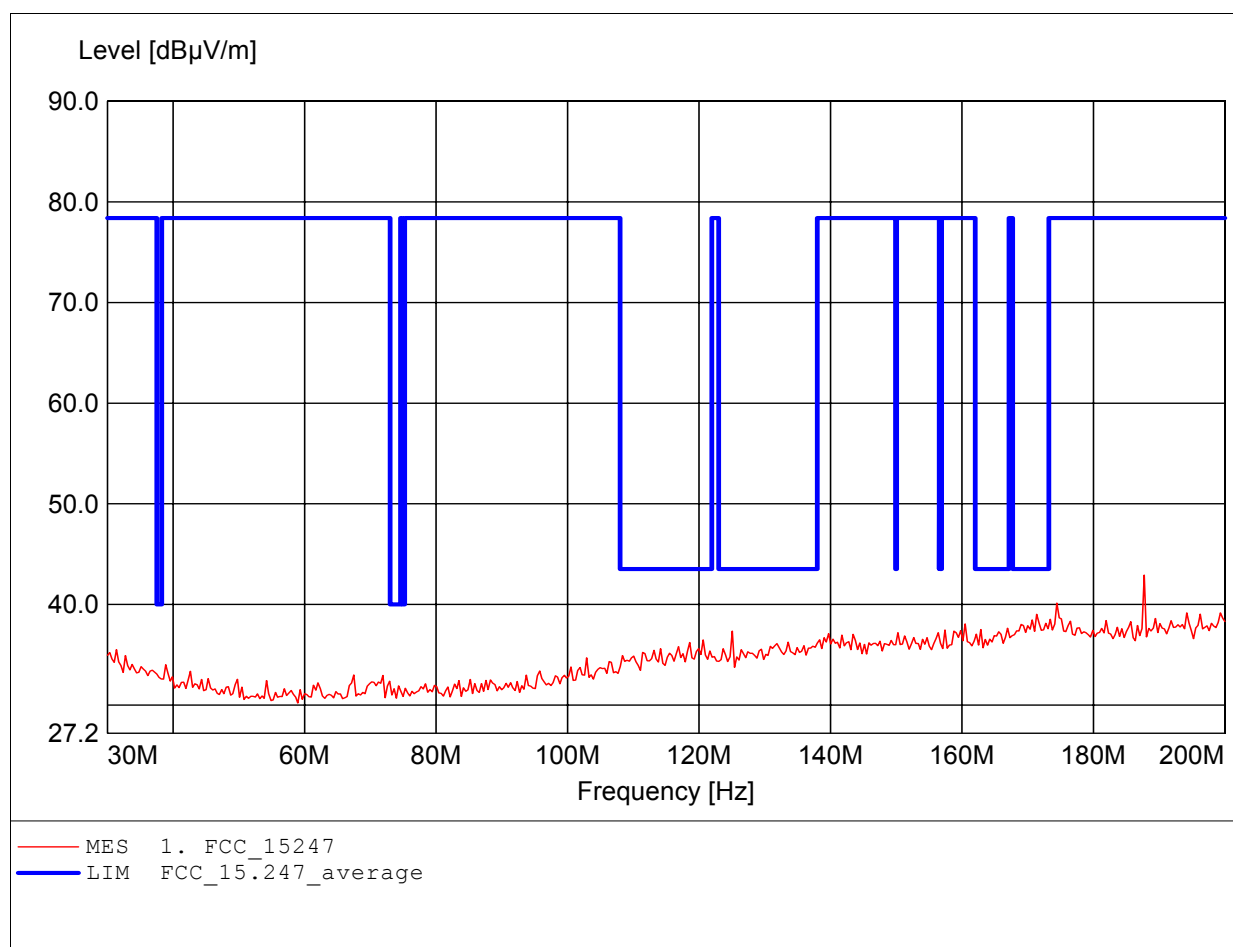

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HL 223,	
	Freq: 249.699MHz, Emax: 42.02dBµV/m, RBW: 100kHz	

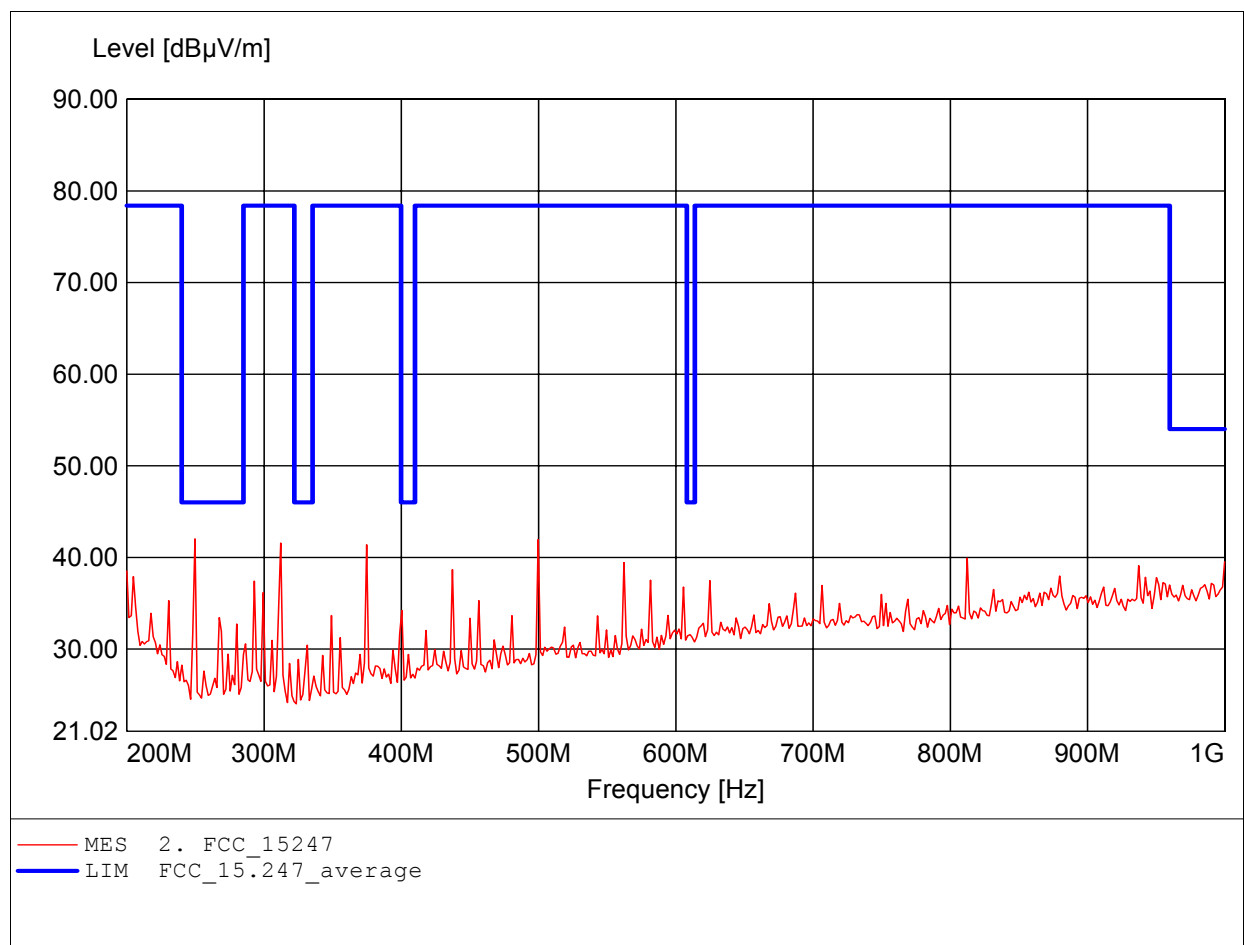

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HL 223,	
	Freq: 499.800MHz, Emax: 46.30dBµV/m, RBW: 100kHz	

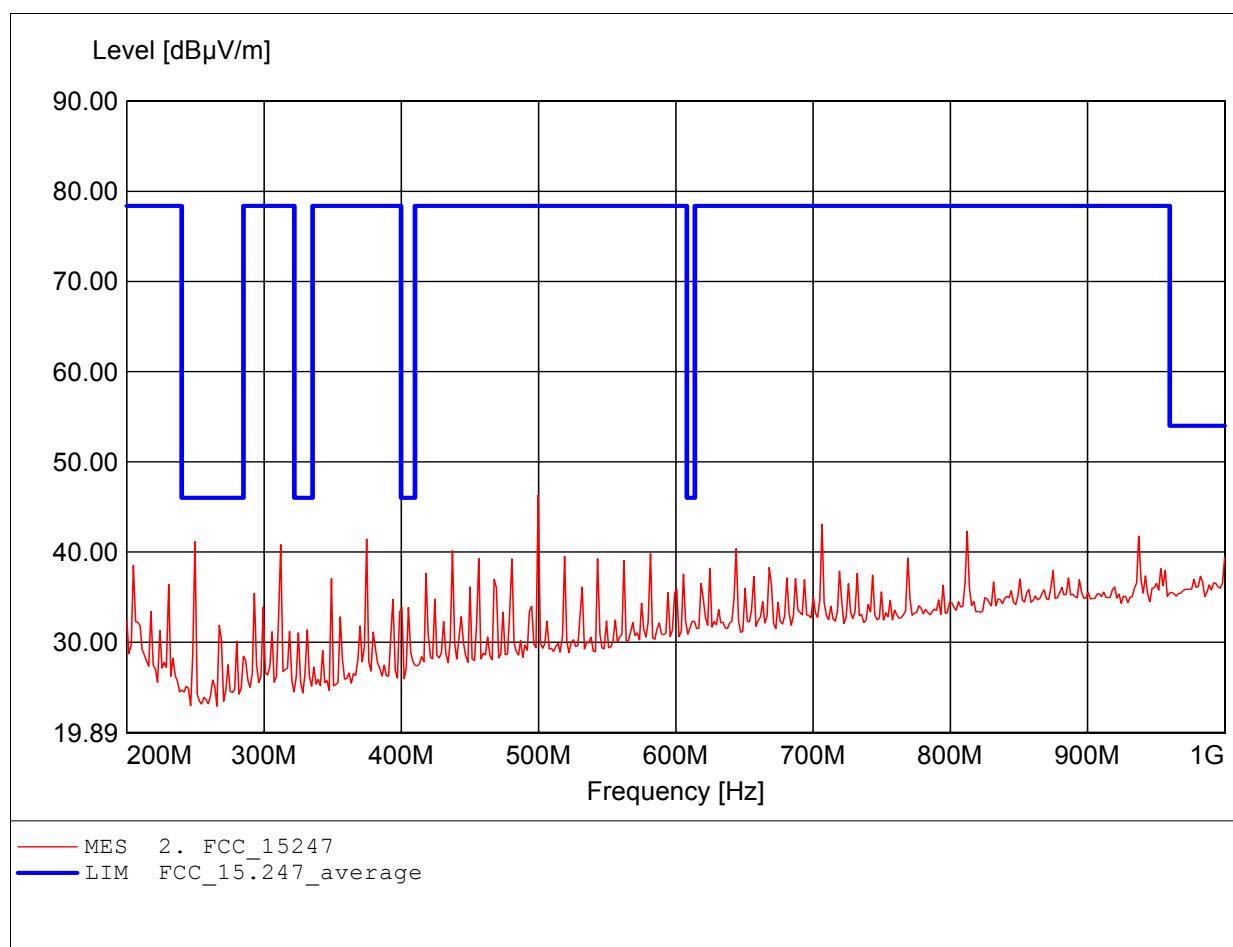

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 2.088GHz, Emax: 49.73dBμV/m, RBW: 1MHz	

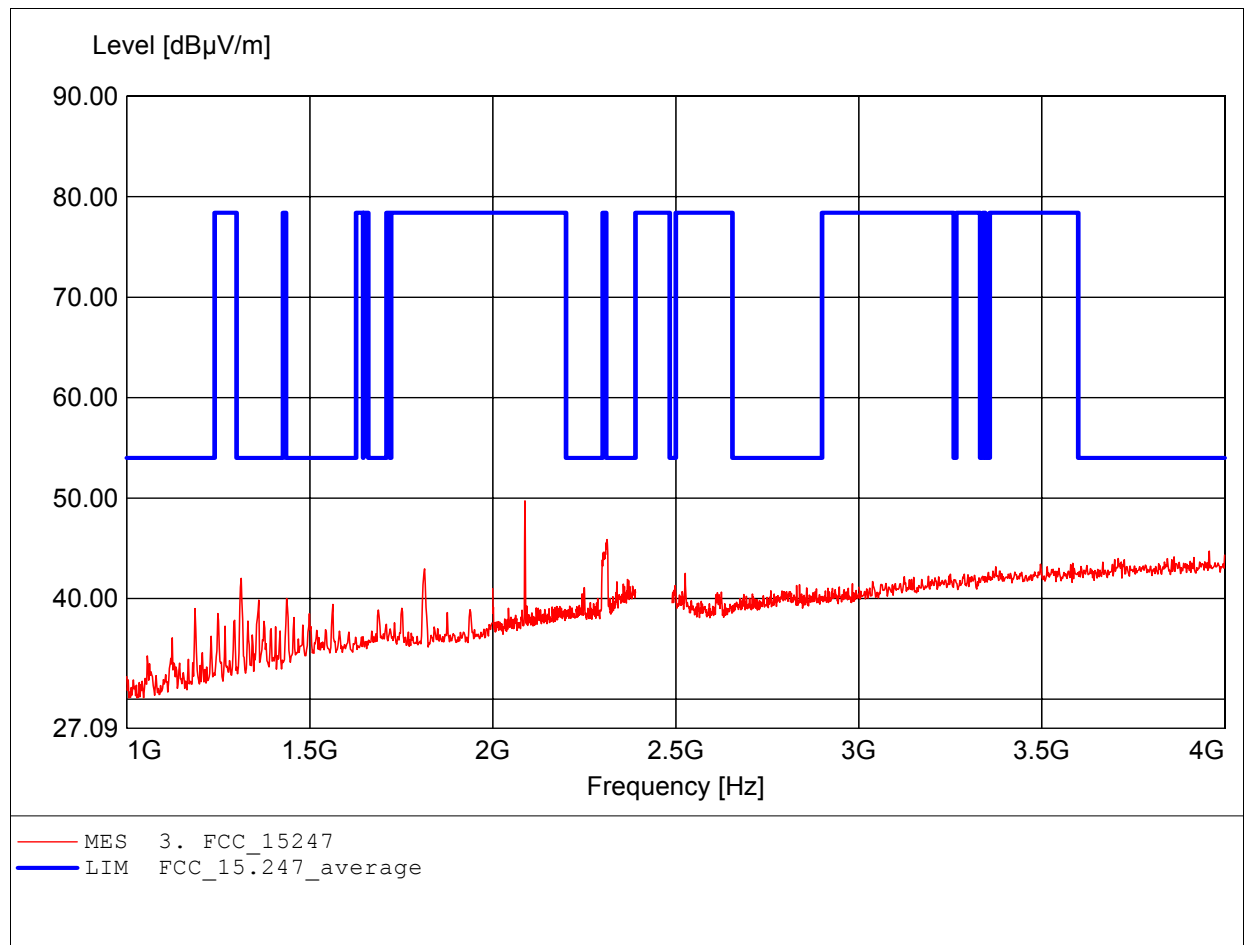

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 2.088GHz, Emax: 45.43dBμV/m, RBW: 1MHz	

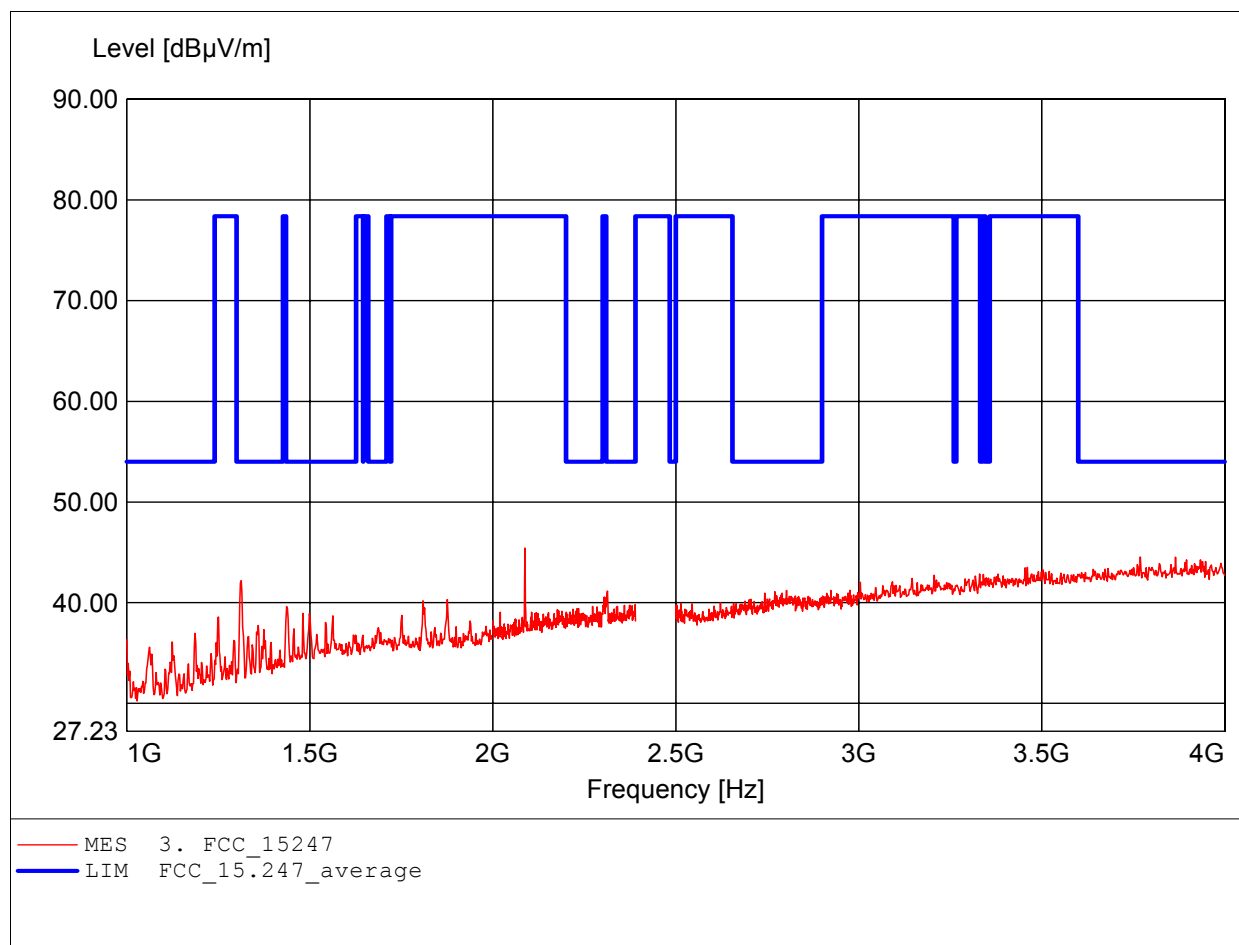

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 7.230GHz, Emax: 51.65dBµV/m, RBW: 1MHz	

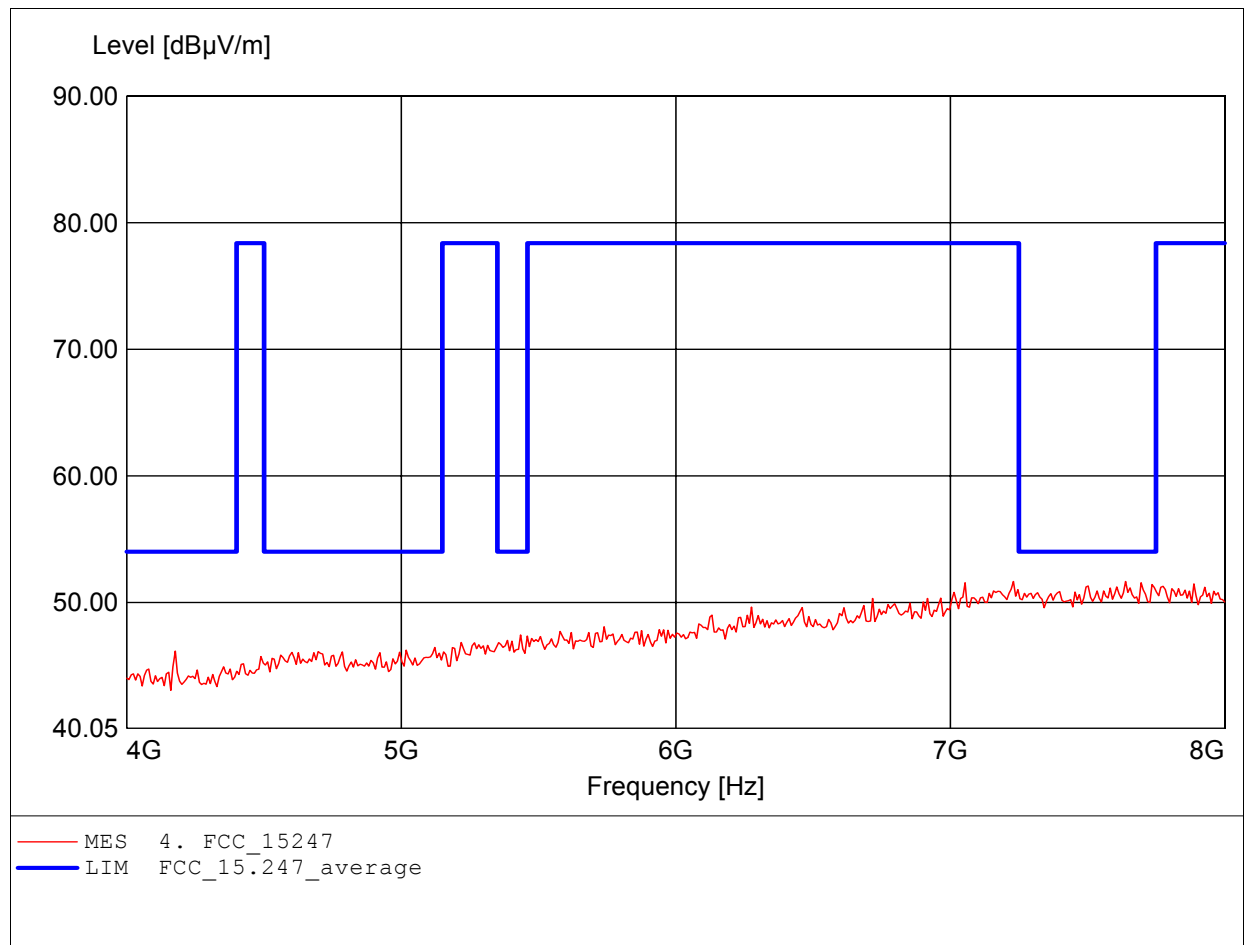

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 7.198GHz, Emax: 51.58dBµV/m, RBW: 1MHz	

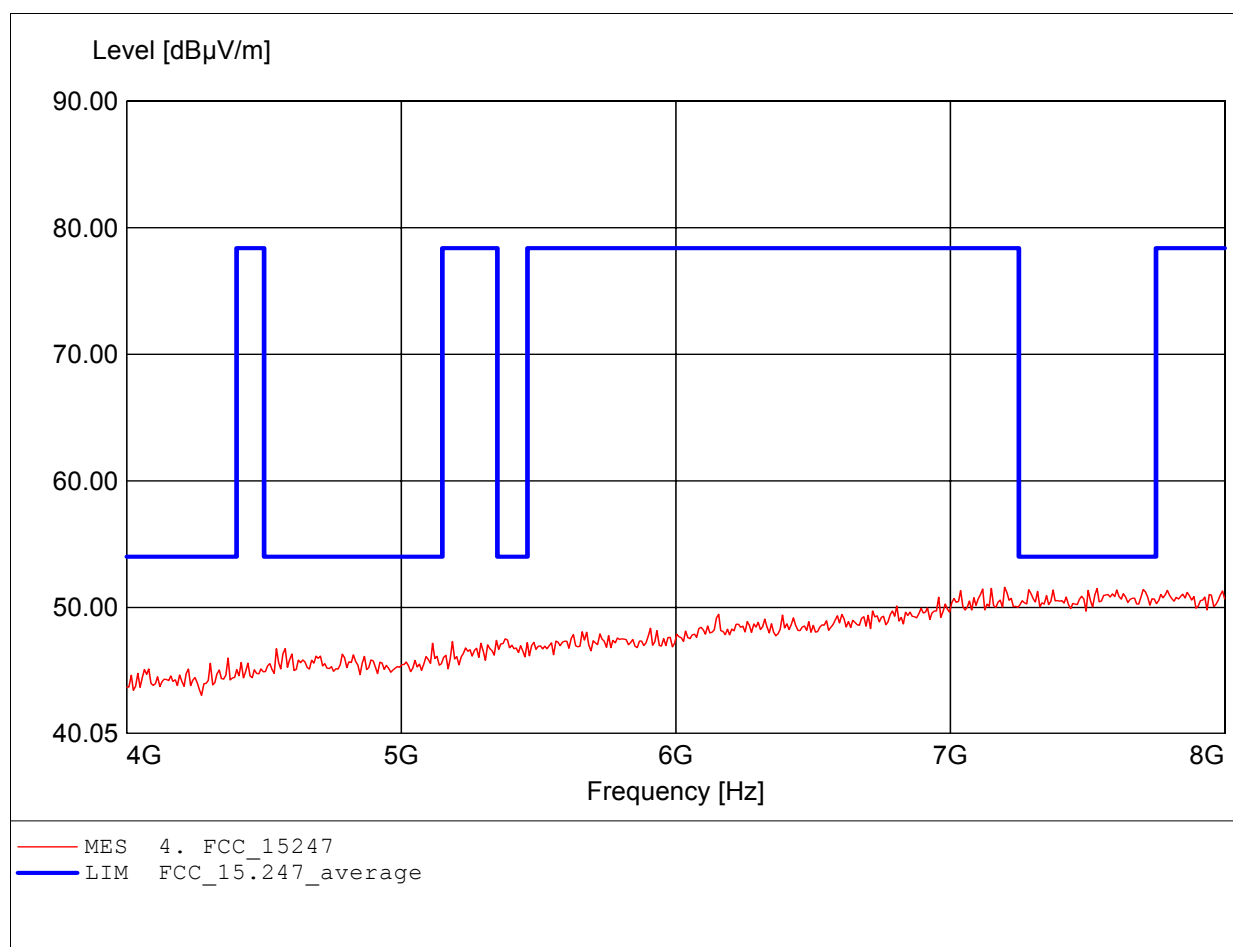

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 11.695GHz, Emax: 49.04dBμV/m, RBW: 1MHz	

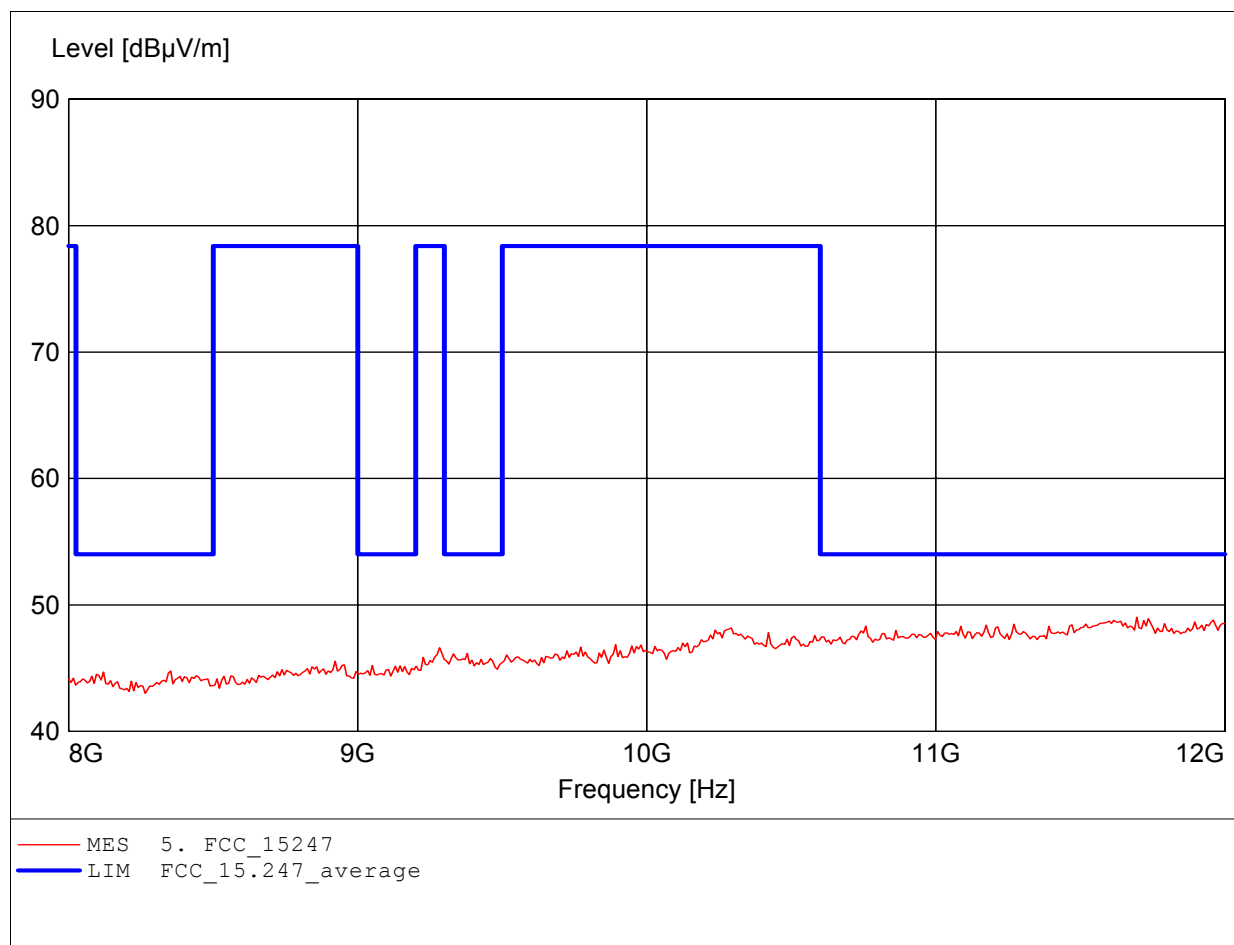

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 11.936GHz, Emax: 48.92dBμV/m, RBW: 1MHz	

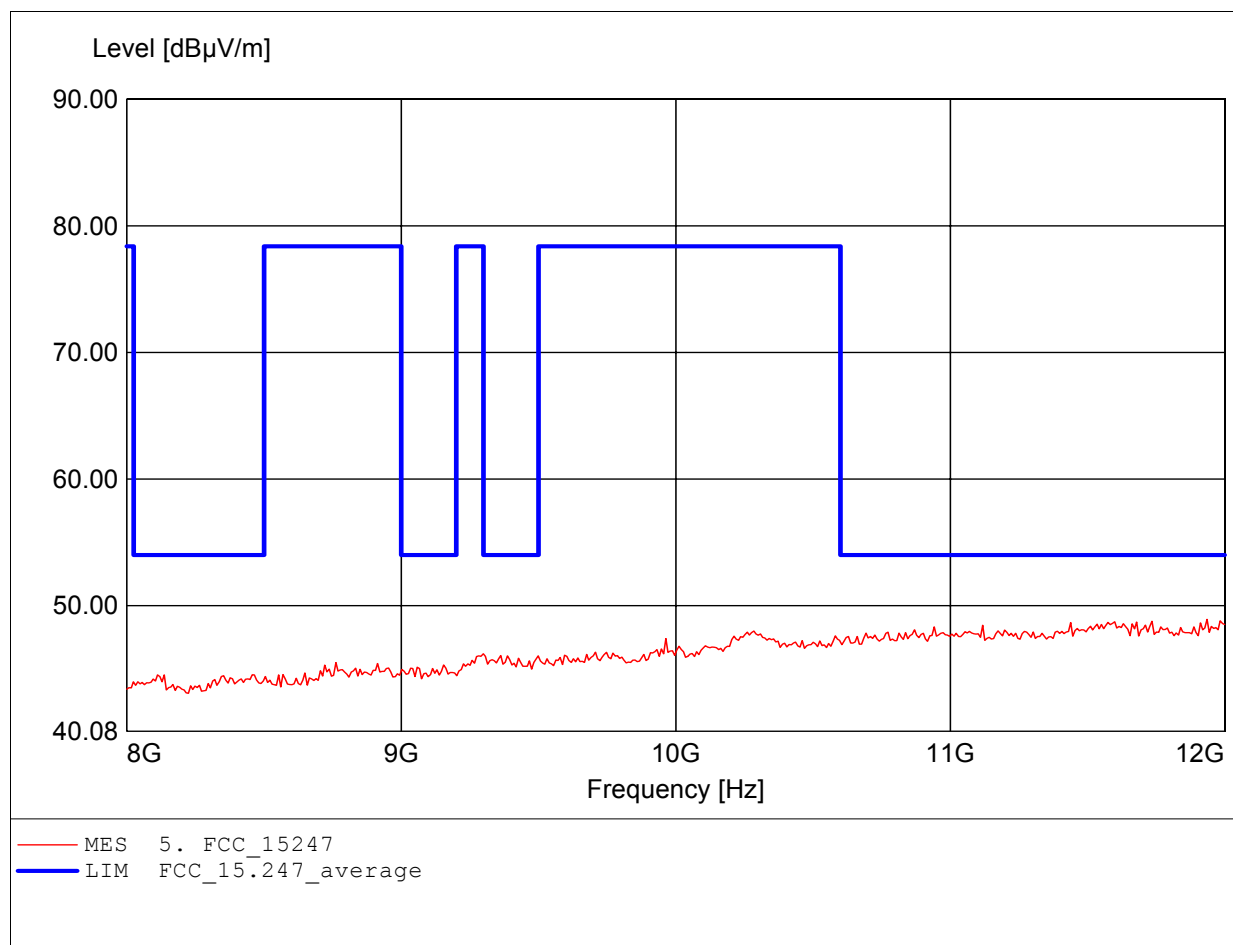

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 17.808GHz, Emax: 52.62dBμV/m, RBW: 1MHz	

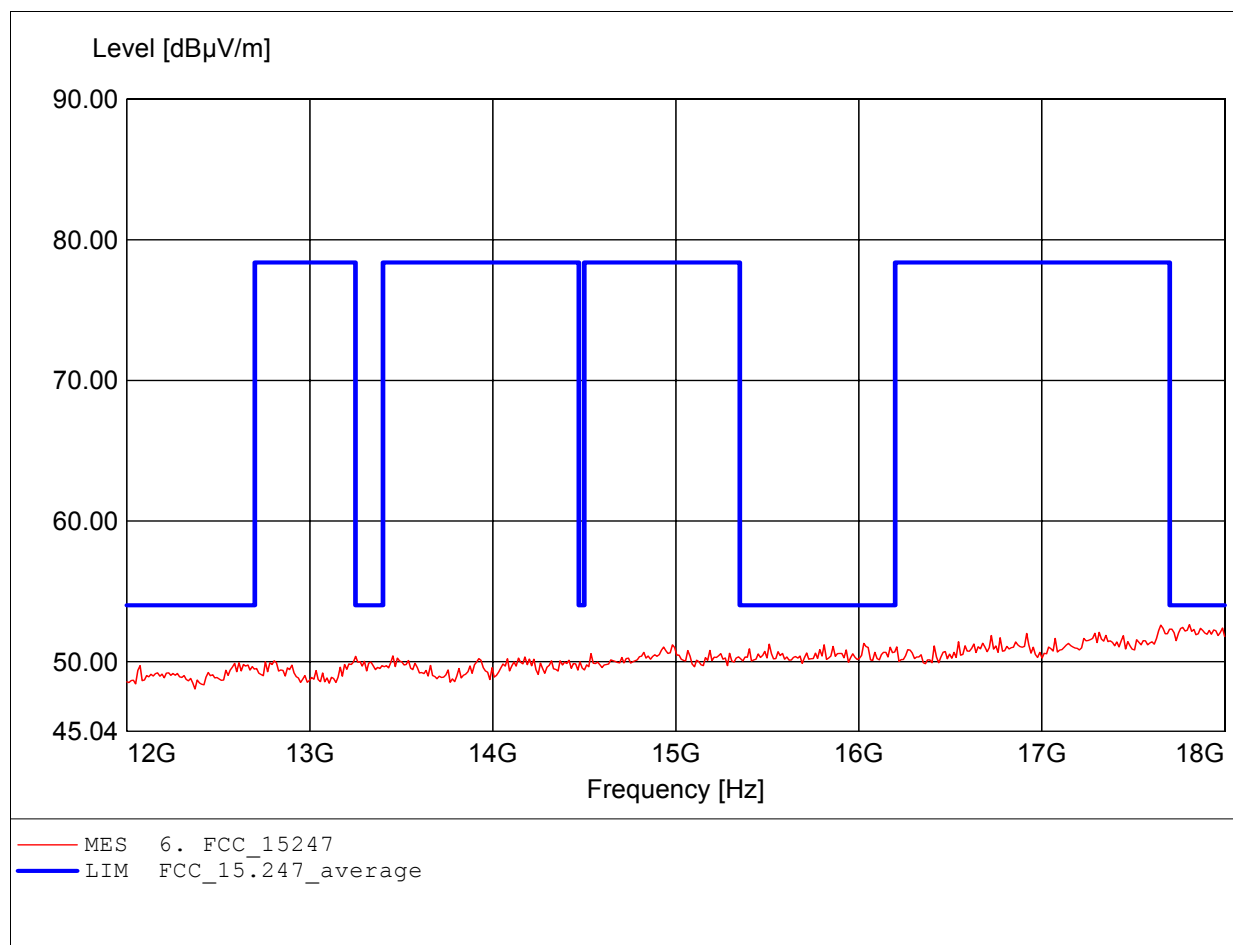

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 17.796GHz, Emax: 53.39dBμV/m, RBW: 1MHz	

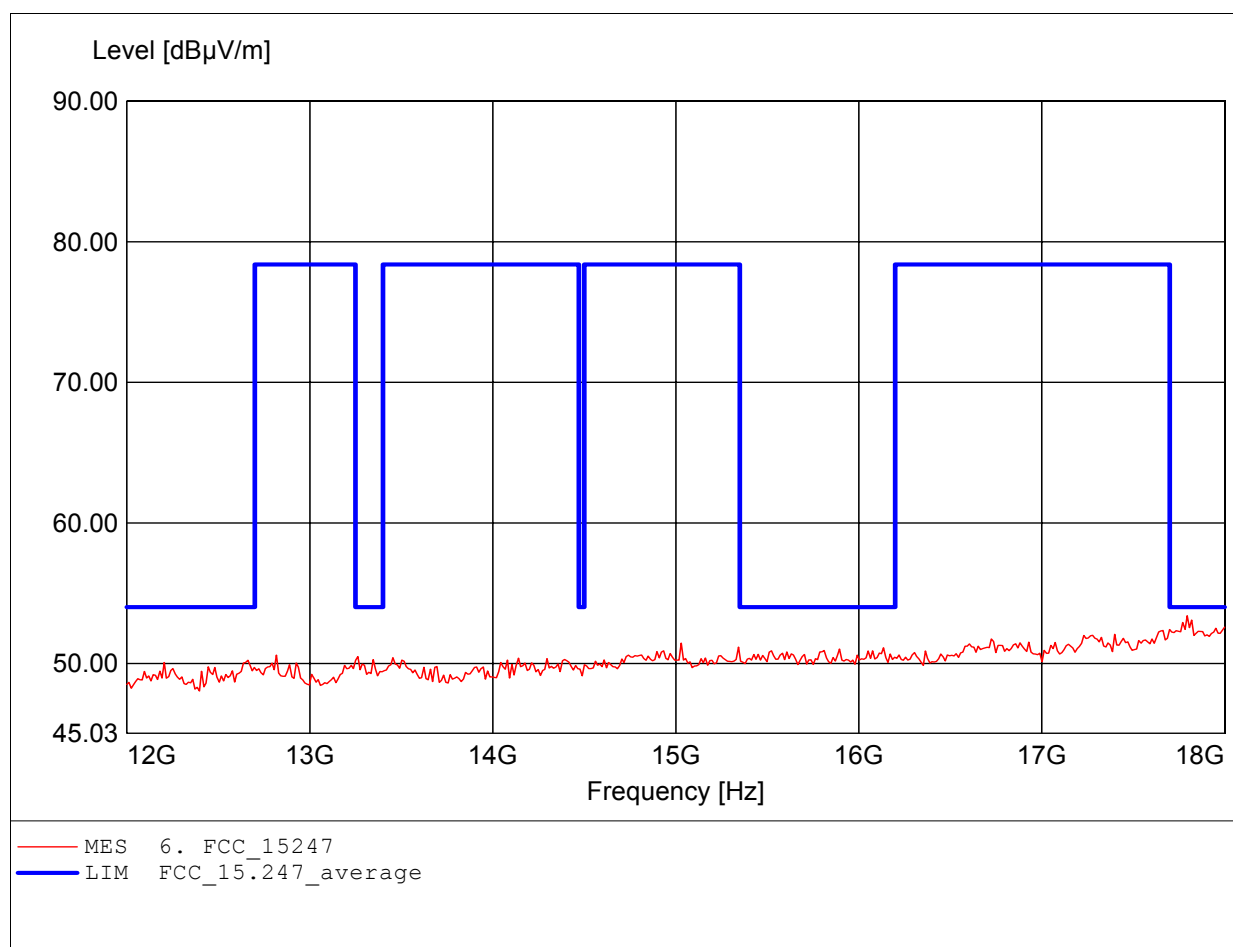

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 25.427GHz, Emax: 53.40dBμV/m, RBW: 1MHz	

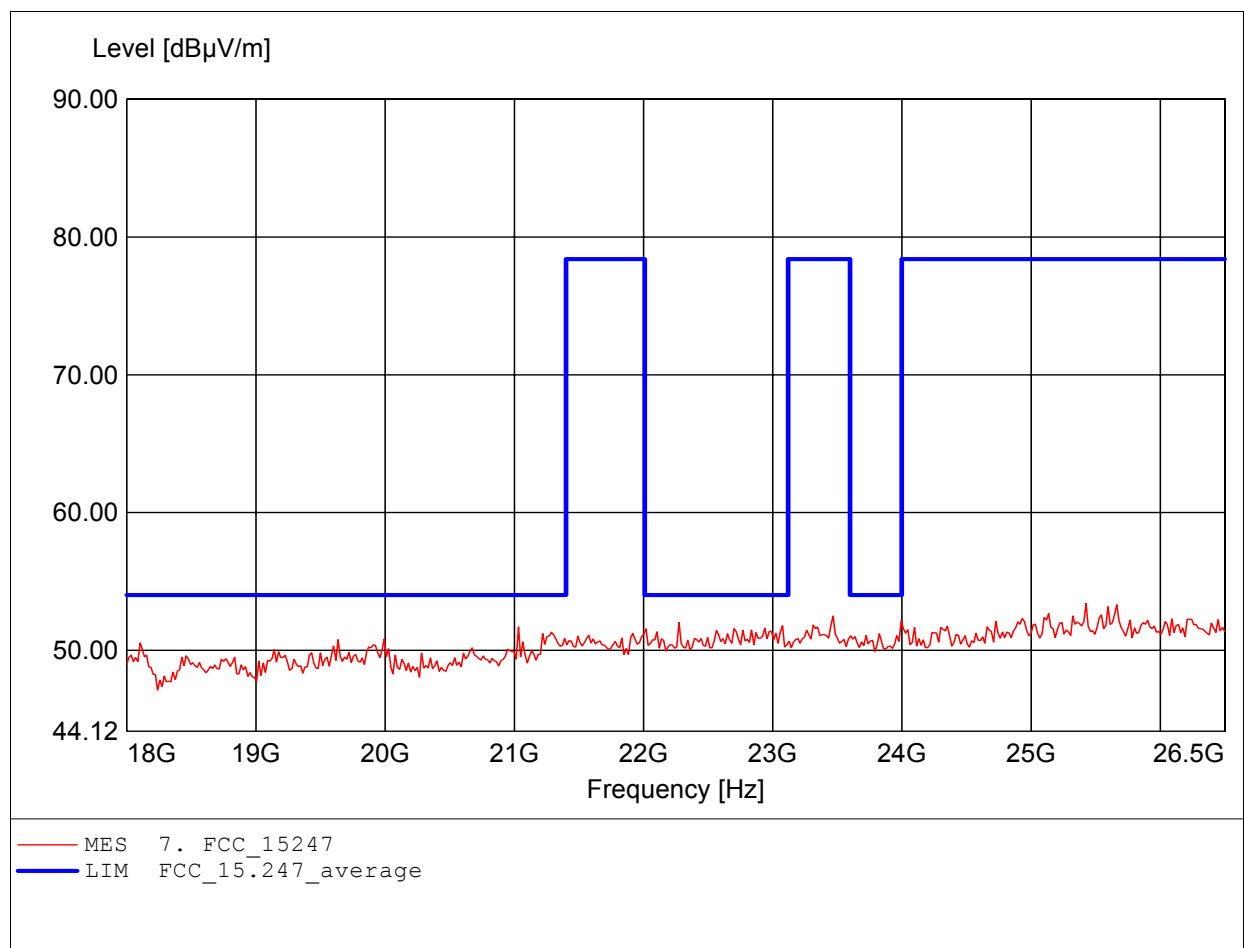

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (C) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 26.244GHz, Emax: 53.20dBμV/m, RBW: 1MHz	

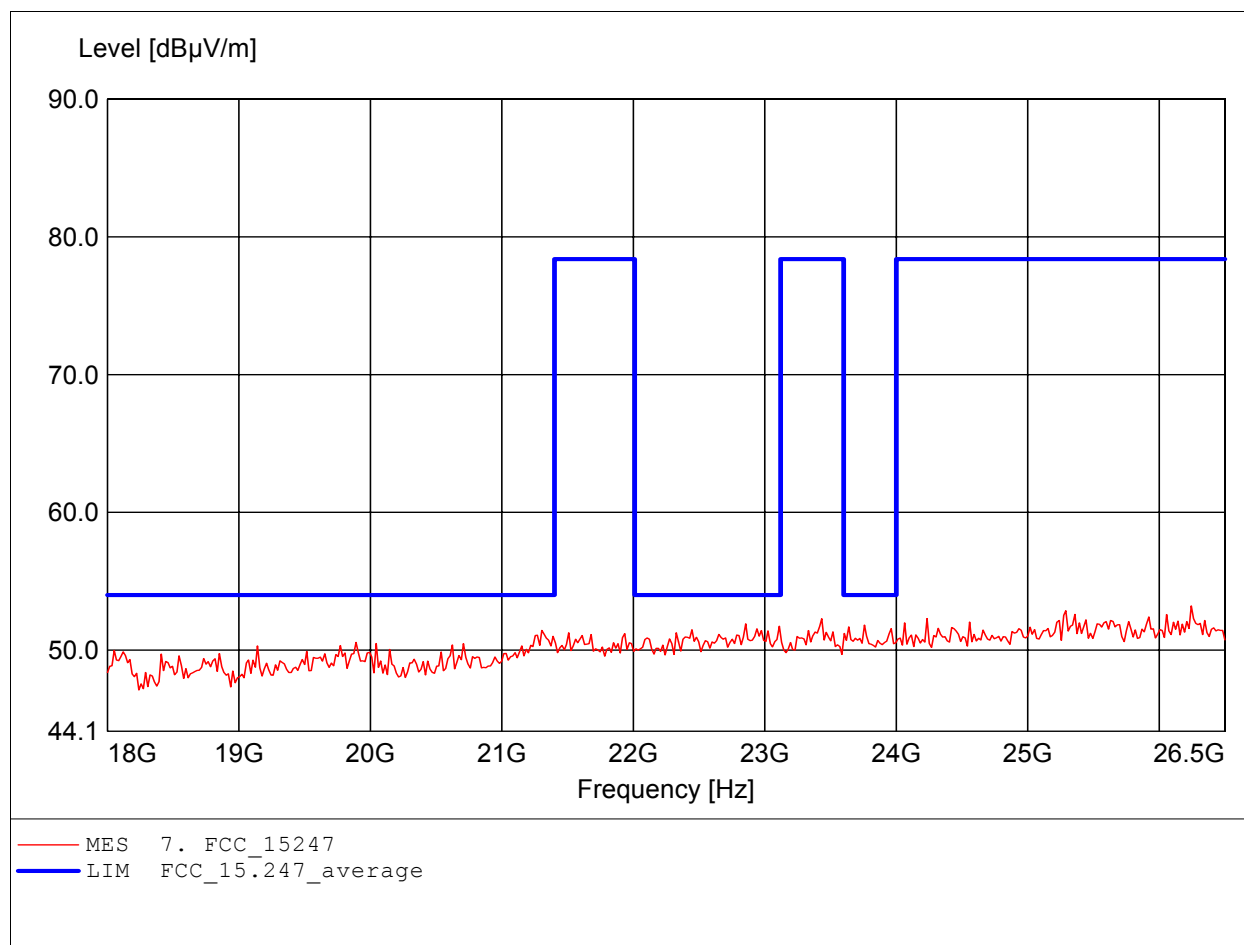

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HK 116	
	Freq: 187.735MHz, Emax: 45.12dBµV/m, RBW: 100kHz	

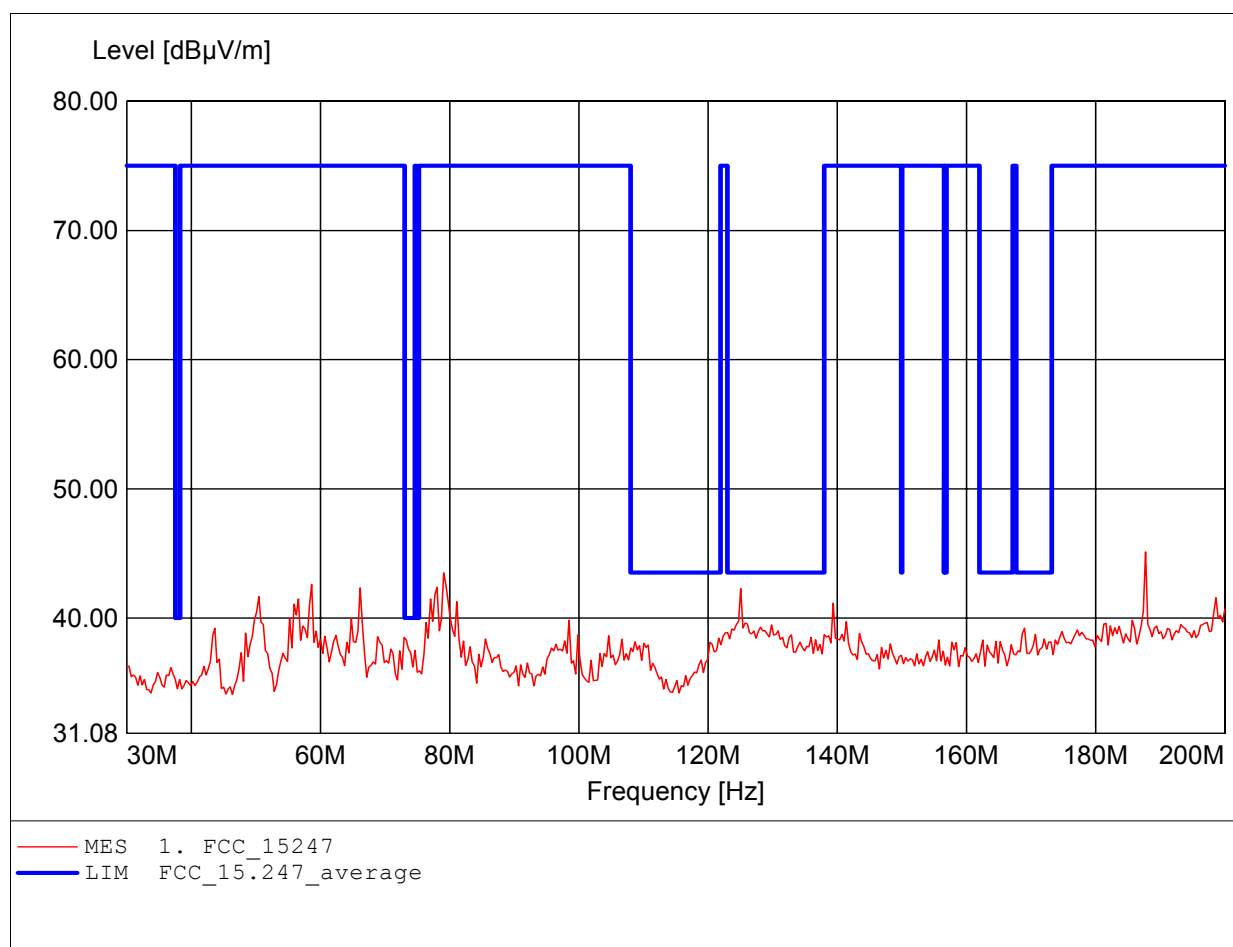

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HK 116	
	Freq: 187.735MHz, Emax: 46.52dBµV/m, RBW: 100kHz	

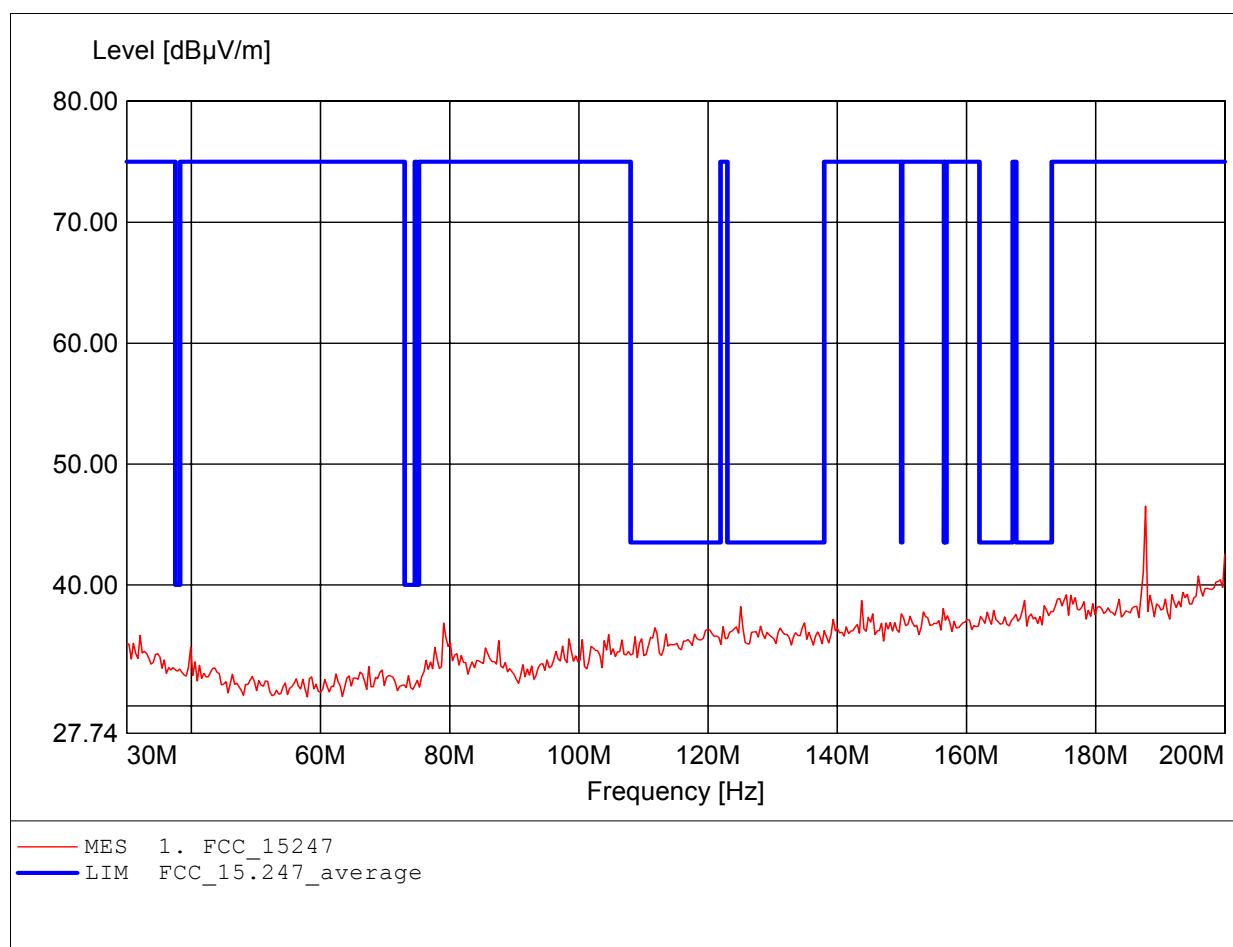

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HL 223,	
	Freq: 499.800MHz, Emax: 47.14dBµV/m, RBW: 100kHz	

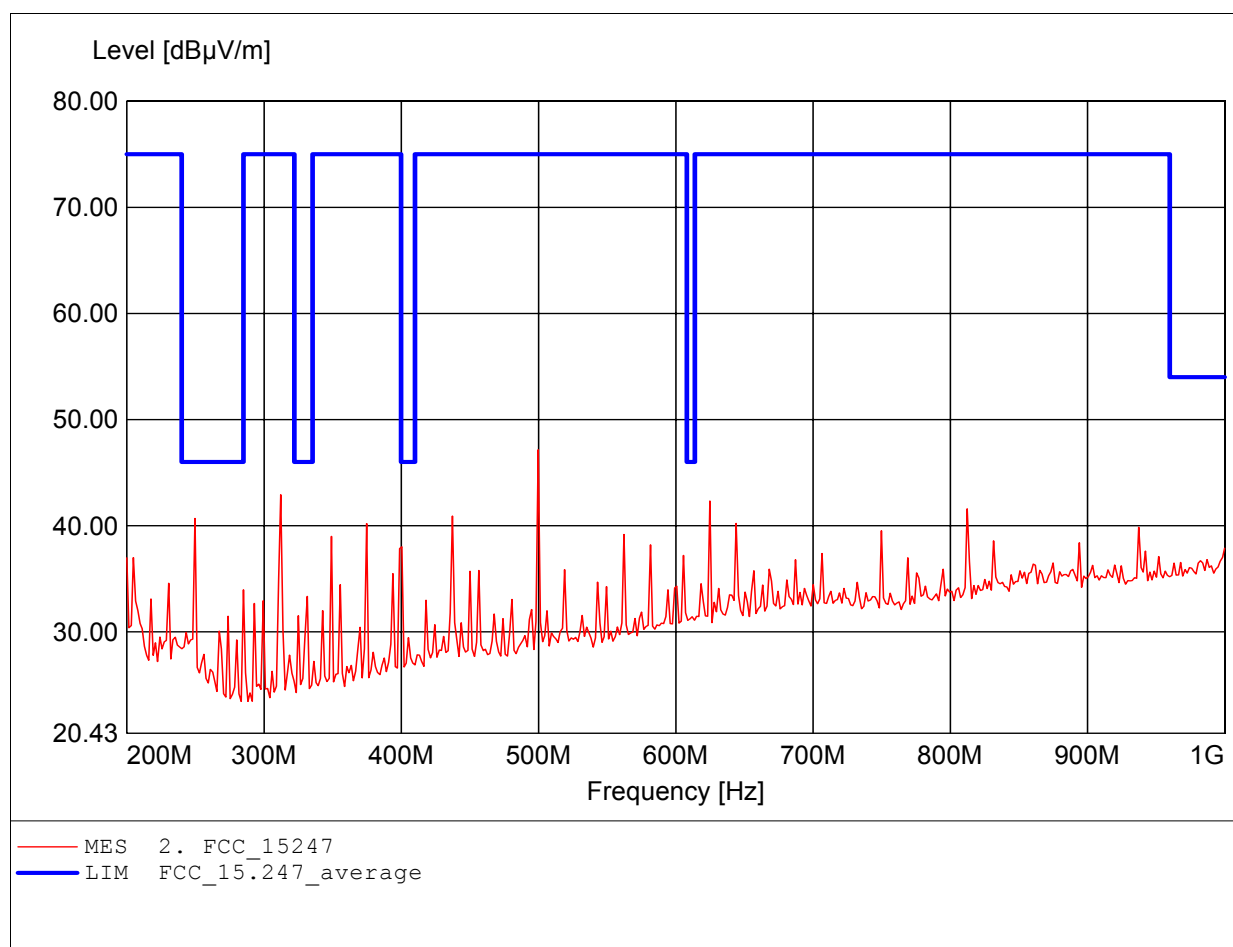

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: WIRELESS ADSL FIREWALL ROUTER
MODEL NO.: DG834G V2 Type of Antenna (D) 11G CH1
Approval Holder: Netgear Inc.
Test Site / Operator: ETS / Orville Chang
Temperature/Voltage: Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 499.800MHz, Emax: 49.53dBμV/m, RBW: 100kHz

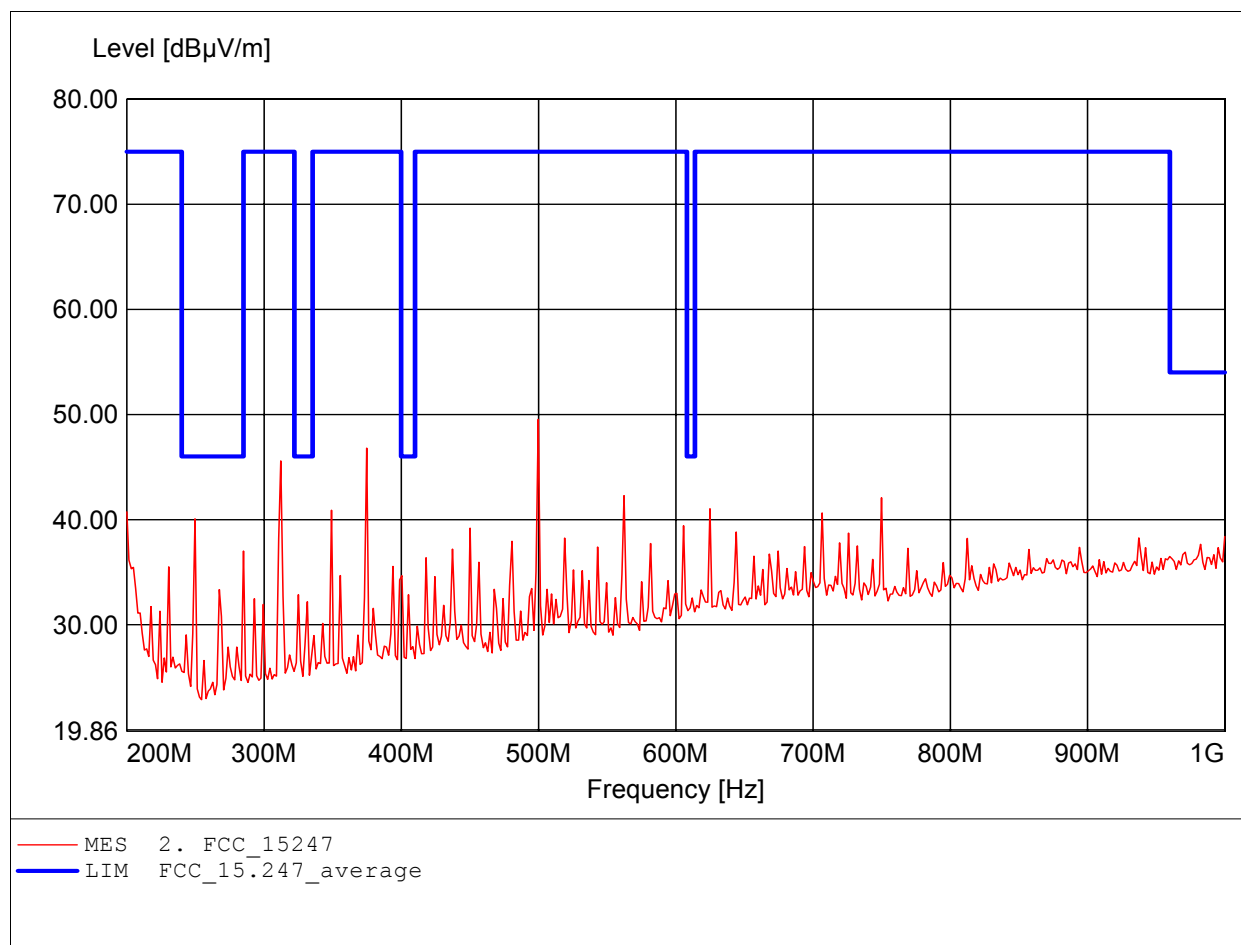

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 2.038GHz, Emax: 53.20dBµV/m, RBW: 1MHz	

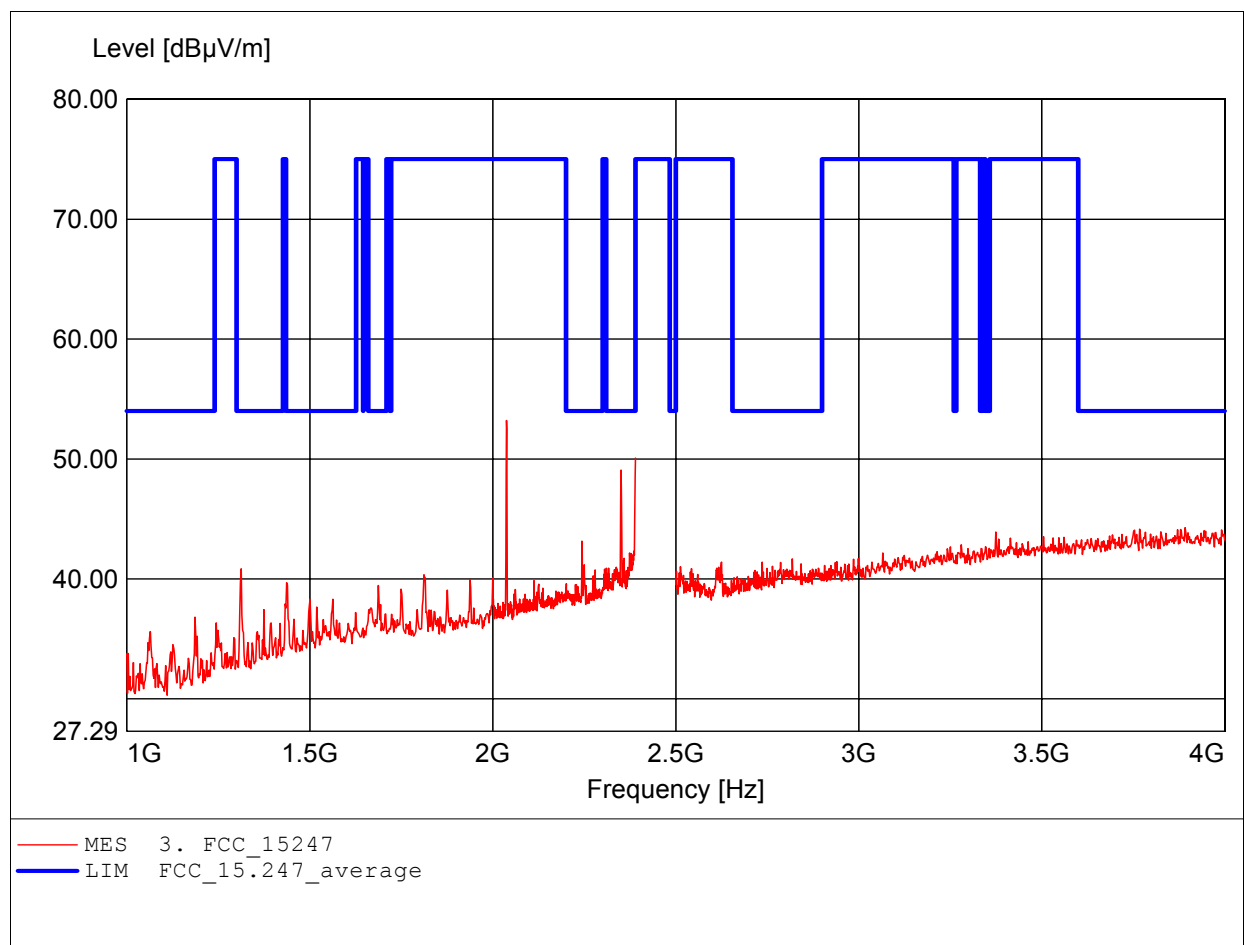

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 2.038GHz, Emax: 45.12dBµV/m, RBW: 1MHz	

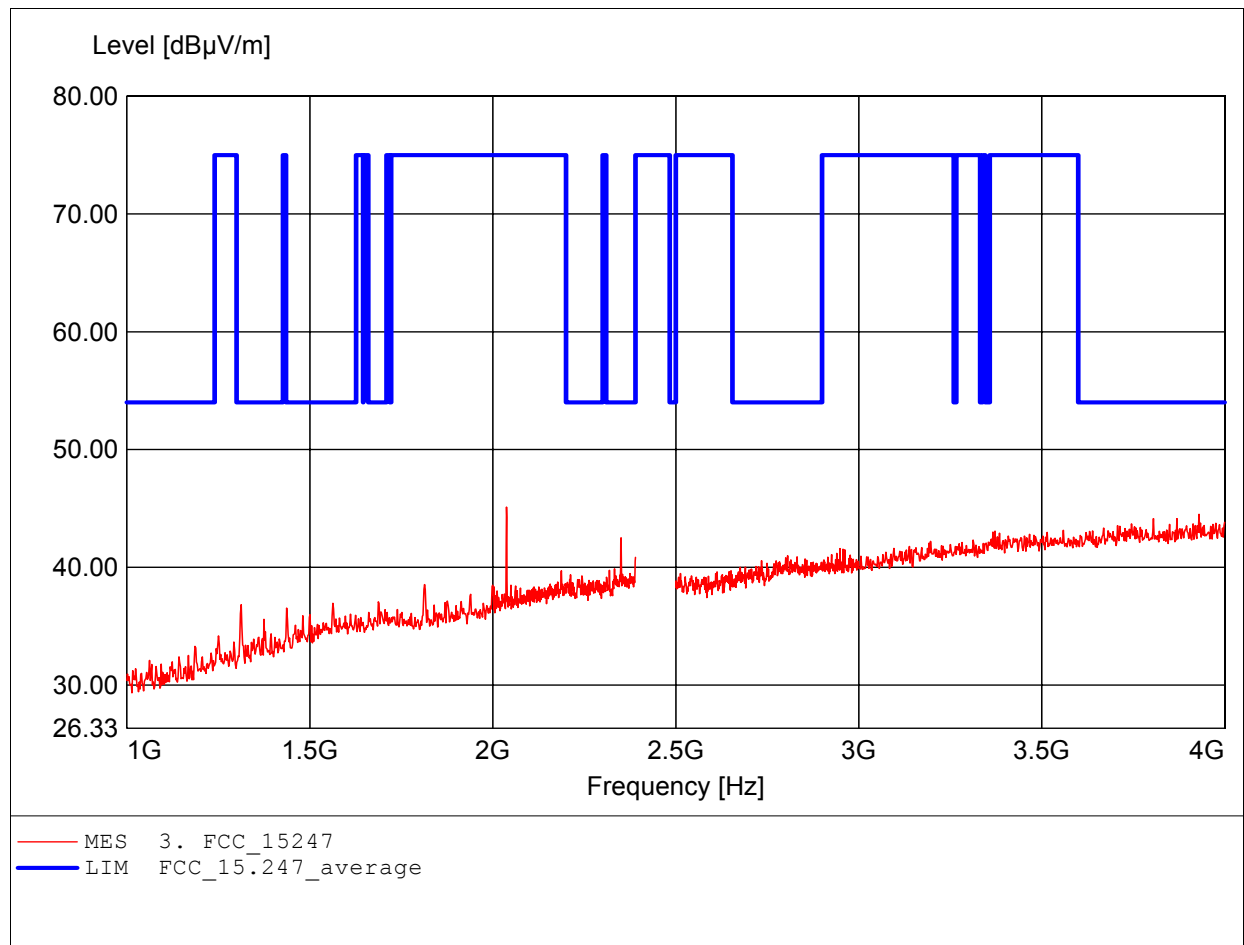

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 7.479GHz, Emax: 52.33dBμV/m, RBW: 1MHz	

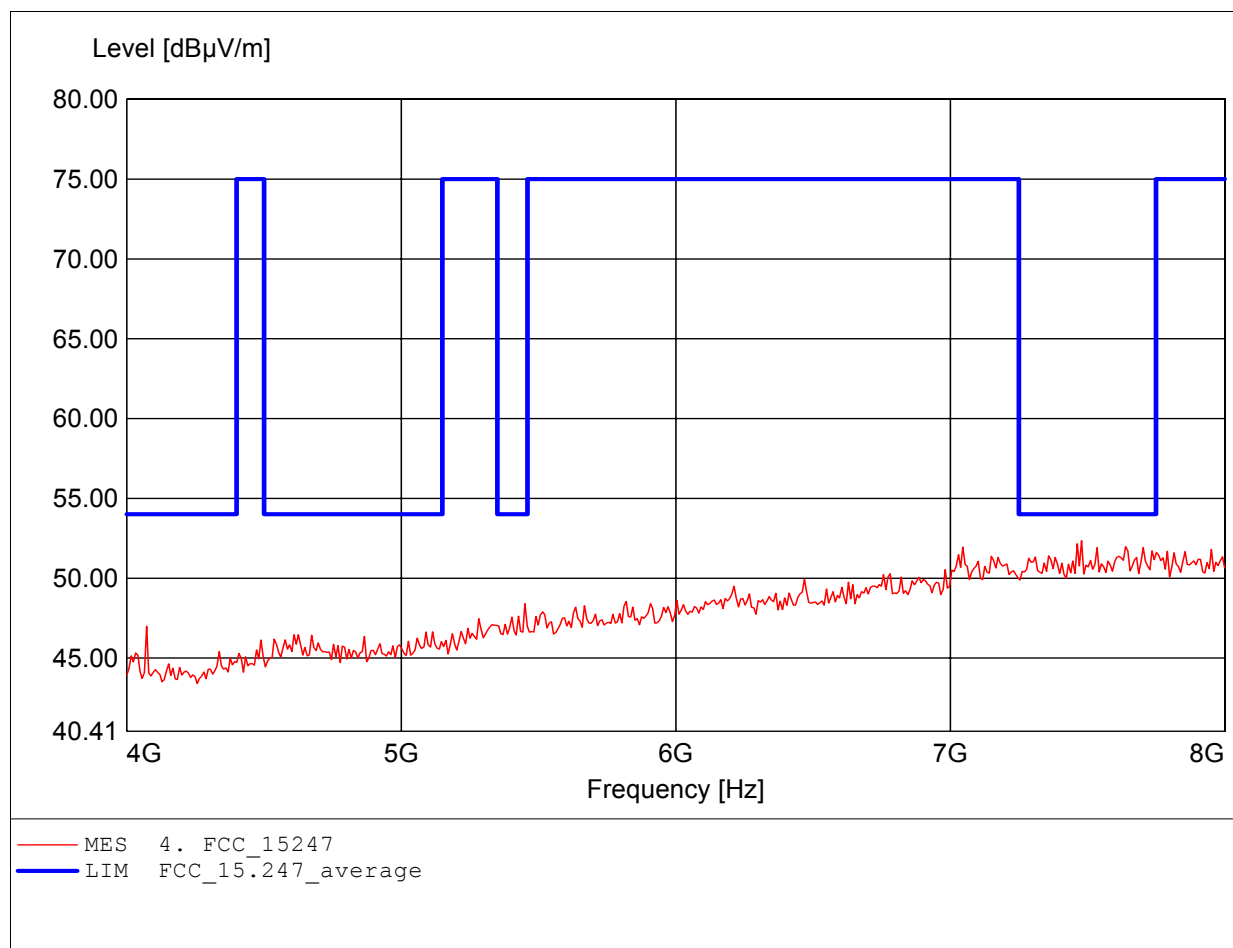

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 7.367GHz, Emax: 51.76dBμV/m, RBW: 1MHz	

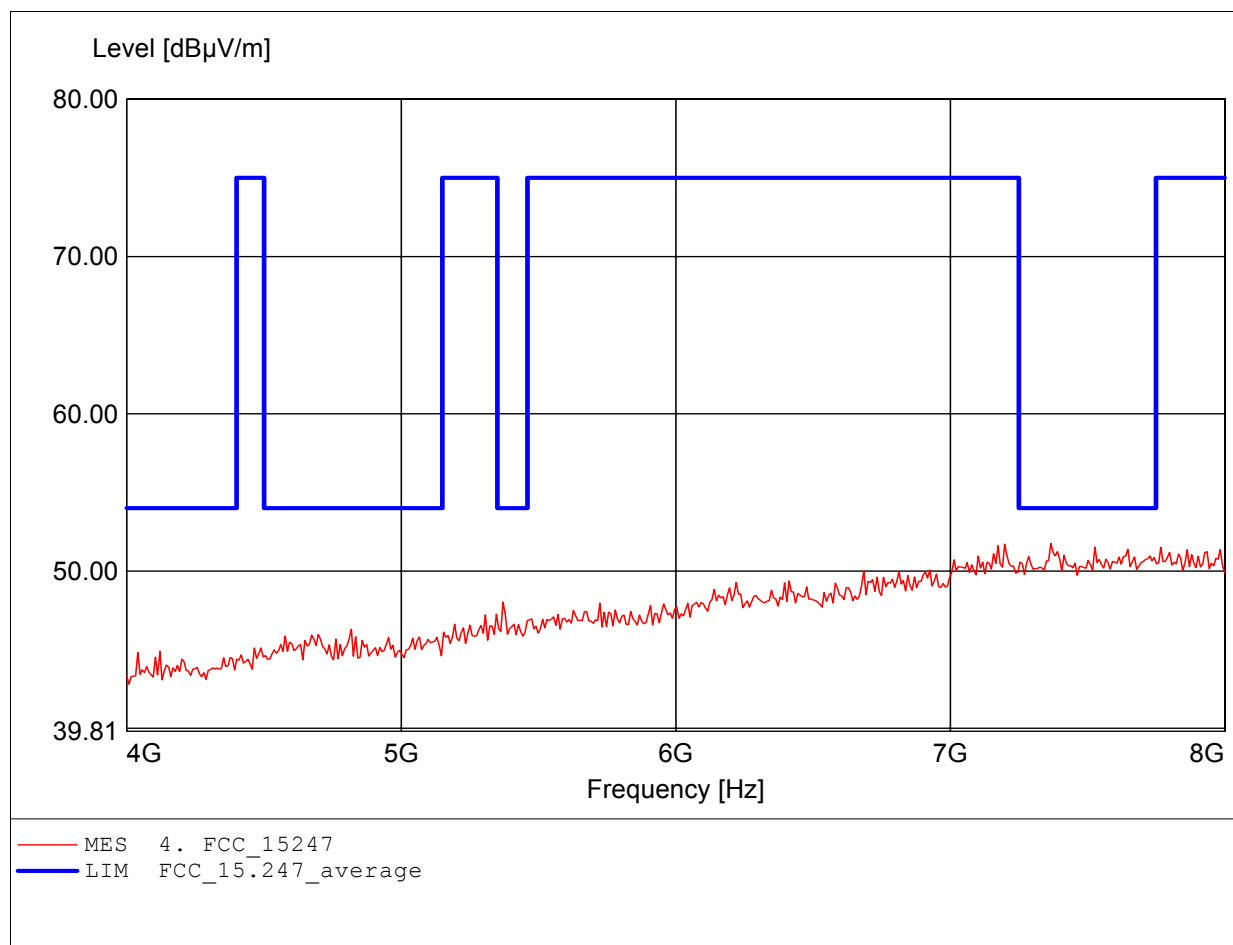

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 11.615GHz, Emax: 49.33dBμV/m, RBW: 1MHz	

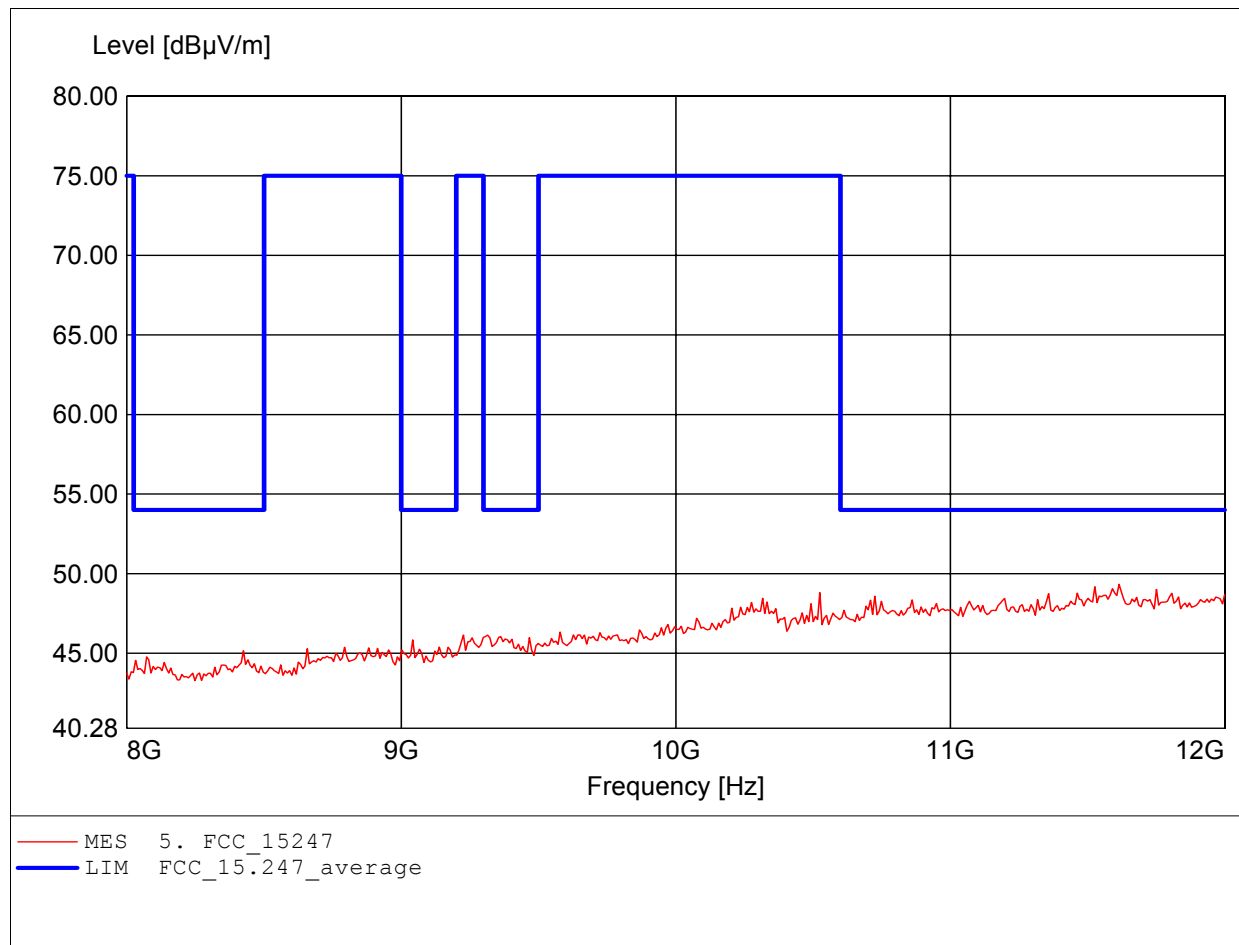

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 11.623GHz, Emax: 49.45dBμV/m, RBW: 1MHz	

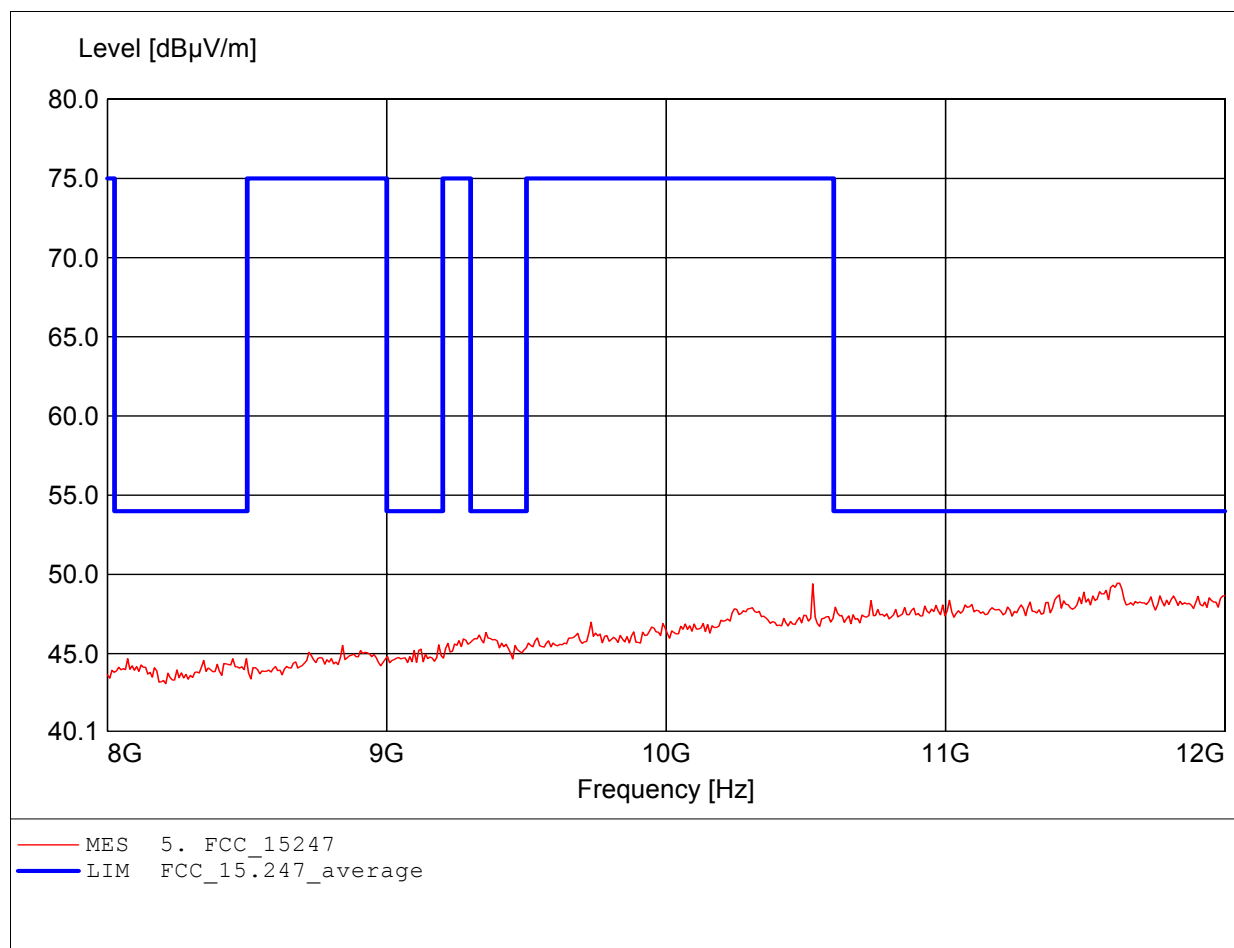

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 17.760GHz, Emax: 53.05dBμV/m, RBW: 1MHz	

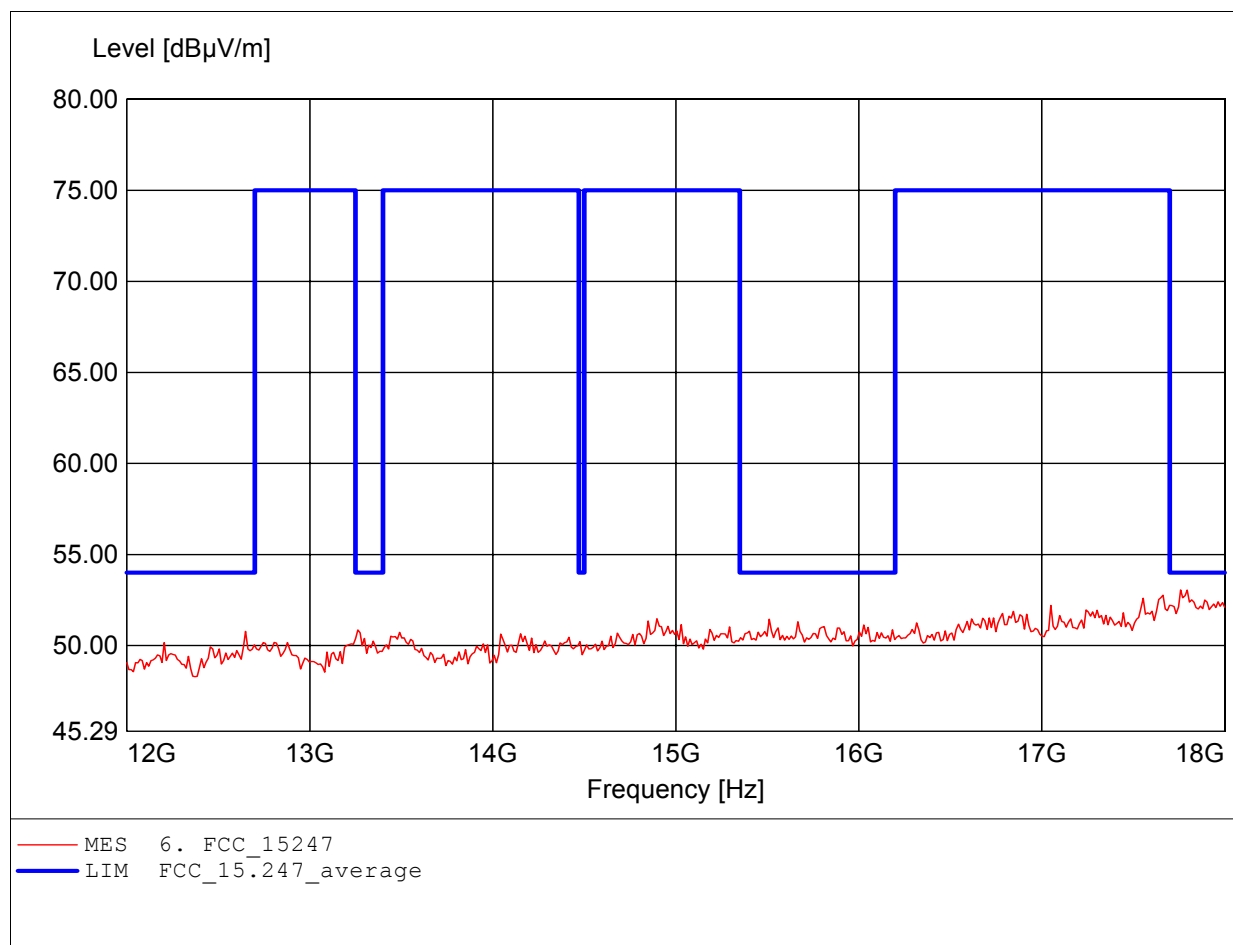

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: WIRELESS ADSL FIREWALL ROUTER
MODEL NO.: DG834G V2 Type of Antenna (D) 11G CH1
Approval Holder: Netgear Inc.
Test Site / Operator: ETS / Orville Chang
Temperature/Voltage: Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.760GHz, Emax: 52.95dBμV/m, RBW: 1MHz

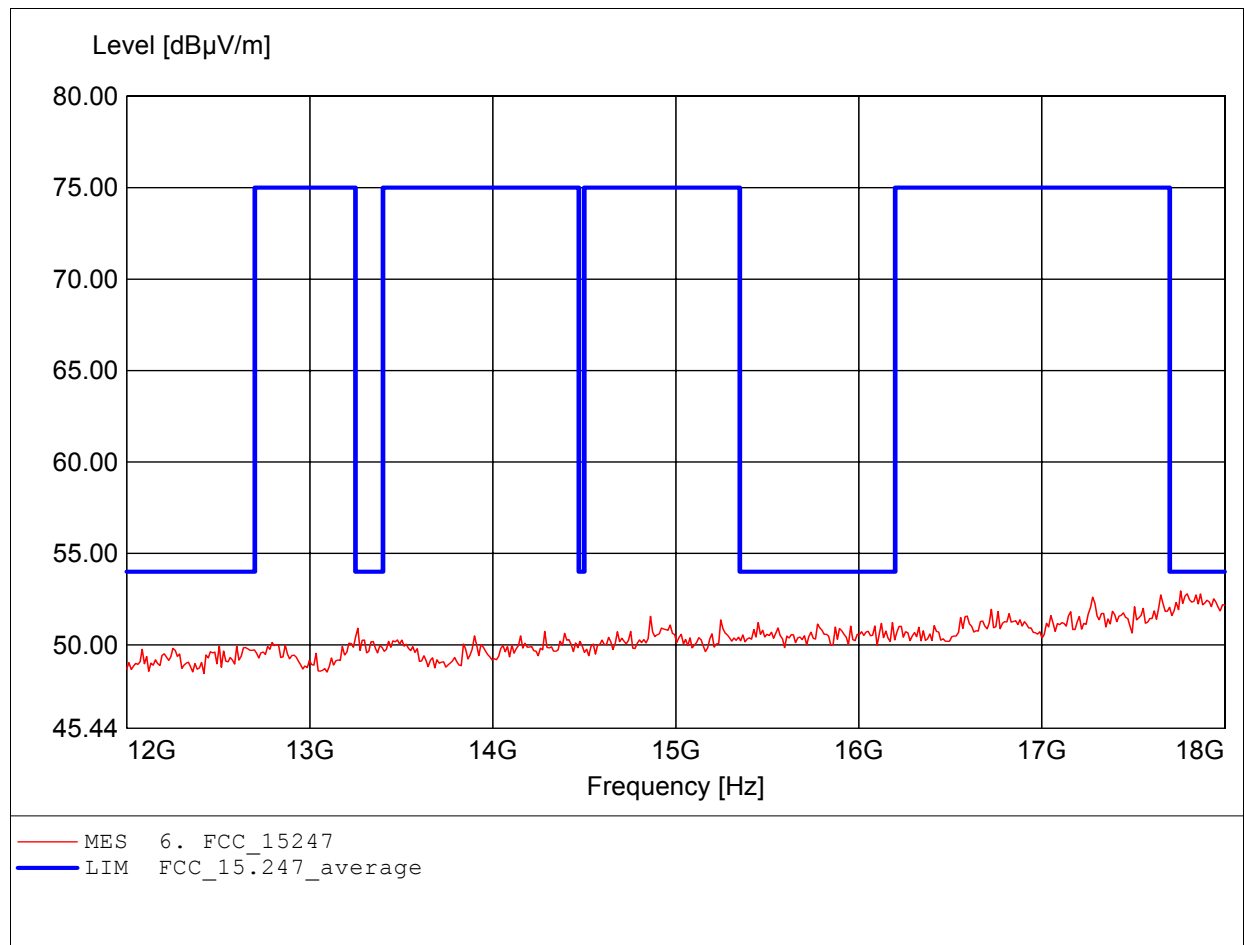

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 25.529GHz, Emax: 54.38dBμV/m, RBW: 1MHz	

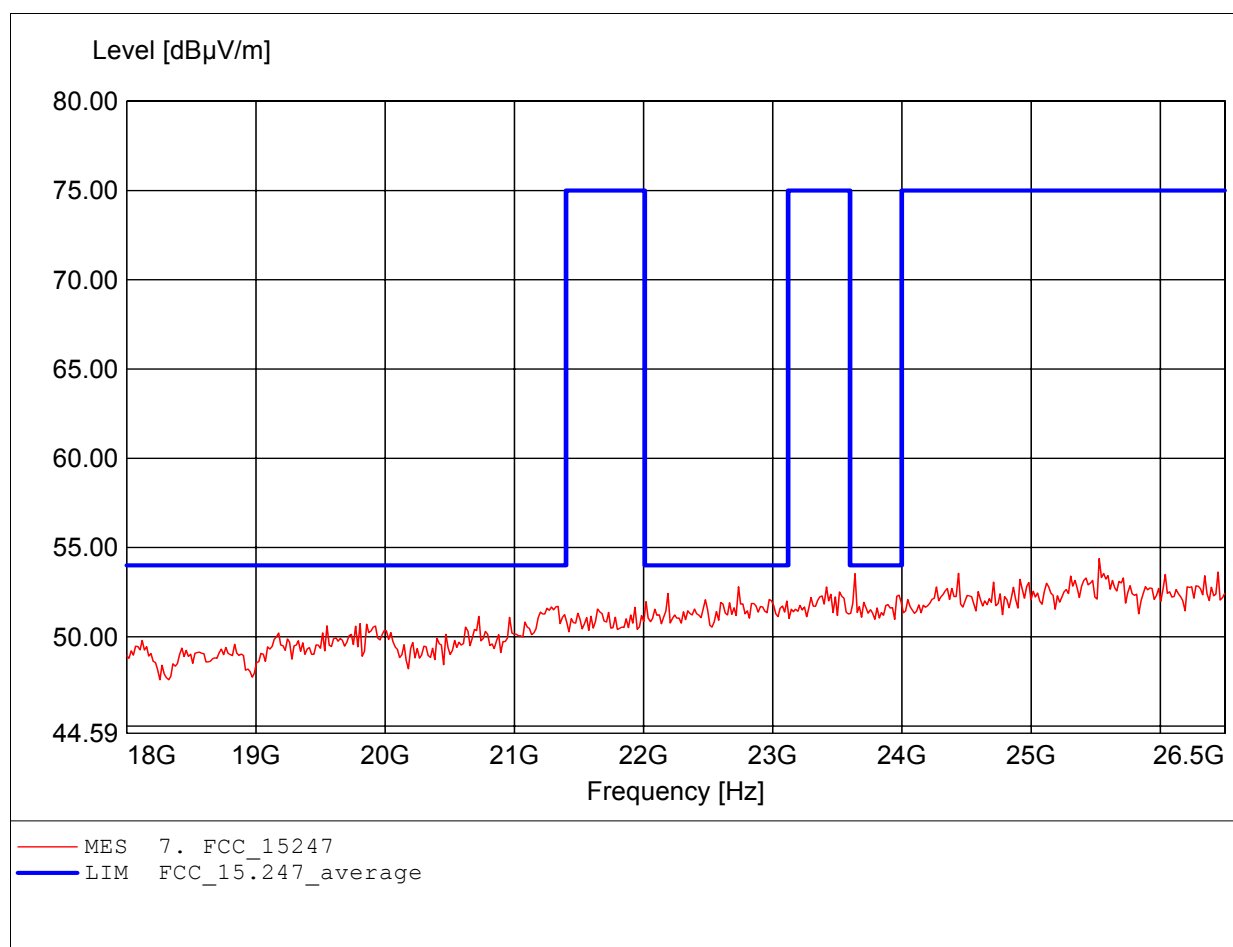

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 25.546GHz, Emax: 52.41dBμV/m, RBW: 1MHz	

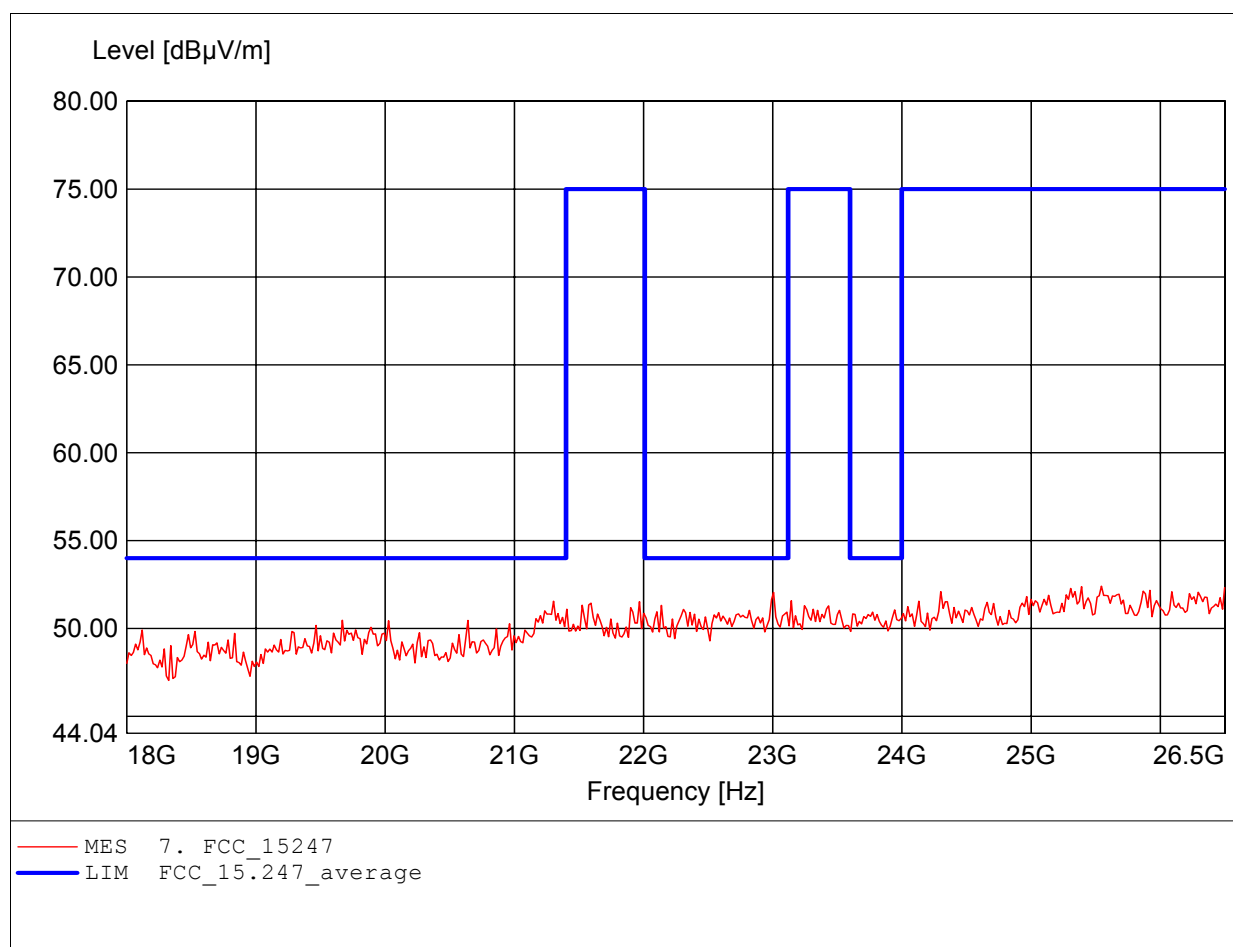

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D)
Approval Holder:	Netgear Inc.	11G CH6
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HK 116	
	Freq: 187.735MHz, Emax: 44.72dBµV/m, RBW: 100kHz	

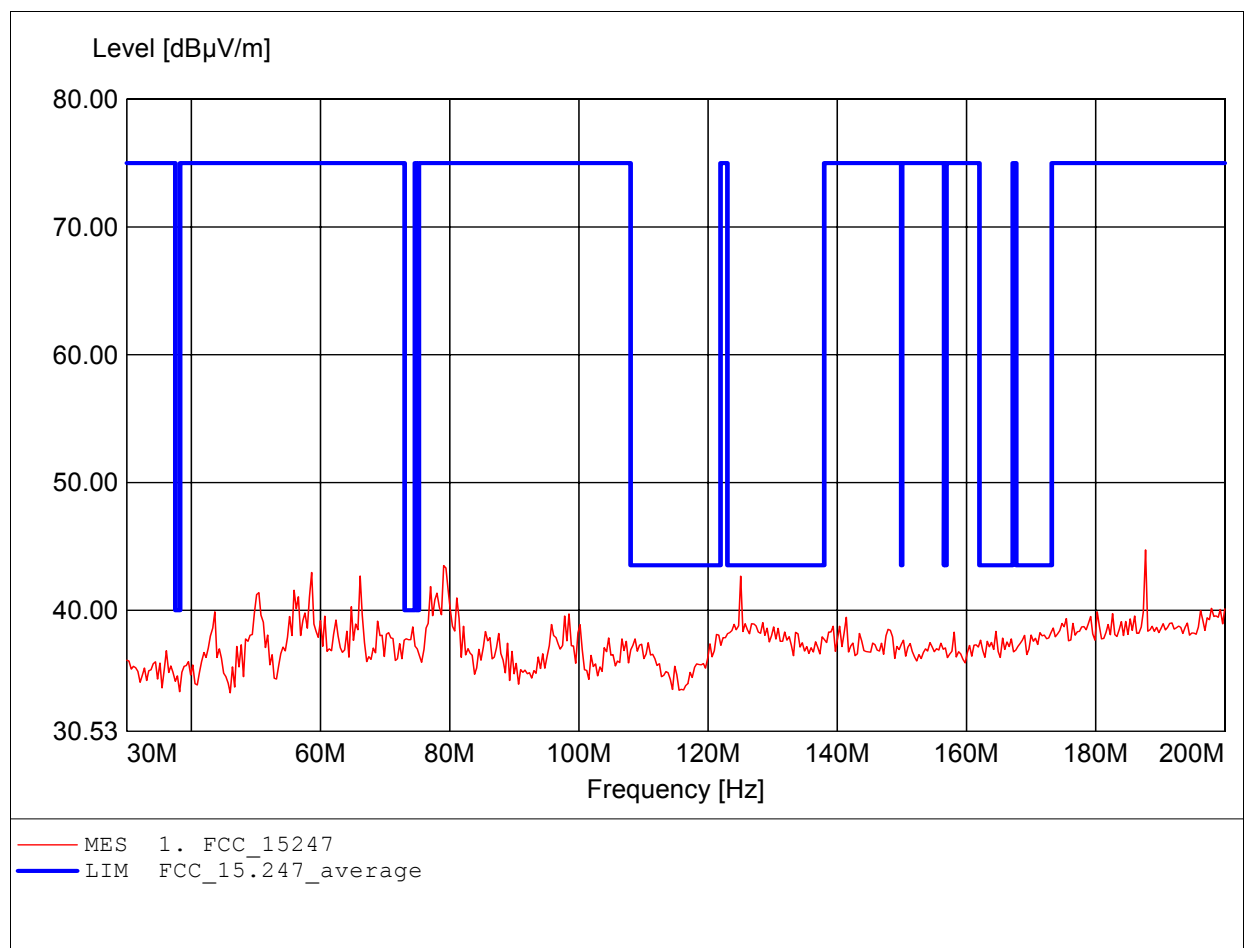

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D)
Approval Holder:	Netgear Inc.	11G CH6
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HK 116	
	Freq: 187.735MHz, Emax: 46.47dBµV/m, RBW: 100kHz	

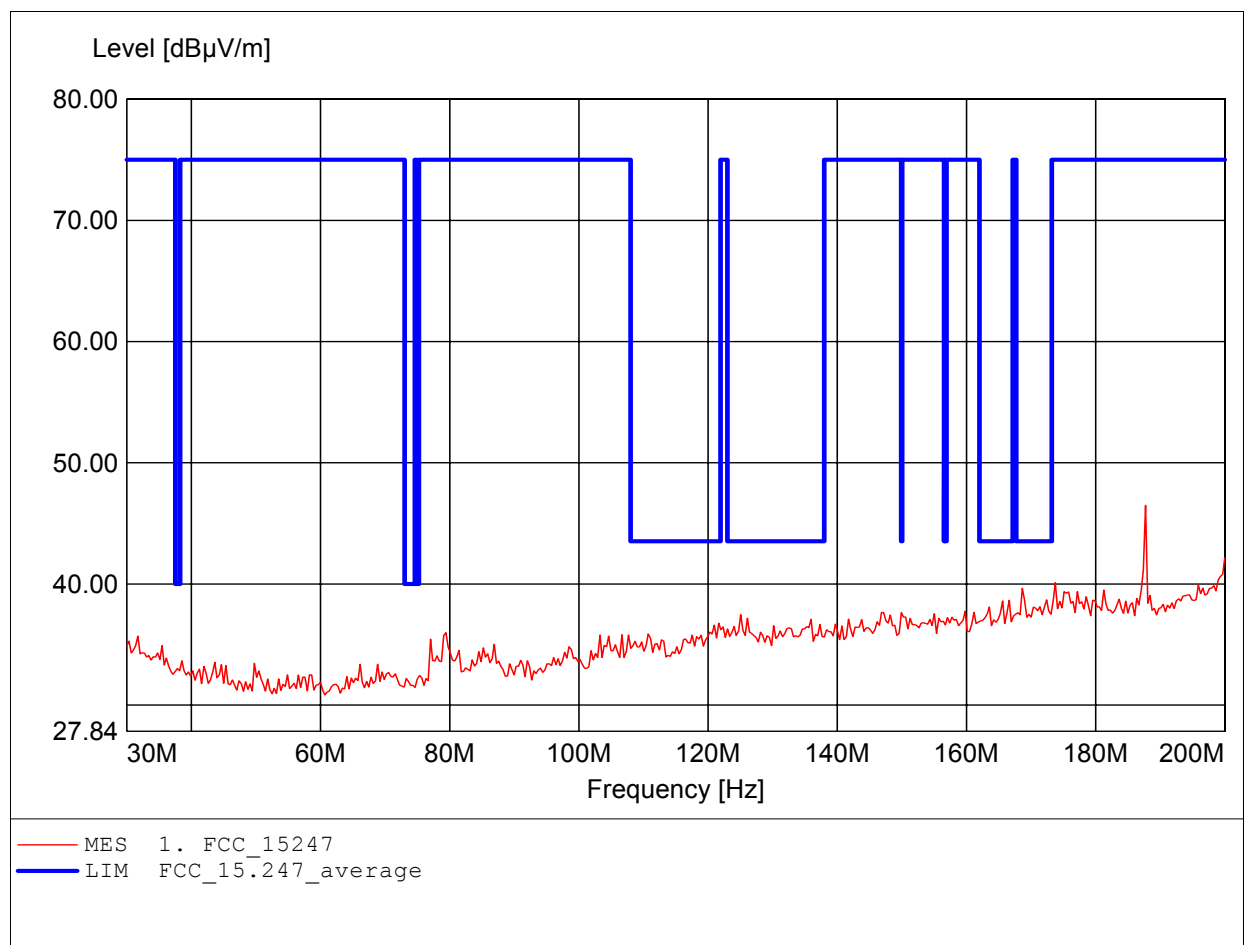

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HL 223,	
	Freq: 499.800MHz, Emax: 45.58dBµV/m, RBW: 100kHz	

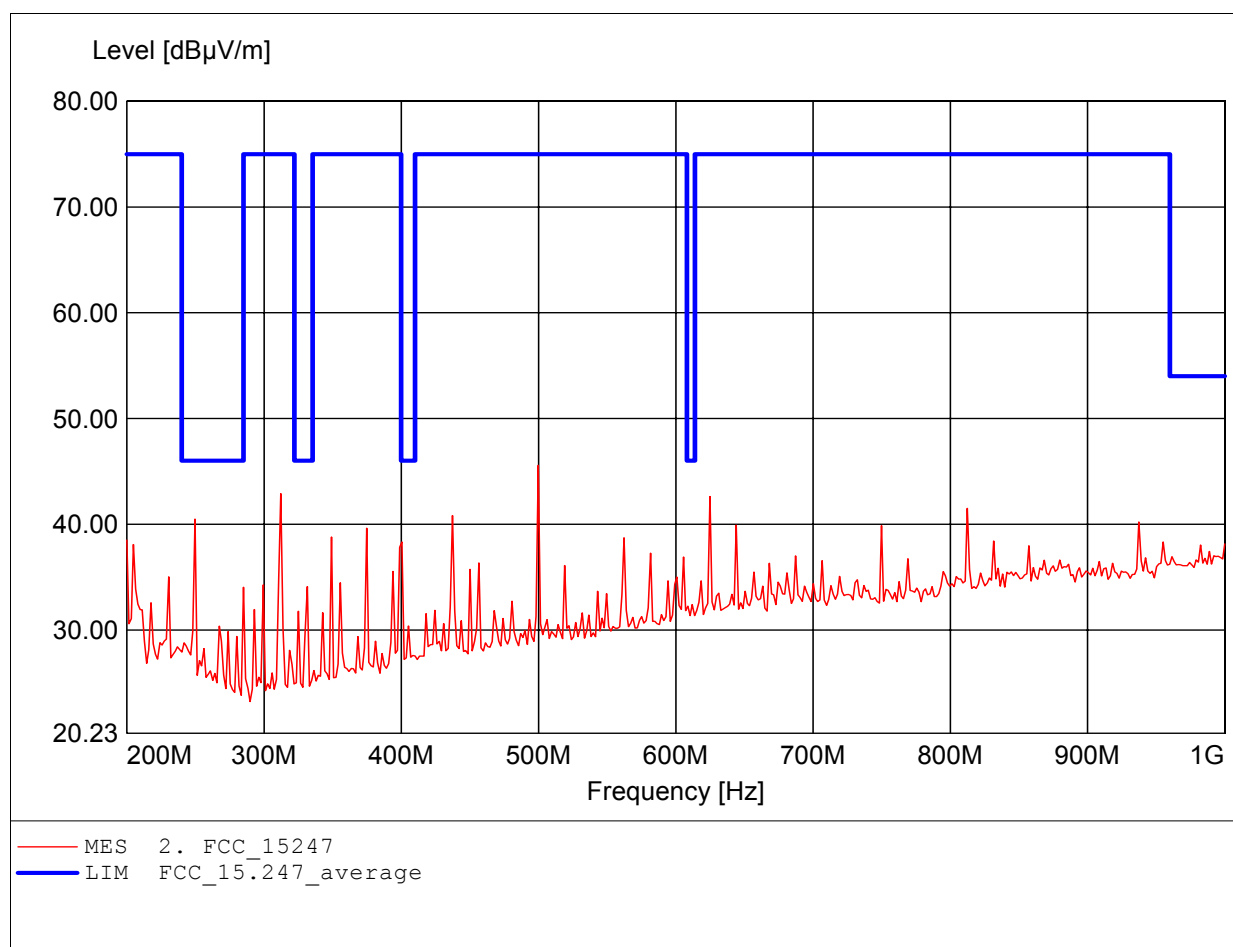

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HL 223,	
	Freq: 499.800MHz, Emax: 49.43dBμV/m, RBW: 100kHz	

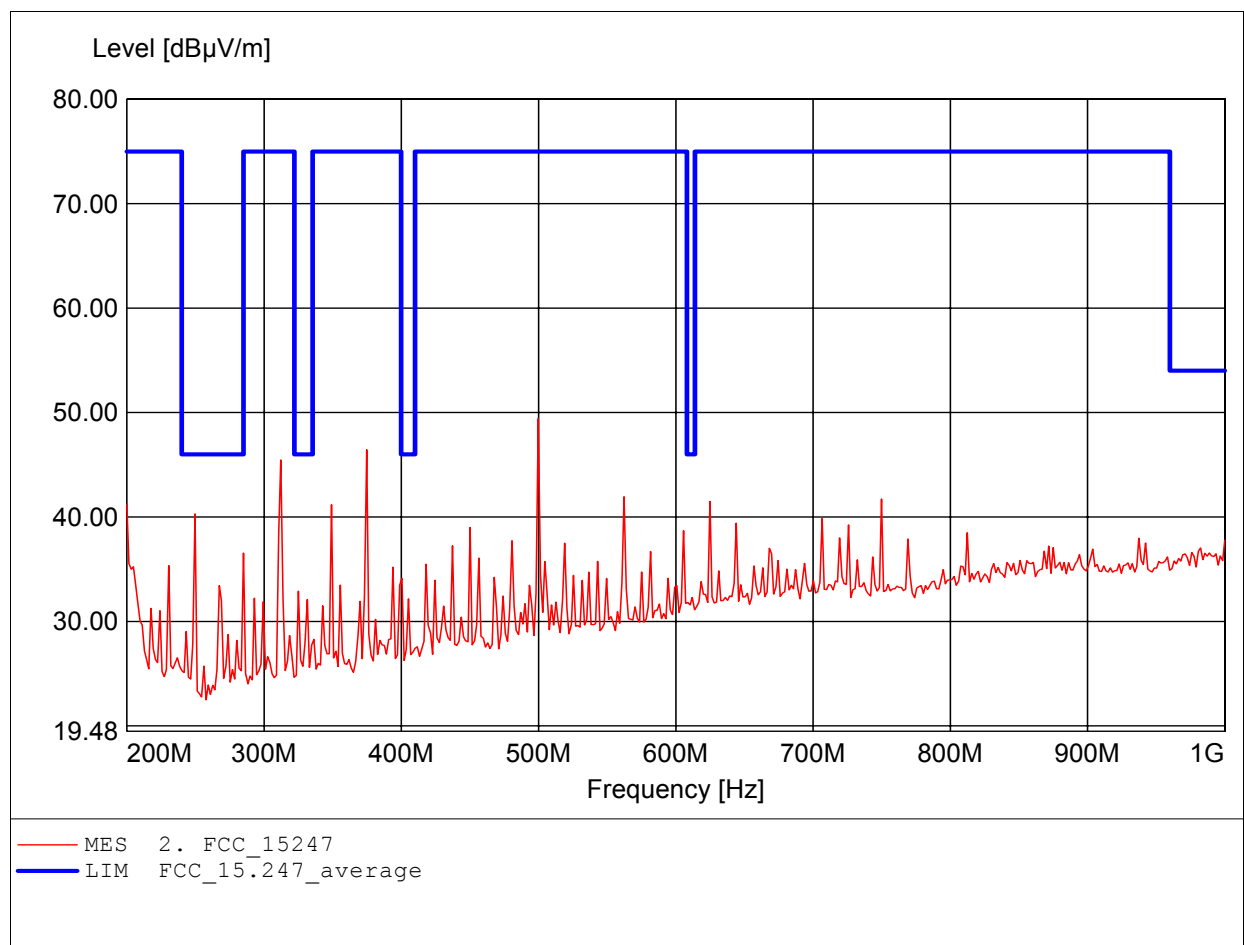

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 2.063GHz, Emax: 51.10dBμV/m, RBW: 1MHz	

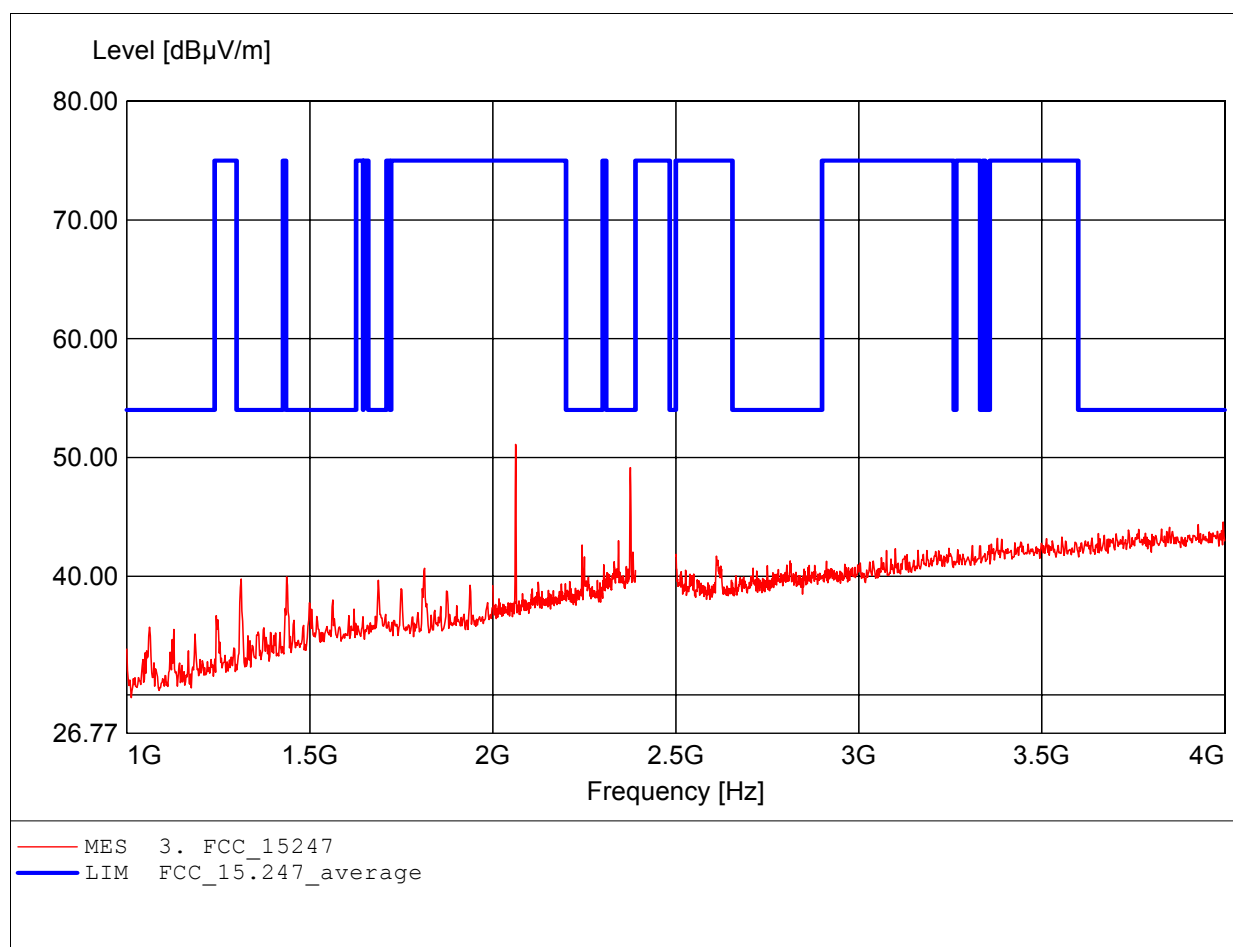

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 2.063GHz, Emax: 45.24dBµV/m, RBW: 1MHz	

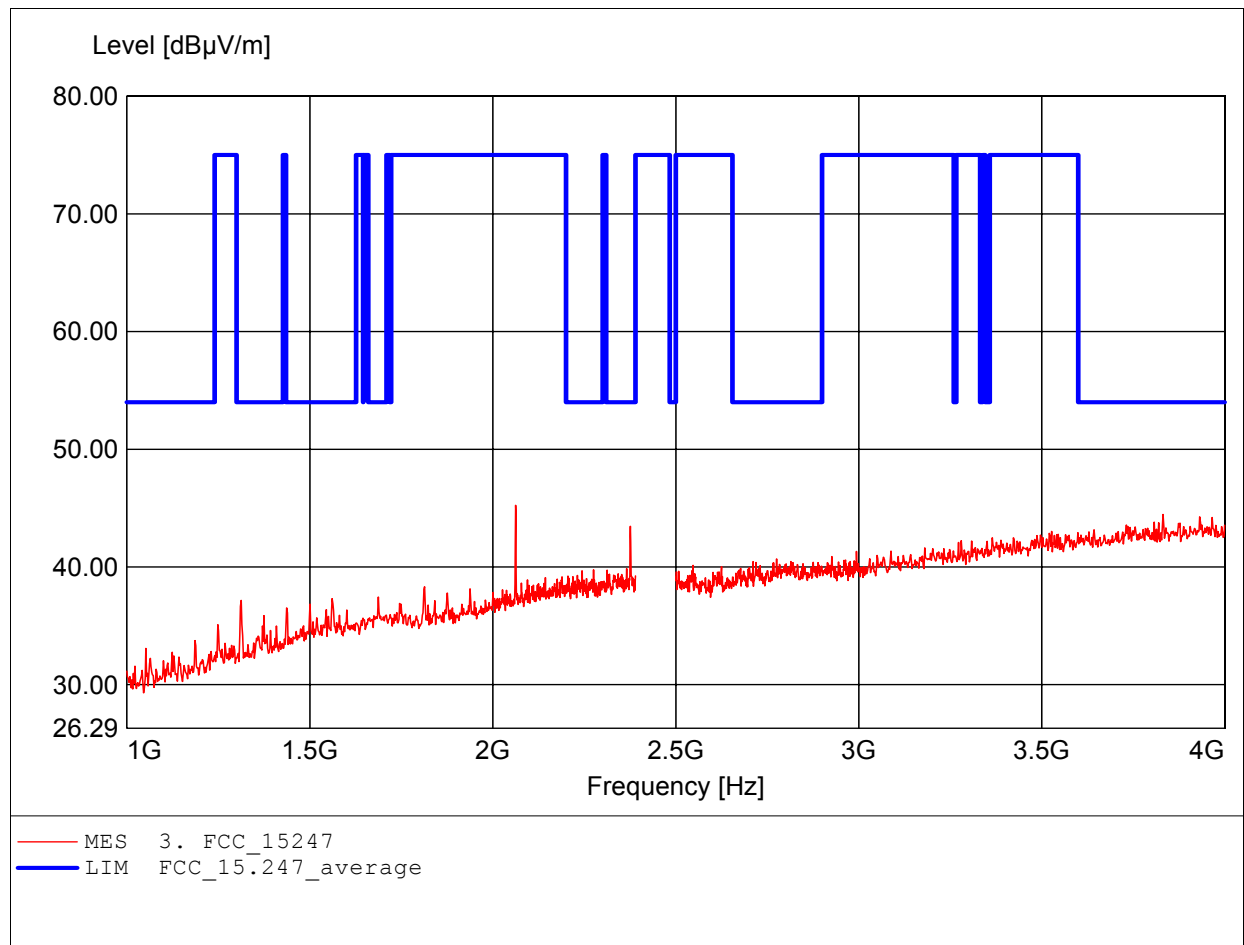

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 7.174GHz, Emax: 51.91dBμV/m, RBW: 1MHz	

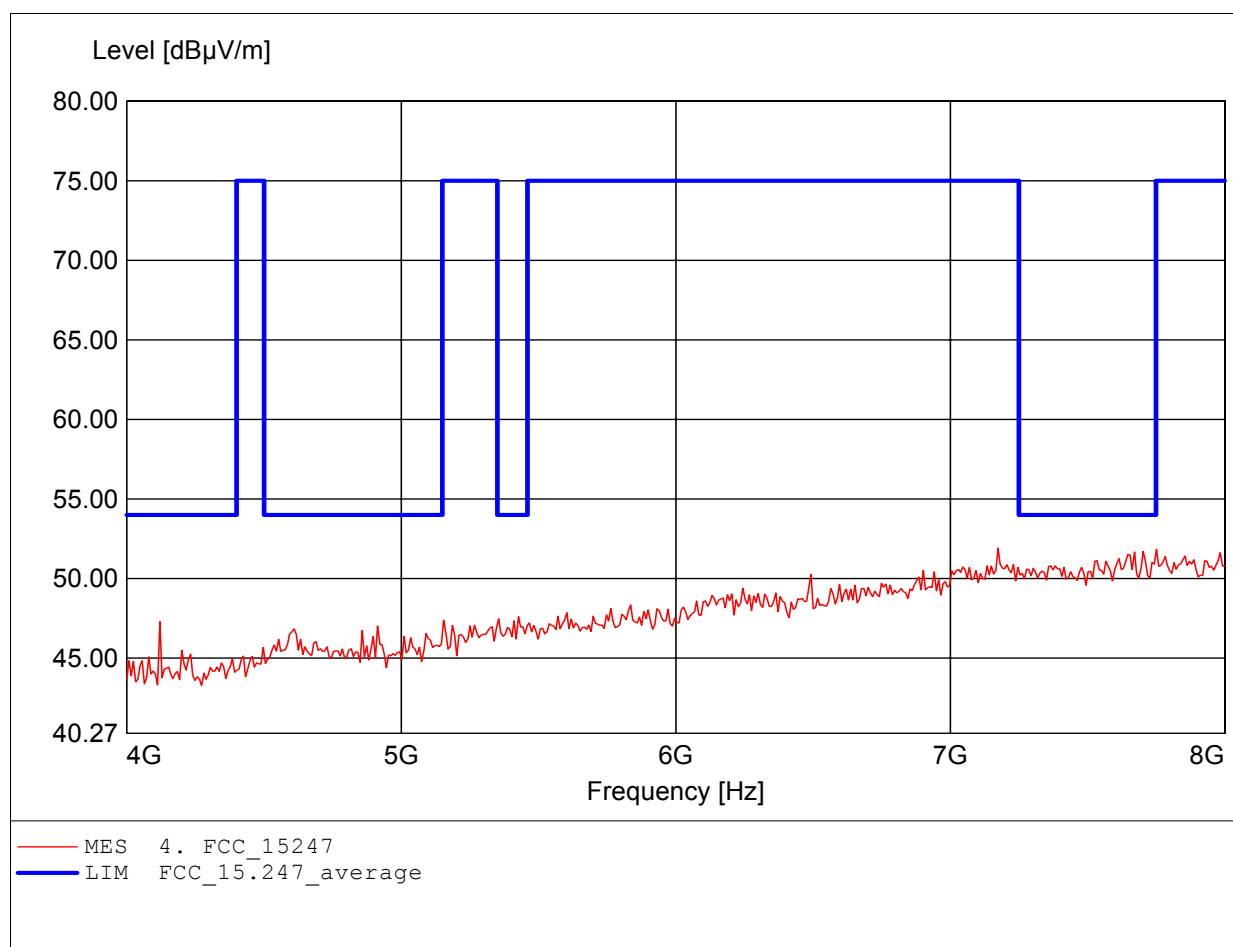

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 7.936GHz, Emax: 51.77dBμV/m, RBW: 1MHz	

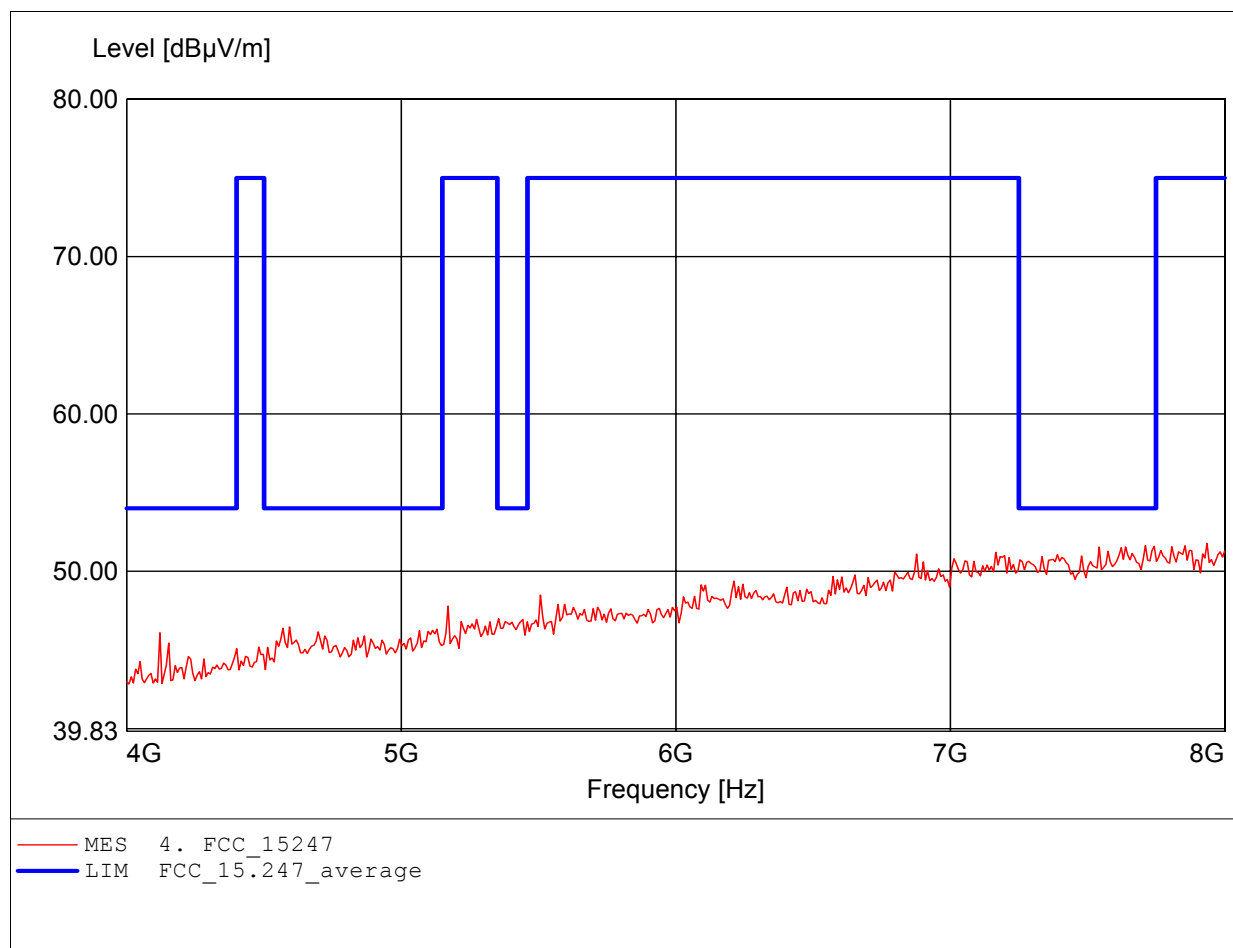

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D)
Approval Holder:	Netgear Inc.	11G CH6
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 10.525GHz, Emax: 49.10dBμV/m, RBW: 1MHz	

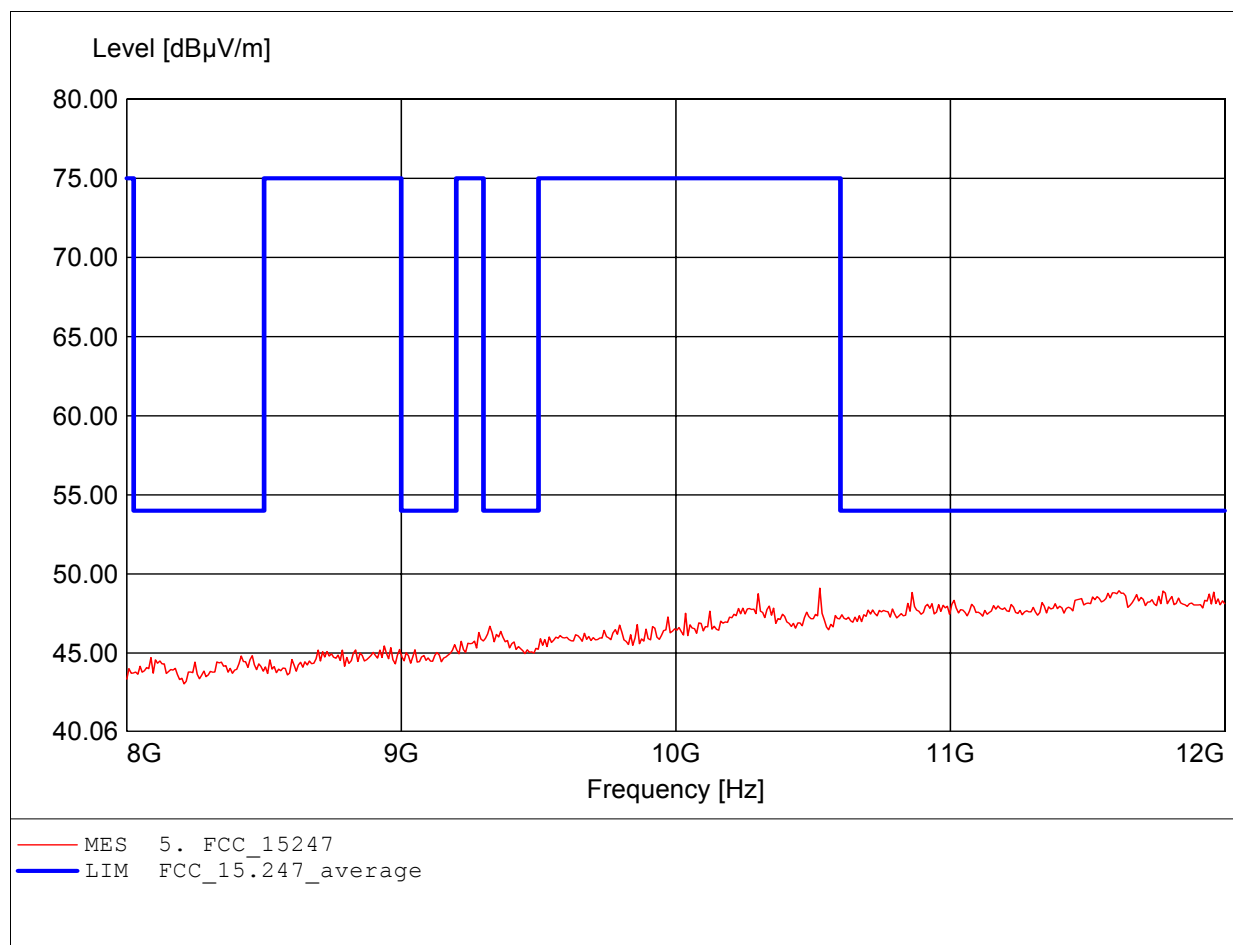

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D)
Approval Holder:	Netgear Inc.	11G CH6
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 11.944GHz, Emax: 49.67dBμV/m, RBW: 1MHz	

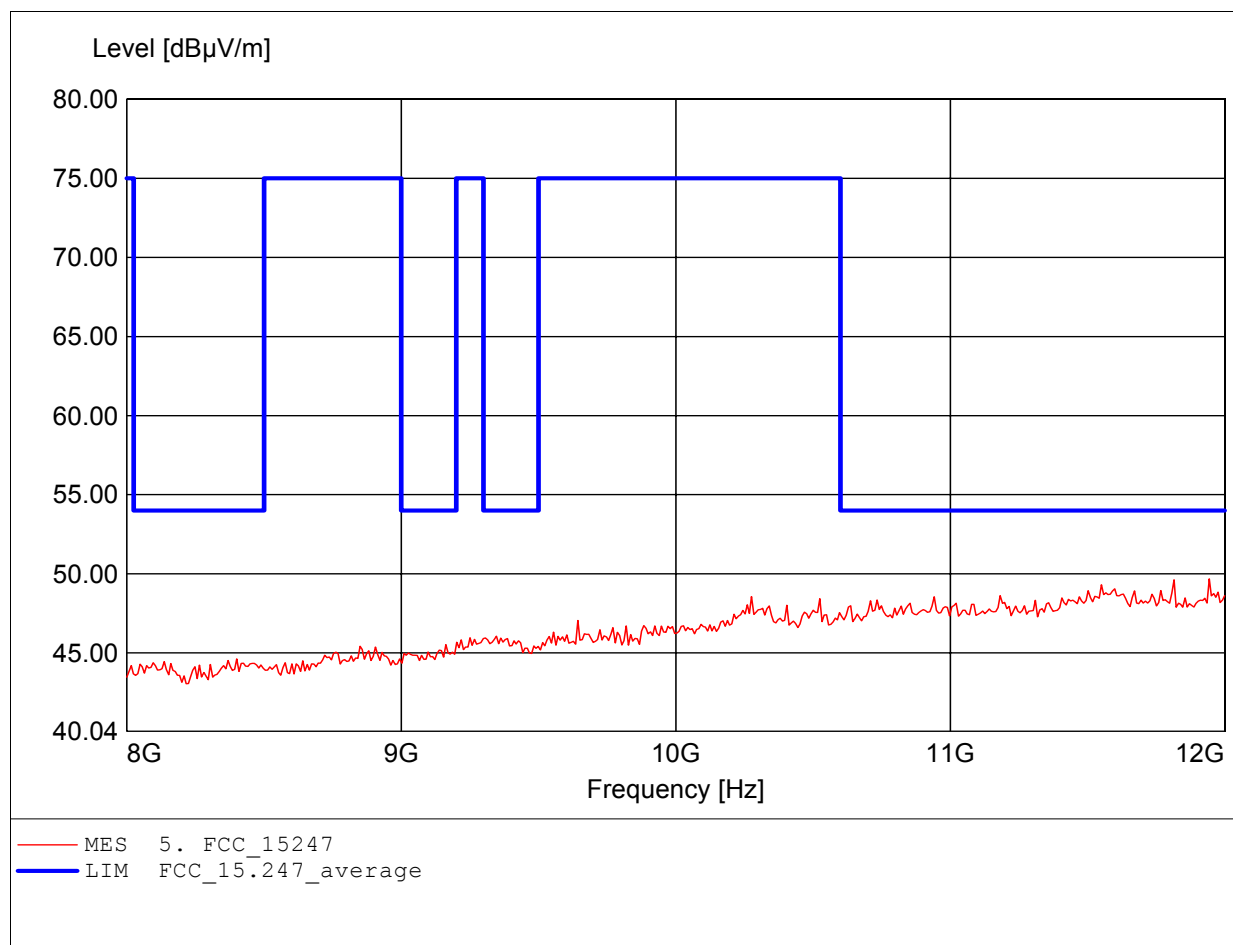

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D)
Approval Holder:	Netgear Inc.	11G CH6
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 17.820GHz, Emax: 53.17dBµV/m, RBW: 1MHz	

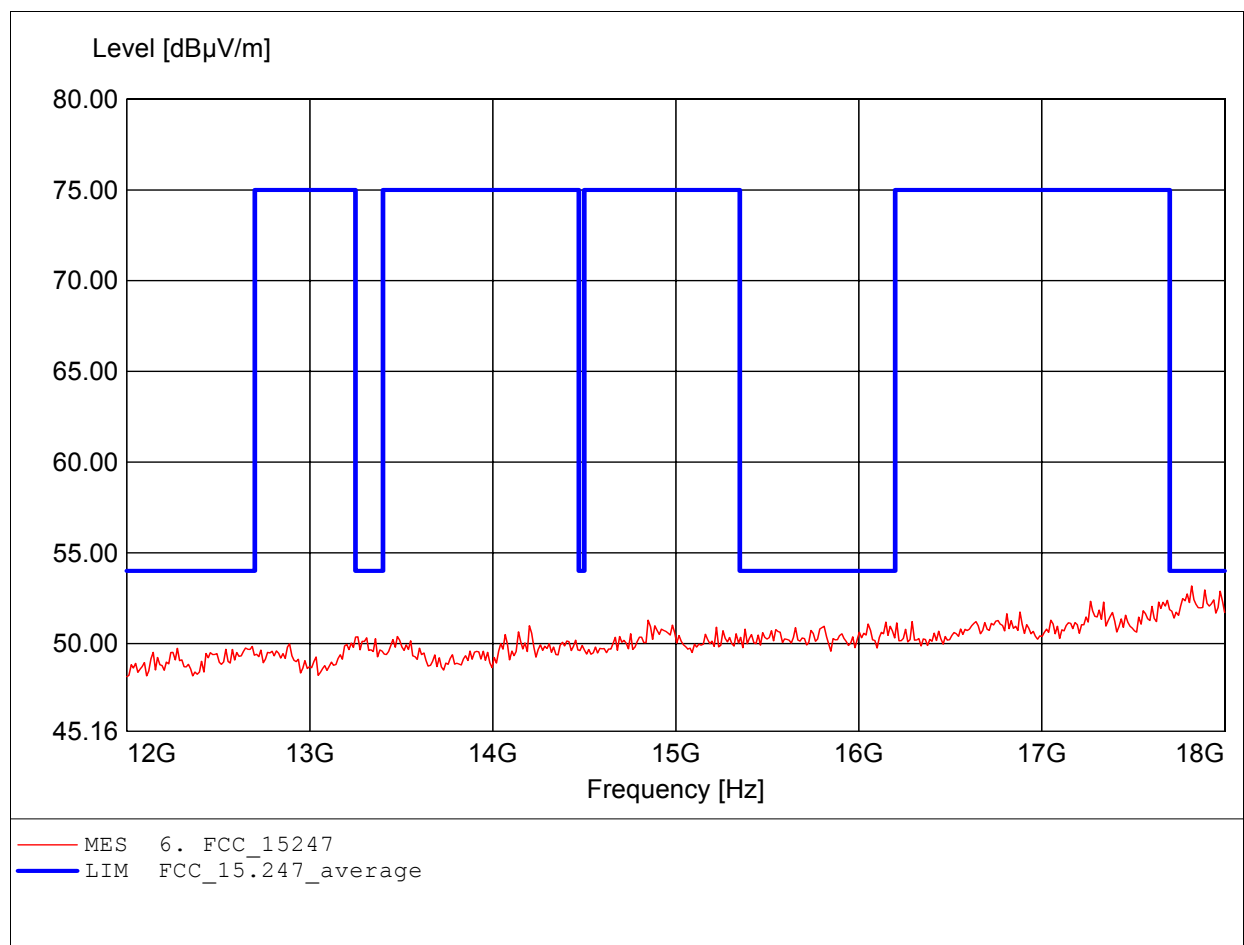

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 17.988GHz, Emax: 52.93dBμV/m, RBW: 1MHz	

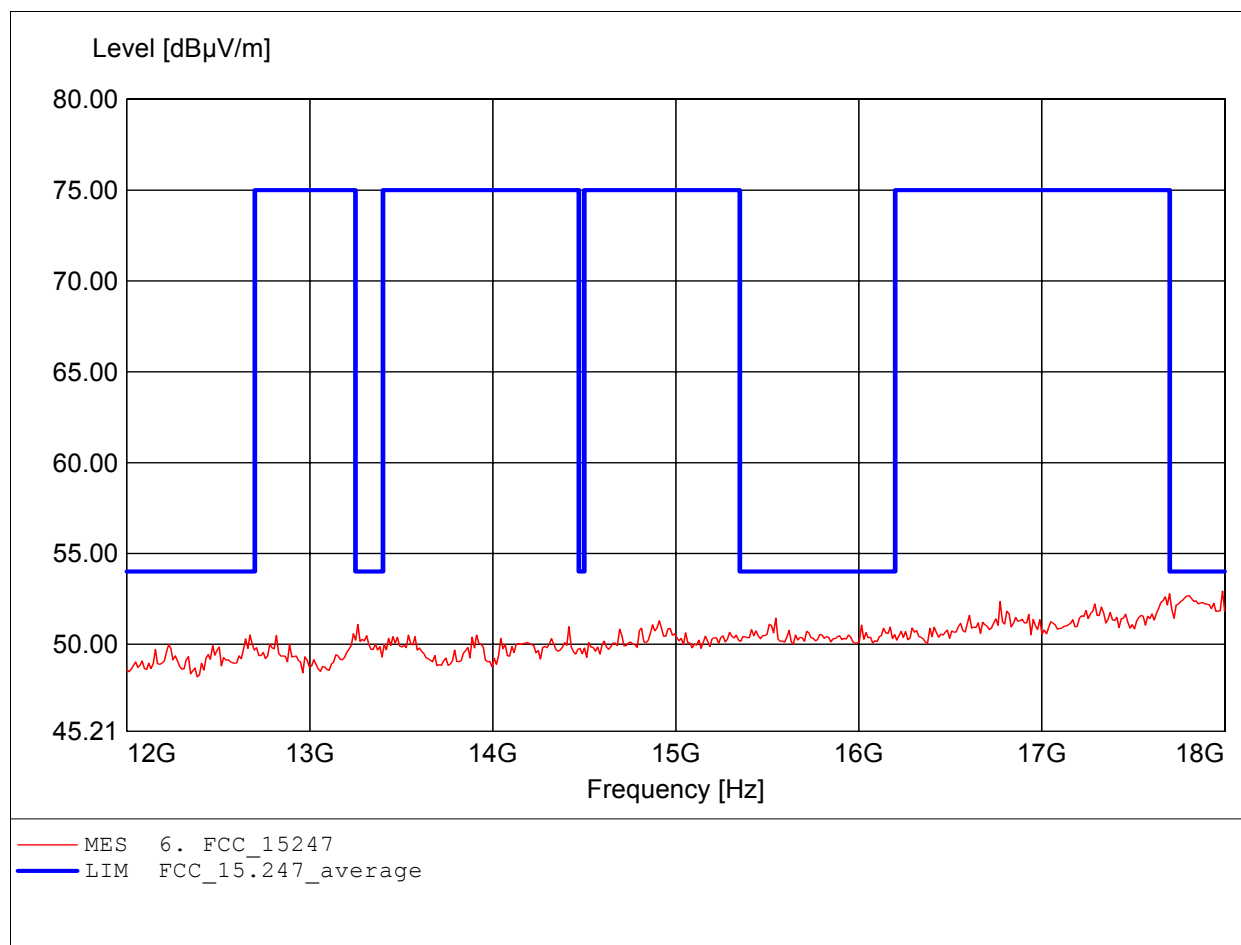

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 26.023GHz, Emax: 53.84dBμV/m, RBW: 1MHz	

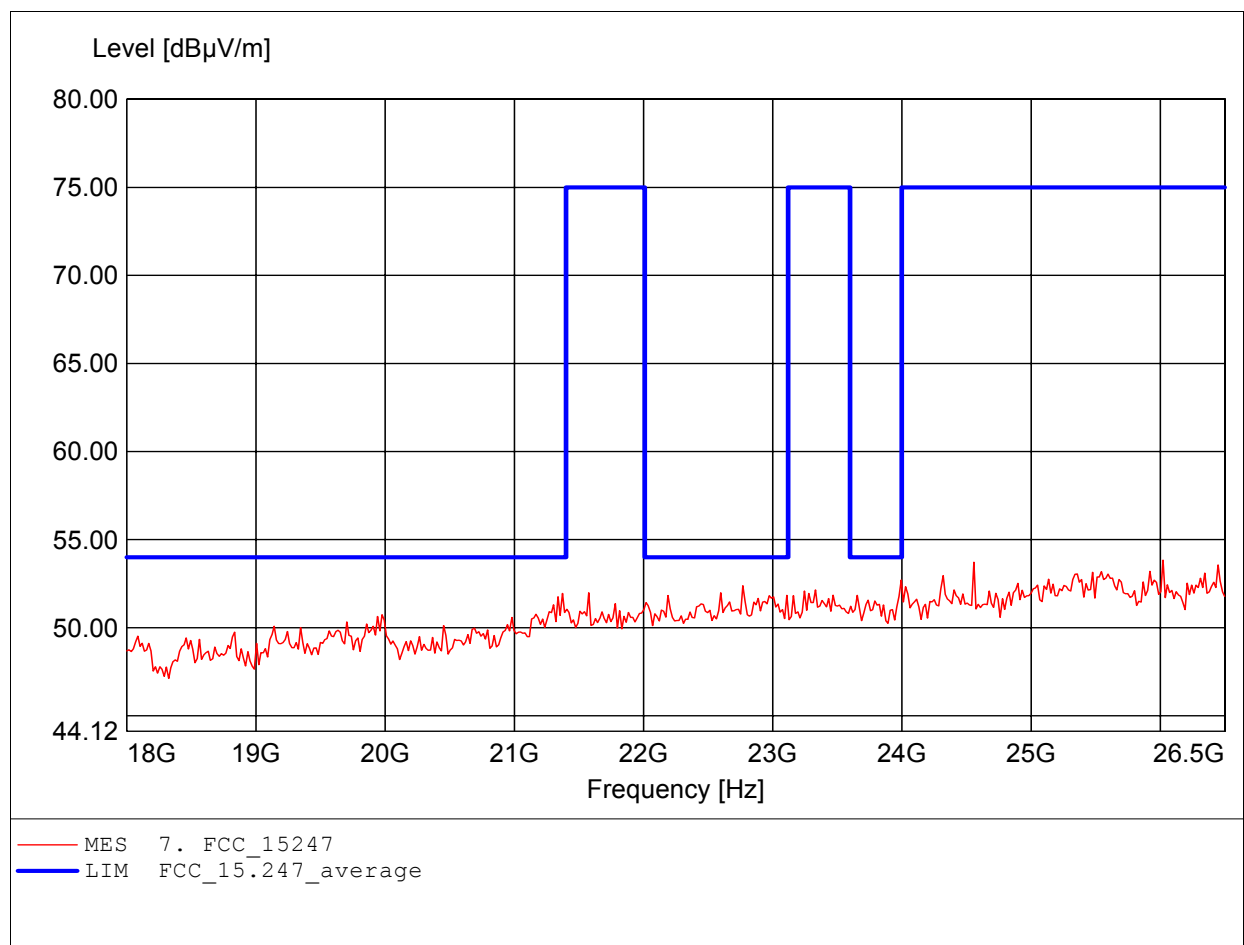

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 25.648GHz, Emax: 52.95dBμV/m, RBW: 1MHz	

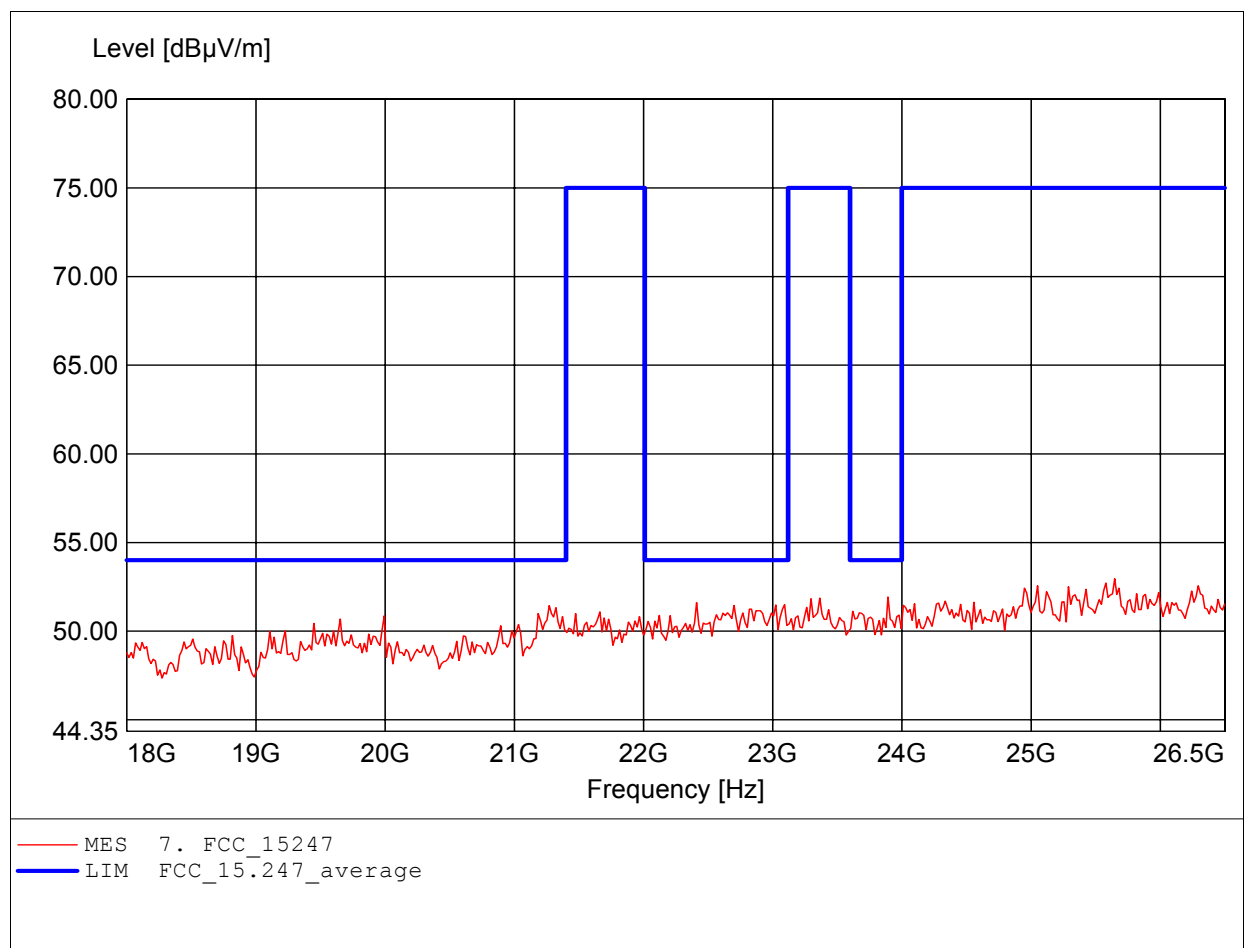

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HK 116	
	Freq: 187.735MHz, Emax: 45.18dBµV/m, RBW: 100kHz	

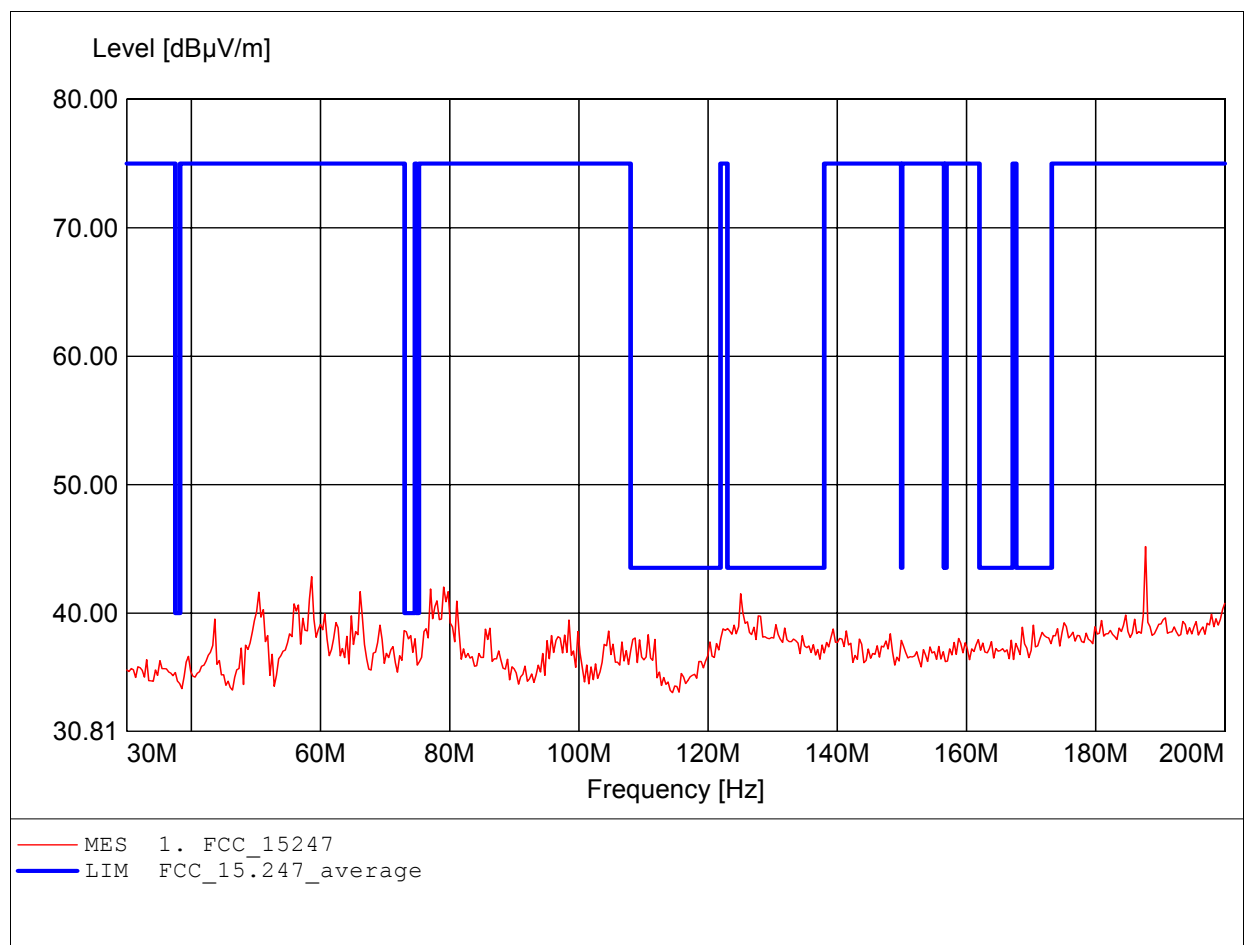

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HK 116	
	Freq: 187.735MHz, Emax: 47.08dBµV/m, RBW: 100kHz	

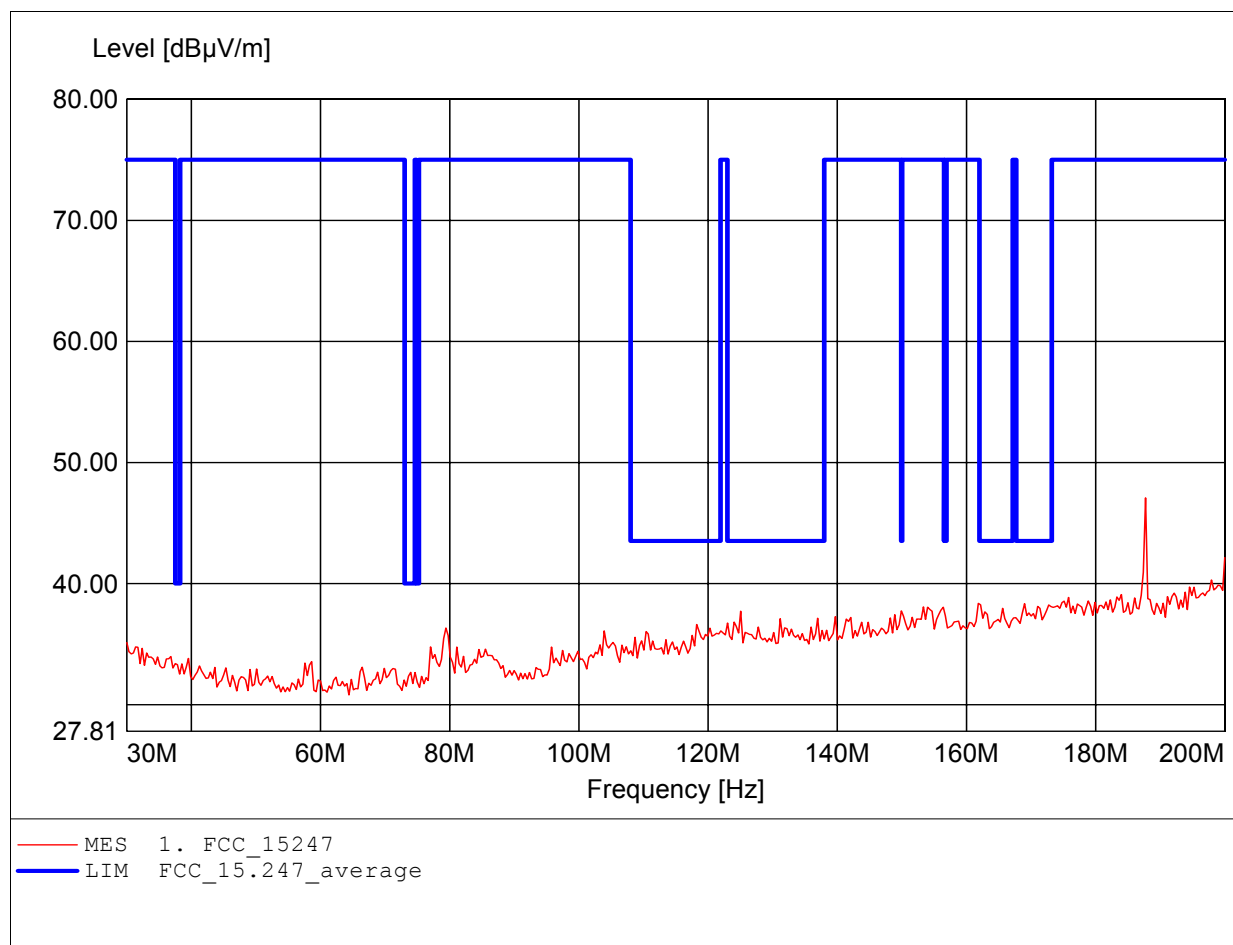

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HL 223,	
	Freq: 499.800MHz, Emax: 45.05dBμV/m, RBW: 100kHz	

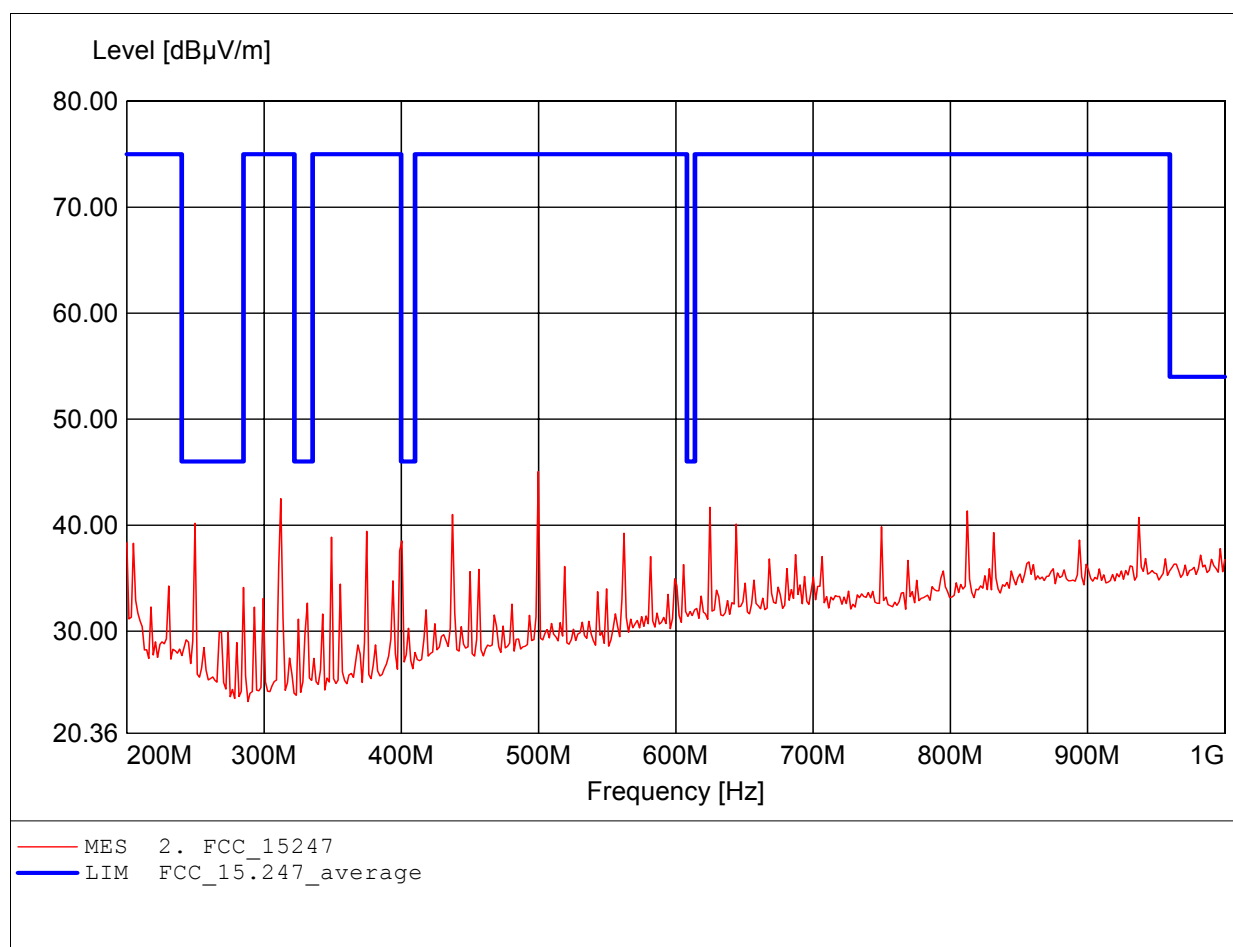

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HL 223,	
	Freq: 499.800MHz, Emax: 49.88dBµV/m, RBW: 100kHz	

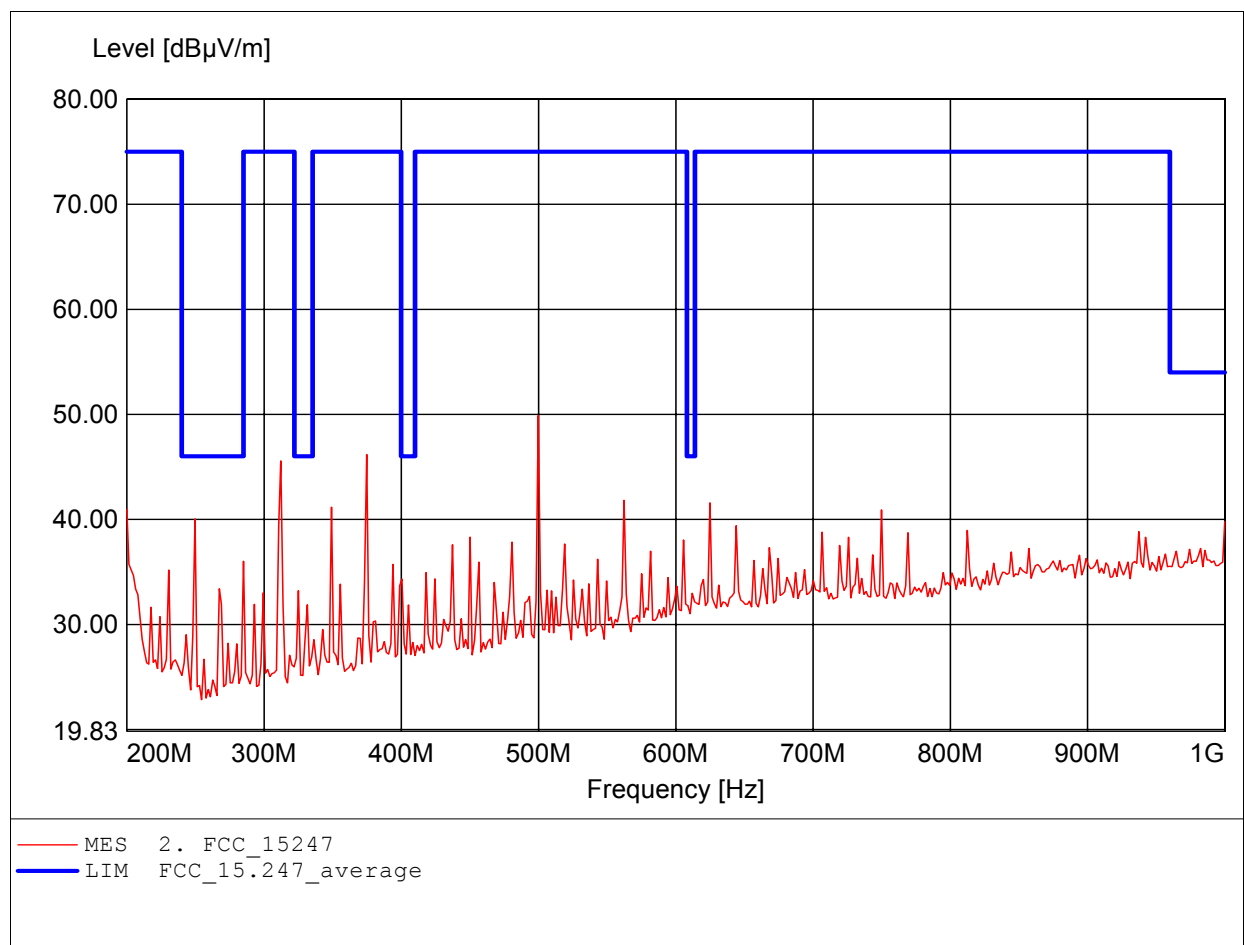

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 2.088GHz, Emax: 50.24dBμV/m, RBW: 1MHz	

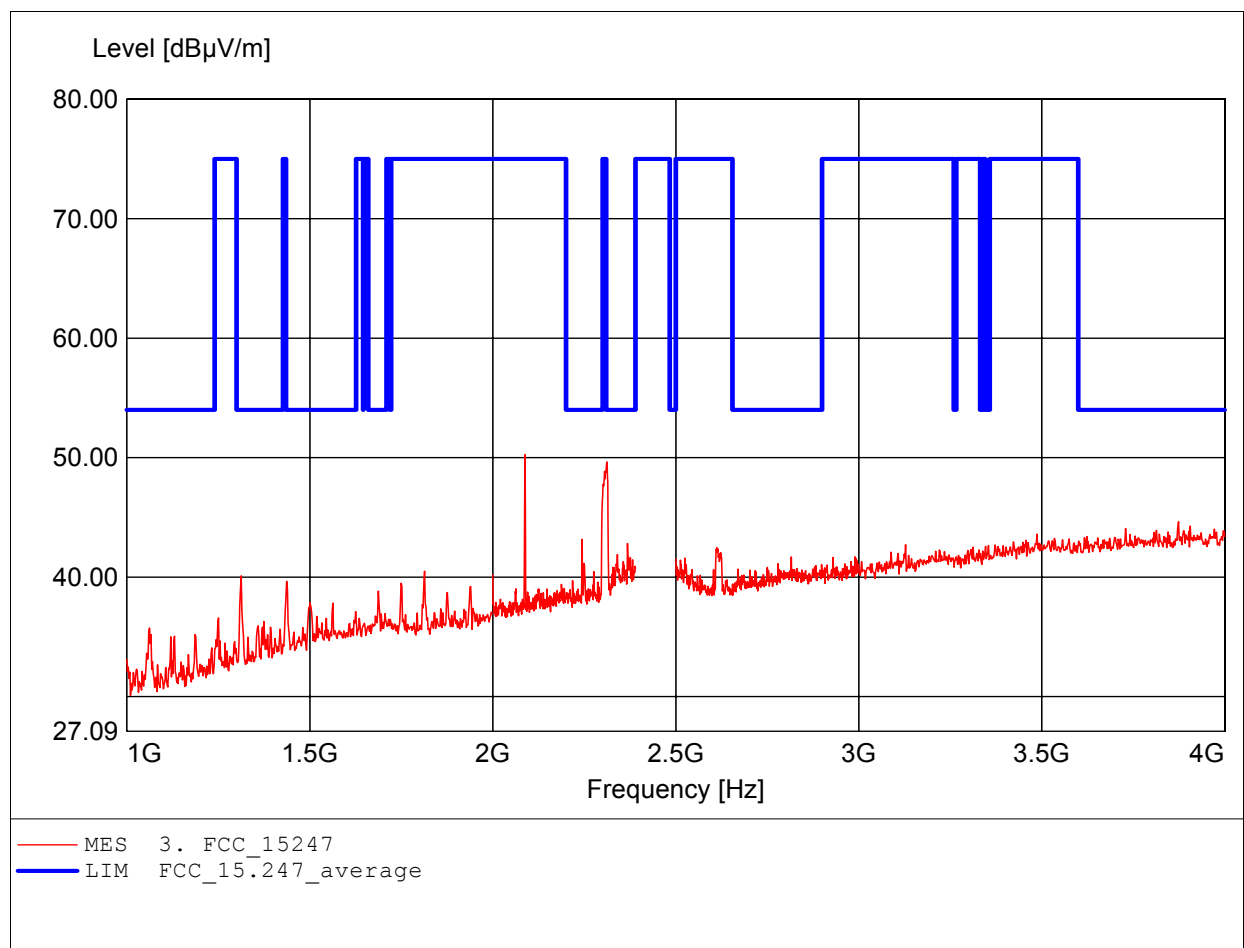

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 3.800GHz, Emax: 43.48dBμV/m, RBW: 1MHz	

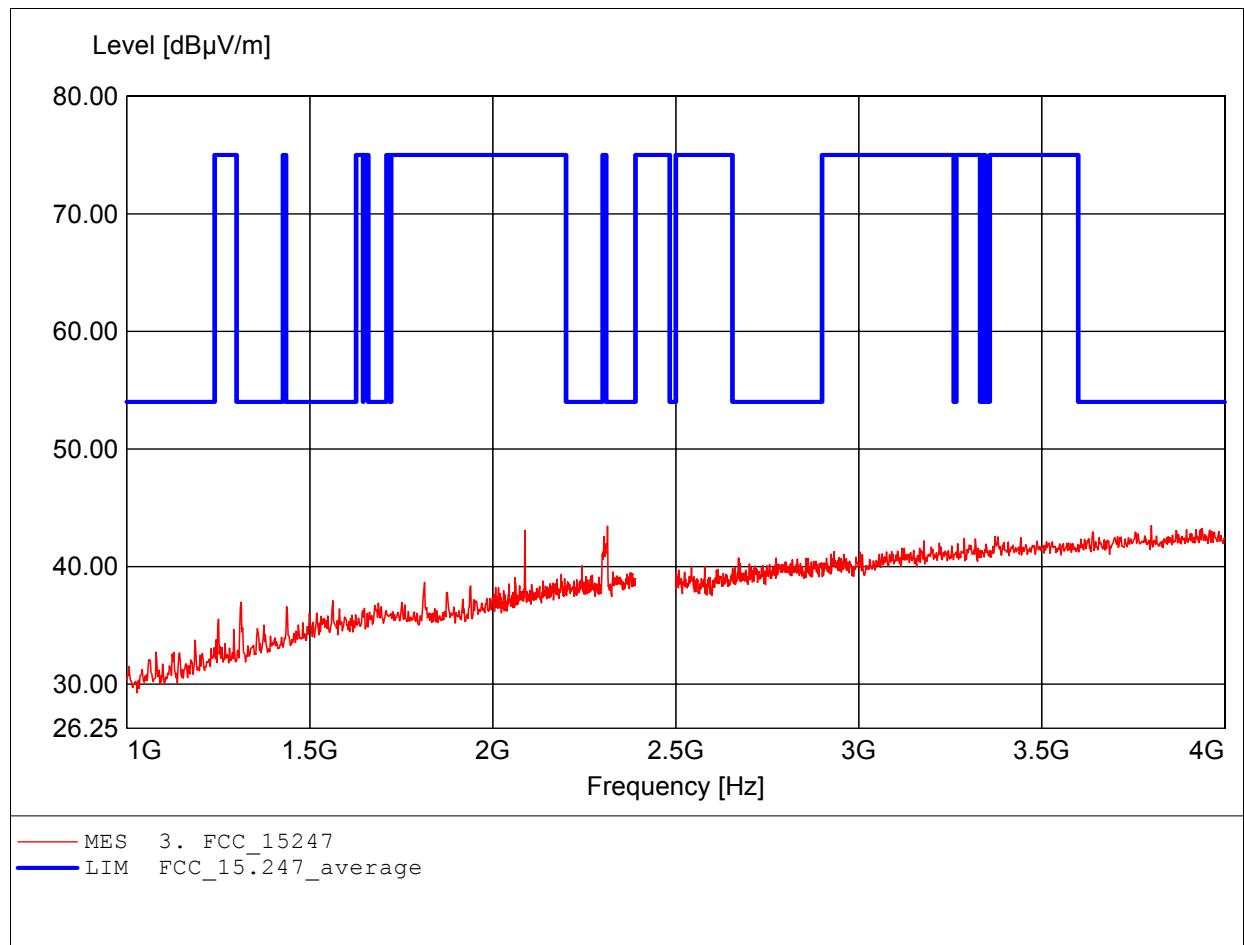

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 7.768GHz, Emax: 51.97dBμV/m, RBW: 1MHz	

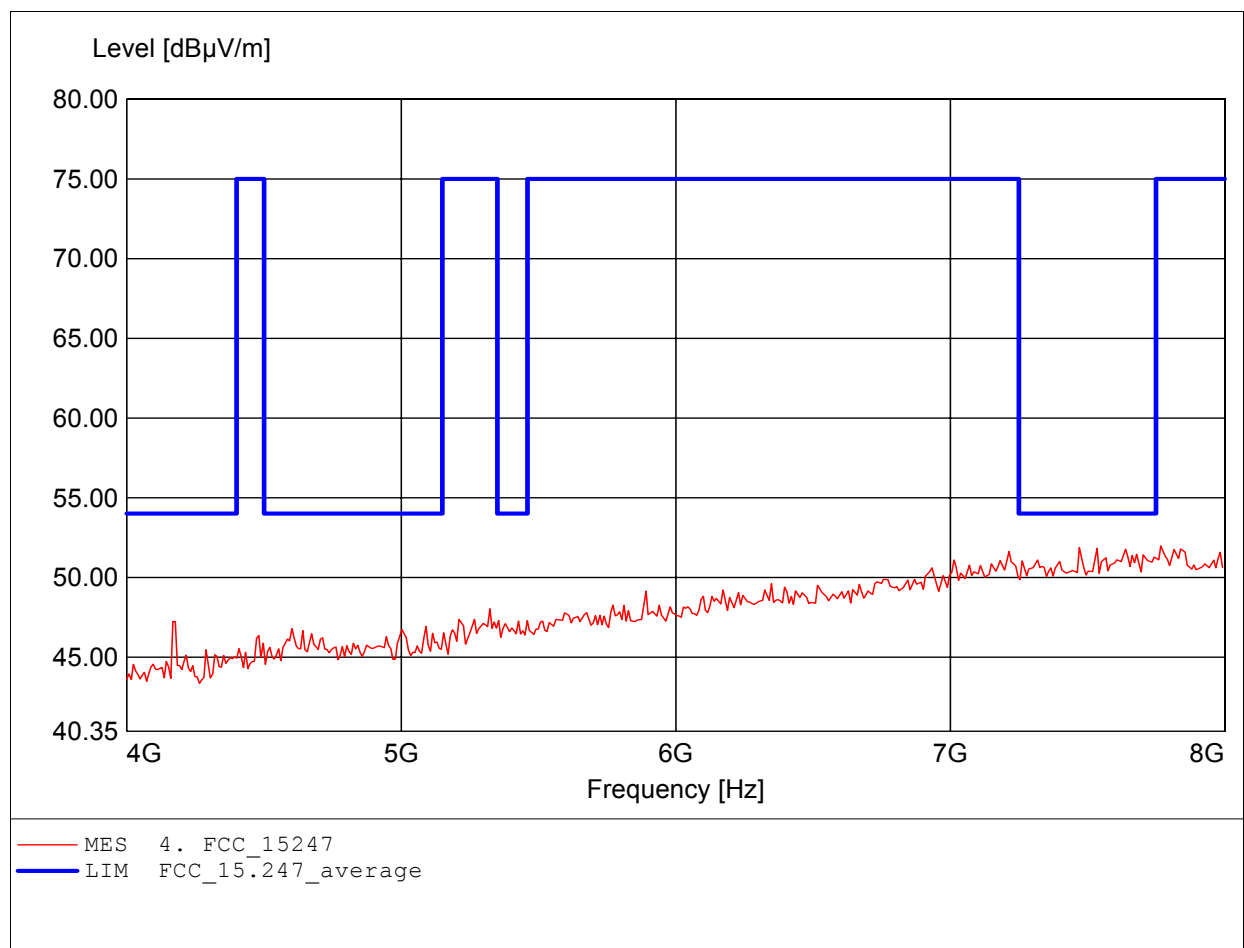

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: WIRELESS ADSL FIREWALL ROUTER
MODEL NO.: DG834G V2 Type of Antenna (D) 11G CH11
Approval Holder: Netgear Inc.
Test Site / Operator: ETS / Orville Chang
Temperature/Voltage: Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.944GHz, Emax: 51.95dBμV/m, RBW: 1MHz

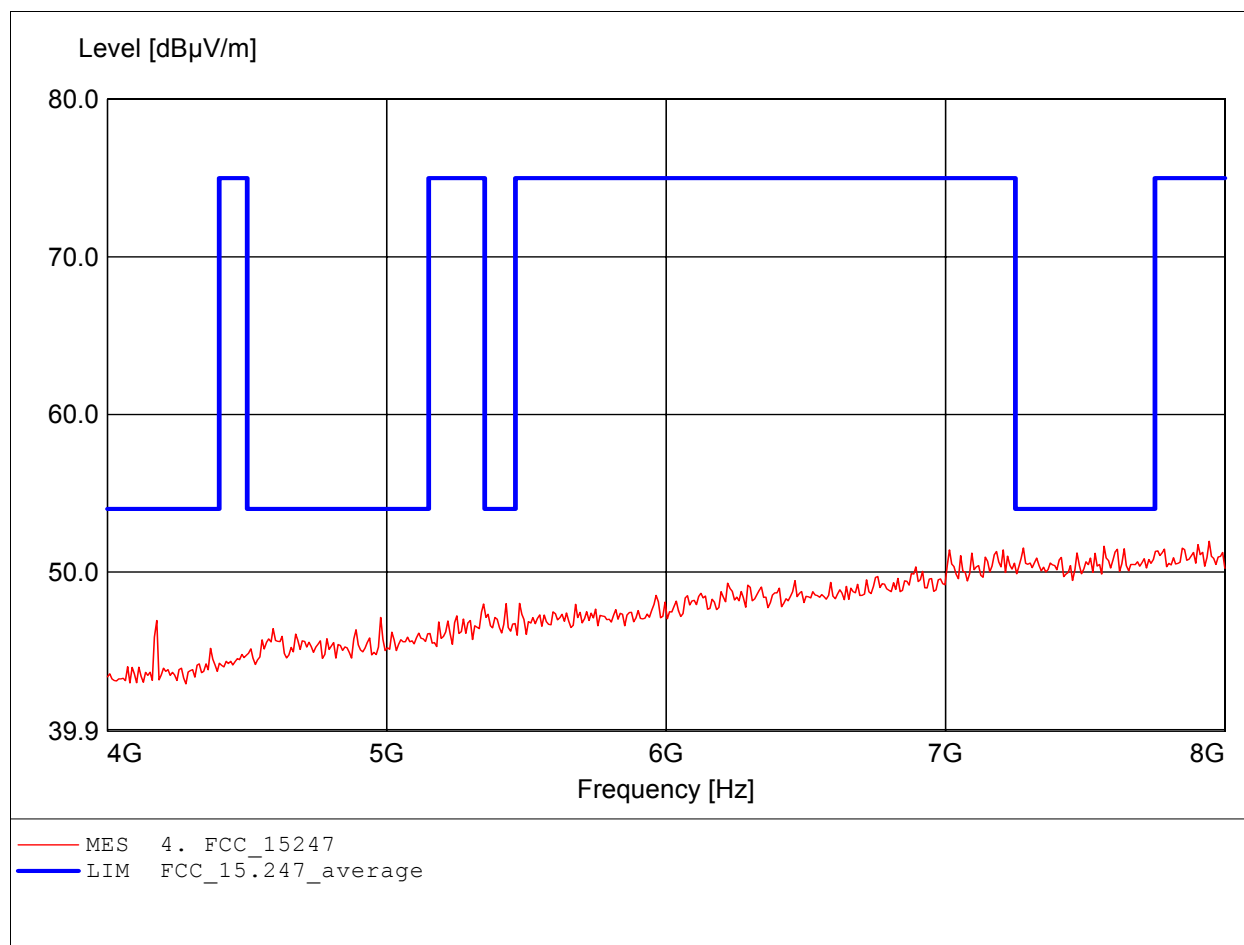

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 10.525GHz, Emax: 49.97dBμV/m, RBW: 1MHz	

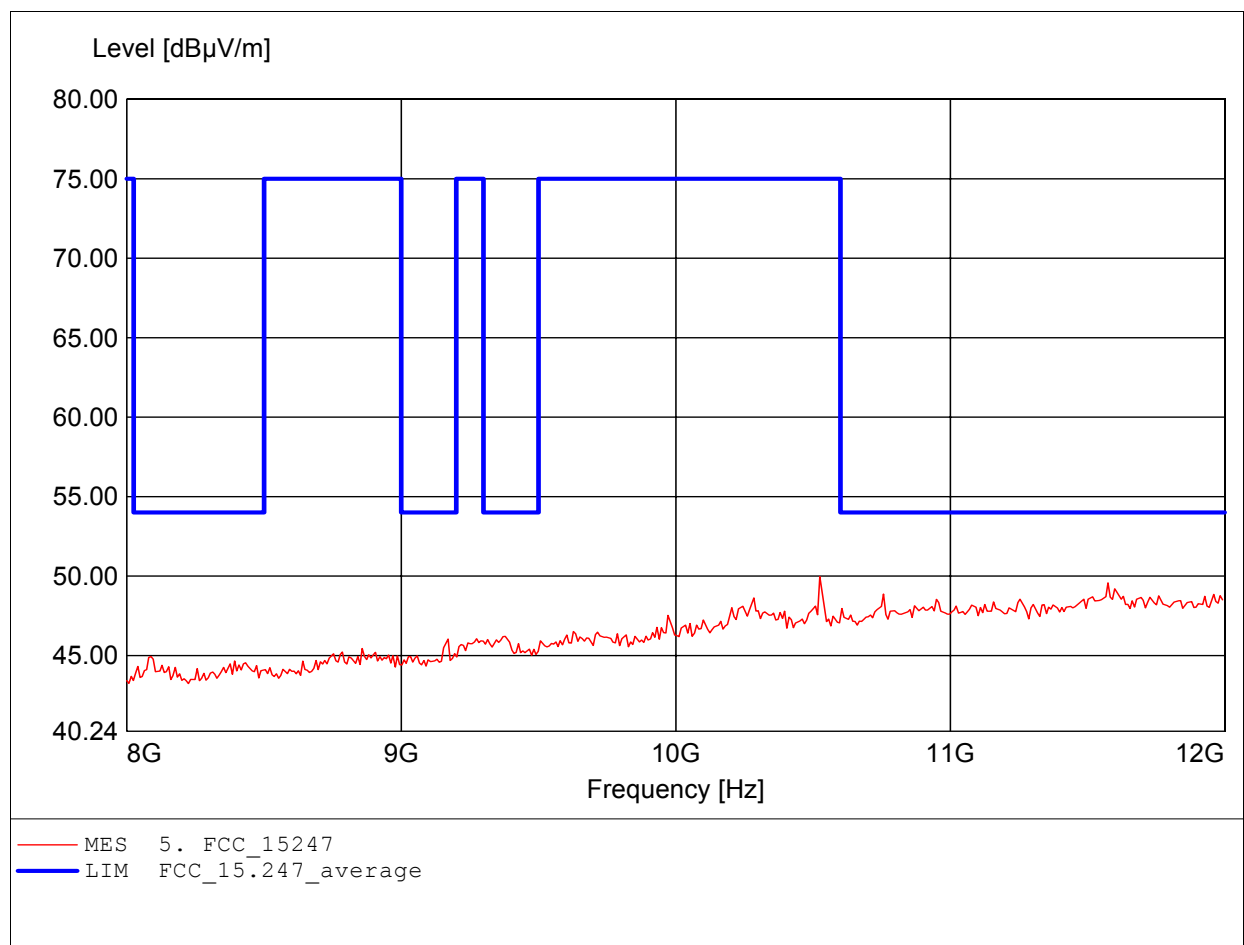

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 11.495GHz, Emax: 48.98dBμV/m, RBW: 1MHz	

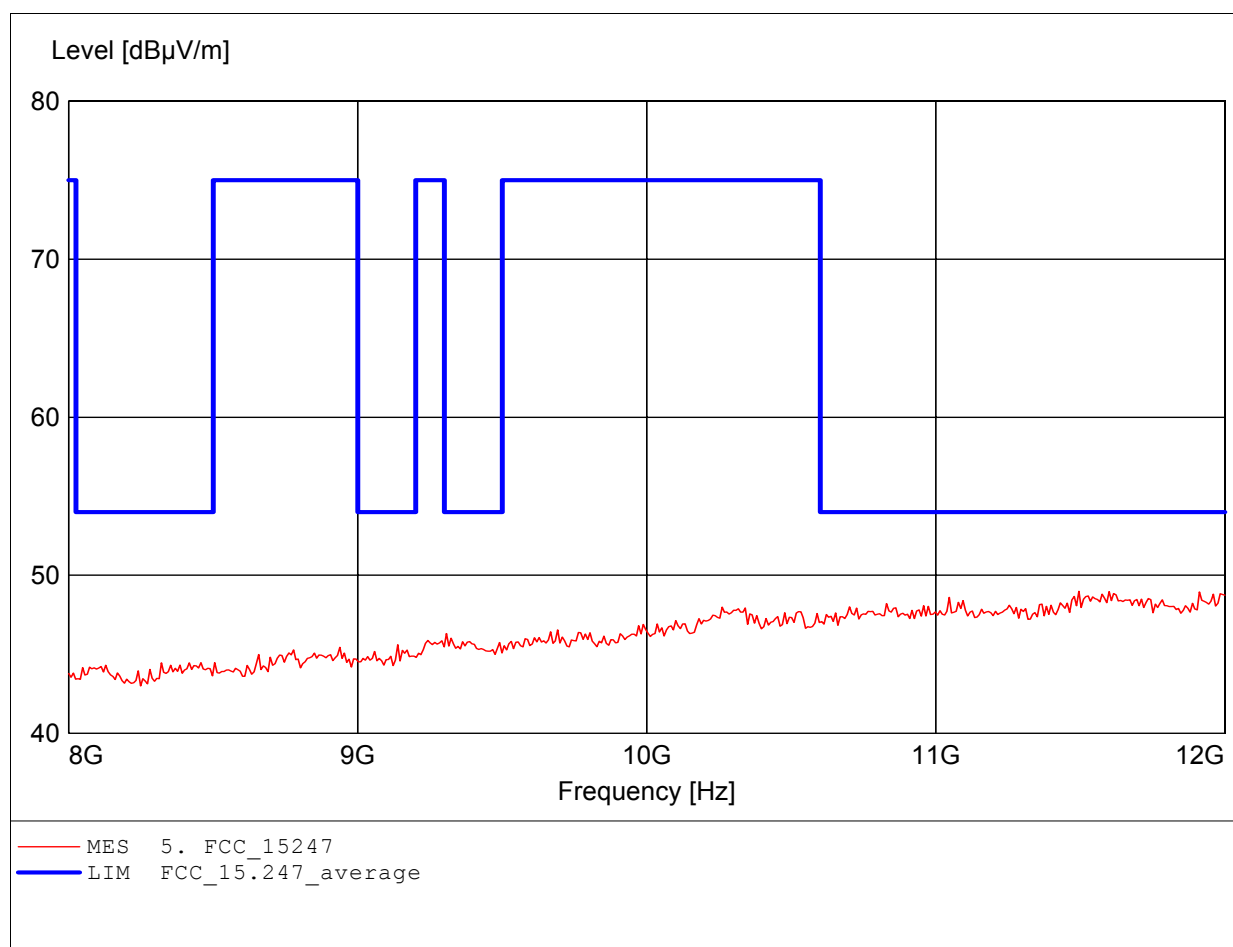

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 17.796GHz, Emax: 52.98dBμV/m, RBW: 1MHz	

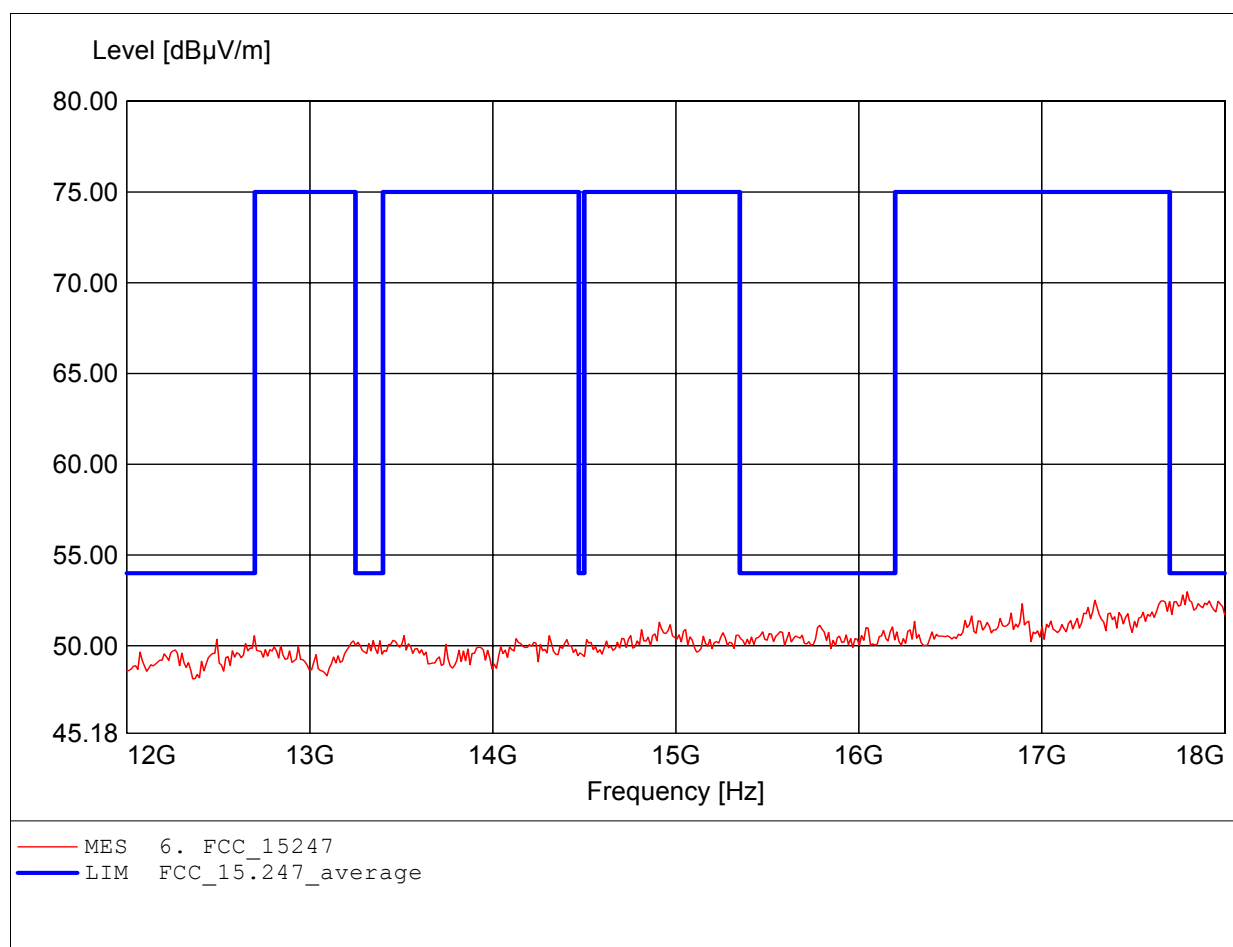

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: WIRELESS ADSL FIREWALL ROUTER
MODEL NO.: DG834G V2 Type of Antenna (D) 11G CH11
Approval Holder: Netgear Inc.
Test Site / Operator: ETS / Orville Chang
Temperature/Voltage: Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.868GHz, Emax: 52.86dBμV/m, RBW: 1MHz

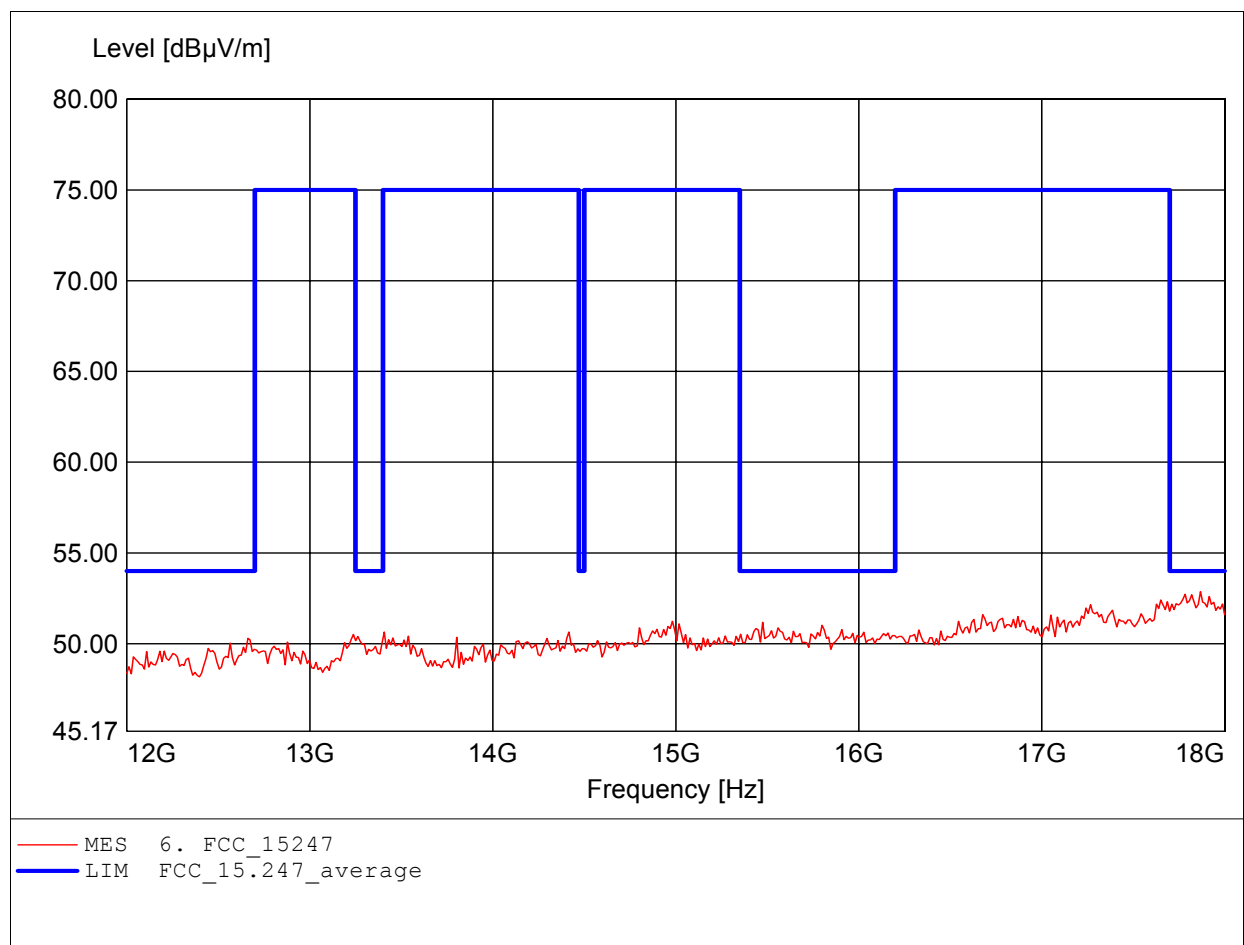

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 25.546GHz, Emax: 53.39dBμV/m, RBW: 1MHz	

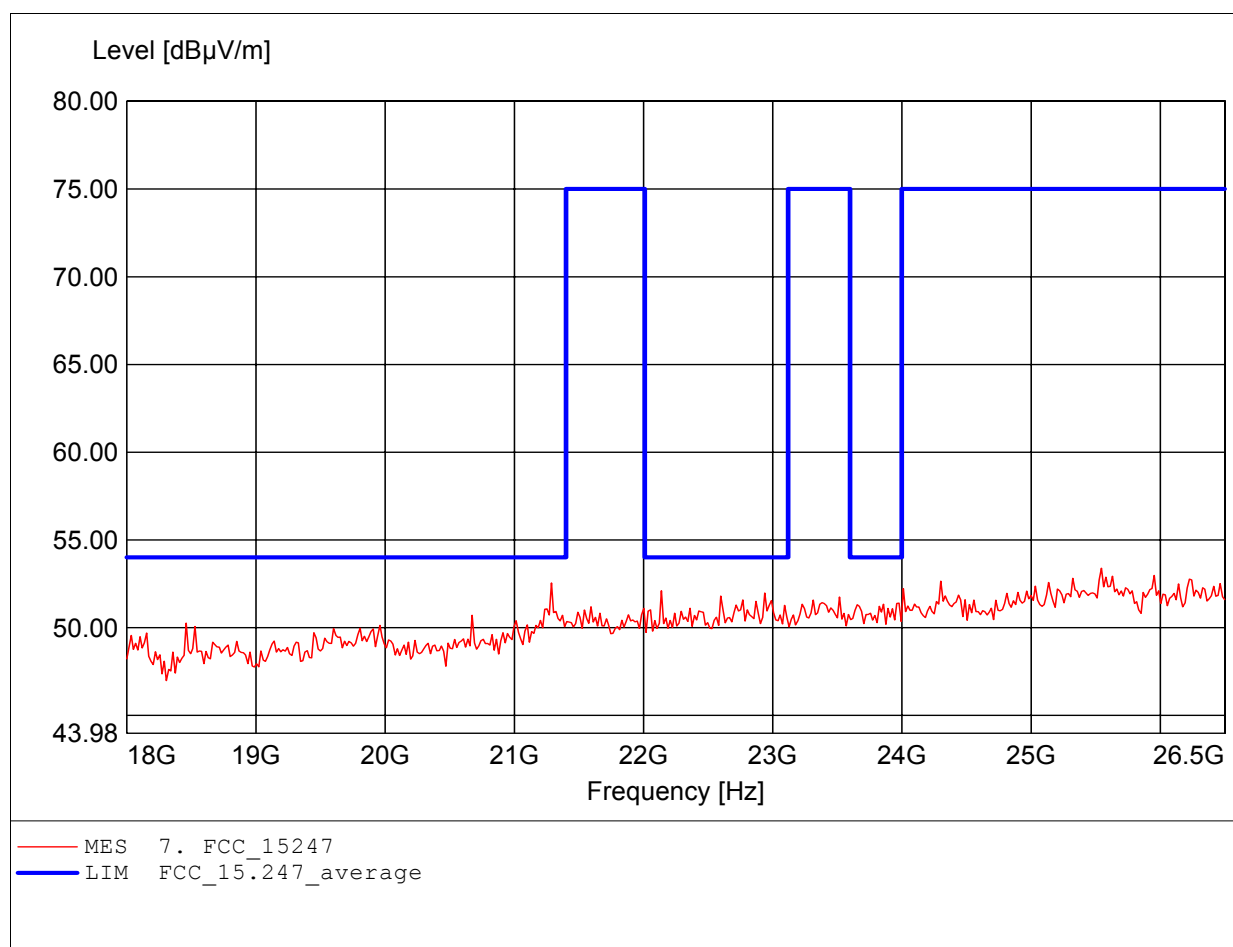

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (D) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 25.529GHz, Emax: 53.06dBμV/m, RBW: 1MHz	

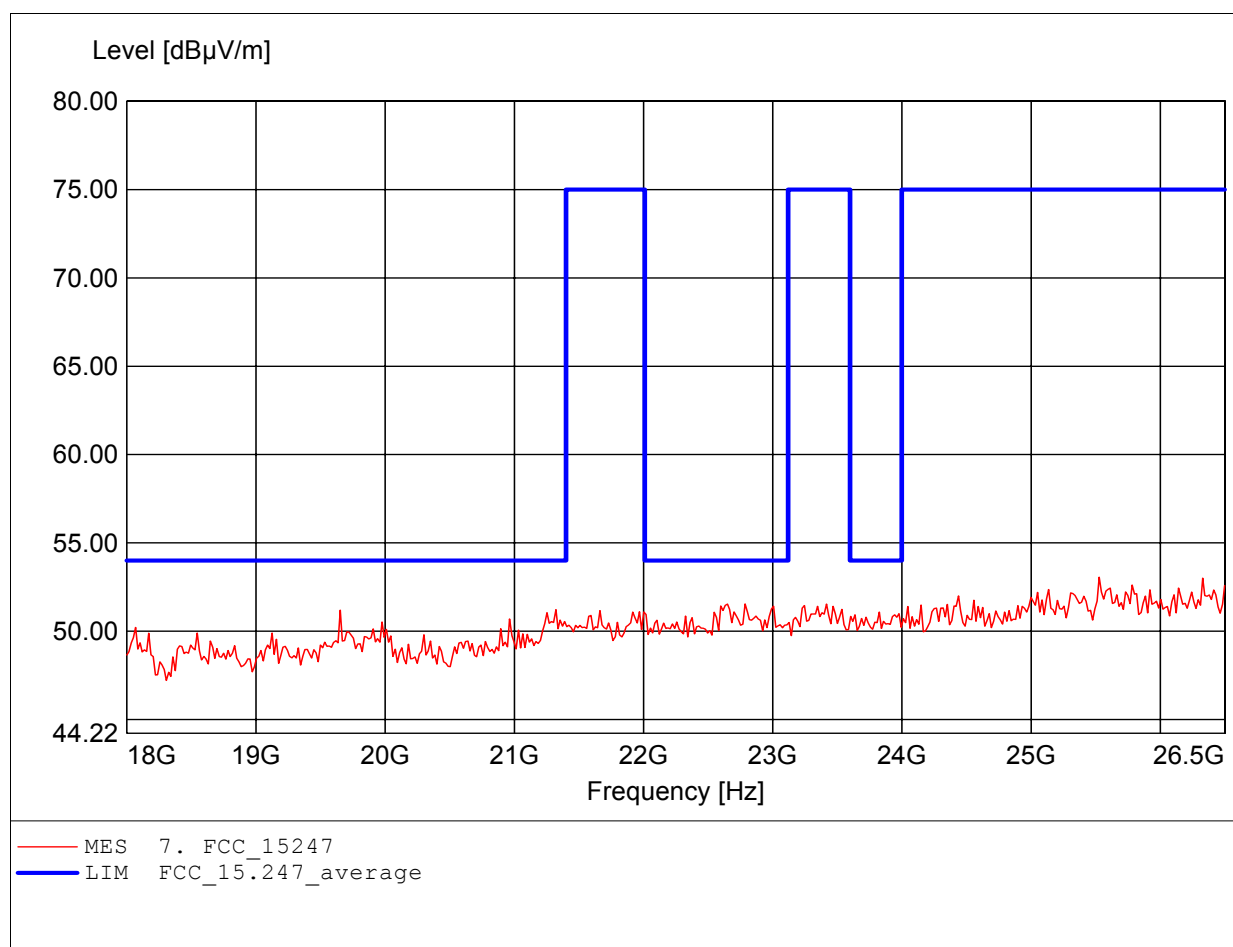

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HK 116	
	Freq: 187.735MHz, Emax: 46.80dBµV/m, RBW: 100kHz	

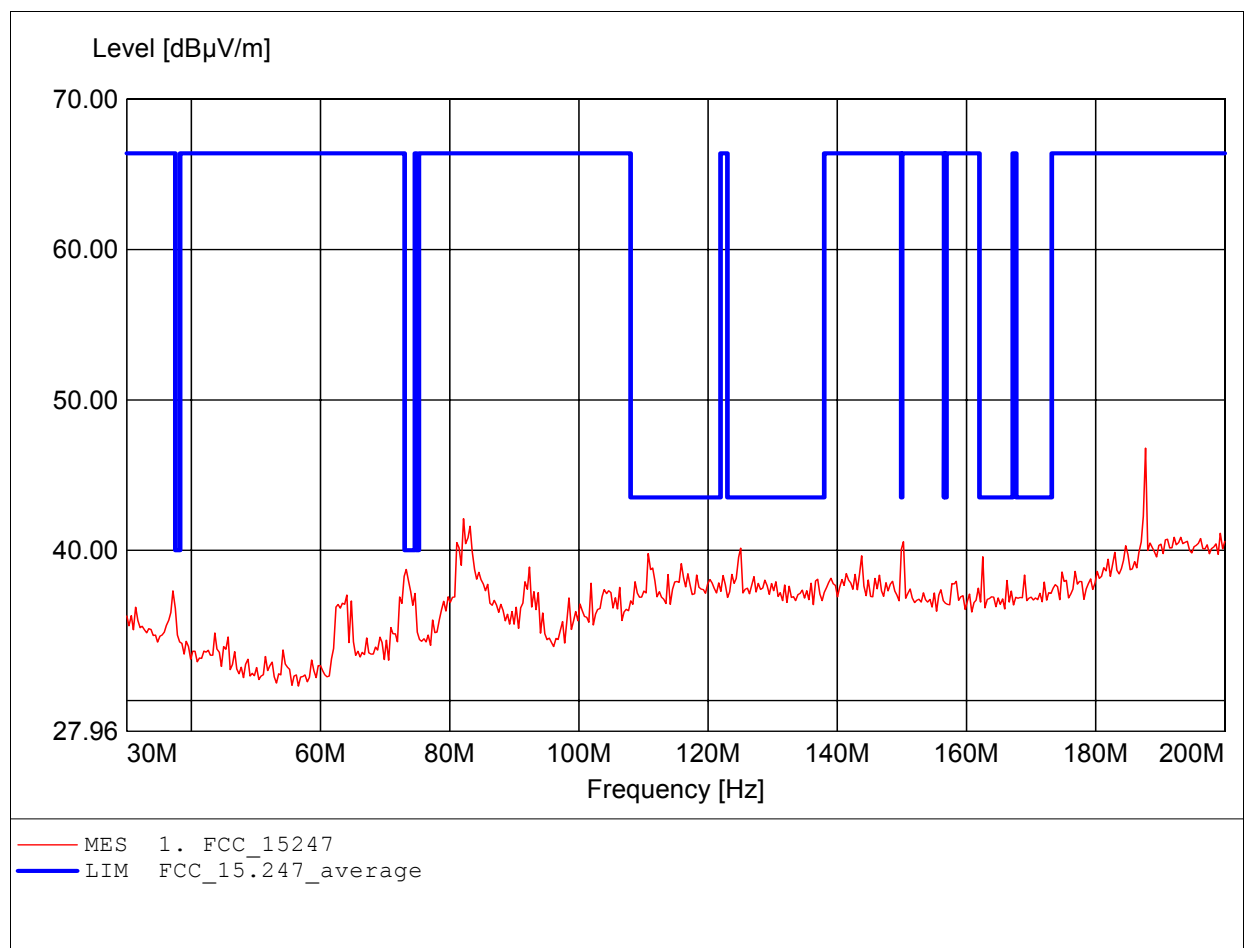

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HK 116	
	Freq: 187.735MHz, Emax: 47.76dBµV/m, RBW: 100kHz	

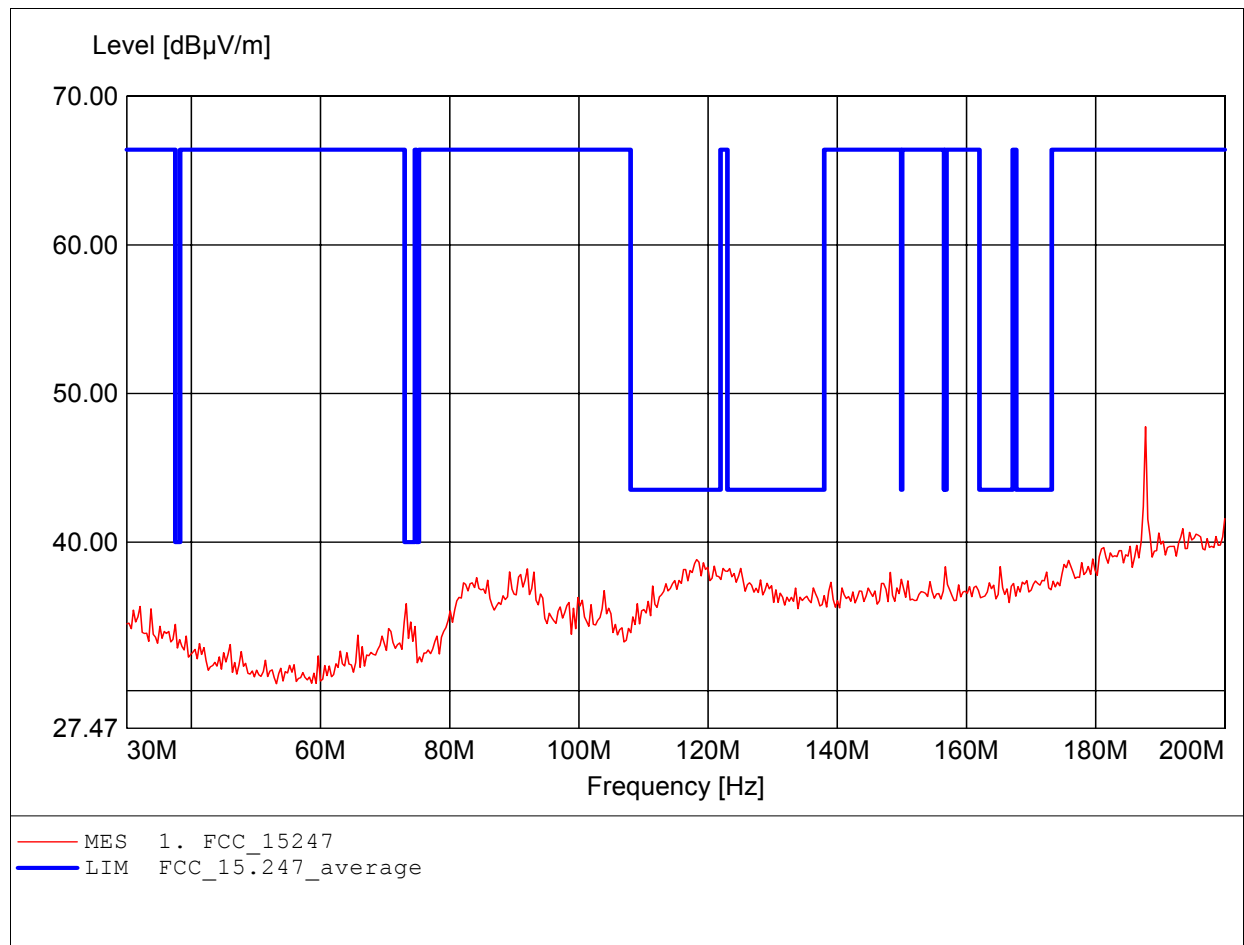

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HL 223,	
	Freq: 499.800MHz, Emax: 46.36dBµV/m, RBW: 100kHz	

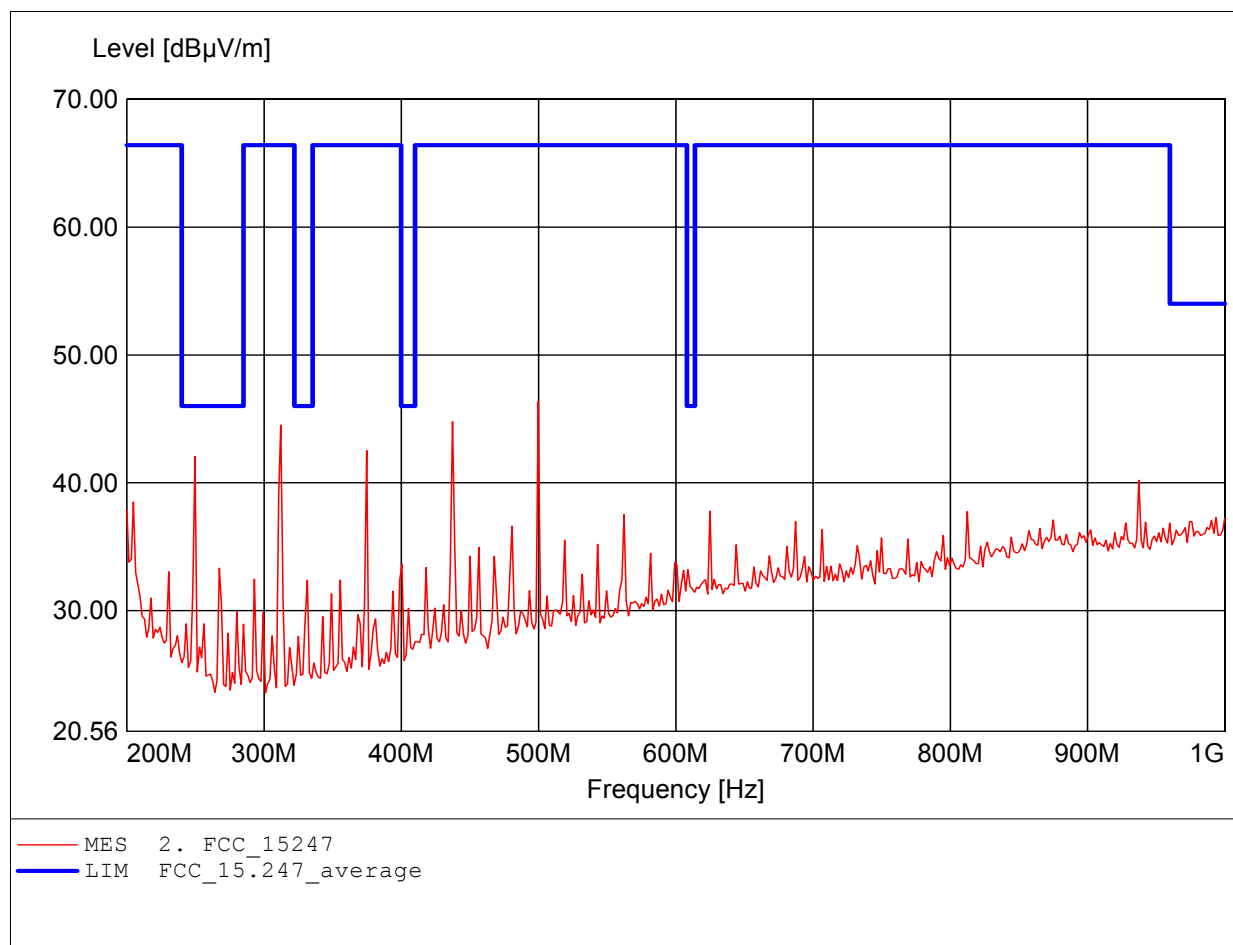

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HL 223,	
	Freq: 499.800MHz, Emax: 46.37dBµV/m, RBW: 100kHz	

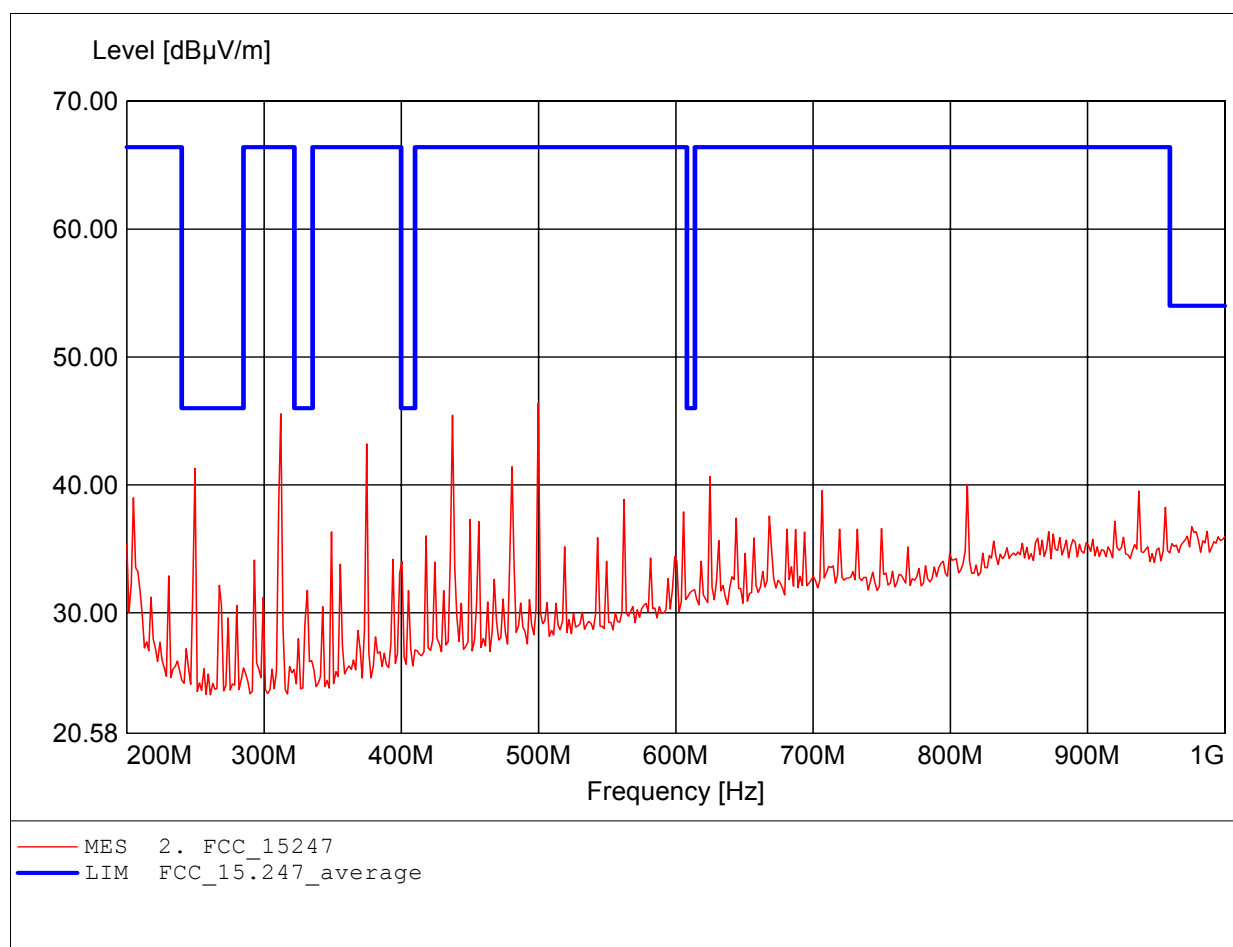

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 2.038GHz, Emax: 45.50dBµV/m, RBW: 1MHz	

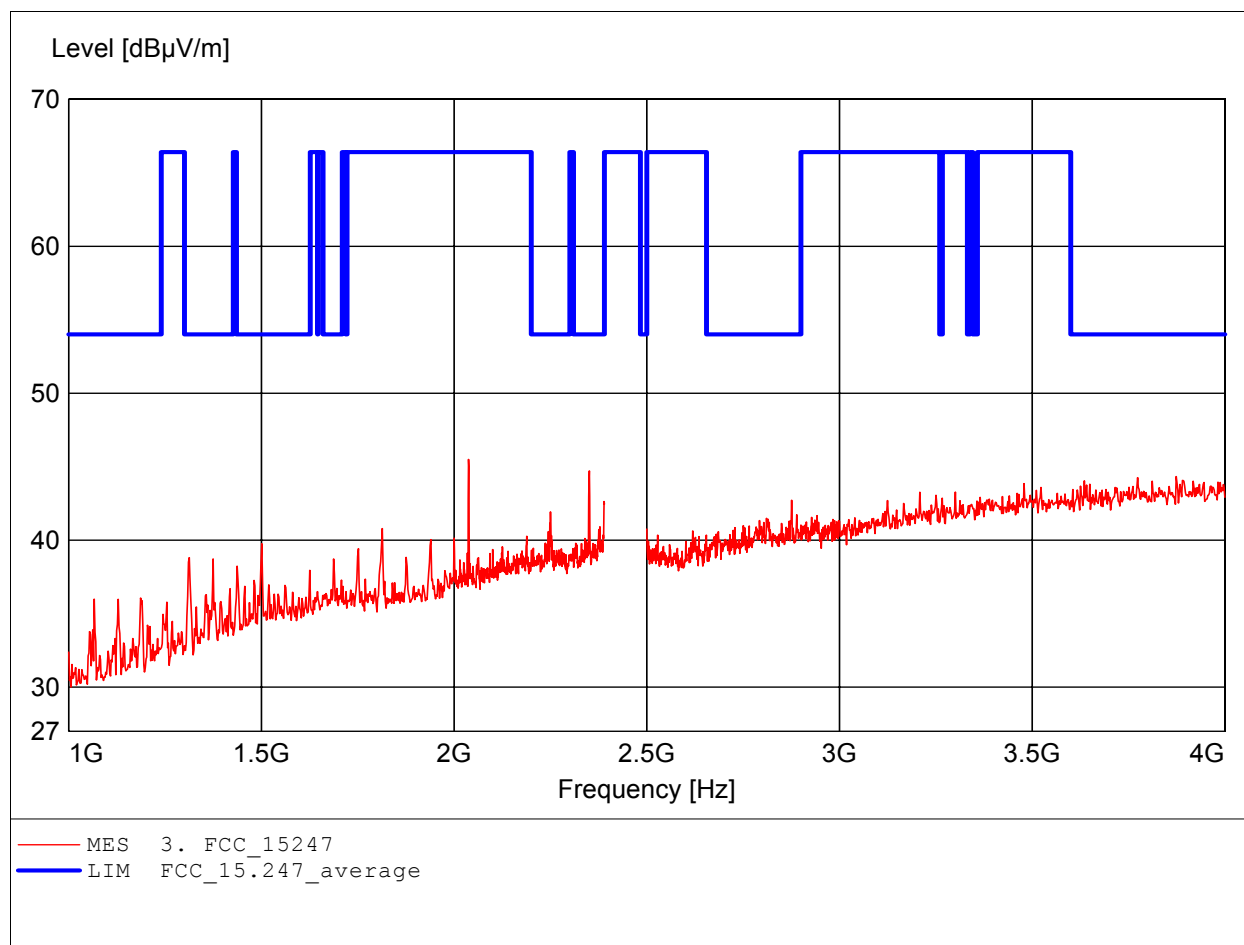

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 3.934GHz, Emax: 44.89dBμV/m, RBW: 1MHz	

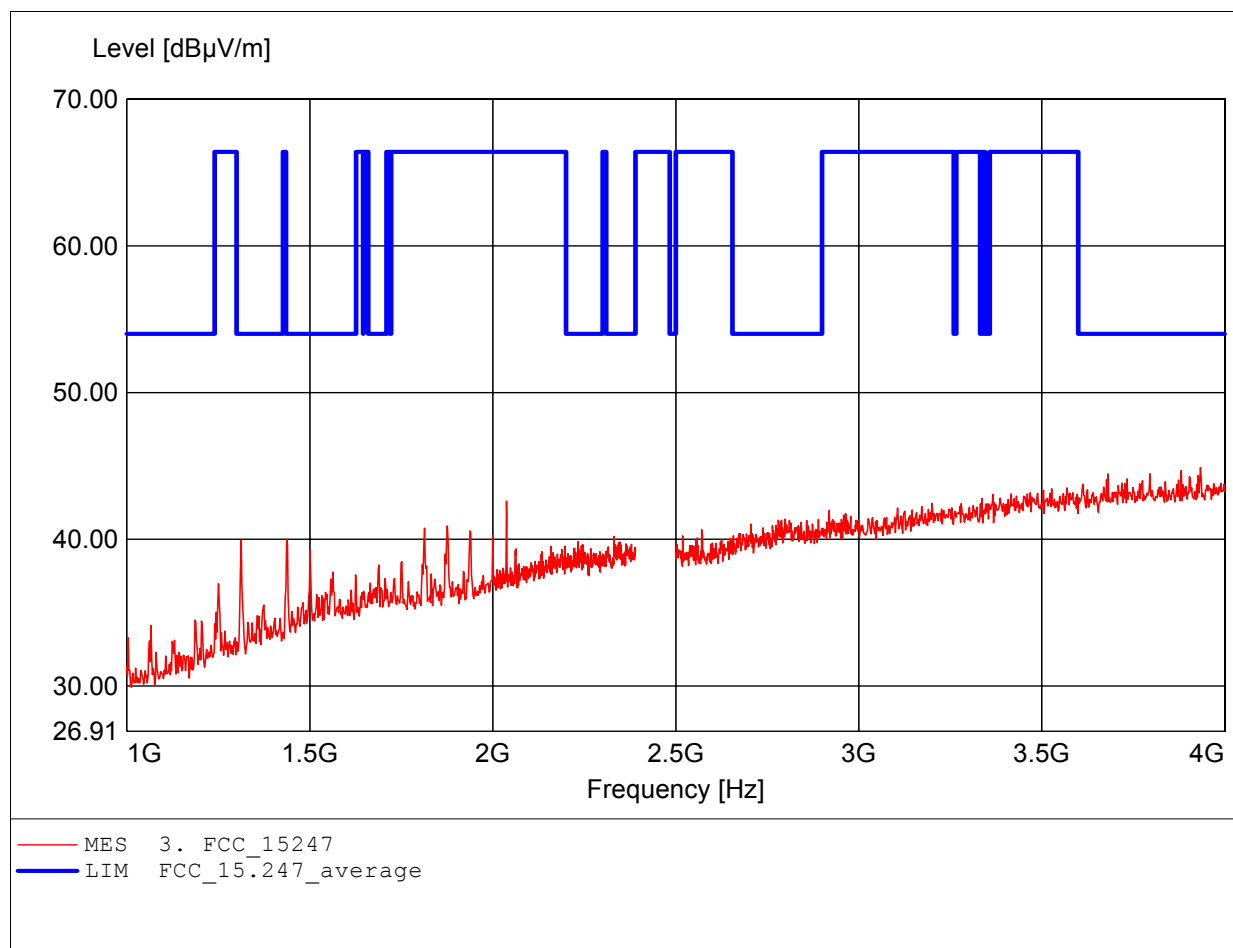

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 7.671GHz, Emax: 52.94dBμV/m, RBW: 1MHz	

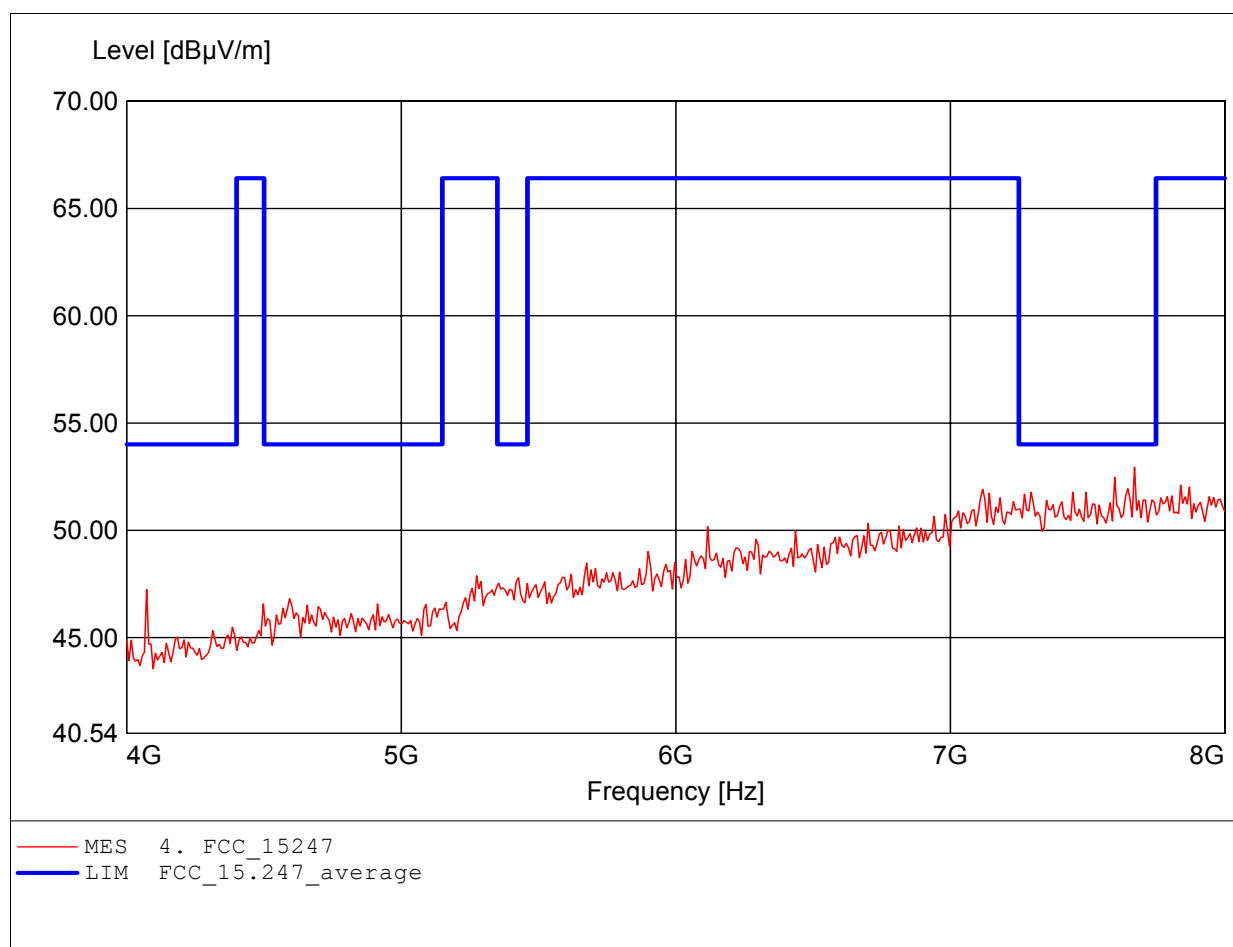

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 7.816GHz, Emax: 51.91dBμV/m, RBW: 1MHz	

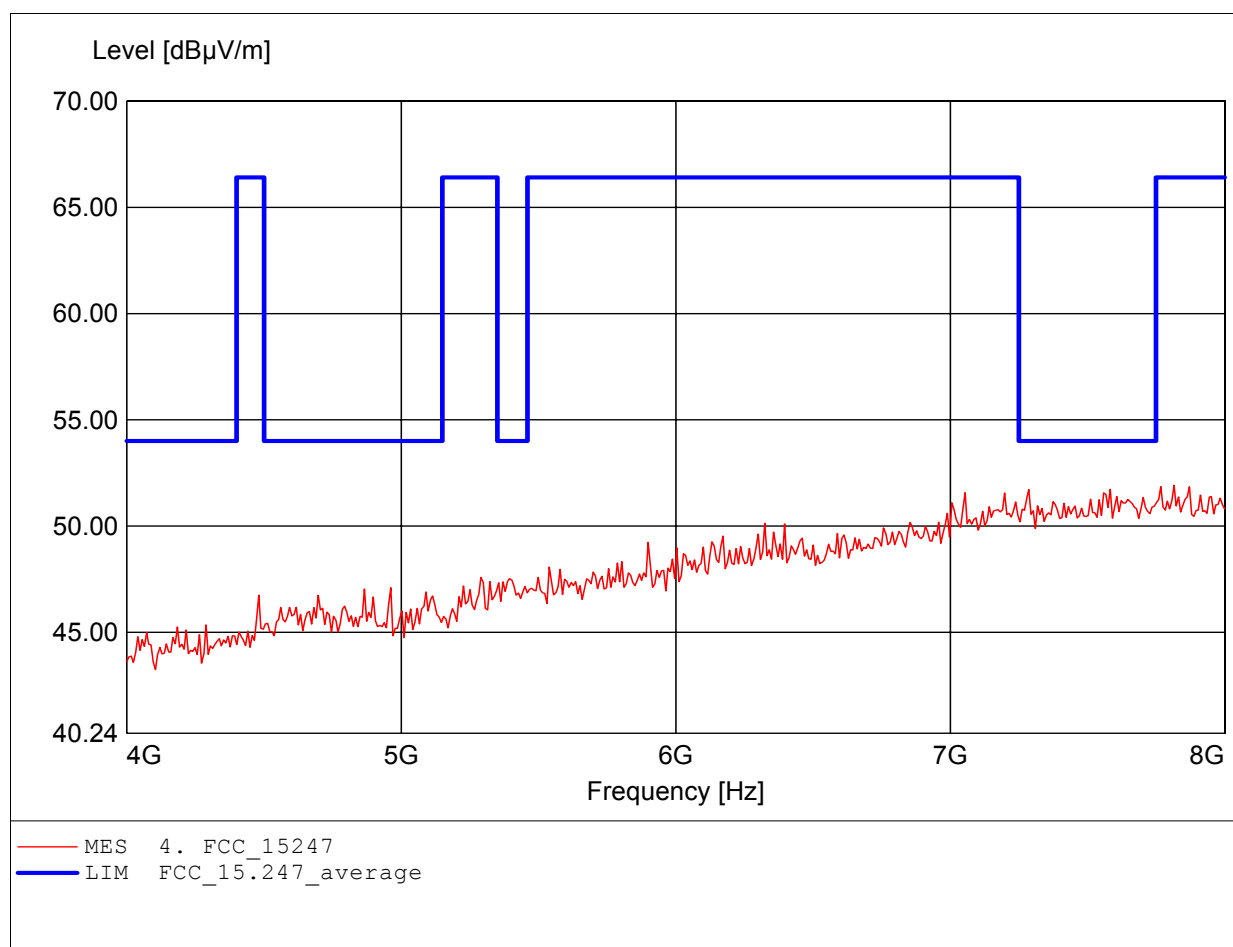

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 11.832GHz, Emax: 49.19dBμV/m, RBW: 1MHz	

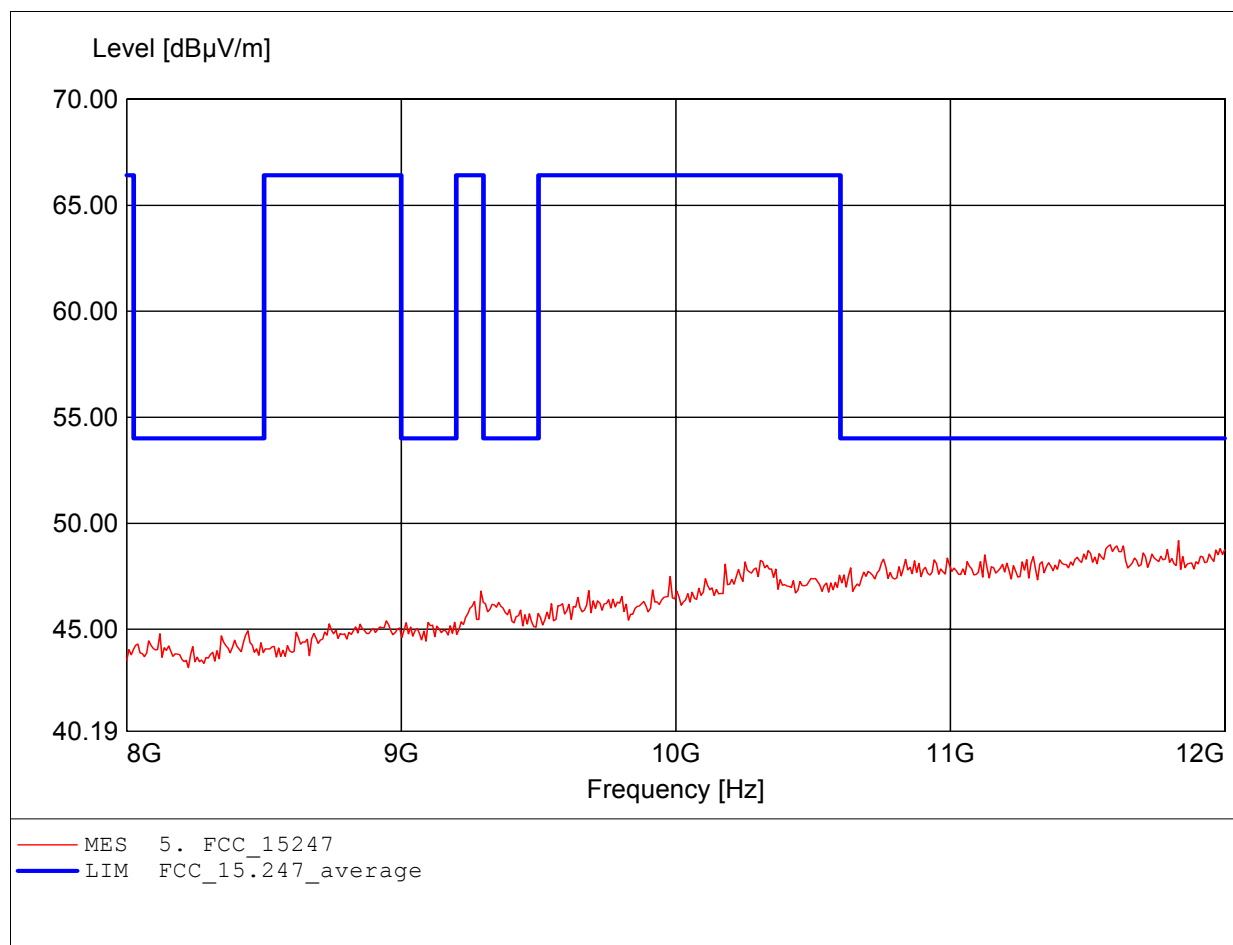

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: WIRELESS ADSL FIREWALL ROUTER
MODEL NO.: DG834G V2 Type of Antenna (E) 11G CH1
Approval Holder: Netgear Inc.
Test Site / Operator: ETS / Orville Chang
Temperature/Voltage: Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.583GHz, Emax: 49.38dBμV/m, RBW: 1MHz

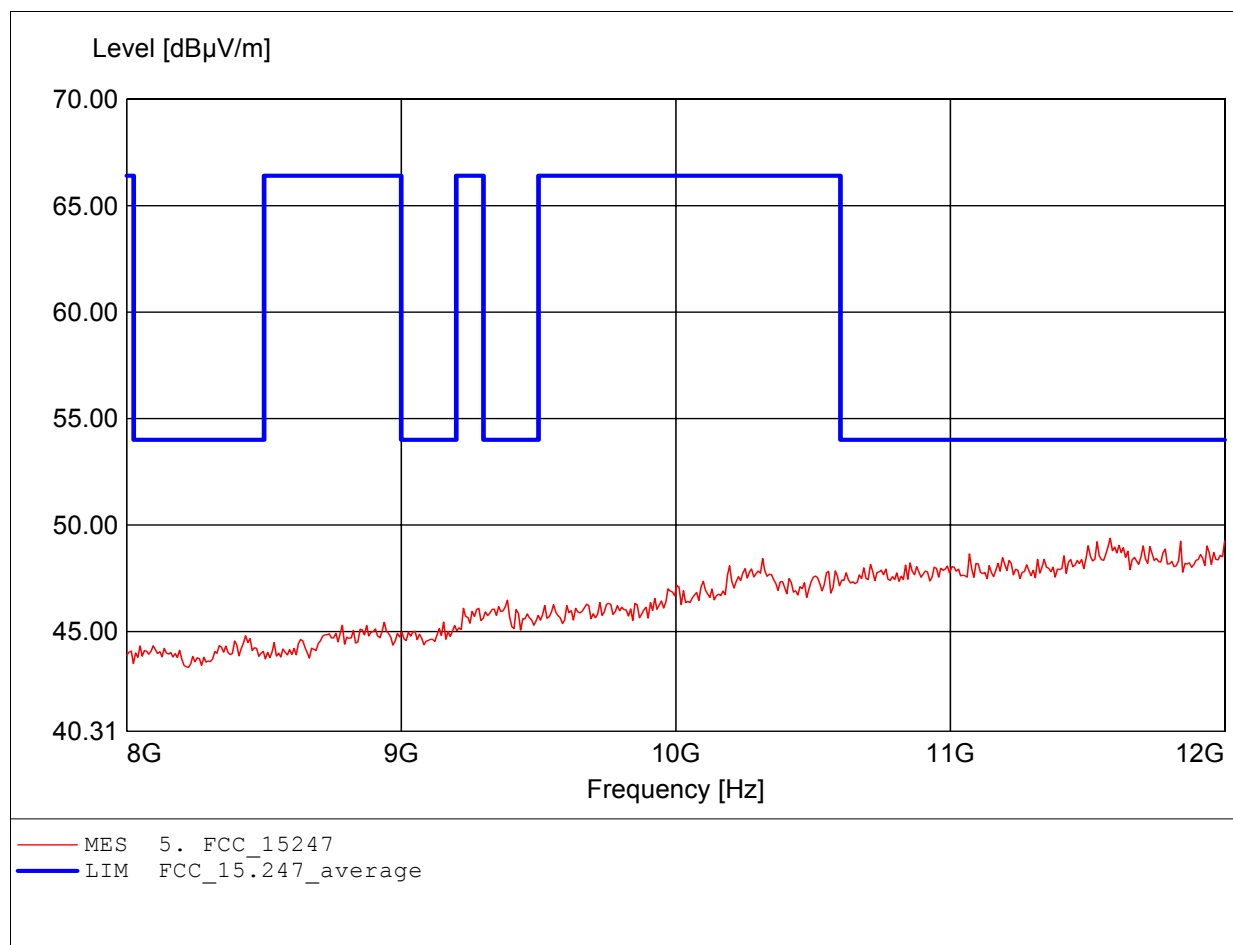

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: WIRELESS ADSL FIREWALL ROUTER
MODEL NO.: DG834G V2 Type of Antenna (E) 11G CH1
Approval Holder: Netgear Inc.
Test Site / Operator: ETS / Orville Chang
Temperature/Voltage: Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.928GHz, Emax: 52.91dBμV/m, RBW: 1MHz

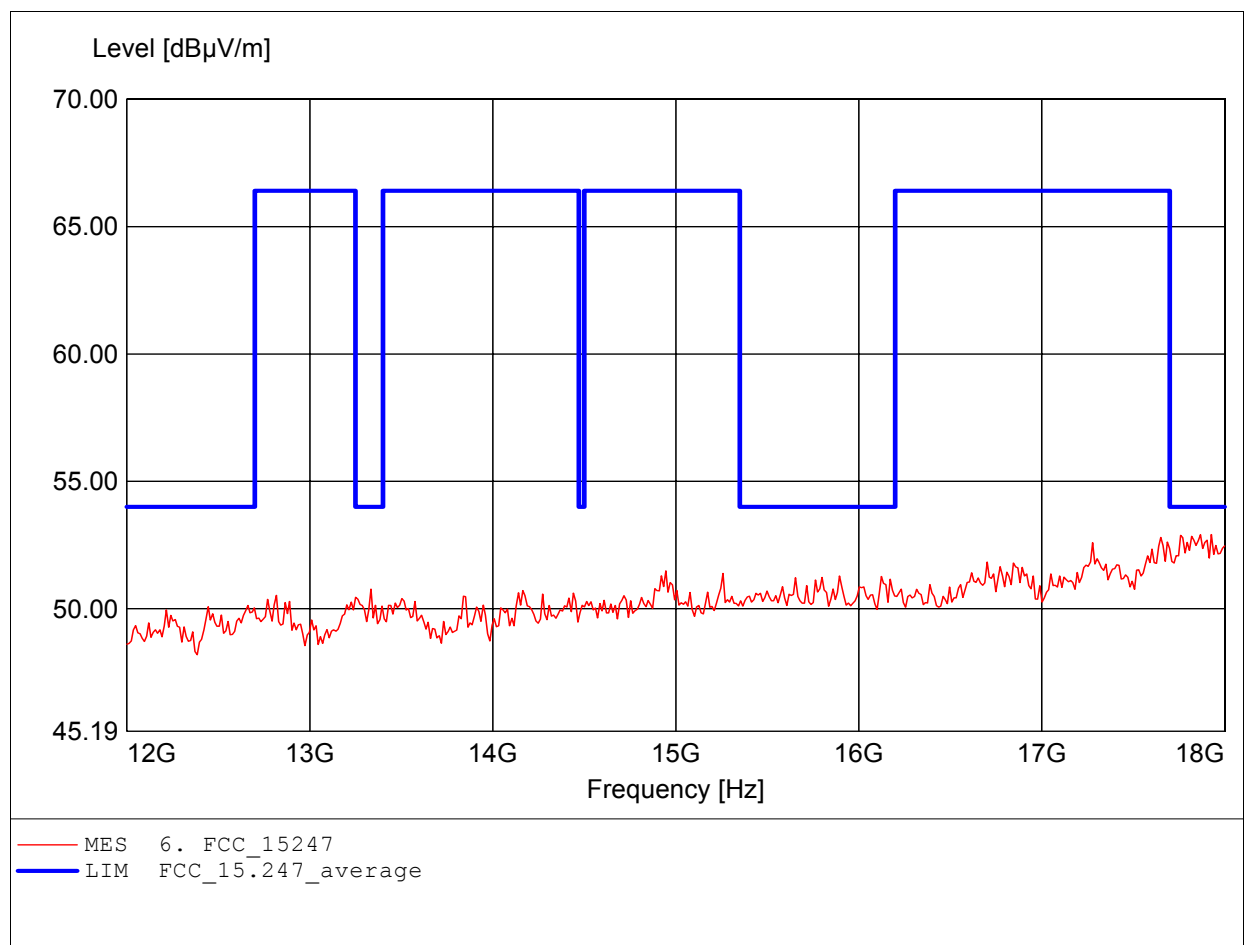

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 17.651GHz, Emax: 52.95dBμV/m, RBW: 1MHz	

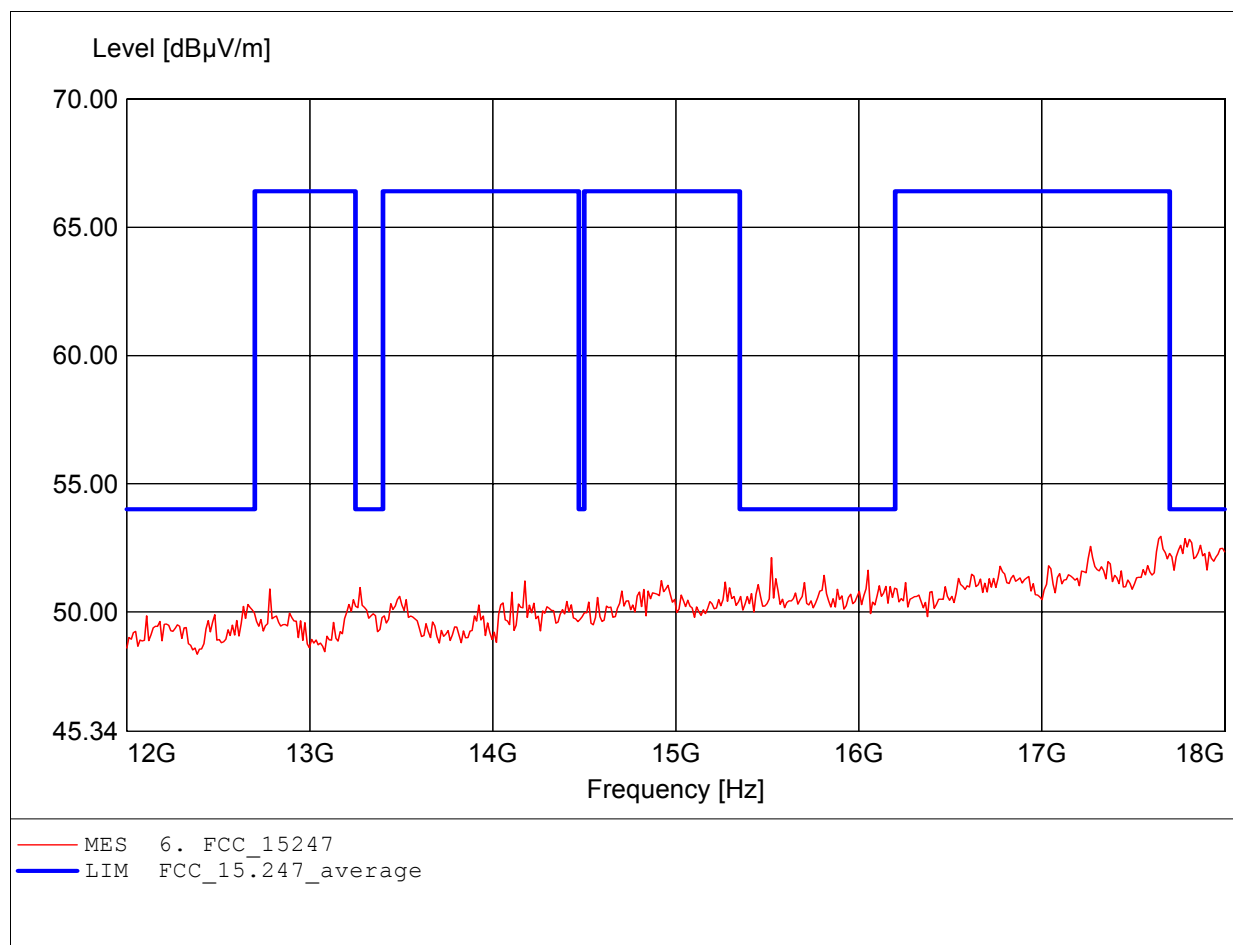

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 25.461GHz, Emax: 53.94dBμV/m, RBW: 1MHz	

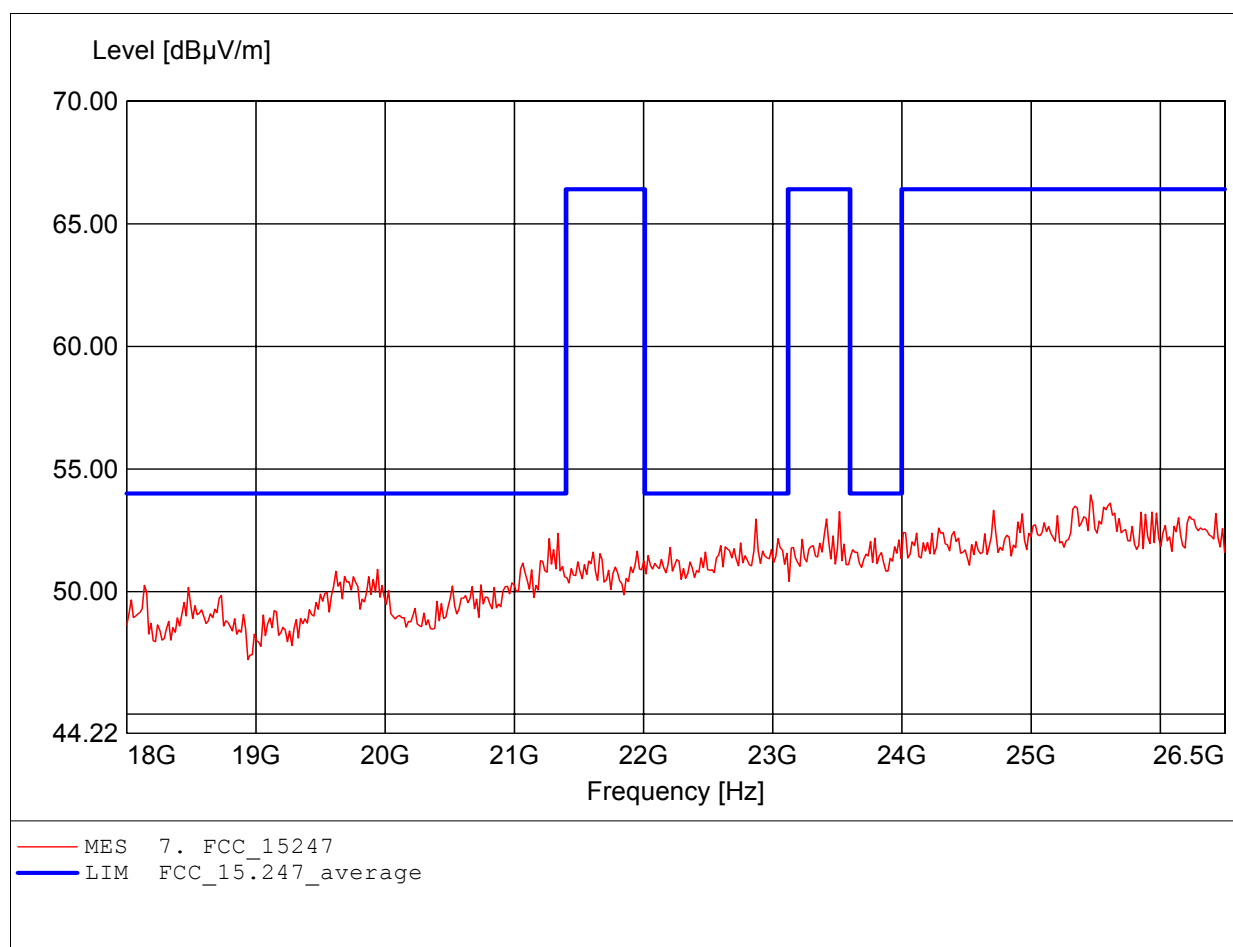

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH1
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 25.699GHz, Emax: 53.03dBμV/m, RBW: 1MHz	

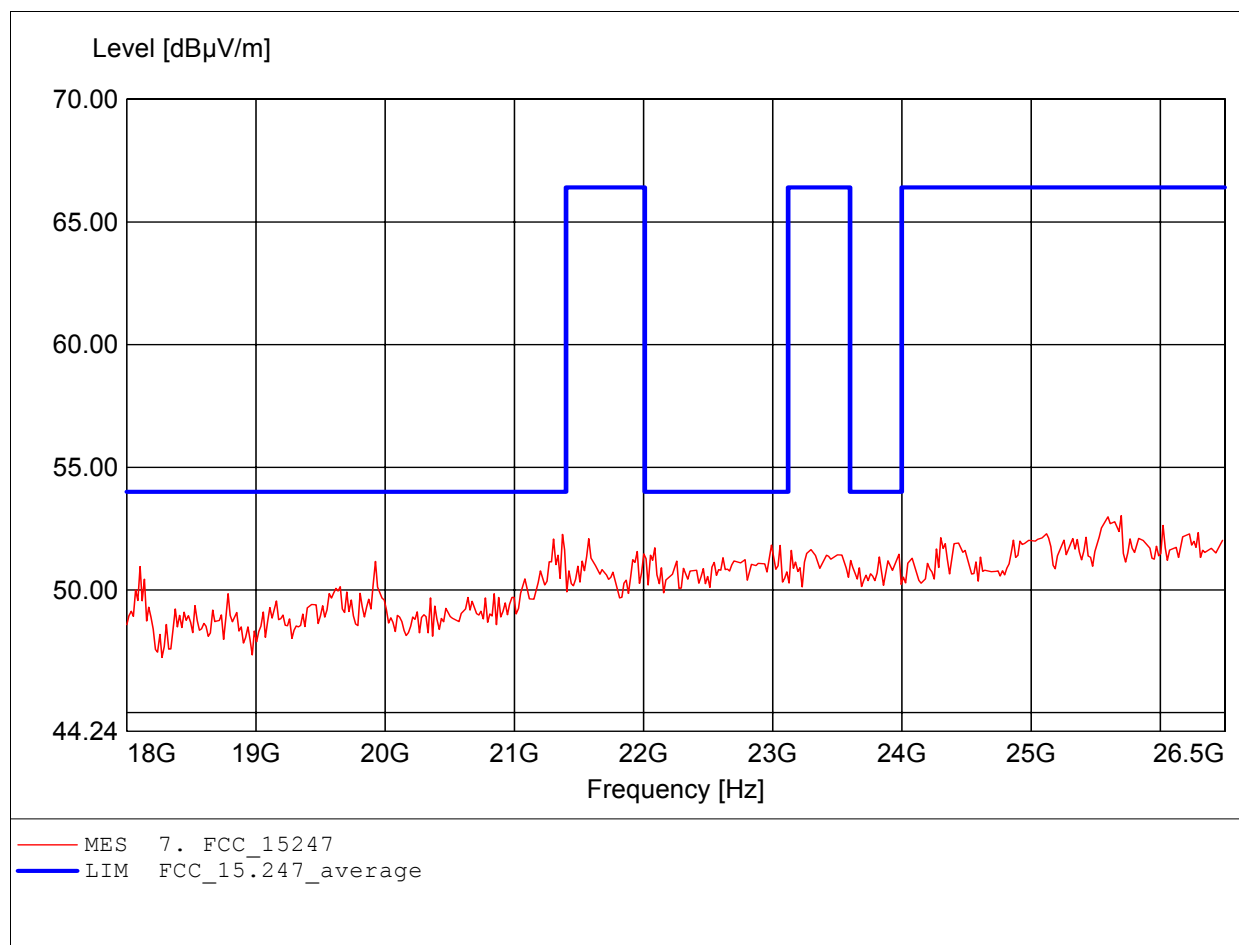

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E)
Approval Holder:	Netgear Inc.	11G CH6
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HK 116	
	Freq: 187.735MHz, Emax: 47.12dBµV/m, RBW: 100kHz	

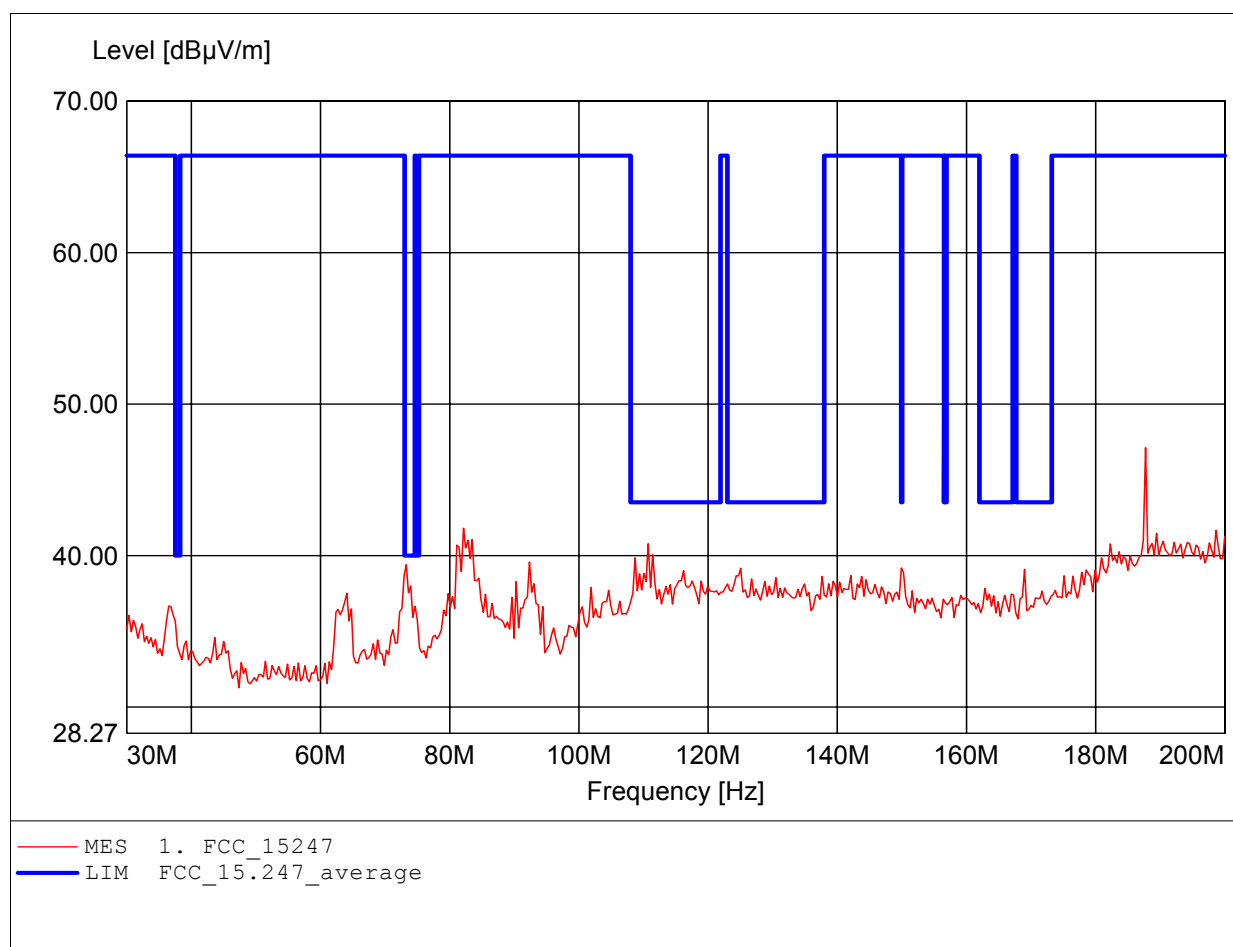

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HK 116	
	Freq: 187.735MHz, Emax: 47.49dBµV/m, RBW: 100kHz	

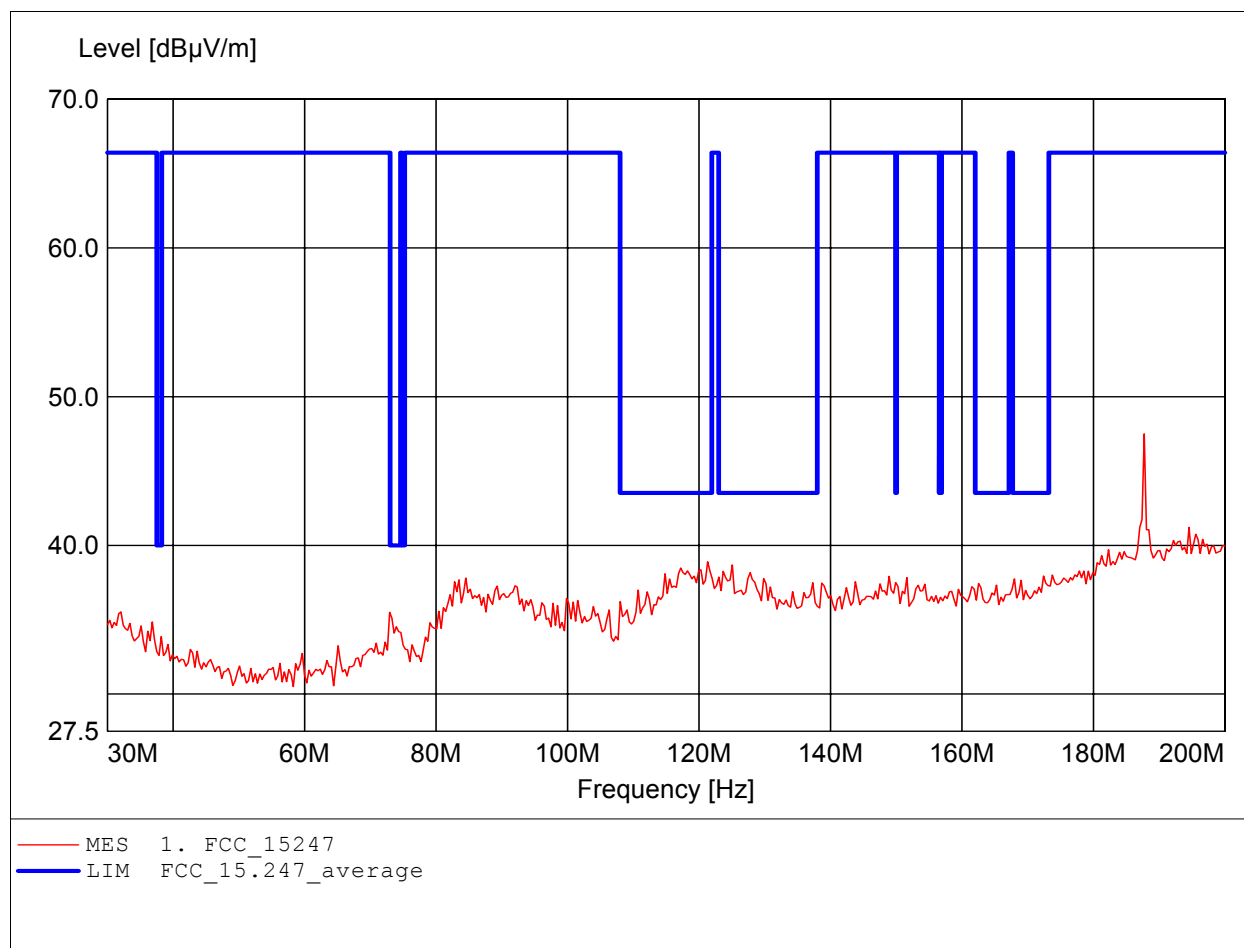

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HL 223,	
	Freq: 312.224MHz, Emax: 44.70dBμV/m, RBW: 100kHz	

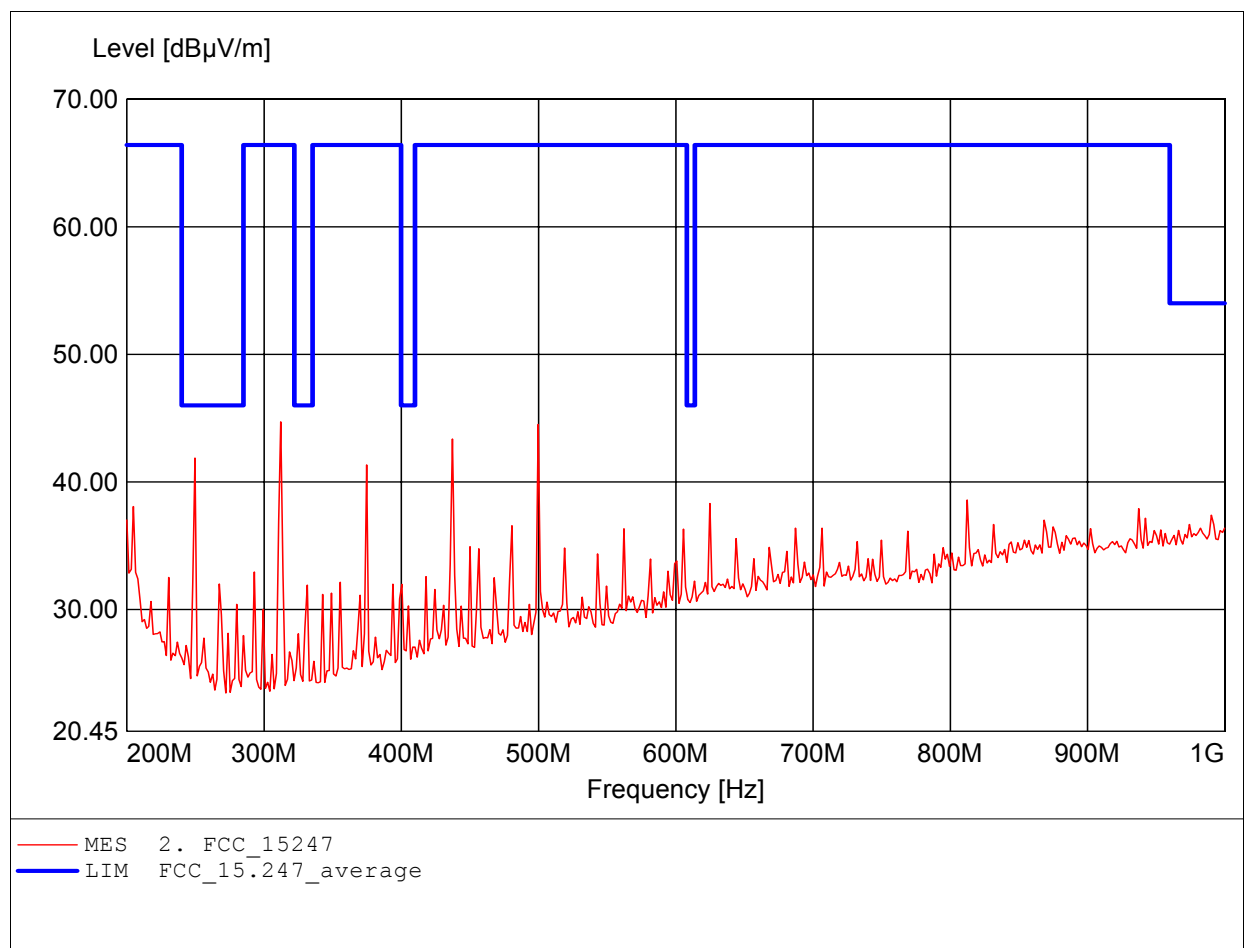

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HL 223,	
	Freq: 499.800MHz, Emax: 45.95dBμV/m, RBW: 100kHz	

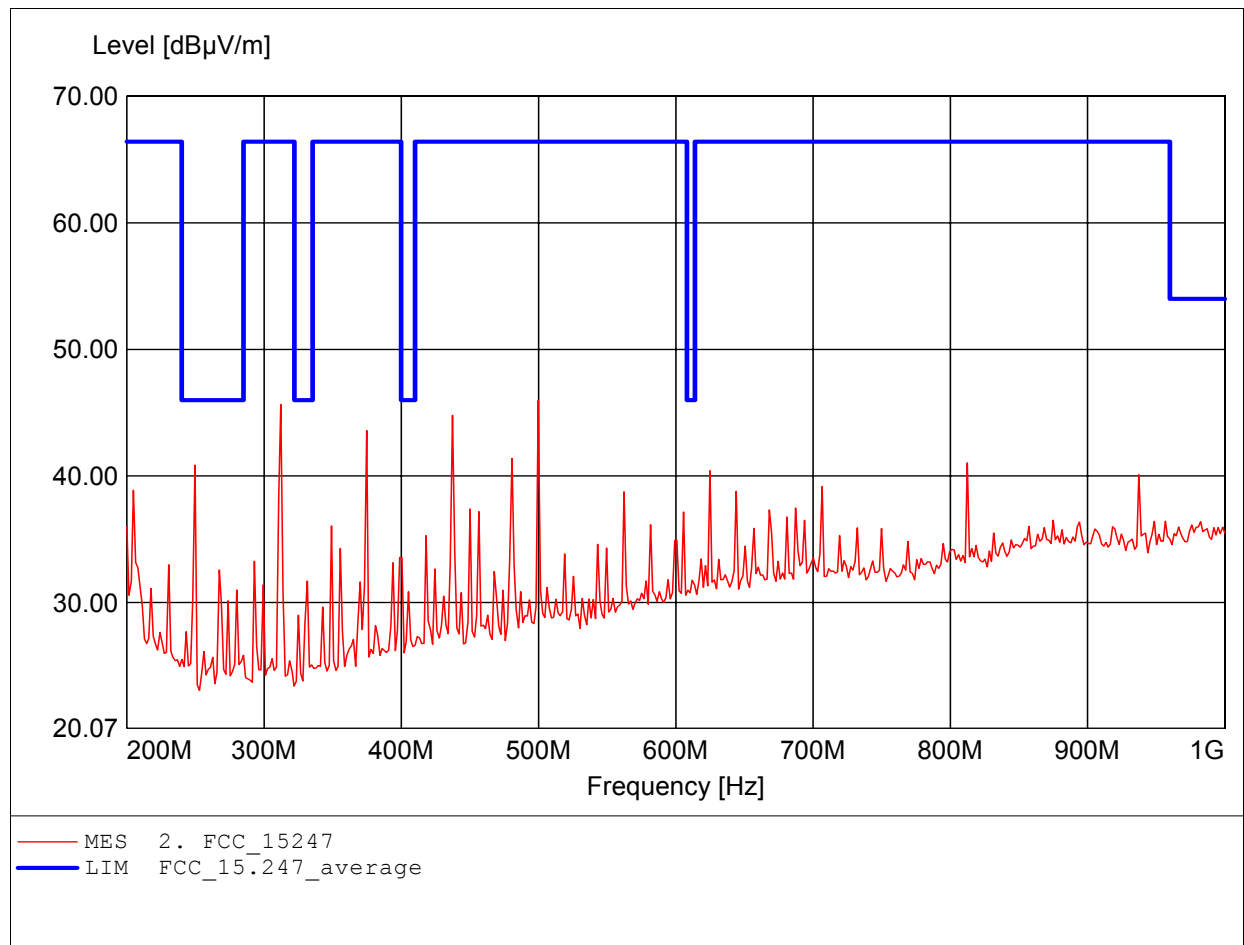

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 2.063GHz, Emax: 46.71dBµV/m, RBW: 1MHz	

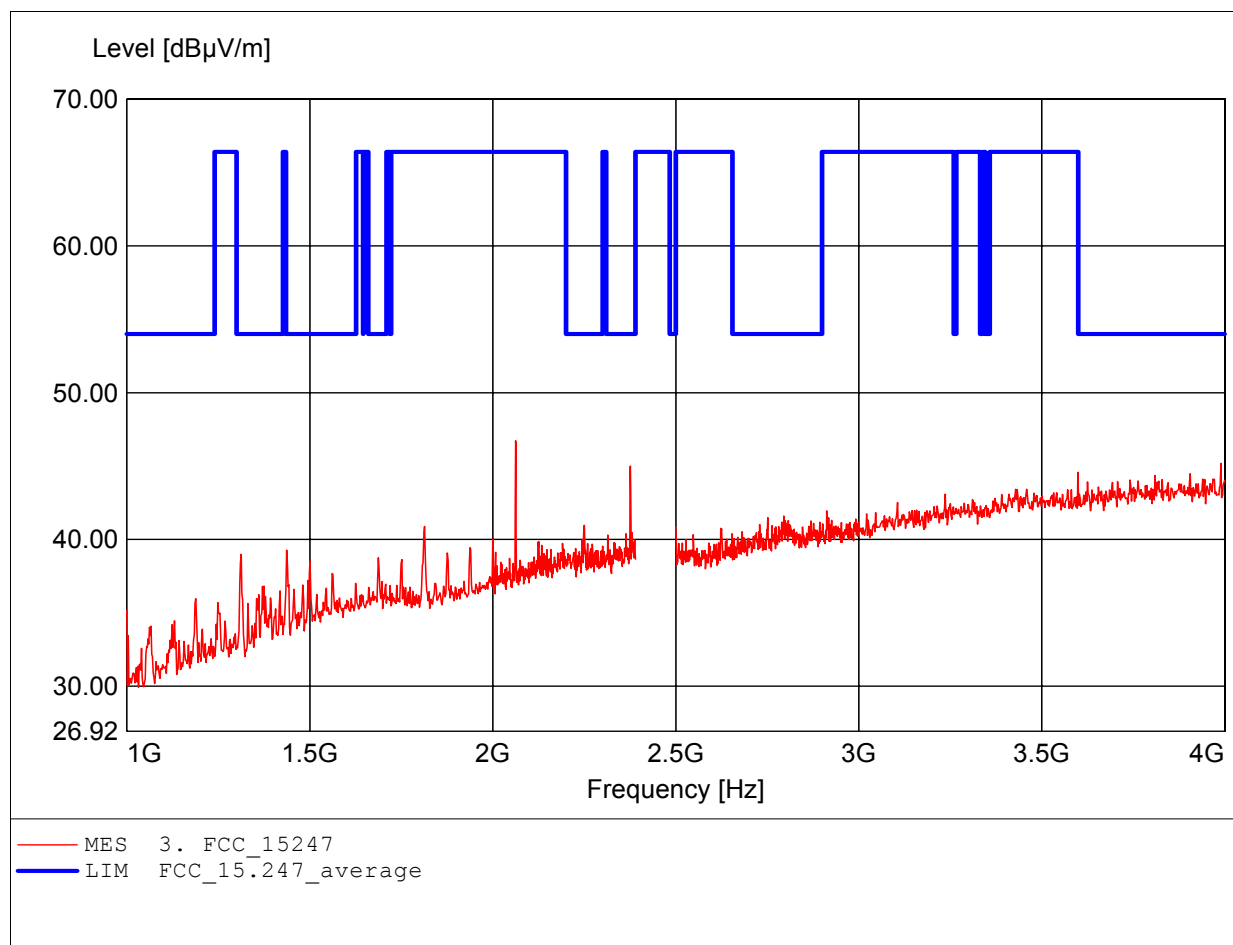

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 3.930GHz, Emax: 44.45dBμV/m, RBW: 1MHz	

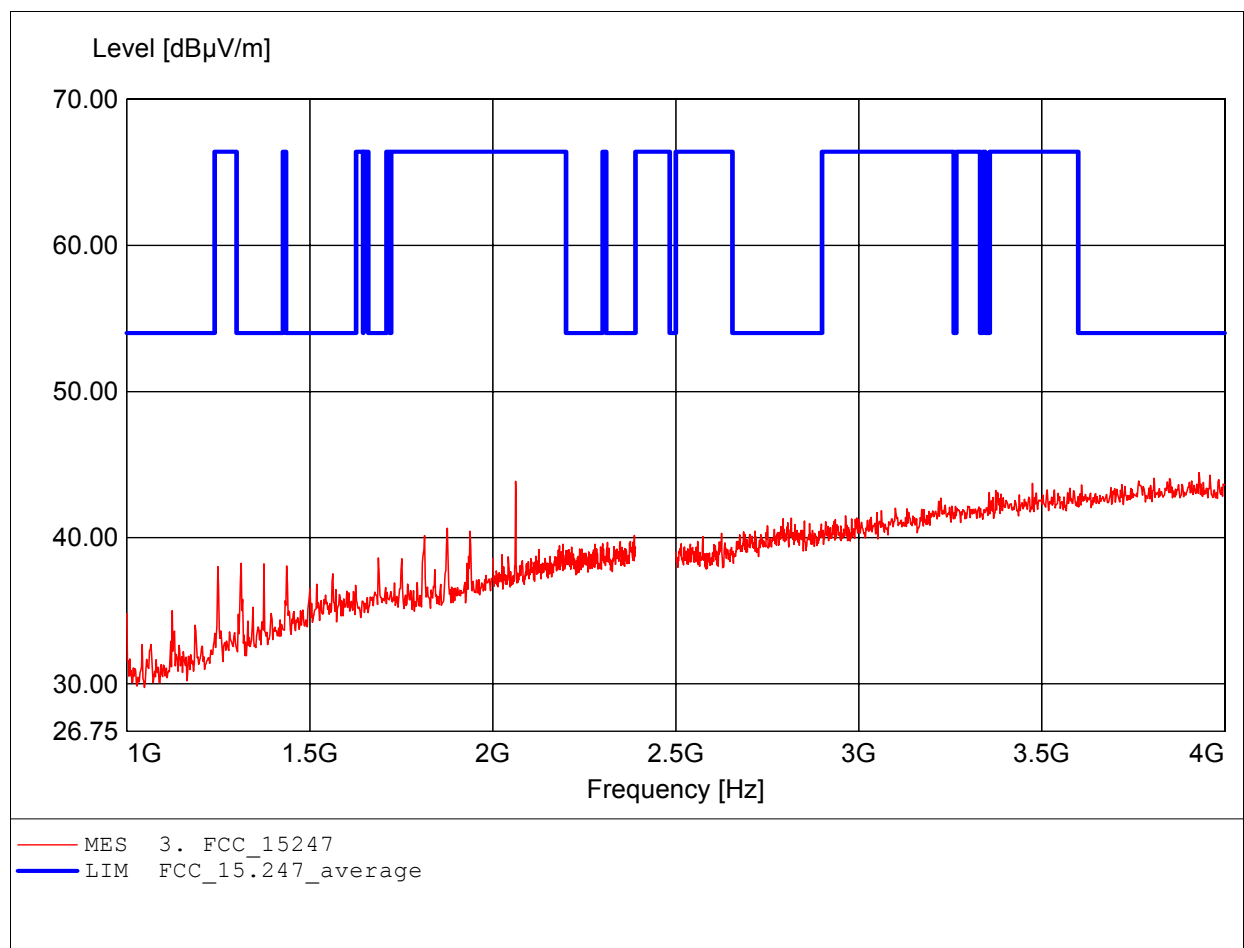

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 7.936GHz, Emax: 52.01dBμV/m, RBW: 1MHz	

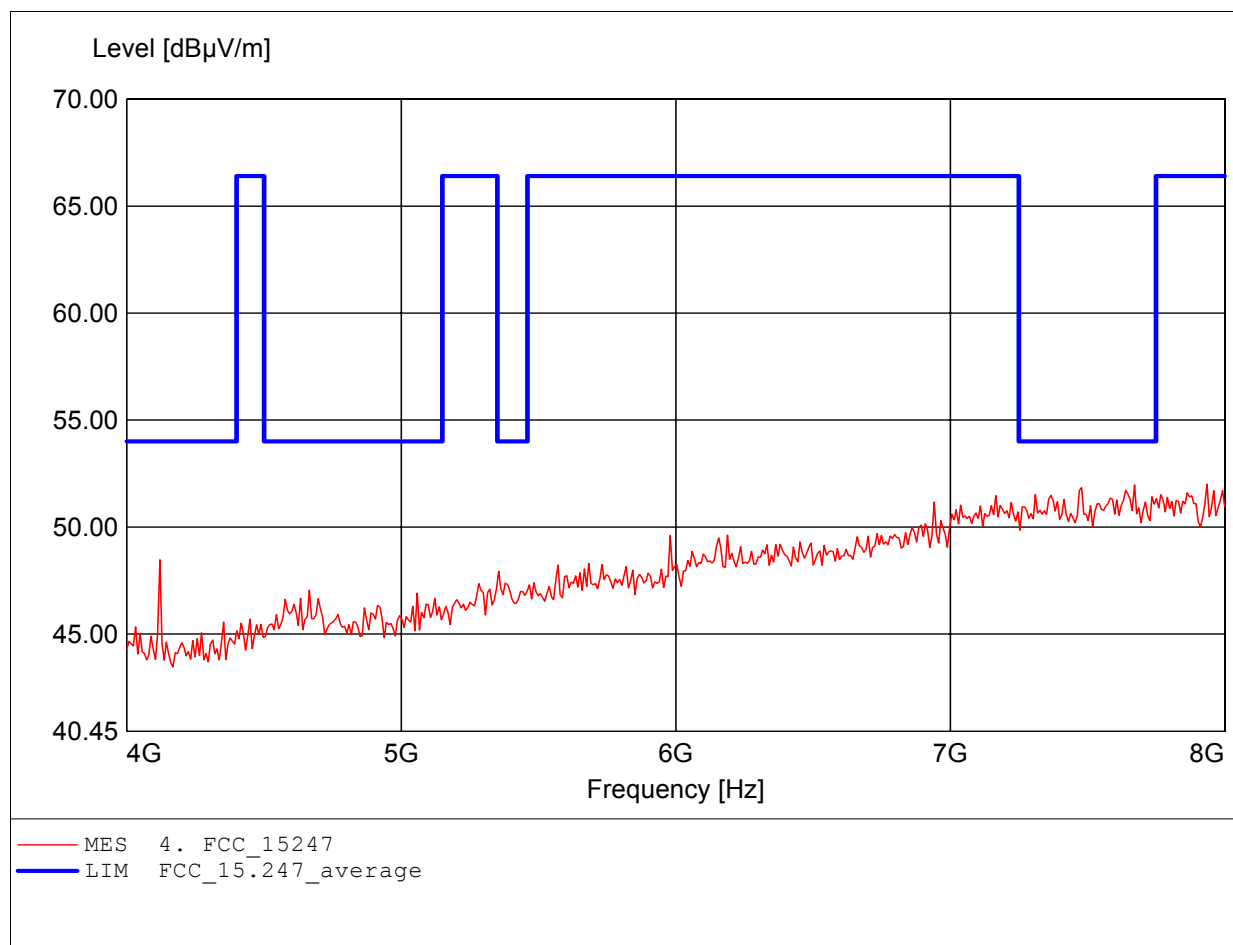

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 7.816GHz, Emax: 52.33dBμV/m, RBW: 1MHz	

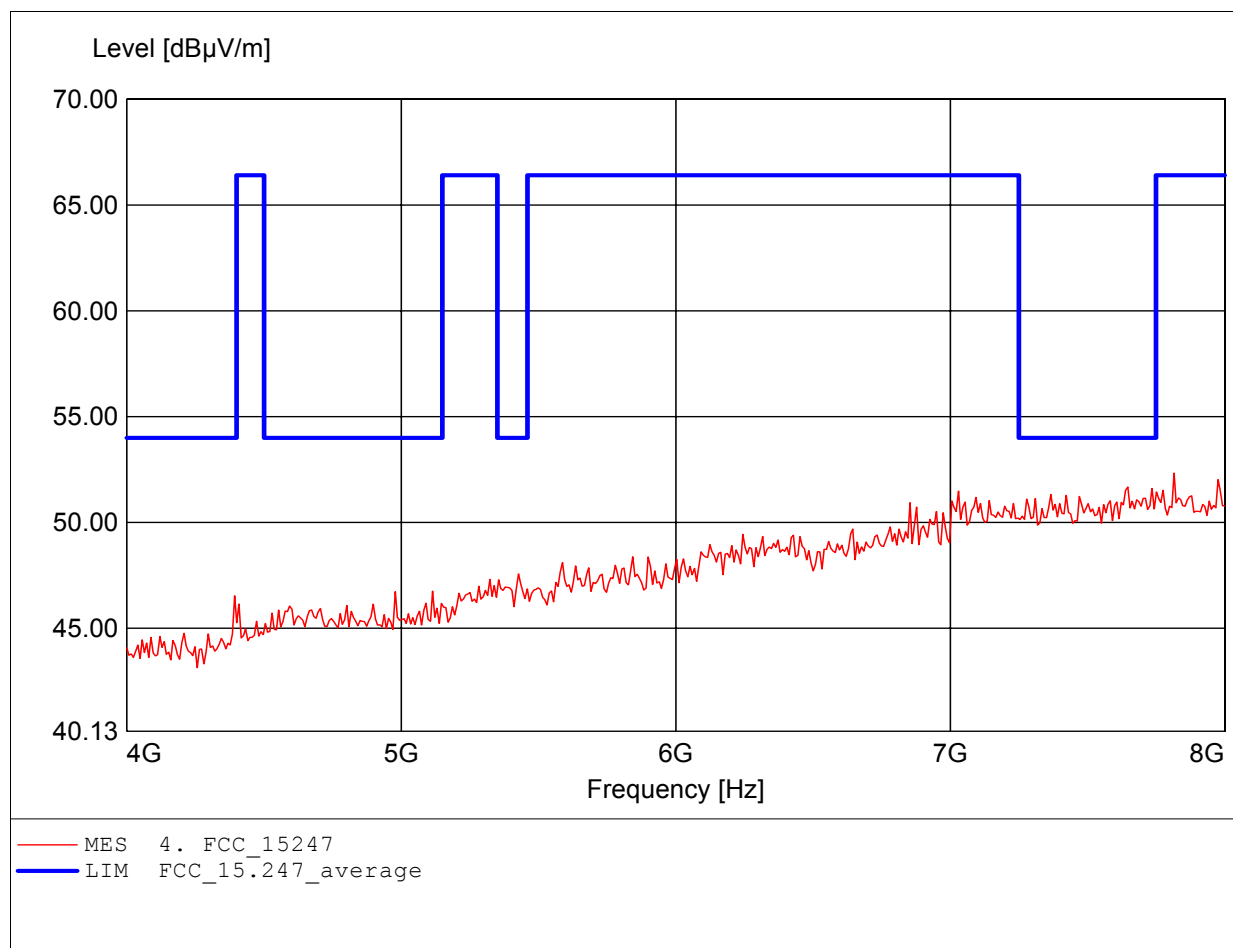

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E)
Approval Holder:	Netgear Inc.	11G CH6
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 11.599GHz, Emax: 49.07dBμV/m, RBW: 1MHz	

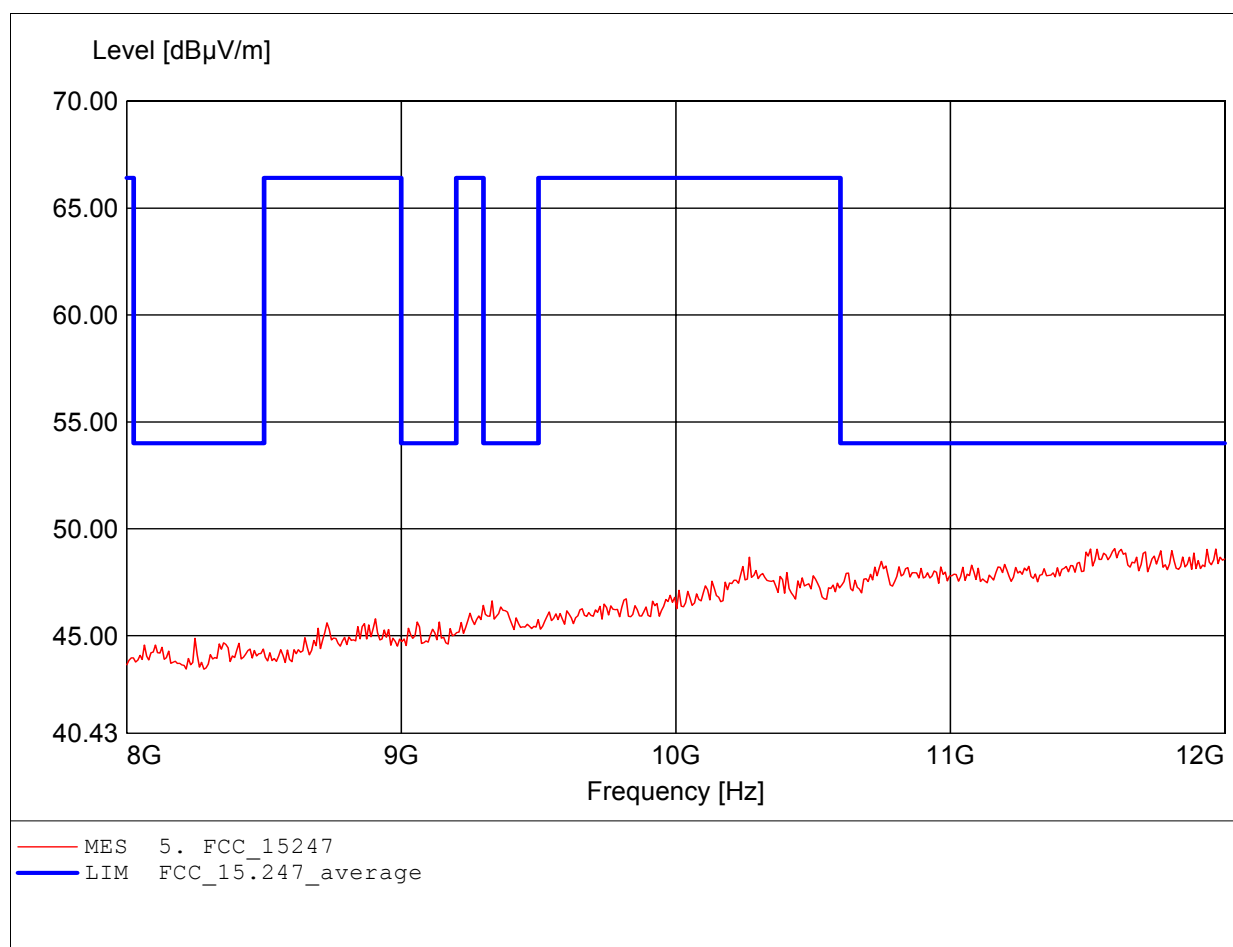

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E)
Approval Holder:	Netgear Inc.	11G CH6
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 11.631GHz, Emax: 48.92dBμV/m, RBW: 1MHz	

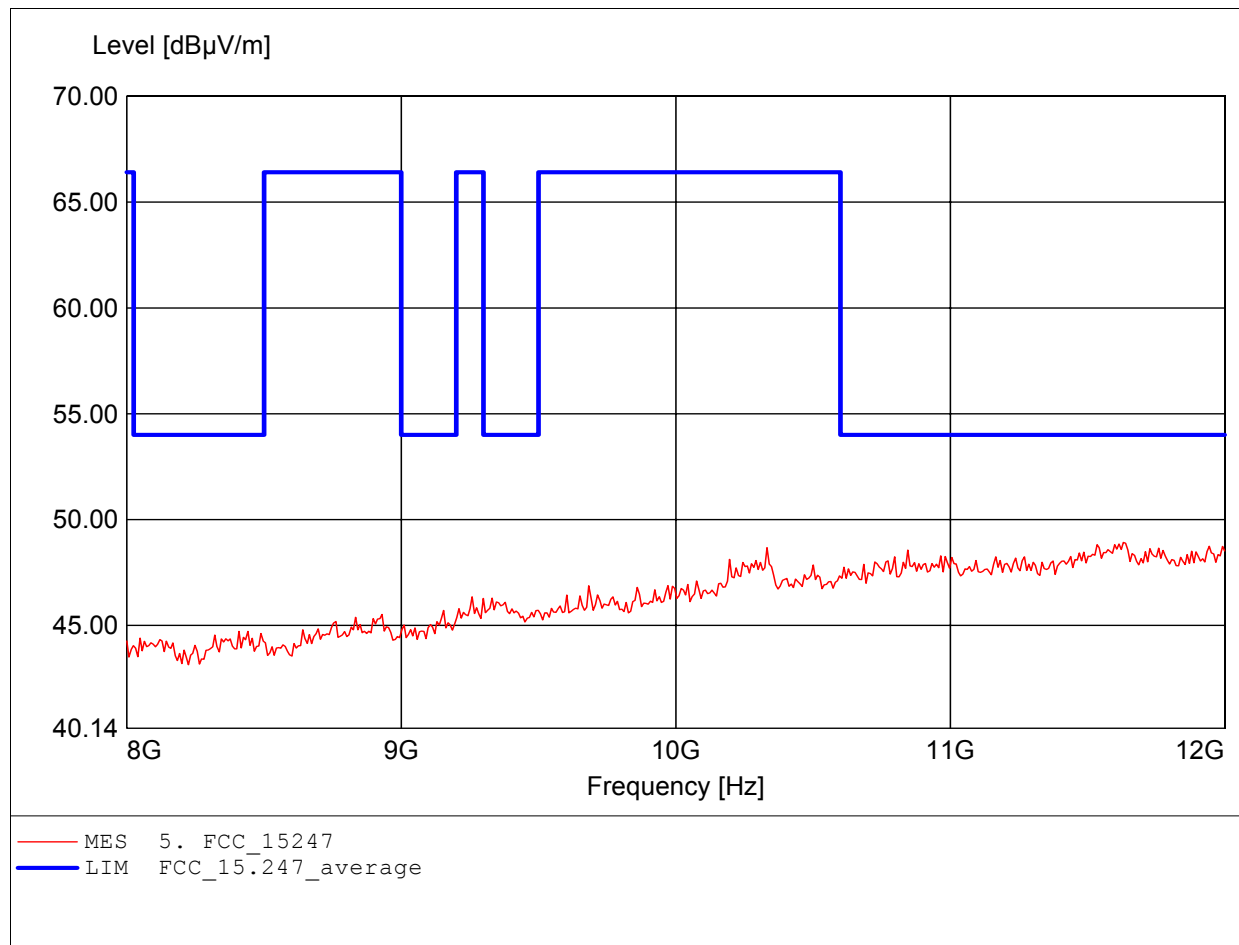

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E)
Approval Holder:	Netgear Inc.	11G CH6
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 17.784GHz, Emax: 53.07dBμV/m, RBW: 1MHz	

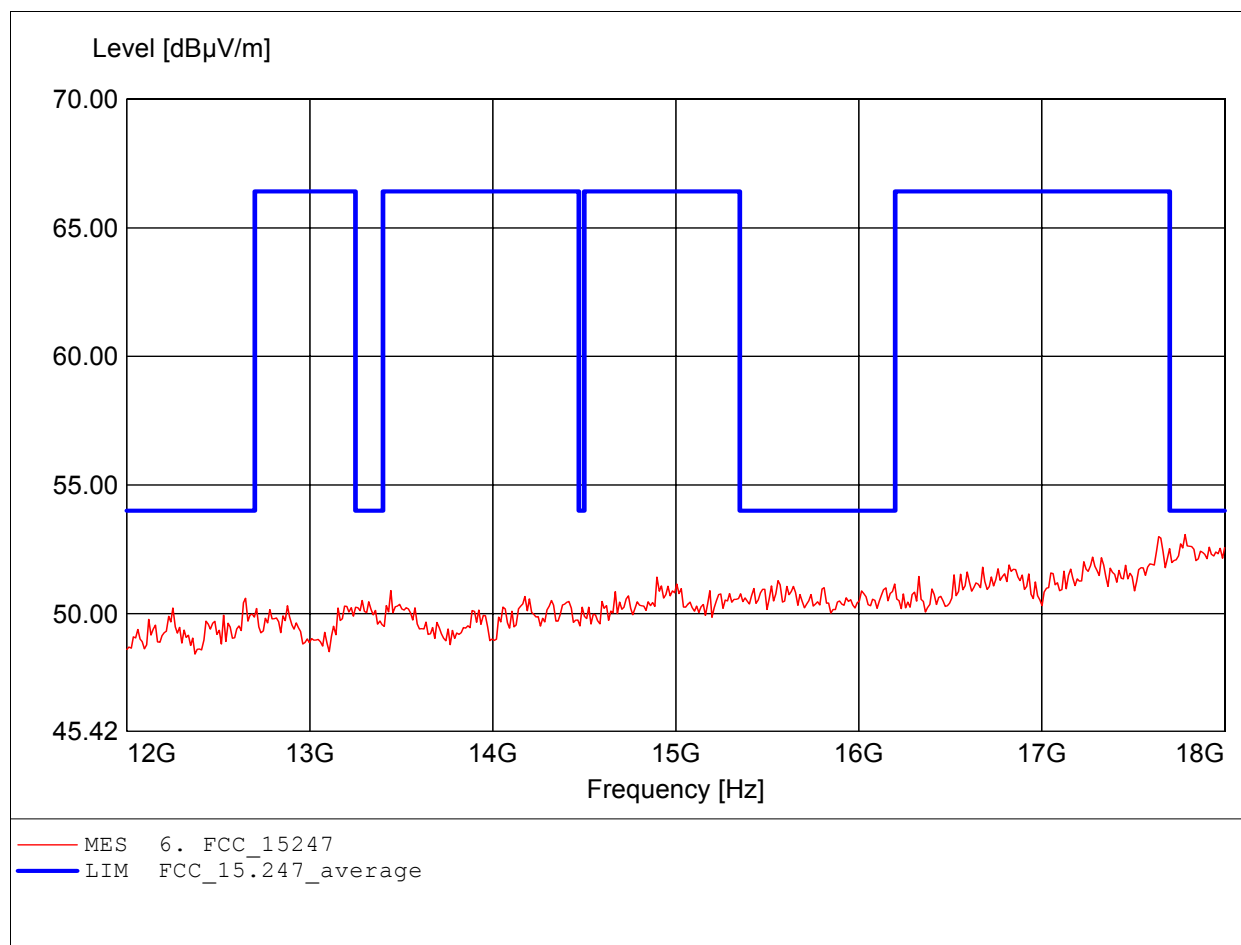

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E)
Approval Holder:	Netgear Inc.	11G CH6
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 17.735GHz, Emax: 53.48dBμV/m, RBW: 1MHz	

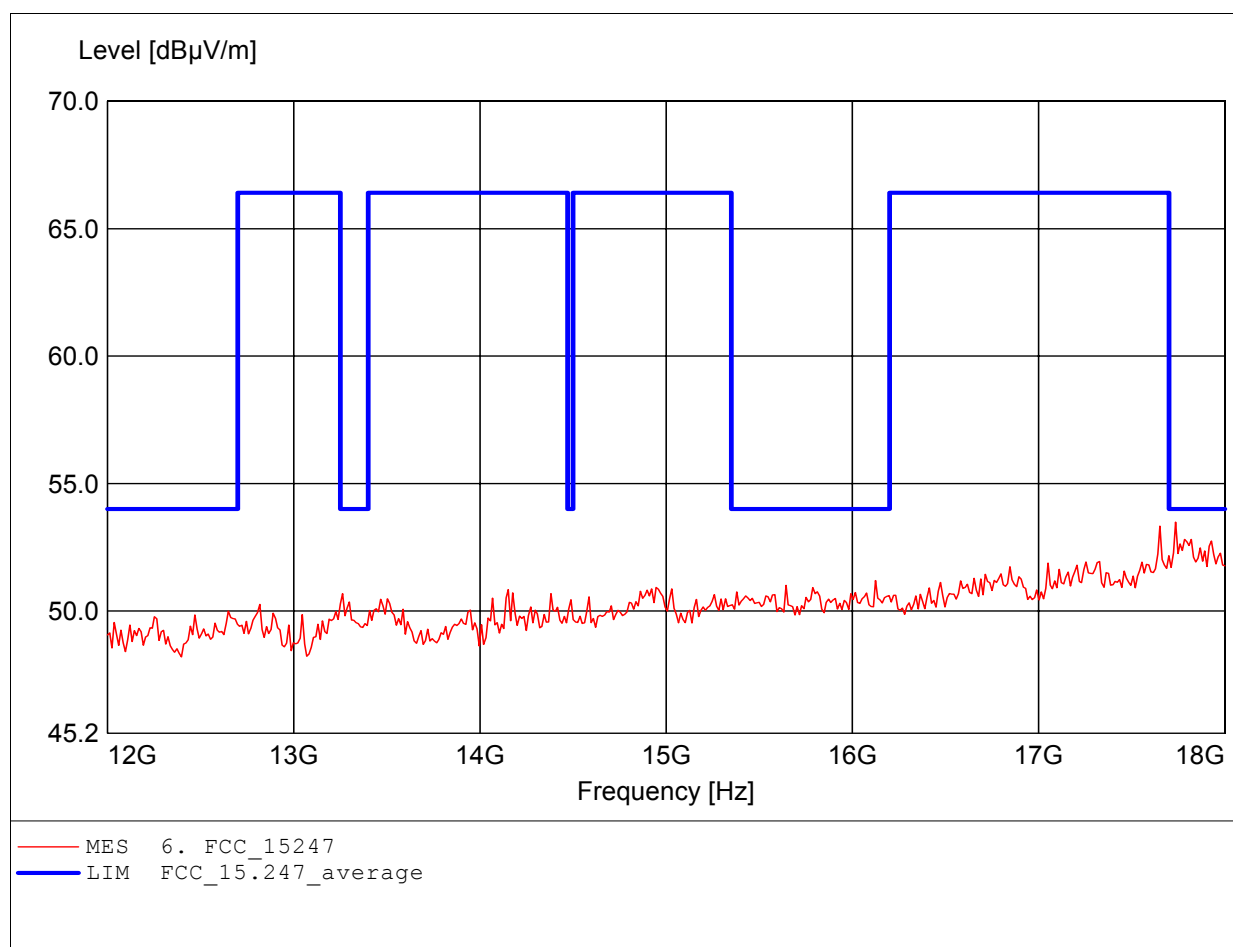

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 25.580GHz, Emax: 53.77dBμV/m, RBW: 1MHz	

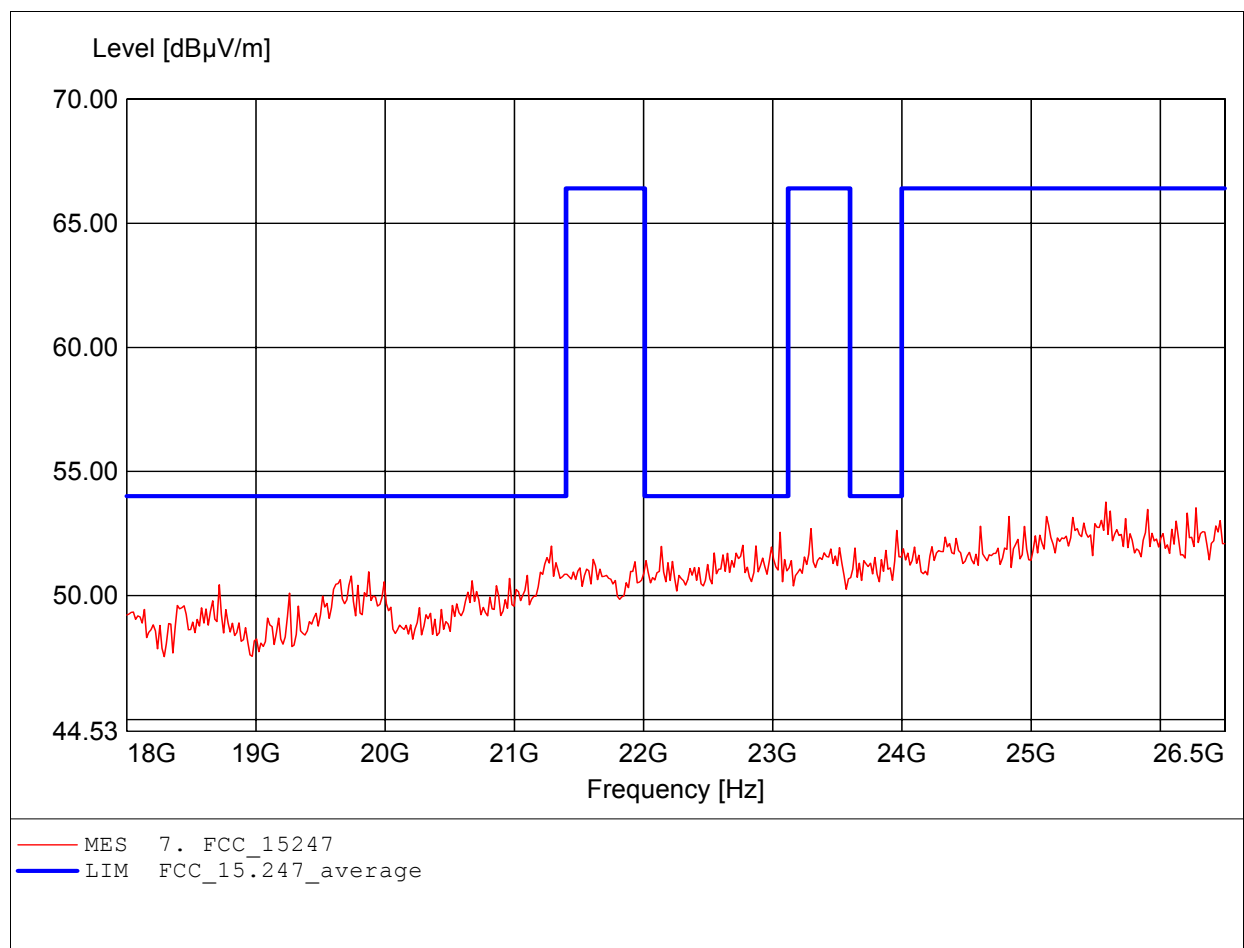

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH6
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 25.580GHz, Emax: 53.37dBμV/m, RBW: 1MHz	

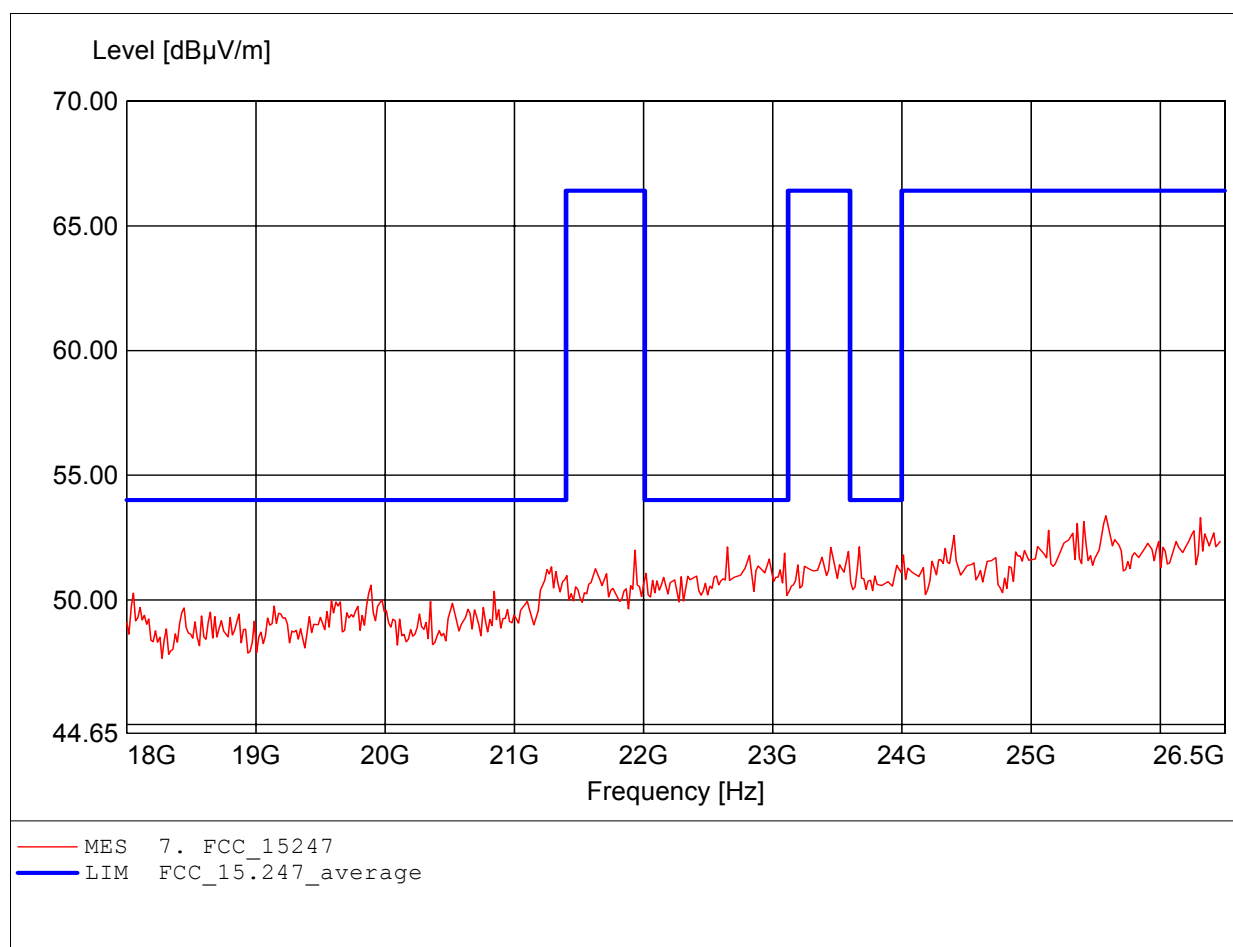

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: WIRELESS ADSL FIREWALL ROUTER
MODEL NO.: DG834G V2 Type of Antenna (E) 11G CH11
Approval Holder: Netgear Inc.
Test Site / Operator: ETS / Orville Chang
Temperature/Voltage: Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 187.735MHz, Emax: 46.78dBµV/m, RBW: 100kHz

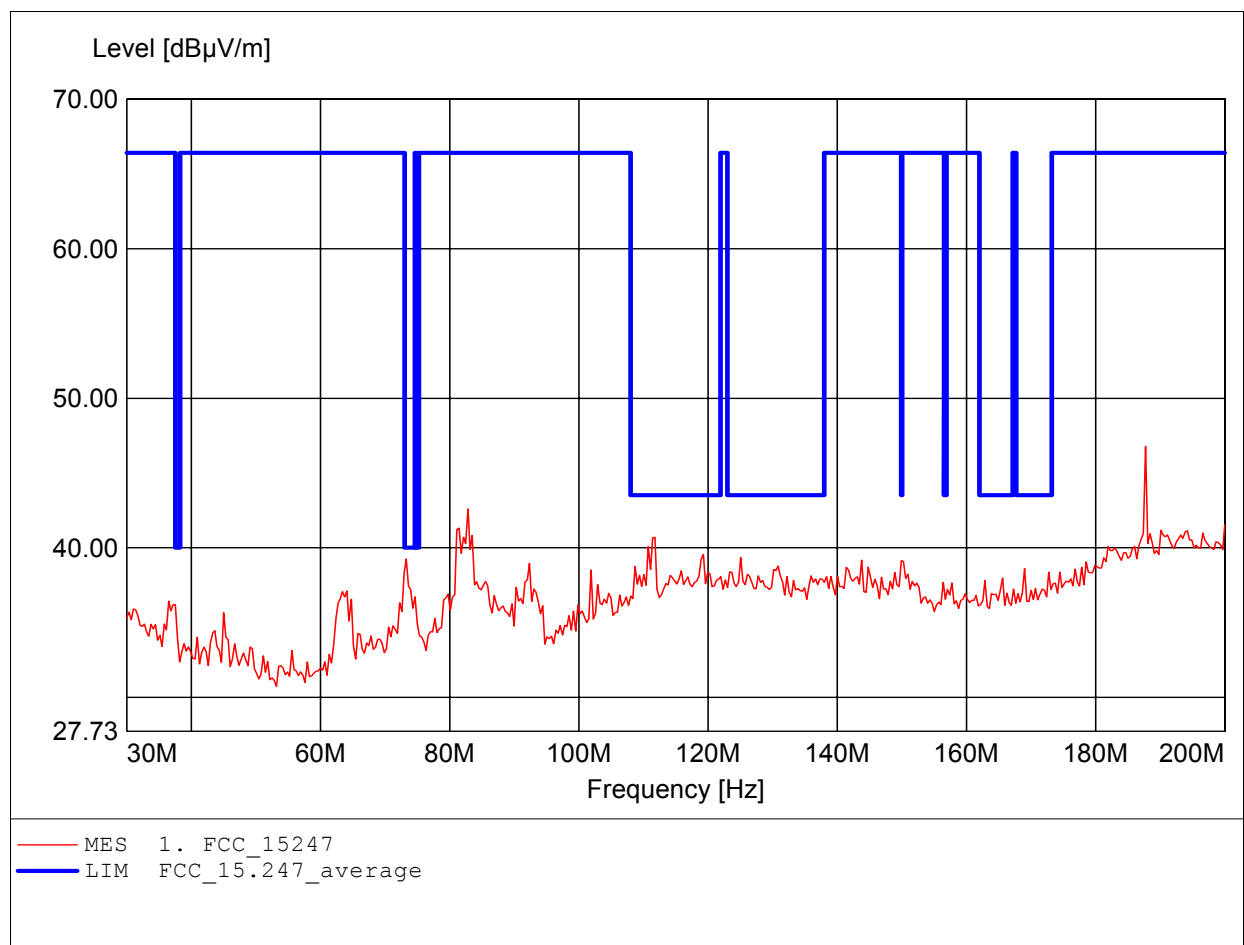

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HK 116	
	Freq: 187.735MHz, Emax: 47.64dBµV/m, RBW: 100kHz	

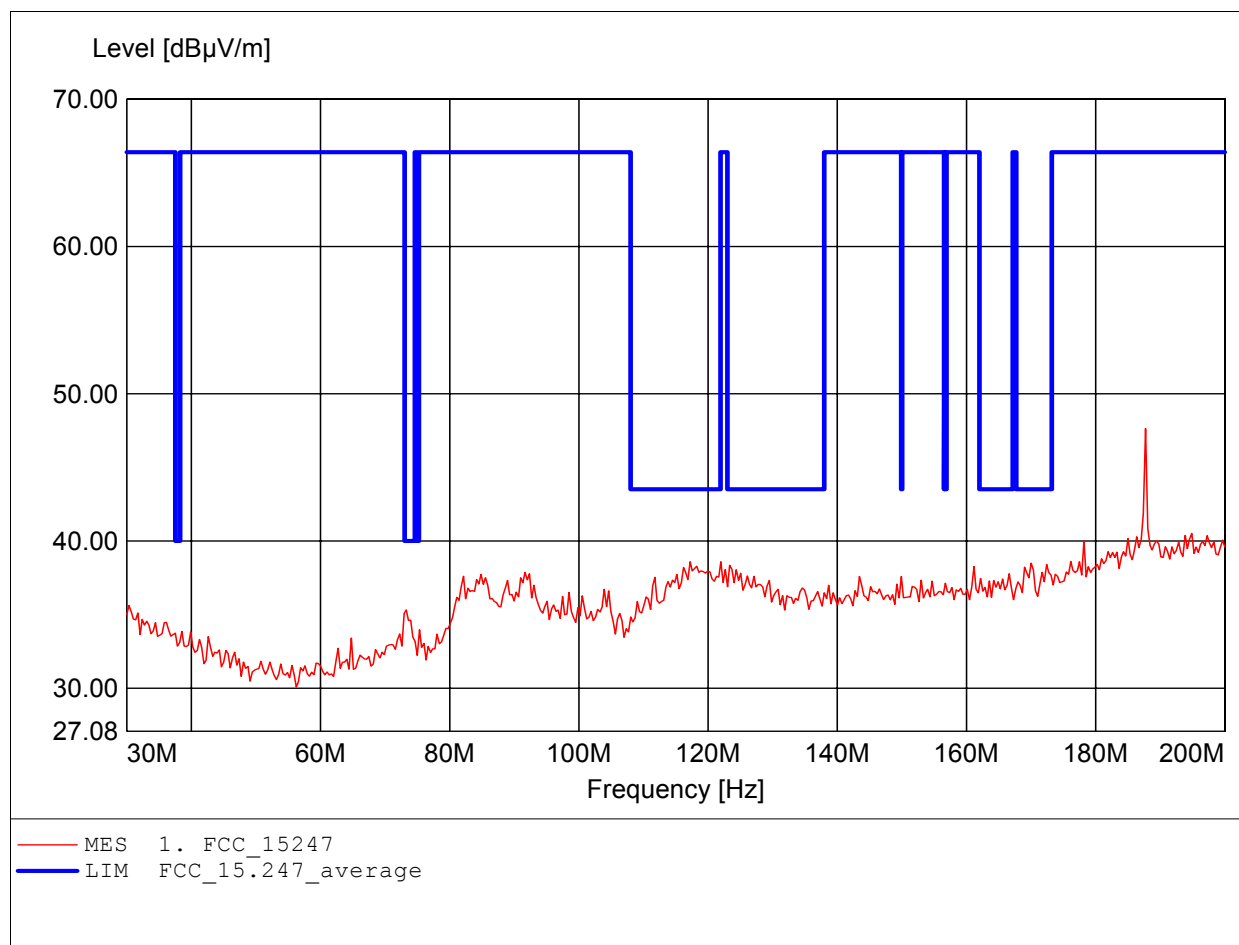

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HL 223,	
	Freq: 312.224MHz, Emax: 44.43dBμV/m, RBW: 100kHz	

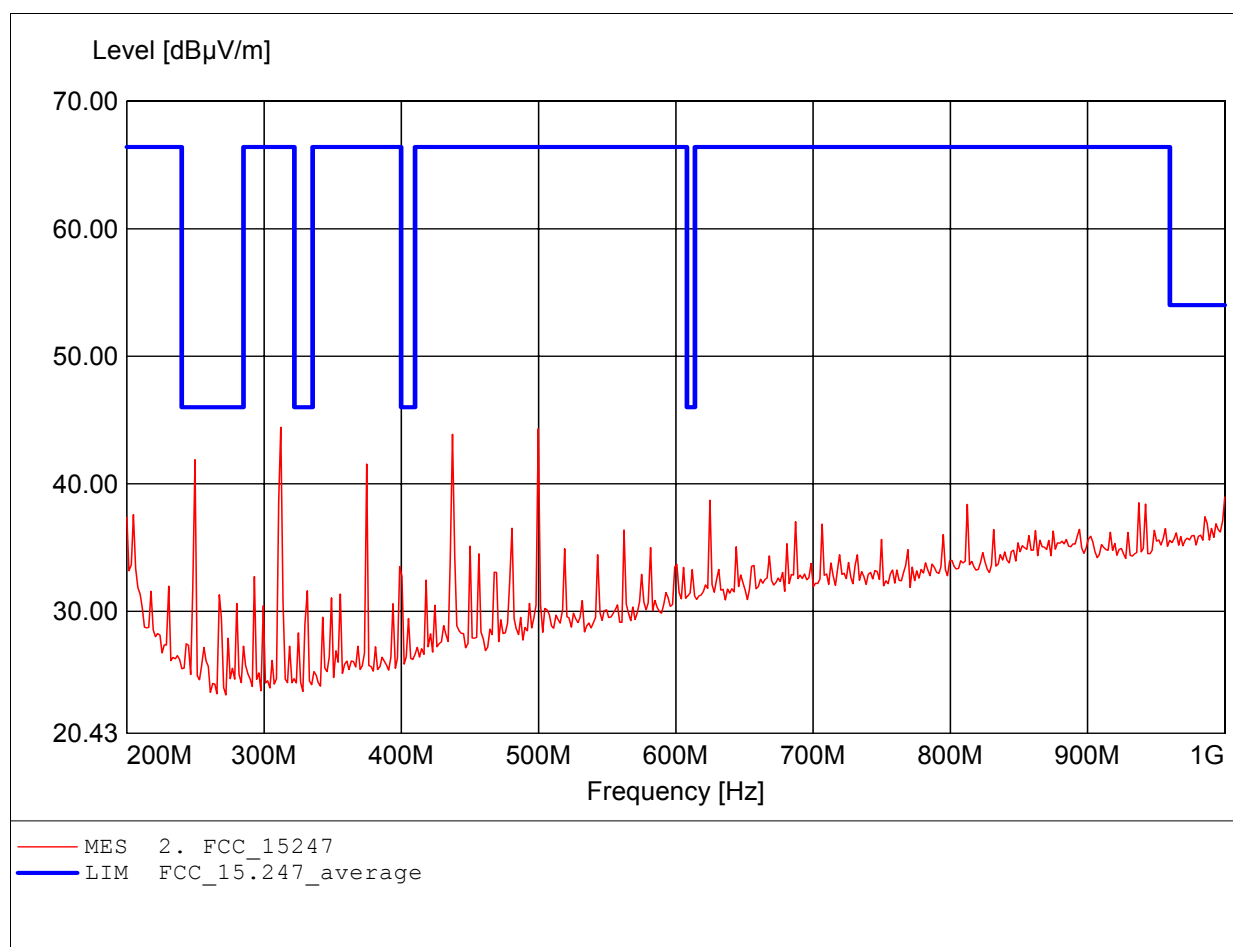

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247	
Comment 1:	Dist.: 3m, Ant.: HL 223,	
	Freq: 499.800MHz, Emax: 46.11dBµV/m, RBW: 100kHz	

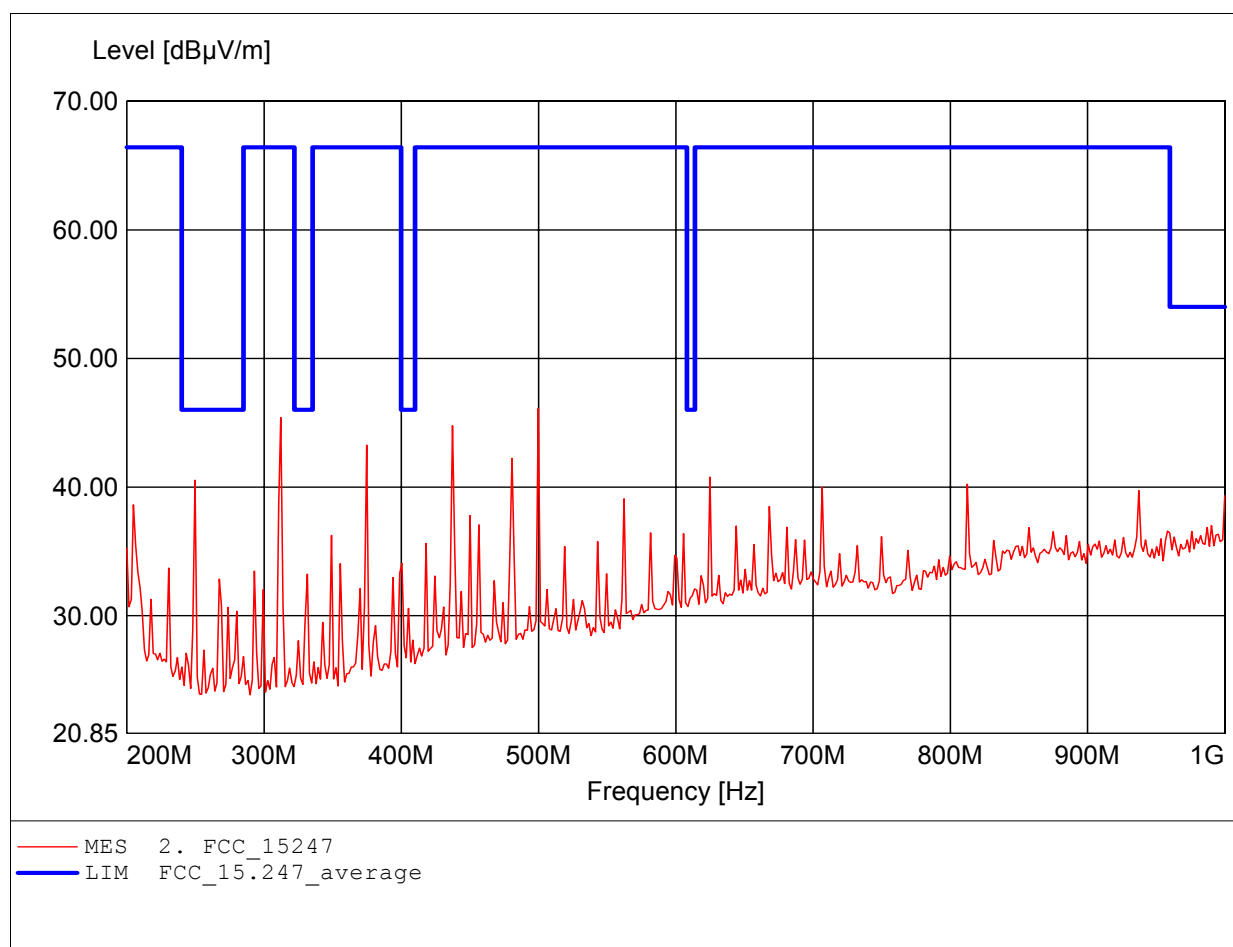

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 2.088GHz, Emax: 46.51dBµV/m, RBW: 1MHz	

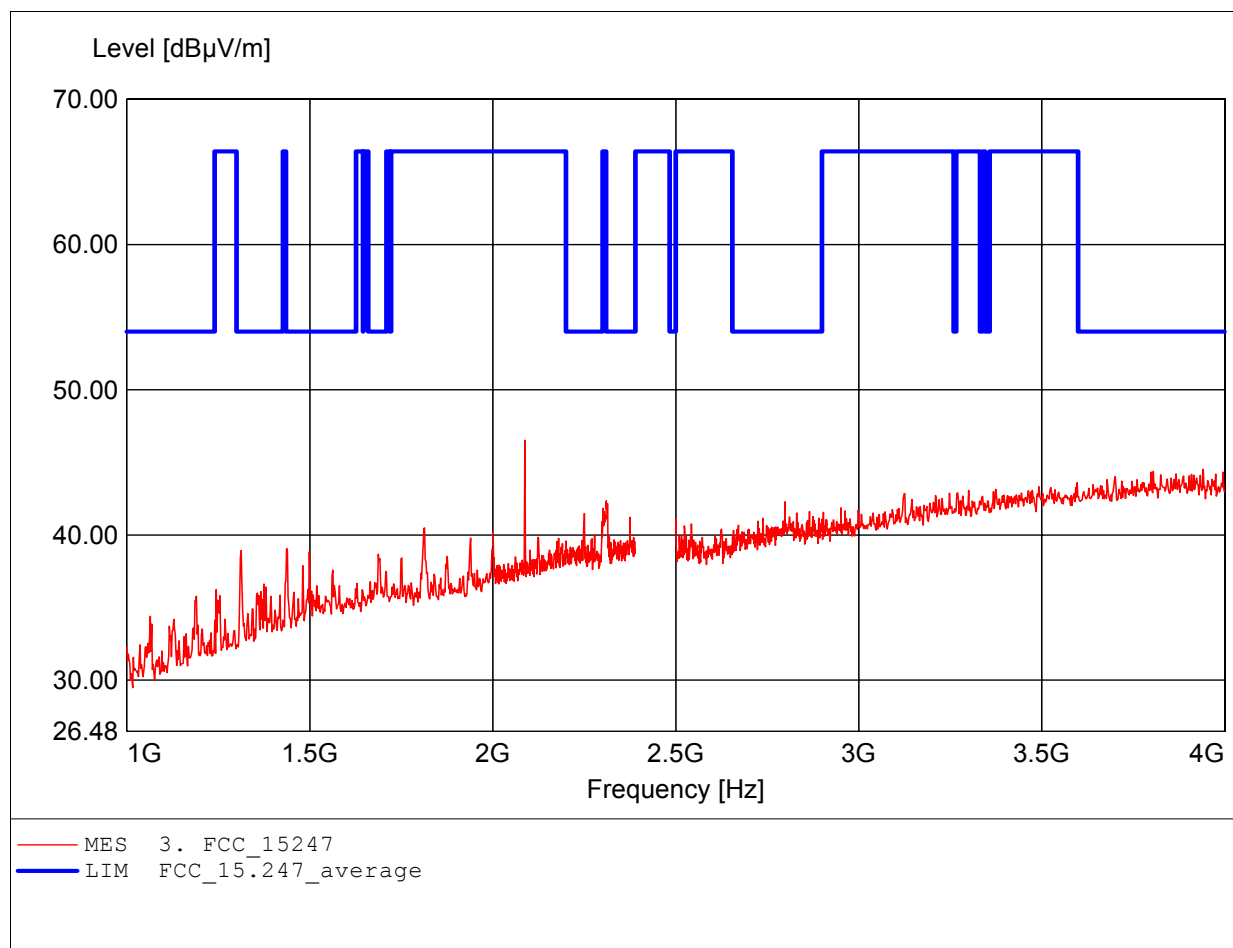

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 3.934GHz, Emax: 44.68dBμV/m, RBW: 1MHz	

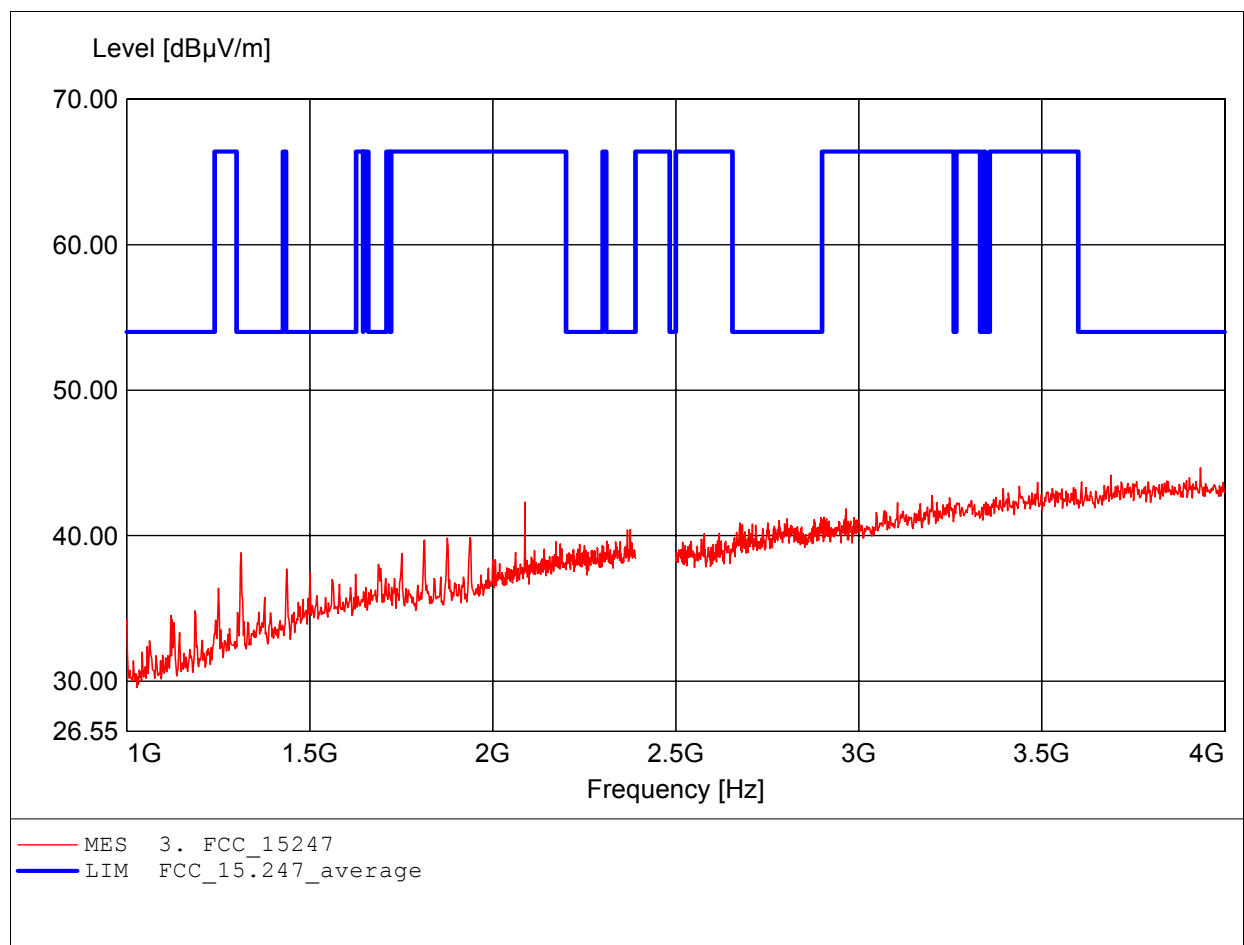

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 7.824GHz, Emax: 52.16dBµV/m, RBW: 1MHz	

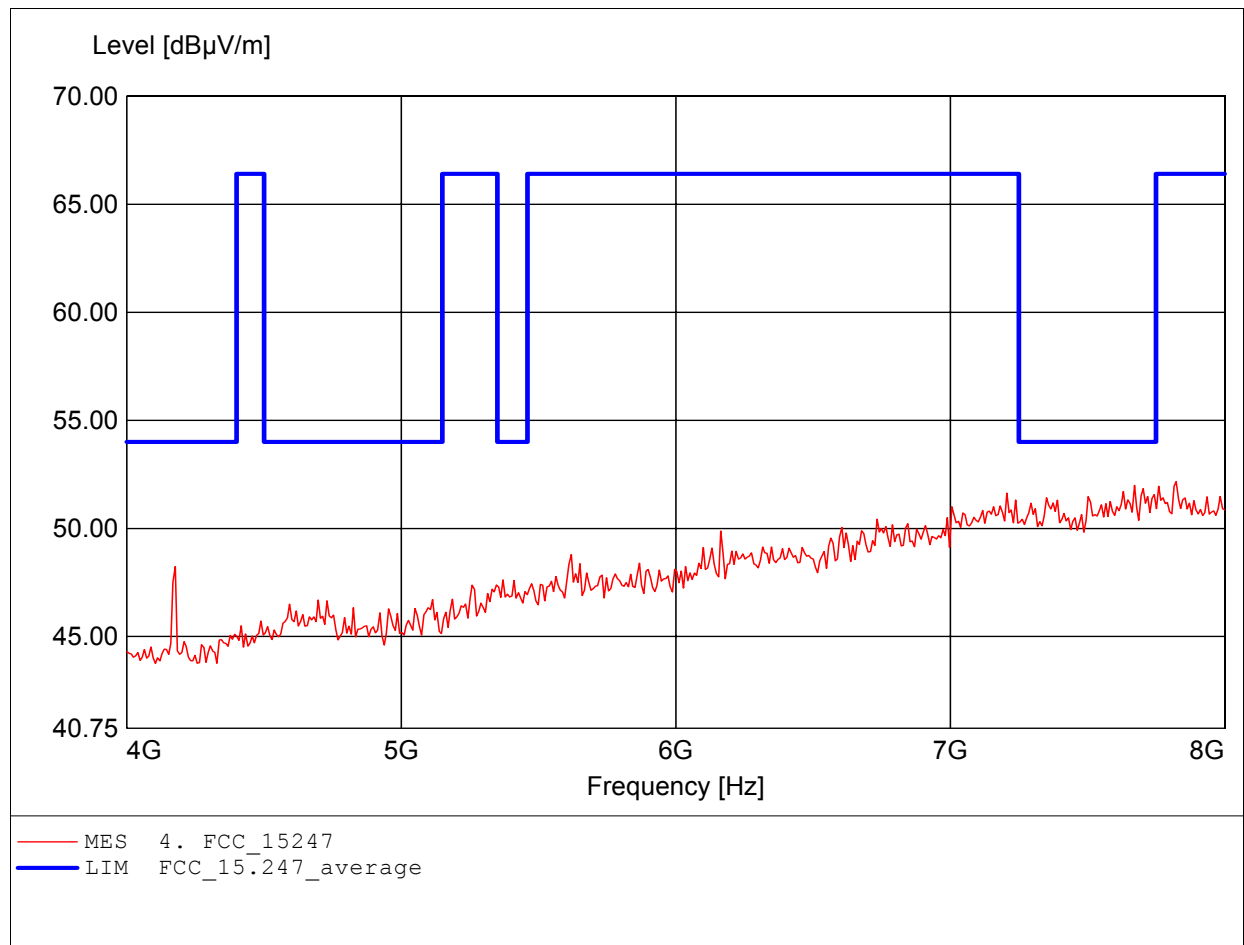

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 7.327GHz, Emax: 51.95dBμV/m, RBW: 1MHz	

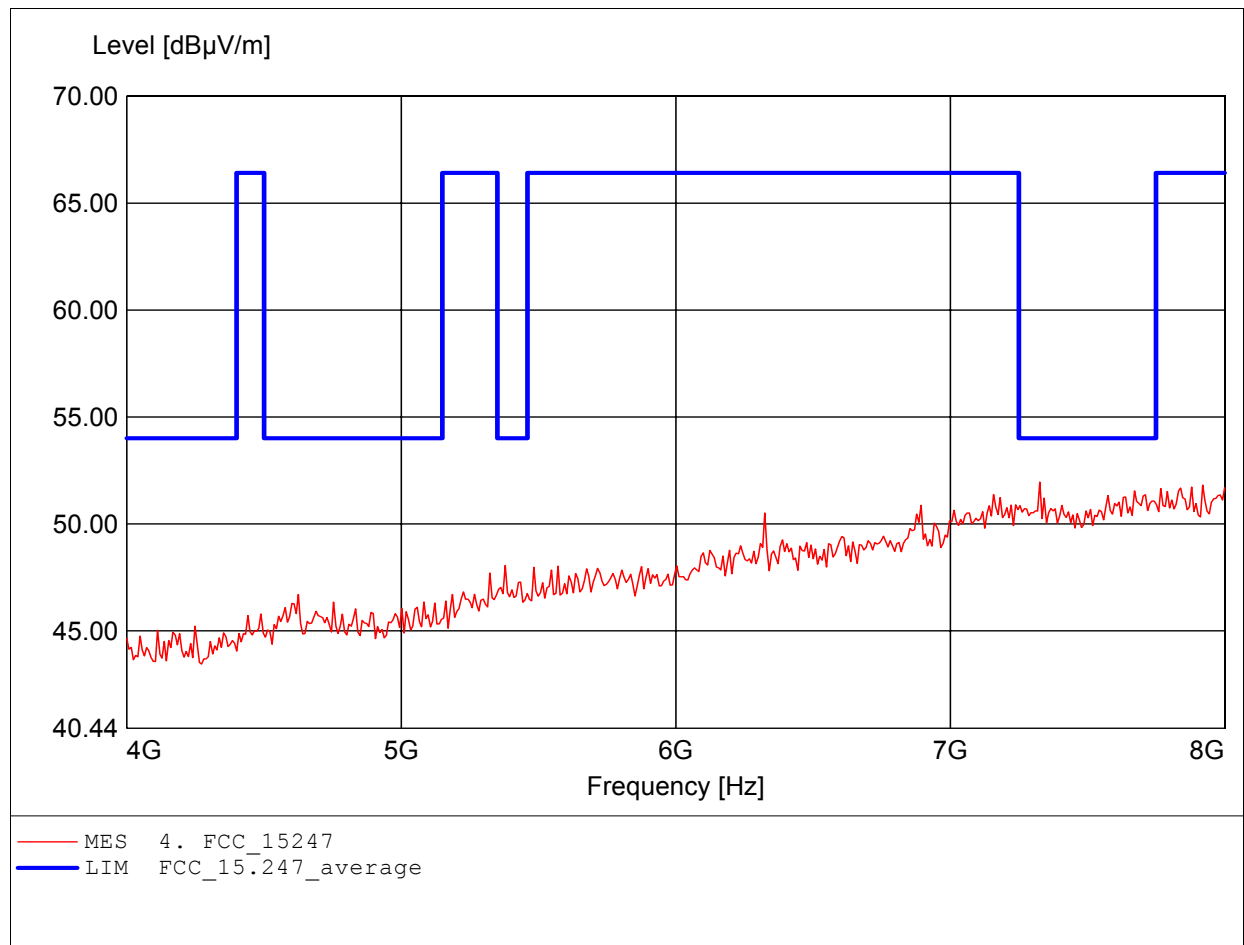

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 11.623GHz, Emax: 49.29dBμV/m, RBW: 1MHz	

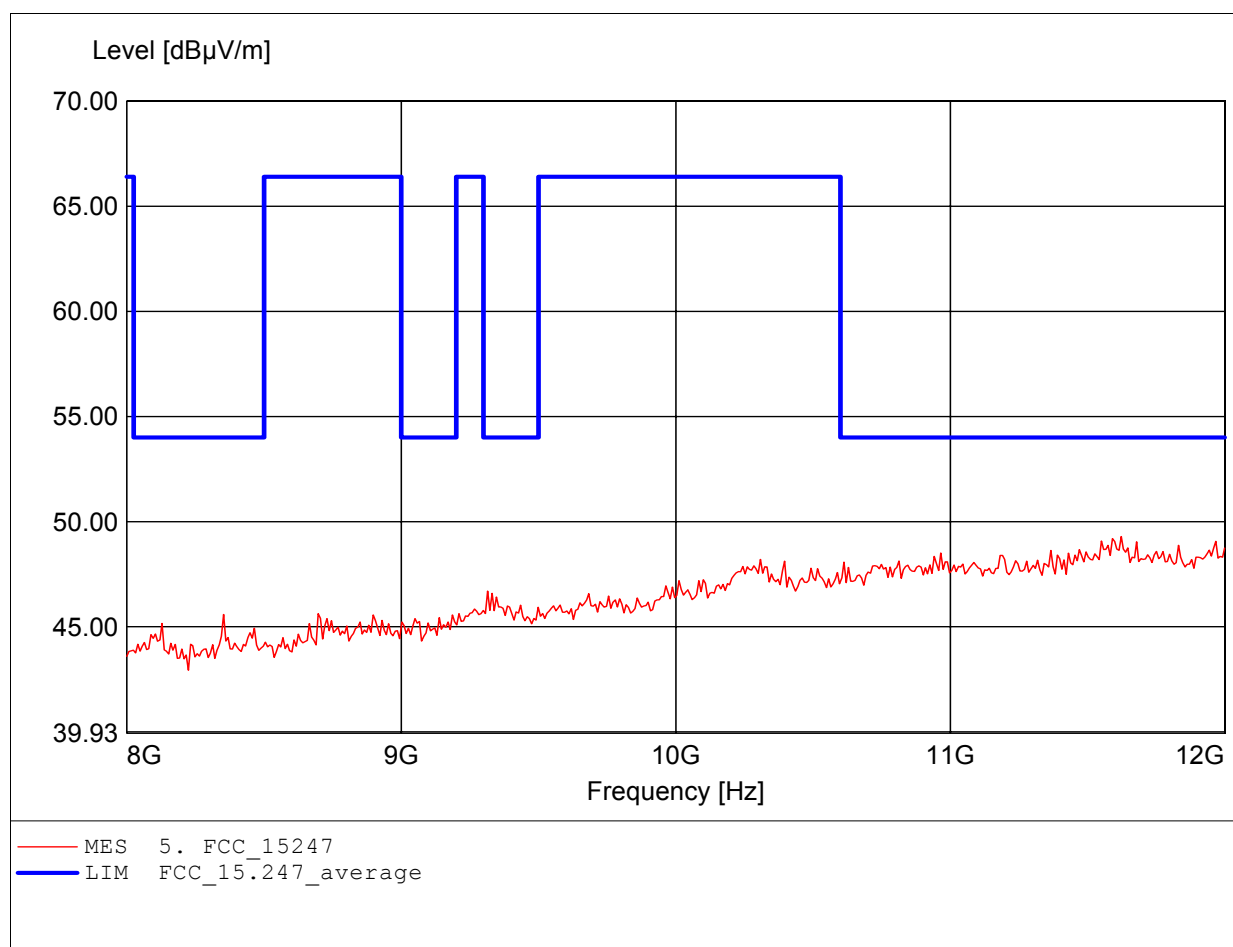

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 11.623GHz, Emax: 49.45dBμV/m, RBW: 1MHz	

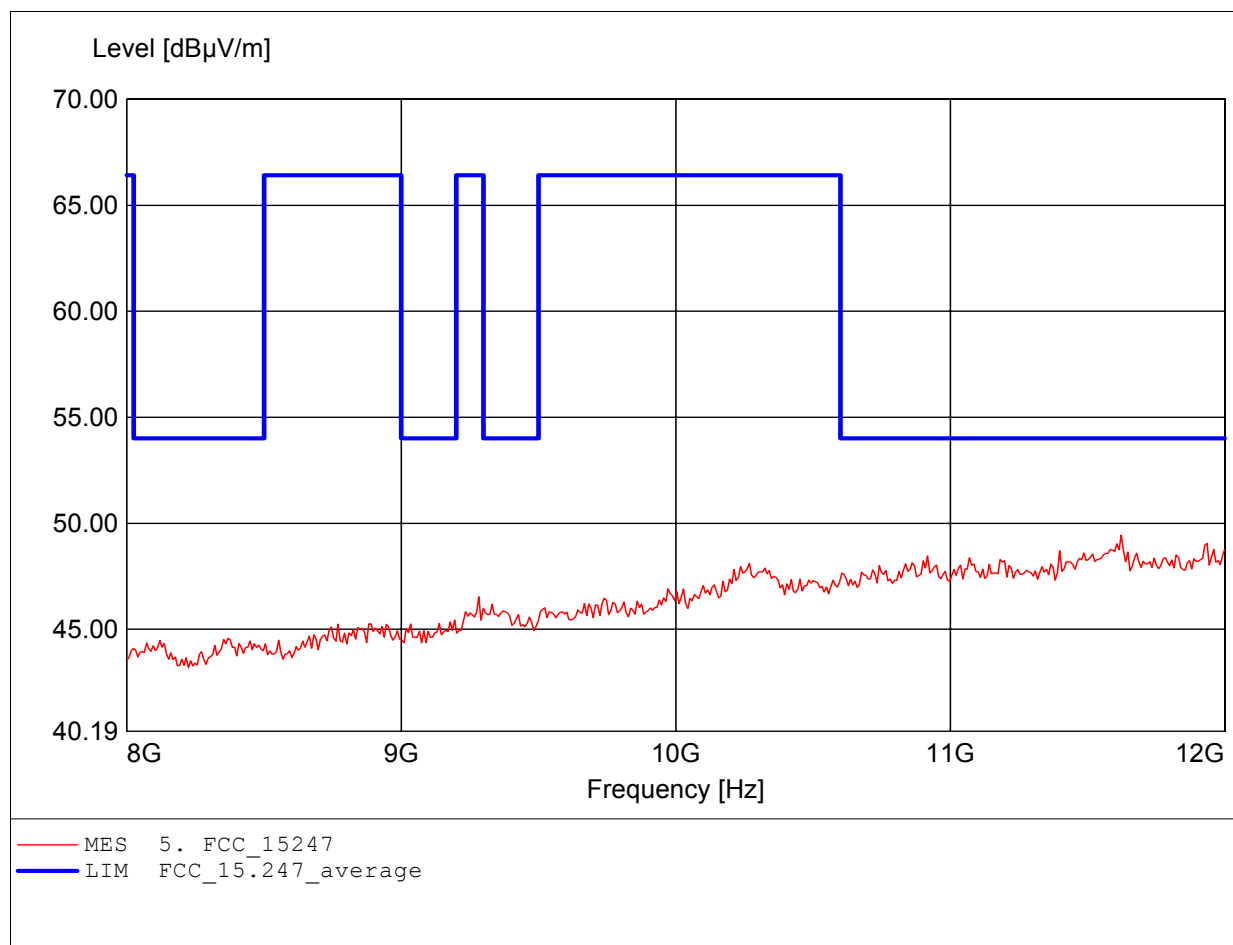

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 17.856GHz, Emax: 53.55dBμV/m, RBW: 1MHz	

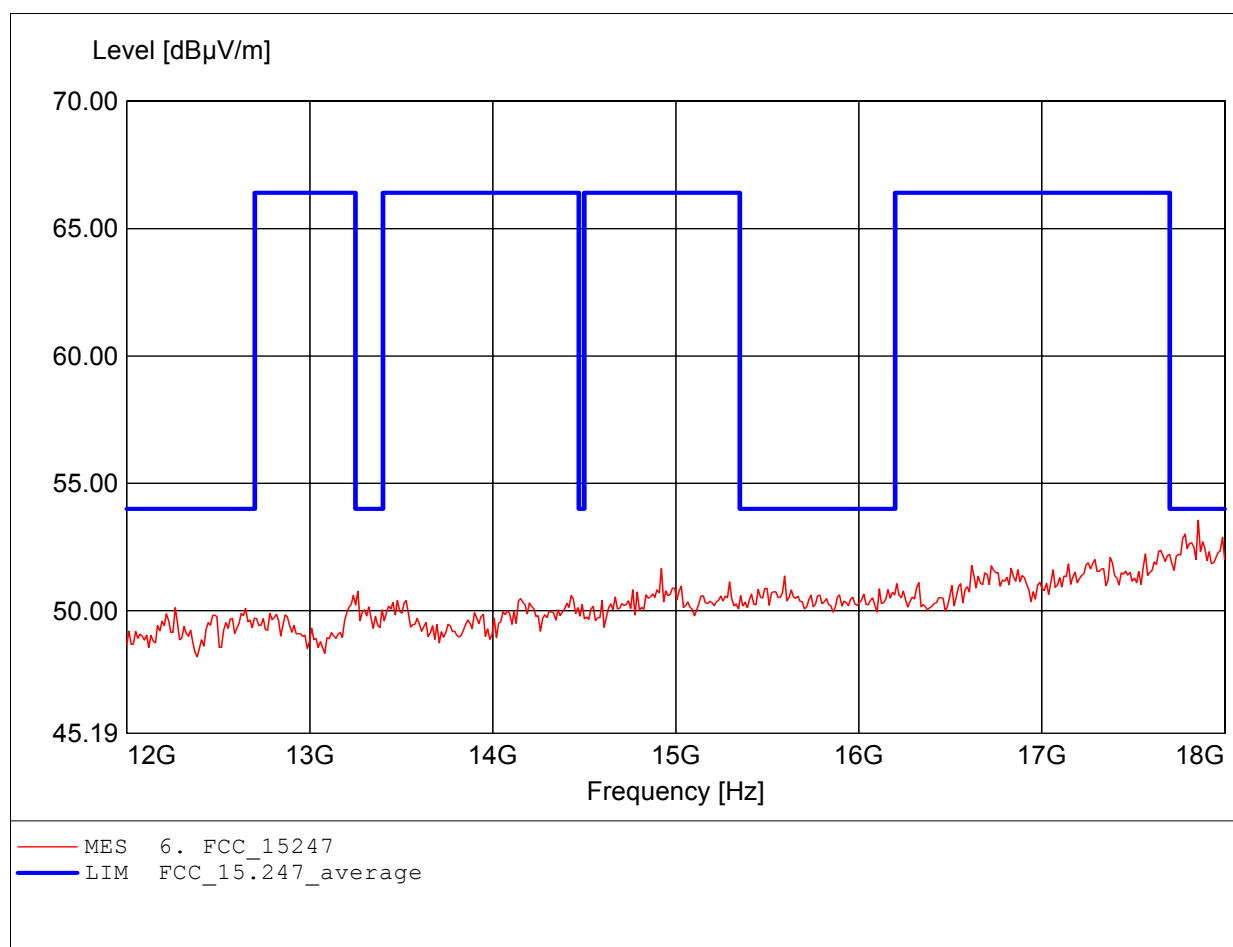

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, ampl.+HP.	
	Freq: 17.651GHz, Emax: 53.11dBμV/m, RBW: 1MHz	

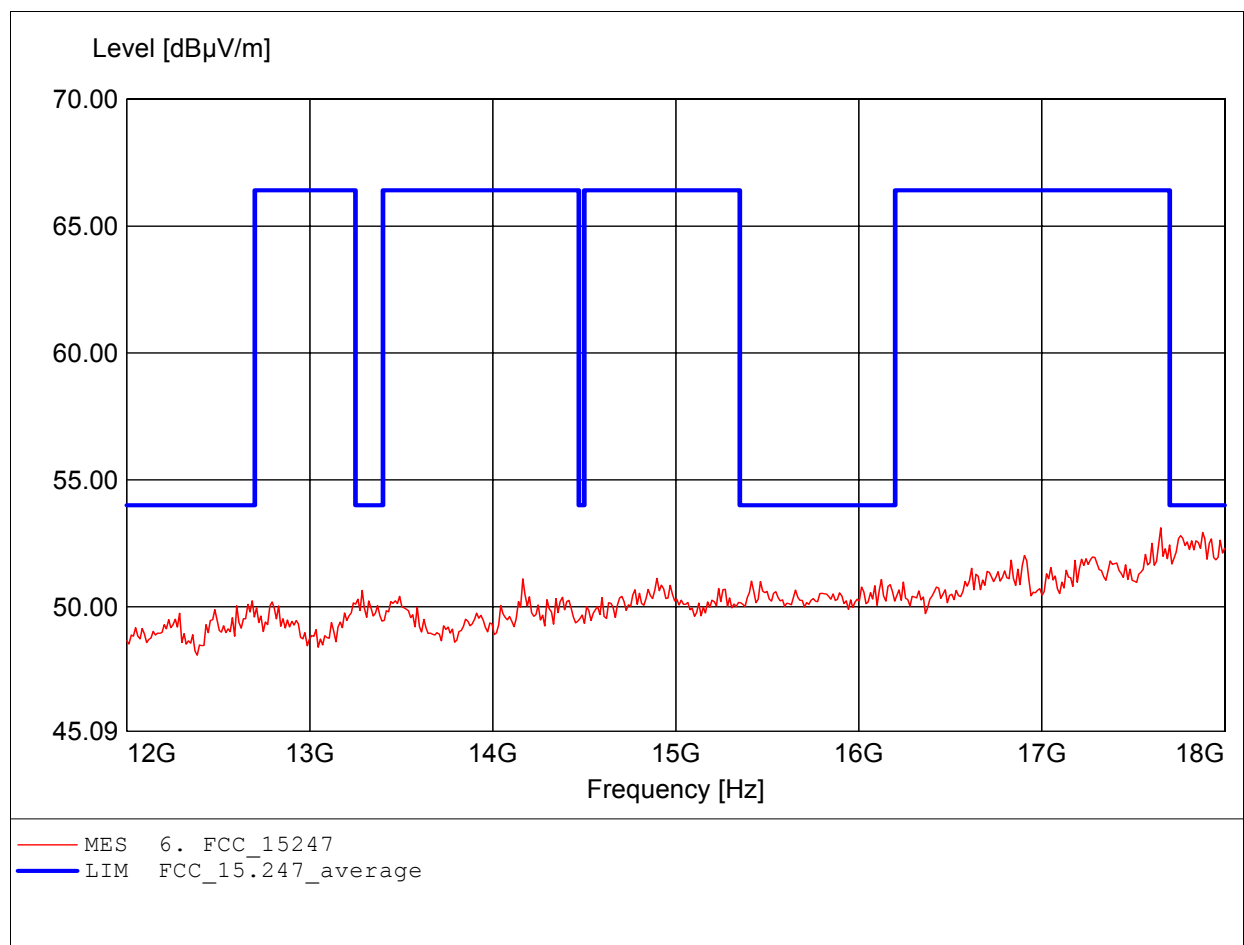

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 25.563GHz, Emax: 53.32dBμV/m, RBW: 1MHz	

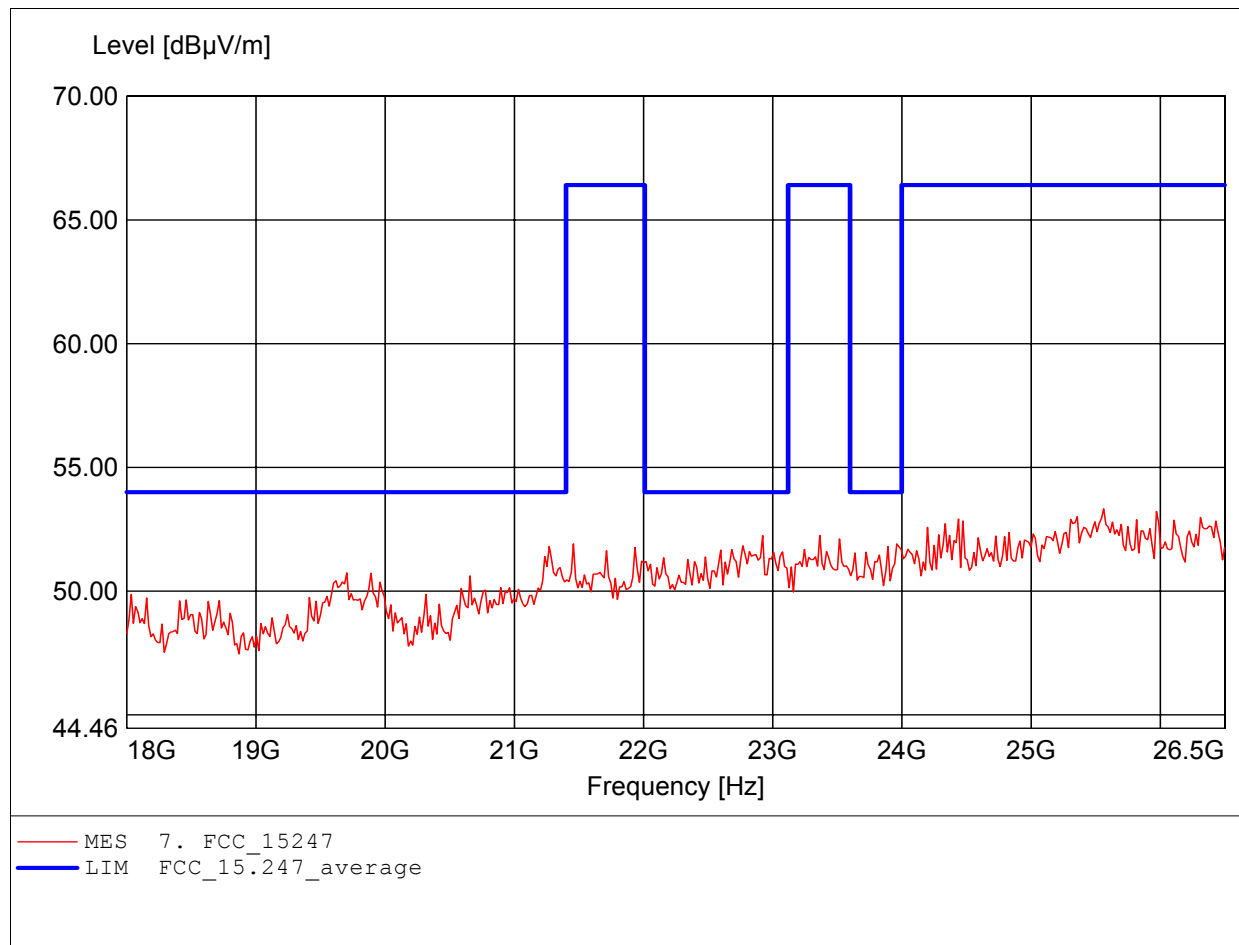

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

EUT:	WIRELESS ADSL FIREWALL ROUTER	
MODEL NO.:	DG834G V2	Type of Antenna (E) 11G CH11
Approval Holder:	Netgear Inc.	
Test Site / Operator:	ETS / Orville Chang	
Temperature/Voltage:	Temp.: 23°C/ Unom.:120VAC (ac / dc adaptor)	
Test Specification:	according to §15.247, peak detector	
Comment 1:	Dist.: 3m, Ant.: HL025, amplif.	
	Freq: 25.359GHz, Emax: 53.27dBμV/m, RBW: 1MHz	

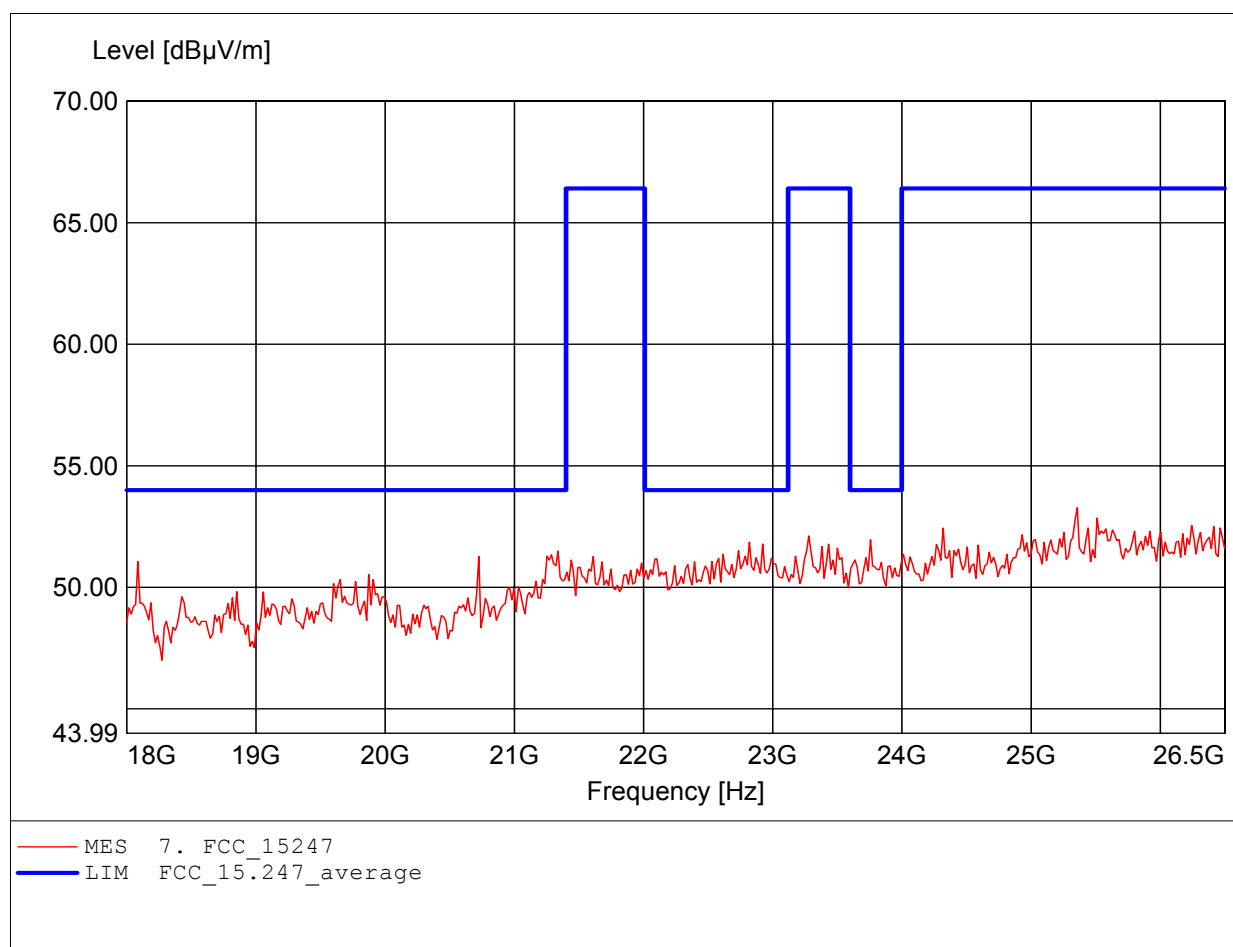

Registration number: W6M20404-5146-C-2
FCC ID: PY3DG834G V2

Appendix C

Band Edge Measurement



Marker 1 [T1]

RBW 100 kHz

RF Att 30 dB

Ref Lvl

-41.24 dBm

VBW

100 kHz

26.5 dBm


2.40000000 GHz

SWT

500 ms

Unit


dBm

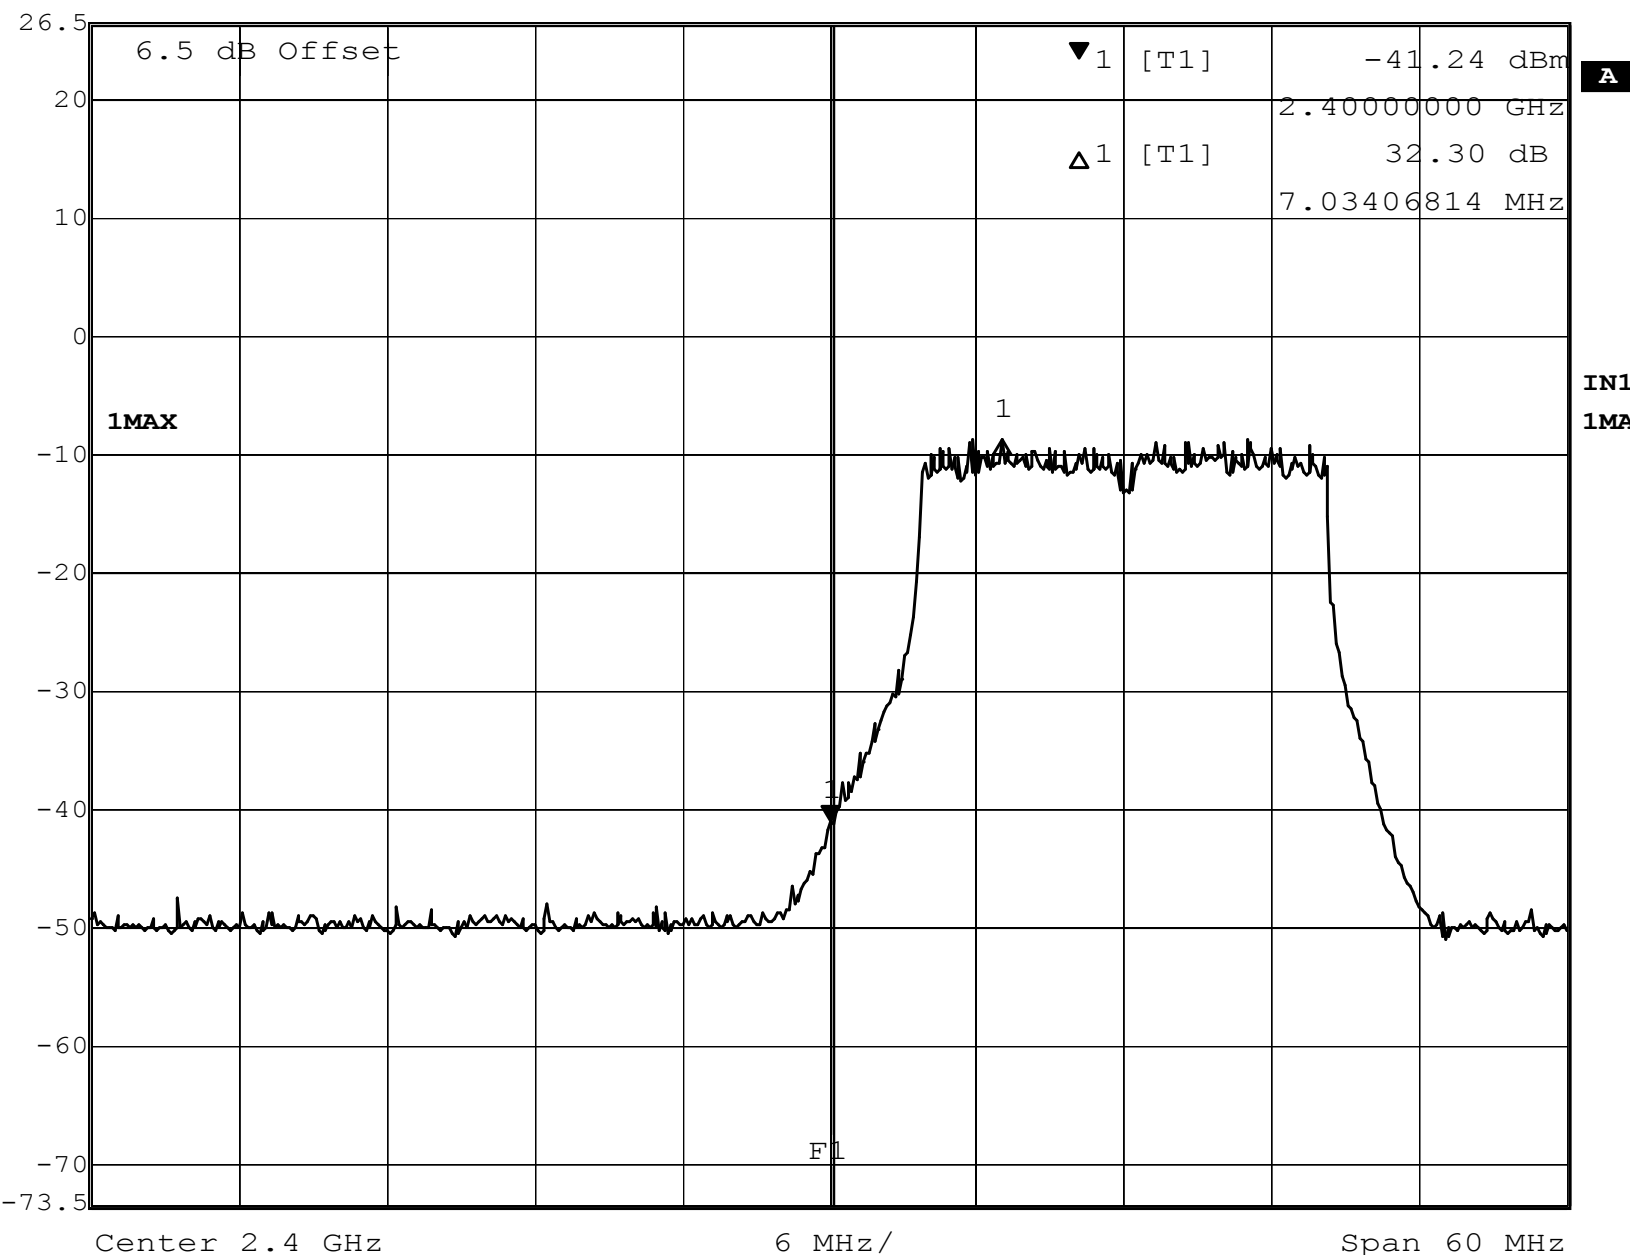

Title: BANDEDGE 11G CH1

Comment A: Netgear Inc.

Date: 12.MAY.2004 16:06:20

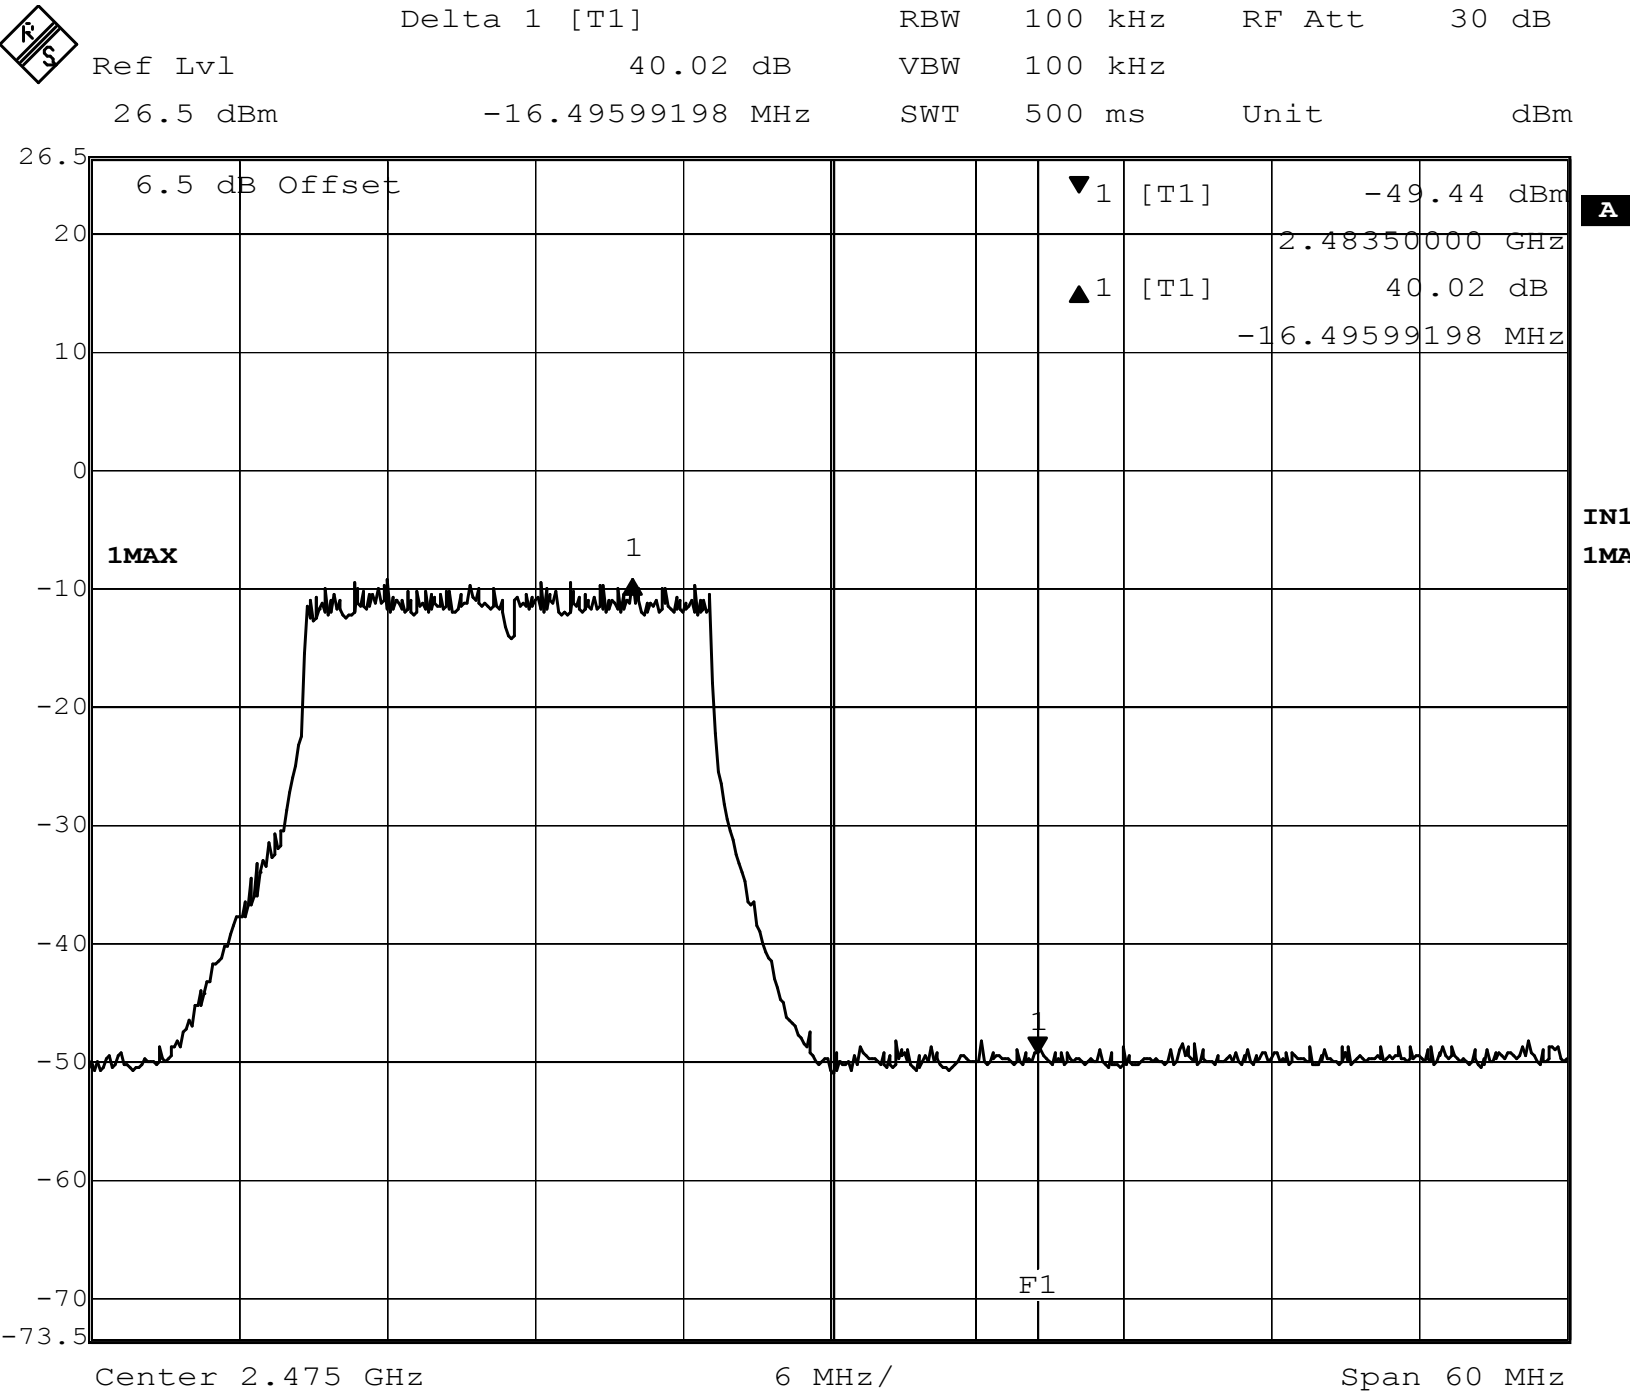

Title: BANDEDGE 11G CH11
Comment A: Netgear Inc.
Date: 12.MAY.2004 16:10:57

Registration number: W6M20404-5146-C-2
FCC ID: PY3DG834G V2

Appendix D

Maximum 6dB Bandwidth



Marker 1 [T1]

RBW 100 kHz

RF Att 30 dB

Ref Lvl

-7.96 dBm

VBW

300 kHz

26.5 dBm


2.40576754 GHz

SWT

500 ms

Unit

dBm

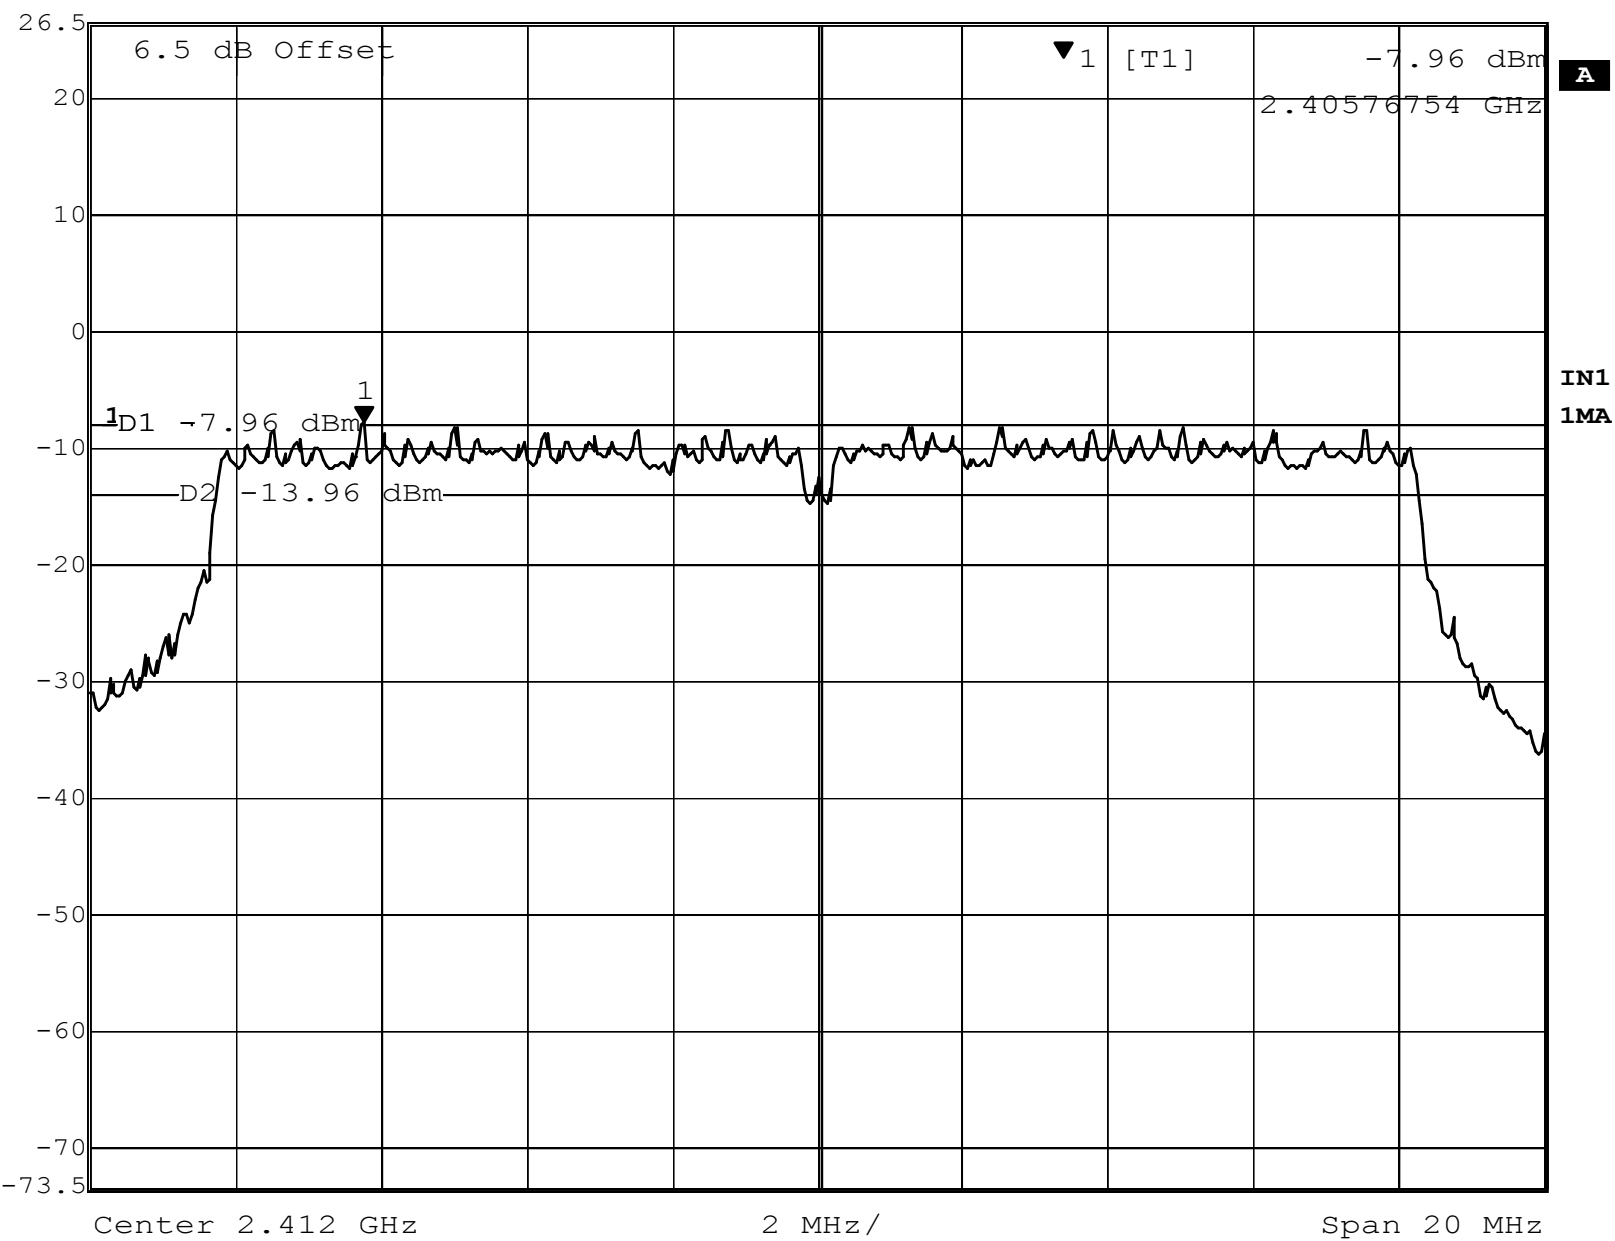

Title: 6dB BANDWIDTH 11G CH1

Comment A: Netgear Inc.

Date: 20.MAY.2004 14:51:56



Marker 1 [T1]

RBW 100 kHz

RF Att 30 dB

Ref Lvl

-8.32 dBm

VBW

300 kHz

26.5 dBm


2.43076754 GHz

SWT

500 ms

Unit

dBm

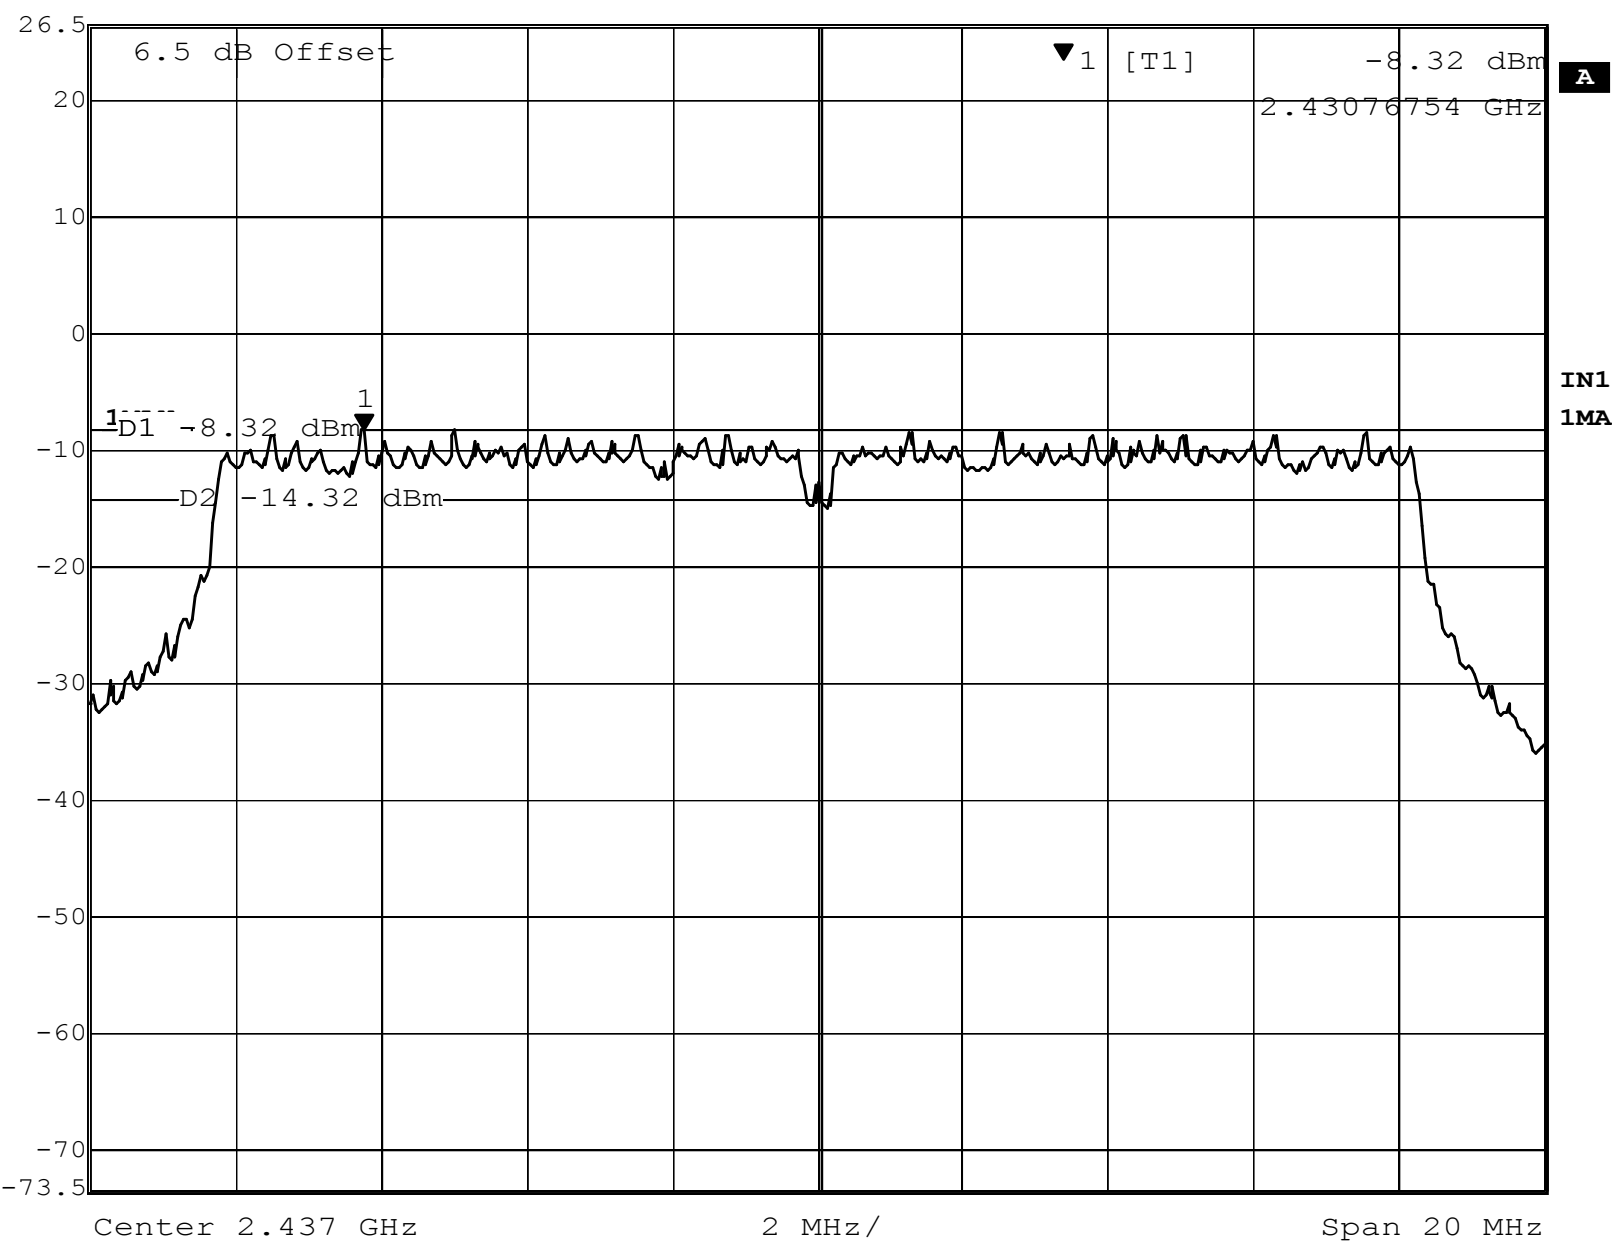

Title: 6dB BANDWIDTH 11G CH6

Comment A: Netgear Inc.

Date: 20.MAY.2004 14:48:05



Marker 1 [T1]

RBW 100 kHz

RF Att 30 dB

Ref Lvl -9.68 dBm


VBW 300 kHz

26.5 dBm

2.45701002 GHz

SWT 500 ms

Unit dBm

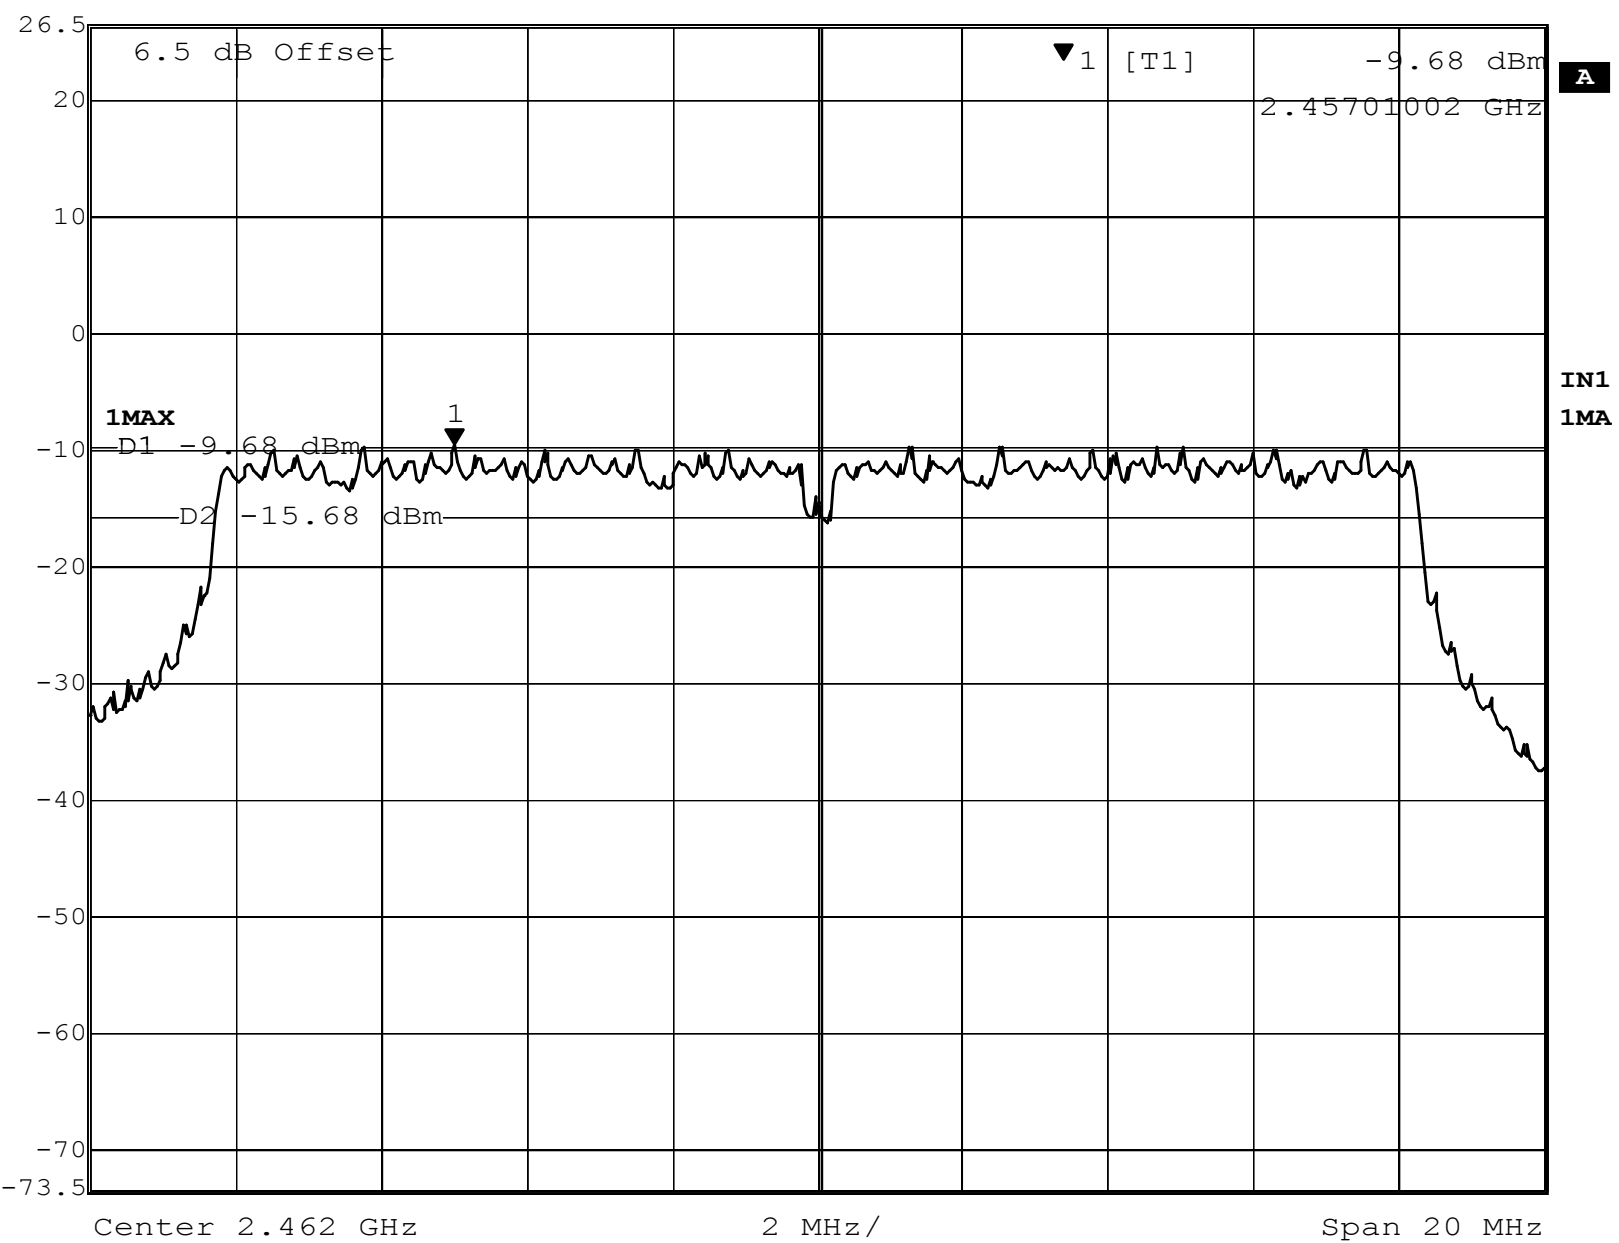

Title: 6dB BANDWIDTH 11G CH11

Comment A: Netgear Inc.

Date: 20.MAY.2004 14:43:55

Registration number: W6M20404-5146-C-2
FCC ID: PY3DG834G V2

Appendix E

Peak Power Spectral Density



Marker 1 [T2]

RBW 3 kHz

RF Att 30 dB

Ref Lvl -17.37 dBm

VBW 100 kHz


26.5 dBm

2.41202555 GHz

SWT 500 s

Unit

dBm

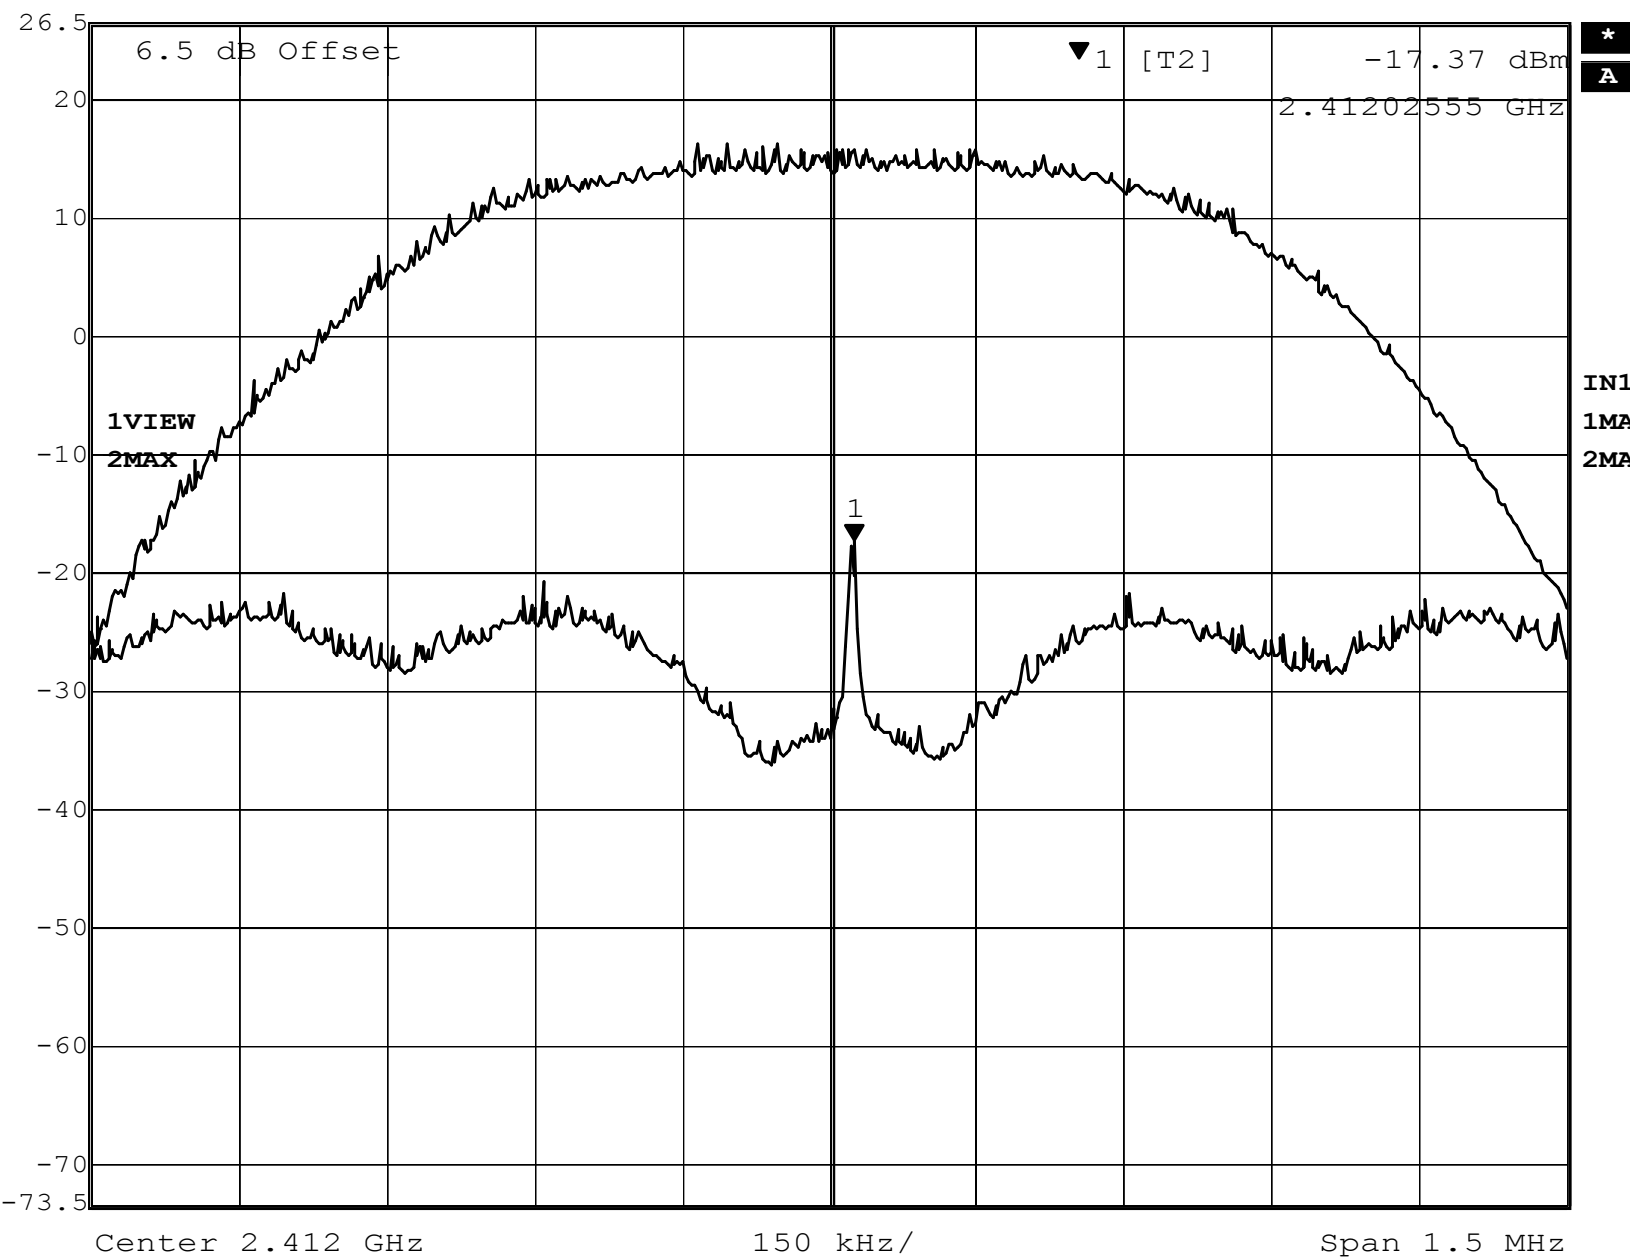

Title: POWER DENSITY 11G CH1

Comment A: Netgear Inc.

Date: 12.MAY.2004 16:21:04



Marker 1 [T2]

RBW 3 kHz

RF Att 30 dB

Ref Lvl

-18.47 dBm

VBW 100 kHz


26.5 dBm

2.43702555 GHz

SWT 500 s

Unit

dBm

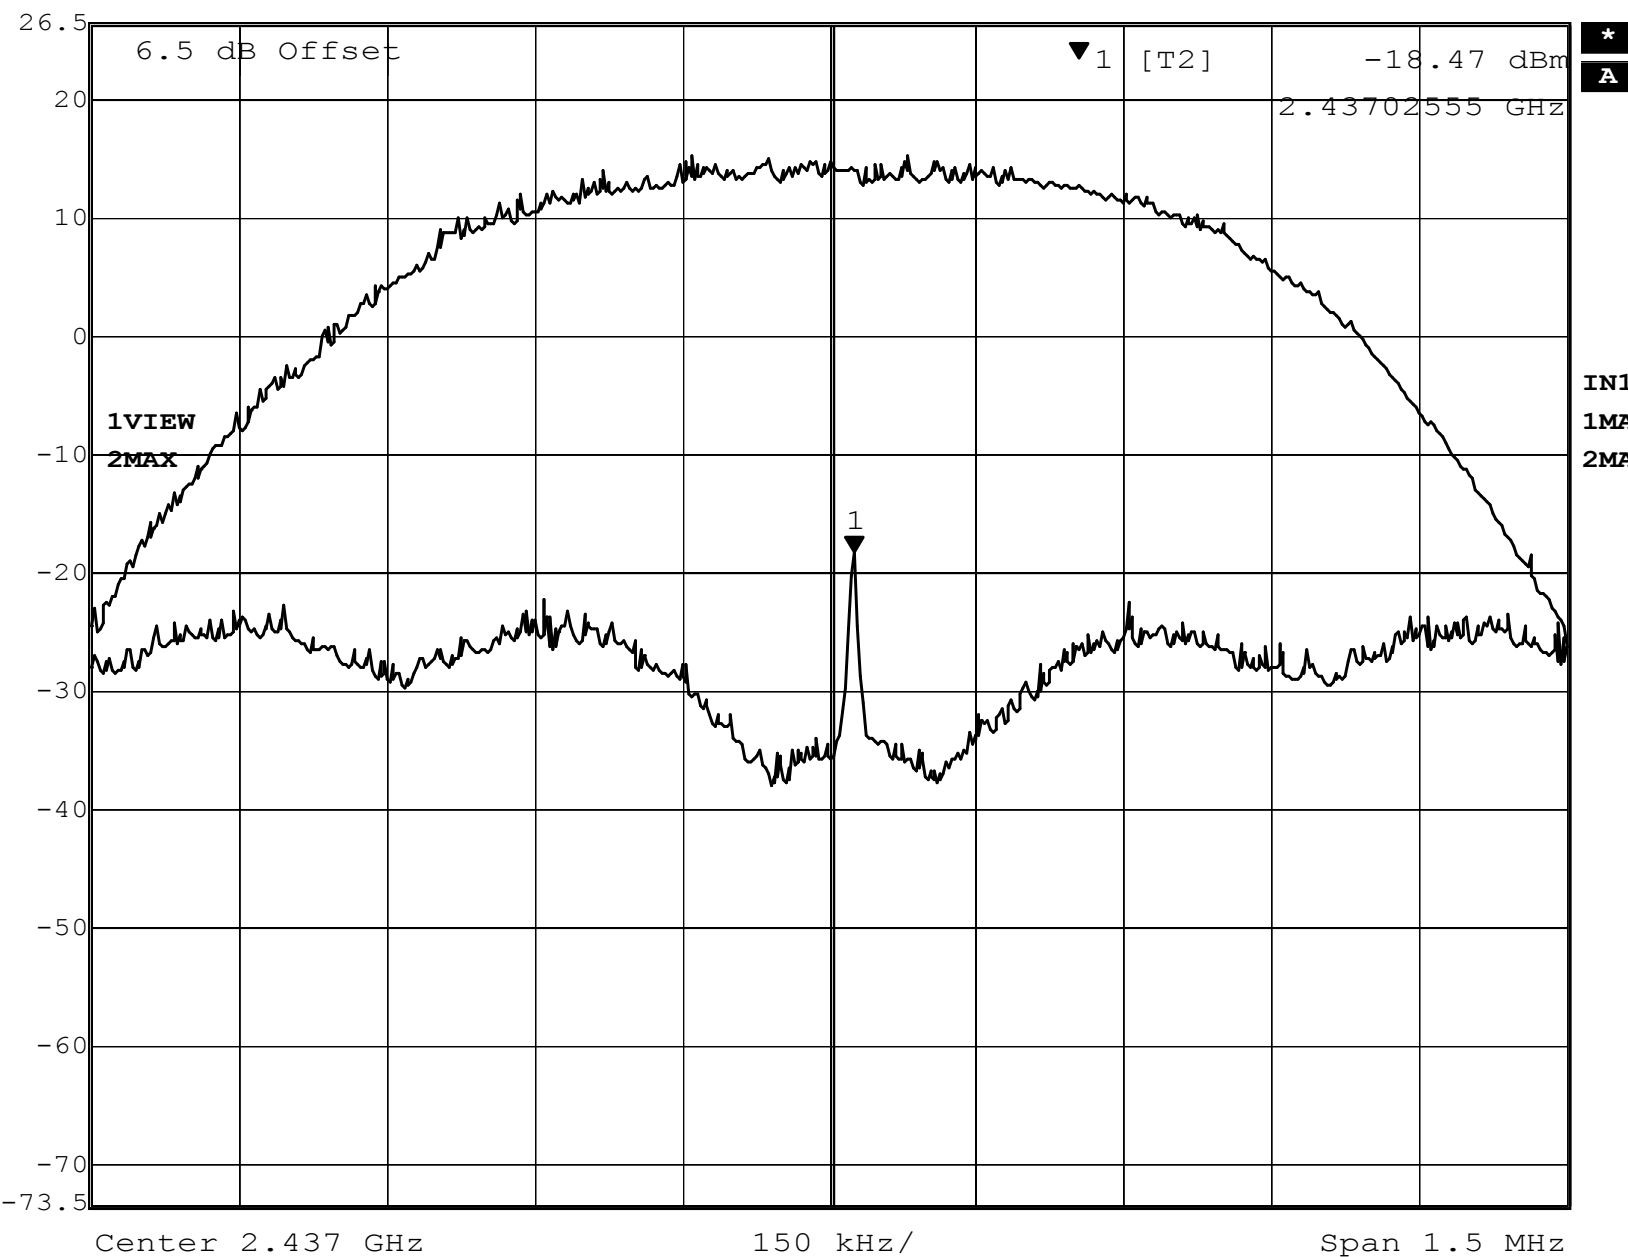

Title: POWER DENSITY 11G CH6

Comment A: Netgear Inc.

Date: 12.MAY.2004 16:33:35



Marker 1 [T2]

RBW 3 kHz

RF Att 30 dB

Ref Lvl

-17.98 dBm


VBW 100 kHz

26.5 dBm

2.46202555 GHz

SWT 500 s

Unit dBm

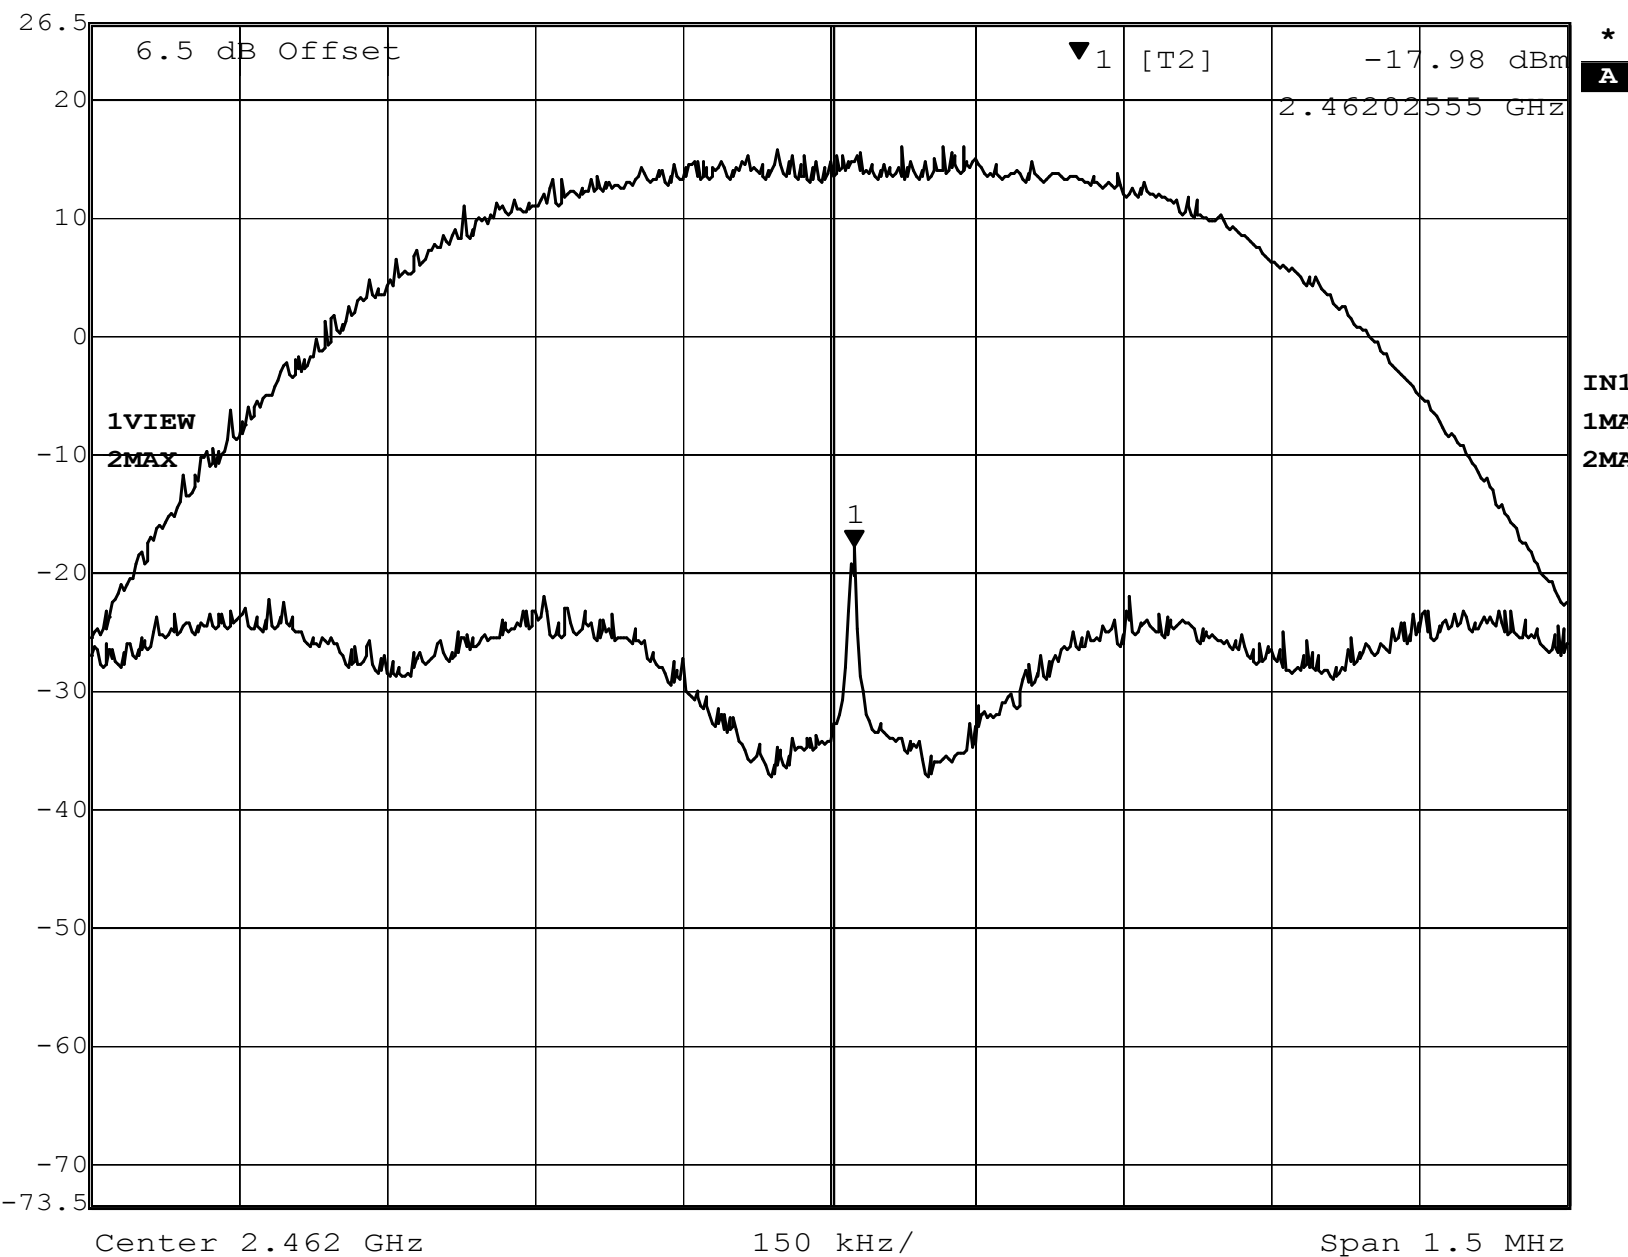

Title: POWER DENSITY 11G CH11

Comment A: Netgear Inc.

Date: 12.MAY.2004 16:38:10

Registration number: W6M20404-5146-C-2
FCC ID: PY3DG834G V2


Appendix F

Power Line Conducted Emission

EMI voltage test in the ac-mains according to FCC Part 15

Class B


EUT: WIRELESS ADSL FIREWALL ROUTER
Manufacturer: Netgear Inc.
Operating Condition: Unom: 120VAC (AC/DC adaptor) , Tnom: 25°C
Test Site: ETS
Operator: Sander Huang
Test Specification: V-network: ESH3-Z5 N
Comment: model: WIRELESS ADSL FIREWALL ROUTER mode : active

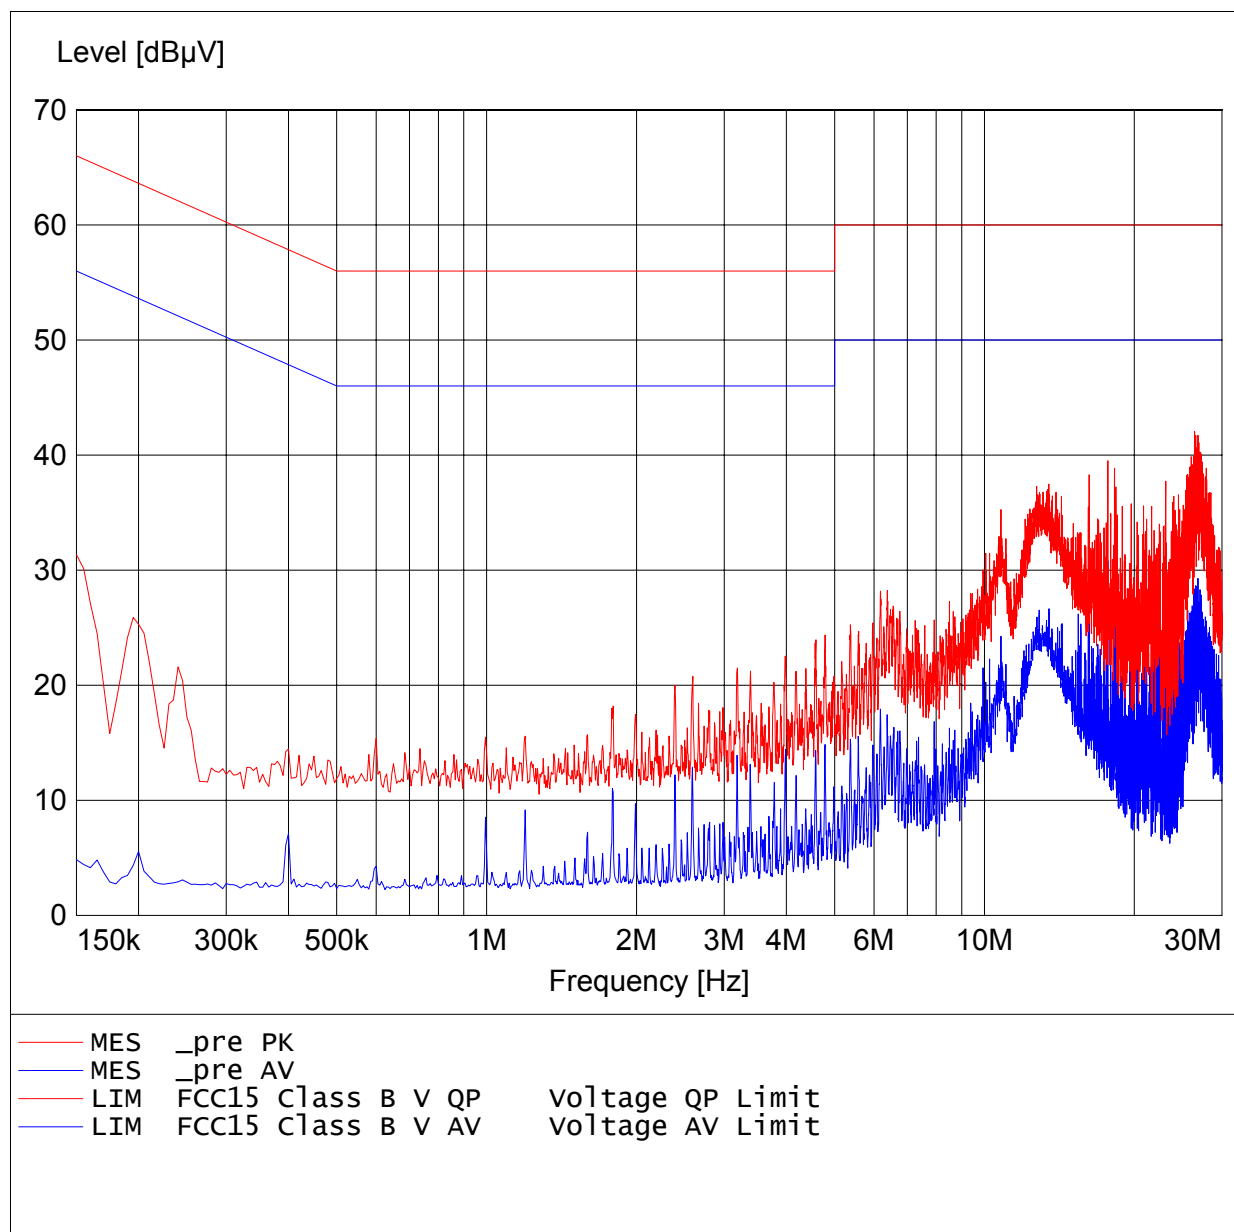

EMI voltage test in the ac-mains according to FCC Part 15

Class B

EUT: WIRELESS ADSL FIREWALL ROUTER
Manufacturer: Netgear Inc.
Operating Condition: Unom: 120VAC (AC/DC adaptor) , Tnom: 25°C
Test Site: ETS
Operator: Sander Huang
Test Specification: V-network: ESH3-Z5 L1
Comment: model: WIRELESS ADSL FIREWALL ROUTER mode : active

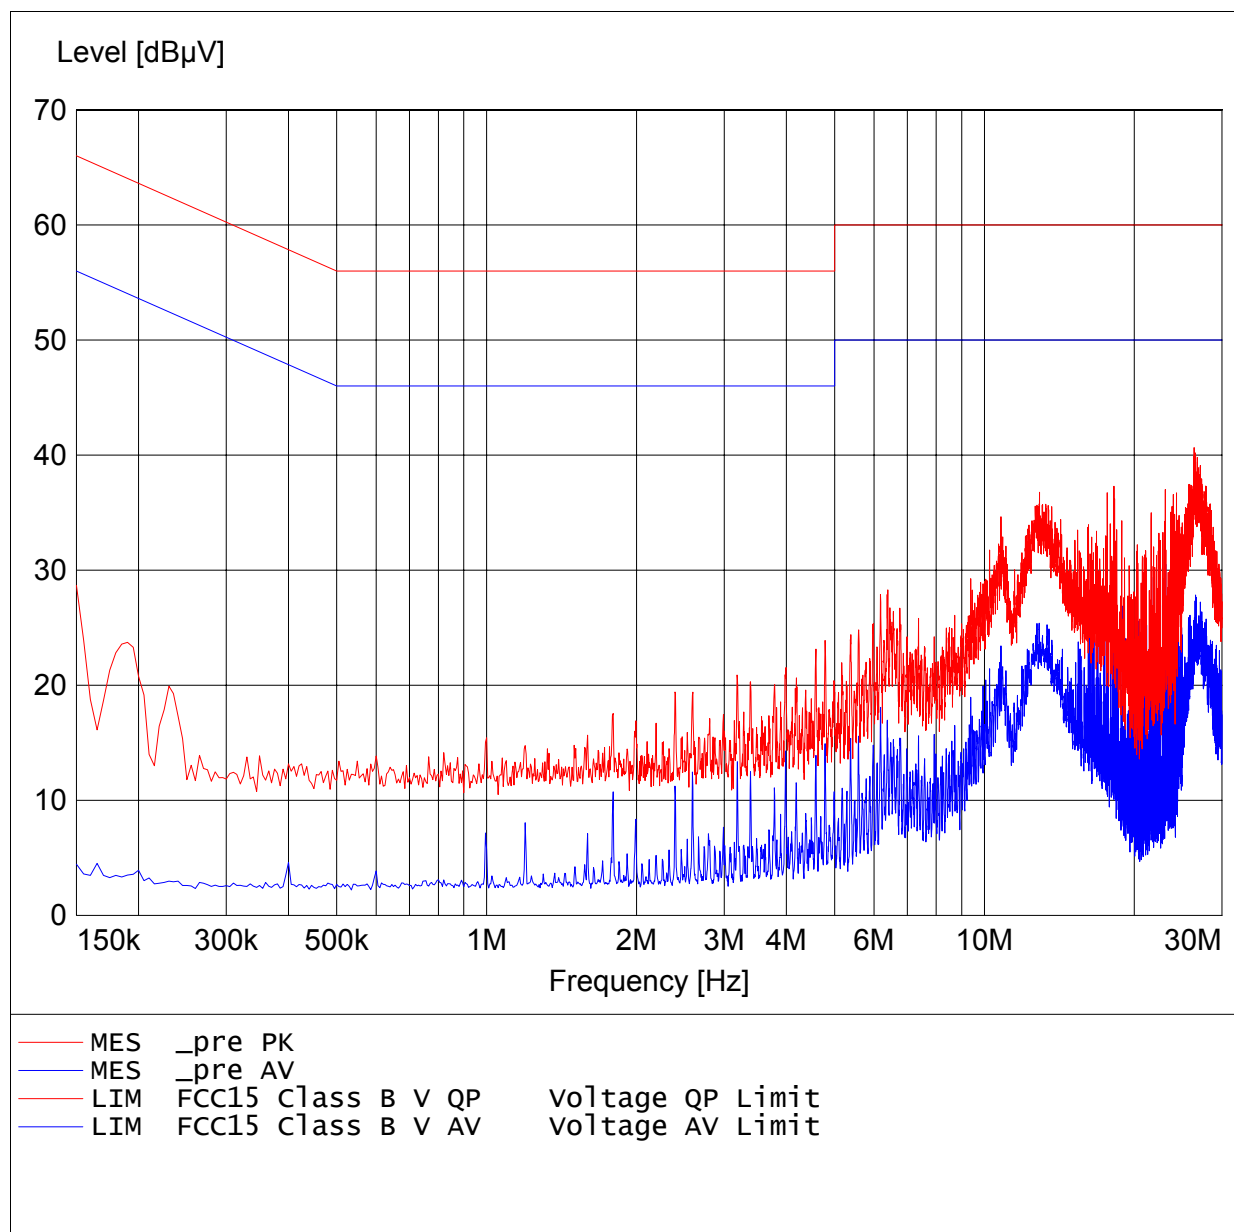

Registration number: W6M20404-5146-C-2
FCC ID: PY3DG834G V2

Appendix G

Pictures

Type of antenna (A)









Type of antenna (B)









Type of antenna (C)












Type of antenna (D)





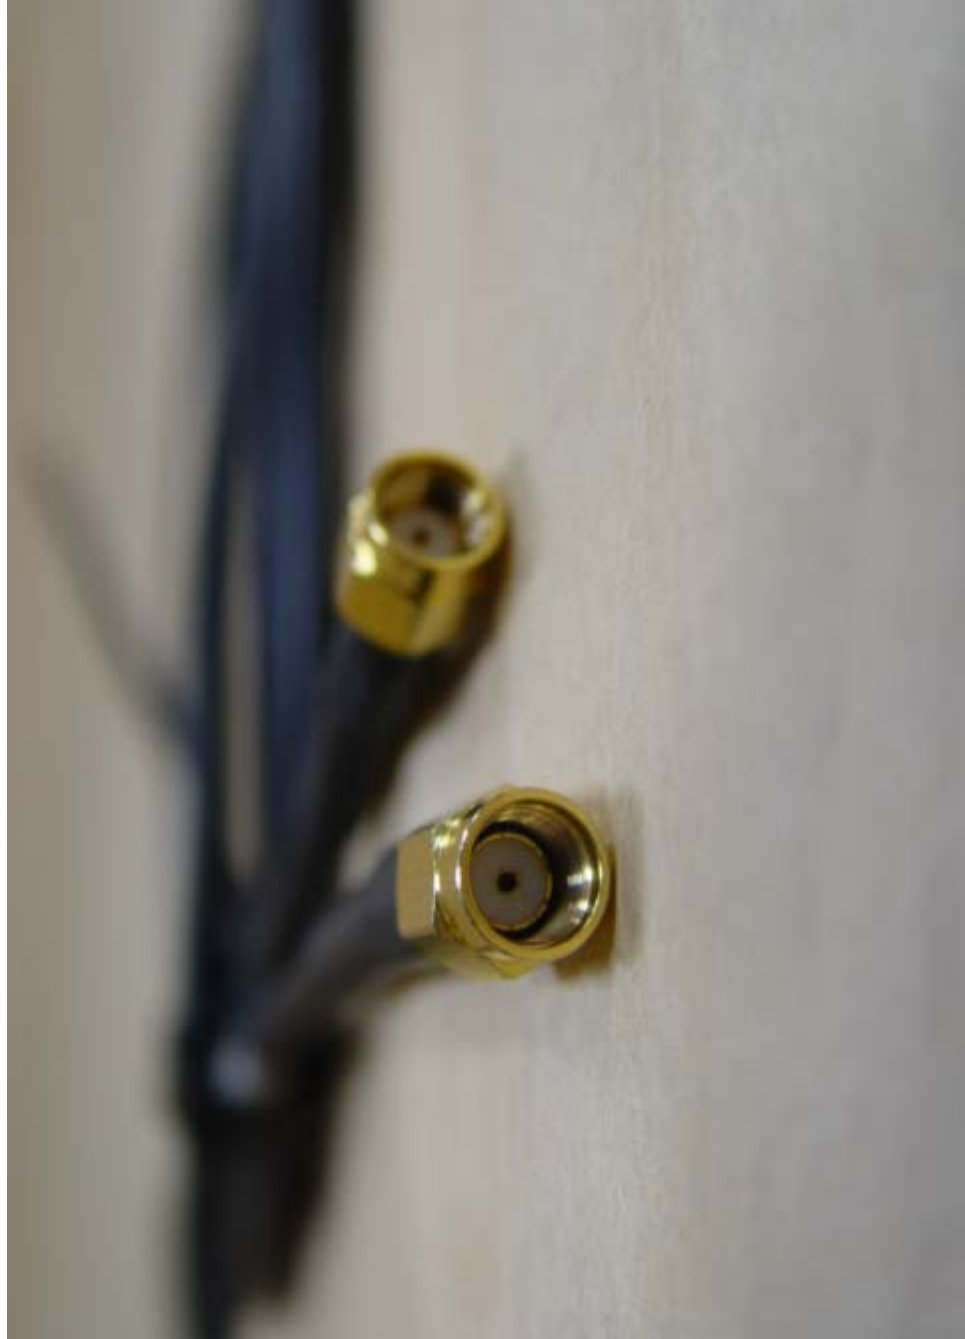











Type of antenna (E)





















External
























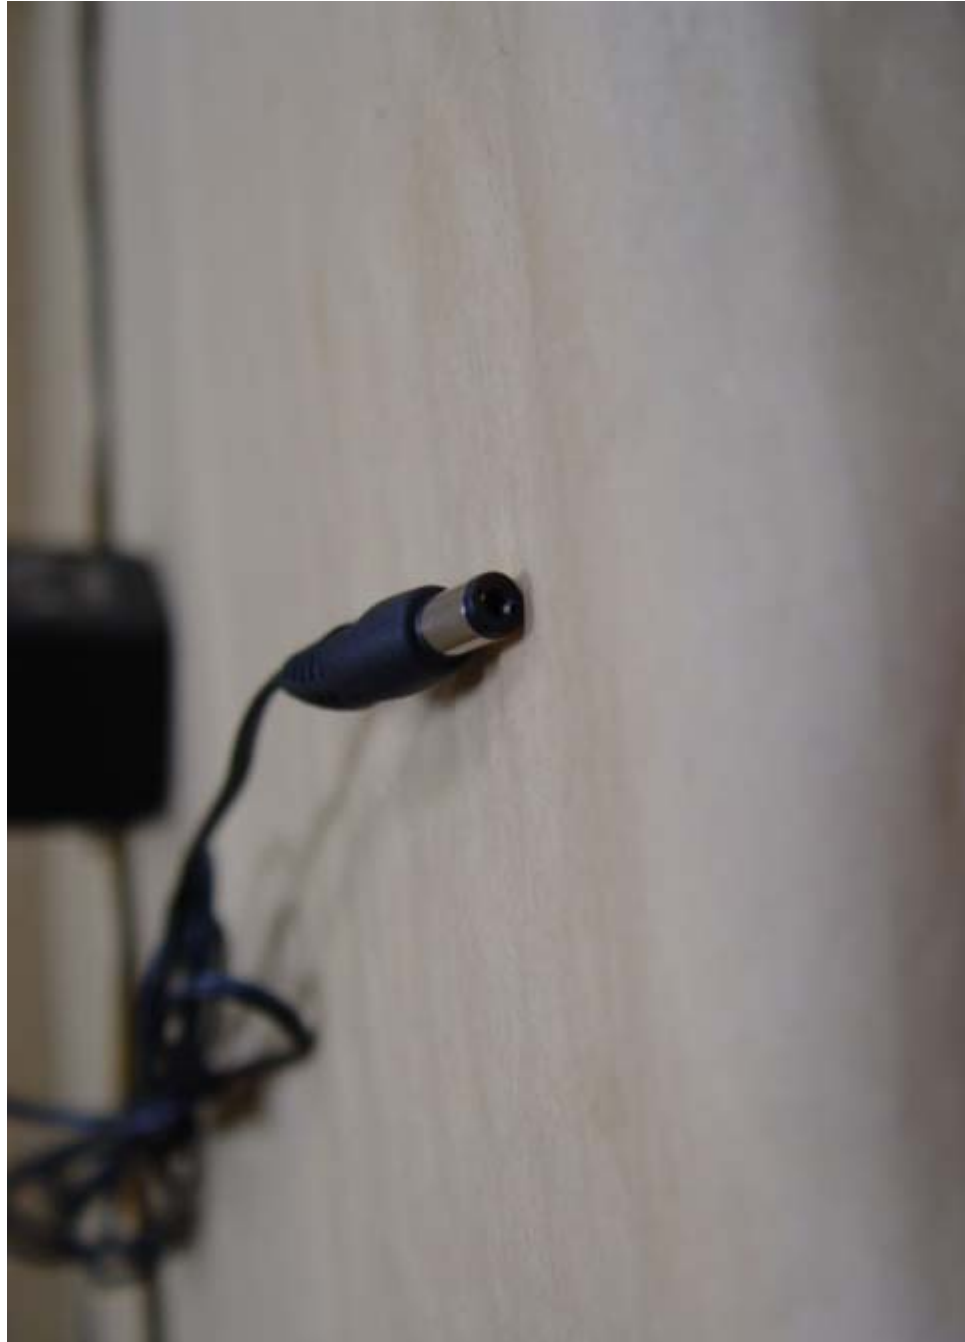

Internal





