

Intertek Testing Services


RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-L
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24'C 55%RH tx at 5180MHz
Date: 02. Sep 02 17:46

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO LN	OFF

Final Measurement: x QP
Meas Time: 1 s

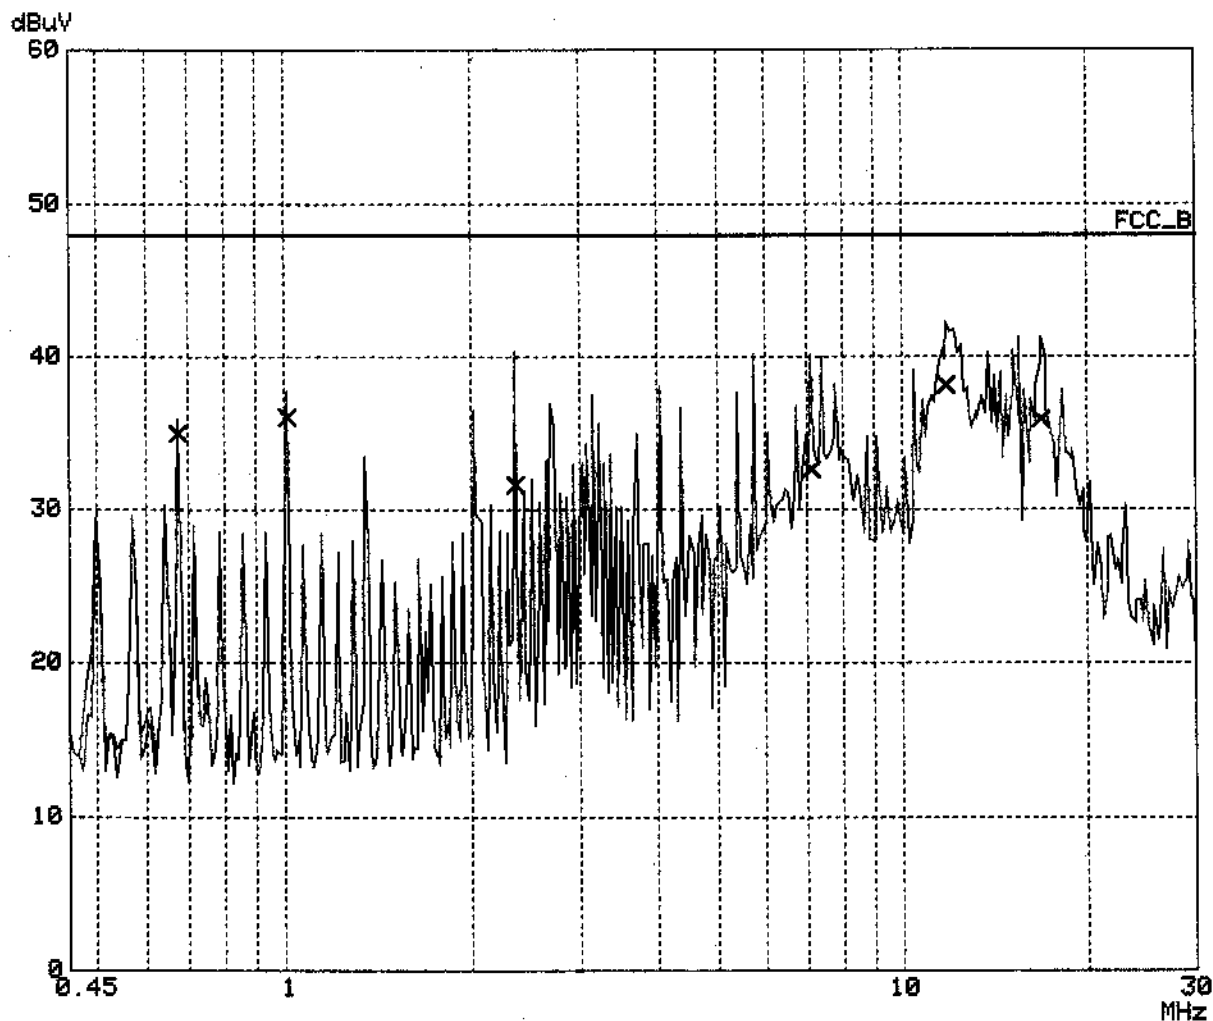

Intertek Testing Services


RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-N
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24'C 55%RH tx at 5180MHz
Date: 02. Sep 02 17:52

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO LN	OFF

Final Measurement: x QP
Meas Time: 1 s

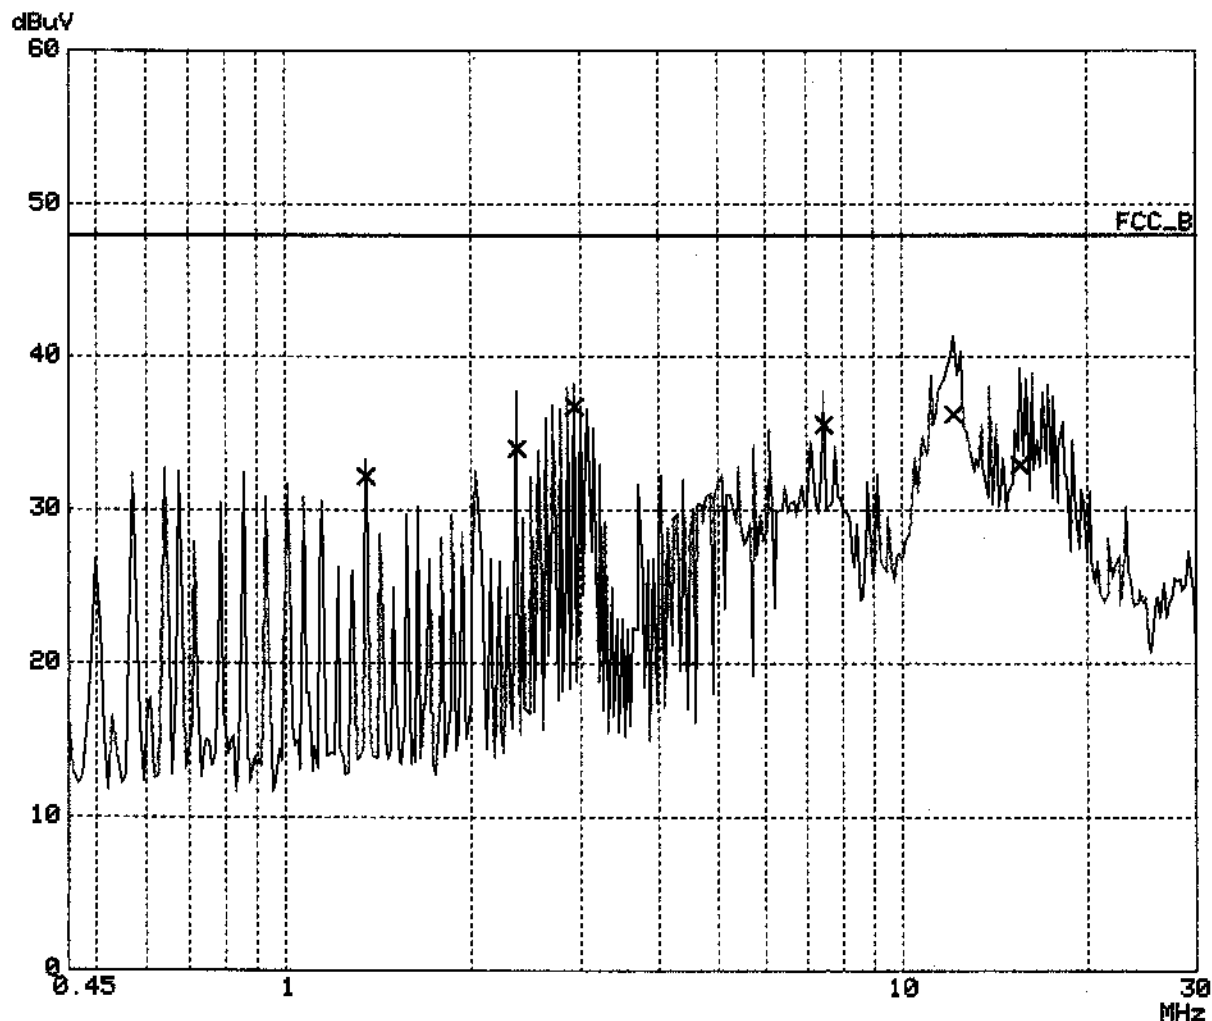

Intertek Testing Services


RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-L
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24°C 55%RH tx at 5260MHz
Date: 02. Sep 02 18:09

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

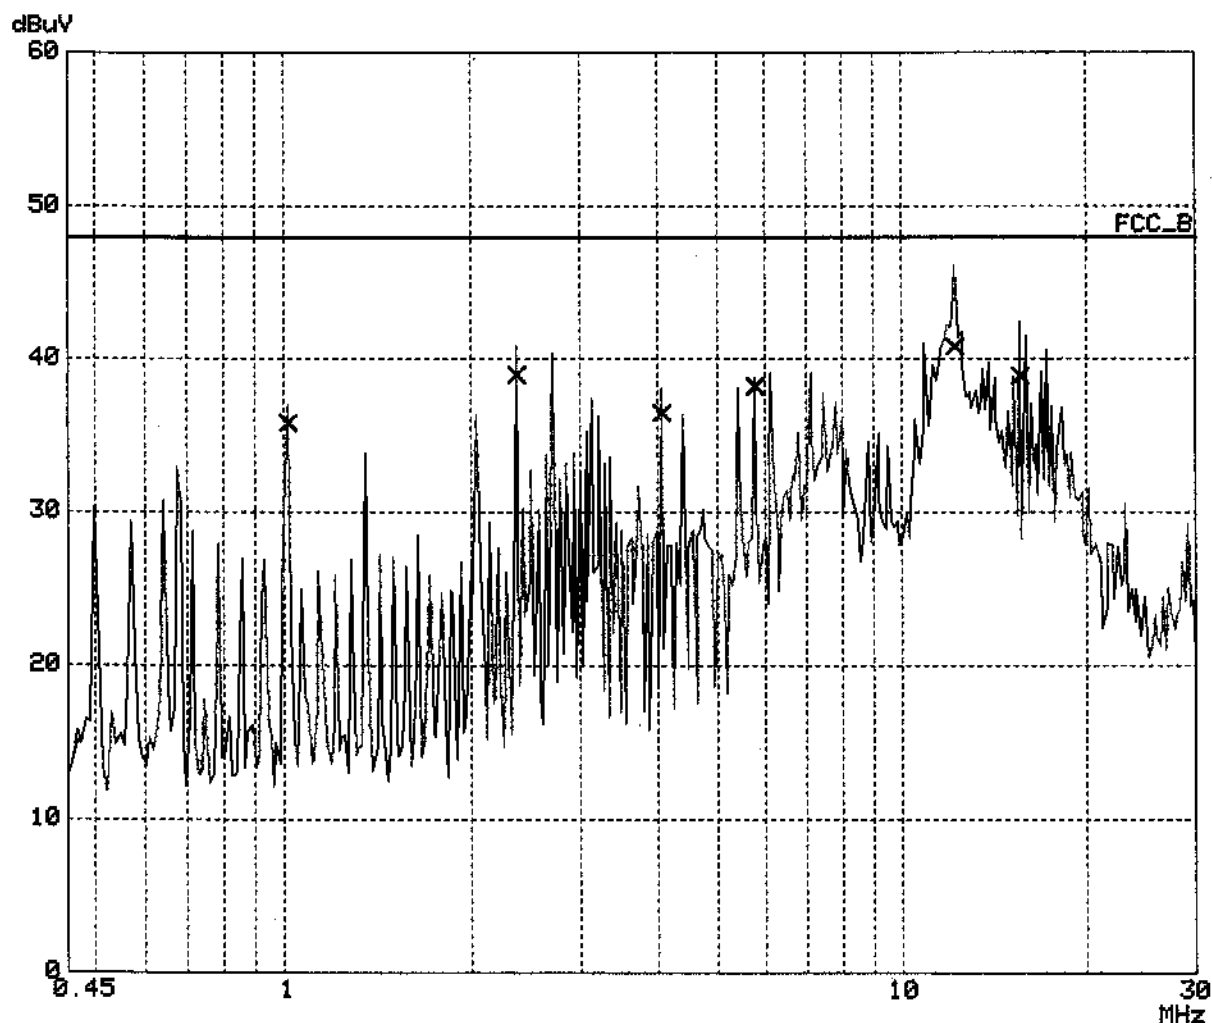

Intertek Testing Services


RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-N
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24'C 55%RH tx at 5260MHz
Date: 02. Sep 02 17:59

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO LN	OFF

Final Measurement: x QP
Meas Time: 1 s

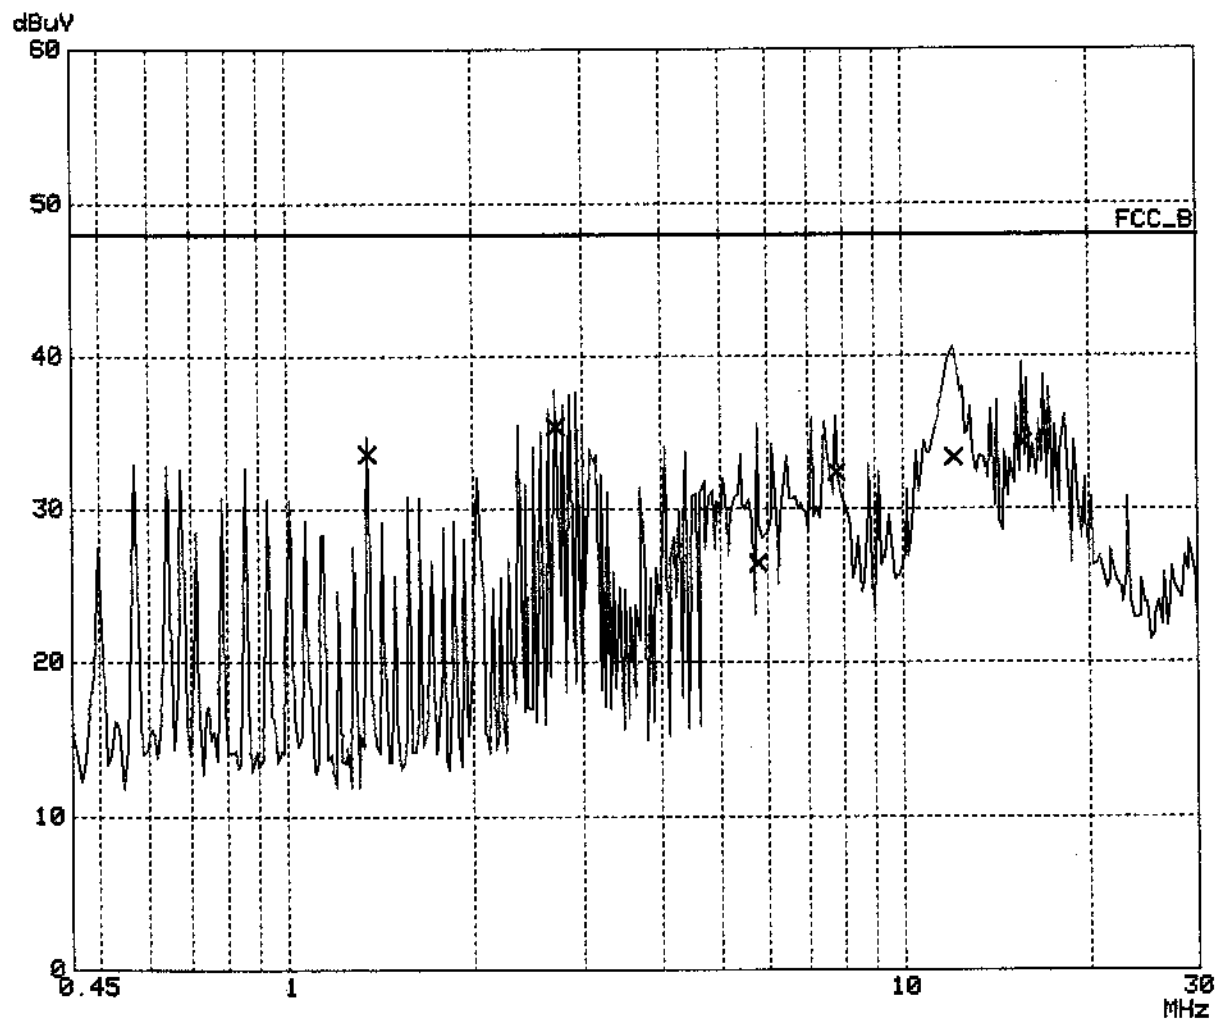

Intertek Testing Services

RF VOLTAGE


EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-L
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24'C 55%RH tx at 5320MHz
Date: 02. Sep 02 18:32

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP

Meas Time: 1 s

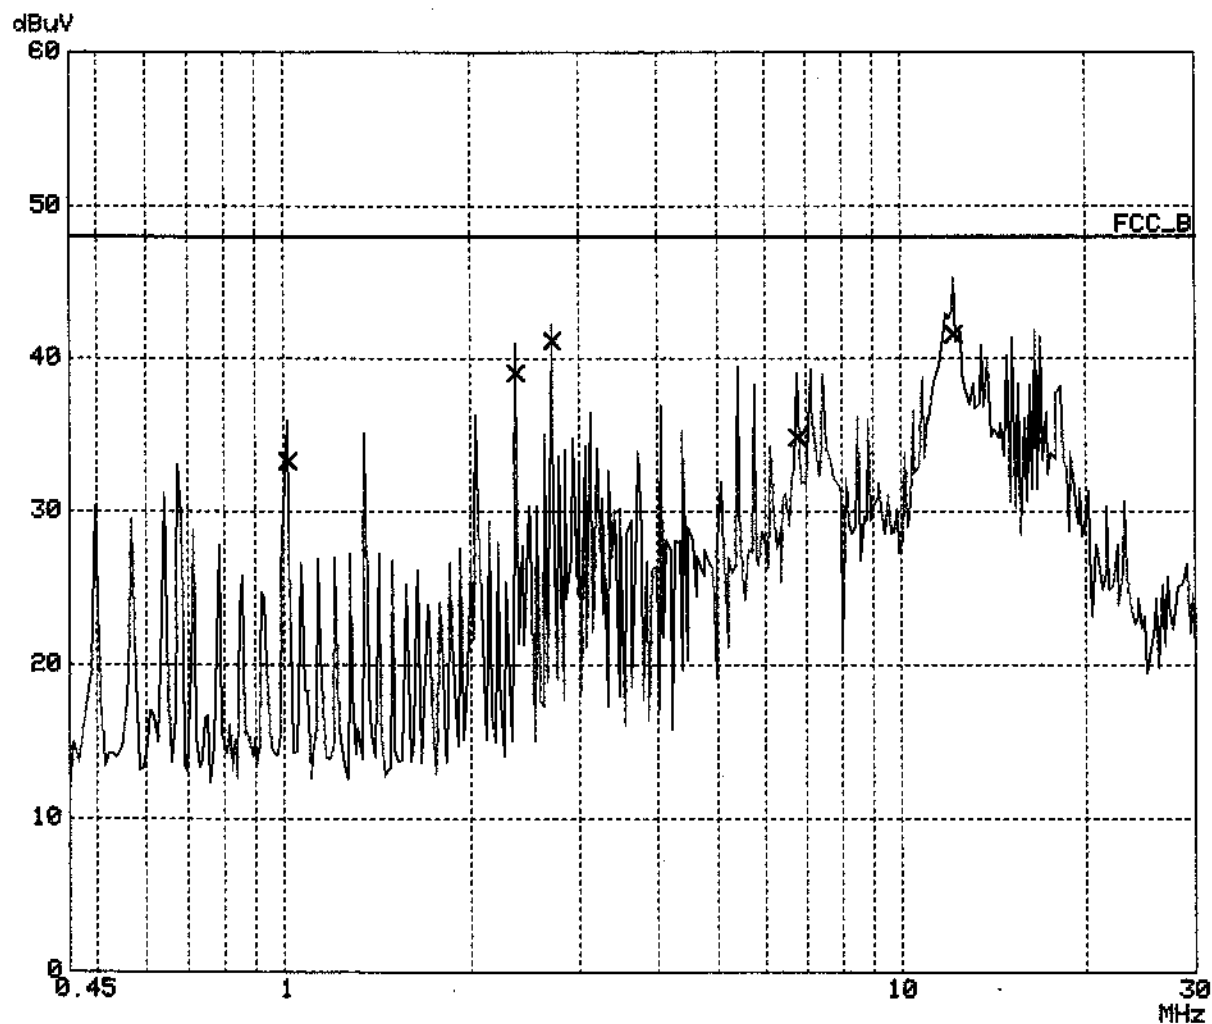

Intertek Testing Services


RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-N
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24'C 55%RH tx at 5320MHz
Date: 02. Sep 02 18:25

Scan Settings (1 Range)

----- Frequencies -----			----- Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

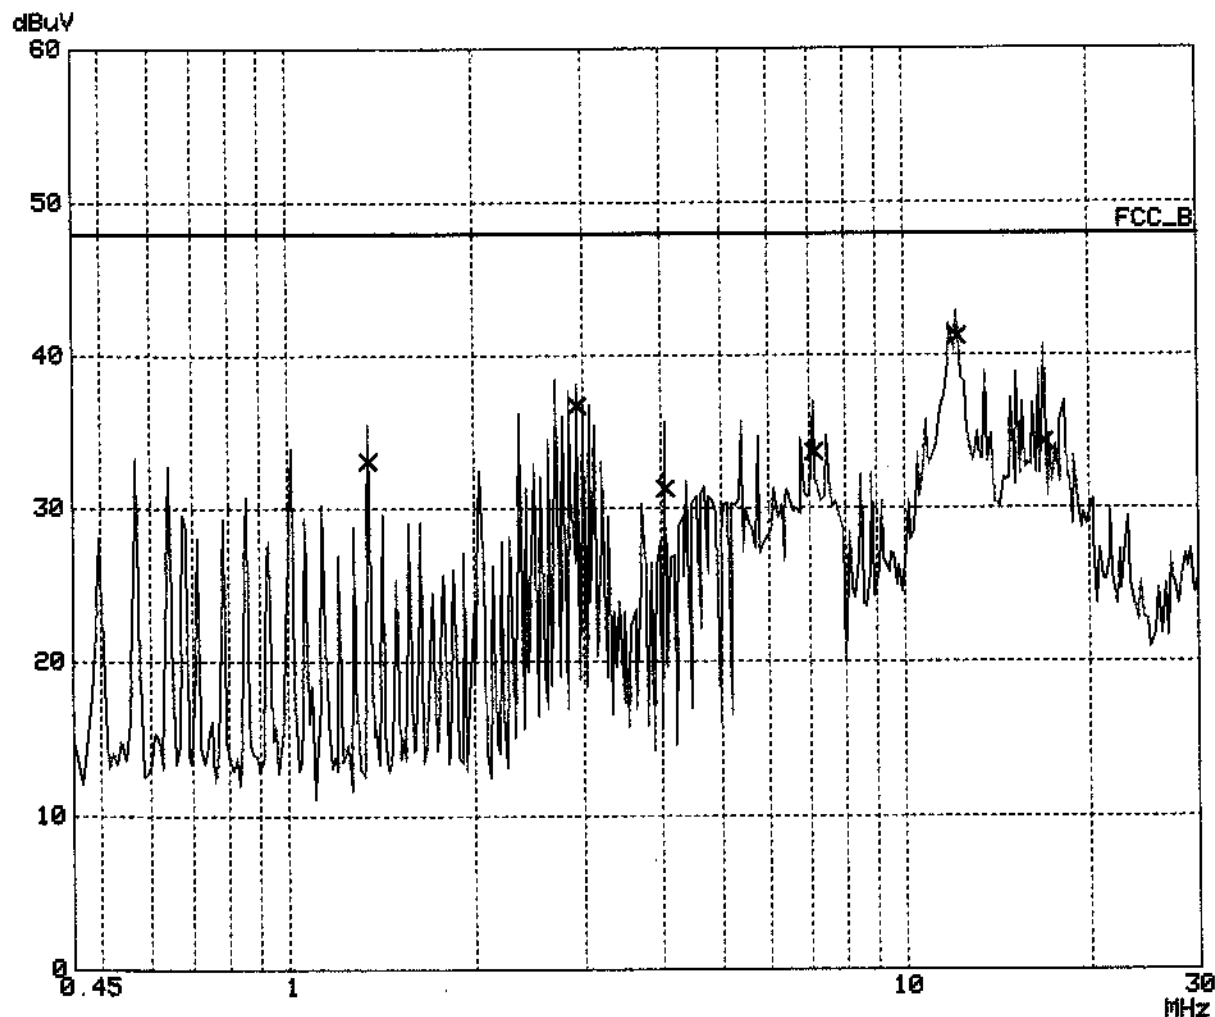

Intertek Testing Services


RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Up Cond: LISN-L
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24'C 55%RH tx at 5745MHz
Date: 02. Sep 02 12:20

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

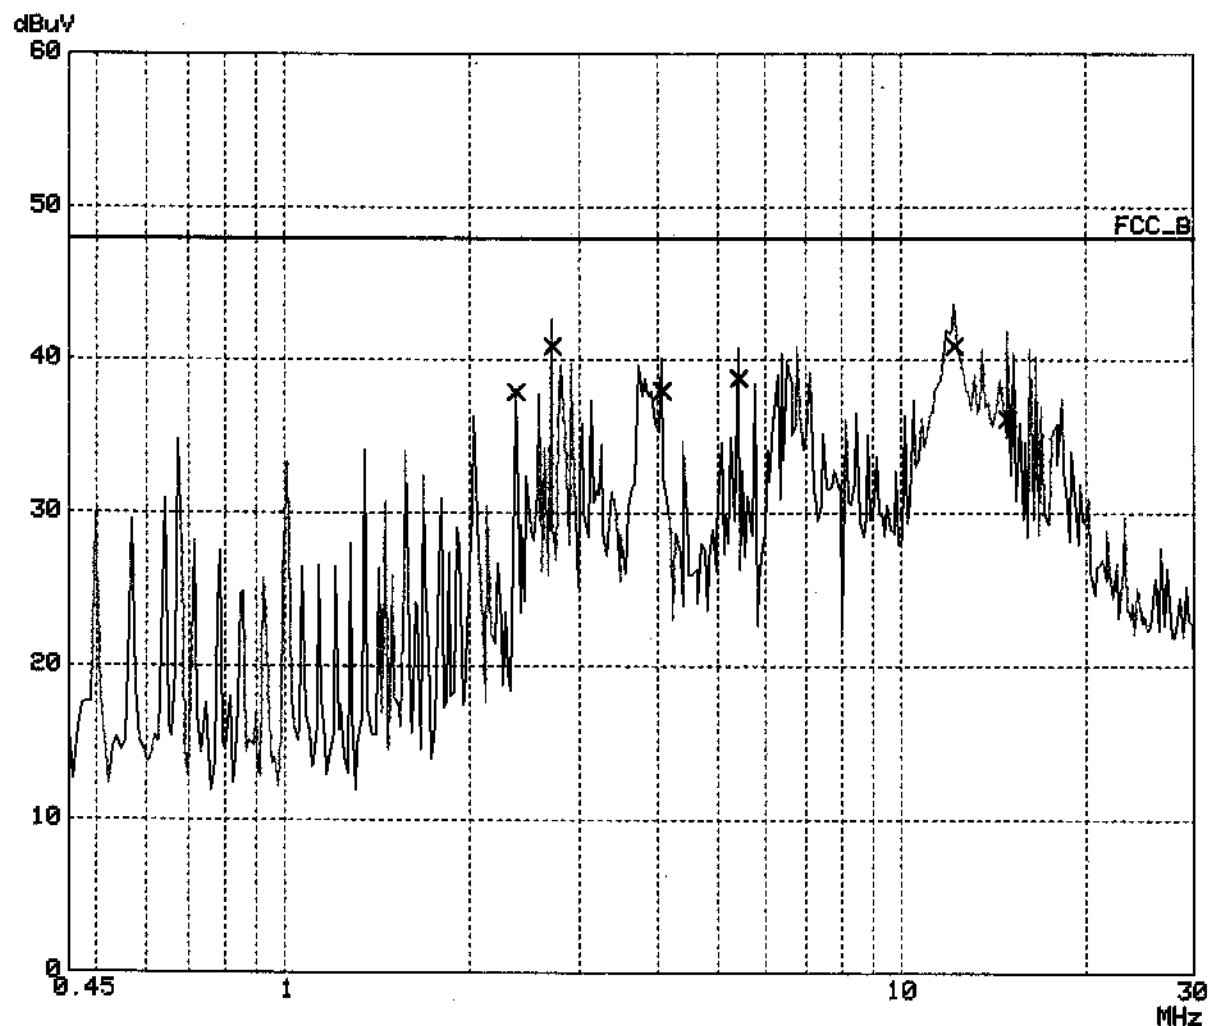

Intertek Testing Services


RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-N
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24'C 55%RH tx at 5745MHz
Date: 02. Sep 02 12:12

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

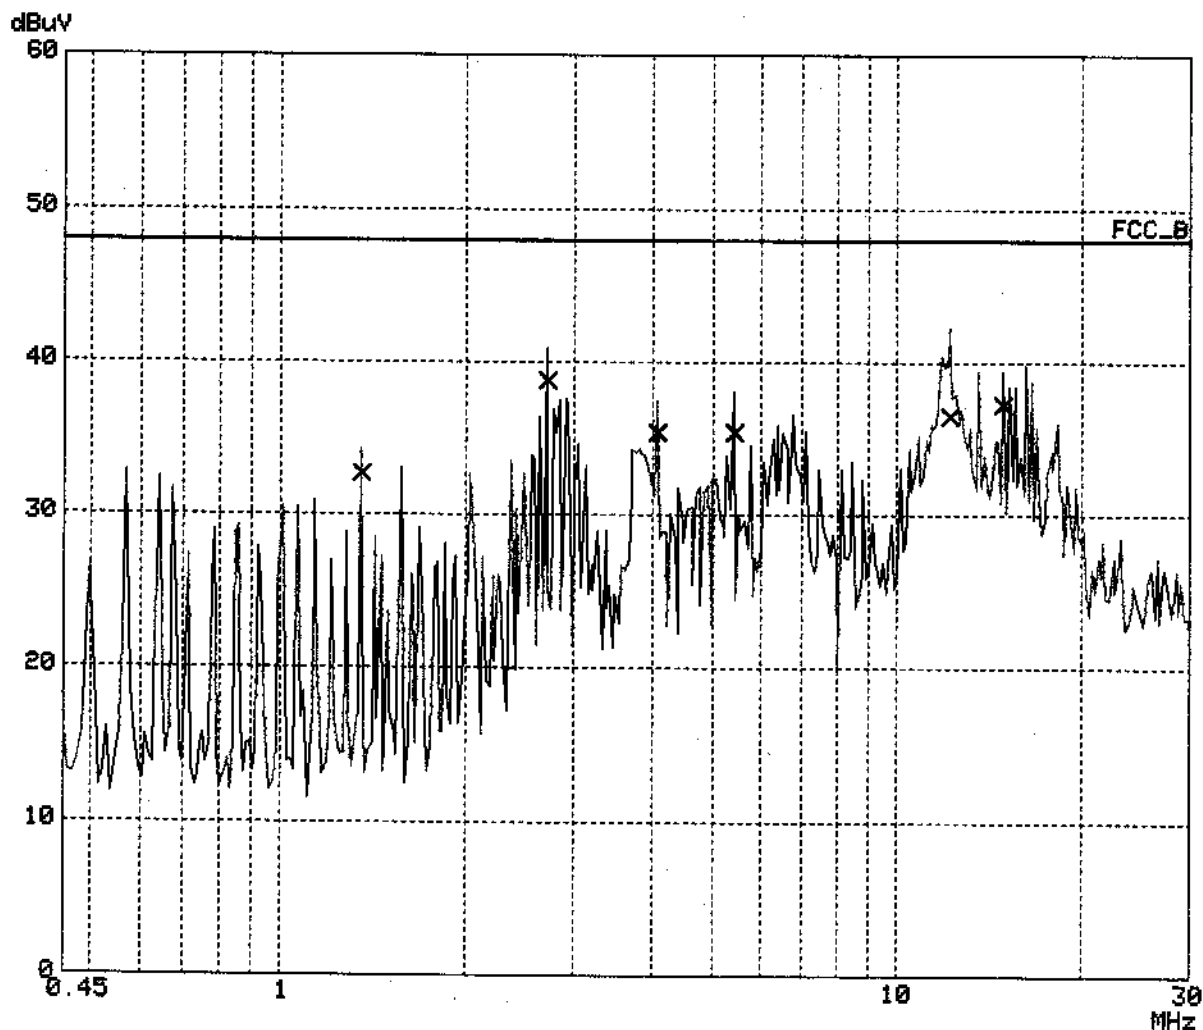

Intertek Testing Services


RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-L
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24°C 55%RH tx at 5805MHz
Date: 02. Sep 02 18:41

Scan Settings (1 Range)

----- Frequencies -----			----- Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

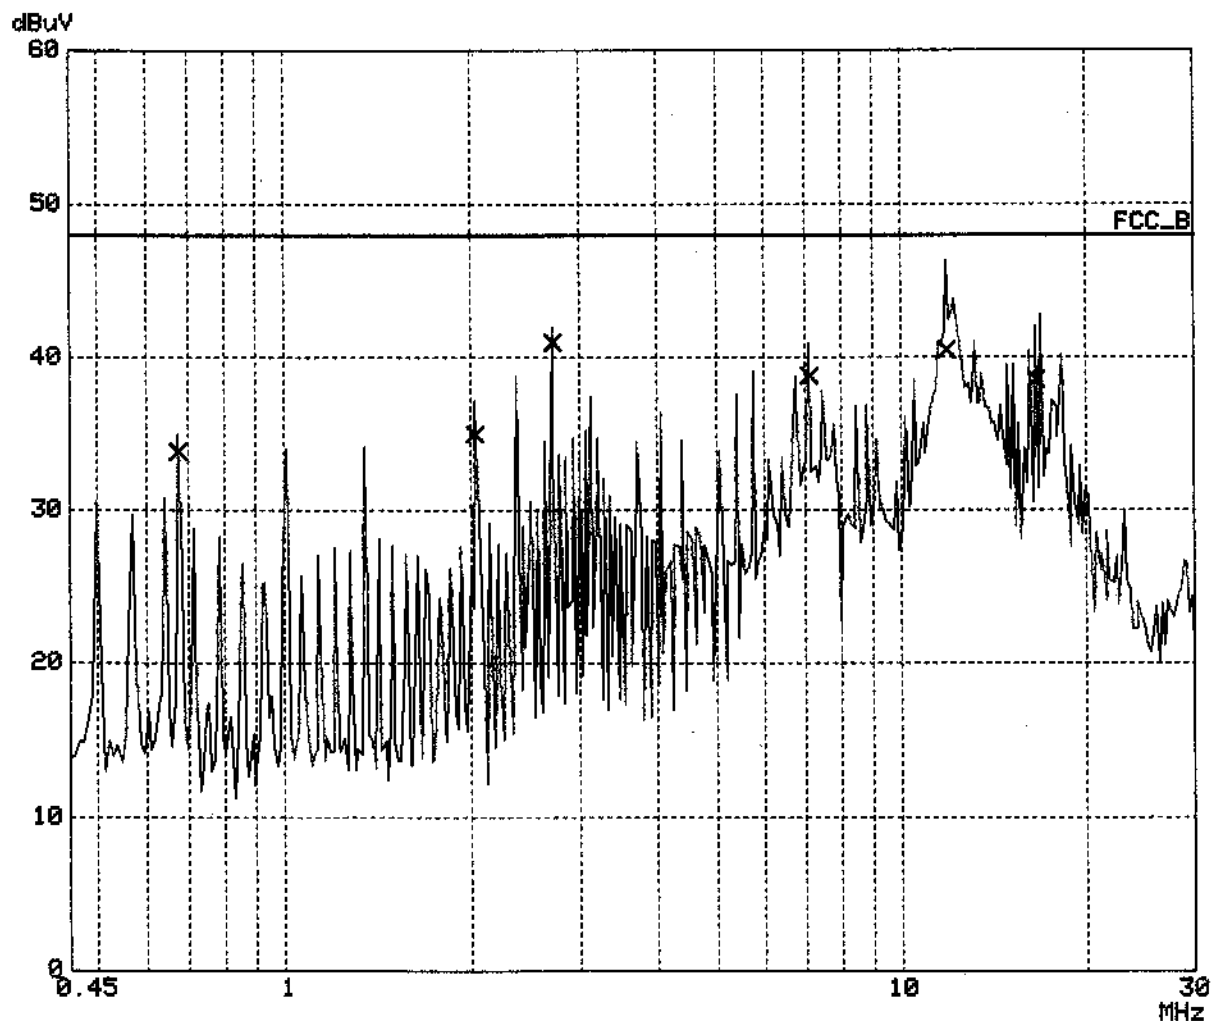

Intertek Testing Services


RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-N
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24'C 55%RH tx at 5805MHz
Date: 02. Sep 02 18:49

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

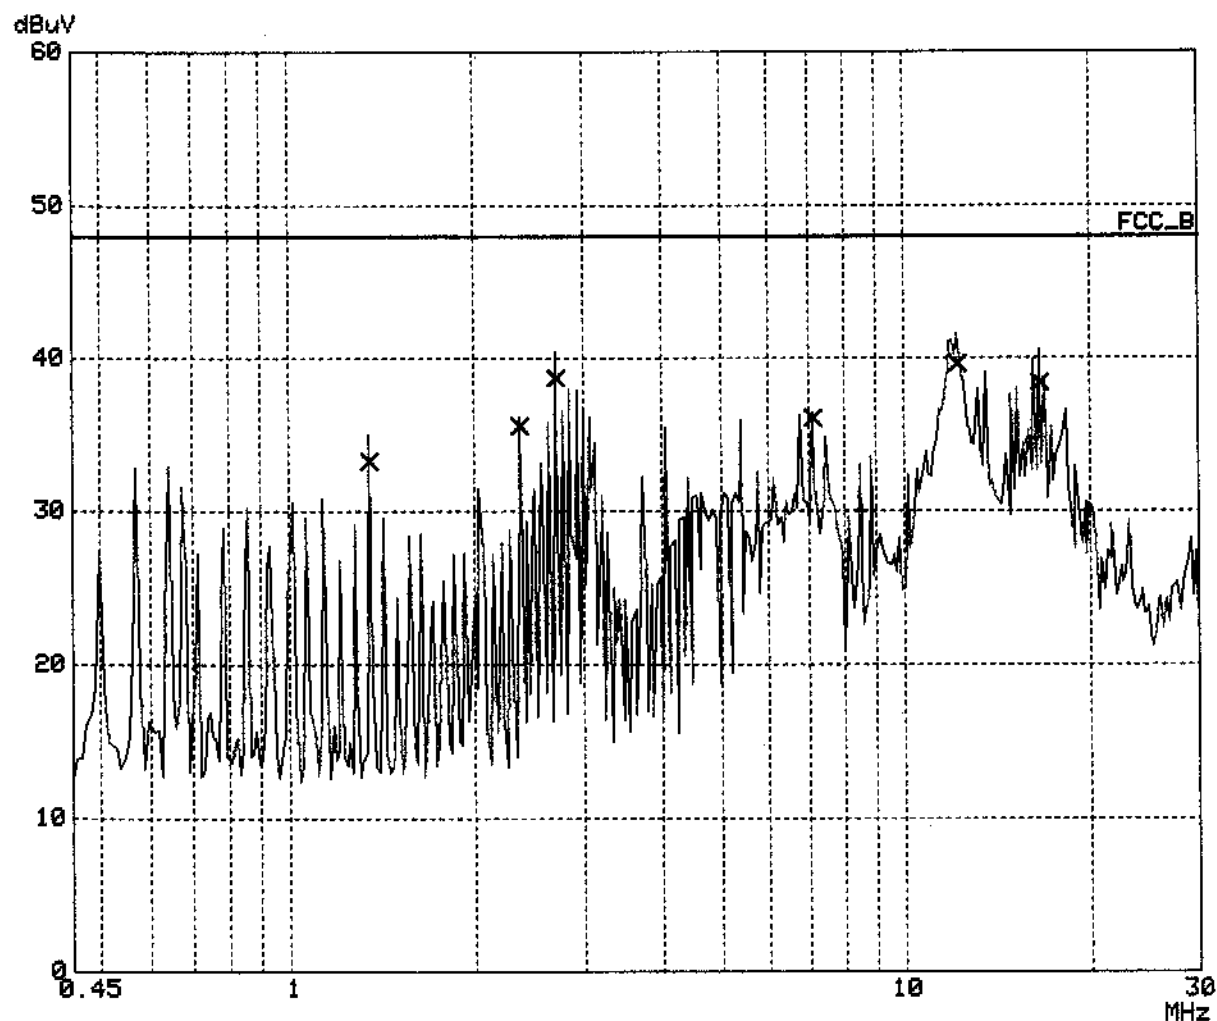

Intertek Testing Services


RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-L
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24°C 55%RH tx at 5210MHz
Date: 02. Sep 02 19:37

Scan Settings (1 Range)

----- Frequencies -----			----- Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

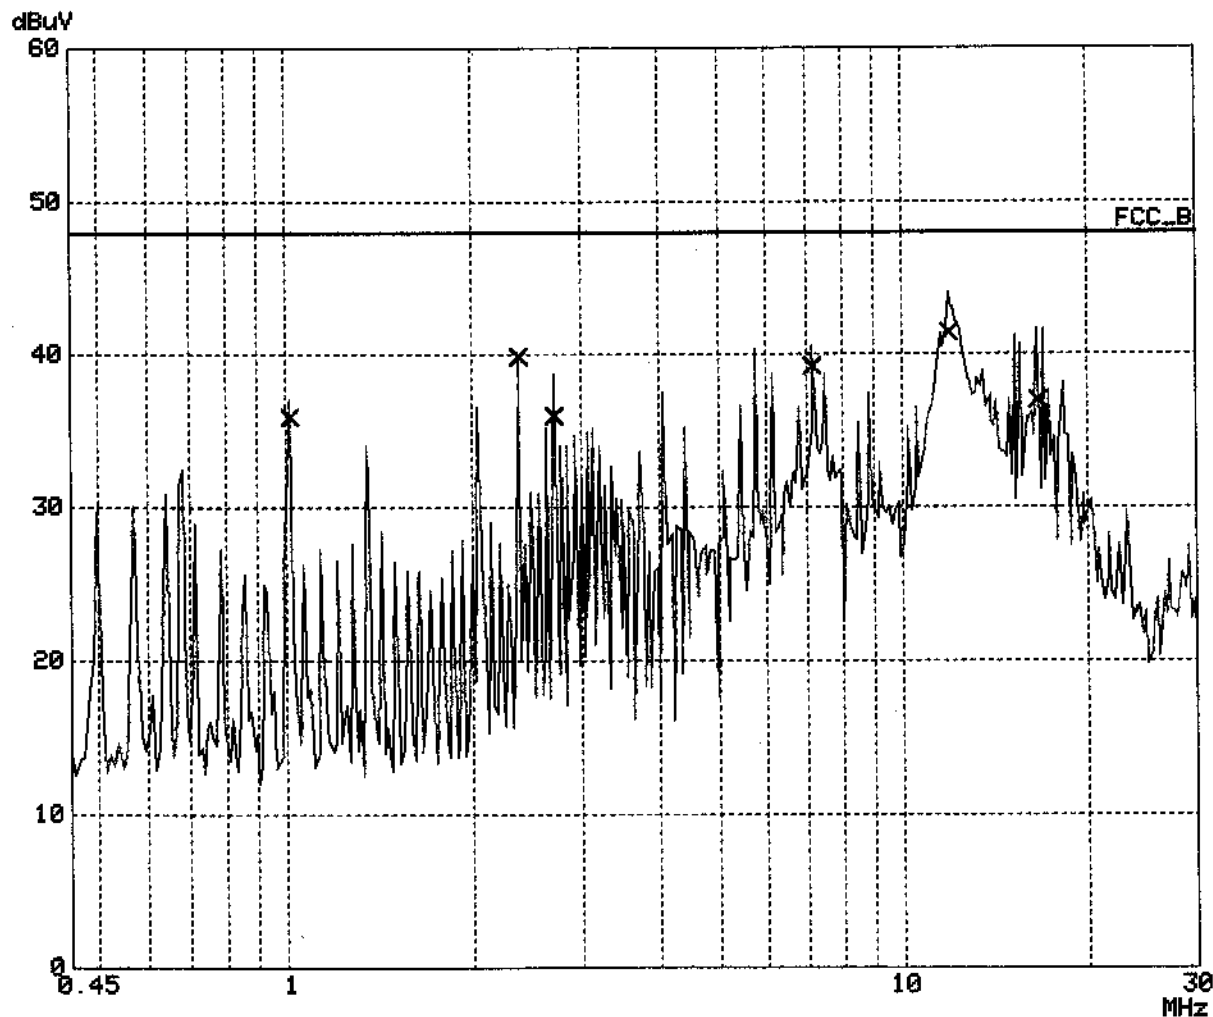

Intertek Testing Services


RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-N
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24°C 55%RH tx at 5210MHz
Date: 02. Sep 02 19:31

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

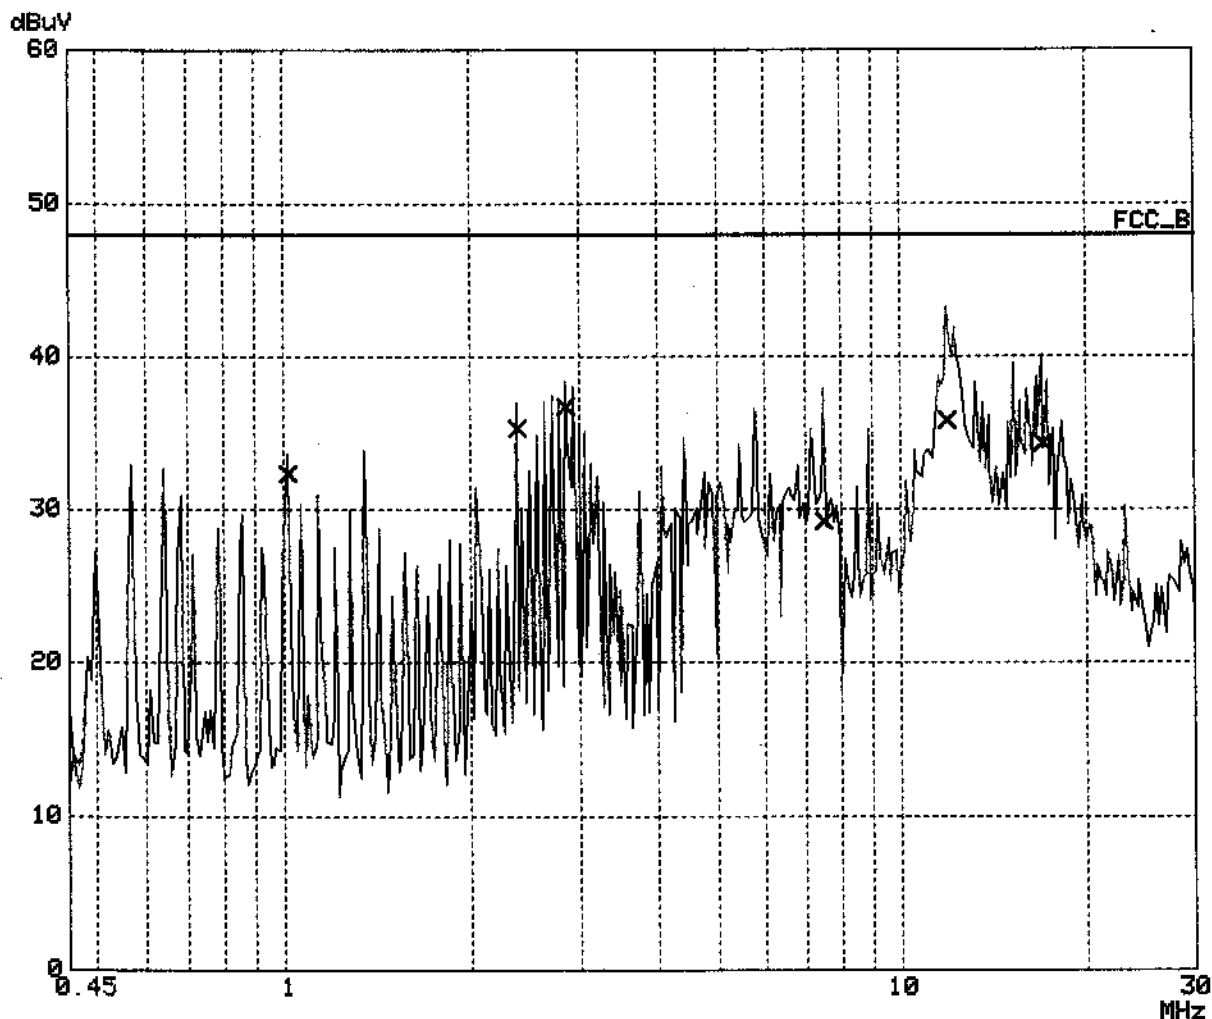

Intertek Testing Services


RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-L
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24°C 55%RH tx at 5290MHz
Date: 02. Sep 02 19:17

Scan Settings (1 Range)

----- Frequencies -----			----- Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

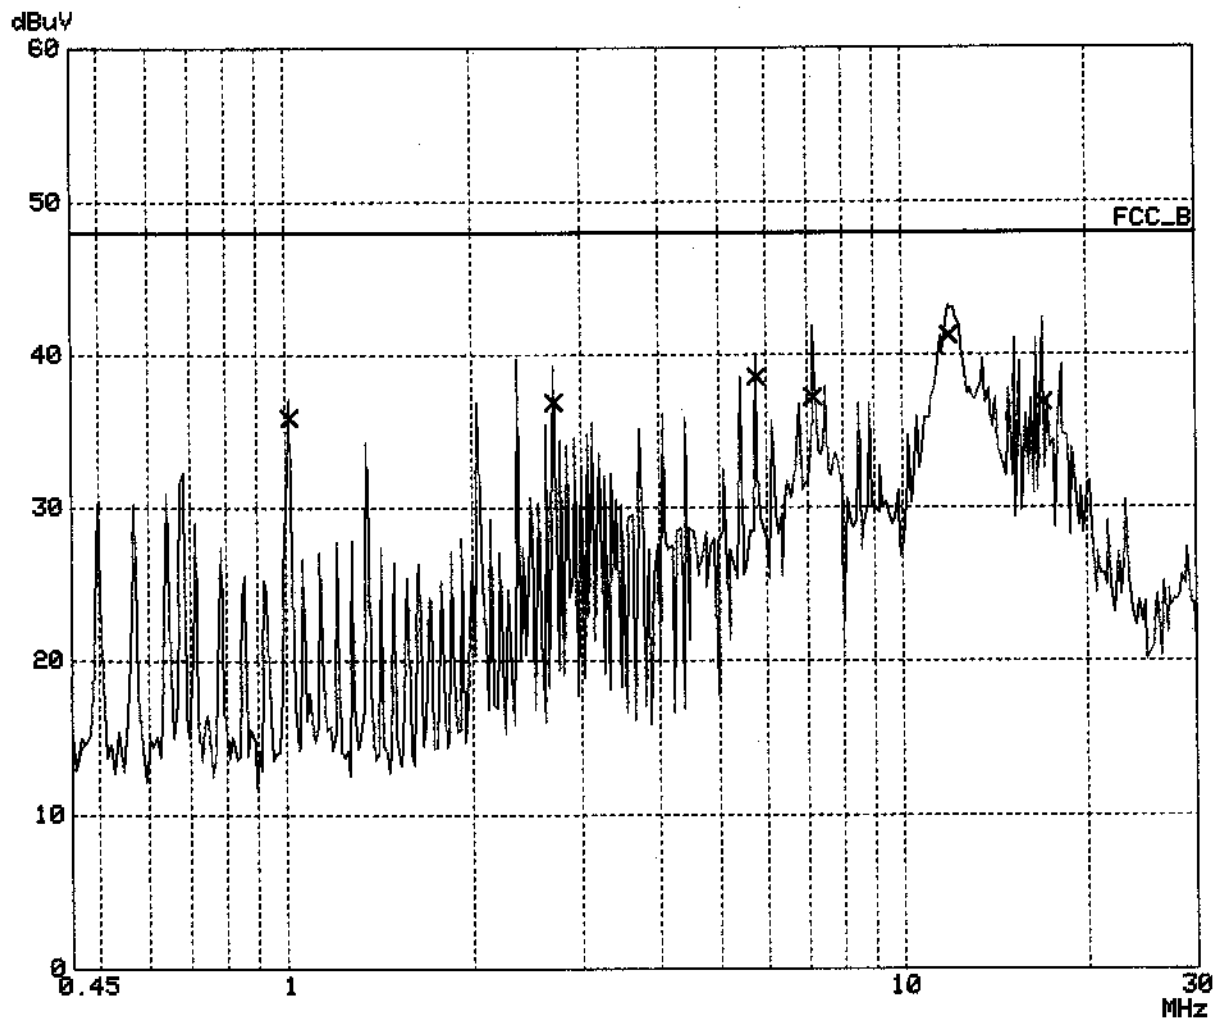

Intertek Testing Services


RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-N
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24'C 55%RH tx at 5290MHz
Date: 02. Sep 02 19:24

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

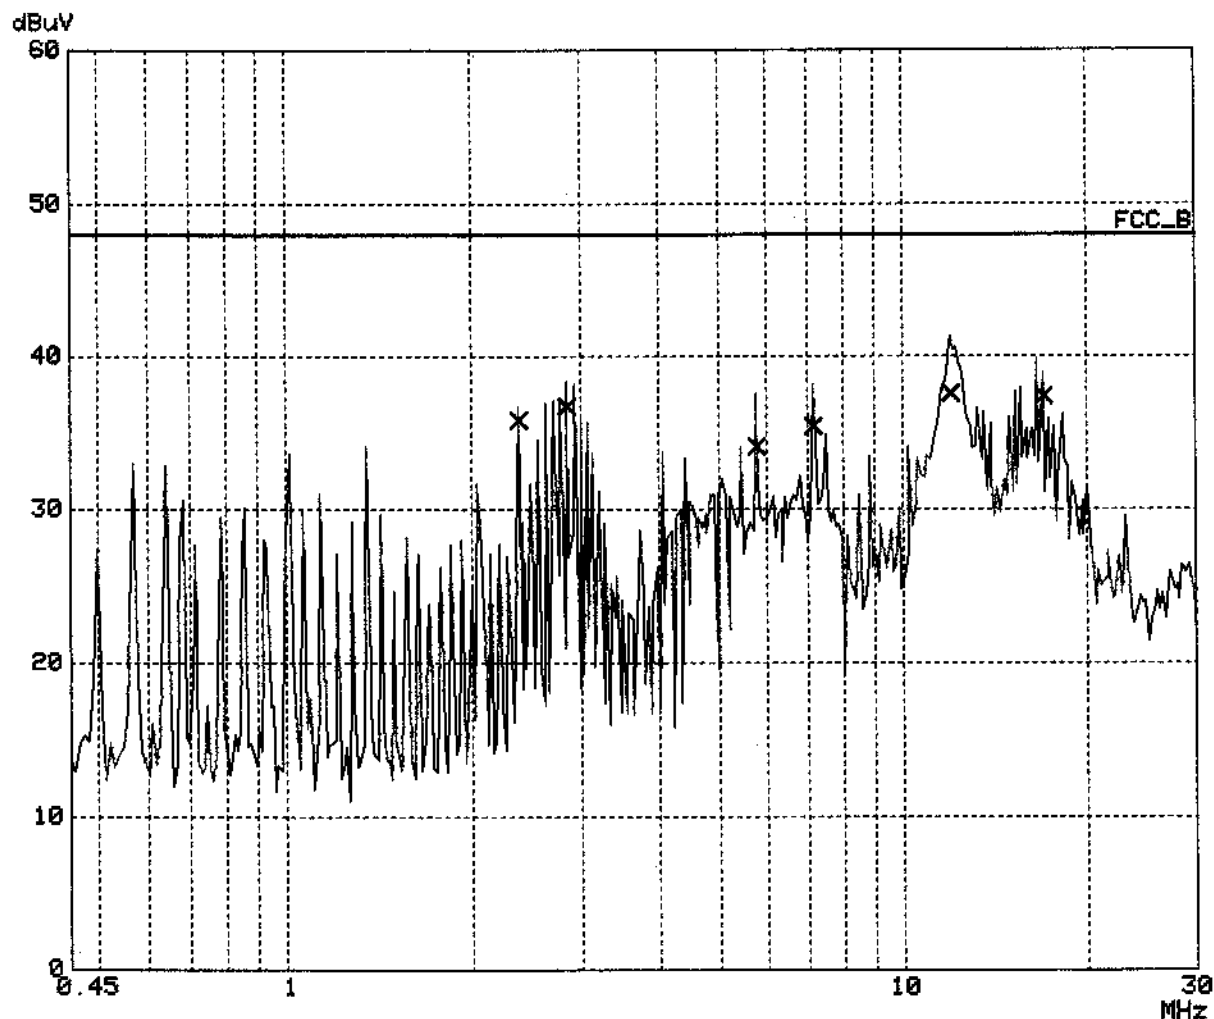

Intertek Testing Services


RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-L
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCY:825788/015
120V 60Hz 24°C 55%RH tx at 5800MHz
Date: 02. Sep 02 19:07

Scan Settings (1 Range)

----- Frequencies -----			----- Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO LN	OFF

Final Measurement: x QP
Meas Time: 1 s

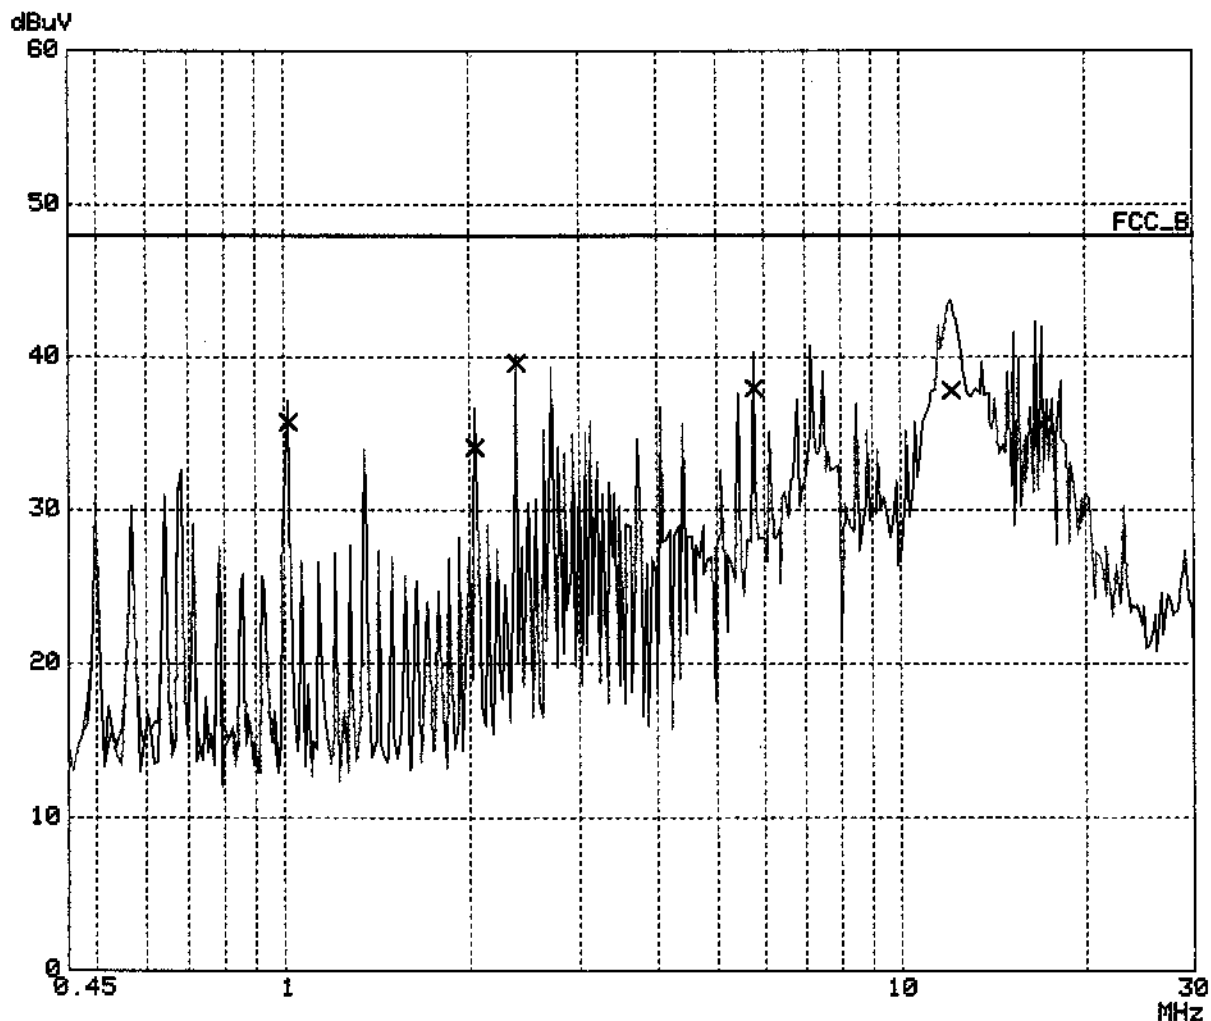

Intertek Testing Services

RF VOLTAGE

EUT: WAB102
Manuf: NETGEAR
Op Cond: LISN-N
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 24'C 55%RH tx at 5800MHz
Date: 02. Sep 02 18:56

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

