


EUT : WGR613VAL
 Power : AC 110V
 Test Mode : 802.11g CH L0
 Memo : DV-151A-I

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 58 %

Data: 176

Level (dBuV)

Date: 2005-01-27

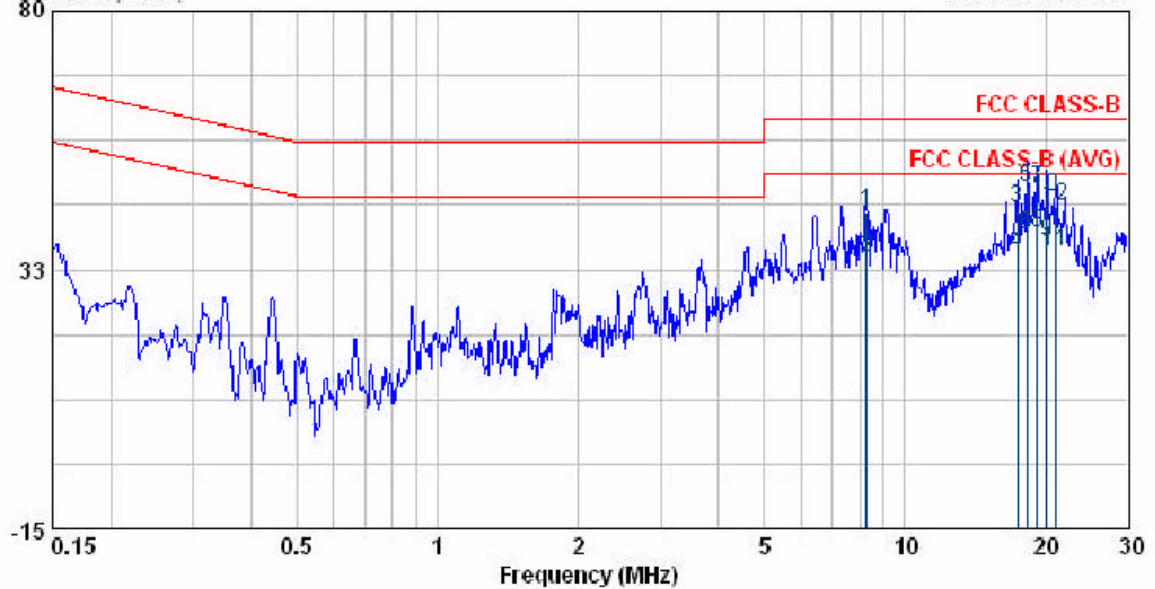

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
8.266	42.48	0.50	42.98	60.00	-17.02	QP
8.266	34.35	0.50	34.85	50.00	-15.15	AVERAGE
17.381	42.98	0.75	43.73	60.00	-16.27	QP
17.381	34.63	0.75	35.38	50.00	-14.62	AVERAGE
18.265	46.82	0.73	47.55	60.00	-12.45	QP
18.265	38.29	0.73	39.02	50.00	-10.98	AVERAGE
19.186	46.70	0.71	47.41	60.00	-12.59	QP
19.186	38.58	0.71	39.29	50.00	-10.71	AVERAGE
20.122	36.79	0.70	37.49	50.00	-12.51	AVERAGE
20.122	45.15	0.70	45.85	60.00	-14.15	QP
20.987	35.17	0.72	35.89	50.00	-14.11	AVERAGE
20.987	43.40	0.72	44.12	60.00	-15.88	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(15N) Factor + Cable Loss


EUT : WGR613VAL
 Power : AC 110V
 Test Mode : 802.11g CH L0
 Memo : DV-151A-1

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 58 %

Data: 175

Level (dBuV)

Date: 2005-01-27

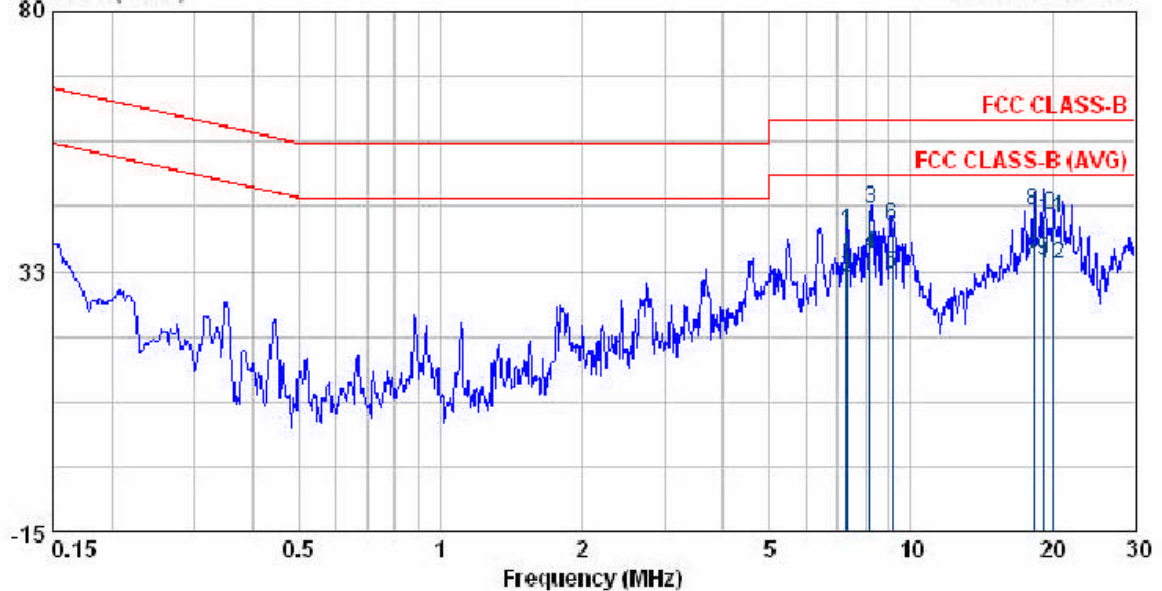

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
7.340	39.07	0.43	39.50	60.00	-20.50	QP
7.340	30.73	0.43	31.16	50.00	-18.84	AVERAGE
8.203	43.48	0.42	43.90	60.00	-16.10	QP
8.203	34.98	0.42	35.40	50.00	-14.60	AVERAGE
9.136	31.60	0.41	32.01	50.00	-17.99	AVERAGE
9.136	40.32	0.41	40.73	60.00	-19.27	QP
18.272	33.85	0.73	34.58	50.00	-15.42	AVERAGE
18.272	42.70	0.73	43.43	60.00	-16.57	QP
19.170	33.73	0.71	34.44	50.00	-15.56	AVERAGE
19.170	41.97	0.71	42.68	60.00	-17.32	QP
20.074	41.49	0.71	42.20	60.00	-17.80	QP
20.074	33.18	0.71	33.89	50.00	-16.11	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(15N) Factor + Cable Loss


EUT : WGR613VAL
 Power : AC 110V
 Test Mode : 802.11g CH MID
 Memo : DV-151A-I

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 58 %

Data: 173

Level (dBuV)

Date: 2005-01-27

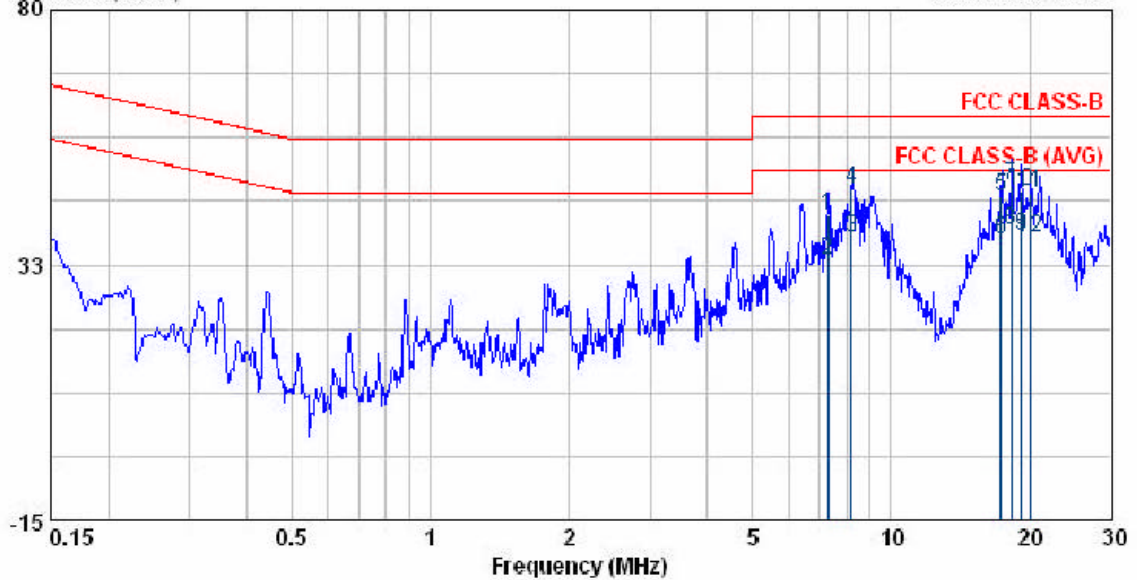

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
7.301	41.05	0.50	41.55	60.00	-18.45	QP
7.301	32.77	0.50	33.27	50.00	-16.73	AVERAGE
8.207	37.20	0.50	37.70	50.00	-12.30	AVERAGE
8.207	45.93	0.50	46.43	60.00	-13.57	QP
17.345	44.60	0.75	45.35	60.00	-14.65	QP
17.345	36.31	0.75	37.06	50.00	-12.94	AVERAGE
18.277	46.72	0.73	47.45	60.00	-12.55	QP
18.277	38.29	0.73	39.02	50.00	-10.98	AVERAGE
19.215	37.12	0.71	37.83	50.00	-12.17	AVERAGE
19.215	45.58	0.71	46.29	60.00	-13.71	QP
20.078	45.22	0.70	45.92	60.00	-14.08	QP
20.078	36.86	0.70	37.56	50.00	-12.44	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(15N) Factor + Cable Loss


EUT : WGR613VAL
 Power : AC 110V
 Test Mode : 802.11g CH MID
 Memo : DV-151A-I

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 58 %

Data: 174

Level (dBuV)

Date: 2005-01-27

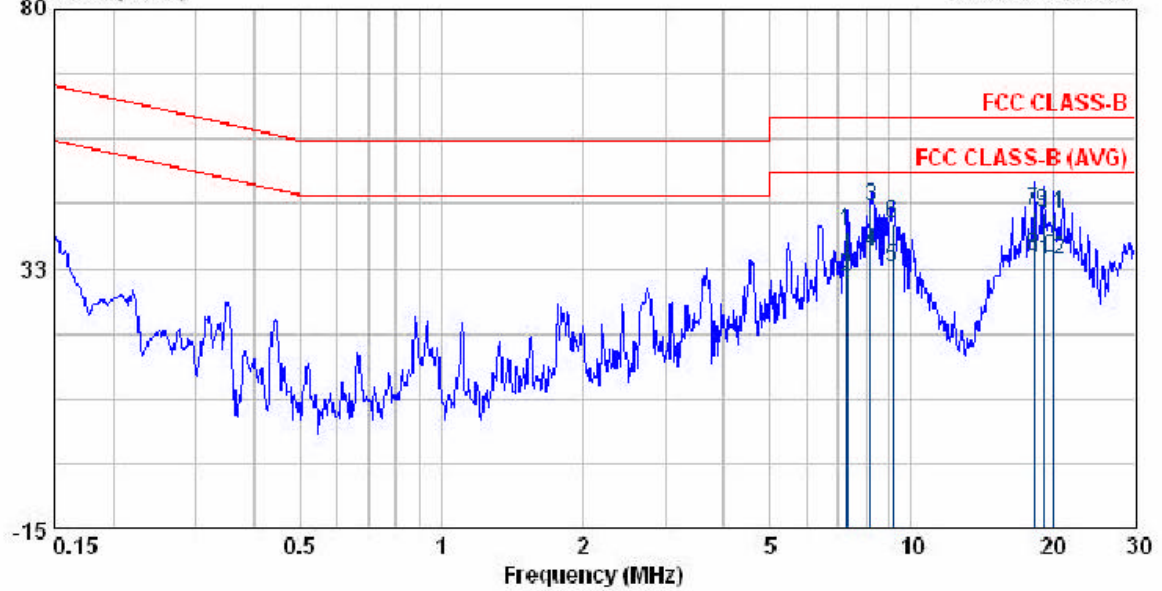

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
7.316	38.91	0.43	39.34	60.00	-20.66	QP
7.316	30.47	0.43	30.90	50.00	-19.10	AVERAGE
8.206	43.41	0.42	43.83	60.00	-16.17	QP
8.206	34.90	0.42	35.32	50.00	-14.68	AVERAGE
9.139	32.17	0.41	32.58	50.00	-17.42	AVERAGE
9.139	40.38	0.41	40.79	60.00	-19.21	QP
18.278	42.53	0.73	43.26	60.00	-16.74	QP
18.278	34.04	0.73	34.77	50.00	-15.23	AVERAGE
19.146	41.98	0.72	42.70	60.00	-17.30	QP
19.146	33.64	0.72	34.36	50.00	-15.64	AVERAGE
20.076	41.69	0.71	42.40	60.00	-17.60	QP
20.076	33.23	0.71	33.94	50.00	-16.06	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(15N) Factor + Cable Loss


EUT : WGR613VAL
 Power : AC 110V
 Test Mode : 802.11g CH HI
 Memo : DV-151A-1

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 58 %

Data: 172

Level (dBuV)

Date: 2005-01-27

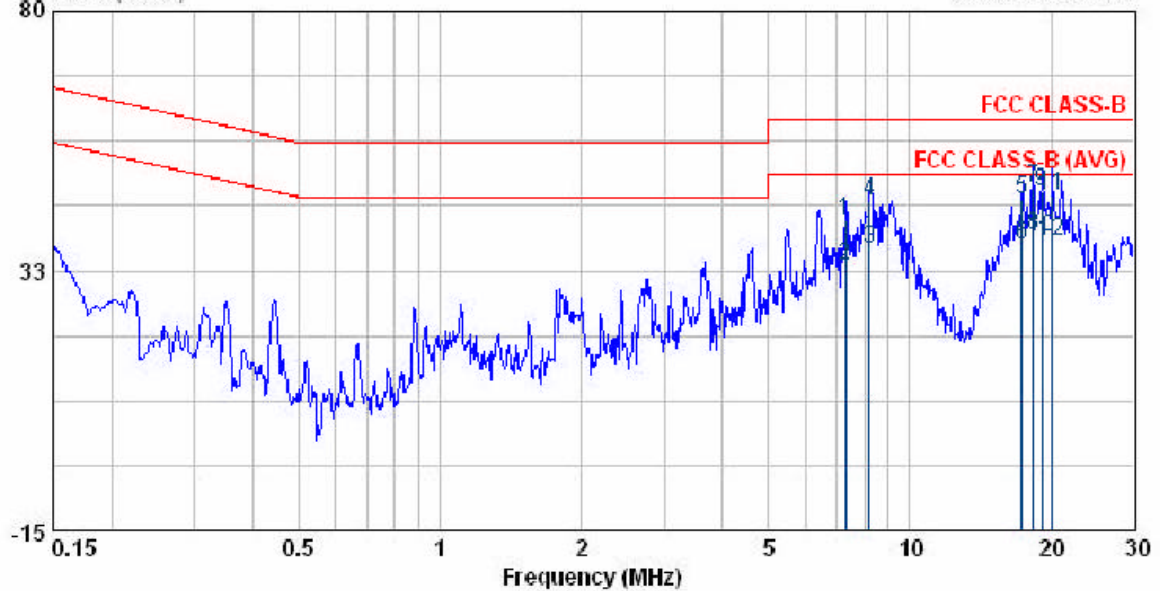

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
7.302	41.24	0.50	41.74	60.00	-18.26	QP
7.302	32.84	0.50	33.34	50.00	-16.66	AVERAGE
8.220	36.15	0.50	36.65	50.00	-13.35	AVERAGE
8.220	44.66	0.50	45.16	60.00	-14.84	QP
17.350	44.90	0.75	45.65	60.00	-14.35	QP
17.350	36.37	0.75	37.12	50.00	-12.88	AVERAGE
18.283	46.85	0.73	47.58	60.00	-12.42	QP
18.283	38.38	0.73	39.11	50.00	-10.89	AVERAGE
19.151	46.29	0.72	47.01	60.00	-12.99	QP
19.151	37.72	0.72	38.44	50.00	-11.56	AVERAGE
20.083	45.41	0.70	46.11	60.00	-13.89	QP
20.083	37.13	0.70	37.83	50.00	-12.17	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(15N) Factor + Cable Loss


EUT : WGR613VAL
 Power : AC 110V
 Test Mode : 802.11g CH HI
 Memo : DV-151A-1

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 58 %

Data: 171

Level (dBuV)

Date: 2005-01-27

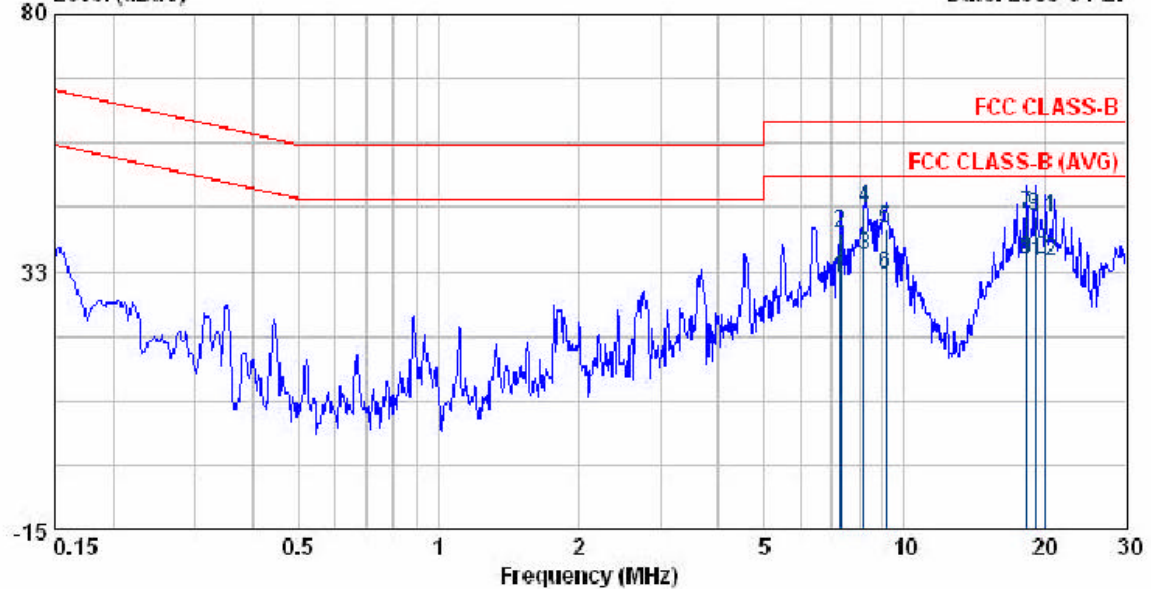

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
7.311	30.79	0.43	31.22	50.00	-18.78	AVERAGE
7.311	39.05	0.43	39.48	60.00	-20.52	QP
8.208	35.19	0.42	35.61	50.00	-14.39	AVERAGE
8.208	43.77	0.42	44.19	60.00	-15.81	QP
9.147	39.97	0.41	40.38	60.00	-19.62	QP
9.147	31.73	0.41	32.14	50.00	-17.86	AVERAGE
18.289	42.45	0.73	43.18	60.00	-16.82	QP
18.289	34.04	0.73	34.77	50.00	-15.23	AVERAGE
19.154	42.14	0.72	42.86	60.00	-17.14	QP
19.154	33.95	0.72	34.67	50.00	-15.33	AVERAGE
20.088	41.79	0.71	42.50	60.00	-17.50	QP
20.088	33.57	0.71	34.28	50.00	-15.72	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

Test mode 3: Adaptor Model: 481212003CT


EUT : WGR613VAL
 Power : AC 110V
 Test Mode : 802.11b CH L0
 Memo : 481212003CT

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 58 %

Data: 169

Level (dBuV)

Date: 2005-01-28

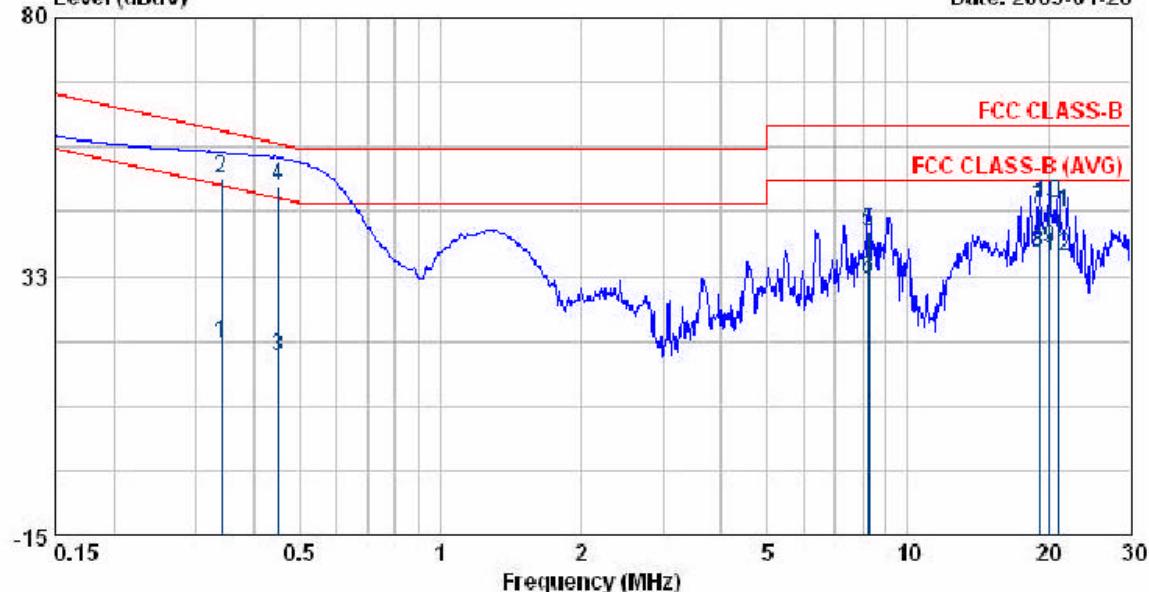

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.341	19.55	0.43	19.98	49.17	-29.19	AVERAGE
0.341	49.87	0.43	50.30	59.17	-8.87	QP
0.452	17.20	0.49	17.69	46.85	-29.16	AVERAGE
0.452	48.38	0.49	48.87	56.85	-7.98	QP
8.237	40.25	0.50	40.75	60.00	-19.25	QP
8.237	31.61	0.50	32.11	50.00	-17.89	AVERAGE
19.156	44.23	0.71	44.94	60.00	-15.06	QP
19.156	36.16	0.71	36.87	50.00	-13.13	AVERAGE
20.092	36.95	0.70	37.65	50.00	-12.35	AVERAGE
20.092	45.15	0.70	45.85	60.00	-14.15	QP
21.027	43.55	0.72	44.27	60.00	-15.73	QP
21.027	35.42	0.72	36.14	50.00	-13.86	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss


EUT : WGR613VAL
 Power : AC 110V
 Test Mode : 802.11b CH L0
 Memo : 481212003CT

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 58 %

Data: 170

Level (dBuV)

Date: 2005-01-28

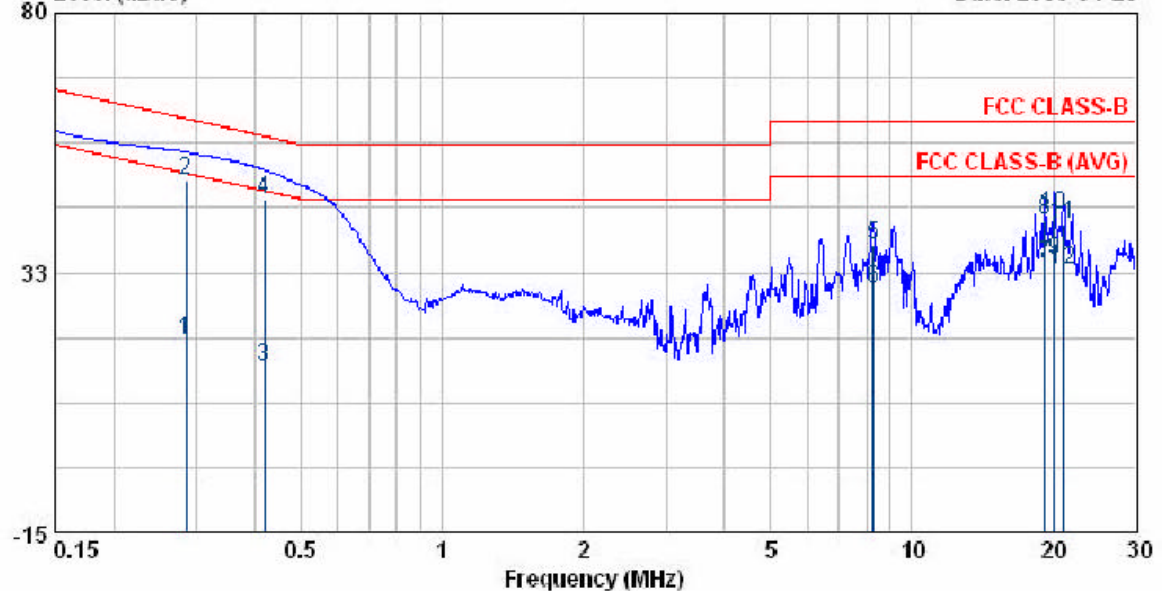

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.285	19.90	0.35	20.25	50.68	-30.43	AVERAGE
0.285	48.90	0.35	49.25	60.68	-11.43	QP
0.418	14.73	0.50	15.23	47.48	-32.26	AVERAGE
0.418	45.31	0.50	45.81	57.48	-11.68	QP
8.281	37.02	0.42	37.44	60.00	-22.56	QP
8.281	28.95	0.42	29.37	50.00	-20.63	AVERAGE
19.158	33.18	0.71	33.89	50.00	-16.11	AVERAGE
19.158	41.40	0.71	42.11	60.00	-17.89	QP
20.094	33.88	0.71	34.59	50.00	-15.41	AVERAGE
20.094	42.33	0.71	43.04	60.00	-16.96	QP
21.013	40.53	0.79	41.32	60.00	-18.68	QP
21.013	32.29	0.79	33.08	50.00	-16.92	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss


EUT : WGR613VAL
 Power : AC 110V
 Test Mode : 802.11b CH MID
 Memo : 481212003CT

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 58 %

Data: 168

Level (dBuV)

Date: 2005-01-28

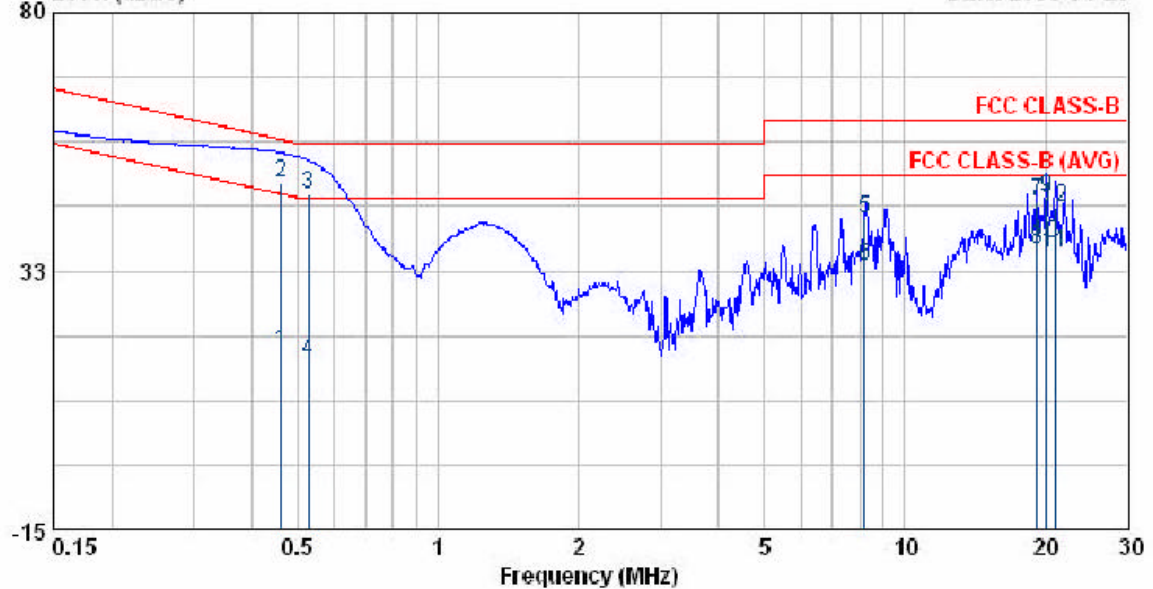

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.461	17.40	0.48	17.88	46.67	-28.79	AVERAGE
0.461	48.31	0.48	48.79	56.67	-7.88	QP
0.529	46.25	0.47	46.72	56.00	-9.28	QP
0.529	15.40	0.47	15.87	46.00	-30.13	AVERAGE
8.214	41.49	0.50	41.99	60.00	-18.01	QP
8.214	32.83	0.50	33.33	50.00	-16.67	AVERAGE
19.159	44.51	0.71	45.22	60.00	-14.78	QP
19.159	35.84	0.71	36.55	50.00	-13.45	AVERAGE
20.094	45.13	0.70	45.83	60.00	-14.17	QP
20.094	36.81	0.70	37.51	50.00	-12.49	AVERAGE
21.022	35.17	0.72	35.89	50.00	-14.11	AVERAGE
21.022	43.45	0.72	44.17	60.00	-15.83	QP

Remarks: 1. Level = Read Level + Factor

2. Factor = LISN(1SN) Factor + Cable Loss