

**#01\_GSM850\_GPRS (4 Tx slots)\_Left Cheek\_Ch128**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: HSL\_850\_190222 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.861$  S/m;  $\epsilon_r = 43.294$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(6.39, 6.39, 6.39) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x131x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.191 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 15.39 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.240 W/kg

**SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.136 W/kg**

Maximum value of SAR (measured) = 0.197 W/kg

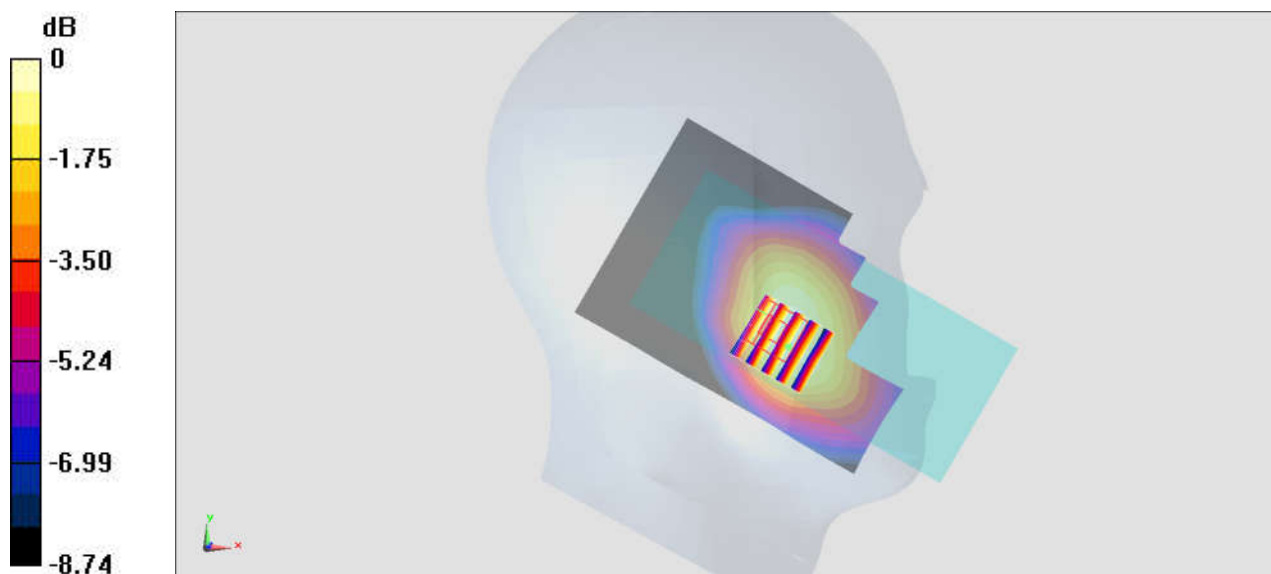

0 dB = 0.197 W/kg = -7.06 dBW/kg

**#02\_GSM1900\_GPRS (4 Tx slots)\_Right Cheek\_Ch810**

Communication System: PCS ; Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium: HSL\_1900\_190221 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.448$  S/m;  $\epsilon_r = 39.191$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(5.27, 5.27, 5.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x131x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.0228 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 3.325 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0320 W/kg

**SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.011 W/kg**

Maximum value of SAR (measured) = 0.0222 W/kg

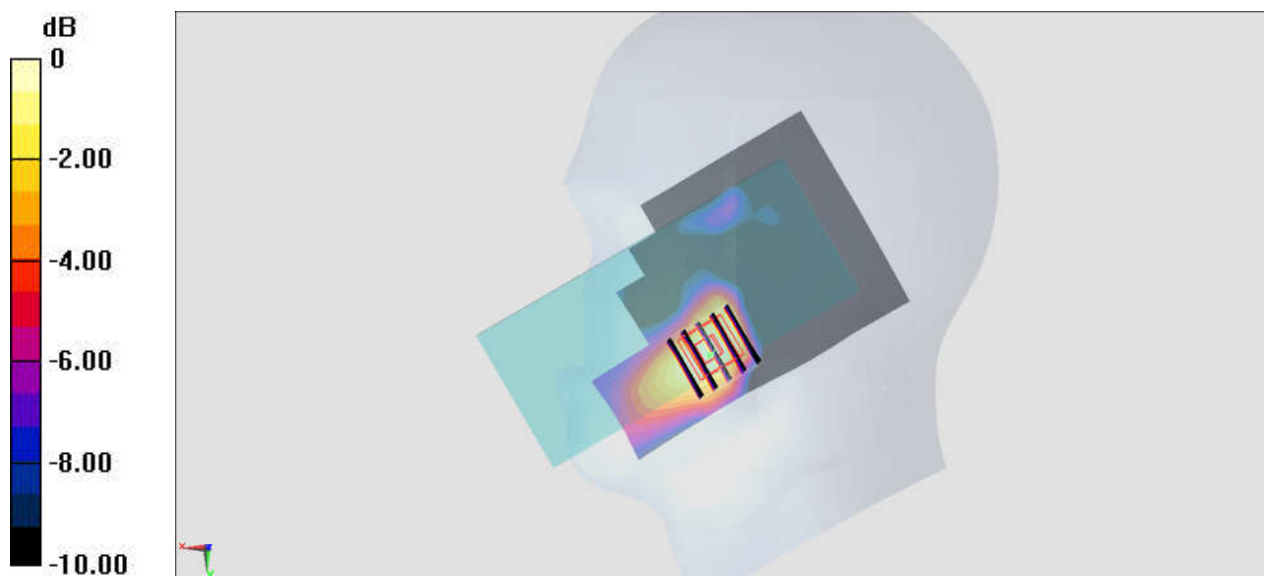

0 dB = 0.0222 W/kg = -16.54 dBW/kg

**#03\_WCDMA II\_RMC 12.2Kbps\_Left Cheek\_Ch9400**

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: HSL\_1900\_190221 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.419$  S/m;  $\epsilon_r = 39.344$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.27, 5.27, 5.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x101x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.0296 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 3.310 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0390 W/kg

**SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.0303 W/kg

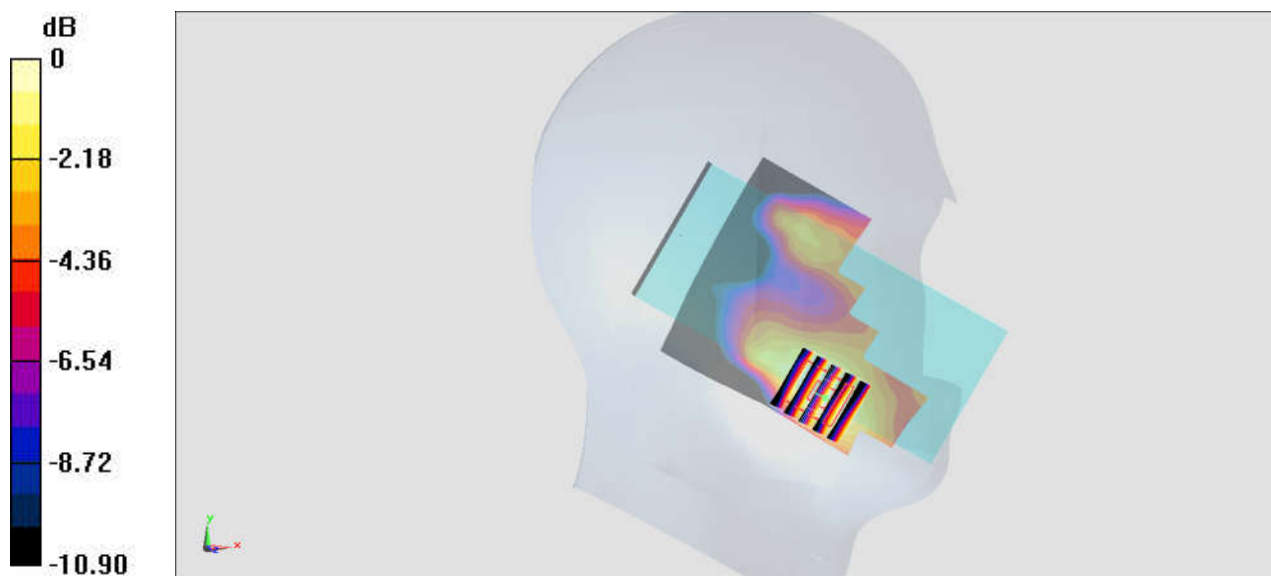

0 dB = 0.0303 W/kg = -15.19 dBW/kg

**#04\_WCDMA IV\_RMC 12.2Kbps\_Left Cheek\_Ch1513**

Communication System: WCDMA ; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL\_1750\_190221 Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.41$  S/m;  $\epsilon_r = 40.251$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(5.48, 5.48, 5.48) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x101x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.0337 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 3.652 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0360 W/kg

**SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.015 W/kg**

Maximum value of SAR (measured) = 0.0284 W/kg

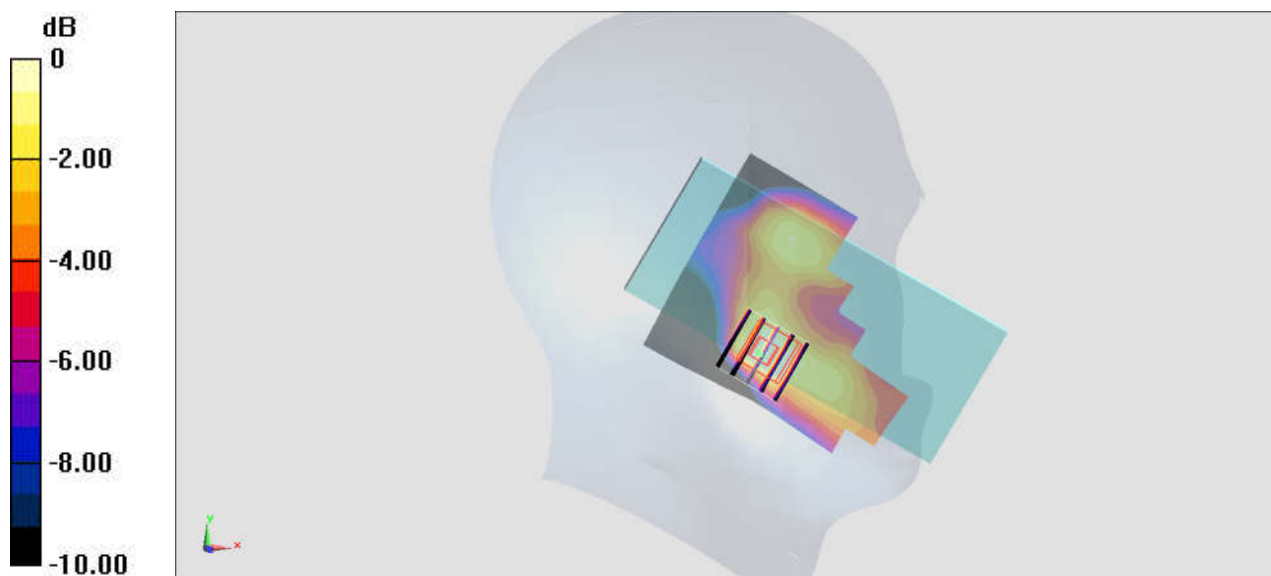

0 dB = 0.0284 W/kg = -15.47 dBW/kg

**#05\_WCDMA V\_RMC 12.2Kbps\_Left Cheek\_Ch4182**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_190222 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.872$  S/m;  $\epsilon_r = 43.148$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.39, 6.39, 6.39) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x131x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.327 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 19.80 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.395 W/kg

**SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.230 W/kg**

Maximum value of SAR (measured) = 0.334 W/kg

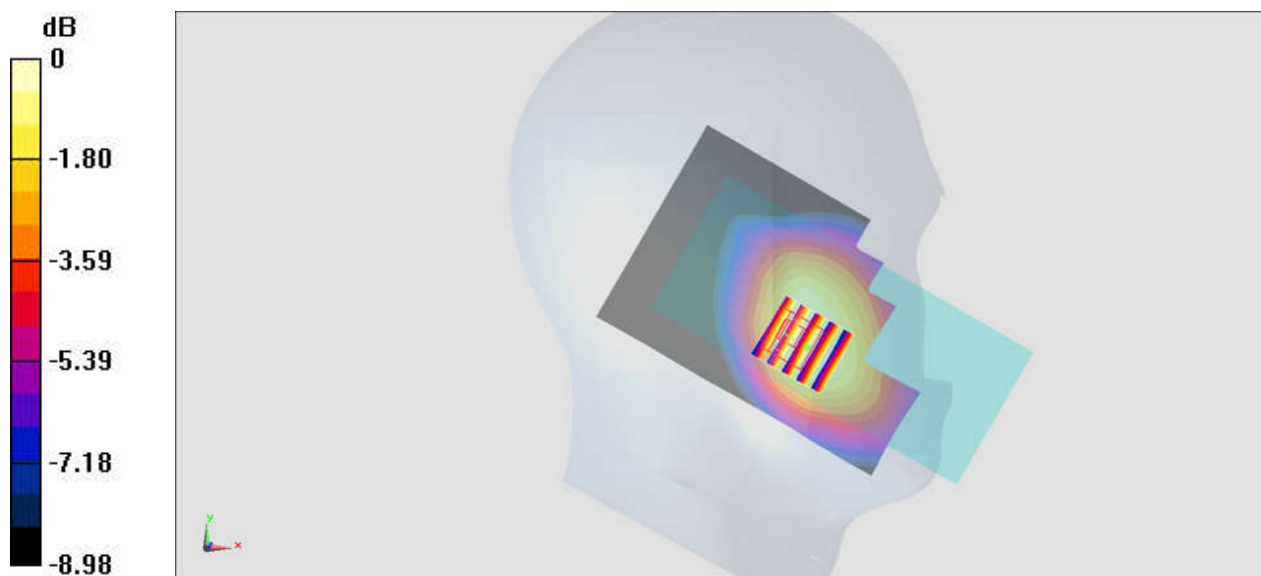

0 dB = 0.334 W/kg = -4.76 dBW/kg

**#06\_LTE Band 7\_20M\_QPSK\_1\_99\_Left Tilted\_Ch21100**

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL\_2600\_190222 Medium parameters used :  $f = 2535$  MHz;  $\sigma = 1.954$  S/m;  $\epsilon_r = 39.544$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(4.5, 4.5, 4.5) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x161x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0798 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.782 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.121 W/kg

**SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.0785 W/kg

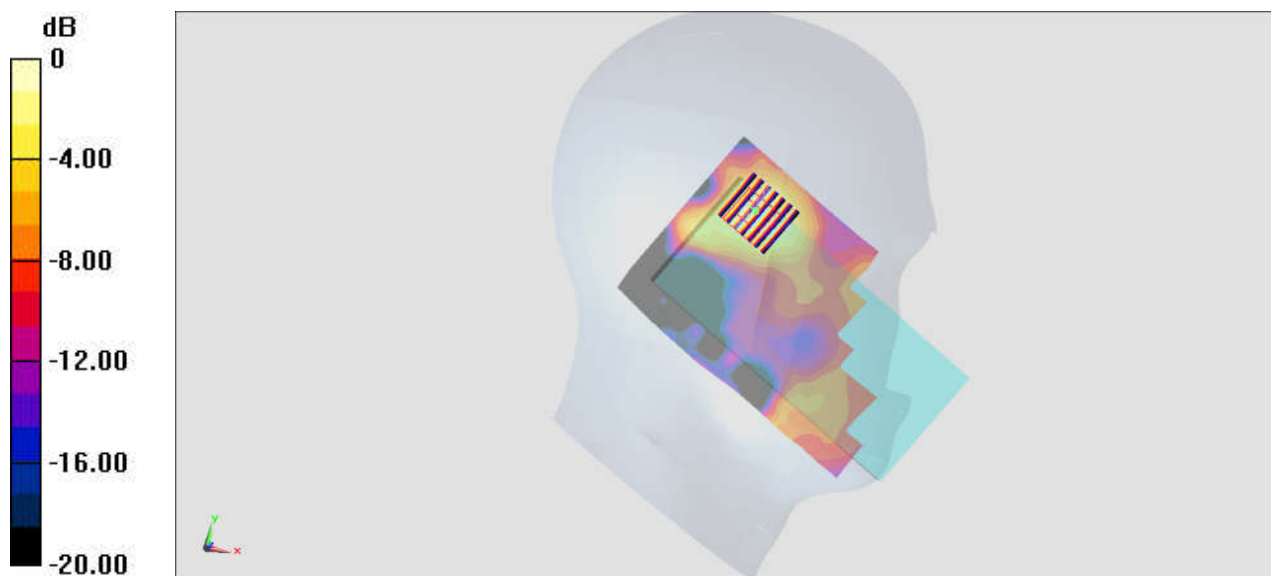

0 dB = 0.0785 W/kg = -11.05 dBW/kg

**#07\_LTE Band 12\_10M\_QPSK\_1\_49\_Left Cheek\_Ch23095**

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_190222 Medium parameters used :  $f = 707.5$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 43.495$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.56, 6.56, 6.56) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x131x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.274 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 18.74 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.314 W/kg

**SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.207 W/kg**

Maximum value of SAR (measured) = 0.280 W/kg

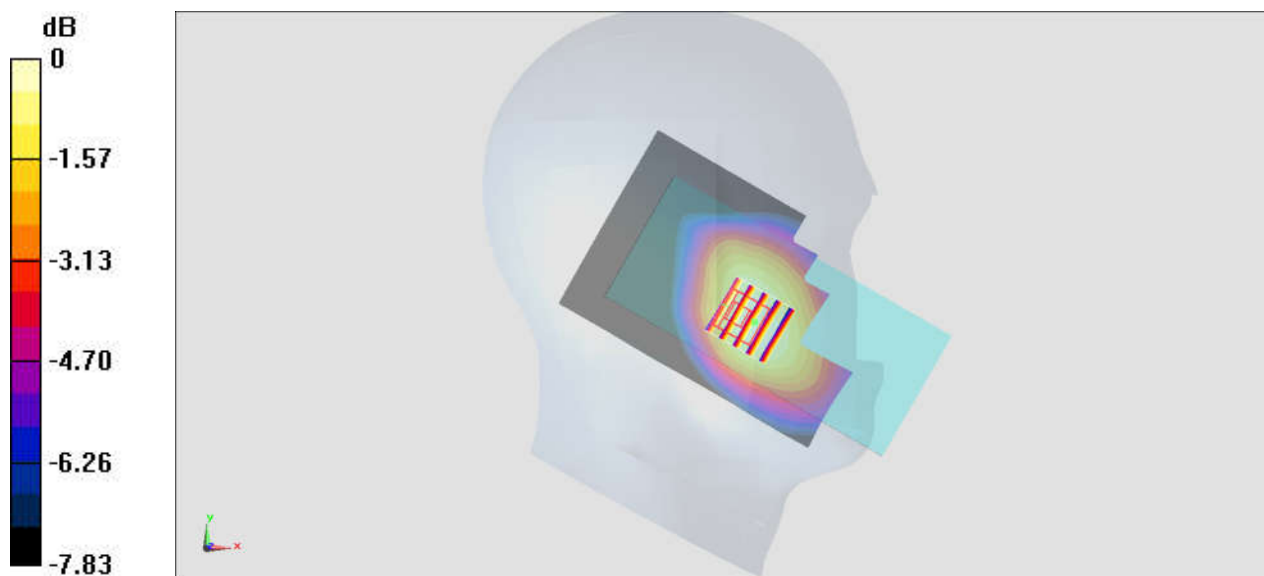

0 dB = 0.280 W/kg = -5.53 dBW/kg

**#08\_LTE Band 13\_10M\_QPSK\_1\_0\_Left Cheek\_Ch23230**

Communication System: LTE ; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_190222 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.925 \text{ S/m}$ ;  $\epsilon_r = 42.51$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.1 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.1 \text{ }^\circ\text{C}$

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(6.56, 6.56, 6.56) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x131x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.181 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $14.61 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$

Peak SAR (extrapolated) =  $0.220 \text{ W/kg}$

**SAR(1 g) =  $0.174 \text{ W/kg}$ ; SAR(10 g) =  $0.135 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.189 \text{ W/kg}$

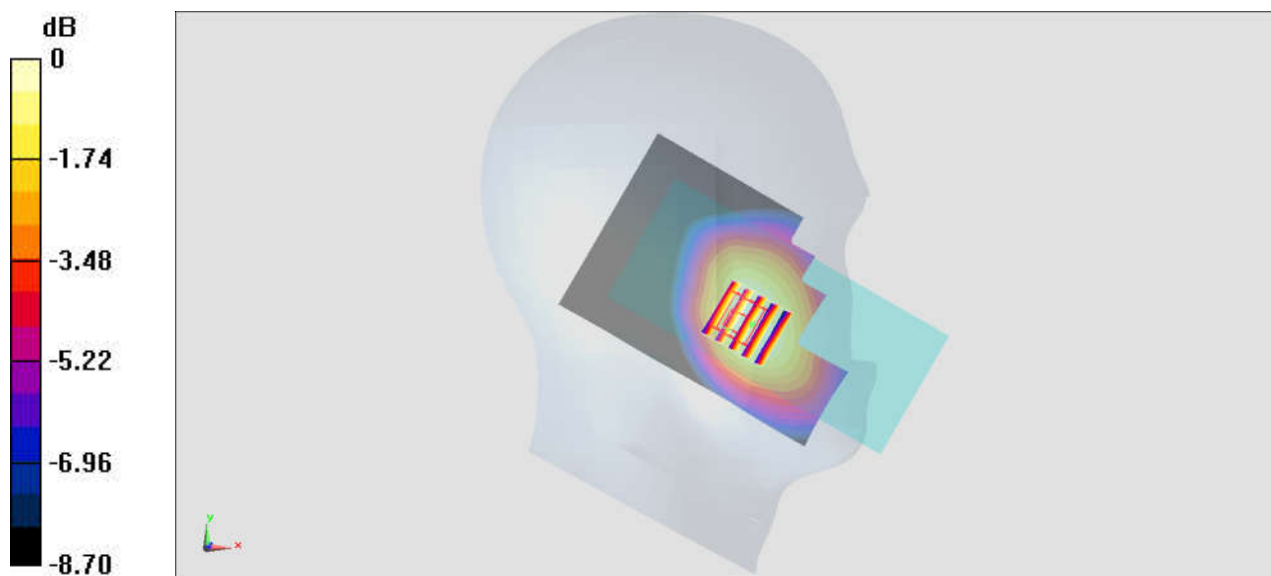

0 dB =  $0.189 \text{ W/kg}$  =  $-7.24 \text{ dBW/kg}$

**#09\_LTE Band 25\_20M\_QPSK\_1\_99\_Left Cheek\_Ch26590**

Communication System: LTE ; Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_190221 Medium parameters used :  $f = 1905$  MHz;  $\sigma = 1.443$  S/m;  $\epsilon_r = 39.216$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(5.27, 5.27, 5.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.0683 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 6.683 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0930 W/kg

**SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.039 W/kg**

Maximum value of SAR (measured) = 0.0694 W/kg

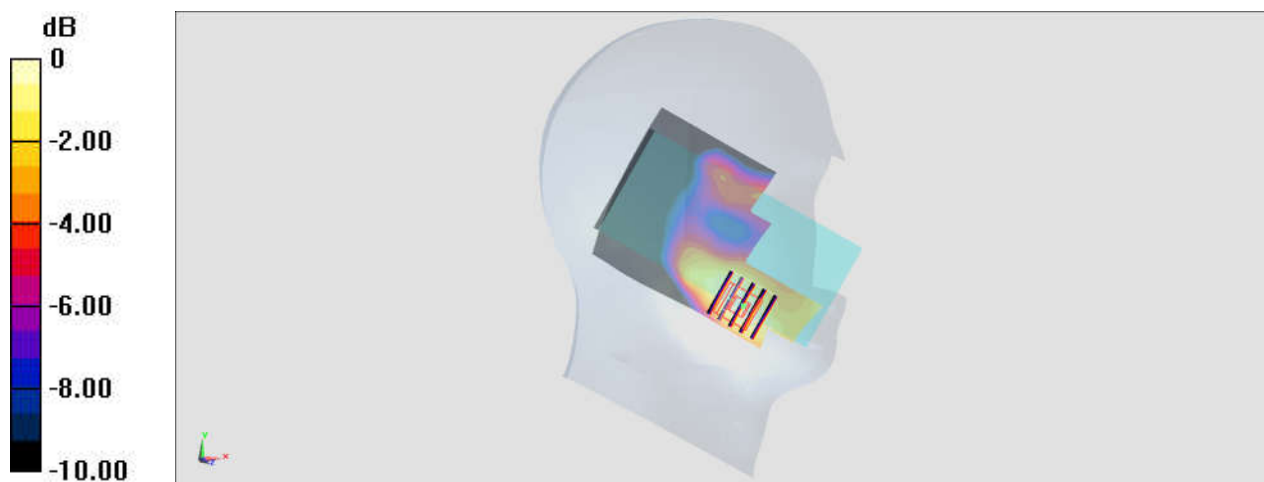

0 dB = 0.0694 W/kg = -11.59 dBW/kg

**#10\_LTE Band 26\_15M\_QPSK\_1\_0\_Left Cheek\_Ch26865**

Communication System: LTE ; Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium: HSL\_850\_190222 Medium parameters used :  $f = 831.5$  MHz;  $\sigma = 0.868$  S/m;  $\epsilon_r = 43.207$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.39, 6.39, 6.39) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x131x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.359 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 21.17 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.436 W/kg

**SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.260 W/kg**

Maximum value of SAR (measured) = 0.375 W/kg

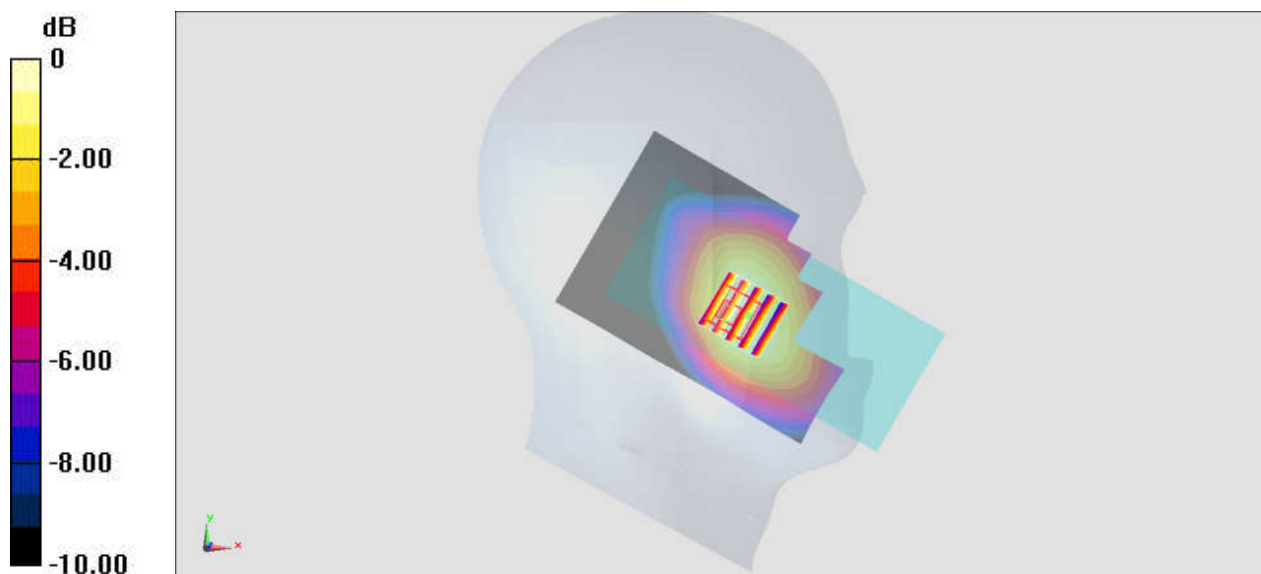

0 dB = 0.375 W/kg = -4.26 dBW/kg

**#11\_LTE Band 66\_20M\_QPSK\_1\_0\_Right Cheek\_Ch132072**

Communication System: LTE ; Frequency: 1720 MHz;Duty Cycle: 1:1

Medium: HSL\_1750\_190221 Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.378$  S/m;  $\epsilon_r = 40.376$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.48, 5.48, 5.48) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0177 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.295 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0160 W/kg

**SAR(1 g) = 0.0099 W/kg; SAR(10 g) = 0.00578 W/kg**

Maximum value of SAR (measured) = 0.0115 W/kg

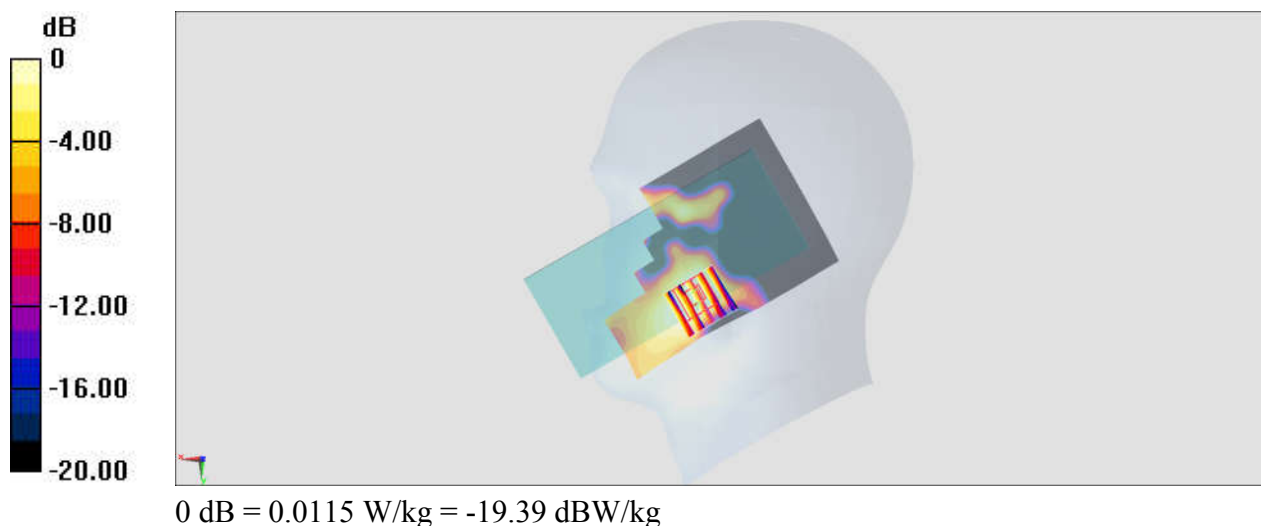

**#12\_LTE Band 41\_20M\_QPSK\_50\_0\_Left Cheek\_Ch41055**


Communication System: LTE; Frequency: 2636.5 MHz; Duty Cycle: 1:1.59  
Medium: HSL\_2600\_190222 Medium parameters used :  $f = 2636.5$  MHz;  $\sigma = 2.064$  S/m;  $\epsilon_r = 39.195$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(4.5, 4.5, 4.5) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x161x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 0.0405 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 4.232 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 0.0780 W/kg  
**SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.019 W/kg**  
Maximum value of SAR (measured) = 0.0466 W/kg

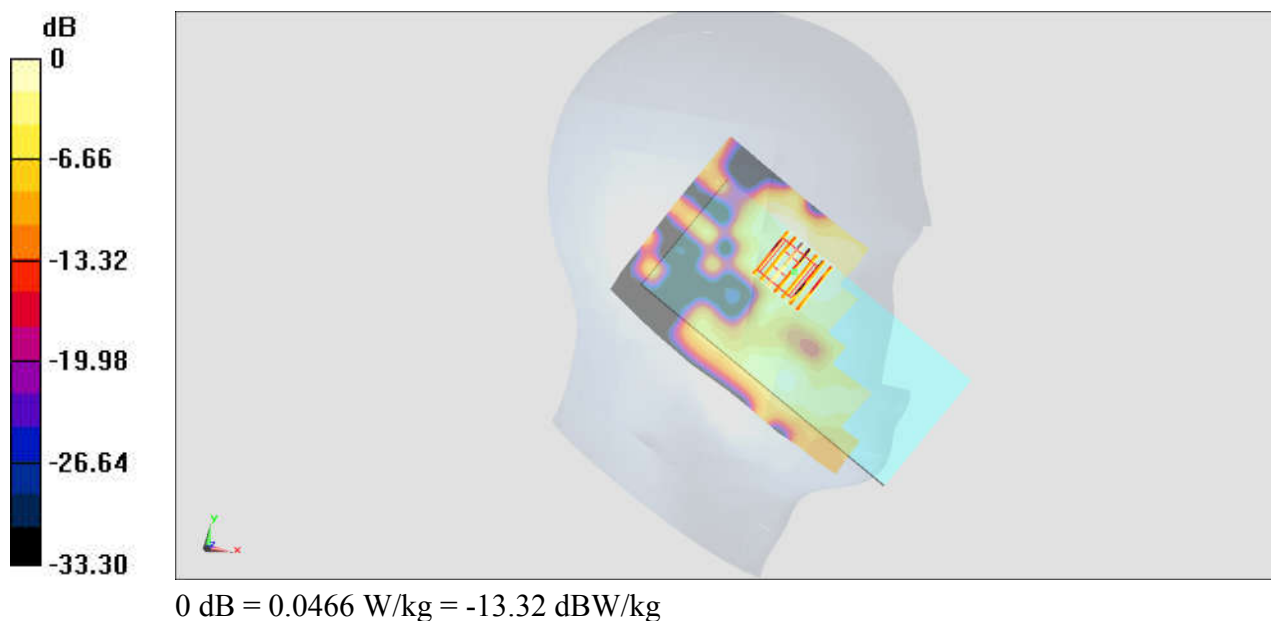

**#13\_WLAN2.4GHz\_802.11b 1Mbps\_Right Cheek\_Ch1;Chain 0**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_190224 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.77$  S/m;  $\epsilon_r = 39.784$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(4.69, 4.69, 4.69) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x161x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 0.457 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 14.39 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.149 W/kg**

Maximum value of SAR (measured) = 0.573 W/kg

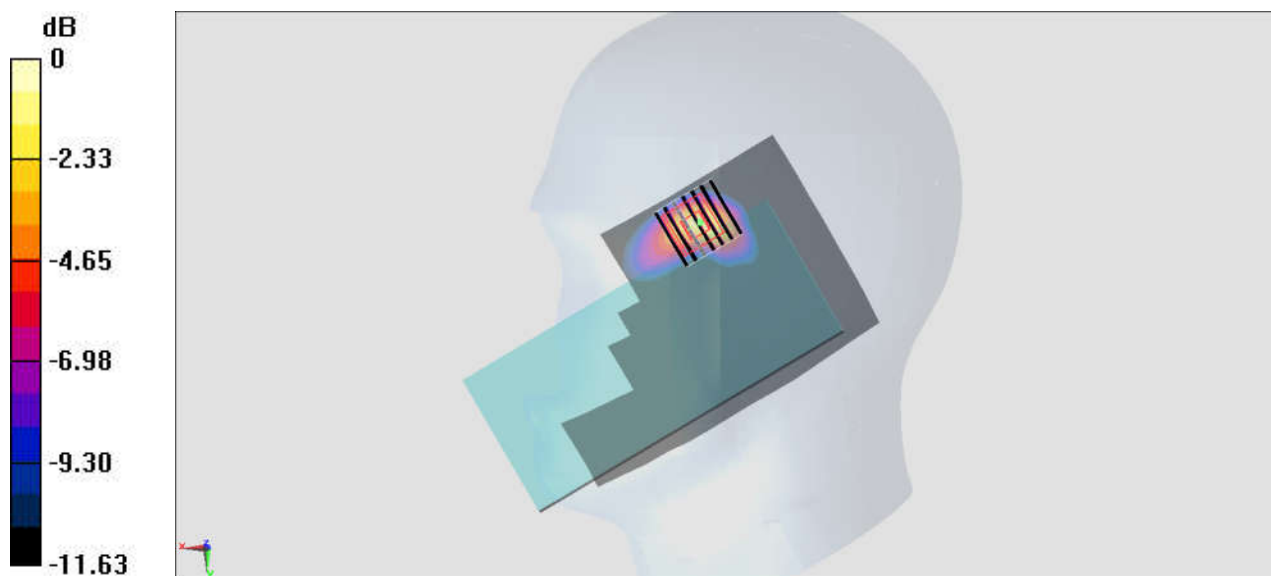

0 dB = 0.573 W/kg = -2.42 dBW/kg

**#14\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Right Cheek\_Ch58;Chain 0**

Communication System: 802.11ac ; Frequency: 5290 MHz;Duty Cycle: 1:1.031

Medium: HSL\_5G\_190227 Medium parameters used :  $f = 5290$  MHz;  $\sigma = 4.546$  S/m;  $\epsilon_r = 37.019$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7515; ConvF(5.45, 5.45, 5.45) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (101x81x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.586 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 6.219 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.796 W/kg

**SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.050 W/kg**

Maximum value of SAR (measured) = 0.516 W/kg

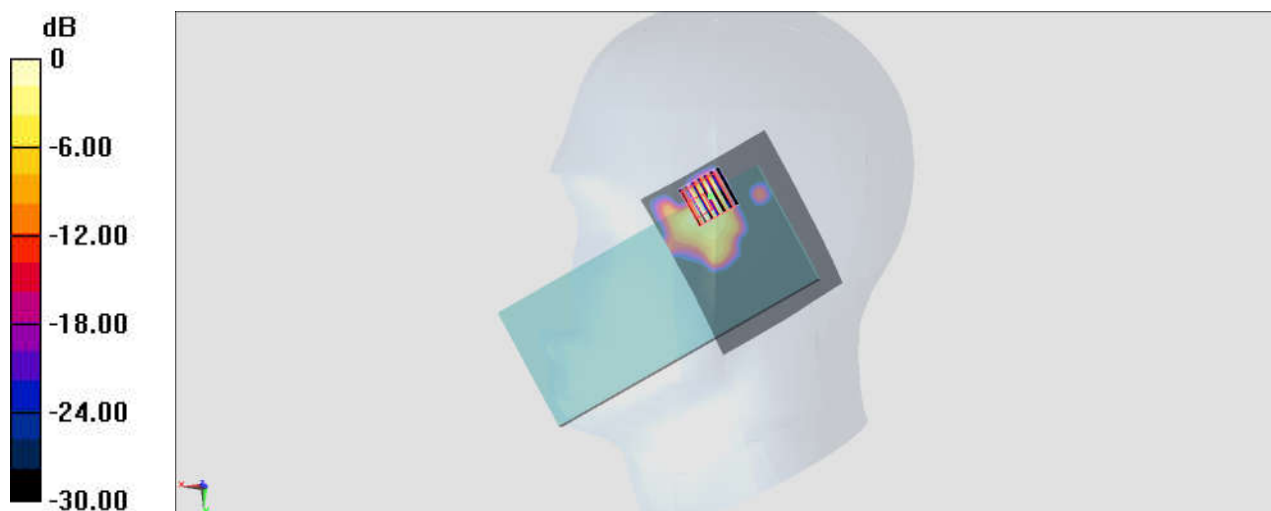

0 dB = 0.516 W/kg = -2.87 dBW/kg

**#15\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Right Cheek\_Ch122;Chain 1**

Communication System: 802.11ac ; Frequency: 5610 MHz;Duty Cycle: 1:1.031

Medium: HSL\_5G\_190301 Medium parameters used :  $f = 5610$  MHz;  $\sigma = 5.028$  S/m;  $\epsilon_r = 36.475$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7515; ConvF(4.83, 4.83, 4.83) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (101x81x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.963 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 13.70 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.74 W/kg

**SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.060 W/kg**

Maximum value of SAR (measured) = 0.980 W/kg

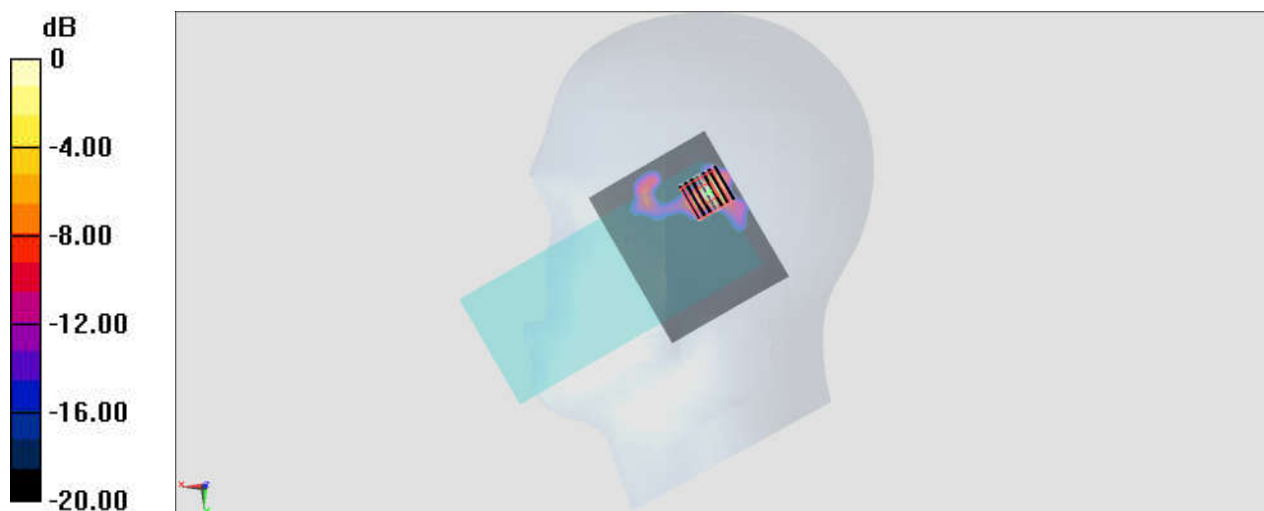

0 dB = 0.980 W/kg = -0.09 dBW/kg

**#16\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Right Cheek\_Ch155;Chain 1**

Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.031

Medium: HSL\_5G\_190227 Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.048$  S/m;  $\epsilon_r = 36.453$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7515; ConvF(4.95, 4.95, 4.95) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (101x81x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.678 W/kg


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 5.483 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.822 W/kg

**SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.507 W/kg

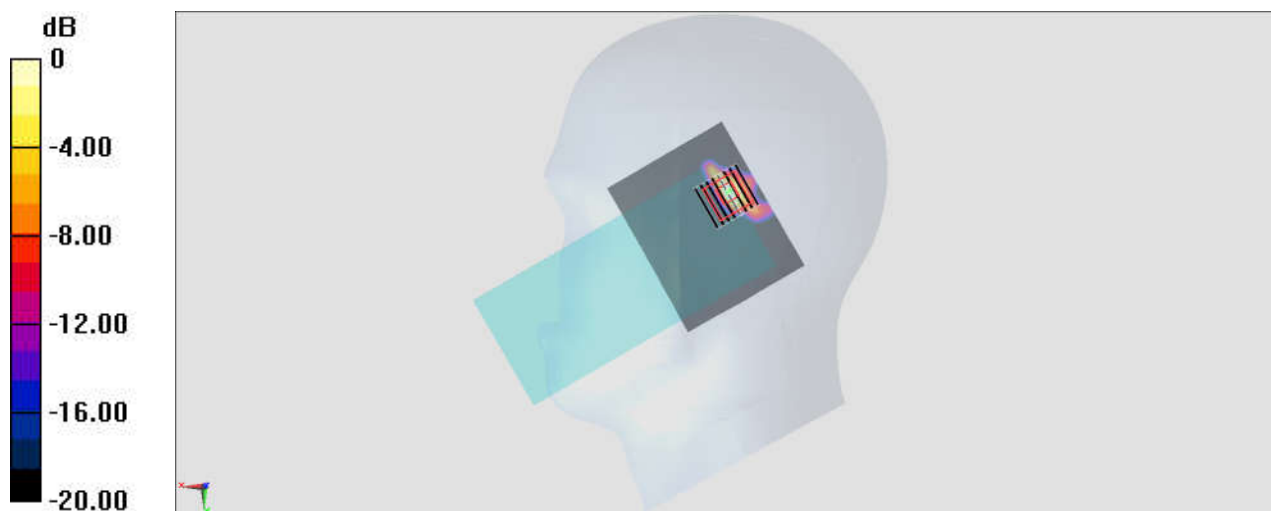

0 dB = 0.507 W/kg = -2.95 dBW/kg

**#17\_Bluetooth\_1Mbps\_Right Cheek\_Ch39**

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.301

Medium: HSL\_2450\_190303 Medium parameters used :  $f = 2441$  MHz;  $\sigma = 1.79$  S/m;  $\epsilon_r = 39.71$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3976; ConvF(7.7, 7.7, 7.7) ; Calibrated: 2019/1/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2018/5/25
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: S/N:1801
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x161x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.212 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.657 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.397 W/kg

**SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.051 W/kg**

Maximum value of SAR (measured) = 0.247 W/kg

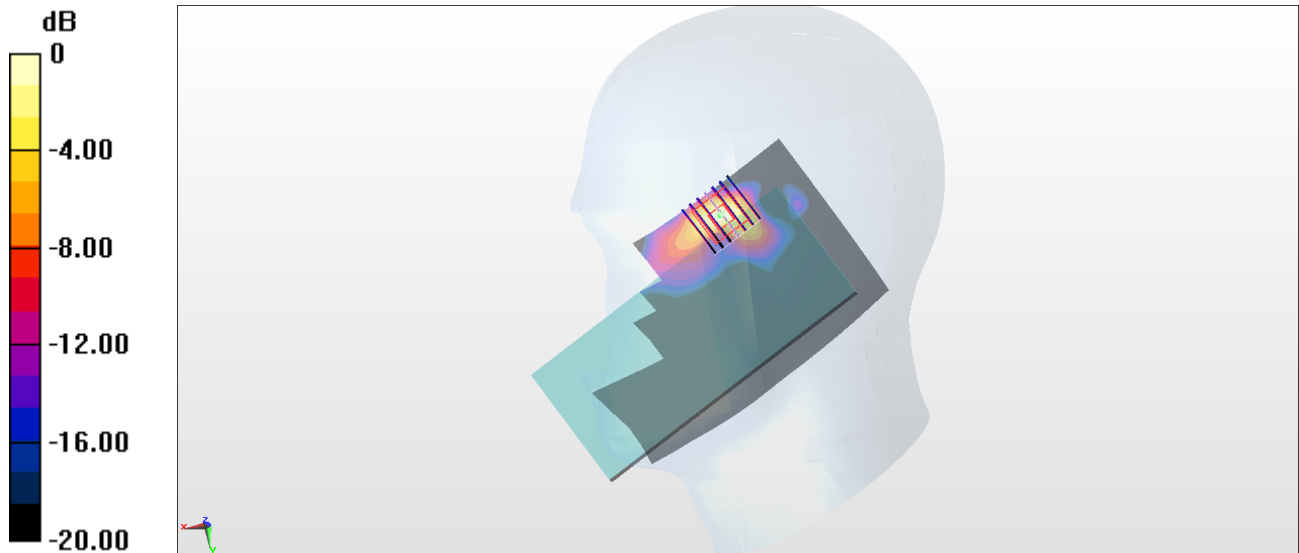

0 dB = 0.247 W/kg = -6.07 dBW/kg

**#18\_GSM850\_GPRS (4 Tx slots)\_Left Side\_10mm\_Ch128**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: MSL\_850\_190220 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.975$  S/m;  $\epsilon_r = 57.733$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (41x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.280 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 17.31 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.355 W/kg

**SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.173 W/kg**

Maximum value of SAR (measured) = 0.277 W/kg

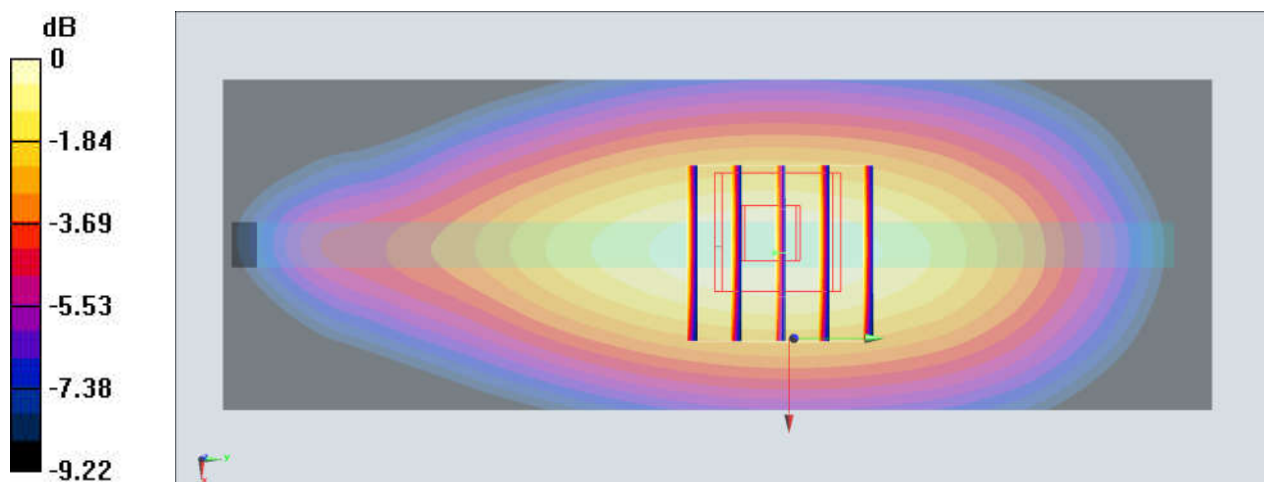

0 dB = 0.277 W/kg = -5.58 dBW/kg

**#19\_GSM1900\_GPRS (4 Tx slots)\_Bottom Side\_10mm\_Ch810**

Communication System: PCS ; Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium: MSL\_1900\_190218 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.549$  S/m;  $\epsilon_r = 53.083$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.535 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.10 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.701 W/kg

**SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.219 W/kg**

Maximum value of SAR (measured) = 0.468 W/kg

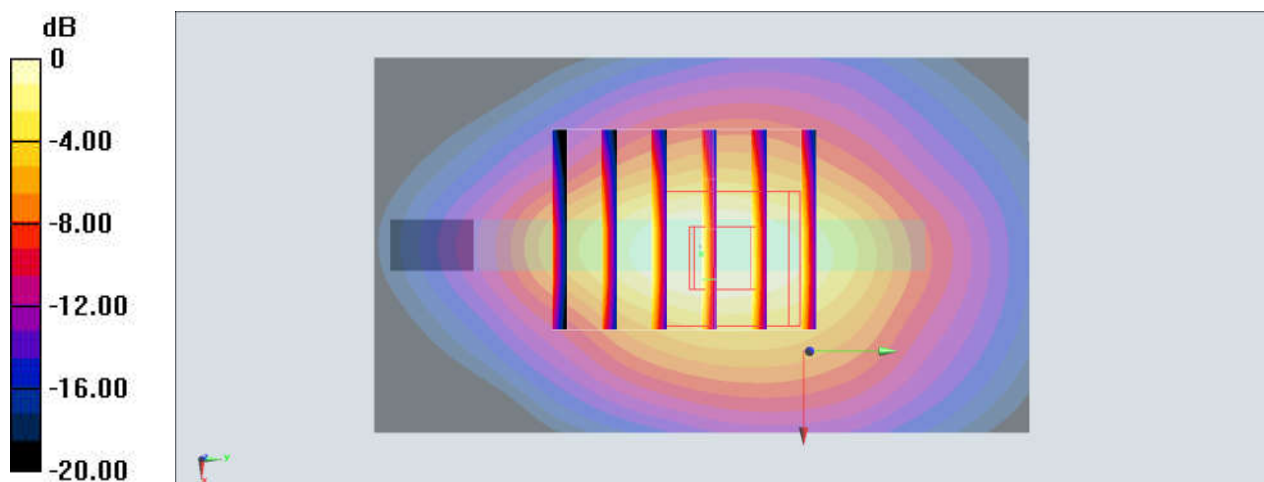

0 dB = 0.468 W/kg = -3.30 dBW/kg

**#20\_WCDMA II\_RMC 12.2Kbps\_Bottom Side\_10mm\_Ch9400**

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: MSL\_1900\_190218 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.513$  S/m;  $\epsilon_r = 53.218$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.753 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.94 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.308 W/kg**

Maximum value of SAR (measured) = 0.677 W/kg

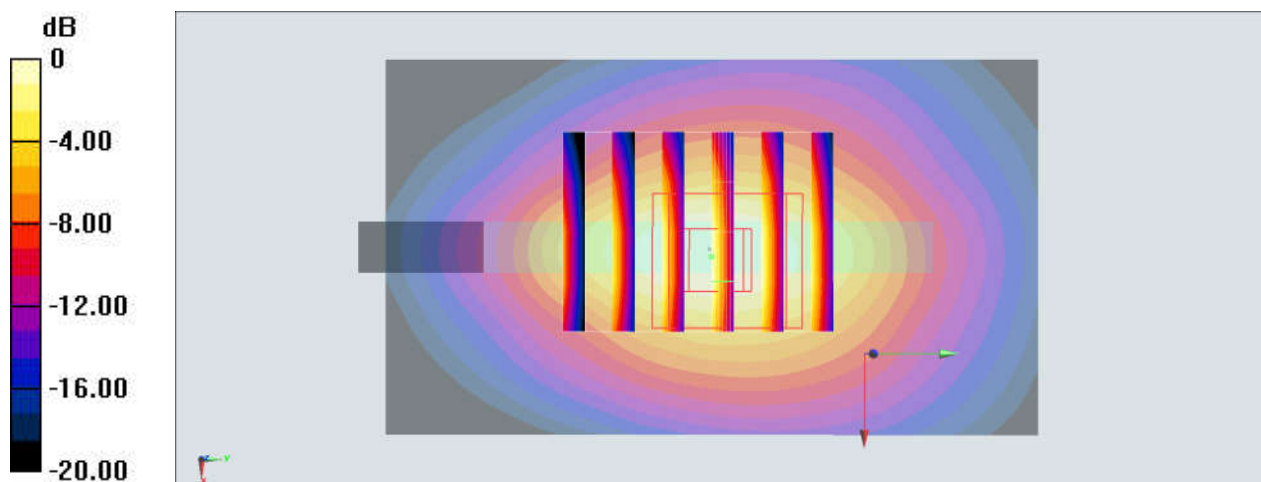

0 dB = 0.677 W/kg = -1.69 dBW/kg

**#21\_WCDMA IV\_RMC 12.2Kbps\_Bottom Side\_10mm\_Ch1513**

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_190218 Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.48$  S/m;  $\epsilon_r = 55.233$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(5.06, 5.06, 5.06) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (41x71x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.829 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 11.79 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.665 W/kg; SAR(10 g) = 0.352 W/kg**

Maximum value of SAR (measured) = 0.828 W/kg

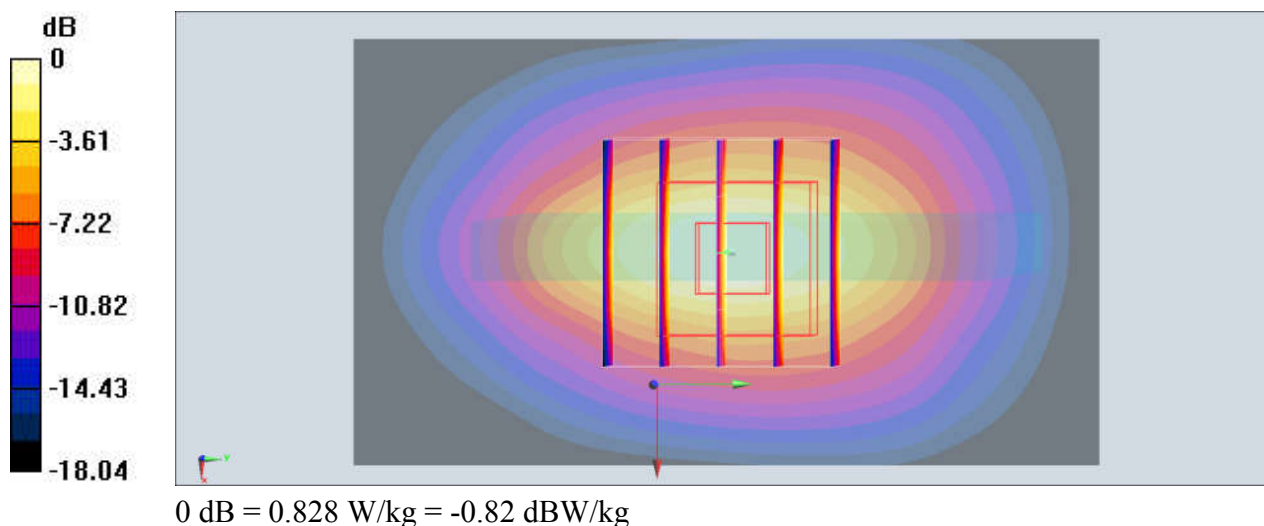

**#22\_WCDMA V\_RMC 12.2Kbps\_Left Side\_10mm\_Ch4182**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_190220 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.988$  S/m;  $\epsilon_r = 57.675$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (41x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.355 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 19.62 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.462 W/kg

**SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.226 W/kg**

Maximum value of SAR (measured) = 0.362 W/kg

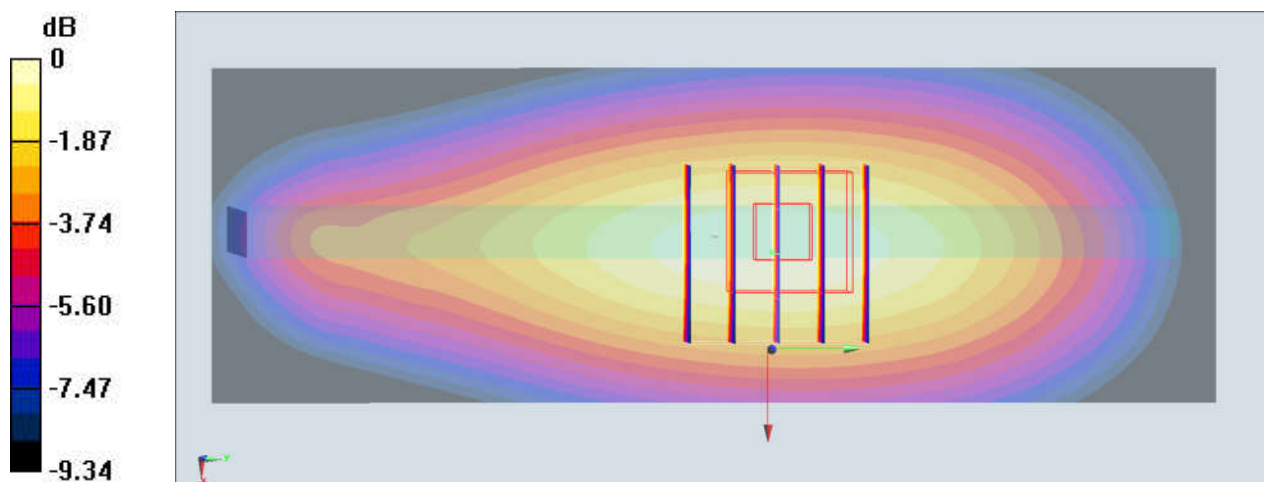

0 dB = 0.362 W/kg = -4.41 dBW/kg

**#23\_LTE Band 7\_20M\_QPSK\_50\_50\_Bottom  
Side\_10mm\_Ch21100**

Communication System: LTE ; Frequency: 2535 MHz;Duty Cycle: 1:1

Medium: MSL\_2600\_190219 Medium parameters used :  $f = 2535$  MHz;  $\sigma = 2.106$  S/m;  $\epsilon_r = 52.521$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(4.27, 4.27, 4.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.620 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.926 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.244 W/kg**

Maximum value of SAR (measured) = 0.649 W/kg

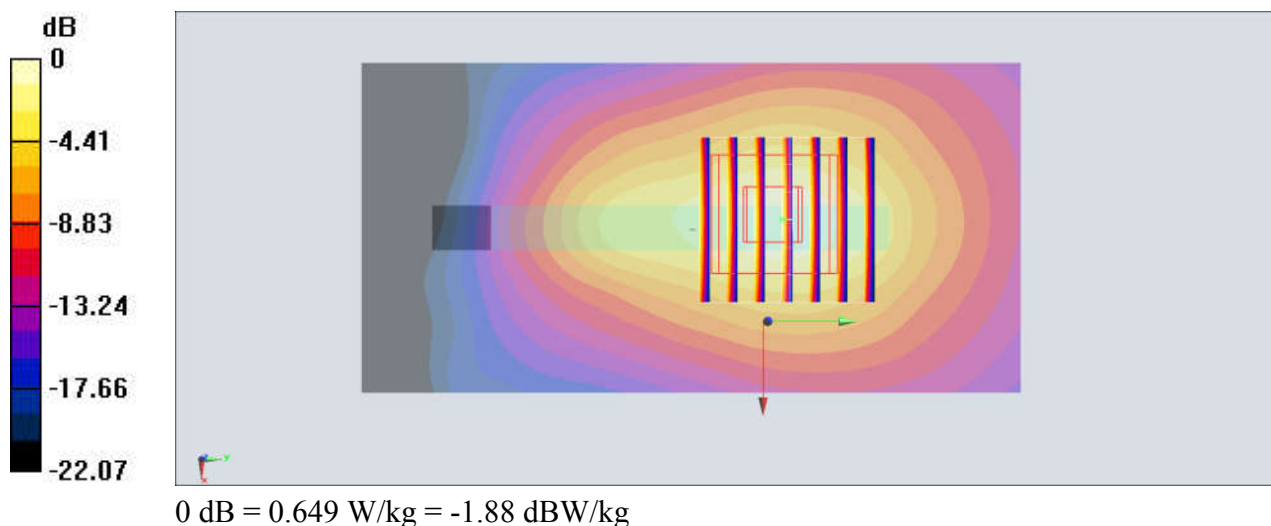

**#24\_LTE Band 12\_10M\_QPSK\_1\_49\_Left Side\_10mm\_Ch23095**

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_190220 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.935$  S/m;  $\epsilon_r = 54.655$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(6.3, 6.3, 6.3) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (41x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.330 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.90 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.421 W/kg

**SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.218 W/kg**

Maximum value of SAR (measured) = 0.344 W/kg

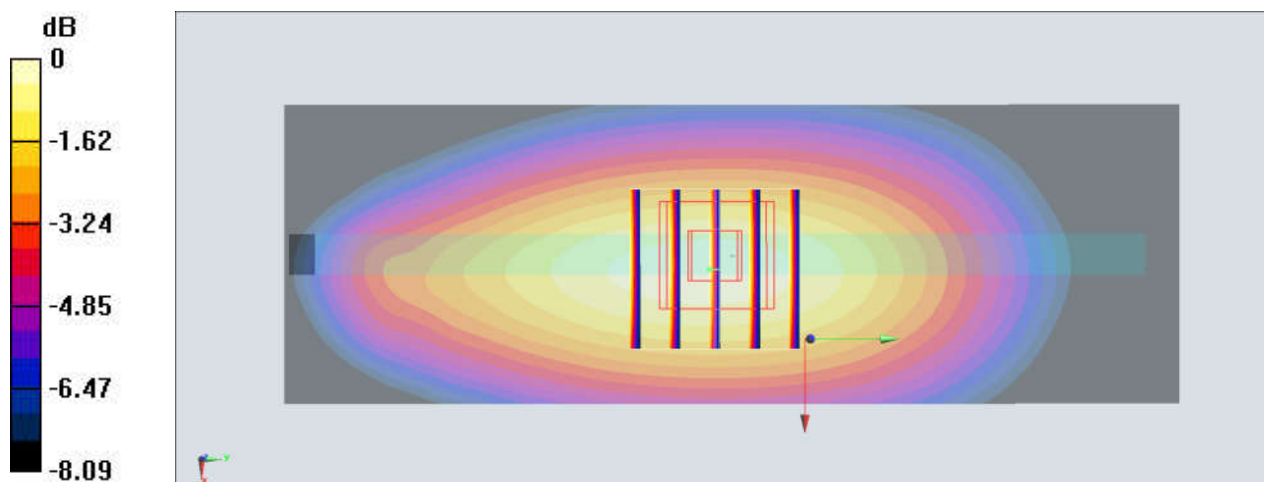

0 dB = 0.344 W/kg = -4.63 dBW/kg

**#25\_LTE Band 13\_10M\_QPSK\_1\_0\_Left Side\_10mm\_Ch23230**

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_190220 Medium parameters used:  $f = 782$  MHz;  $\sigma = 1.005$  S/m;  $\epsilon_r = 53.948$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(6.3, 6.3, 6.3) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (41x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.197 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.91 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.254 W/kg

**SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.128 W/kg**

Maximum value of SAR (measured) = 0.206 W/kg

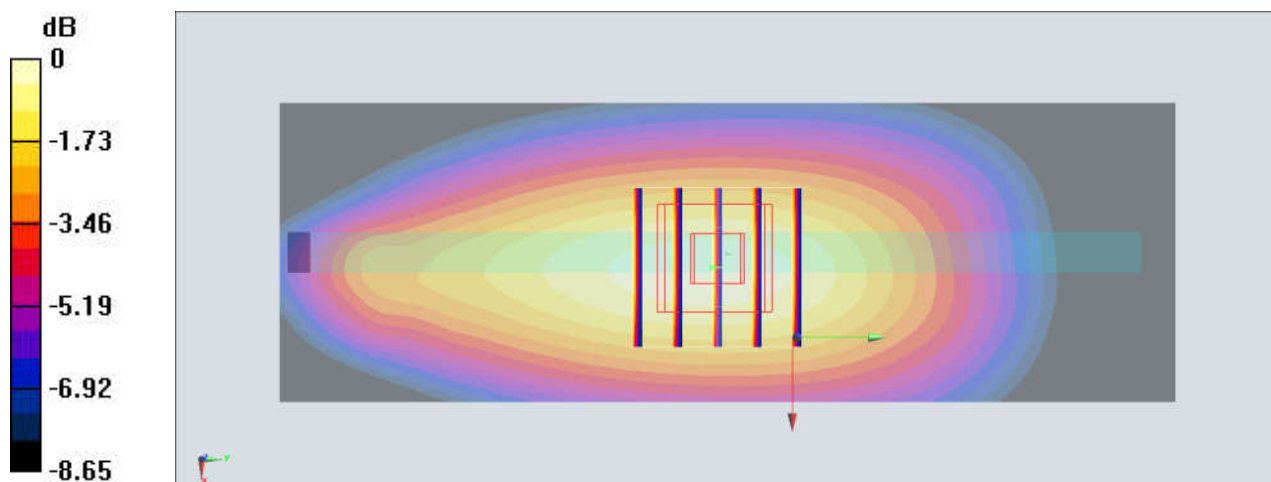

0 dB = 0.206 W/kg = -6.86 dBW/kg

**#26\_LTE Band 25\_20M\_QPSK\_50\_24\_Bottom Side\_10mm\_Ch26590**

Communication System: LTE; Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_190218 Medium parameters used:  $f = 1905$  MHz;  $\sigma = 1.543$  S/m;  $\epsilon_r = 53.104$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.664 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.35 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.886 W/kg

**SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.269 W/kg**

Maximum value of SAR (measured) = 0.644 W/kg

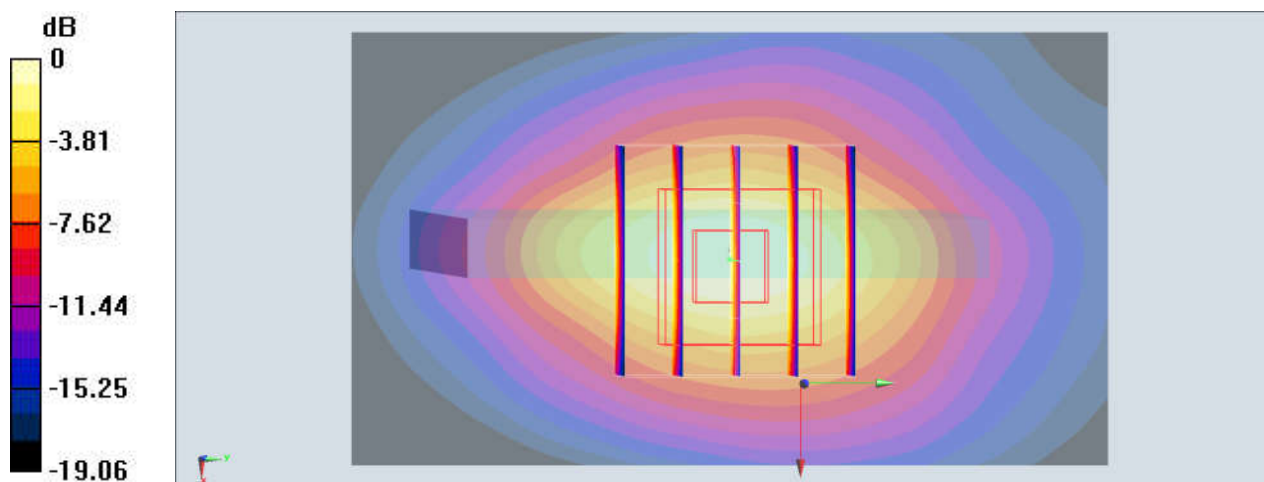

0 dB = 0.644 W/kg = -1.91 dBW/kg

**#27\_LTE Band 26\_15M\_QPSK\_1\_0\_Left Side\_10mm\_Ch26865**

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_190220 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.982$  S/m;  $\epsilon_r = 57.706$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (41x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.357 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 19.92 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.465 W/kg

**SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.230 W/kg**

Maximum value of SAR (measured) = 0.368 W/kg

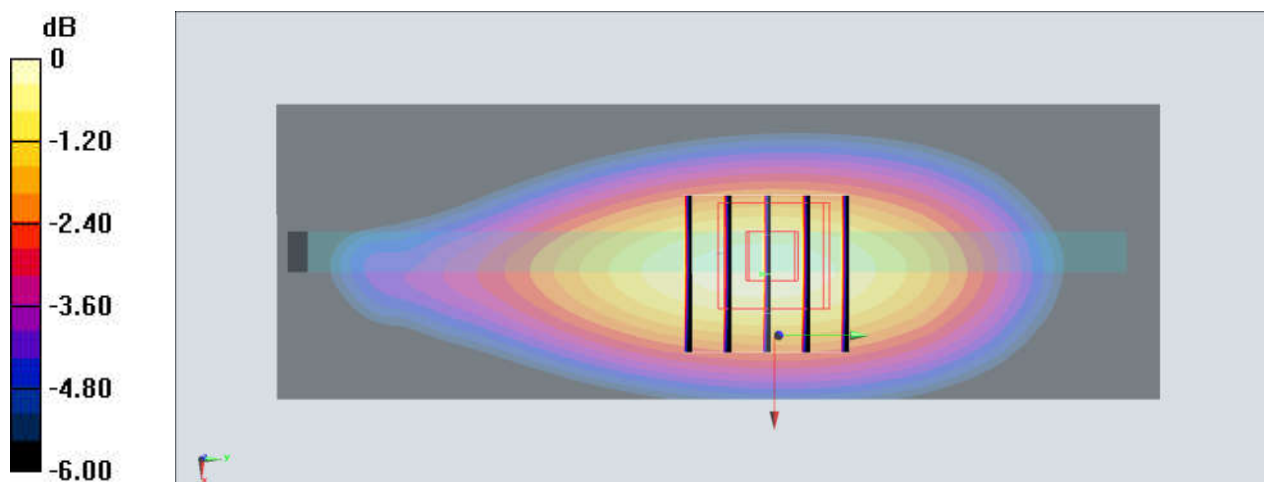

0 dB = 0.368 W/kg = -4.34 dBW/kg

**#28\_LTE Band 66\_20M\_QPSK\_50\_0\_Bottom  
Side\_10mm\_Ch132072**

Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_190218 Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.446$  S/m;  $\epsilon_r = 55.285$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(5.06, 5.06, 5.06) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.551 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.40 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.776 W/kg

**SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.238 W/kg**

Maximum value of SAR (measured) = 0.558 W/kg

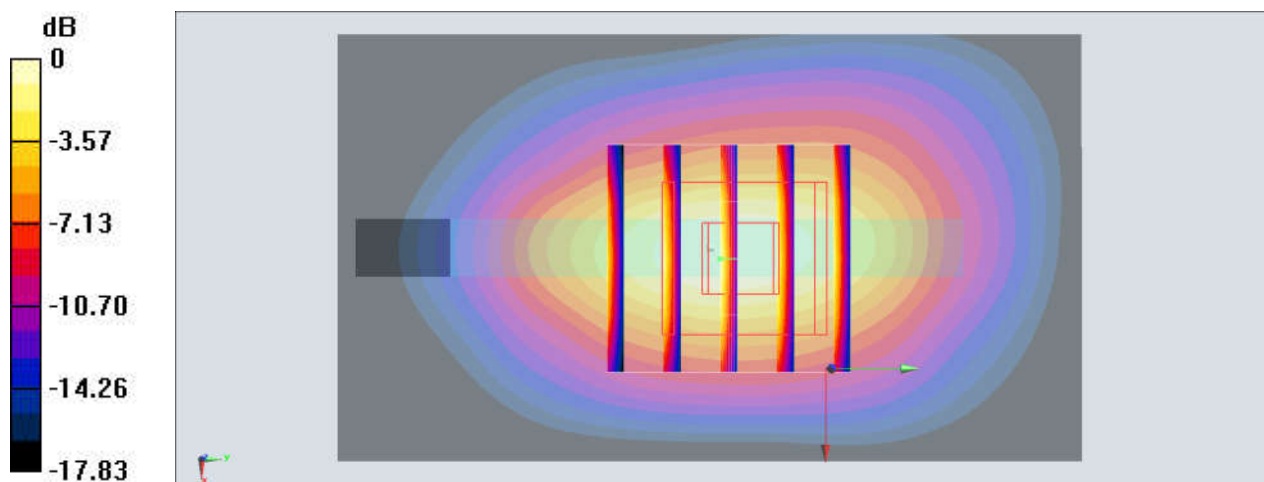

**#29\_LTE Band 41\_20M\_QPSK\_1\_0\_Bottom Side\_10mm\_Ch41055**

Communication System: LTE ; Frequency: 2636.5 MHz; Duty Cycle: 1:1.59

Medium: MSL\_2600\_190219 Medium parameters used :  $f = 2636.5$  MHz;  $\sigma = 2.238$  S/m;  $\epsilon_r = 52.13$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(4.27, 4.27, 4.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.348 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.550 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.621 W/kg

**SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.135 W/kg**

Maximum value of SAR (measured) = 0.355 W/kg

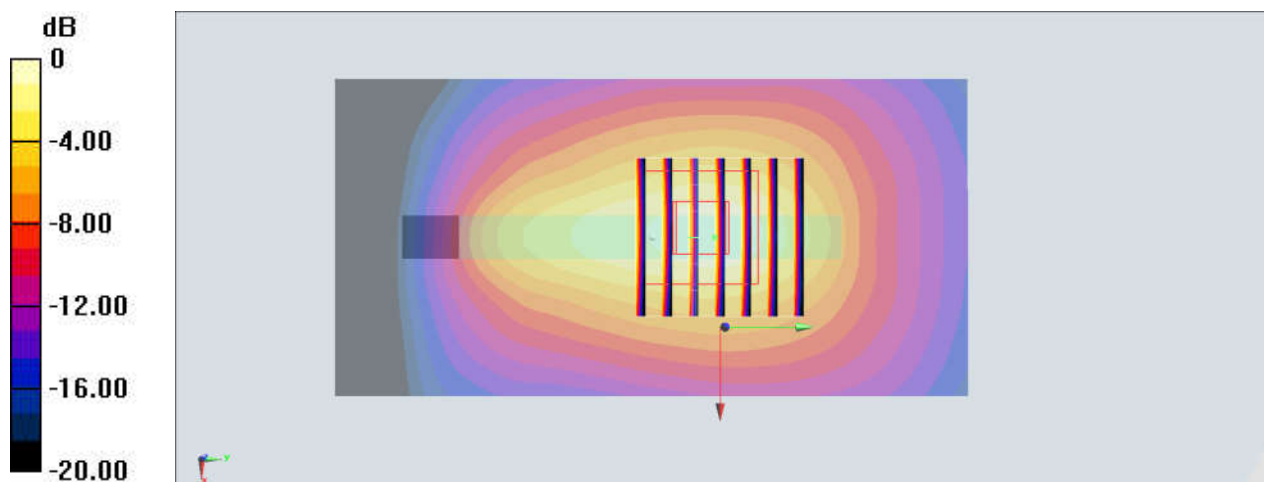

0 dB = 0.355 W/kg = -4.50 dBW/kg

**#30\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_10mm\_Ch1;Chain 0**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_190302 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.97$  S/m;  $\epsilon_r = 53.577$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7515; ConvF(7.53, 7.53, 7.53) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (81x81x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 0.361 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 7.893 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.517 W/kg

**SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.112 W/kg**

Maximum value of SAR (measured) = 0.412 W/kg

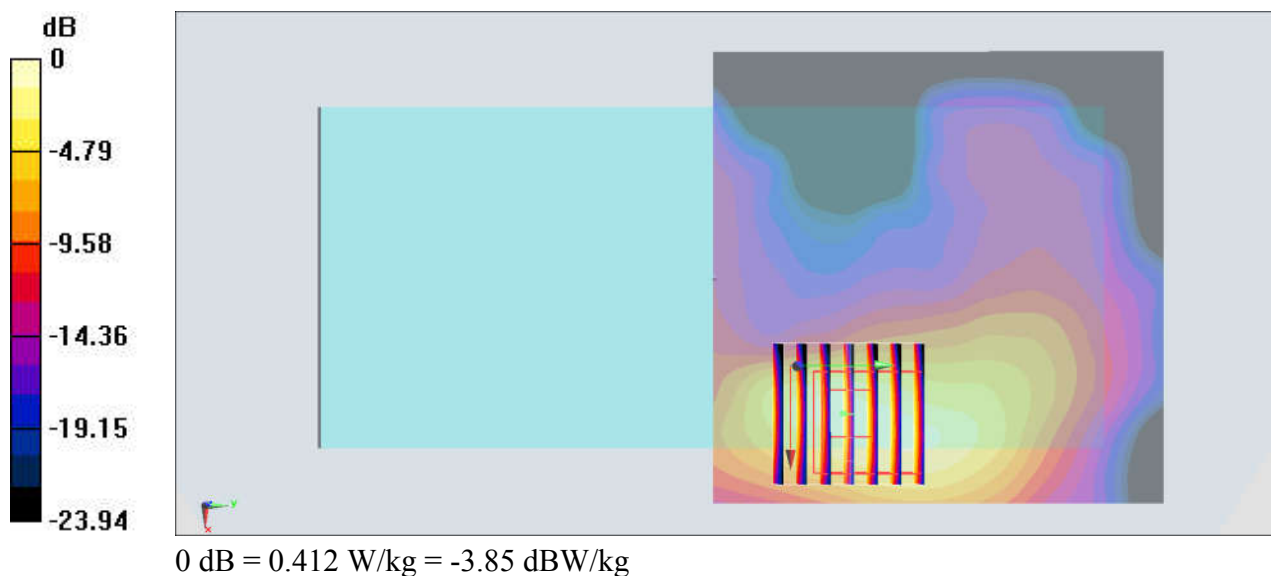

**#31\_Bluetooth\_1Mbps\_Left Side\_10mm\_Ch39**

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.1.301

Medium: MSL\_2450\_190303 Medium parameters used :  $f = 2441$  MHz;  $\sigma = 1.985$  S/m;  $\epsilon_r = 51.372$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3976; ConvF(7.71, 7.71, 7.71) ; Calibrated: 2019/1/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2018/5/25
- Phantom: SAM\_Right; Type: QD000P40CD; Serial: S/N:1796
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0891 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.575 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.102 W/kg

**SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0825 W/kg

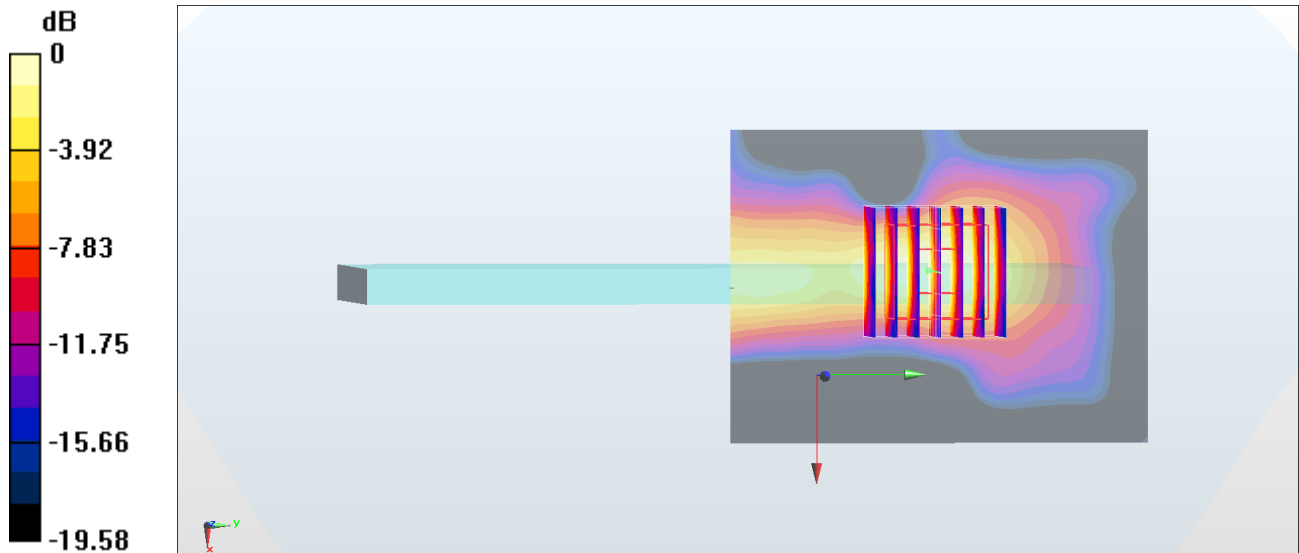

0 dB = 0.0825 W/kg = -10.84 dBW/kg

**#32\_GSM850\_GPRS (4 Tx slots)\_Front\_15mm\_Ch128**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: MSL\_850\_190220 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.975$  S/m;  $\epsilon_r = 57.733$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.183 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.25 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.217 W/kg

**SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.136 W/kg**

Maximum value of SAR (measured) = 0.190 W/kg

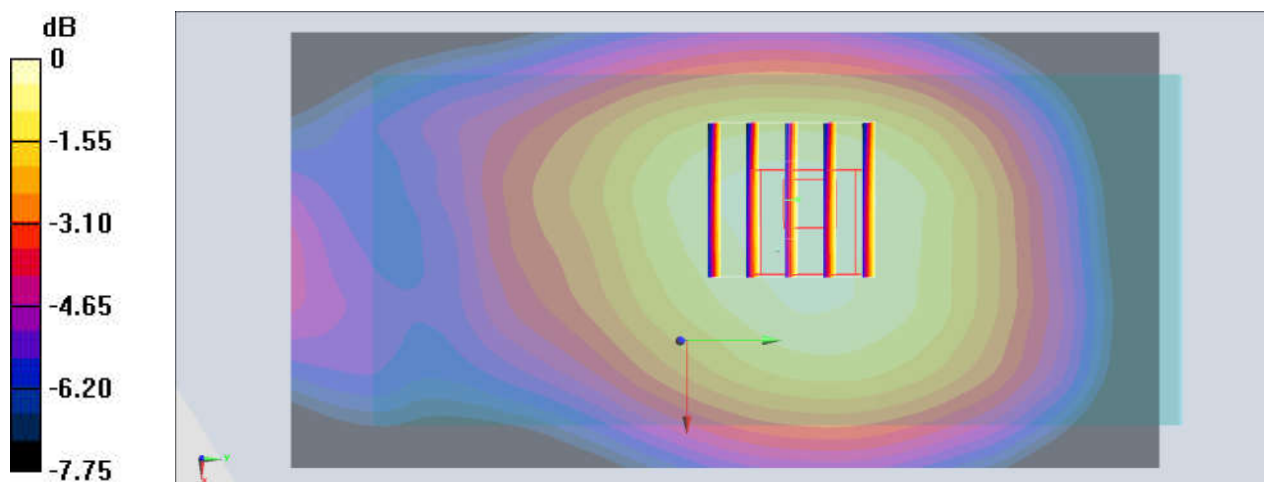

0 dB = 0.190 W/kg = -7.21 dBW/kg

**#33\_GSM1900\_GPRS (4 Tx slots)\_Front\_15mm\_Ch810**

Communication System: PCS ; Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium: MSL\_1900\_190218 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.549$  S/m;  $\epsilon_r = 53.083$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0944 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.666 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.125 W/kg

**SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.0938 W/kg

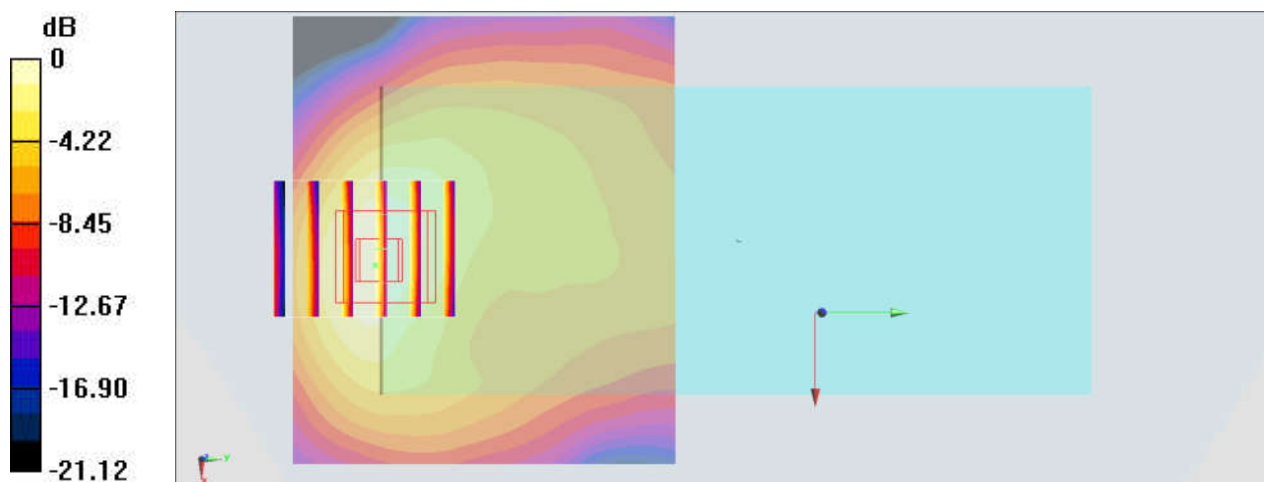

0 dB = 0.0938 W/kg = -10.28 dBW/kg

**#34\_WCDMA II\_RMC 12.2Kbps\_Front\_15mm\_Ch9400**

Communication System: WCDMA ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_190218 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.513$  S/m;  $\epsilon_r = 53.218$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.152 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.716 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.196 W/kg

**SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.070 W/kg**

Maximum value of SAR (measured) = 0.147 W/kg

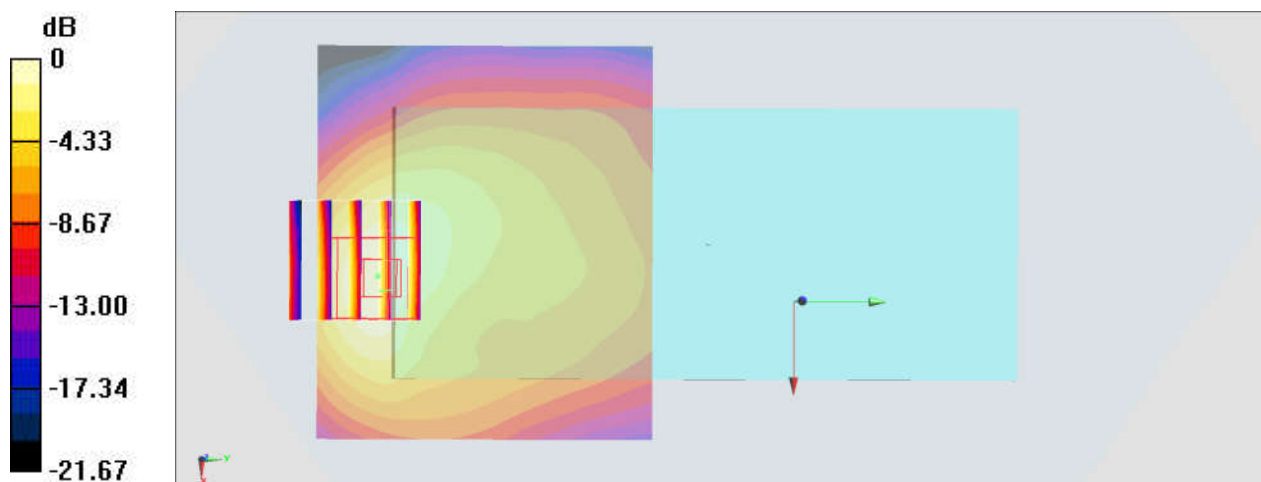

0 dB = 0.147 W/kg = -8.33 dBW/kg

**#35\_WCDMA IV\_RMC 12.2Kbps\_Front\_15mm\_Ch1513**

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_190218 Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.48$  S/m;  $\epsilon_r = 55.233$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(5.06, 5.06, 5.06) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x61x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.193 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.211 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.251 W/kg

**SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.092 W/kg**

Maximum value of SAR (measured) = 0.192 W/kg

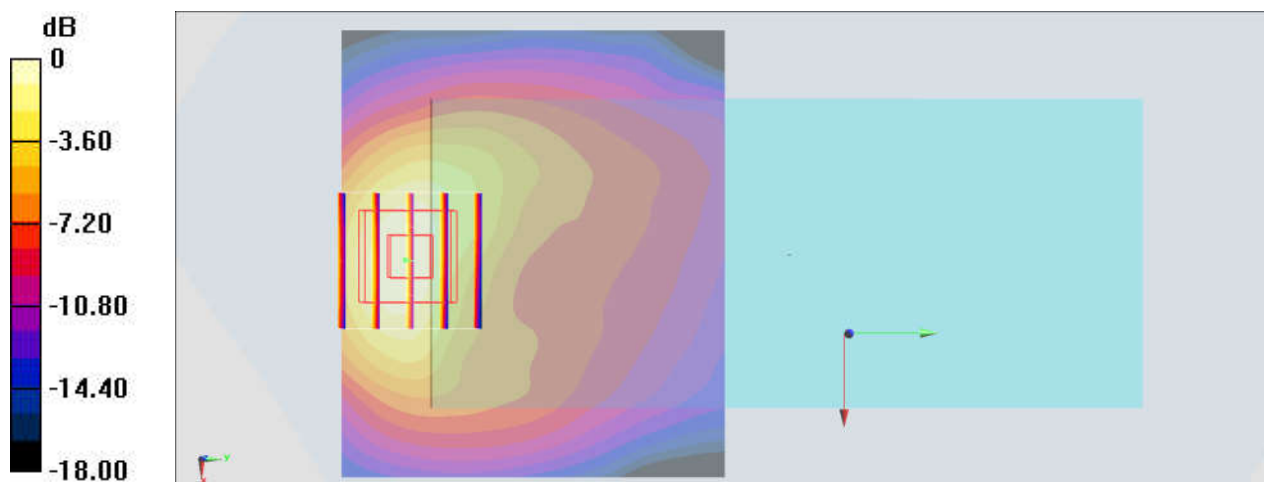

0 dB = 0.192 W/kg = -7.17 dBW/kg

**#36\_WCDMA V\_RMC 12.2Kbps\_Back\_15mm\_Ch4182**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_190220 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.988$  S/m;  $\epsilon_r = 57.675$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.267 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.07 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.315 W/kg

**SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.197 W/kg**

Maximum value of SAR (measured) = 0.275 W/kg

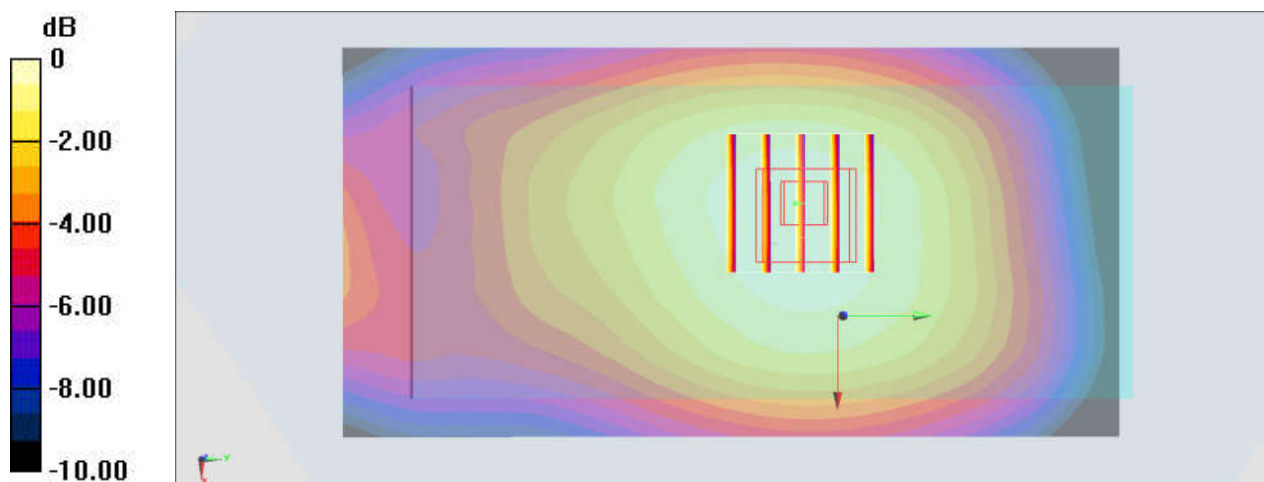

0 dB = 0.275 W/kg = -5.61 dBW/kg

**#37\_LTE Band 7\_20M\_QPSK\_50\_50\_Back\_15mm\_Ch21100**

Communication System: LTE ; Frequency: 2535 MHz;Duty Cycle: 1:1

Medium: MSL\_2600\_190219 Medium parameters used :  $f = 2535$  MHz;  $\sigma = 2.106$  S/m;  $\epsilon_r = 52.521$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.27, 4.27, 4.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.190 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.756 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.308 W/kg

**SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.082 W/kg**

Maximum value of SAR (measured) = 0.188 W/kg

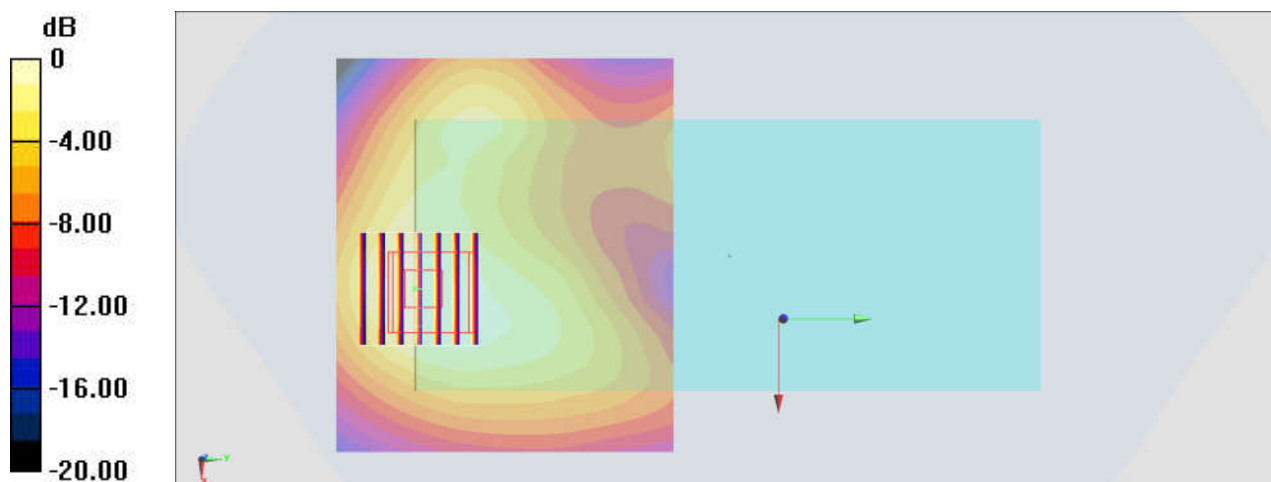

0 dB = 0.188 W/kg = -7.26 dBW/kg

**#38\_LTE Band 12\_10M\_QPSK\_1\_49\_Back\_15mm\_Ch23095**

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_190220 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.935$  S/m;  $\epsilon_r = 54.655$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(6.3, 6.3, 6.3) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.260 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 17.06 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.301 W/kg

**SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.204 W/kg**

Maximum value of SAR (measured) = 0.270 W/kg

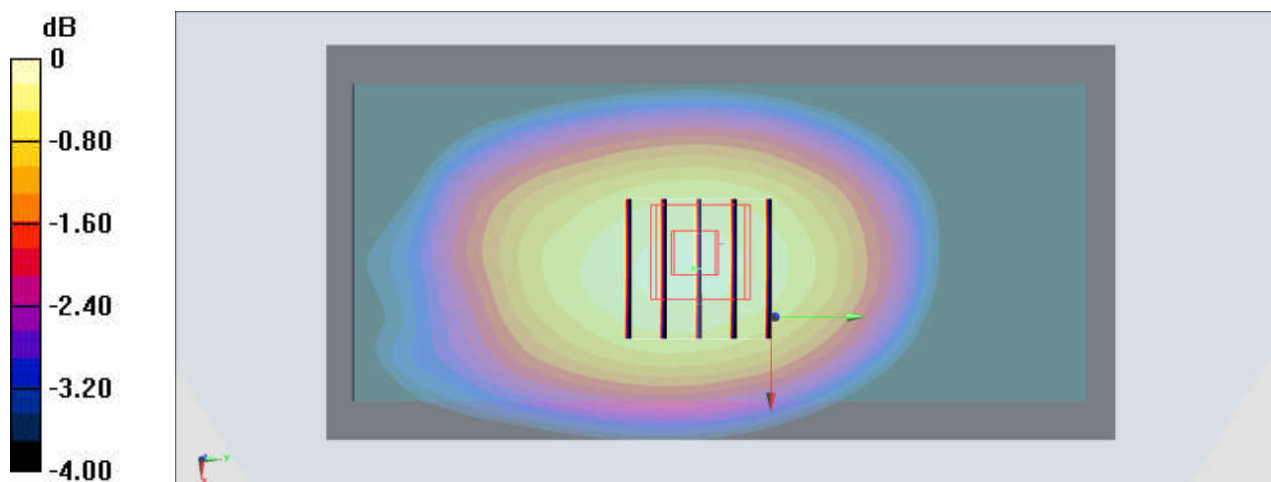

0 dB = 0.270 W/kg = -5.69 dBW/kg

**#39\_LTE Band 13\_10M\_QPSK\_1\_0\_Front\_15mm\_Ch23230**

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_190220 Medium parameters used:  $f = 782$  MHz;  $\sigma = 1.005$  S/m;  $\epsilon_r = 53.948$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(6.3, 6.3, 6.3) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x101x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.169 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 13.31 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.198 W/kg

**SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.127 W/kg**

Maximum value of SAR (measured) = 0.175 W/kg

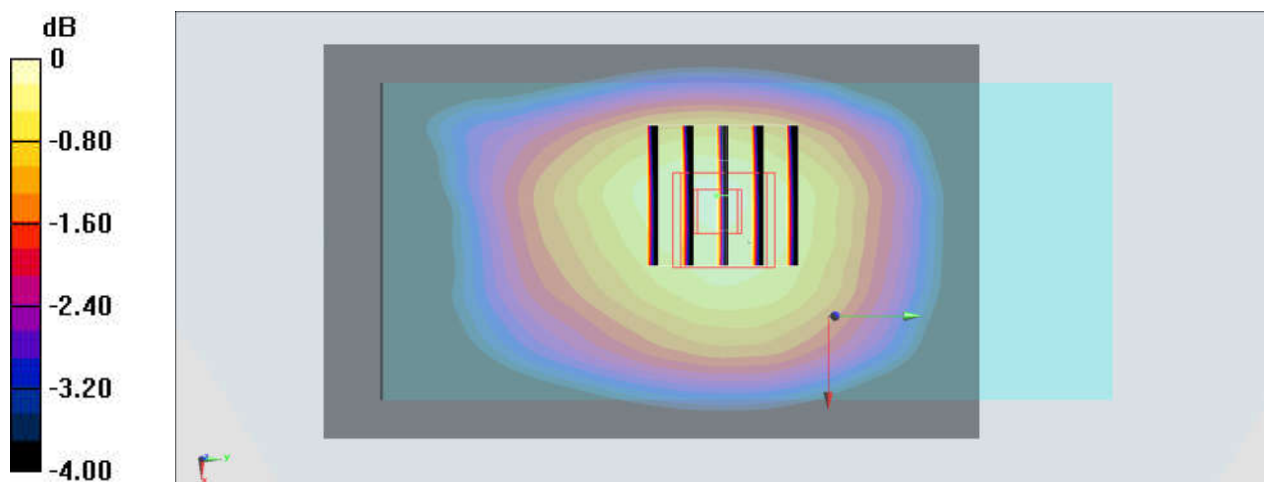

0 dB = 0.175 W/kg = -7.57 dBW/kg

**#40\_LTE Band 25\_20M\_QPSK\_50\_24\_Front\_15mm\_Ch26590**

Communication System: LTE; Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_190218 Medium parameters used:  $f = 1905$  MHz;  $\sigma = 1.543$  S/m;  $\epsilon_r = 53.104$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x61x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.164 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.575 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.212 W/kg

**SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.077 W/kg**

Maximum value of SAR (measured) = 0.162 W/kg

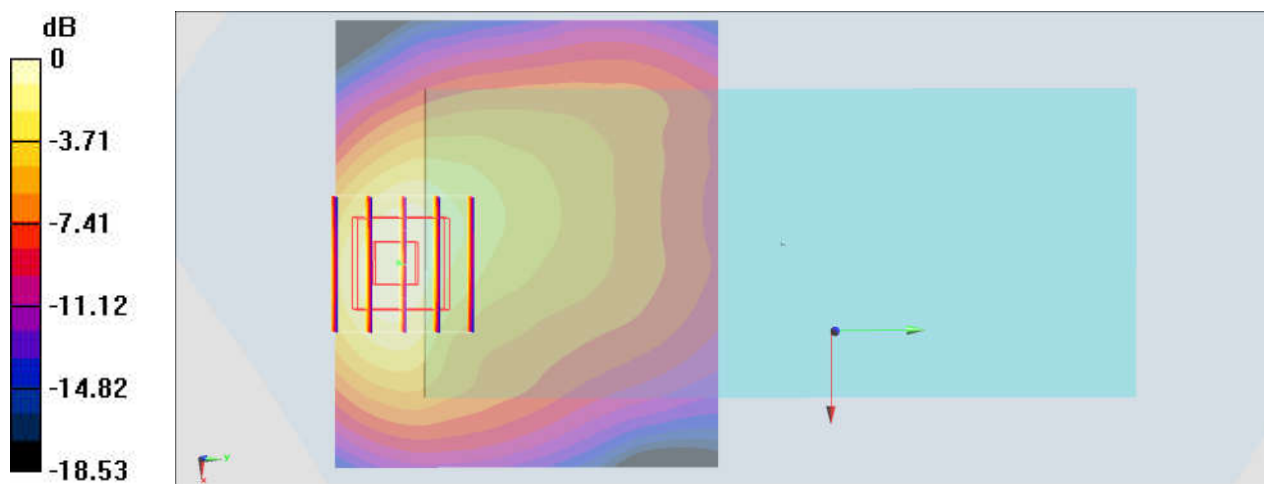

0 dB = 0.162 W/kg = -7.90 dBW/kg

**#41\_LTE Band 26\_15M\_QPSK\_1\_0\_Front\_15mm\_Ch26865**

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_190220 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.982$  S/m;  $\epsilon_r = 57.706$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.266 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.12 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.317 W/kg

**SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.201 W/kg**

Maximum value of SAR (measured) = 0.279 W/kg

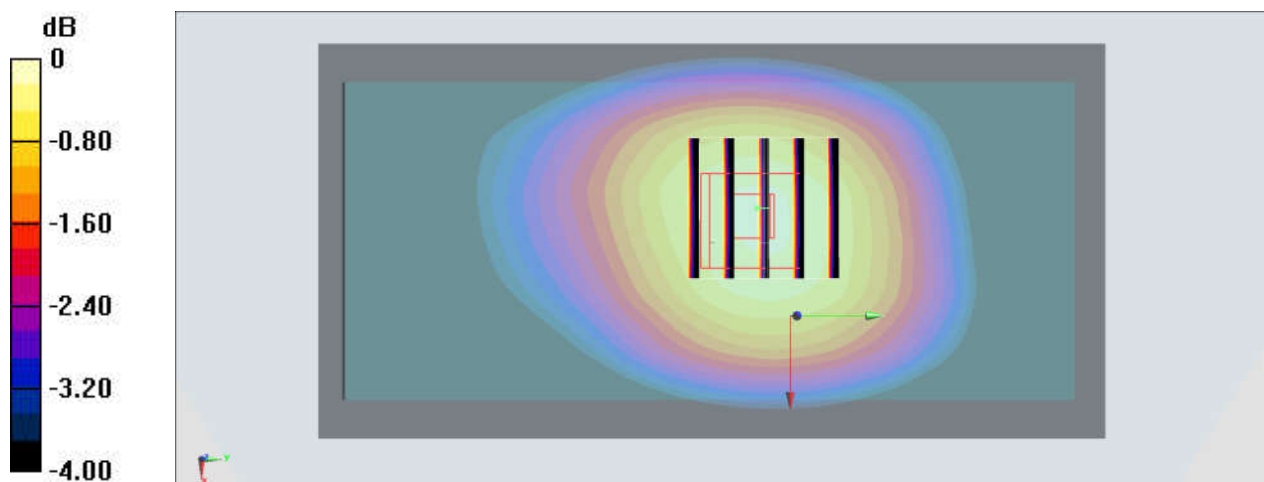

0 dB = 0.279 W/kg = -5.54 dBW/kg

**#42\_LTE Band 66\_20M\_QPSK\_50\_0\_Back\_15mm\_Ch132072**

Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_190218 Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.446$  S/m;  $\epsilon_r = 55.285$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(5.06, 5.06, 5.06) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x61x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.173 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 7.785 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.221 W/kg

**SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.083 W/kg**

Maximum value of SAR (measured) = 0.165 W/kg

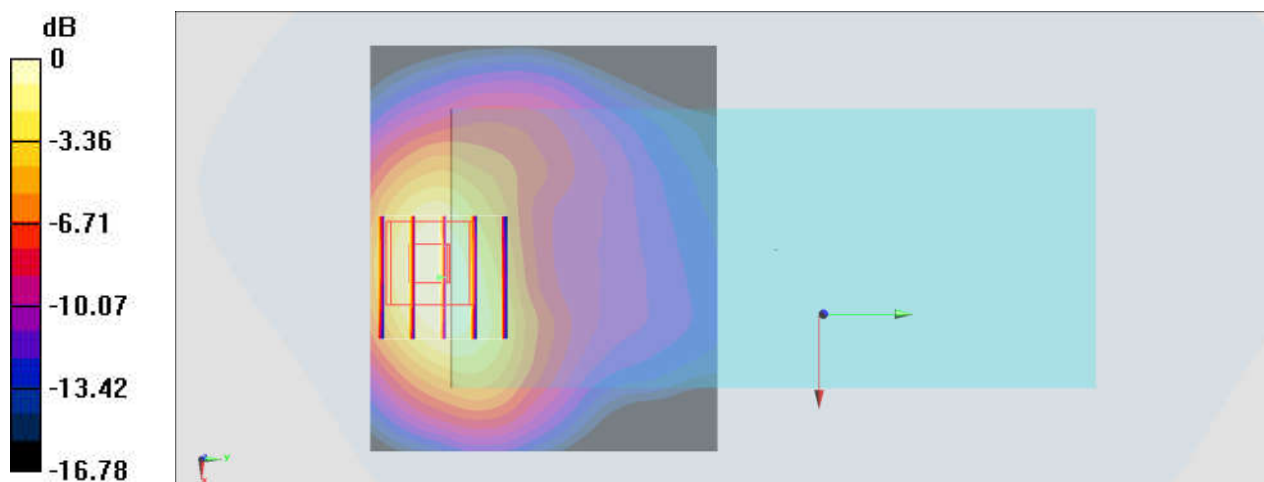

0 dB = 0.165 W/kg = -7.83 dBW/kg

**#43\_LTE Band 41\_20M\_QPSK\_50\_0\_Back\_15mm\_Ch41055**

Communication System: LTE ; Frequency: 2636.5 MHz; Duty Cycle: 1:1.59

Medium: MSL\_2600\_190219 Medium parameters used :  $f = 2636.5$  MHz;  $\sigma = 2.238$  S/m;  $\epsilon_r = 52.13$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(4.27, 4.27, 4.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.119 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.803 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.185 W/kg

**SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.049 W/kg**

Maximum value of SAR (measured) = 0.112 W/kg

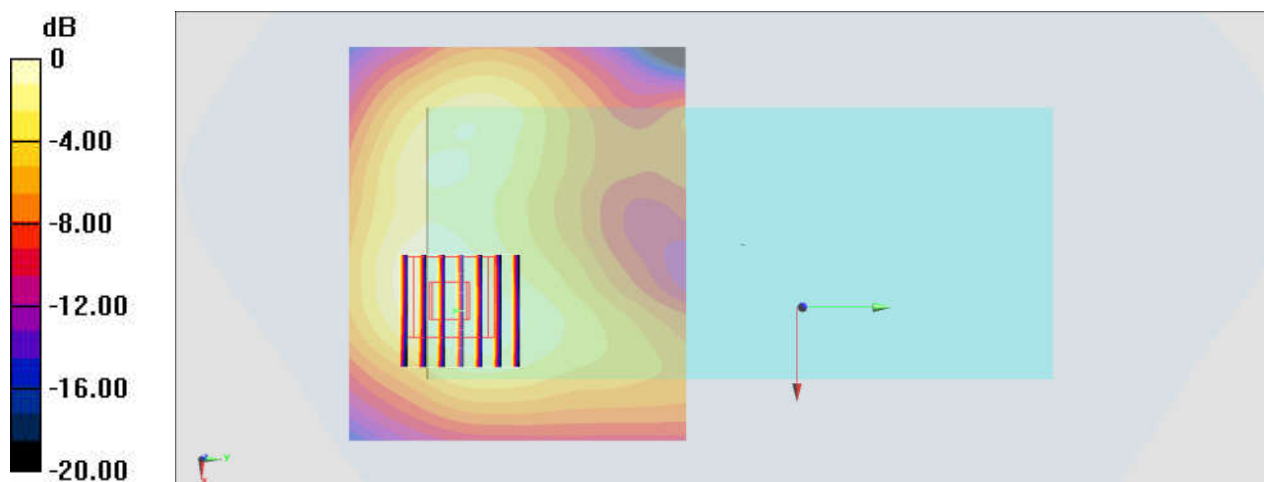

0 dB = 0.112 W/kg = -9.51 dBW/kg

**#44\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_15mm\_Ch1;Chain 0**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_190302 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.97$  S/m;  $\epsilon_r = 53.577$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7515; ConvF(7.53, 7.53, 7.53) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (81x81x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 0.159 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 6.643 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.201 W/kg

**SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.053 W/kg**

Maximum value of SAR (measured) = 0.162 W/kg

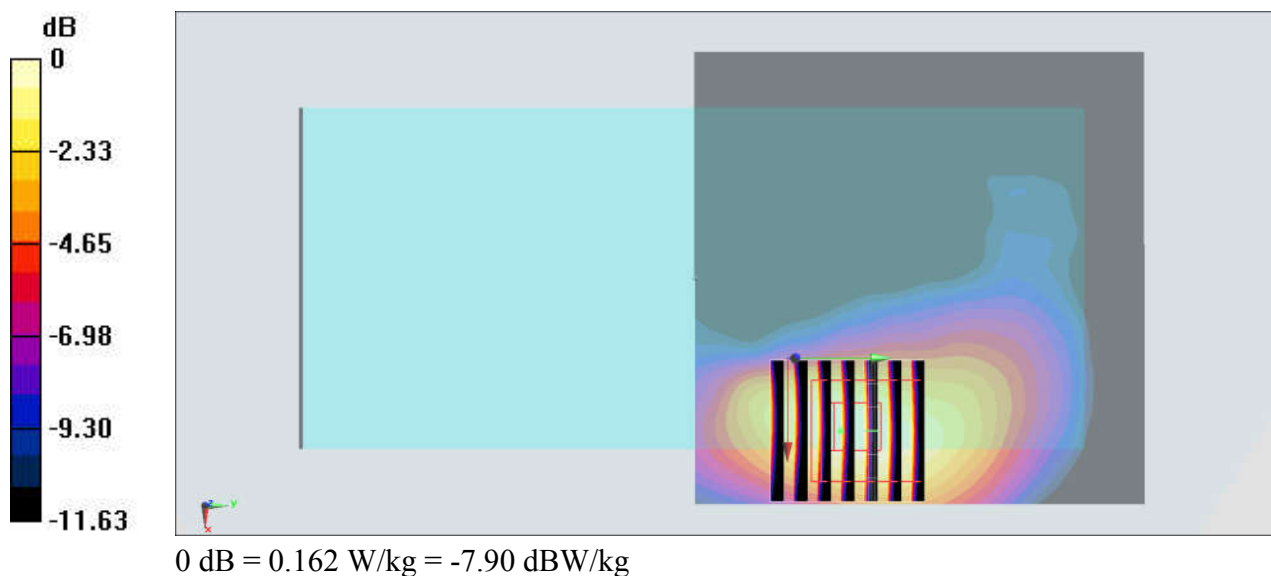

**#45\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Back\_15mm\_Ch58;Chain 1**

Communication System: 802.11ac; Frequency: 5290 MHz; Duty Cycle: 1:1.031

Medium: MSL\_5G\_190225 Medium parameters used :  $f = 5290$  MHz;  $\sigma = 5.531$  S/m;  $\epsilon_r = 47.234$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7515; ConvF(4.96, 4.96, 4.96) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x101x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.0912 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 2.522 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.325 W/kg

**SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.012 W/kg**

Maximum value of SAR (measured) = 0.112 W/kg

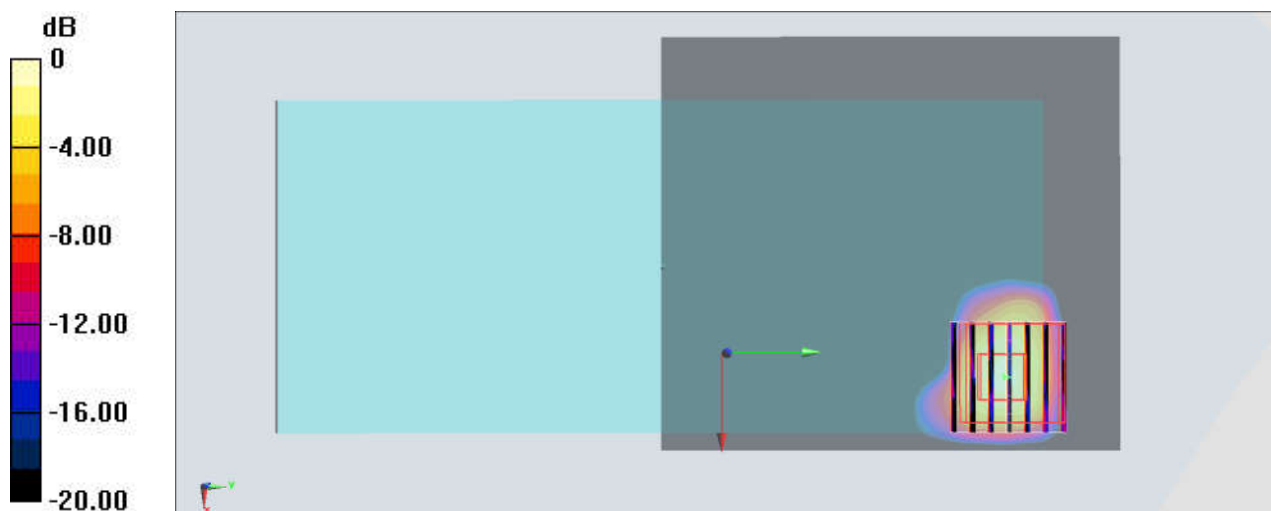

0 dB = 0.112 W/kg = -9.51 dBW/kg

**#46\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Back\_15mm\_Ch122;Chain 1**

Communication System: 802.11ac ; Frequency: 5610 MHz;Duty Cycle: 1:1.031

Medium: MSL\_5G\_190301 Medium parameters used :  $f = 5610$  MHz;  $\sigma = 5.994$  S/m;  $\epsilon_r = 46.968$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7515; ConvF(4.39, 4.39, 4.39) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.509 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.016 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.691 W/kg

**SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.037 W/kg**

Maximum value of SAR (measured) = 0.316 W/kg

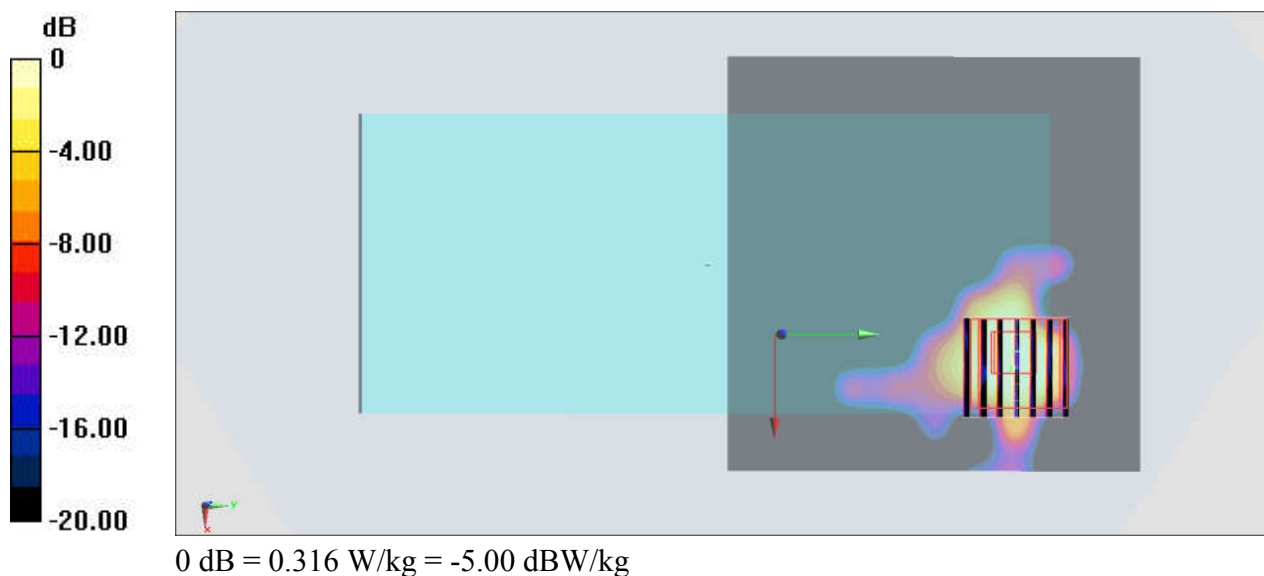

**#47\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Back\_15mm\_Ch155;Chain 1**

Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.031

Medium: MSL\_5G\_190225 Medium parameters used:  $f = 5775$  MHz;  $\sigma = 6.184$  S/m;  $\epsilon_r = 46.371$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7515; ConvF(4.42, 4.42, 4.42) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x101x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.524 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 0.7360 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.617 W/kg

**SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.044 W/kg**

Maximum value of SAR (measured) = 0.384 W/kg

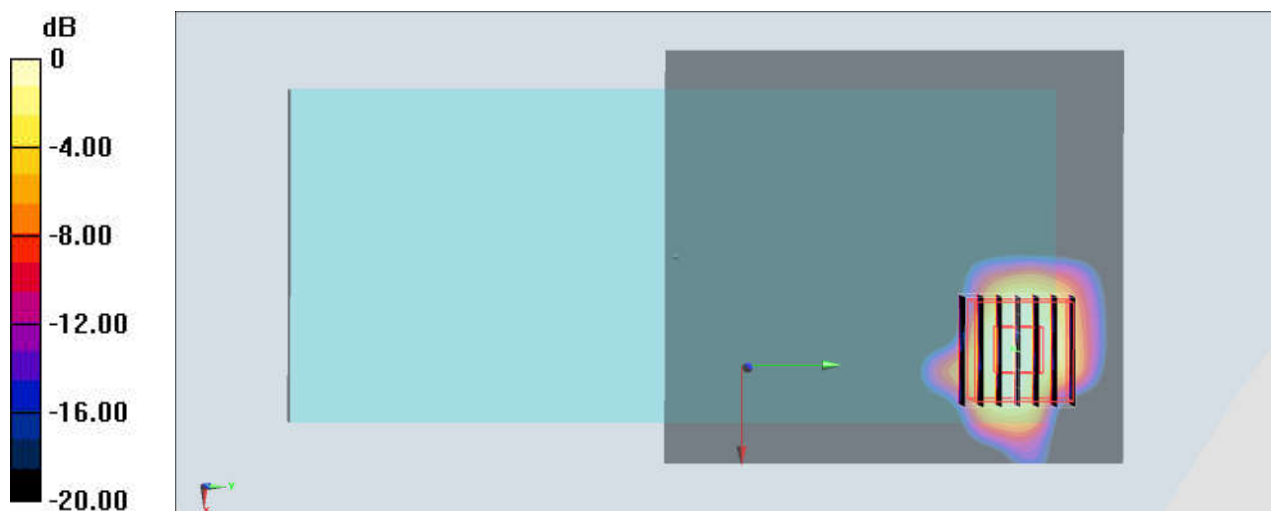

0 dB = 0.384 W/kg = -4.16 dBW/kg

**#48\_Bluetooth\_1Mbps\_Back\_15mm\_Ch39**

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.301

Medium: MSL\_2450\_190303 Medium parameters used :  $f = 2441$  MHz;  $\sigma = 1.985$  S/m;  $\epsilon_r = 51.372$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3976; ConvF(7.71, 7.71, 7.71) ; Calibrated: 2019/1/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2018/5/25
- Phantom: SAM\_Right; Type: QD000P40CD; Serial: S/N:1796
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0294 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.128 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0300 W/kg

**SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00873 W/kg**

Maximum value of SAR (measured) = 0.0232 W/kg

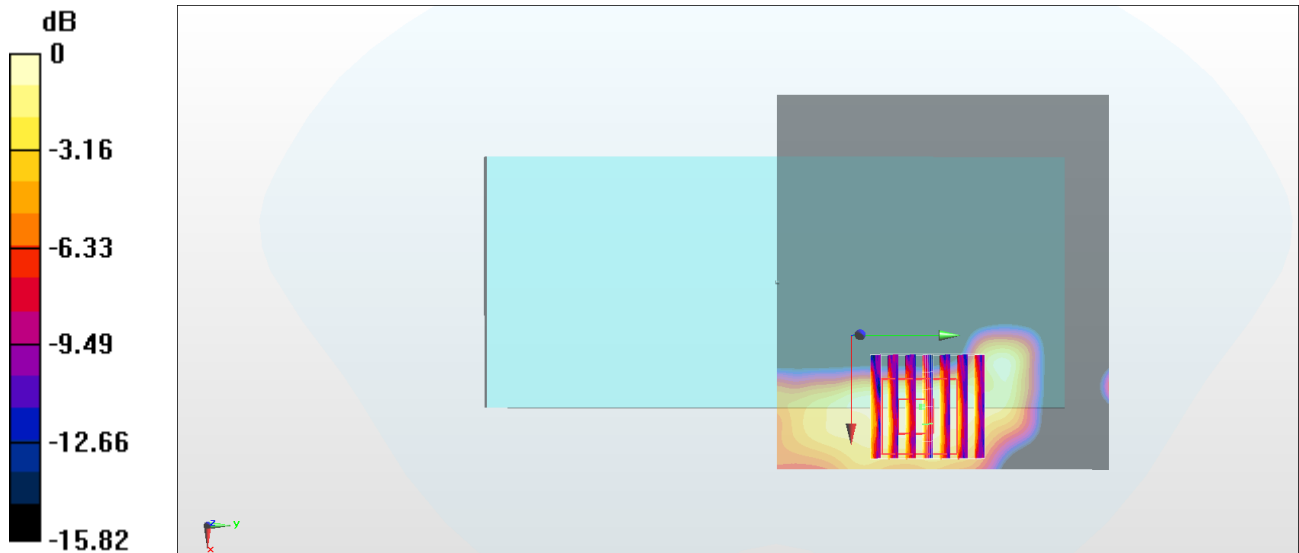

**#49\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Back\_0mm\_Ch58;Chain 0**

Communication System: 802.11ac; Frequency: 5290 MHz; Duty Cycle: 1:1.031

Medium: MSL\_5G\_190225 Medium parameters used:  $f = 5290$  MHz;  $\sigma = 5.531$  S/m;  $\epsilon_r = 47.234$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7515; ConvF(4.96, 4.96, 4.96) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 7.99 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.963 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 21.3 W/kg

**SAR(1 g) = 2.59 W/kg; SAR(10 g) = 0.440 W/kg**

Maximum value of SAR (measured) = 10.3 W/kg

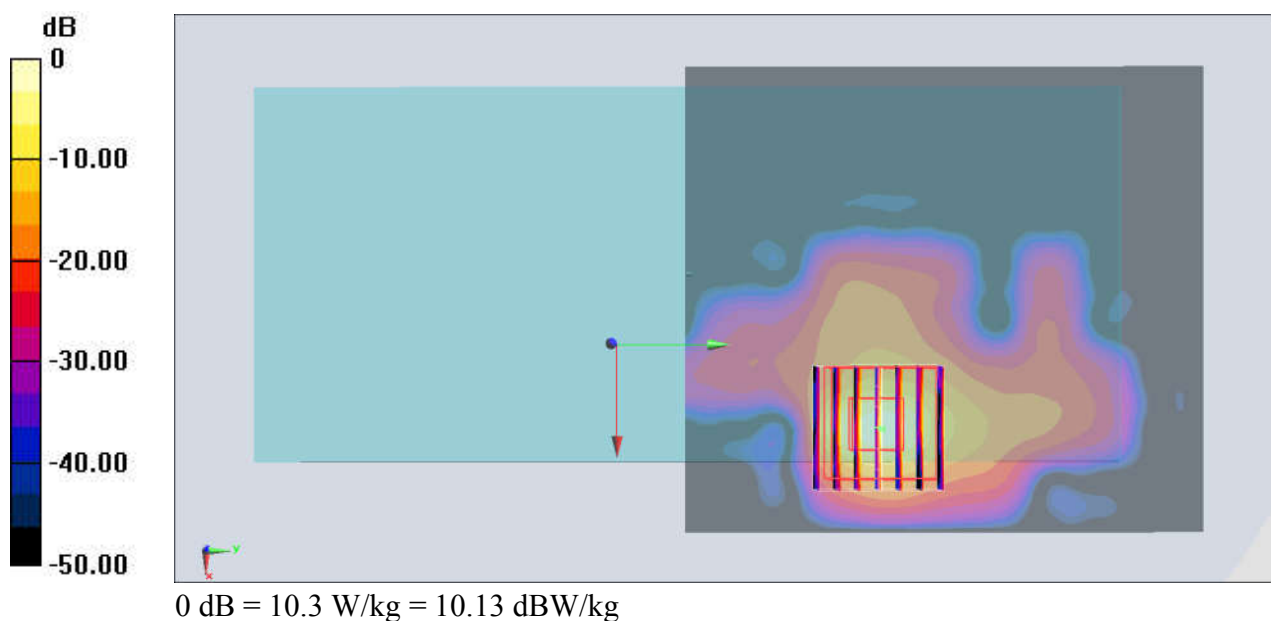

**#50\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Back\_0mm\_Ch122;Chain 1**

Communication System: 802.11ac ; Frequency: 5610 MHz;Duty Cycle: 1:1.031

Medium: MSL\_5G\_190301 Medium parameters used :  $f = 5610$  MHz;  $\sigma = 5.994$  S/m;  $\epsilon_r = 46.968$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7515; ConvF(4.39, 4.39, 4.39) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x101x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 9.75 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 4.697 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 20.1 W/kg

**SAR(1 g) = 3.4 W/kg; SAR(10 g) = 0.668 W/kg**

Maximum value of SAR (measured) = 11.5 W/kg

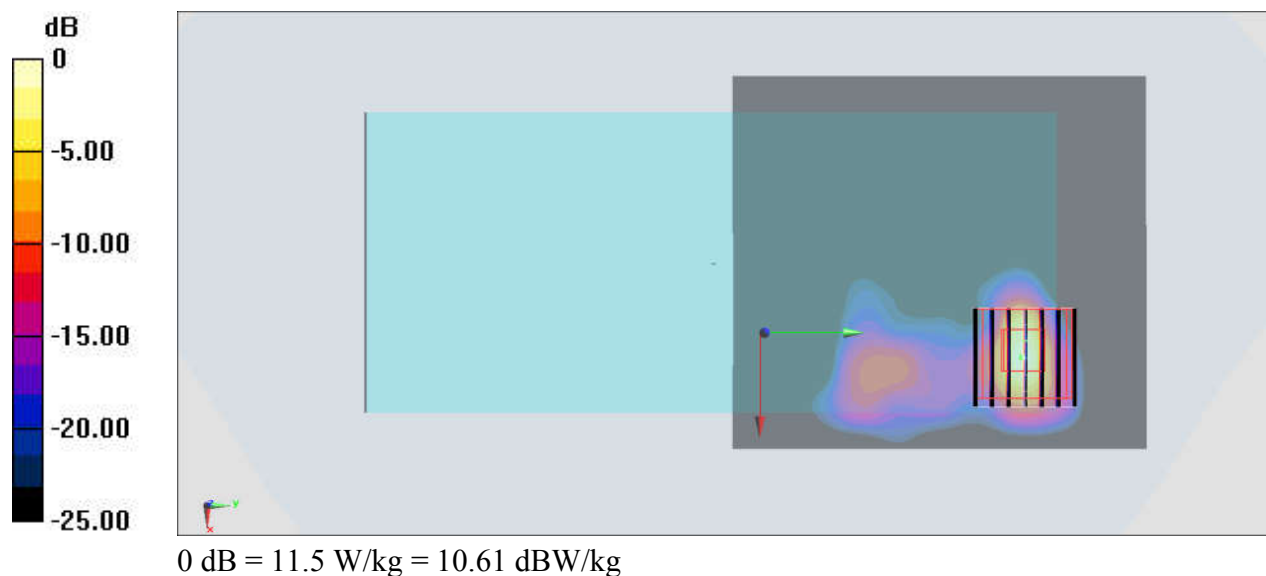

**#51\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Back\_0mm\_Ch155;Chain 1**

Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.031

Medium: MSL\_5G\_190225 Medium parameters used:  $f = 5775$  MHz;  $\sigma = 6.184$  S/m;  $\epsilon_r = 46.371$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7515; ConvF(4.42, 4.42, 4.42) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 11.7 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 22.1 W/kg

**SAR(1 g) = 3.29 W/kg; SAR(10 g) = 0.634 W/kg**

Maximum value of SAR (measured) = 12.5 W/kg

