



FCC RADIO TEST REPORT

FCC ID : PY7-30515Z
Equipment : GSM/WCDMA/LTE/NR Phone with BT, DTS/UNII
a/b/g/n/ac/ax/be, NFC, GNSS and WPT
Brand Name : Sony
Applicant : Sony Corporation
1-7-1 Konan, Minato-ku , Tokyo, Japan 108-0075
Manufacturer : Sony Corporation
1-7-1 Konan, Minato-ku , Tokyo, Japan 108-0075
Standard : FCC Part 15 Subpart C §15.247

The product was received on Nov. 27, 2025 and testing was performed from Dec. 04, 2025 to Jan. 29, 2026. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 Number of Channel Measurement	11
3.2 Hopping Channel Separation Measurement	12
3.3 Dwell Time Measurement.....	13
3.4 20dB and 99% Bandwidth Measurement	14
3.5 Output Power Measurement.....	15
3.6 Conducted Band Edges Measurement.....	16
3.7 Conducted Spurious Emission Measurement	17
3.8 Radiated Band Edges and Spurious Emission Measurement	18
3.9 AC Conducted Emission Measurement.....	23
3.10 Antenna Requirements.....	25
4 List of Measuring Equipment	26
5 Measurement Uncertainty	28
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Result	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR5N1805K	01	Initial issue of report	Mar. 12, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Pass	-
3.5	15.247(b)(1) 15.247(b)(4)	Peak Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	-
3.9	15.207	AC Conducted Emission	Pass	-
3.10	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Vina Su

1 General Description

1.1 Product Feature of Equipment Under Test

Product Specification subject to this standard	
General Specs	GSM/WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, and BDS/Galileo/GLONASS/GPS/NFC/WPT
Antenna Type	WWAN: LOOP&PIFA Antenna WLAN: LOOP&PIFA Antenna Bluetooth: LOOP&PIFA Antenna GPS / Glonass / BDS / Galileo: LOOP Antenna

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	<Ant. 5>: -2.1 <Ant. 8>: -3.7

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	0.198	MATA28000616	RF conducted measurement
	0.198	MATA28000197	Radiated Spurious Emission
	0.198	MATA28000176	AC Conducted Emission

Specification of Accessory		
AC Adapter	Brand Name	Sony
	Model Name	XQZ-UC1
Earphone	Brand Name	Sony
	Model Name	MDR-EX15AP
USB Cable	Brand Name	Sony
	Model Name	XQZ-UB1

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 1190 and 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW1190 and TW3786

Note:

1. The test site complies with ANSI C63.4 2014 requirement.
2. The Conducted and Conduction test item subcontracted to Sporton International Inc. Wensan Laboratory.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2404	15	2432	28	2458
	2	2406	16	2434	29	2460
	3	2408	17	2436	30	2462
	4	2410	18	2438	31	2464
	5	2412	19	2440	32	2466
	6	2414	20	2442	33	2468
	7	2416	21	2444	34	2470
	8	2418	22	2446	35	2472
	9	2420	23	2448	36	2474
	10	2422	24	2450	37	2476
	11	2424	25	2452	38	2478
	13	2428	26	2454		
	14	2430	27	2456		

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst plane, and the worst mode of radiated spurious emissions is Bluetooth 6Mbps mode, and recorded in this report.

- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
Conducted Test Cases	QHS-P2 2Mbps / FHSS	QHS-P3 3Mbps / FHSS	QHS-P4 4Mbps / FHSS
	Mode 1: CH01_2404 MHz	Mode 1: CH01_2404 MHz	Mode 1: CH01_2404 MHz
	Mode 2: CH19_2440 MHz	Mode 2: CH19_2440 MHz	Mode 2: CH19_2440 MHz
	Mode 3: CH38_2478 MHz	Mode 3: CH38_2478 MHz	Mode 3: CH38_2478 MHz
	QHS-P5 5Mbps / FHSS	QHS-P6 6Mbps / FHSS	
	Mode 1: CH01_2404 MHz	Mode 1: CH01_2404 MHz	
	Mode 2: CH19_2440 MHz	Mode 2: CH19_2440 MHz	
	Mode 3: CH38_2478 MHz	Mode 3: CH38_2478 MHz	
AC Conducted Emission	Mode 1: BT Link Earphone + WLAN 2.4G Link + MPEG4 + USB Cable + Adapter		
Remark:			
1. For Radiated Test Cases, the worst mode data rate 6Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 6Mbps, and no other significantly frequencies found in conducted spurious emission.			
2. During the preliminary test, both charging modes (Adapter mode and WPT Charging mode) were verified. It is determined that the adaptor mode is the worst case for official test.			
3. The detailed Radiated test modes are shown in Appendix C.			

2.3 Connection Diagram of Test System

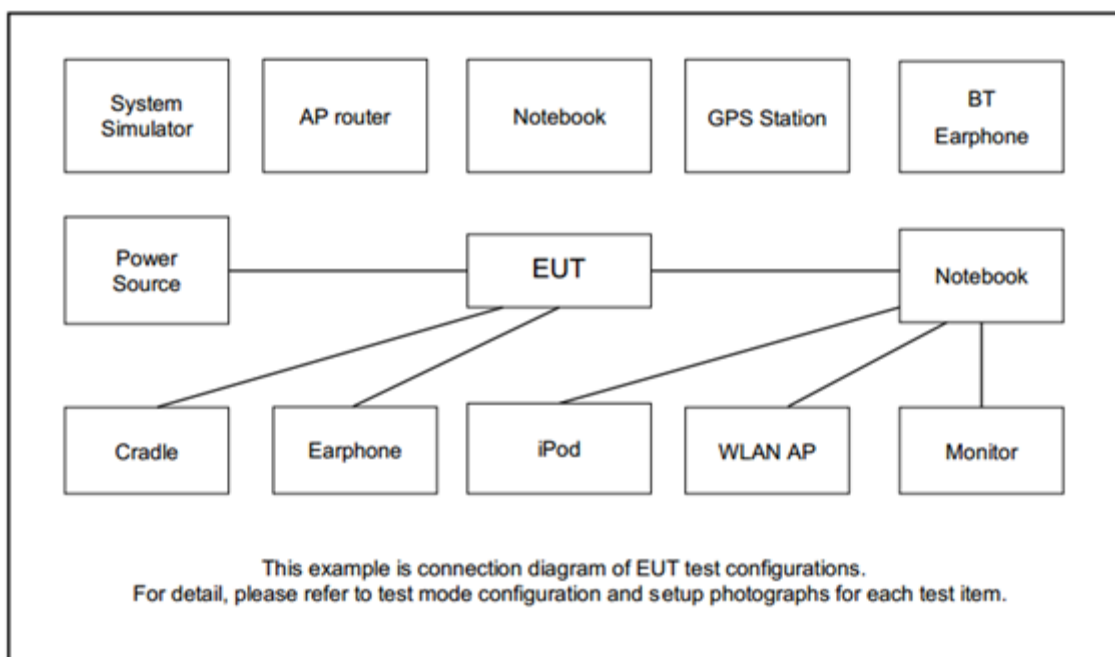

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Earphone	Sony	MDR-EX15AP	N/A	UnShielded, 1.2m	N/A
2.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
4.	Notebook	Dell	Latitude 3420	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m

Remark: Applicant has ensured support unit would not be attached with the product on the market, support unit is provided by lab for testing.



2.5 EUT Operation Test Setup

The RF test items, utility “QRTC v4.1 ver4.0.170.1” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10 clause 7.8.3.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300 kHz; VBW $\geq$ RBW; Sweep = No faster than coupled (auto) time; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

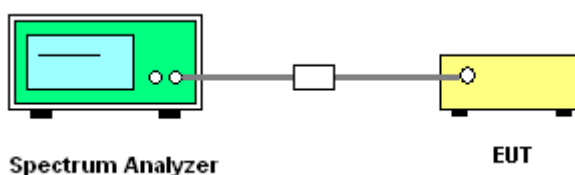

3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10 clause 7.8.2.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300 kHz; VBW $\geq$ RBW; Sweep = No faster than coupled (auto) time; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

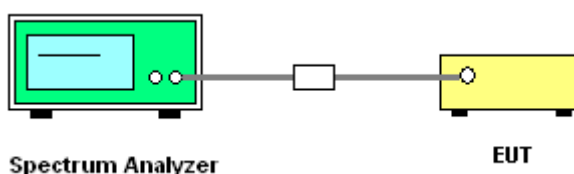

3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10 clause 7.8.4.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

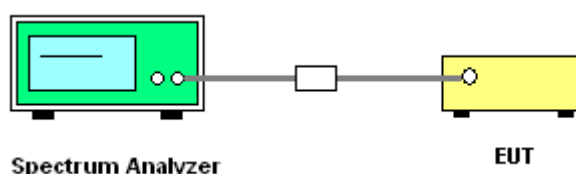

3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10 clause 6.9.2 and 6.9.3.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Use the following spectrum analyzer settings for 20 dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq 1\%$ of the 20 dB bandwidth, VBW $\geq 3 * RBW$; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW $\geq 1\text{-}5\%$ of the 99% bandwidth, VBW $\geq 3 * RBW$; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

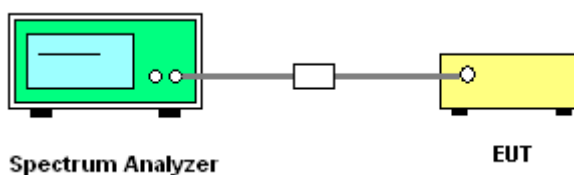

3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.

3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.
For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.
If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10 clause 7.8.5.
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

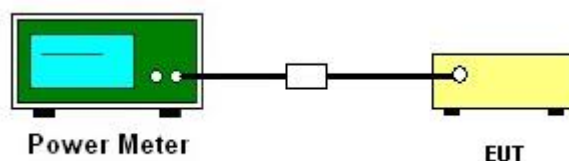

3.5.5 Test Result of Average Output Power

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10 clause 6.10.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Set RBW = 100 kHz, VBW = 300 kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2 and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

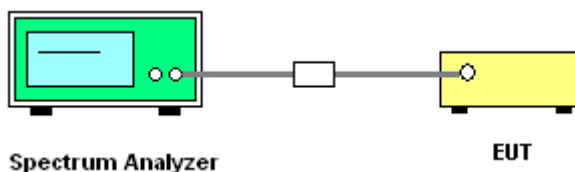

3.6.5 Test Result of Conducted Band Edges

Please refer to Appendix A.

3.6.6 Test Result of Conducted Hopping Mode Band Edges

Please refer to Appendix A.

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10 clause 7.8.7.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurious must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

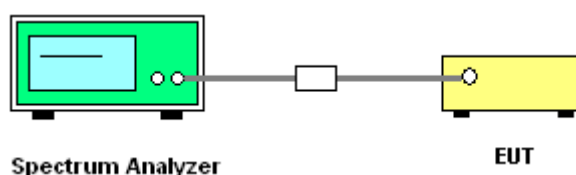

3.7.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A.

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics / spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.8.3 Test Procedures

1. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT is arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz, RBW = 1 MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 \cdot \log$ (Duty cycle)
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
8. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.


Note: The average levels are calculated from the peak level corrected with duty cycle correction factor (36.83dB) derived from $20 \log$ (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated test below 30MHz

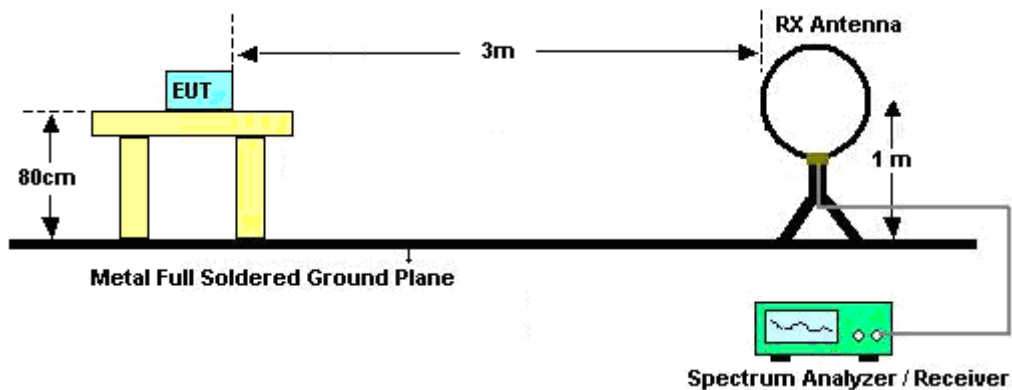


For radiated test from 30MHz to 1GHz

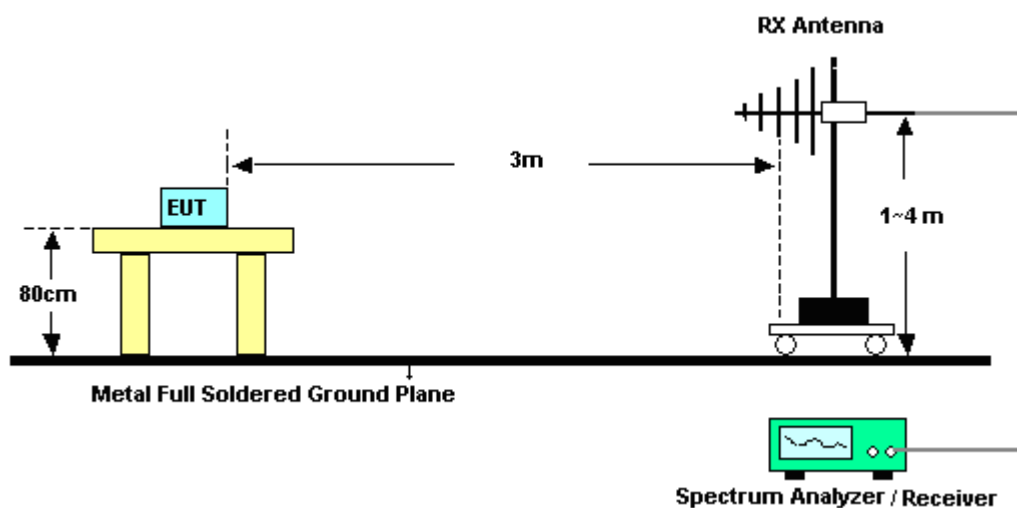

For radiated test from 1GHz to 18GHz

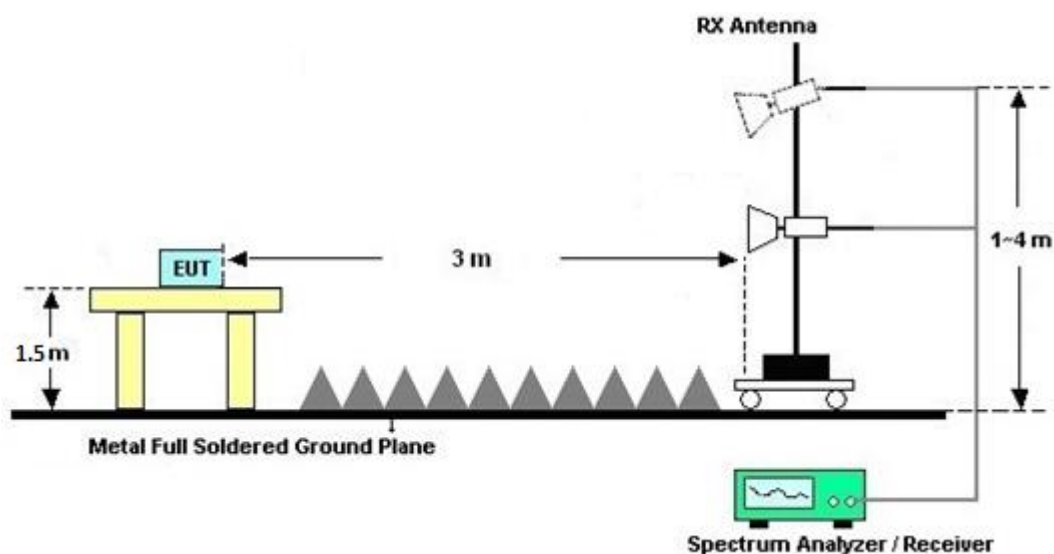

For radiated test above 18GHz

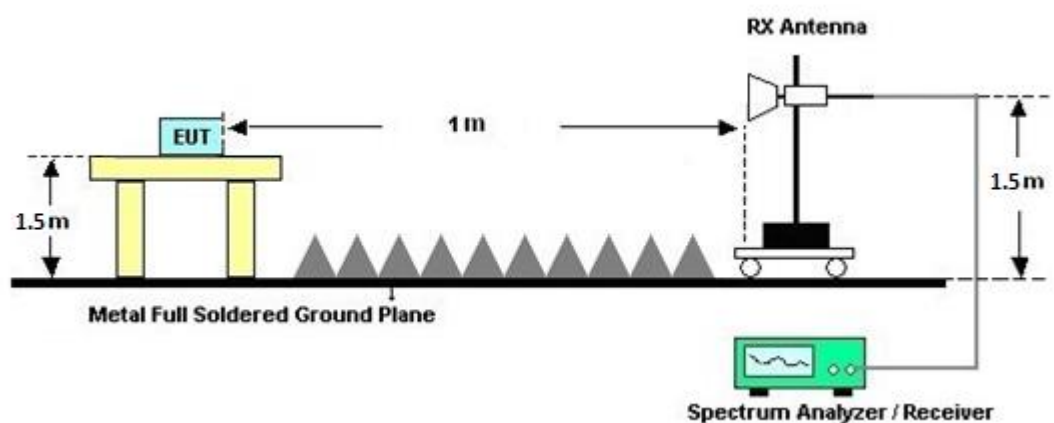

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site **v01r01**, and the result comes out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.



3.8.7 Duty Cycle

Please refer to Appendix D.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.9.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

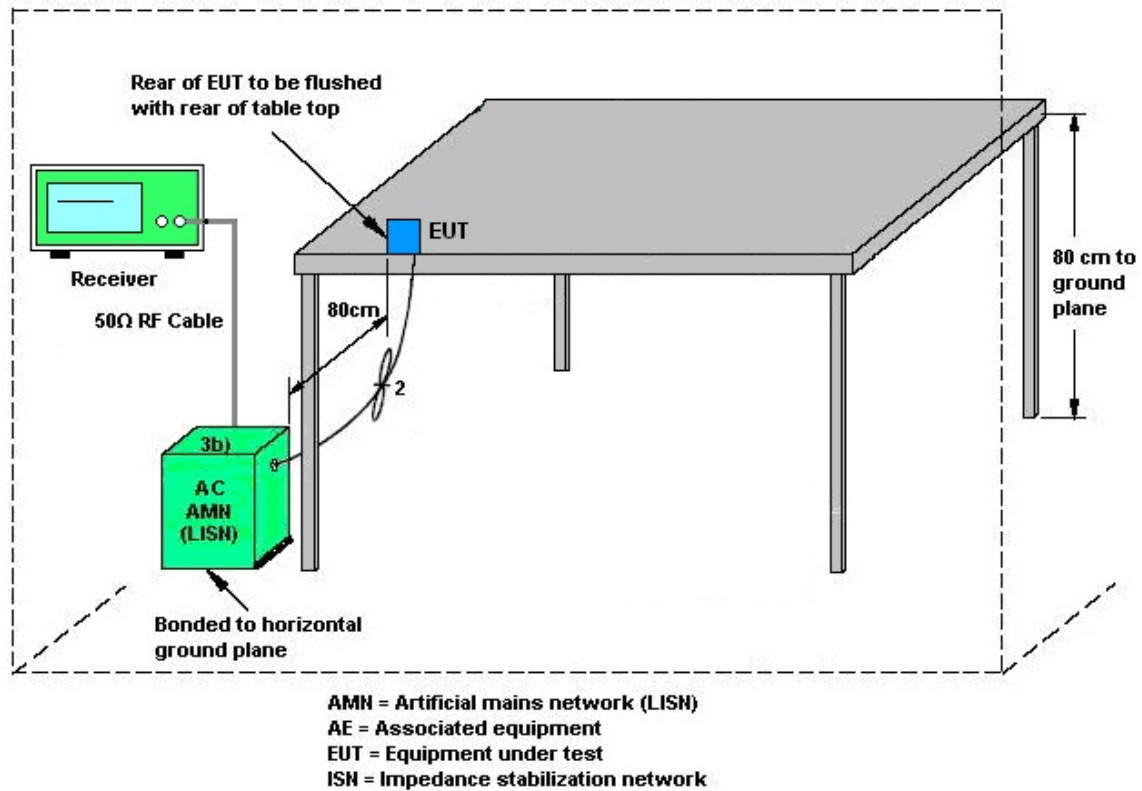

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.10.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Dec. 04, 2025~ Jan. 29, 2026	Nov. 03, 2026	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Jun. 13, 2025	Dec. 04, 2025~ Jan. 29, 2026	Jun. 12, 2026	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Jun. 13, 2025	Dec. 04, 2025~ Jan. 29, 2026	Jun. 12, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101468	10HZ~44GHZ	Mar. 13, 2025	Dec. 04, 2025~ Jan. 29, 2026	Mar. 12, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Dec. 04, 2025~ Jan. 29, 2026	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_24051 3	N/A	Conducted Other Test Item	N/A	Dec. 04, 2025~ Jan. 29, 2026	N/A	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Dec. 16, 2025	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	N/A	Oct. 21, 2025	Dec. 16, 2025	Oct. 20, 2026	Conduction (CO05-HY)
Hygrometer	TECPEL	DTM-303A	TP210031	N/A	Jun. 26, 2025	Dec. 16, 2025	Jun. 25, 2026	Conduction (CO05-HY)
Two-Line V- Network	Rohde & Schwarz	ENV216	100081	N/A	Jul. 25, 2025	Dec. 16, 2025	Jul. 24, 2026	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Dec. 16, 2025	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 29, 2025	Dec. 16, 2025	Jul. 28, 2026	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	MQT2408250 1	N/A	Oct. 14, 2025	Dec. 16, 2025	Oct. 13, 2026	Conduction (CO05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35419 & 03	30MHz~1GHz	Apr. 21, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Apr. 20, 2026	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Mar. 06, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Mar. 05, 2026	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00101800-30-10P	1590075	1GHz~18GHz	Apr. 18, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Apr. 17, 2026	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Sep. 30, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Sep. 29, 2026	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Mar. 22, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Mar. 21, 2026	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Aug. 08, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Aug. 07, 2026	Radiation (03CH07-HY)
Signal Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 28, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Mar. 27, 2026	Radiation (03CH07-HY)
Double Ridged Guide Horn Antenna	ETS-Lindgren	3117	00075962	1GHz ~ 18GHz	Dec. 09, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Dec. 08, 2026	Radiation (03CH07-HY)
Double Ridged Guide Horn Antenna	ETS-Lindgren	3117	00066584	1GHz~18GHz	Dec. 20, 2024	Dec. 15, 2025 ~ Jan. 13, 2026	Dec. 19, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4 MY15682/4	30MHz to 18GHz	Feb. 20, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Feb. 19, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4	9kHz to 30MHz	Feb. 20, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Feb. 19, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 13, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Sep. 12, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 20, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Feb. 19, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 23, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Apr. 22, 2026	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Dec. 15, 2025 ~ Jan. 13, 2026	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Dec. 15, 2025 ~ Jan. 13, 2026	N/A	Radiation (03CH07-HY)
Antenna Mast	MF	MF-7802	N/A	Control Turn table	N/A	Dec. 15, 2025 ~ Jan. 13, 2026	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Dec. 15, 2025 ~ Jan. 13, 2026	N/A	Radiation (03CH07-HY)
Attenuator	HONOVA	5910 SMA-50-005-19-NE	ATT-36	30MHz~18GHz	Feb. 11, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Feb. 10, 2026	Radiation (03CH07-HY)
Software	Audix	E3	RK-002396	N/A	N/A	Dec. 15, 2025 ~ Jan. 13, 2026	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	Feb. 24, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	Feb. 23, 2026	Radiation (03CH07-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	00991	18GHz~40GHz	May. 29, 2025	Dec. 15, 2025 ~ Jan. 13, 2026	May. 28, 2026	Radiation (03CH07-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Derek Hsu	Temperature:	21~25	°C
Test Date:	2025/12/04~2026/01/29	Relative Humidity:	51~54	%

<ANT5>

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
QHS	2Mbps	1	1	2404	2.554	2.372	2.084	1.7027	Pass
QHS	2Mbps	1	19	2440	2.555	2.370	2.790	1.7033	Pass
QHS	2Mbps	1	38	2478	2.563	2.369	2.813	1.7087	Pass
QHS	3Mbps	1	1	2404	2.569	2.369	1.968	1.7127	Pass
QHS	3Mbps	1	19	2440	2.568	2.371	1.933	1.7120	Pass
QHS	3Mbps	1	38	2478	2.545	2.372	1.922	1.6967	Pass
QHS	4Mbps	1	1	2404	2.624	2.369	2.825	1.7490	Pass
QHS	4Mbps	1	19	2440	2.624	2.367	1.968	1.7490	Pass
QHS	4Mbps	1	38	2478	2.623	2.367	2.061	1.7487	Pass
QHS	5Mbps	1	1	2404	2.562	2.363	2.188	1.7080	Pass
QHS	5Mbps	1	19	2440	2.558	2.364	1.991	1.7050	Pass
QHS	5Mbps	1	38	2478	2.559	2.363	2.096	1.7057	Pass
QHS	6Mbps	1	1	2404	2.560	2.369	2.709	1.7067	Pass
QHS	6Mbps	1	19	2440	2.533	2.373	2.061	1.6887	Pass
QHS	6Mbps	1	38	2478	2.535	2.373	2.096	1.6897	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time (hops)	Dwell Time (sec)	Limits (sec)	Pass/Fail
QHS(2Mbps)	37	677.000	0.33	0.4	Pass
QHS(3Mbps)	37	617.000	0.30	0.4	Pass
QHS(4Mbps)	37	680.000	0.34	0.4	Pass
QHS(5Mbps)	37	575.000	0.28	0.4	Pass
QHS(6Mbps)	37	501.000	0.25	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

QHS	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result	Setting
2Mbps	1	1	15.01	20.97	Pass	11.0
	19	1	15.30	20.97	Pass	
	38	1	15.51	20.97	Pass	
3Mbps	1	1	15.05	20.97	Pass	11.0
	19	1	15.40	20.97	Pass	
	38	1	15.61	20.97	Pass	
4Mbps	1	1	15.12	20.97	Pass	11.0
	19	1	15.41	20.97	Pass	
	38	1	15.59	20.97	Pass	
5Mbps	1	1	15.96	20.97	Pass	11.0
	19	1	16.20	20.97	Pass	
	38	1	16.47	20.97	Pass	
6Mbps	1	1	15.96	20.97	Pass	11.0
	19	1	16.11	20.97	Pass	
	38	1	16.49	20.97	Pass	

TEST RESULTS DATA**Average Power Table
(Reporting Only)**

QHS	CH.	NTX	Average Power (dBm)	Duty Factor (dB)	Setting
2Mbps	1	1	12.09	1.28	11.00
	19	1	12.38	1.28	
	38	1	12.40	1.28	
3Mbps	1	1	12.14	1.92	11.00
	19	1	12.48	1.92	
	38	1	12.53	1.92	
4Mbps	1	1	12.15	1.67	11.00
	19	1	12.44	1.67	
	38	1	12.52	1.67	
5Mbps	1	1	12.24	2.60	11.00
	19	1	12.42	2.60	
	38	1	12.54	2.60	
6Mbps	1	1	12.12	3.36	11.00
	19	1	12.56	3.36	
	38	1	12.62	3.36	

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
39	37	> 15	Pass

<ANT8>

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
QHS	2Mbps	1	1	2404	2.554	2.369	1.841	1.7023	Pass
QHS	2Mbps	1	19	2440	2.555	2.369	1.922	1.7033	Pass
QHS	2Mbps	1	38	2478	2.558	2.370	1.933	1.7050	Pass
QHS	3Mbps	1	1	2404	2.545	2.370	2.038	1.6967	Pass
QHS	3Mbps	1	19	2440	2.543	2.371	2.755	1.6950	Pass
QHS	3Mbps	1	38	2478	2.525	2.371	2.014	1.6833	Pass
QHS	4Mbps	1	1	2404	2.622	2.368	1.945	1.7477	Pass
QHS	4Mbps	1	19	2440	2.623	2.367	1.933	1.7487	Pass
QHS	4Mbps	1	38	2478	2.624	2.367	2.107	1.7493	Pass
QHS	5Mbps	1	1	2404	2.559	2.363	2.072	1.7057	Pass
QHS	5Mbps	1	19	2440	2.559	2.363	2.825	1.7060	Pass
QHS	5Mbps	1	38	2478	2.559	2.363	2.084	1.7057	Pass
QHS	6Mbps	1	1	2404	2.554	2.368	1.991	1.7027	Pass
QHS	6Mbps	1	19	2440	2.539	2.373	2.790	1.6927	Pass
QHS	6Mbps	1	38	2478	2.535	2.372	1.968	1.6897	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time (hops)	Dwell Time (sec)	Limits (sec)	Pass/Fail
QHS(2Mbps)	37	672.000	0.33	0.4	Pass
QHS(3Mbps)	37	610.000	0.30	0.4	Pass
QHS(4Mbps)	37	681.000	0.34	0.4	Pass
QHS(5Mbps)	37	574.000	0.28	0.4	Pass
QHS(6Mbps)	37	503.000	0.25	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

QHS	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result	Setting
2Mbps	1	1	15.78	20.97	Pass	11.0
	19	1	15.74	20.97	Pass	
	38	1	15.28	20.97	Pass	
3Mbps	1	1	15.82	20.97	Pass	11.0
	19	1	15.47	20.97	Pass	
	38	1	15.36	20.97	Pass	
4Mbps	1	1	15.83	20.97	Pass	11.0
	19	1	15.48	20.97	Pass	
	38	1	15.33	20.97	Pass	
5Mbps	1	1	16.38	20.97	Pass	11.0
	19	1	16.29	20.97	Pass	
	38	1	16.07	20.97	Pass	
6Mbps	1	1	16.40	20.97	Pass	11.0
	19	1	16.34	20.97	Pass	
	38	1	16.17	20.97	Pass	

TEST RESULTS DATA**Average Power Table
(Reporting Only)**

QHS	CH.	NTX	Average Power (dBm)	Duty Factor (dB)	Setting
2Mbps	1	1	12.56	1.28	11.00
	19	1	12.46	1.28	
	38	1	12.26	1.28	
3Mbps	1	1	12.42	1.92	11.00
	19	1	12.38	1.92	
	38	1	12.28	1.92	
4Mbps	1	1	12.42	1.67	11.00
	19	1	12.29	1.67	
	38	1	12.27	1.67	
5Mbps	1	1	12.63	2.60	11.00
	19	1	12.60	2.60	
	38	1	12.35	2.60	
6Mbps	1	1	12.65	3.36	11.00
	19	1	12.64	3.36	
	38	1	12.52	3.36	

TEST RESULTS DATA**Number of Hopping Frequency**


Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
39	37	> 15	Pass




Number of TX = 1, Ant. 5 (Measured)

Number of Hopping Frequency

<QHS 2Mbps>

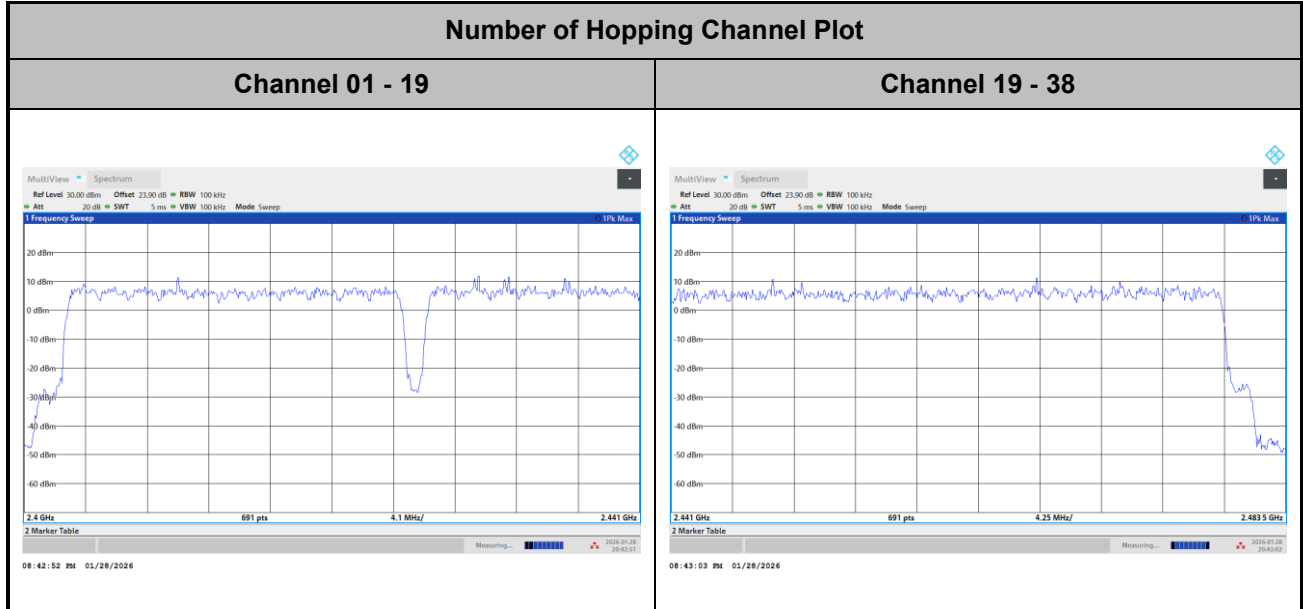


<QHS 3Mbps>

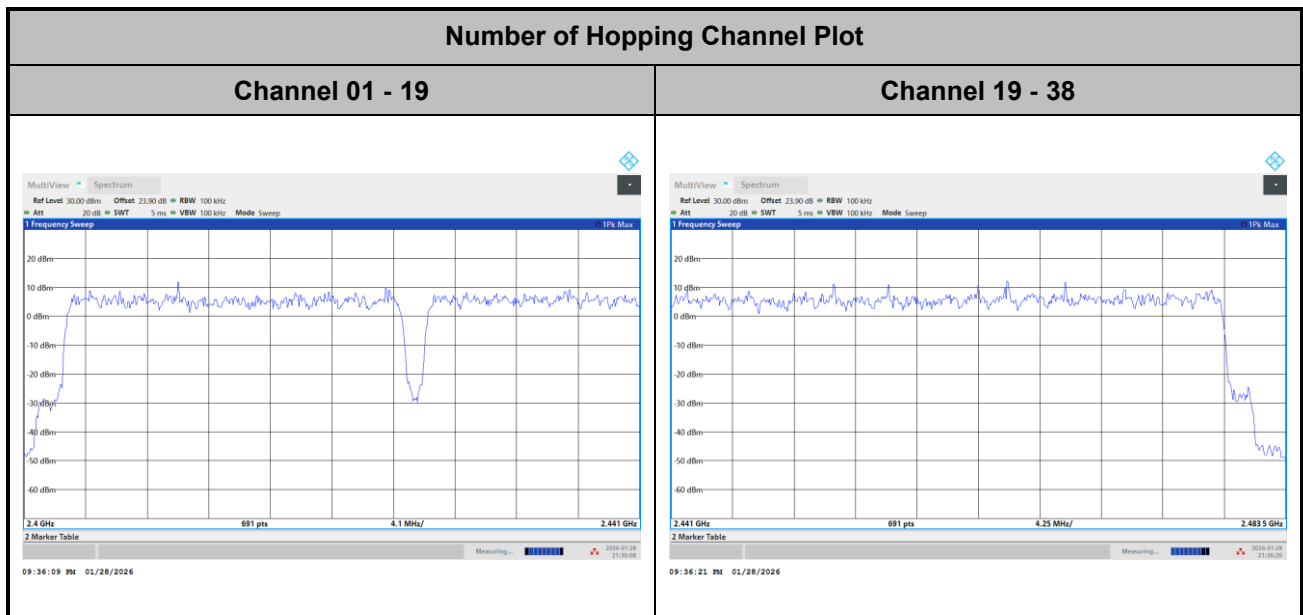




<QHS 4Mbps>

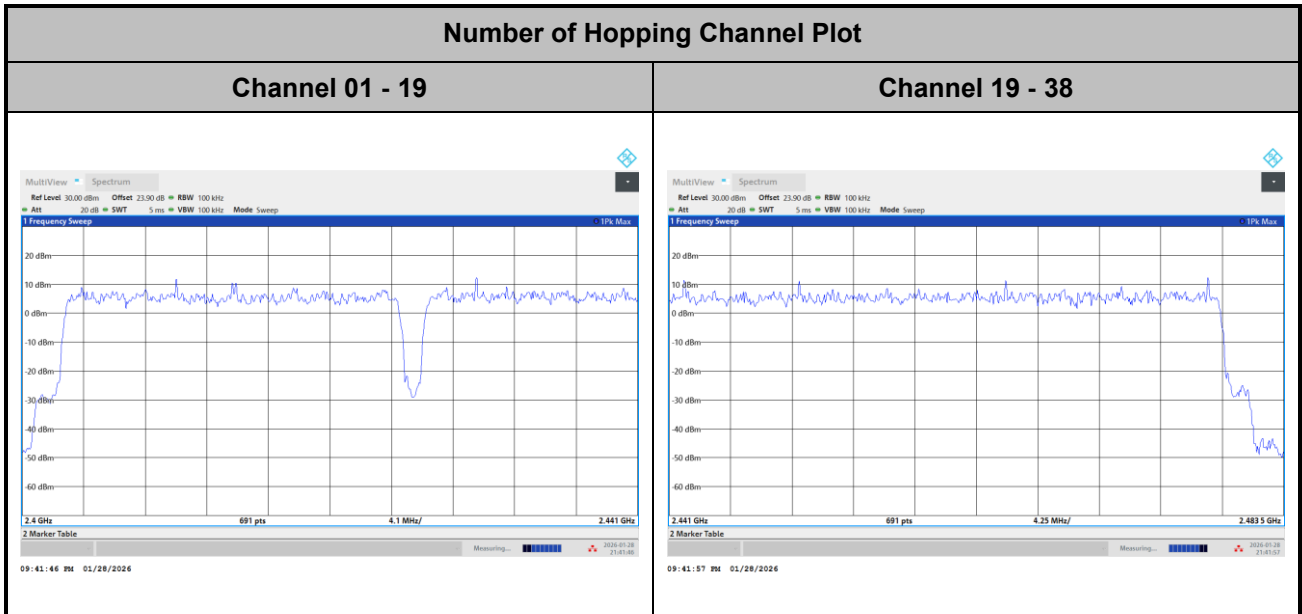


<QHS 5Mbps>

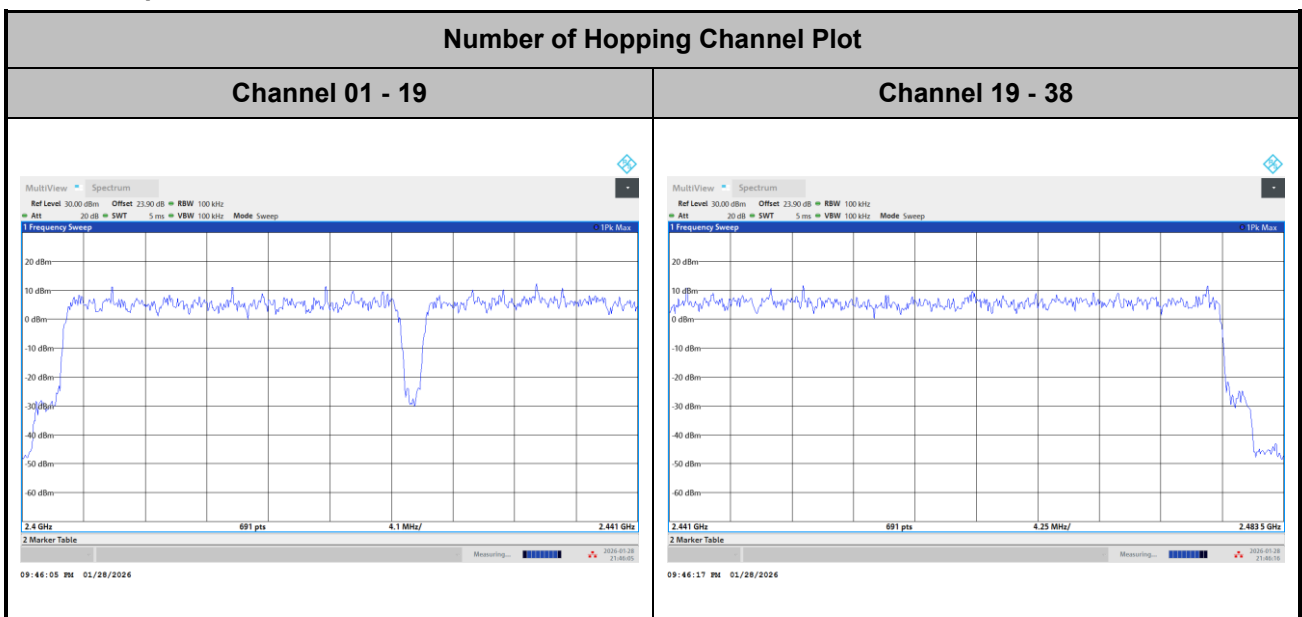






<QHS 6Mbps>

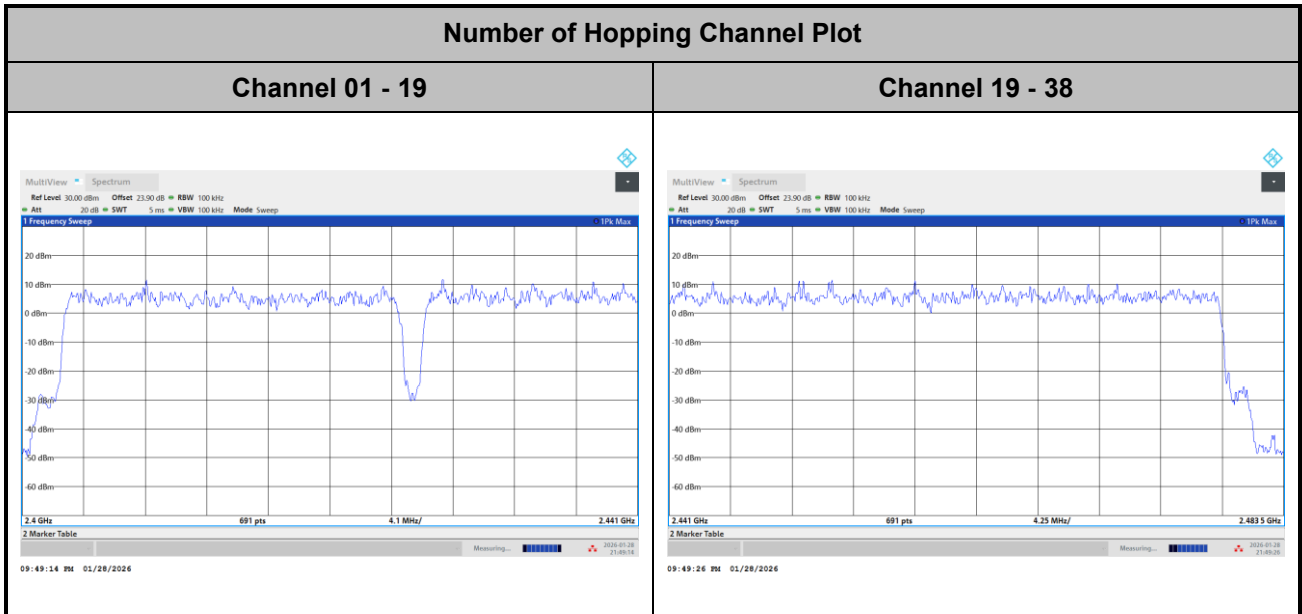

**Hopping Channel Separation**


<QHS 2Mbps>

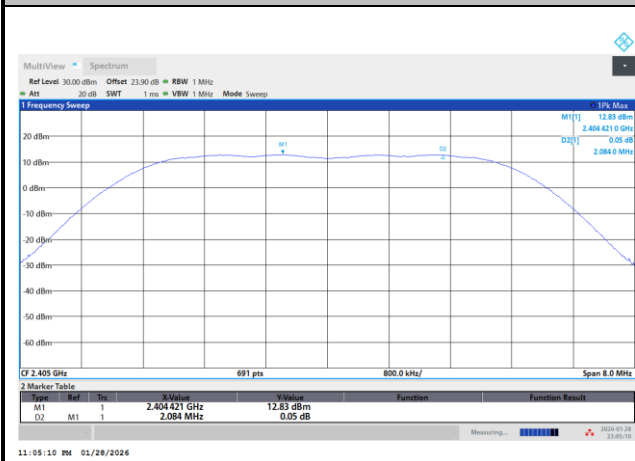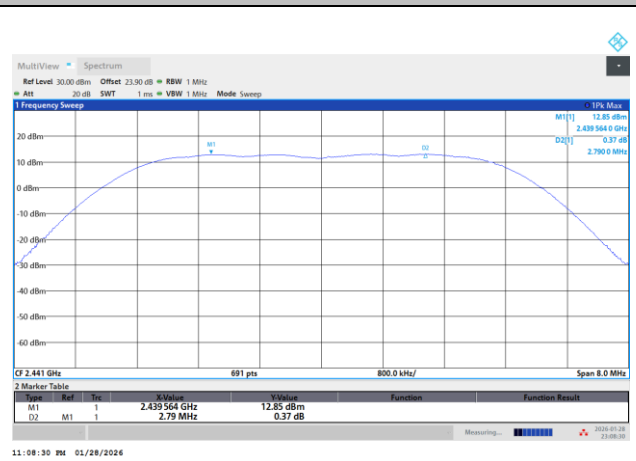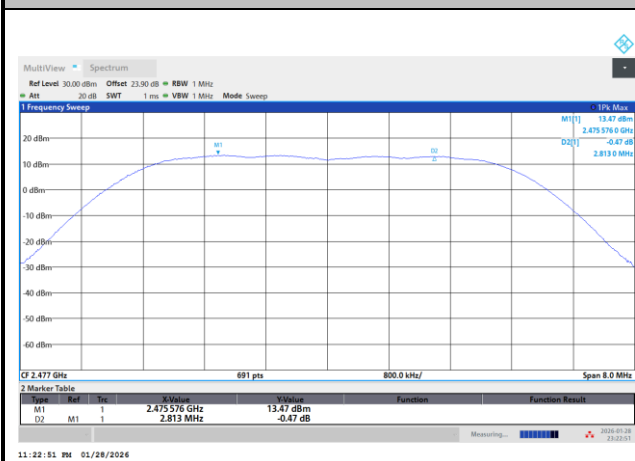Channel Separation Plot on Channel 01 - 02**Channel Separation Plot on Channel 19 - 20****Channel Separation Plot on Channel 37 - 38**




<QHS 3Mbps>


Channel Separation Plot on Channel 01 - 02

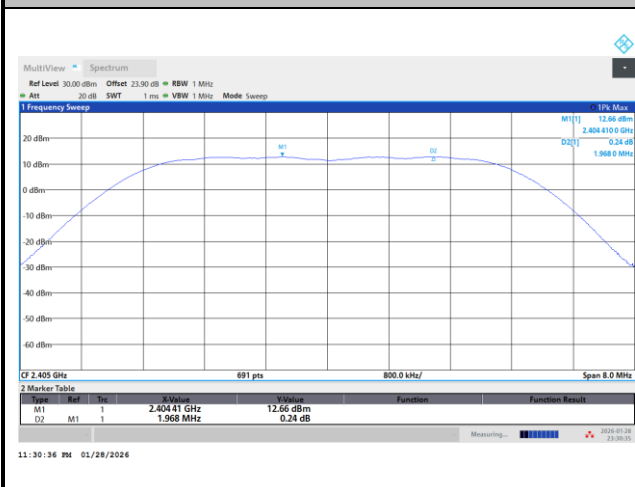

Channel Separation Plot on Channel 19 - 20

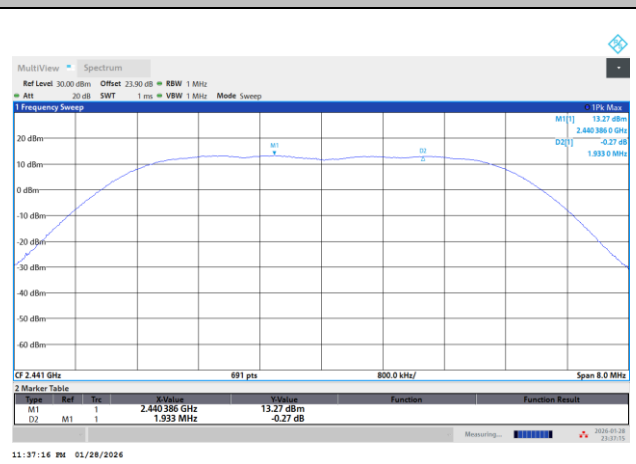


Channel Separation Plot on Channel 37 - 38

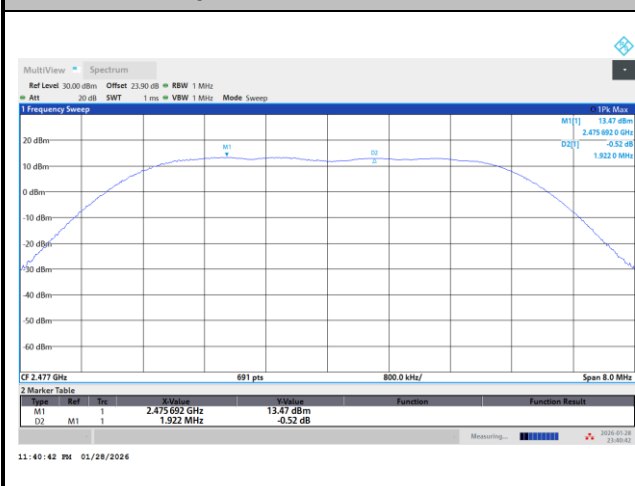




<QHS 4Mbps>


Channel Separation Plot on Channel 01 - 02

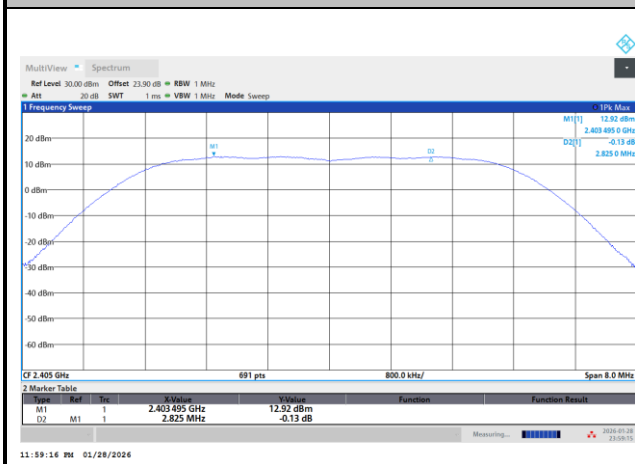

Channel Separation Plot on Channel 19 - 20

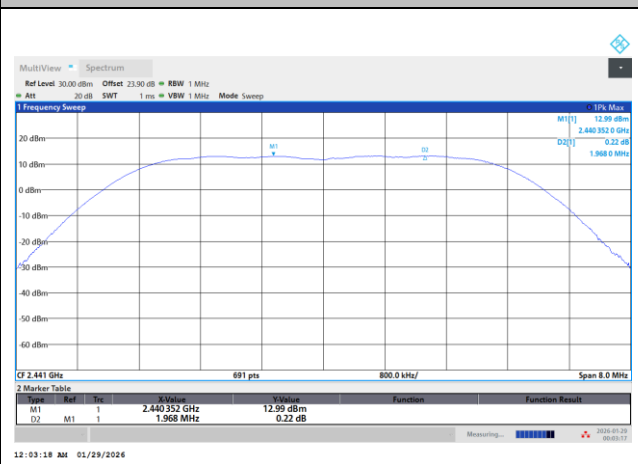


Channel Separation Plot on Channel 37 - 38

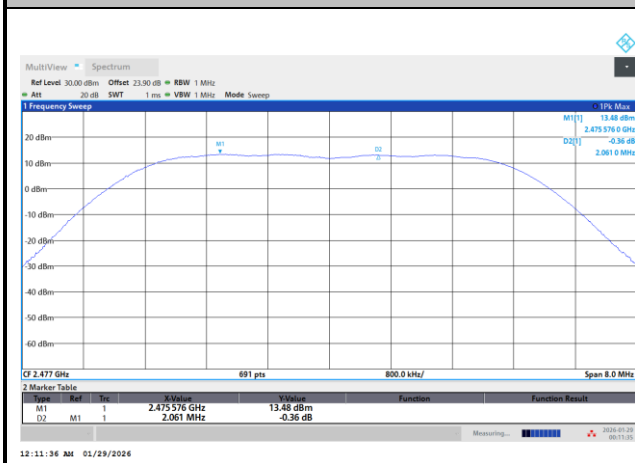




<QHS 5Mbps>


Channel Separation Plot on Channel 01 - 02

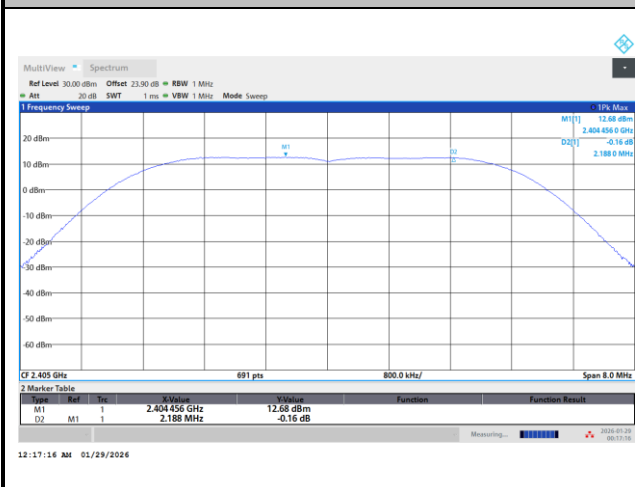

Channel Separation Plot on Channel 19 - 20

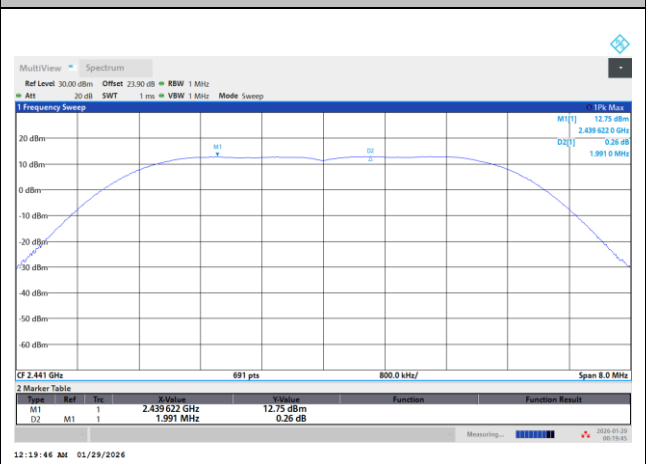


Channel Separation Plot on Channel 37 - 38

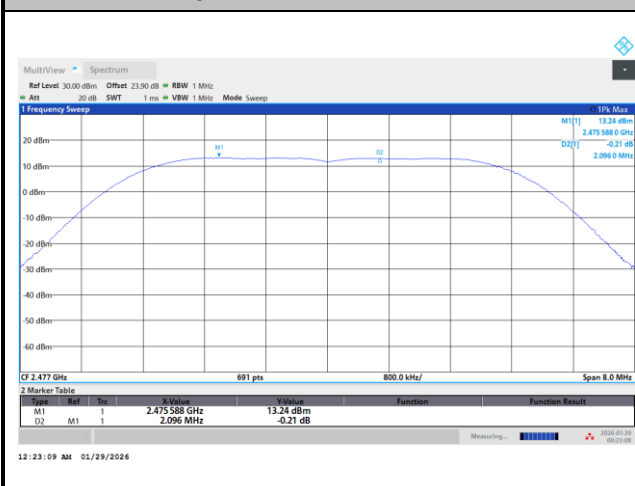




<QHS 6Mbps>


Channel Separation Plot on Channel 01 - 02

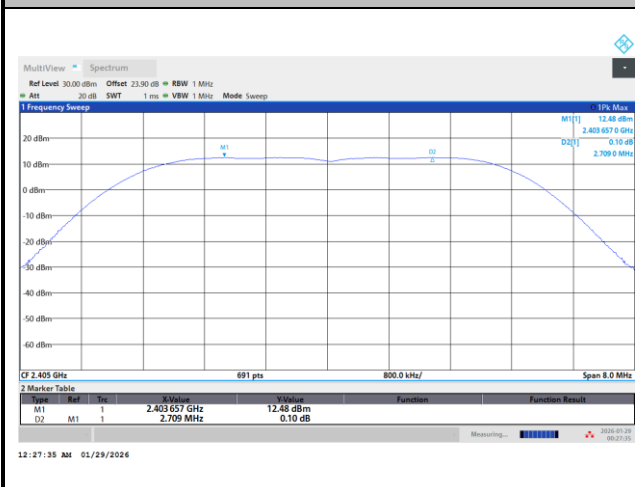

Channel Separation Plot on Channel 19 - 20

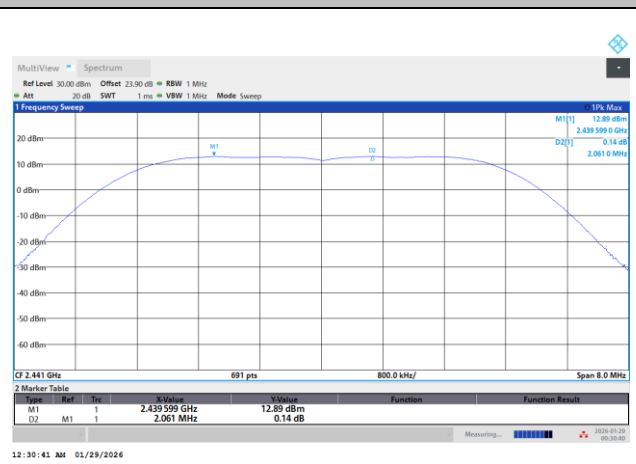


Channel Separation Plot on Channel 37 - 38

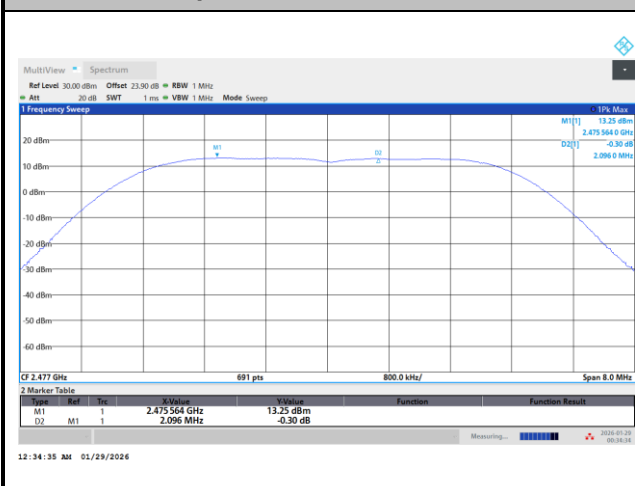


Dwell Time


<QHS 2Mbps>

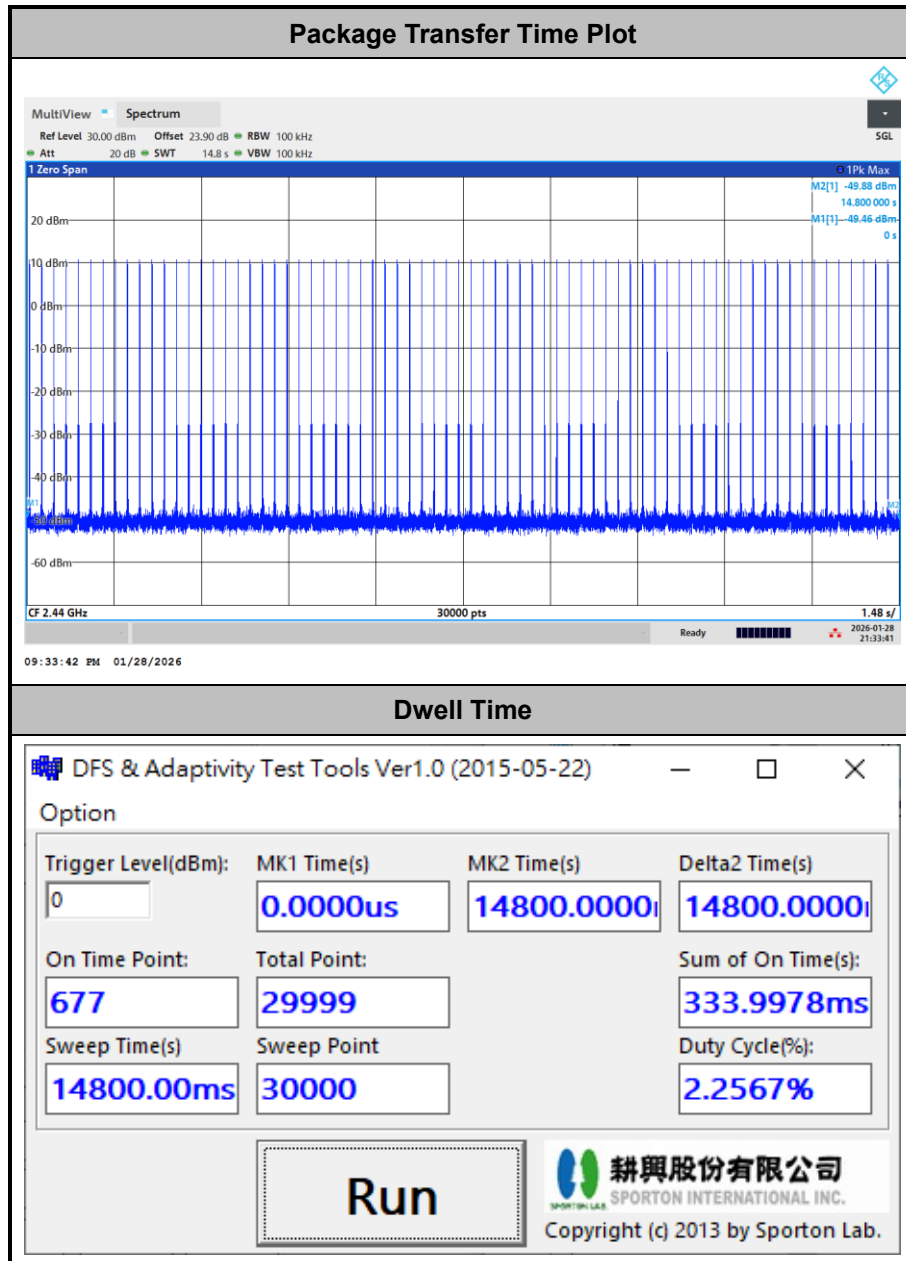


<QHS 3Mbps>

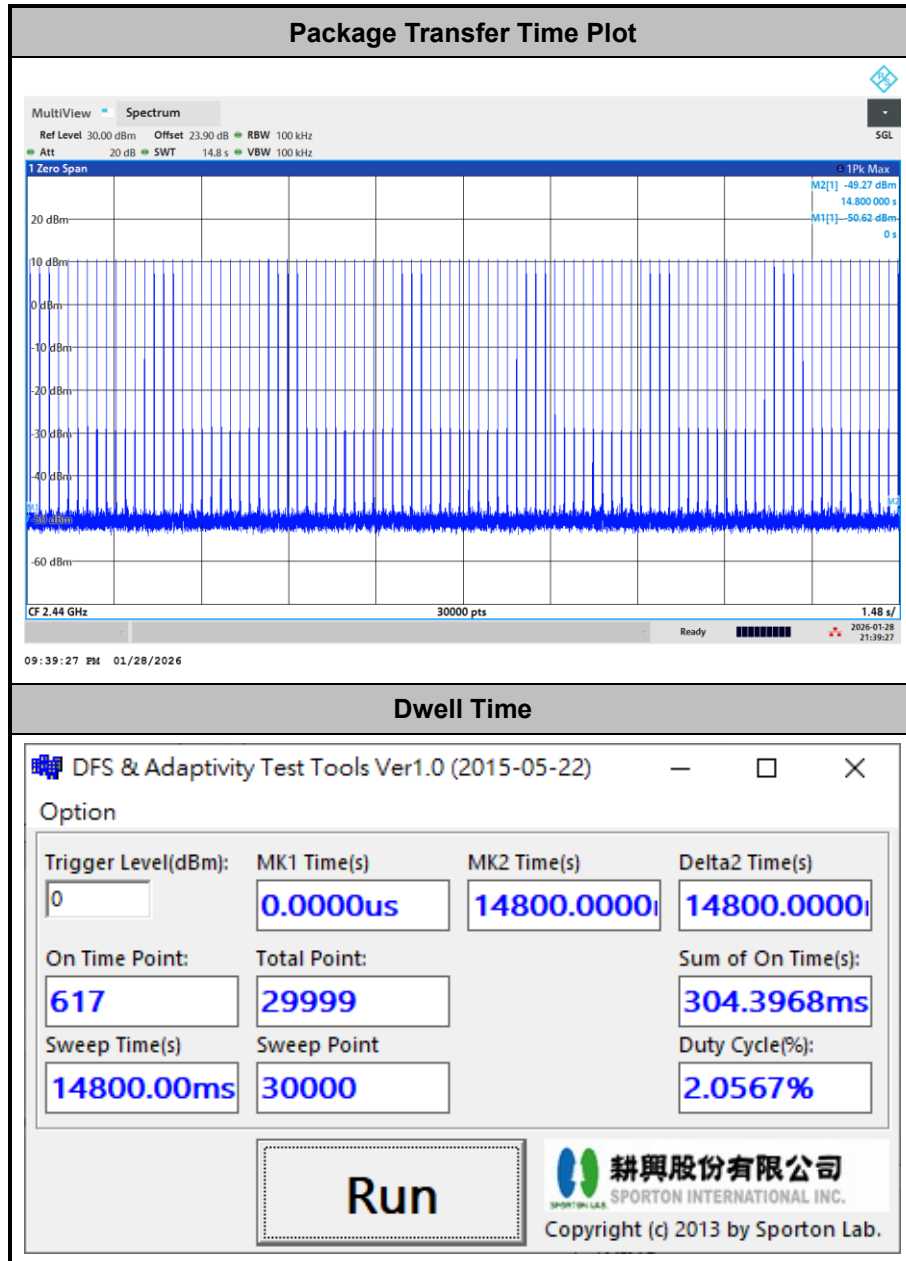


<QHS 4Mbps>

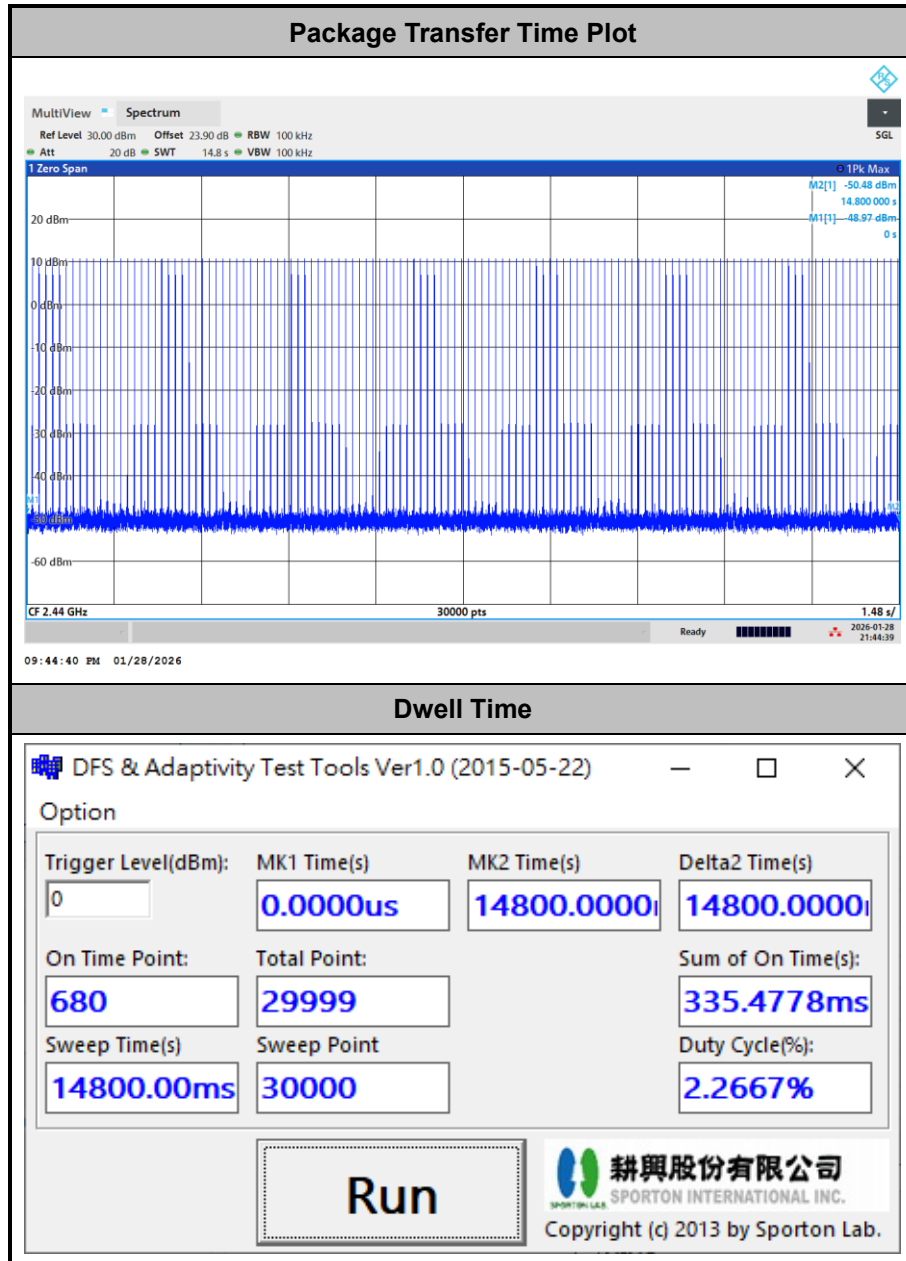

<QHS 5Mbps>



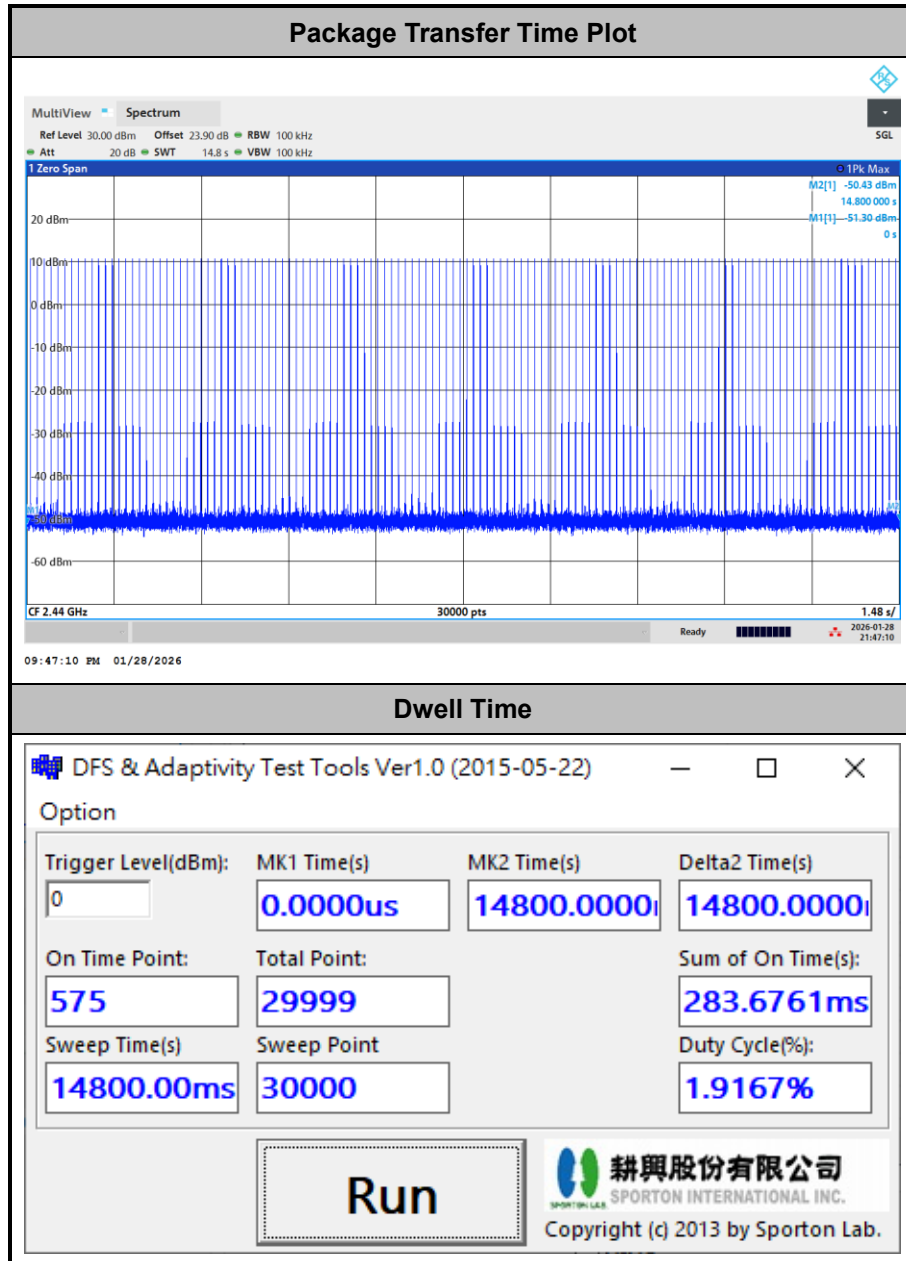


<QHS 6Mbps>

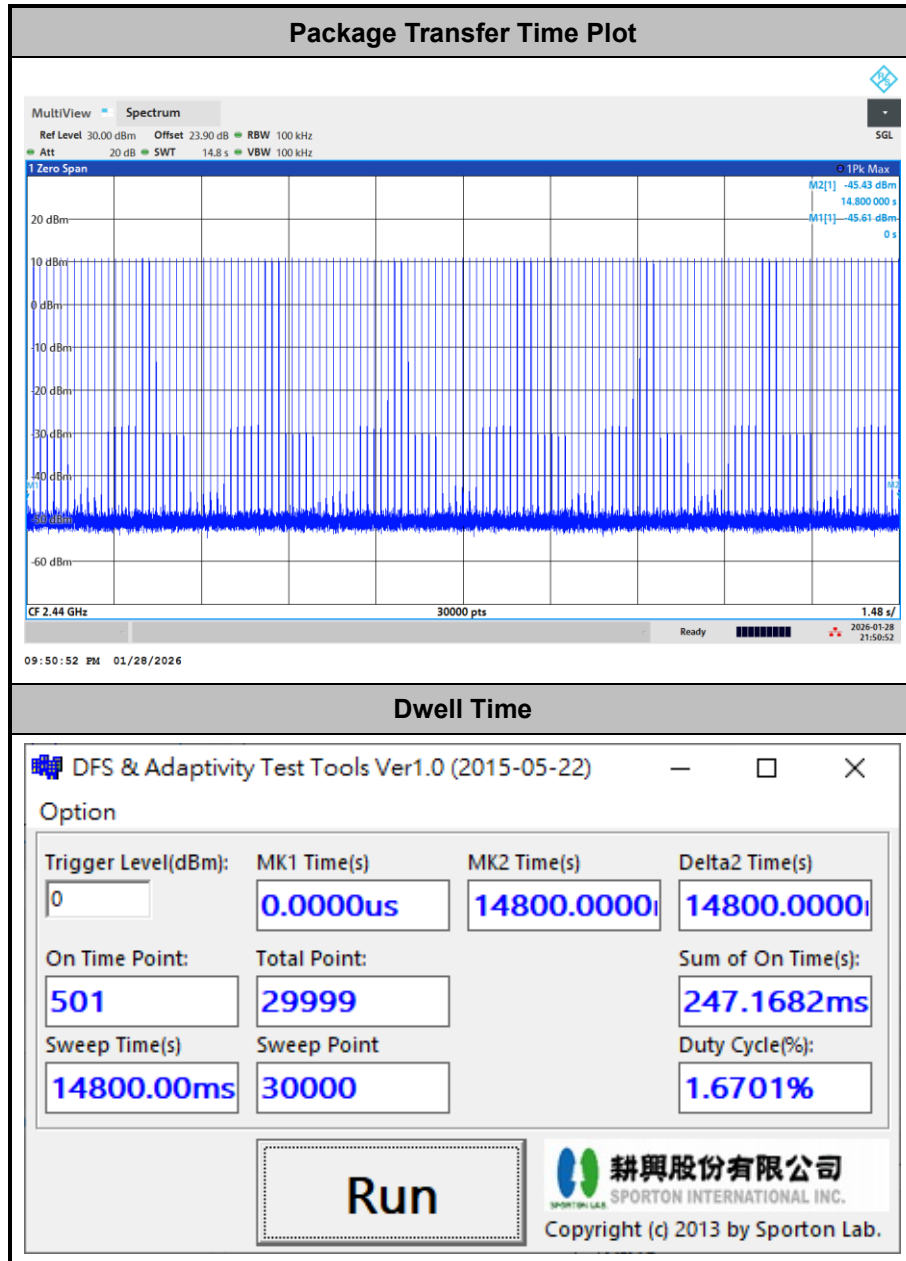

**20dB Bandwidth**


<QHS 2Mbps>

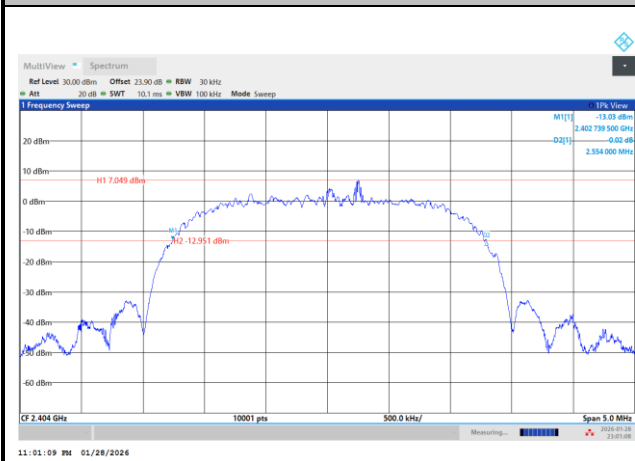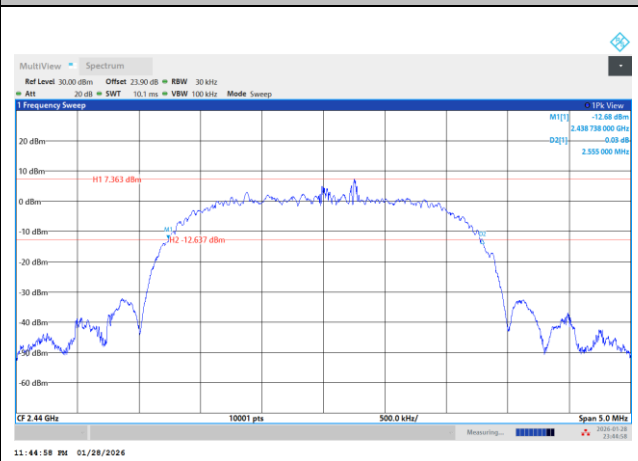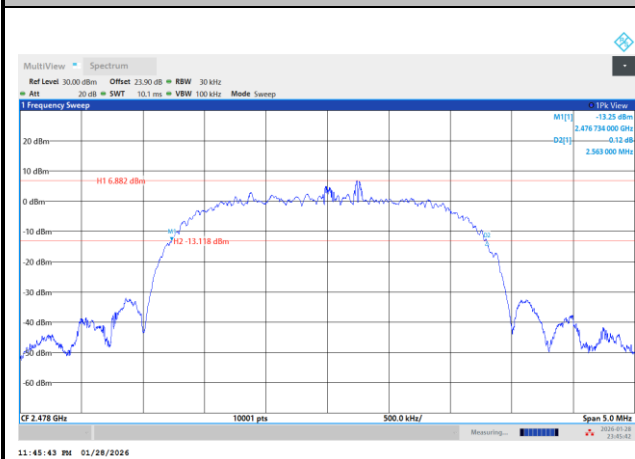20 dB Bandwidth Plot in Channel 01**20 dB Bandwidth Plot in Channel 19****20 dB Bandwidth Plot in Channel 38**




<QHS 3Mbps>


20 dB Bandwidth Plot in Channel 01

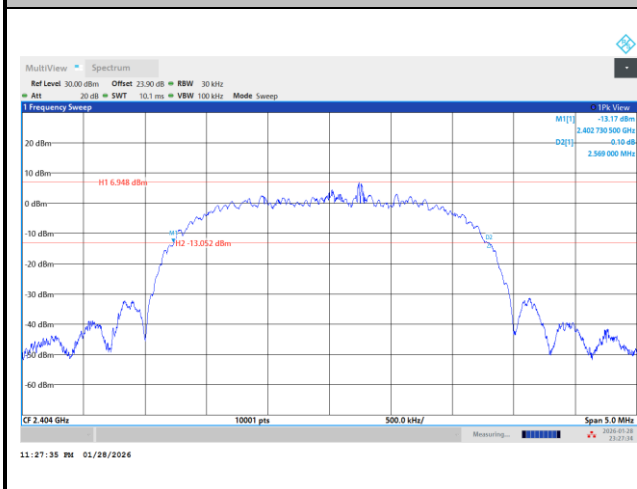

20 dB Bandwidth Plot in Channel 19

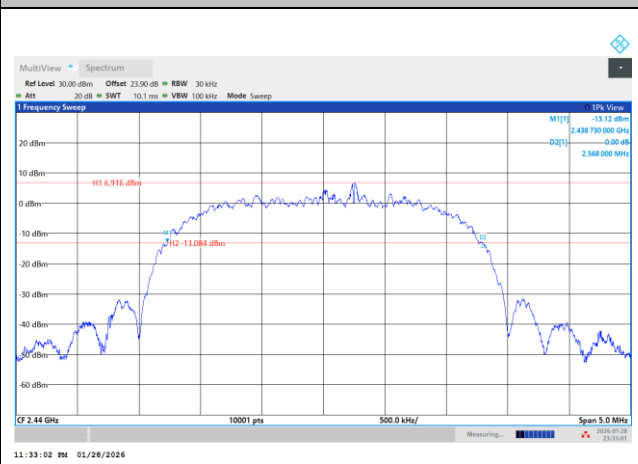


20 dB Bandwidth Plot in Channel 38

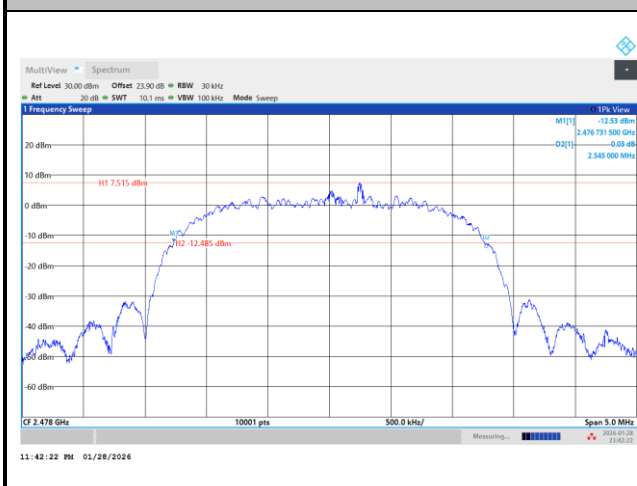




<QHS 4Mbps>

20 dB Bandwidth Plot in Channel 01

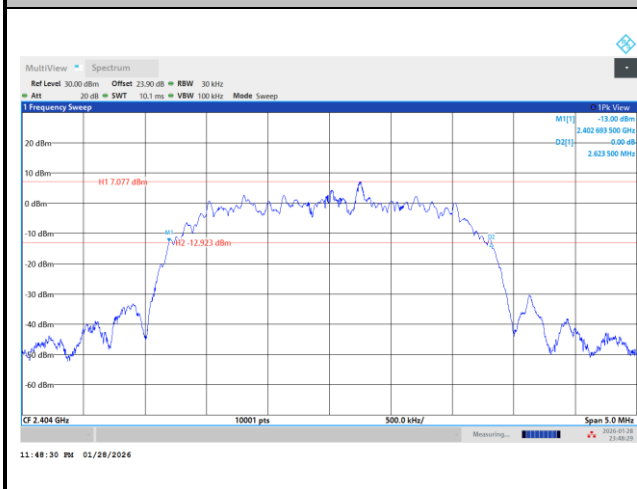

20 dB Bandwidth Plot in Channel 19

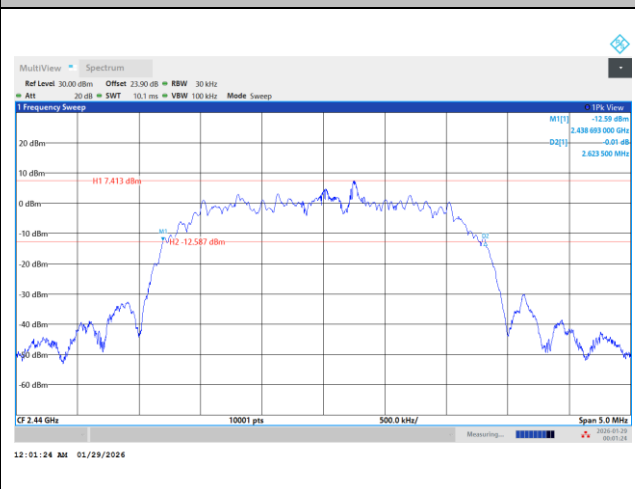


20 dB Bandwidth Plot in Channel 38






<QHS 5Mbps>


20 dB Bandwidth Plot in Channel 01

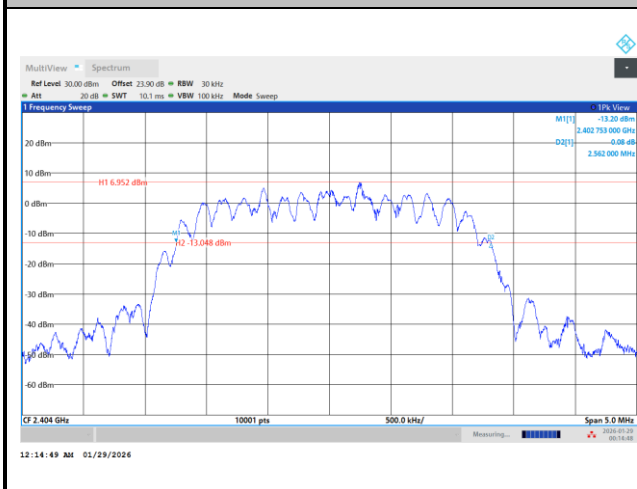

20 dB Bandwidth Plot in Channel 19

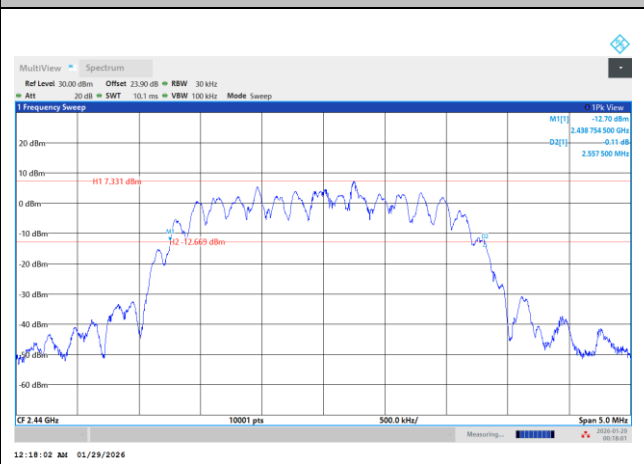


20 dB Bandwidth Plot in Channel 38

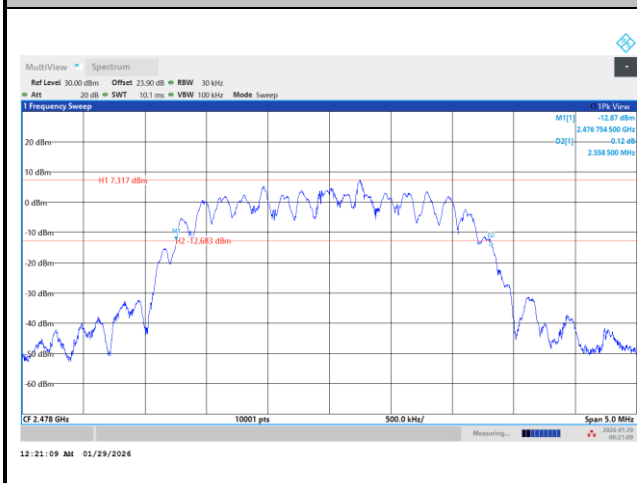




<QHS 6Mbps>


20 dB Bandwidth Plot in Channel 01

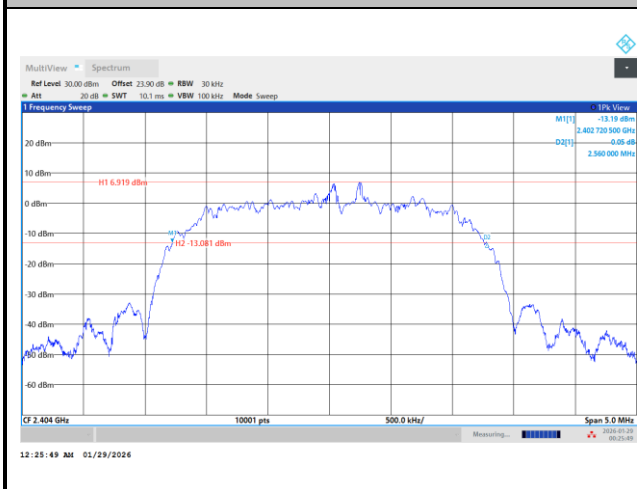

20 dB Bandwidth Plot in Channel 19



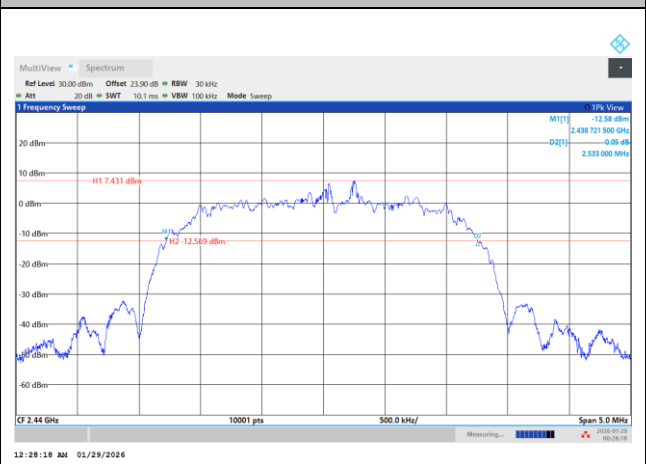


20 dB Bandwidth Plot in Channel 38

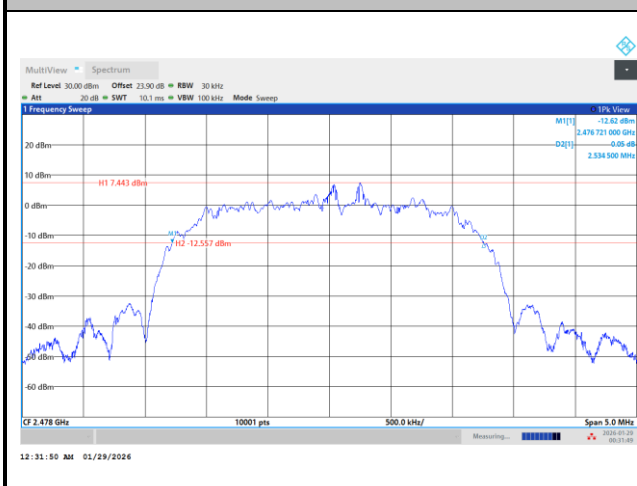

**99% Occupied Bandwidth**


<QHS 2Mbps>

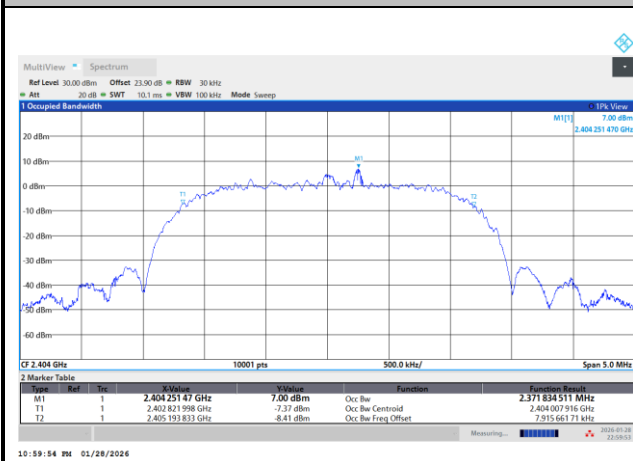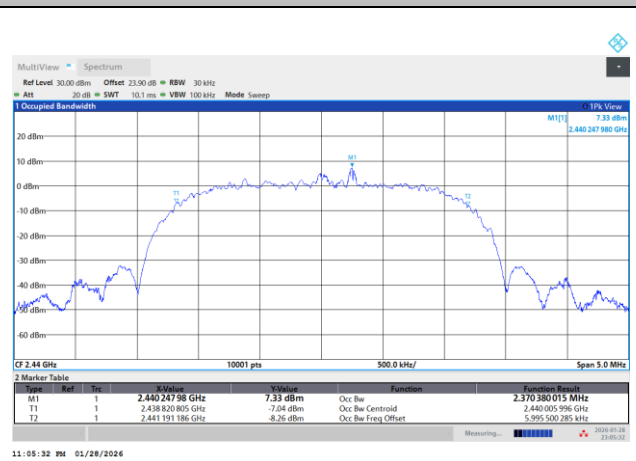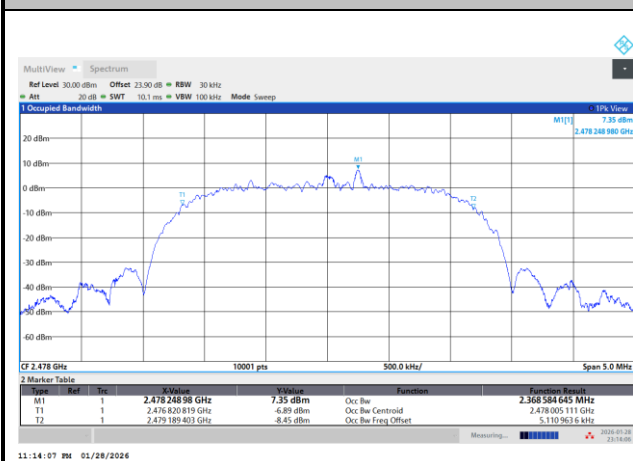99% Occupied Bandwidth on Channel 01**99% Occupied Bandwidth on Channel 19****99% Occupied Bandwidth on Channel 38**




<QHS 3Mbps>


99% Occupied Bandwidth on Channel 01

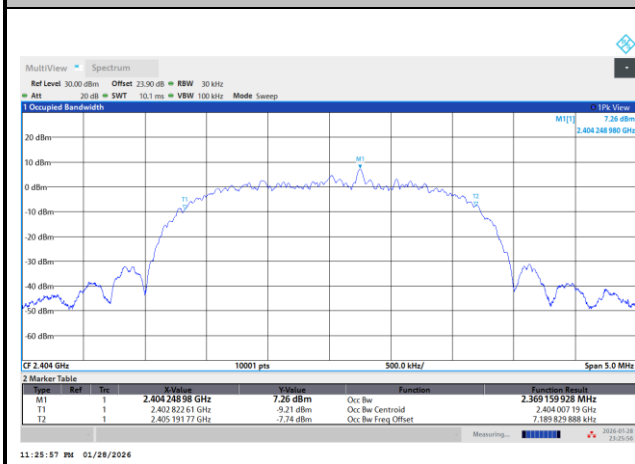

99% Occupied Bandwidth on Channel 19

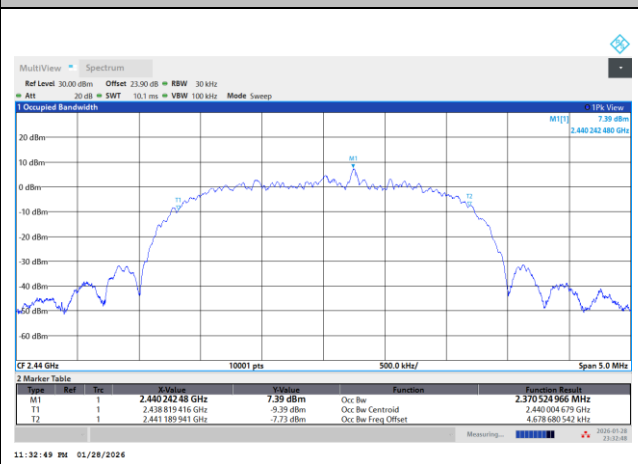


99% Occupied Bandwidth on Channel 38

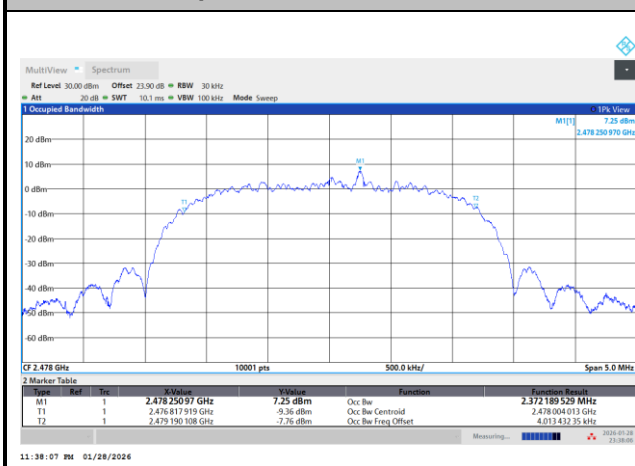




<QHS 4Mbps>


99% Occupied Bandwidth on Channel 01

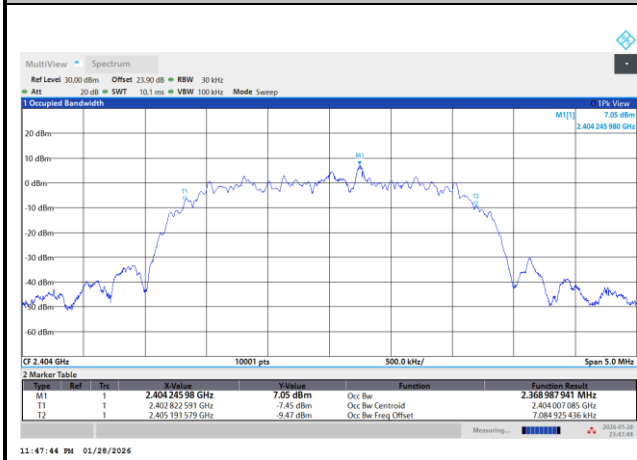

99% Occupied Bandwidth on Channel 19

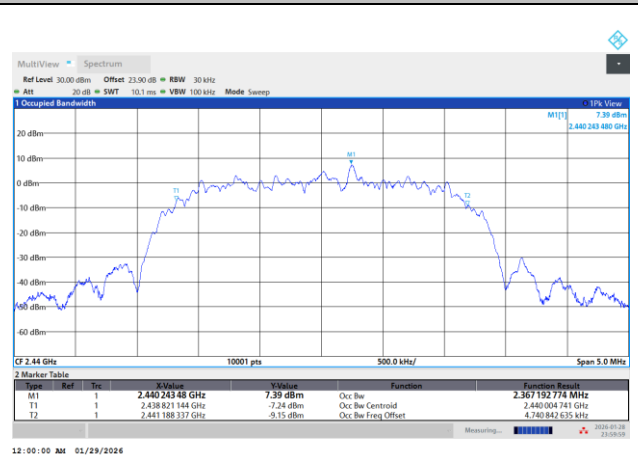


99% Occupied Bandwidth on Channel 38

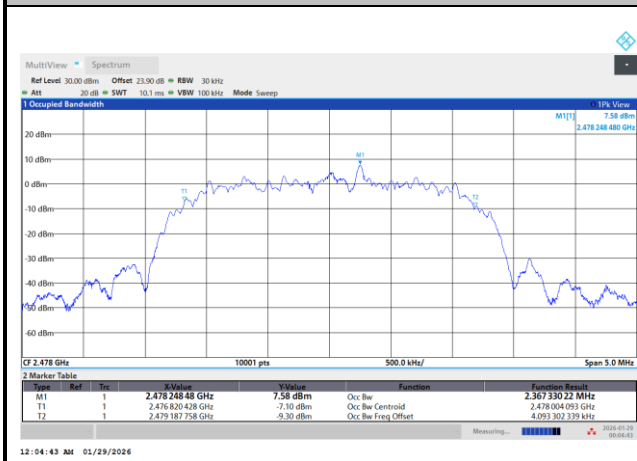




<QHS 5Mbps>


99% Occupied Bandwidth on Channel 01

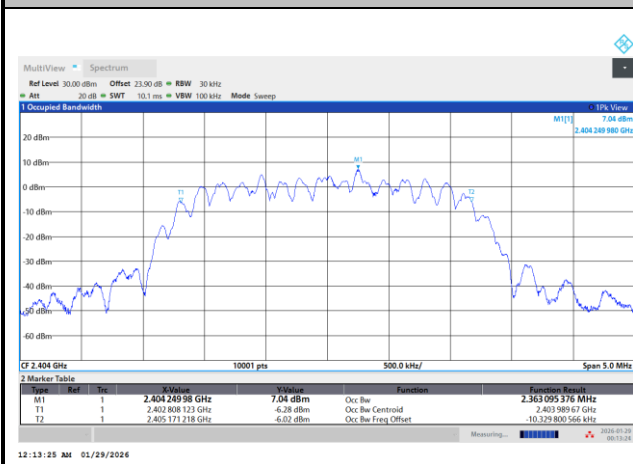

99% Occupied Bandwidth on Channel 19

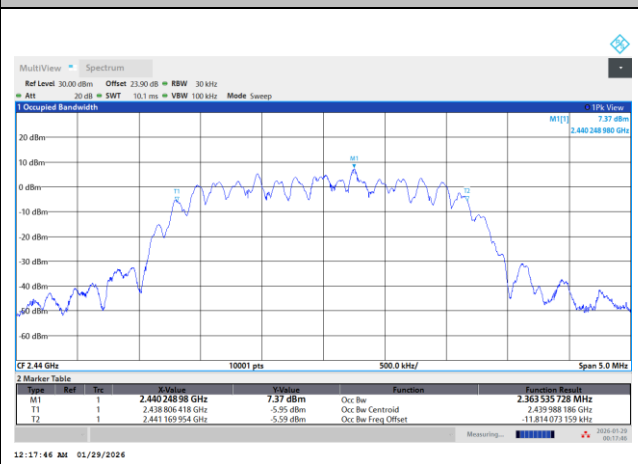


99% Occupied Bandwidth on Channel 38

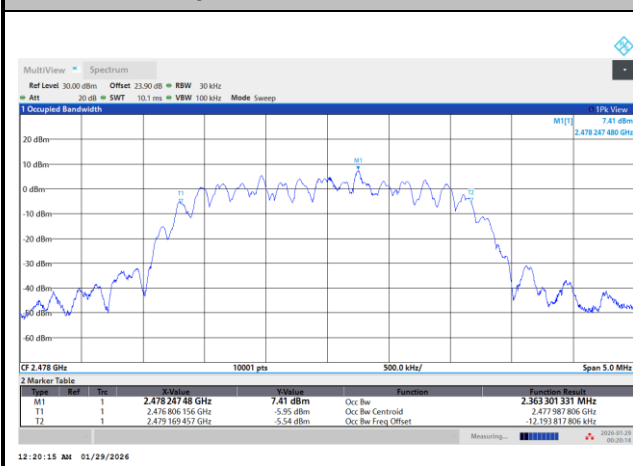




<QHS 6Mbps>


99% Occupied Bandwidth on Channel 01

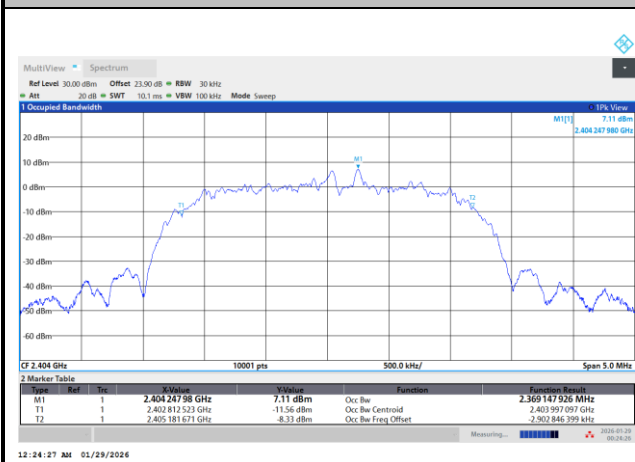

99% Occupied Bandwidth on Channel 19

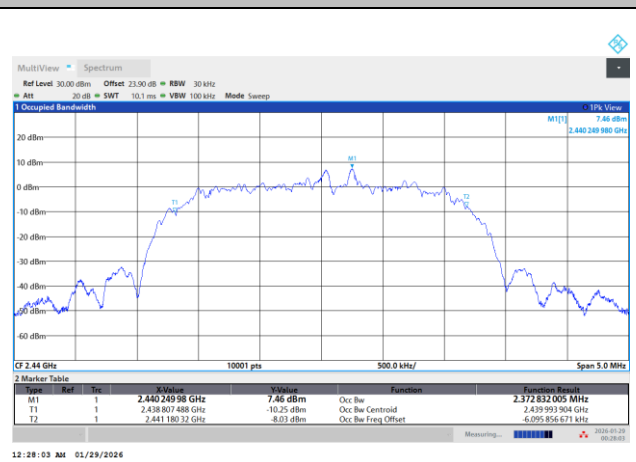

99% Occupied Bandwidth on Channel 38

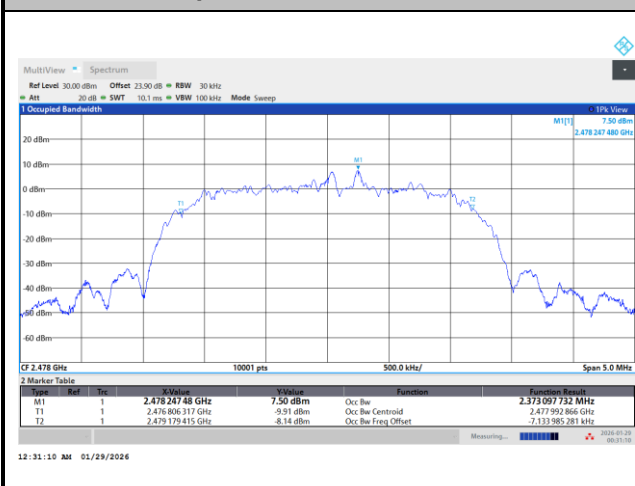





Band Edges

<QHS 2Mbps>

Band Edge Plot on Channel 01

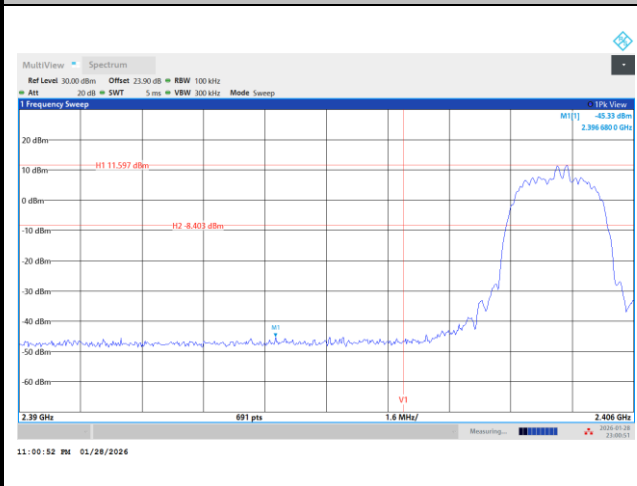


Band Edge Plot on Channel 38

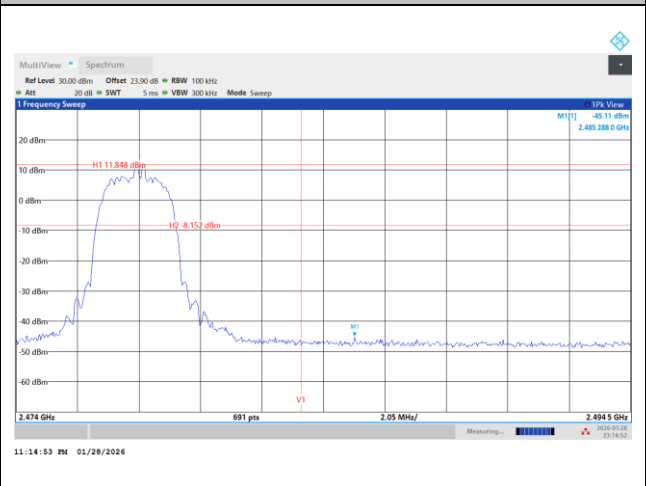


<QHS 3Mbps>

Band Edge Plot on Channel 01

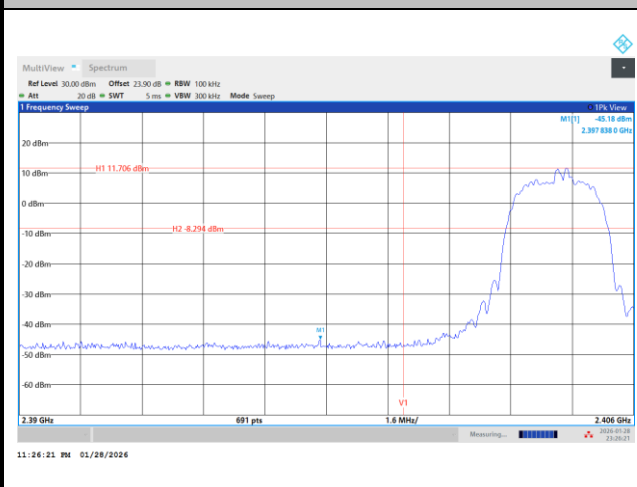


Band Edge Plot on Channel 38

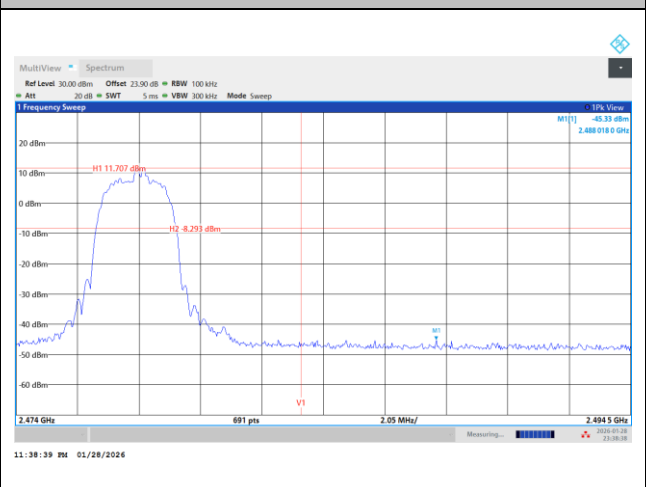




<QHS 4Mbps>

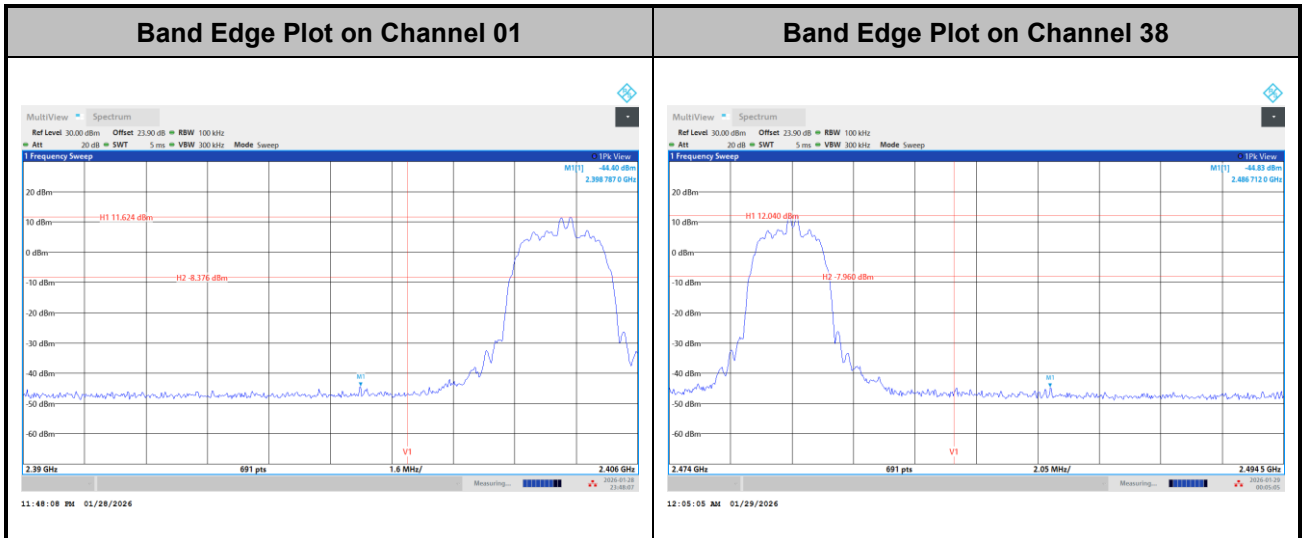


<QHS 5Mbps>

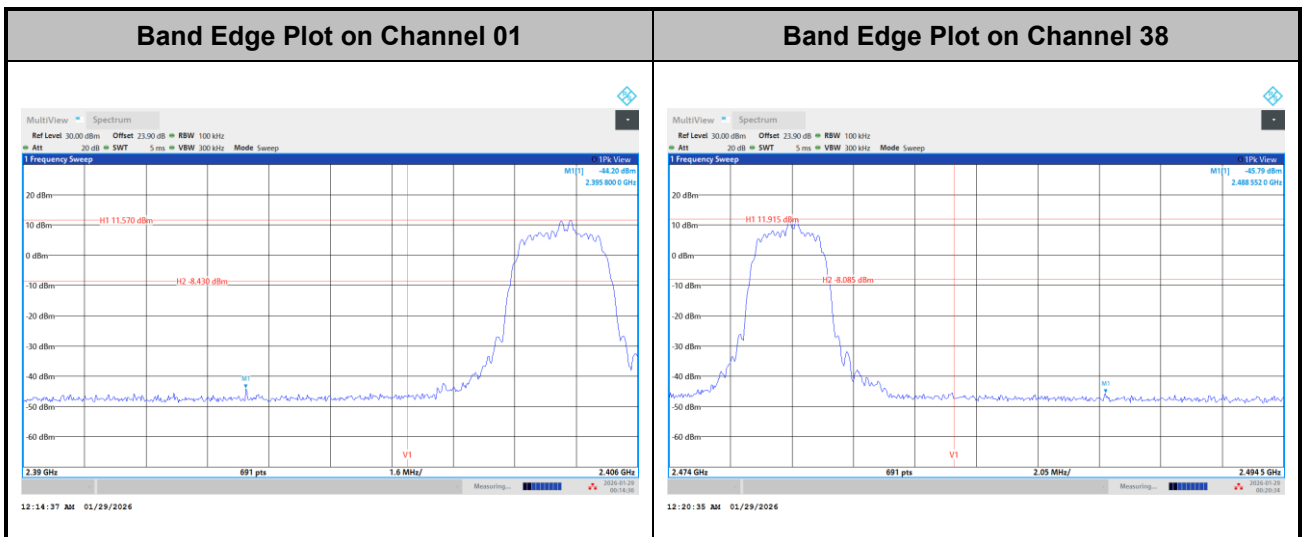





<QHS 6Mbps>


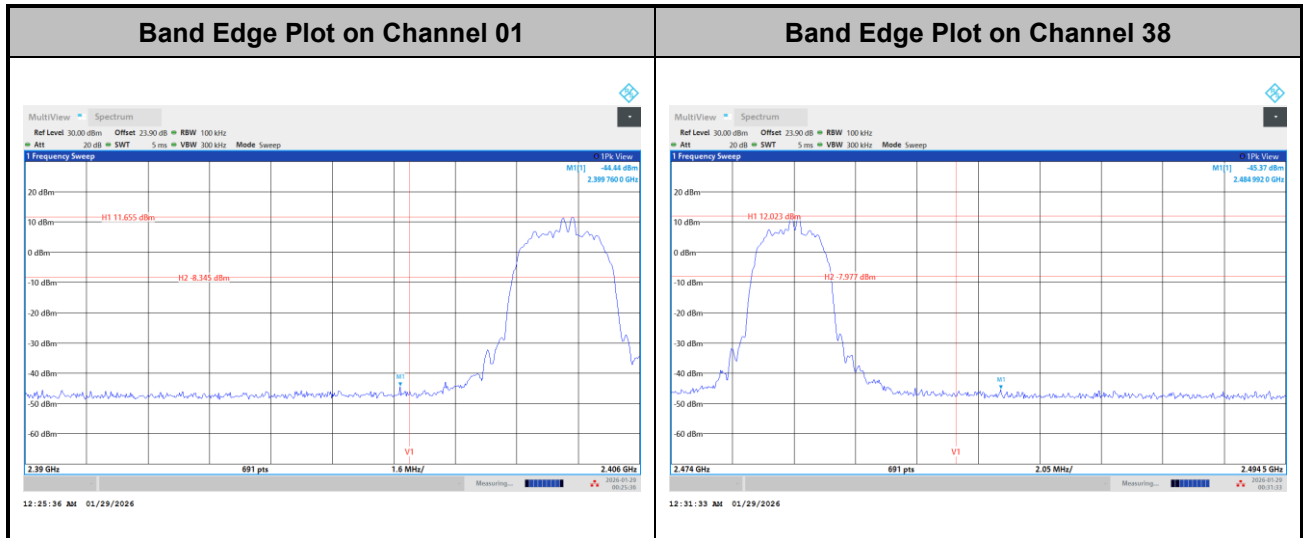


**Hopping Mode Band Edges**

<QHS 2Mbps>

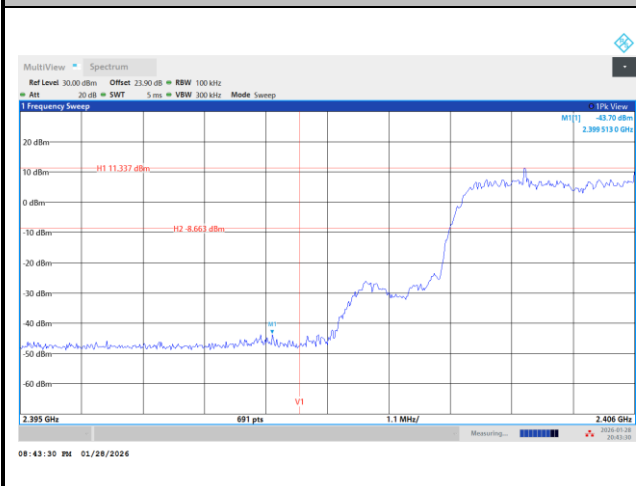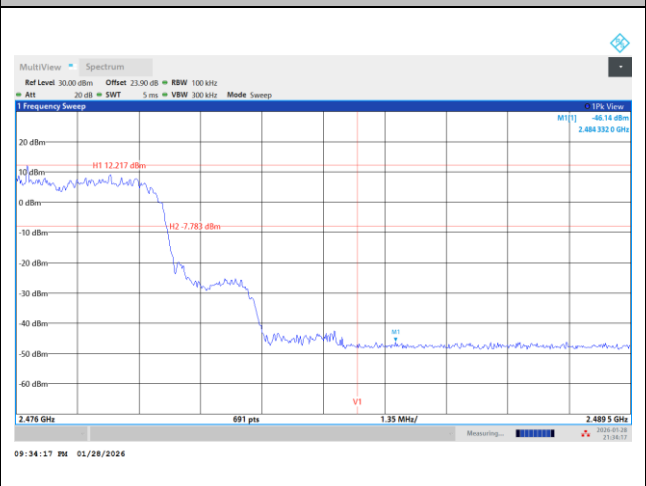Hopping Mode Band Edge Plot on Channel 01**Hopping Mode Band Edge Plot on Channel 38**


<QHS 3Mbps>

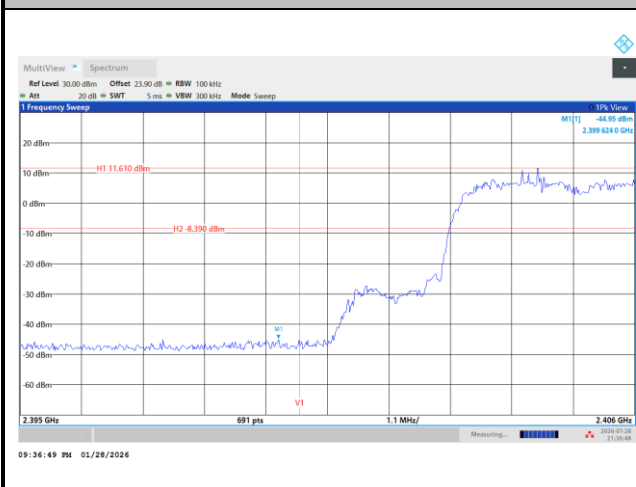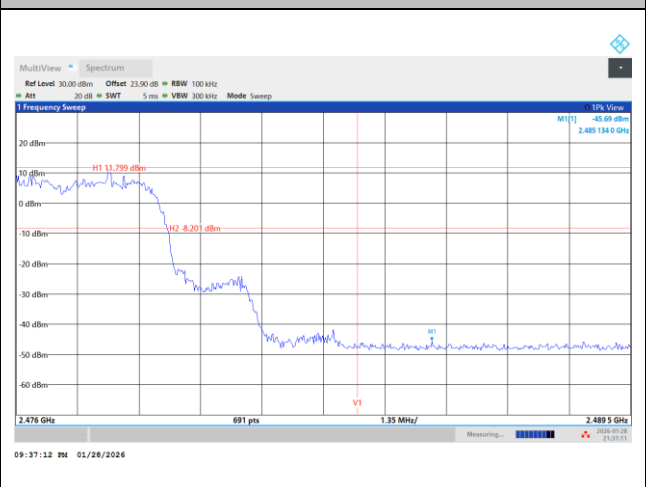Hopping Mode Band Edge Plot on Channel 01**Hopping Mode Band Edge Plot on Channel 38**




<QHS 4Mbps>

Hopping Mode Band Edge Plot on Channel 01

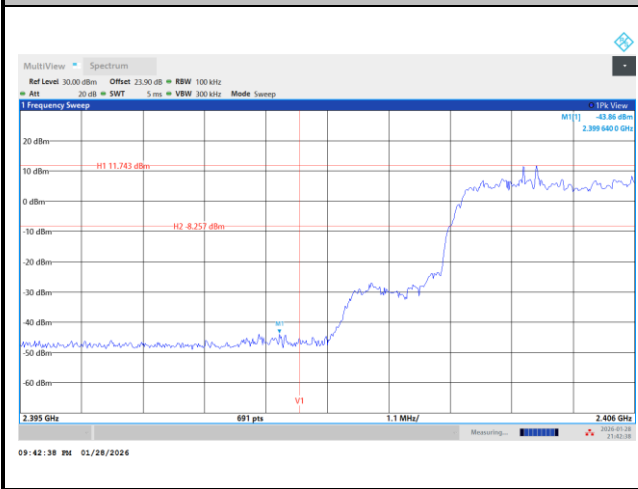


Hopping Mode Band Edge Plot on Channel 38

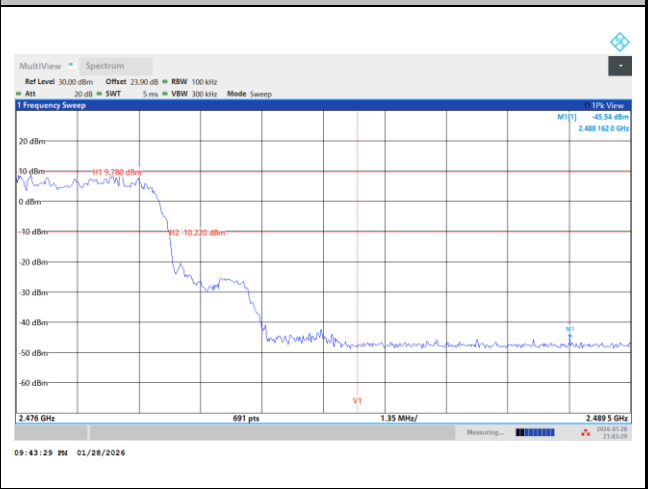


<QHS 5Mbps>

Hopping Mode Band Edge Plot on Channel 01

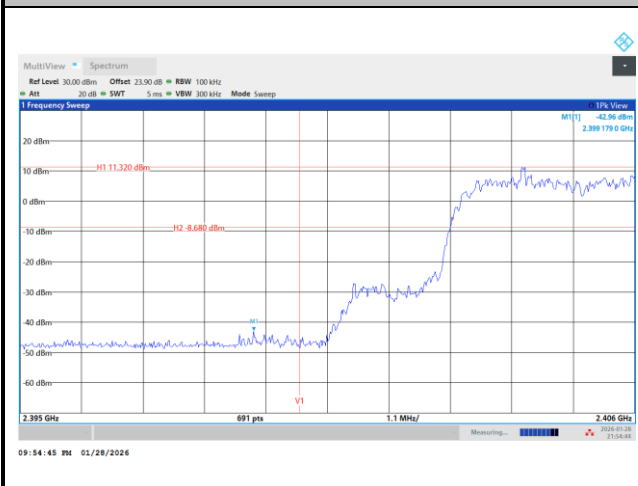


Hopping Mode Band Edge Plot on Channel 38

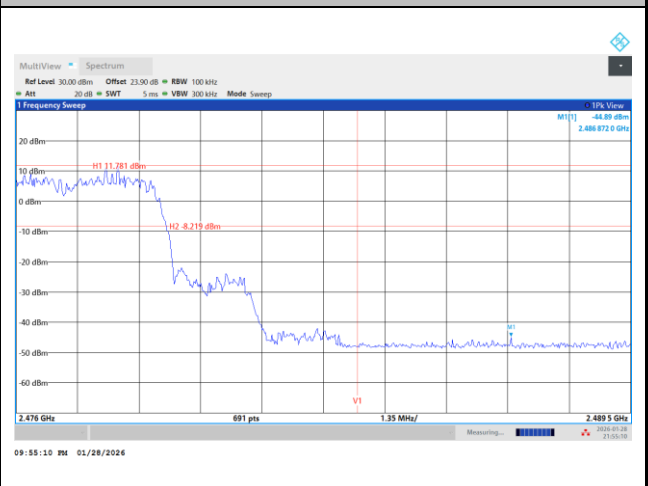




<QHS 6Mbps>

Hopping Mode Band Edge Plot on Channel 01






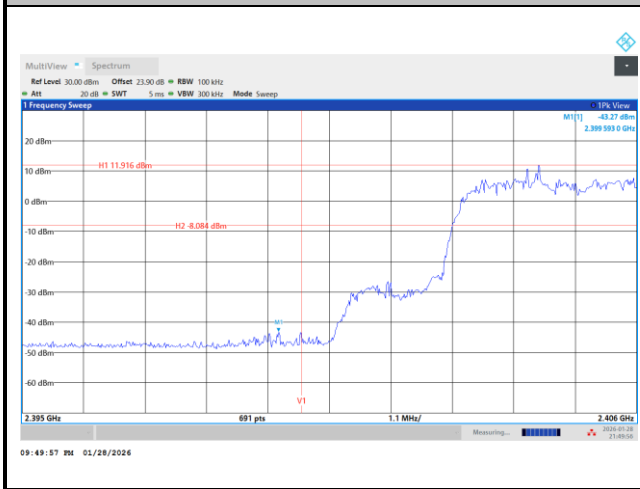


Hopping Mode Band Edge Plot on Channel 38

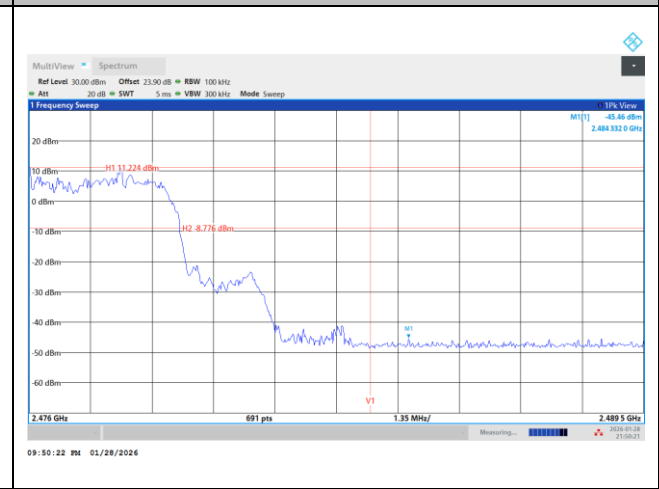

**Conducted Spurious Emission**


<QHS 2Mbps>

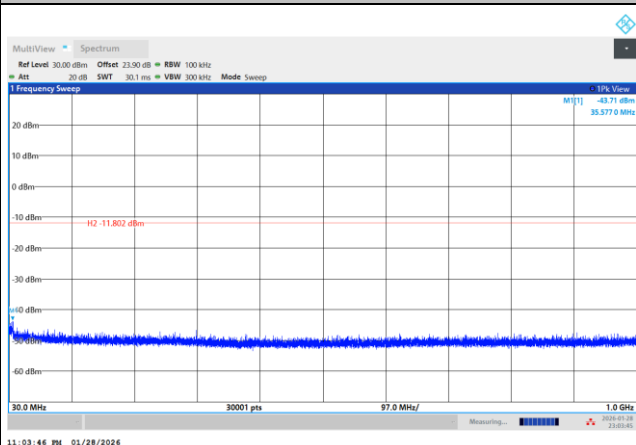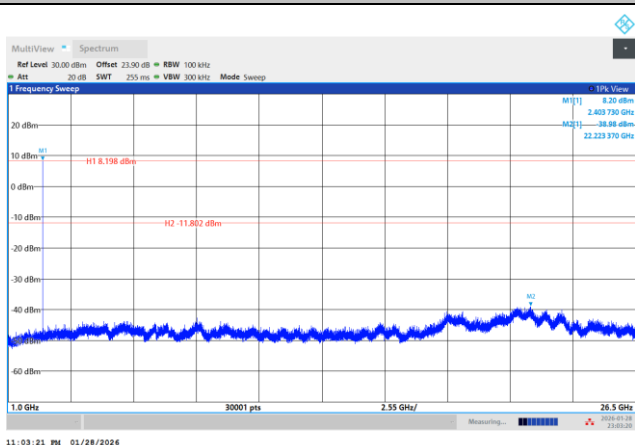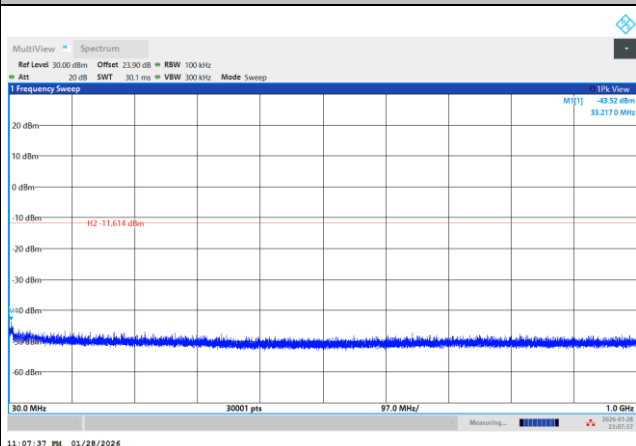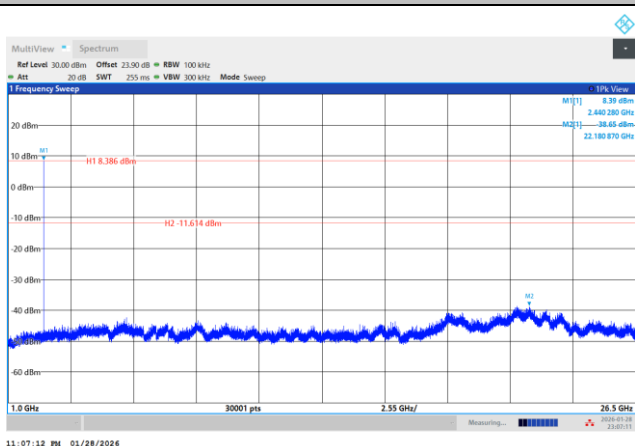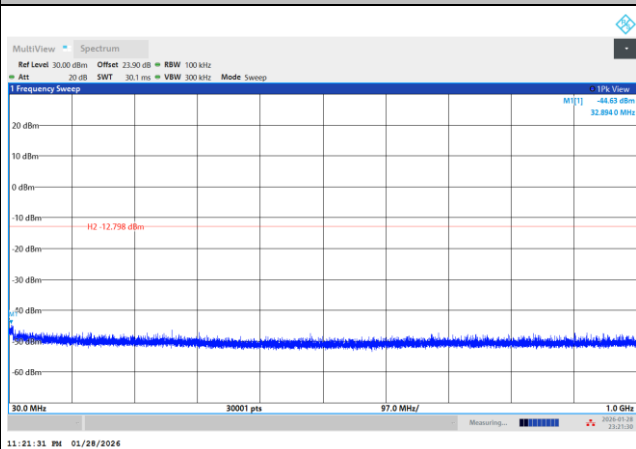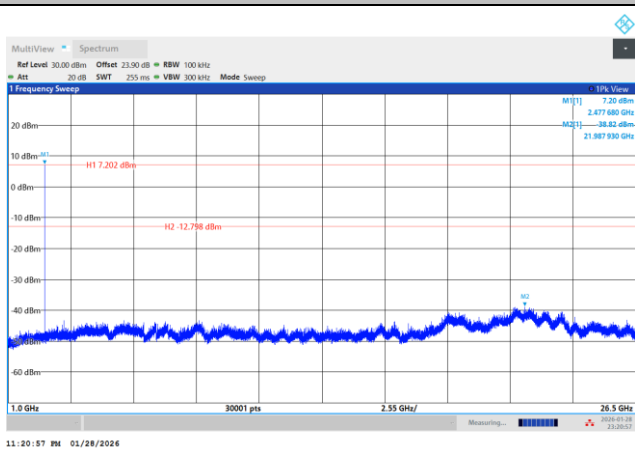CSE Plot on Low Ch between 30MHz ~ 1 GHz**CSE Plot on Low Ch between 1GHz ~ 26.5GHz****CSE Plot on Mid. Ch between 30MHz ~ 1 GHz****CSE Plot on Mid. Ch between 1GHz ~ 26.5GHz****CSE Plot on High Ch between 30MHz ~ 1 GHz****CSE Plot on High Ch between 1GHz ~ 26.5GHz**




<QHS 3Mbps>


CSE Plot on Low Ch between 30MHz ~ 1 GHz

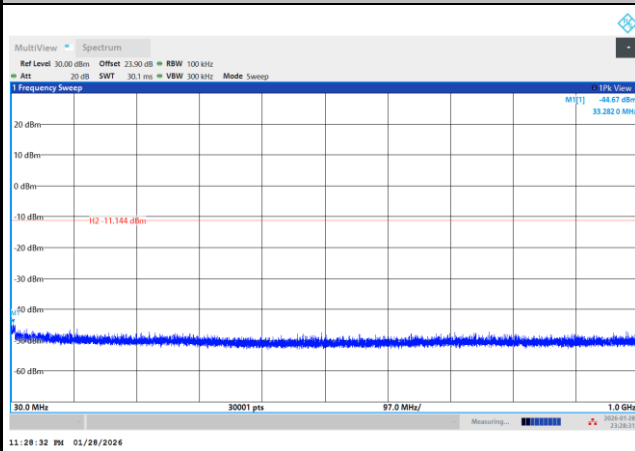


CSE Plot on Low Ch between 1GHz ~ 26.5GHz

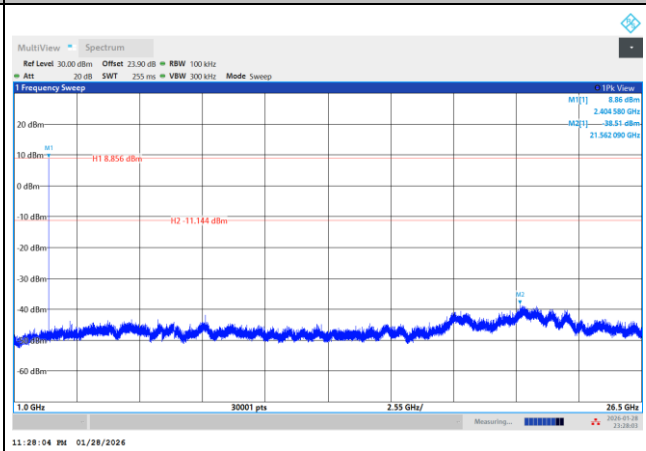


CSE Plot on Mid. Ch between 30MHz ~ 1 GHz

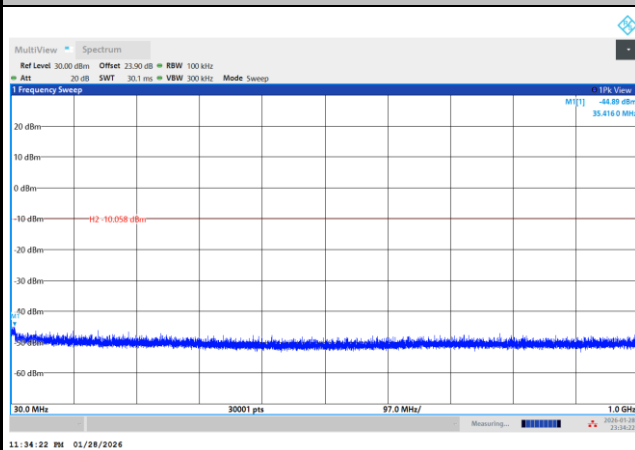

CSE Plot on Mid. Ch between 1GHz ~ 26.5GHz

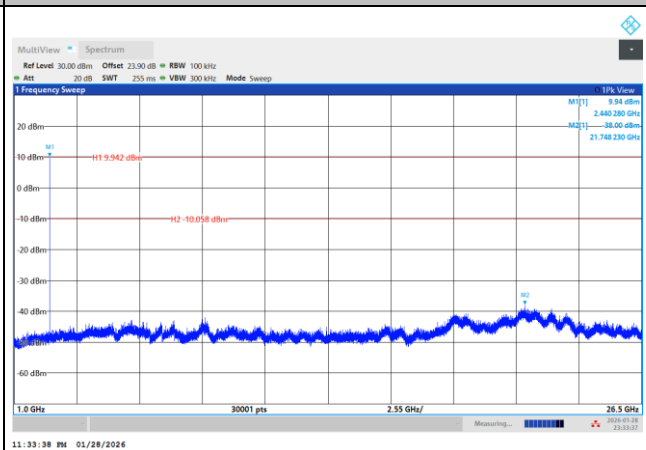

CSE Plot on High Ch between 30MHz ~ 1 GHz

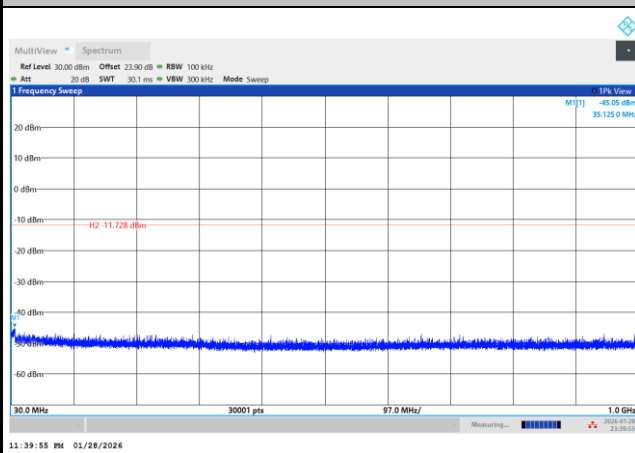

CSE Plot on High Ch between 1GHz ~ 26.5GHz

