




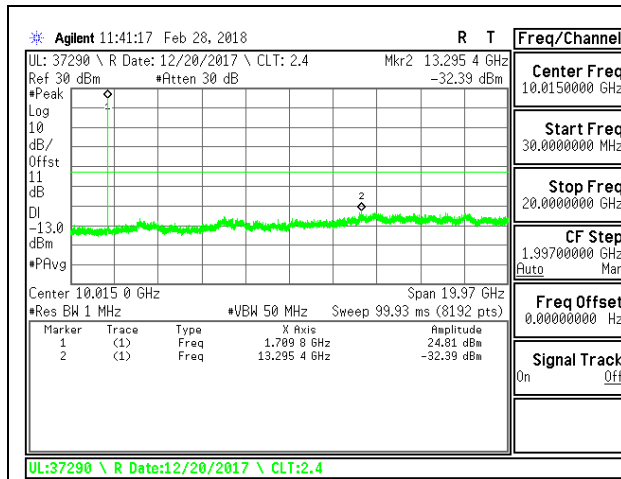


LTE B4 15MHz QPSK Low Channel RB1-0

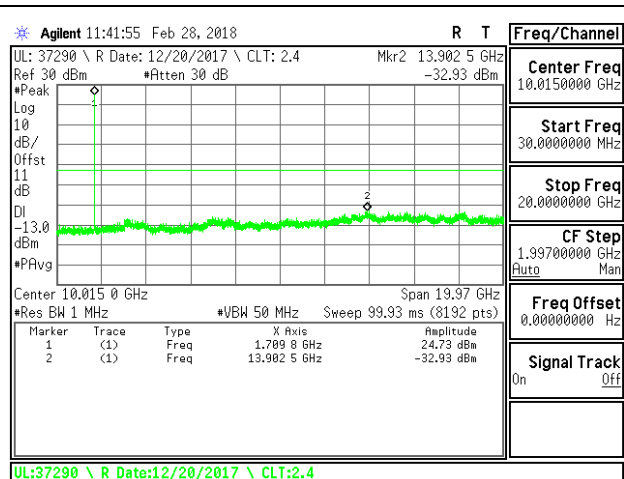


LTE B4 15MHz 16QAM Low Channel RB1-0

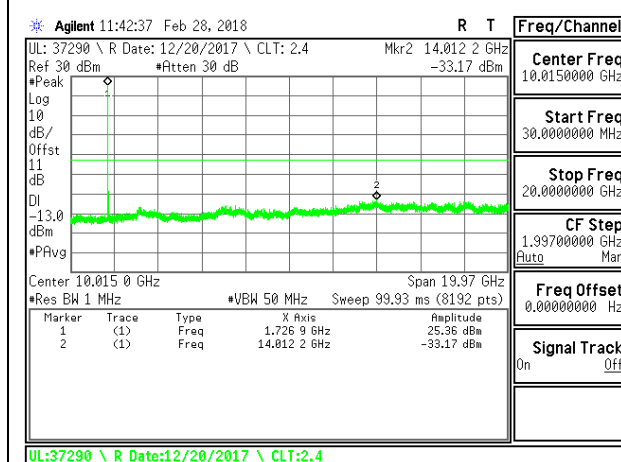


LTE B4 15MHz QPSK Middle Channel RB1-0

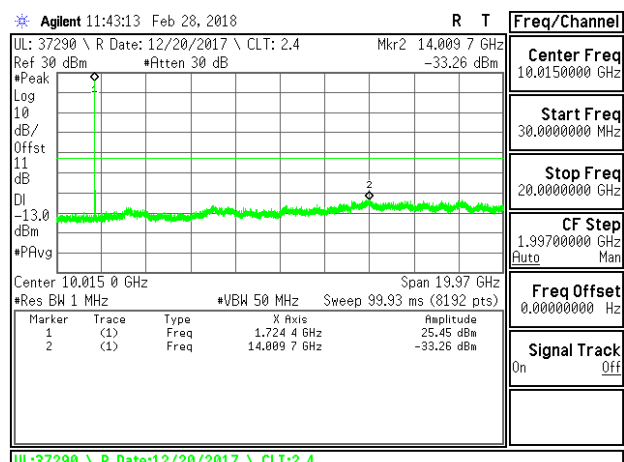


LTE B4 15MHz 16QAM Middle Channel RB1-0

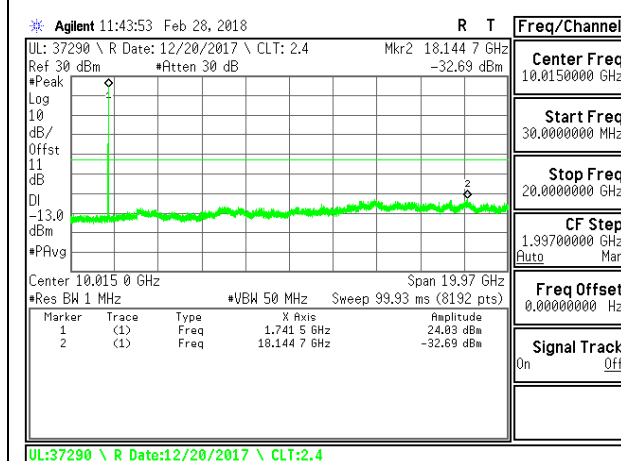


LTE B4 15MHz QPSK High Channel RB1-0

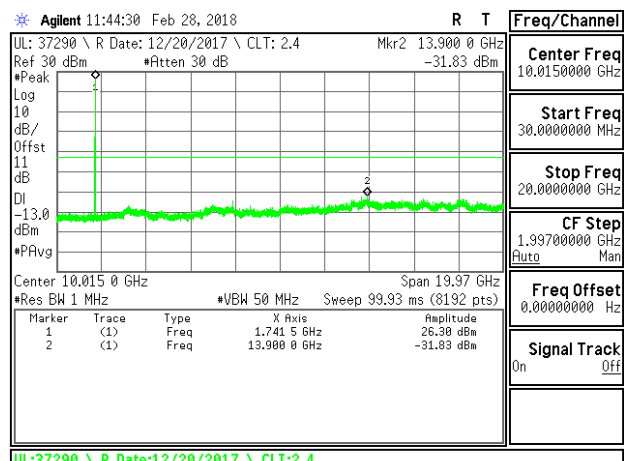


LTE B4 15MHz 16QAM High Channel RB1-0

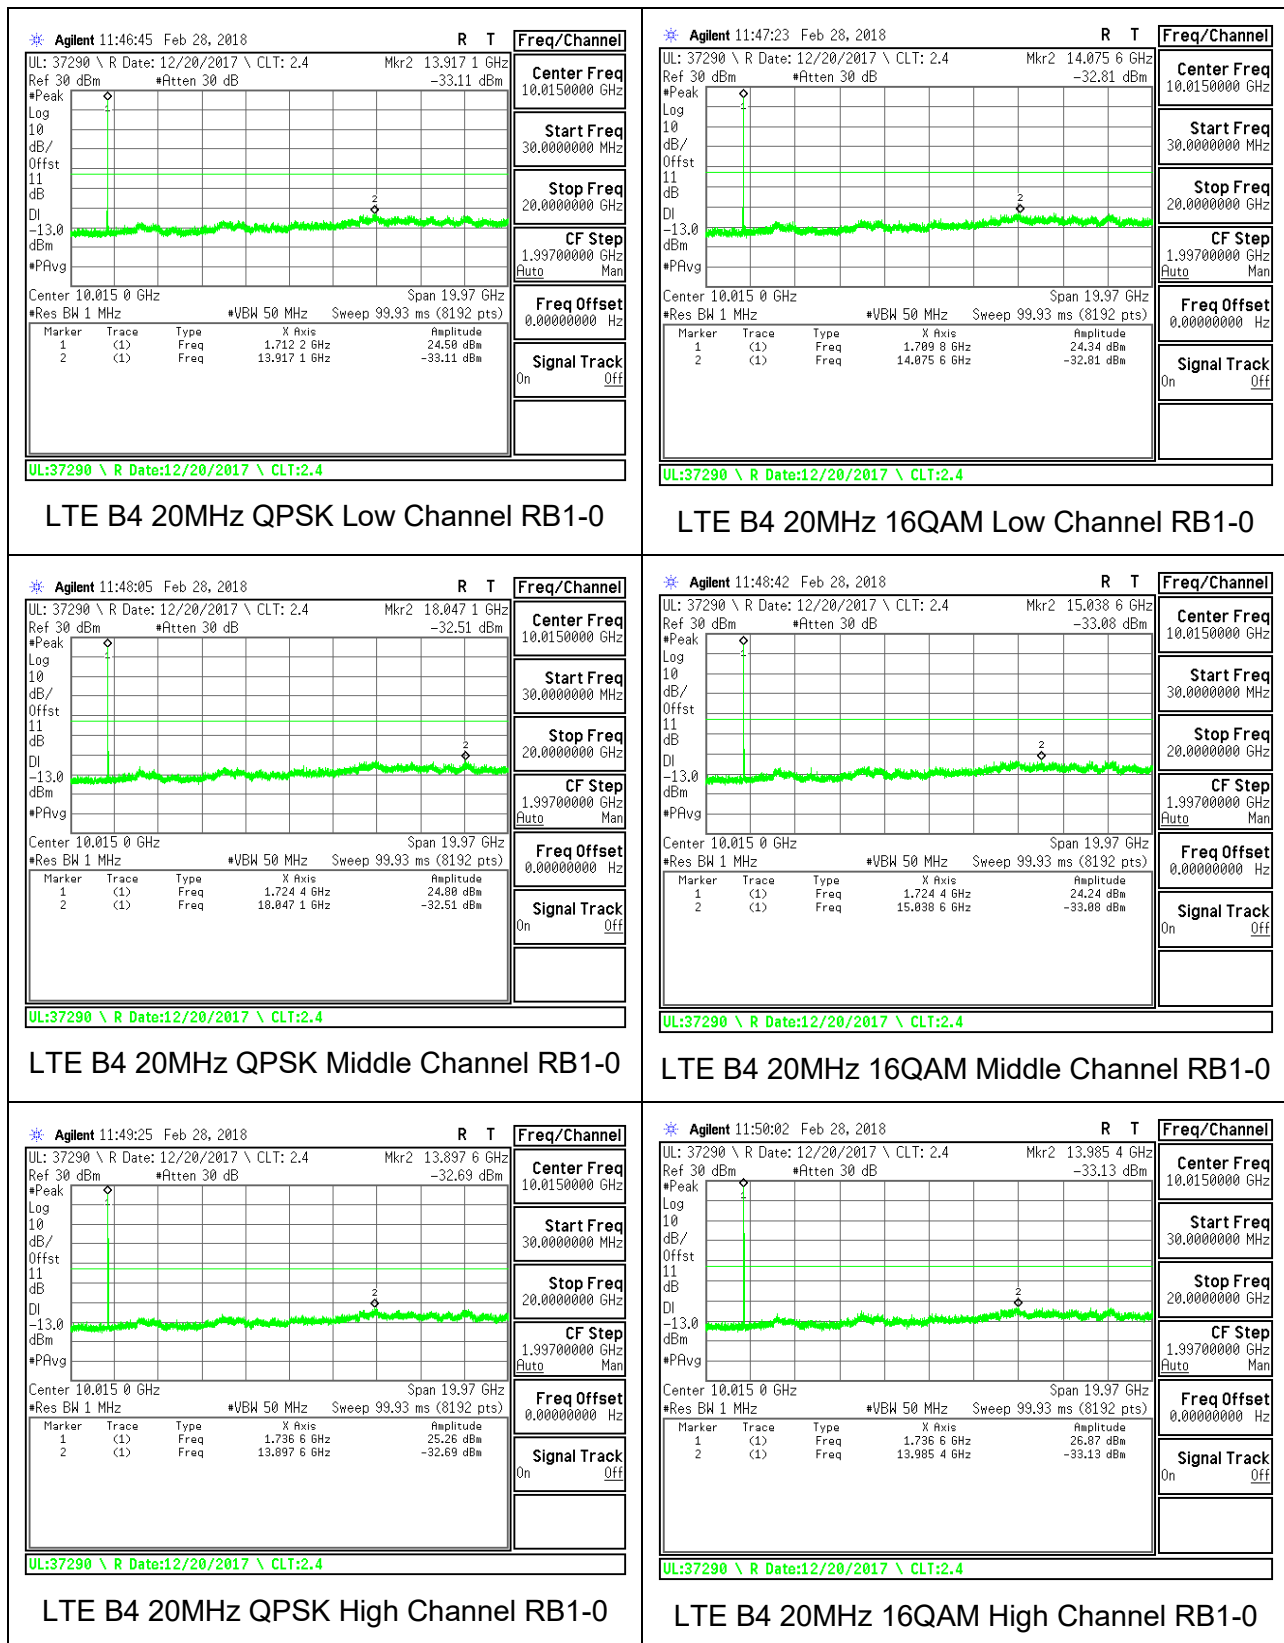


8.3.7. LTE BAND 5

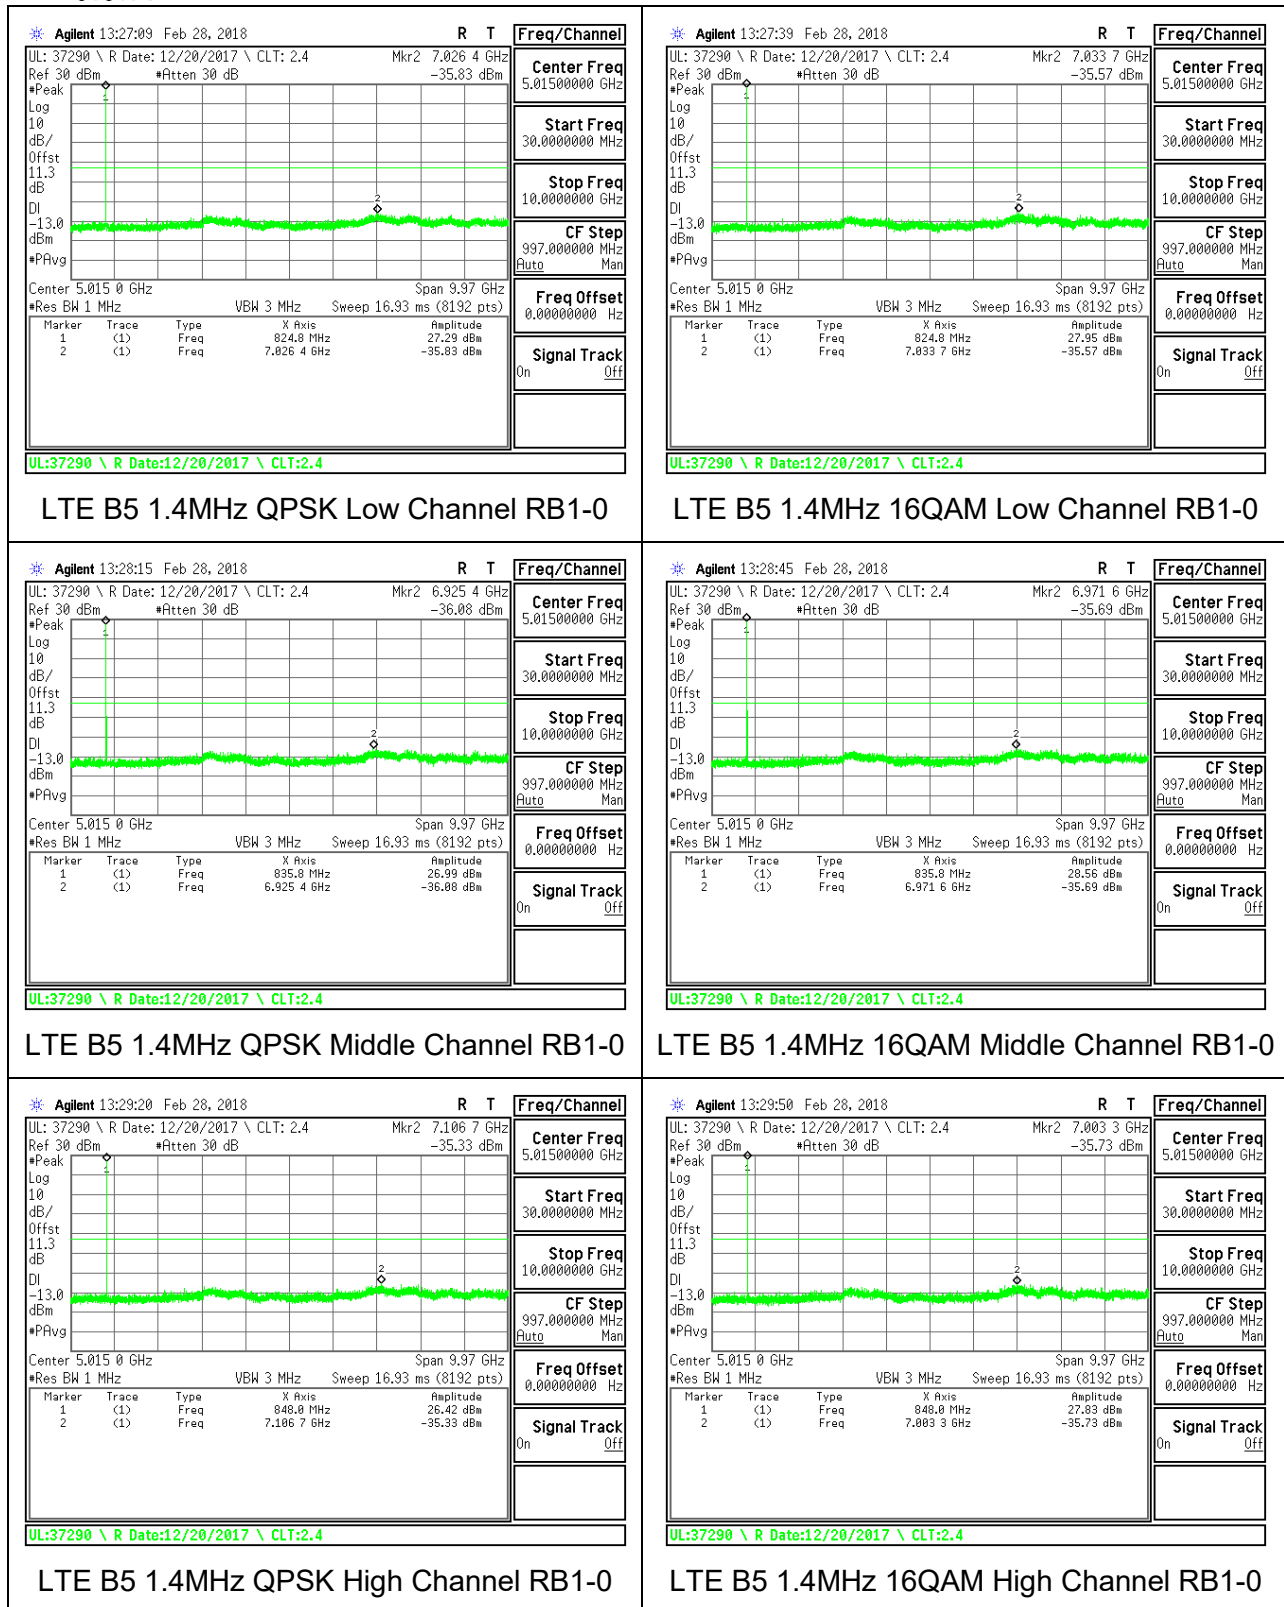


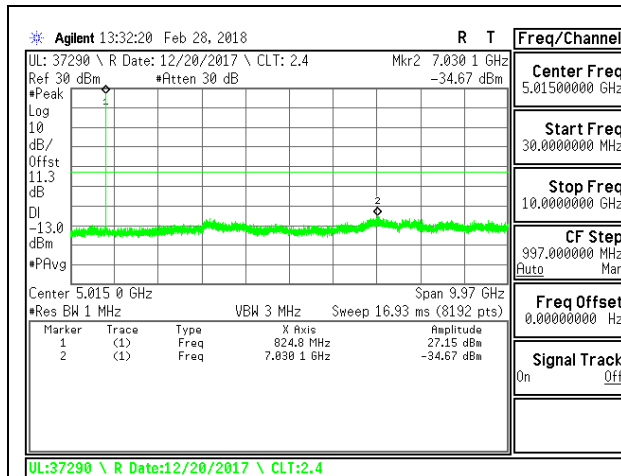


LTE B5 3MHz QPSK Low Channel RB1-0

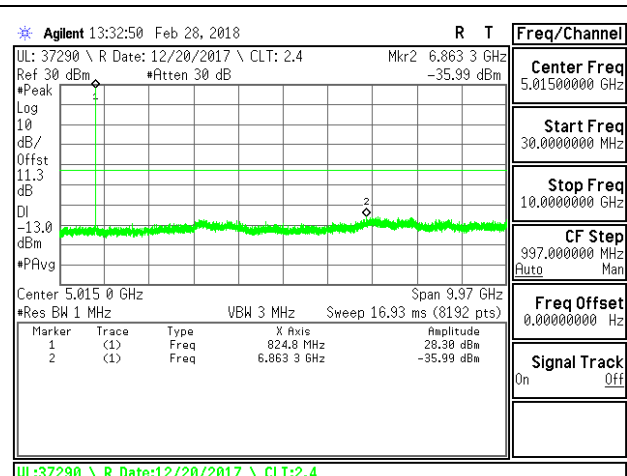


LTE B5 3MHz 16QAM Low Channel RB1-0

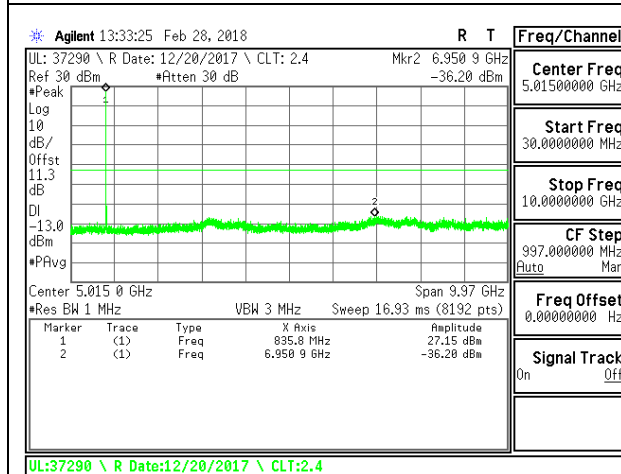


LTE B5 3MHz QPSK Middle Channel RB1-0

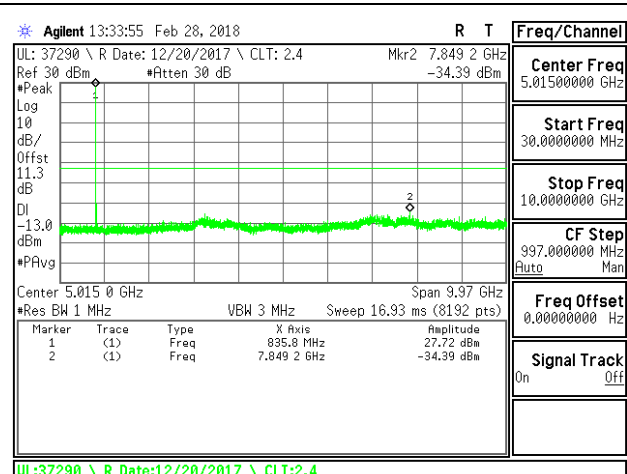


LTE B5 3MHz 16QAM Middle Channel RB1-0

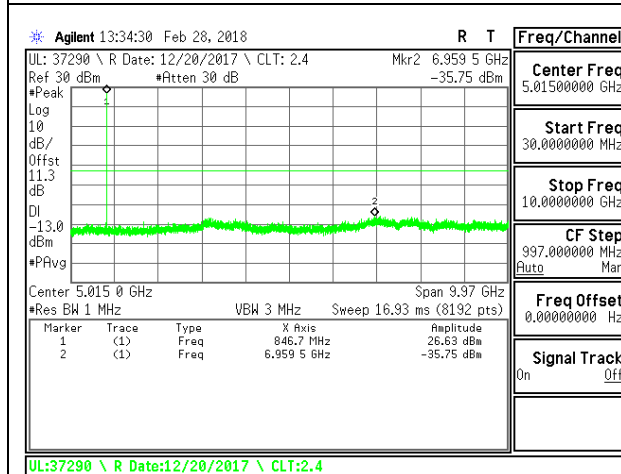


LTE B5 3MHz QPSK High Channel RB1-0

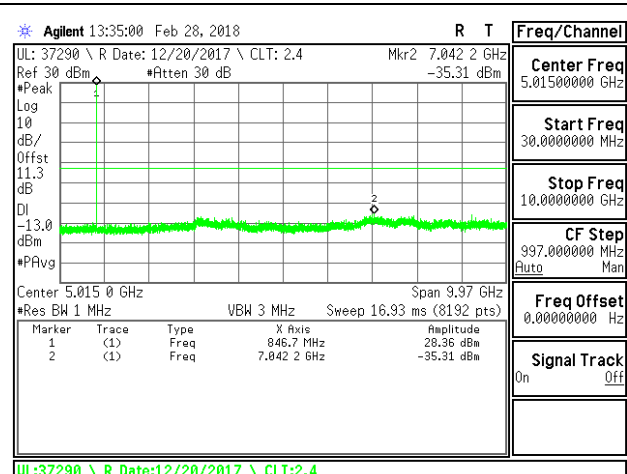


LTE B5 3MHz 16QAM High Channel RB1-0

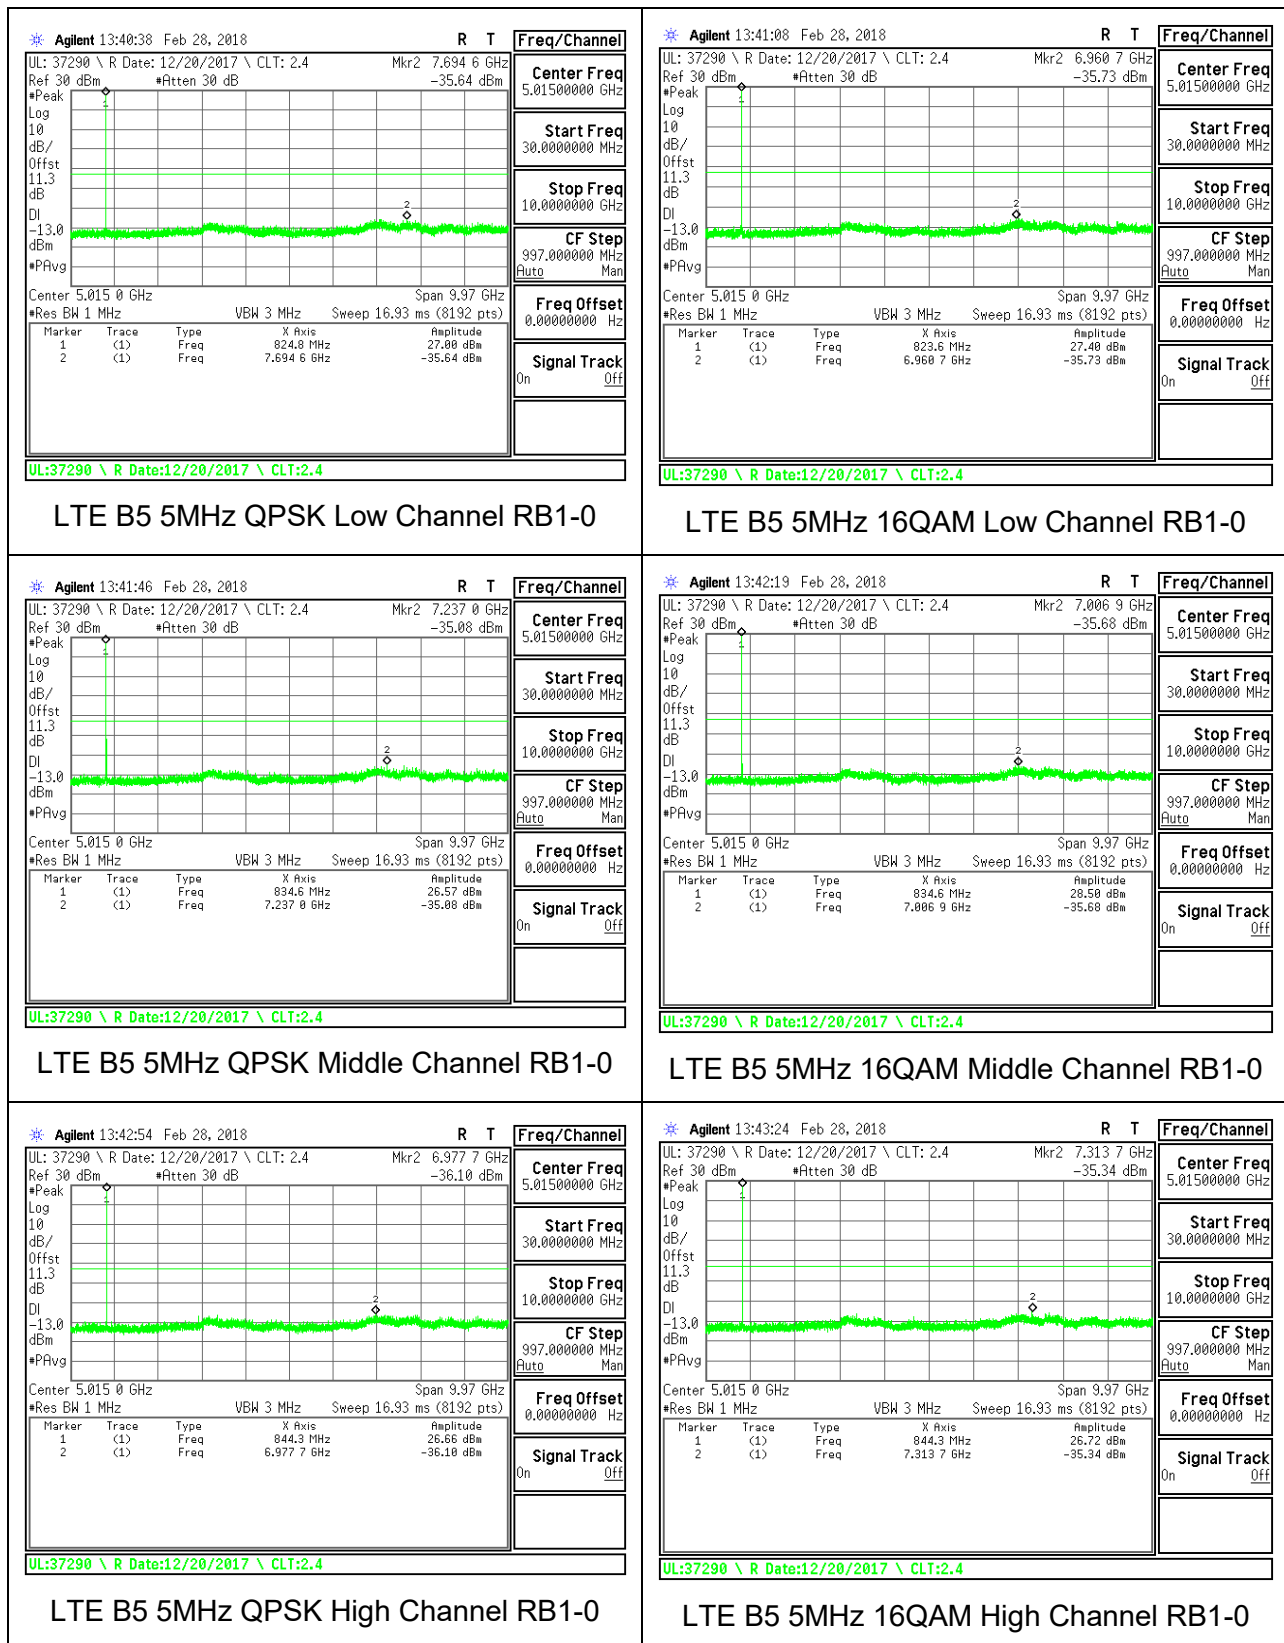


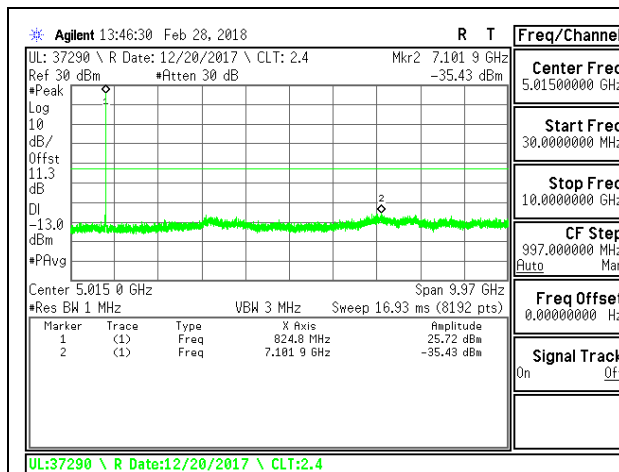


LTE B5 10MHz QPSK Low Channel RB1-0

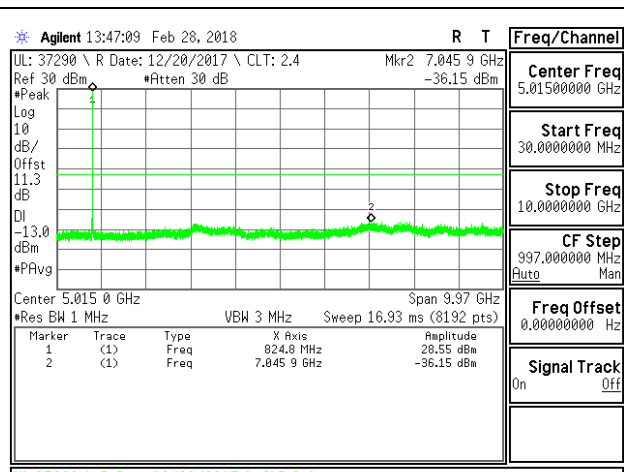


LTE B5 10MHz 16QAM Low Channel RB1-0

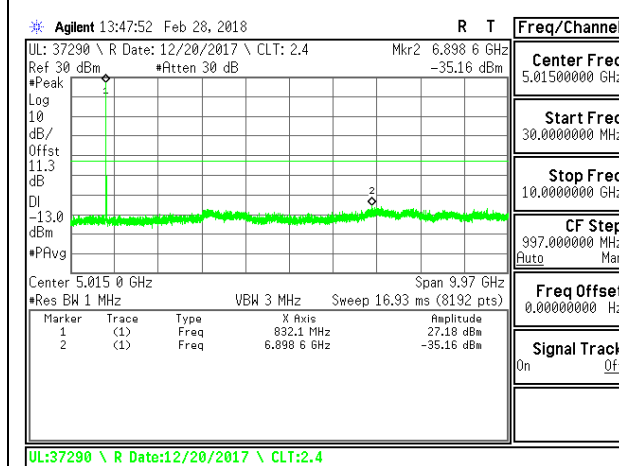


LTE B5 10MHz QPSK Middle Channel RB1-0

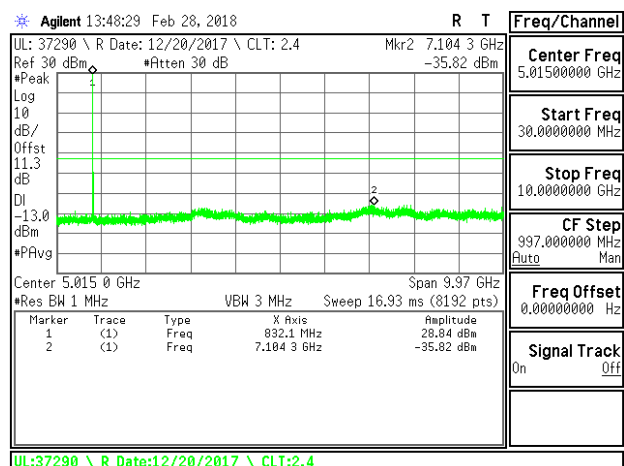

LTE B5 10MHz 16QAM Middle Channel RB1-0

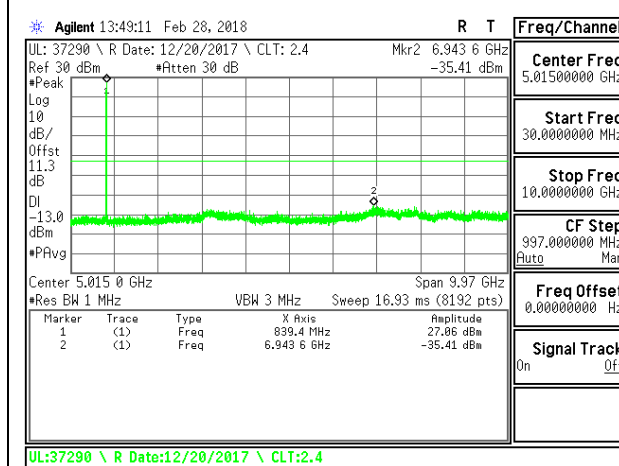



LTE B5 10MHz QPSK High Channel RB1-0

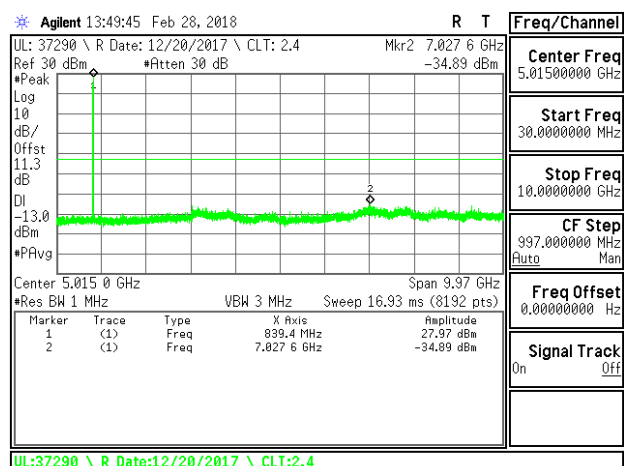


LTE B5 10MHz 16QAM High Channel RB1-0

8.3.8. LTE BAND 7

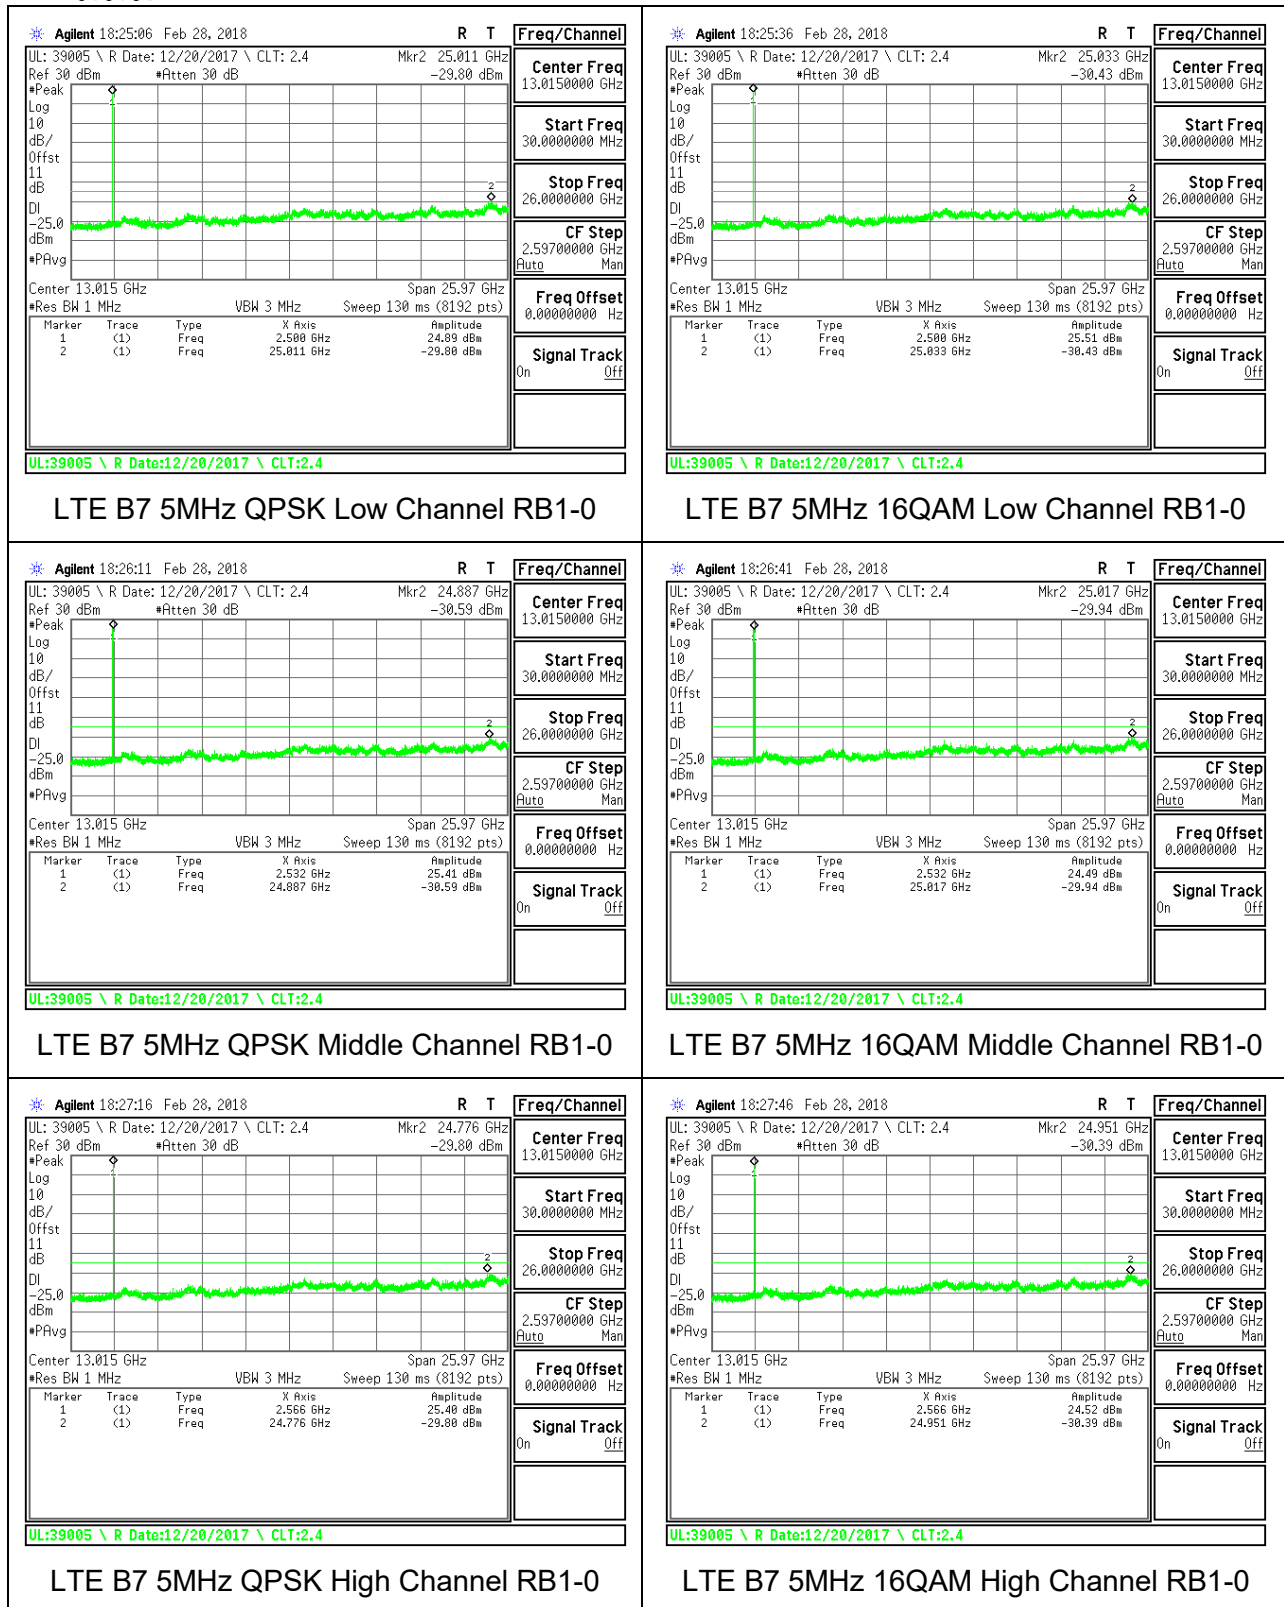


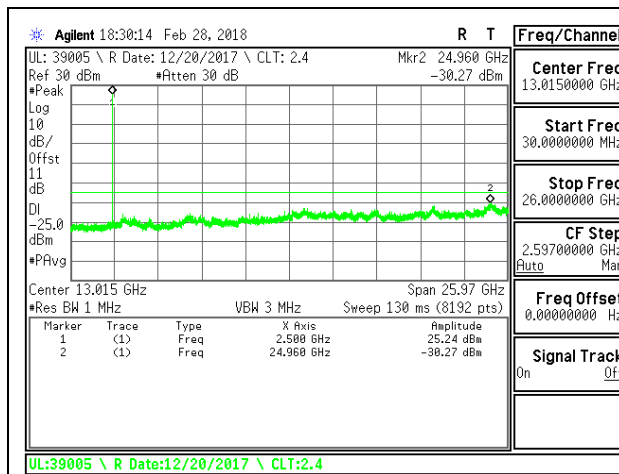


LTE B7 10MHz QPSK Low Channel RB1-0

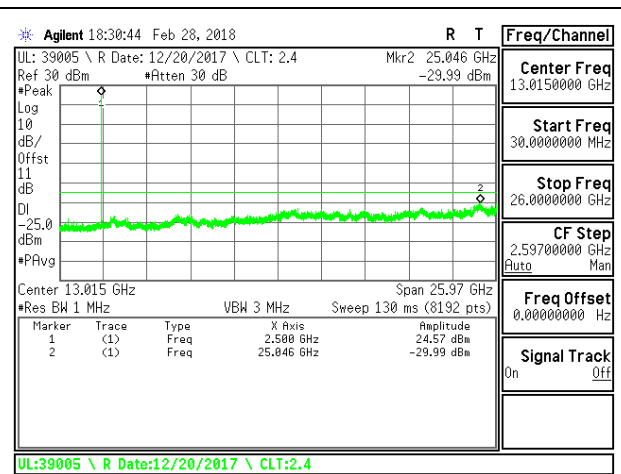


LTE B7 10MHz 16QAM Low Channel RB1-0

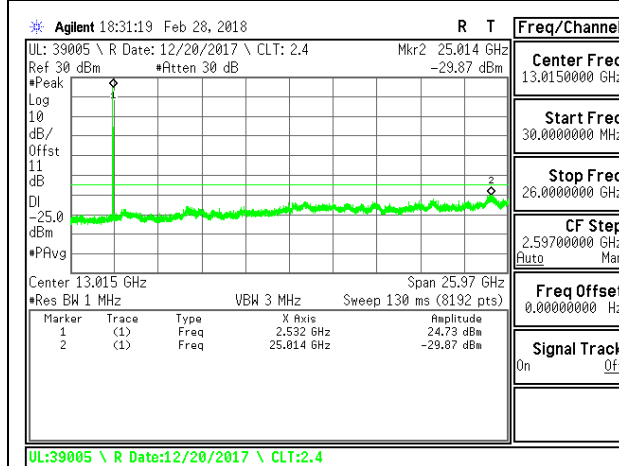


LTE B7 10MHz QPSK Middle Channel RB1-0

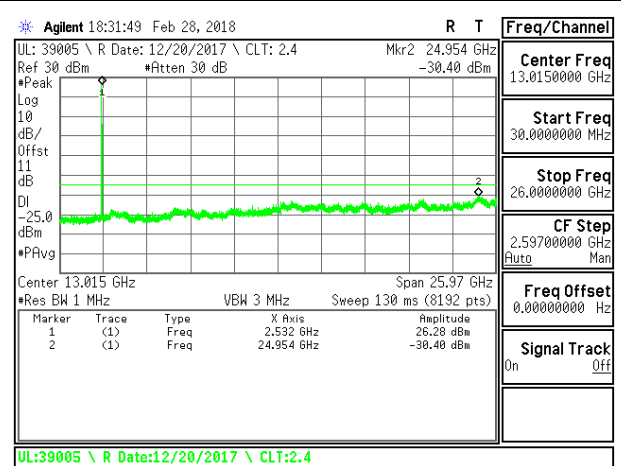


LTE B7 10MHz 16QAM Middle Channel RB1-0

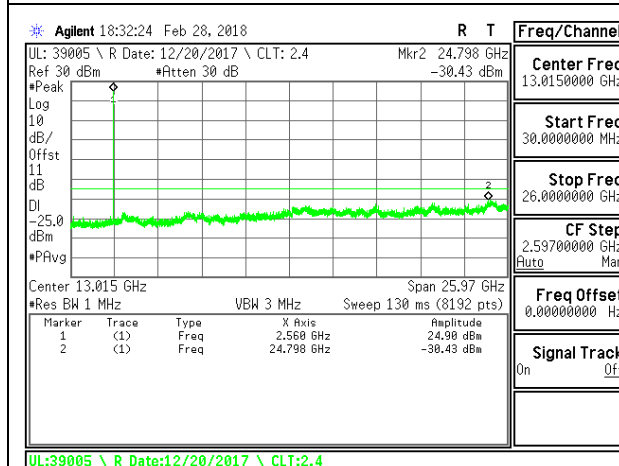

LTE B7 10MHz QPSK High Channel RB1-0

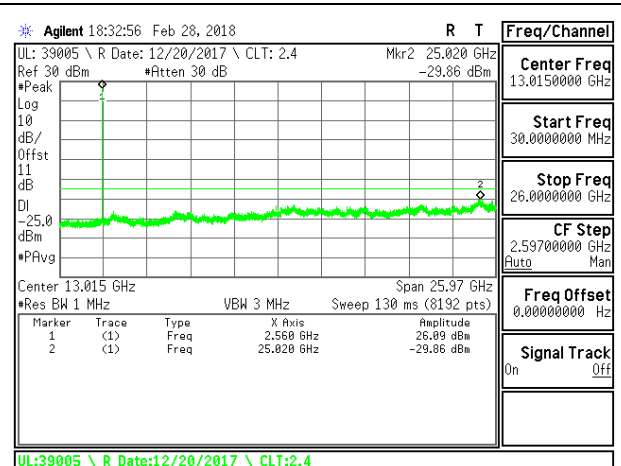



LTE B7 10MHz 16QAM High Channel RB1-0

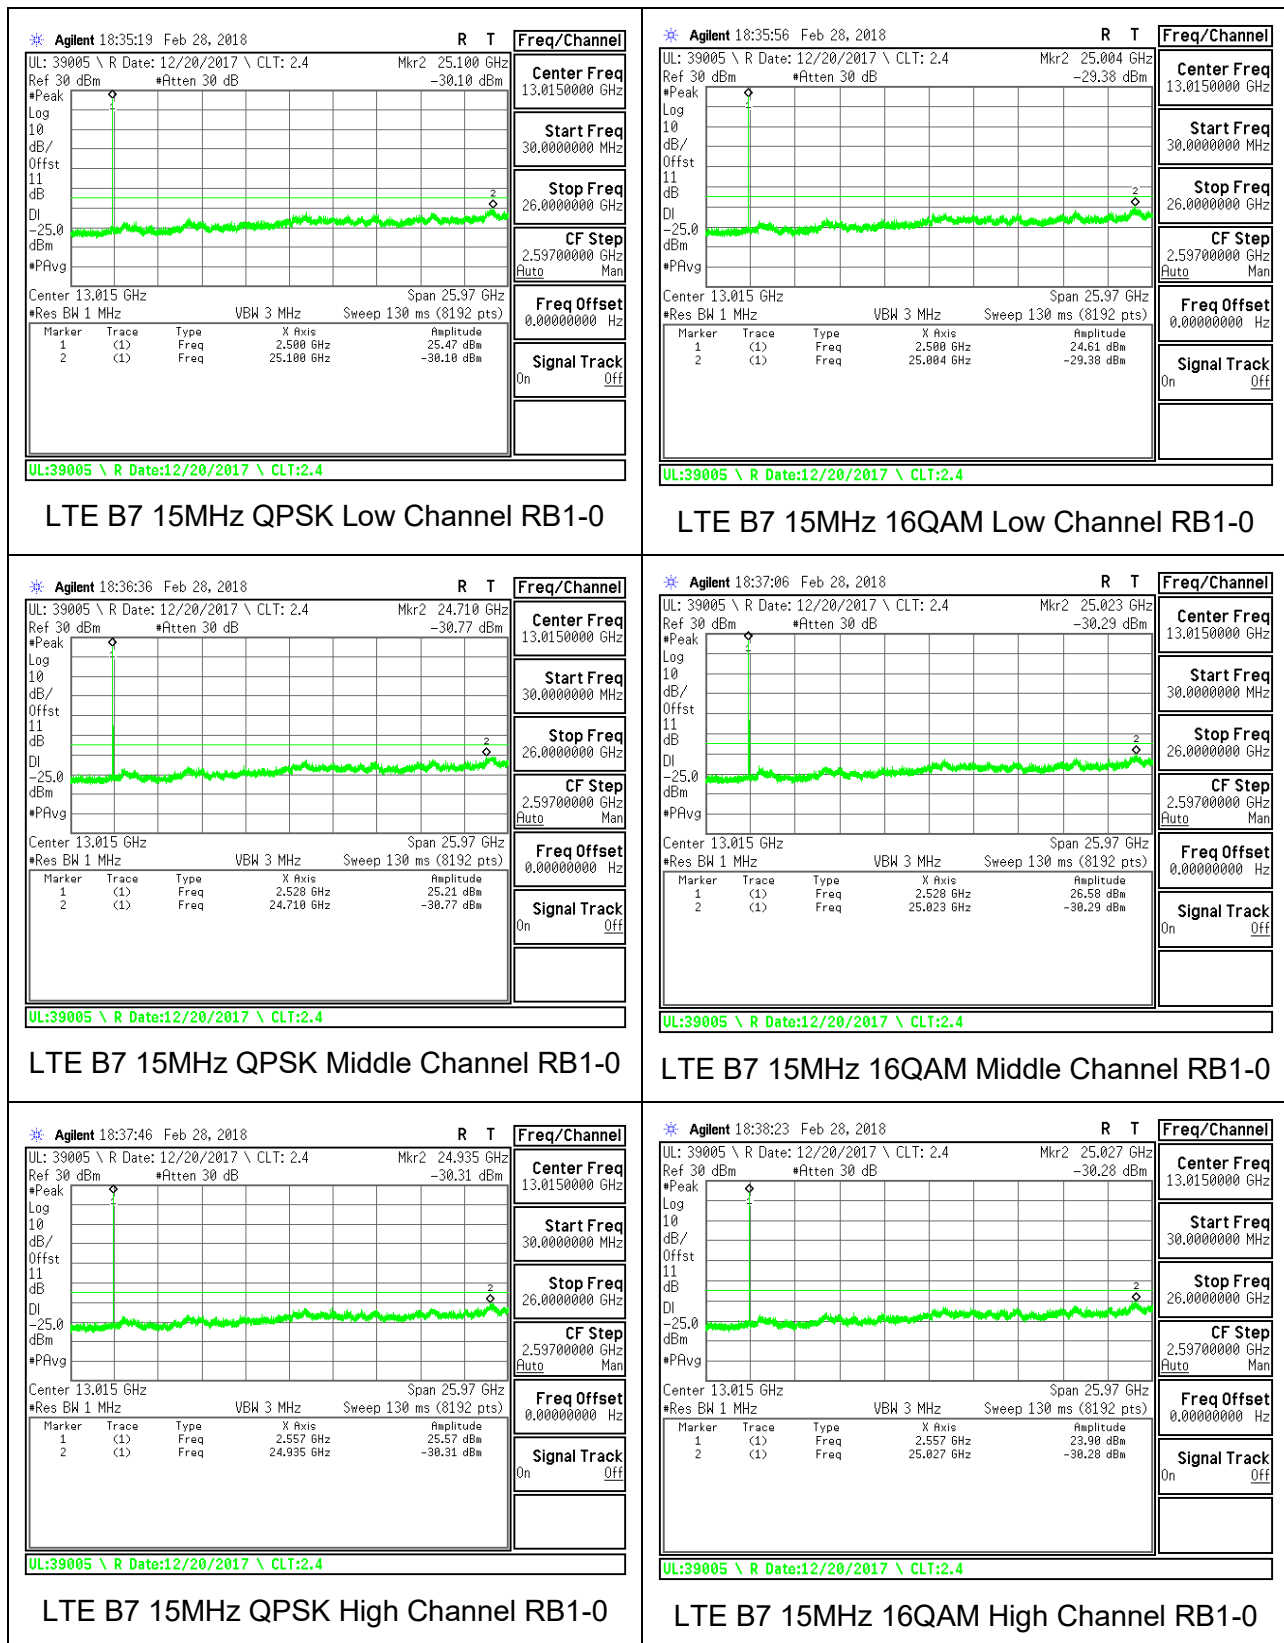




8.3.9. LTE BAND 13

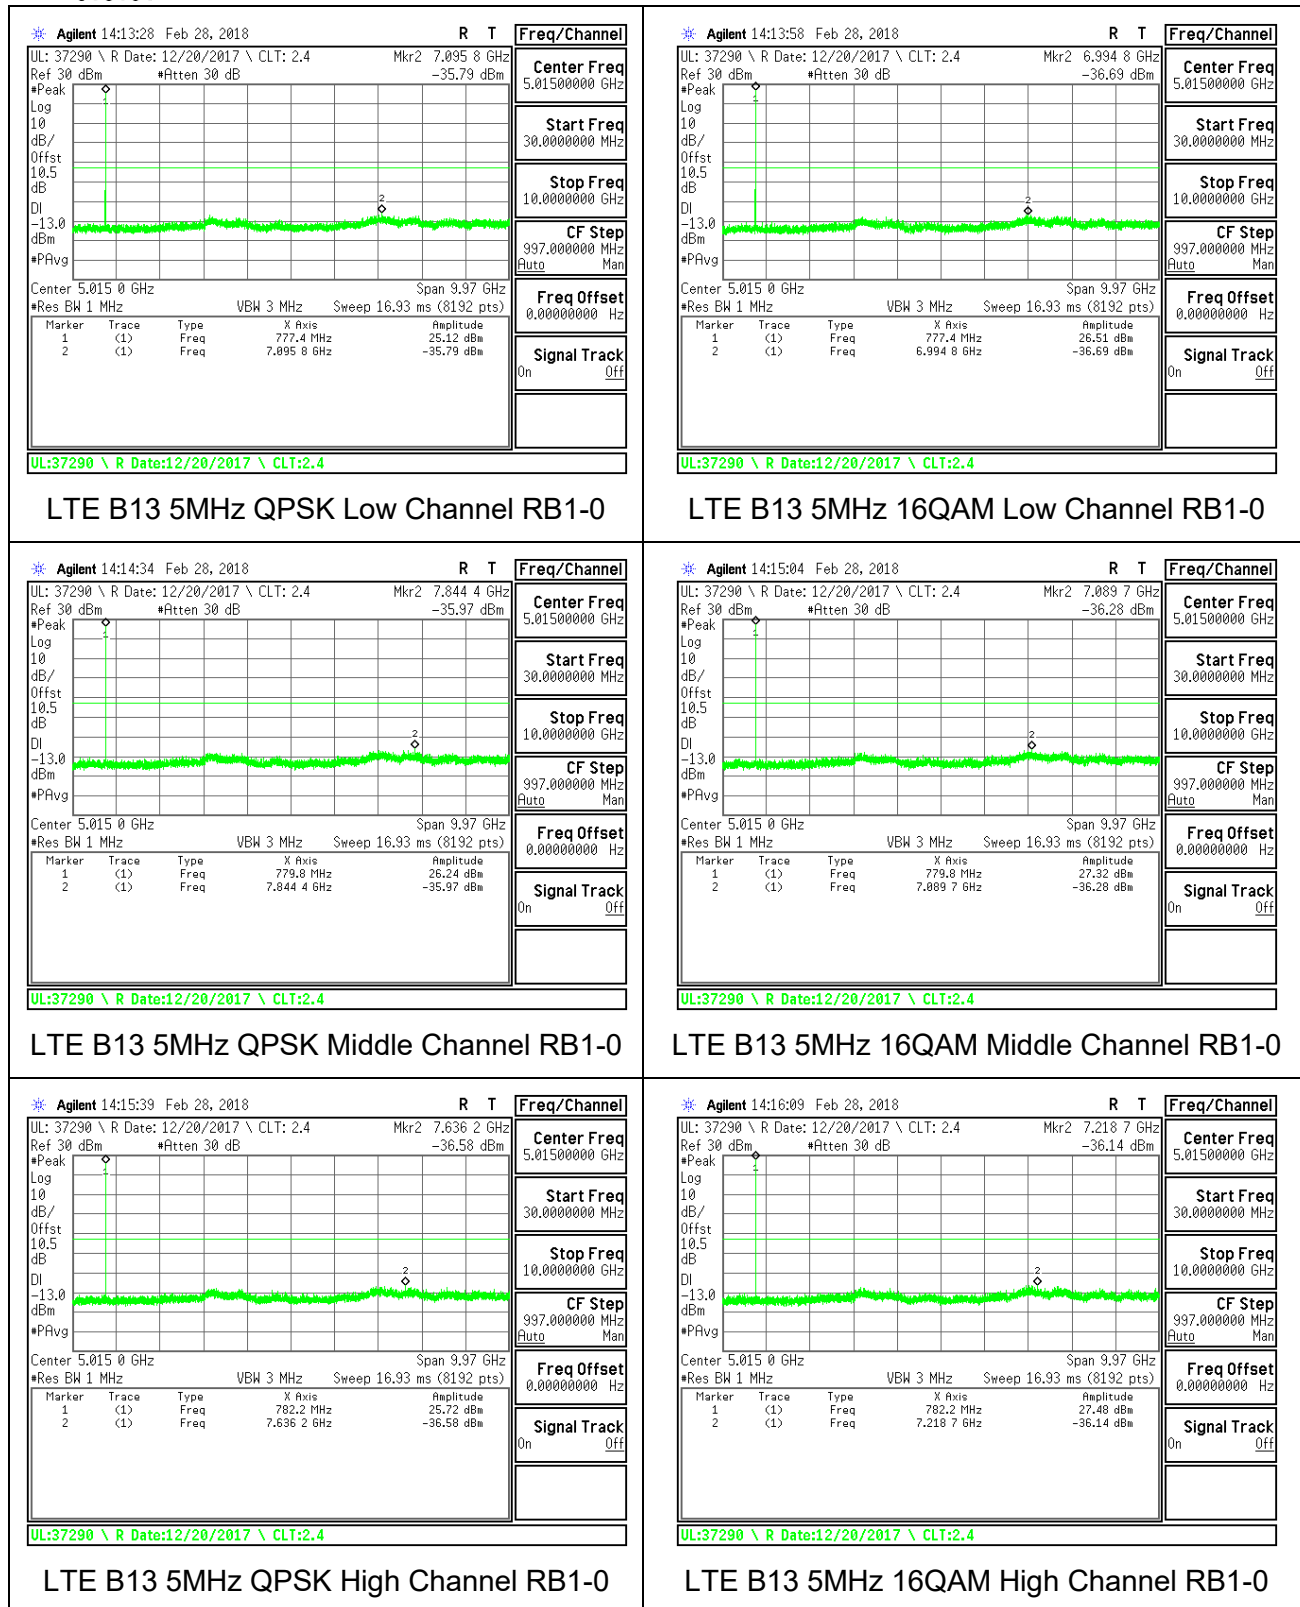

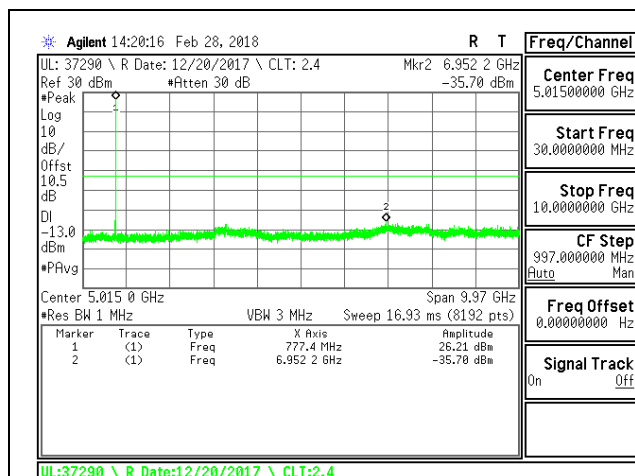


LTE B13 10MHz QPSK Middle Channel RB1-0

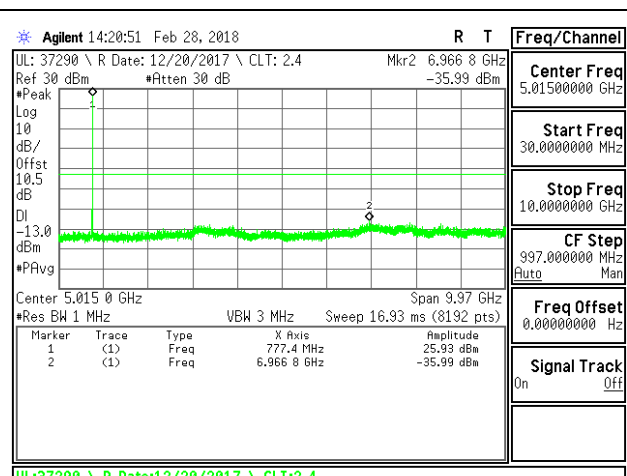


LTE B13 10MHz 16QAM Middle Channel RB1-0


8.3.10. LTE BAND 17

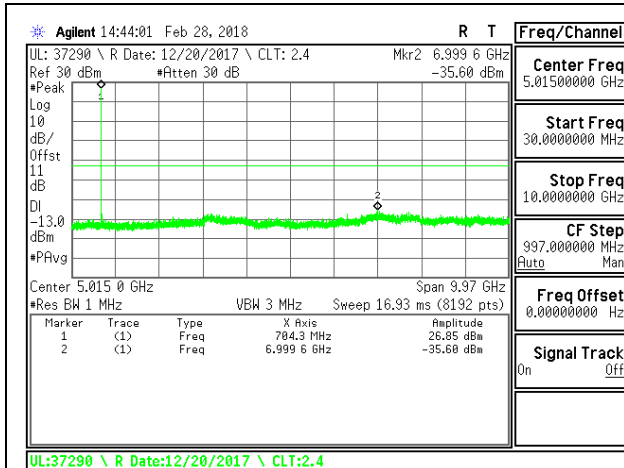


LTE B17 5MHz QPSK Low Channel RB1-0

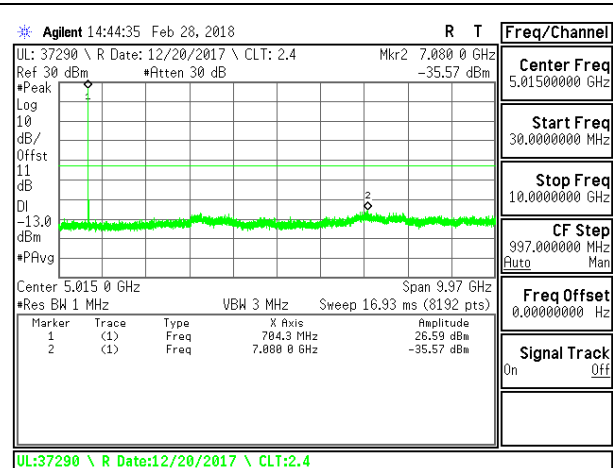


LTE B17 5MHz 16QAM Low Channel RB1-0

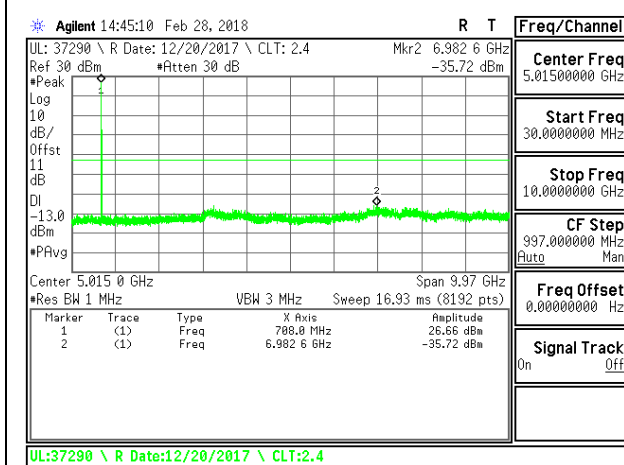


LTE B17 5MHz QPSK Middle Channel RB1-0

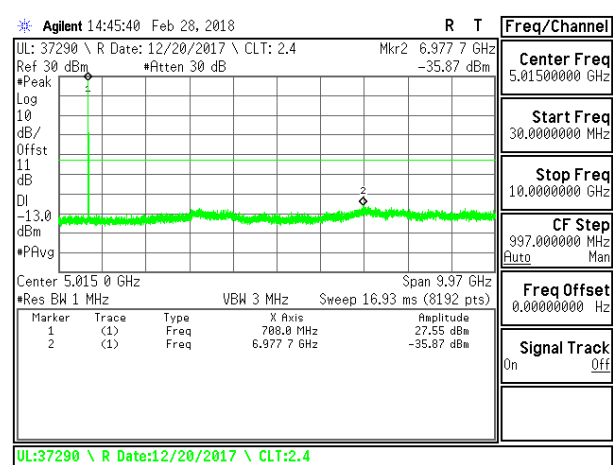


LTE B17 5MHz 16QAM Middle Channel RB1-0

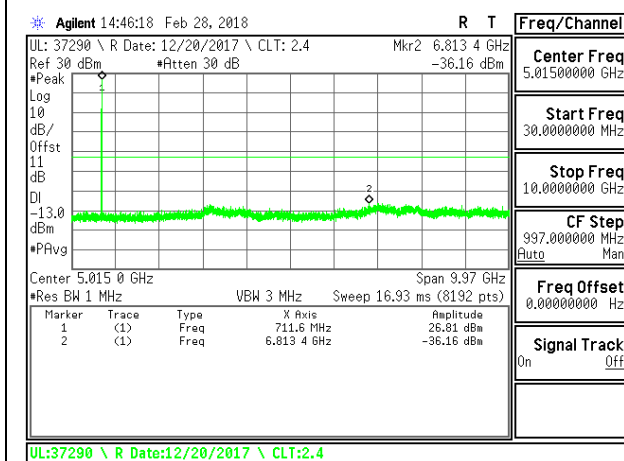


LTE B17 5MHz QPSK High Channel RB1-0

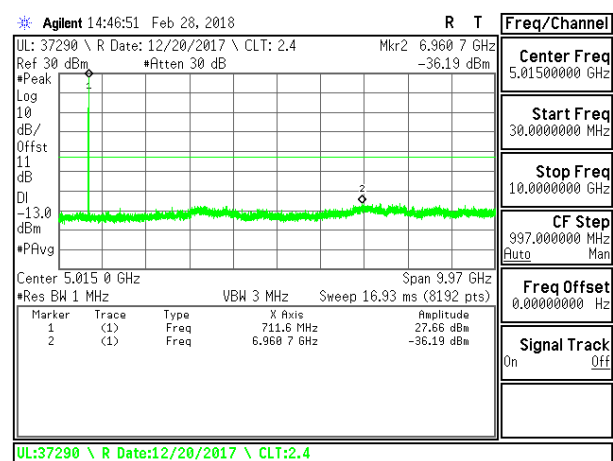


LTE B17 5MHz 16QAM High Channel RB1-0

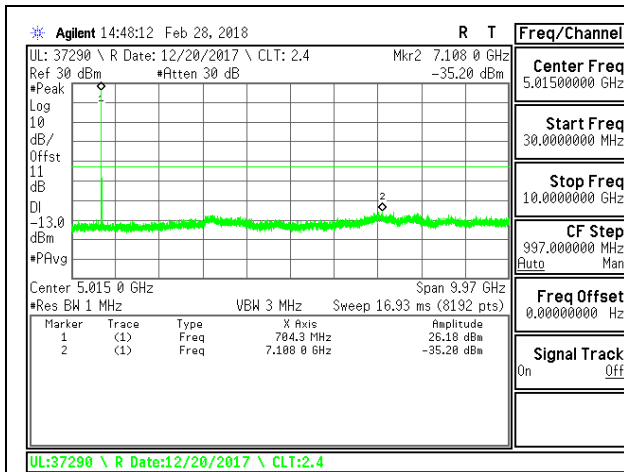


LTE B17 10MHz QPSK Low Channel RB1-0

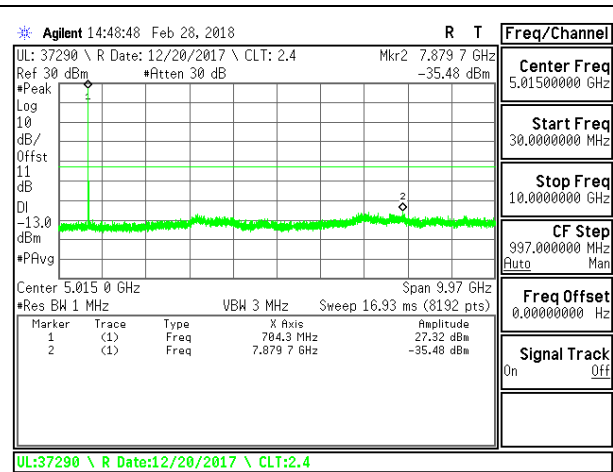


LTE B17 10MHz 16QAM Low Channel RB1-0

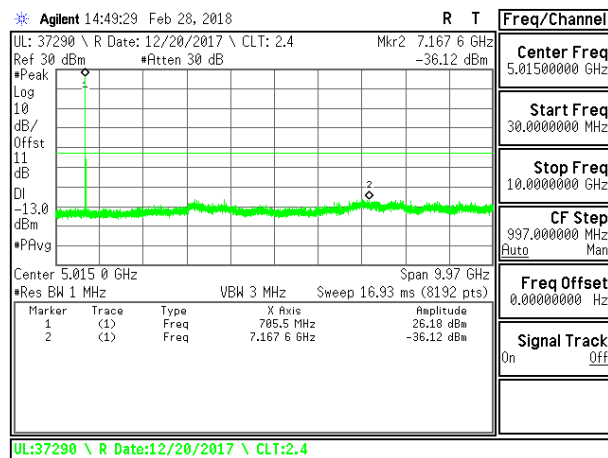


LTE B17 10MHz QPSK Middle Channel RB1-0

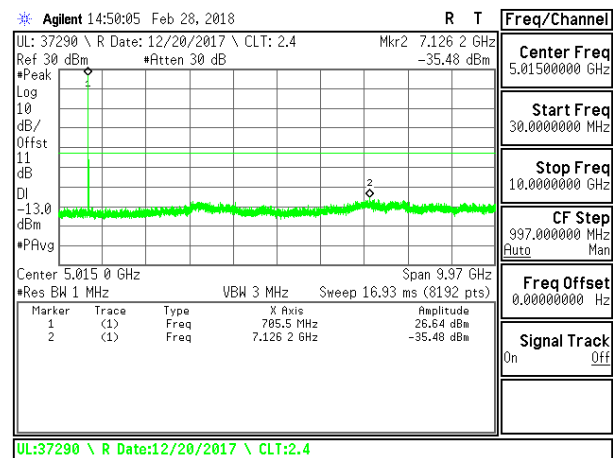

LTE B17 10MHz 16QAM Middle Channel RB1-0

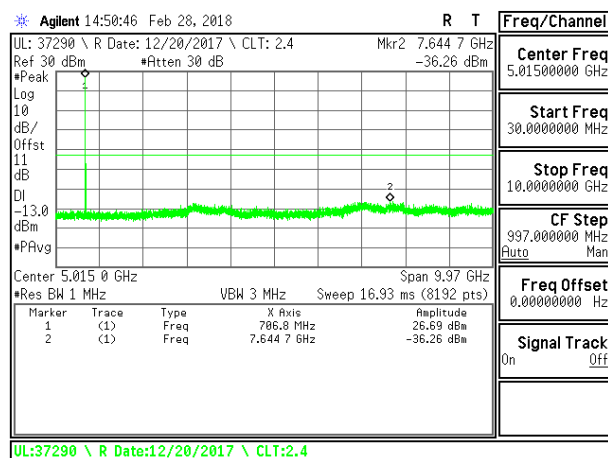



LTE B17 10MHz QPSK High Channel RB1-0

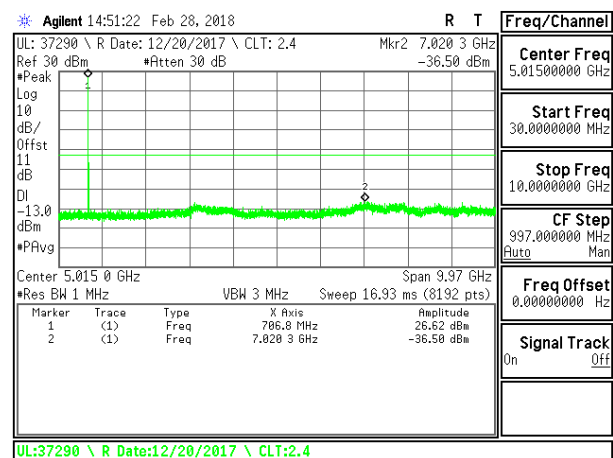


LTE B17 10MHz 16QAM High Channel RB1-0

8.3.11. LTE BAND 41

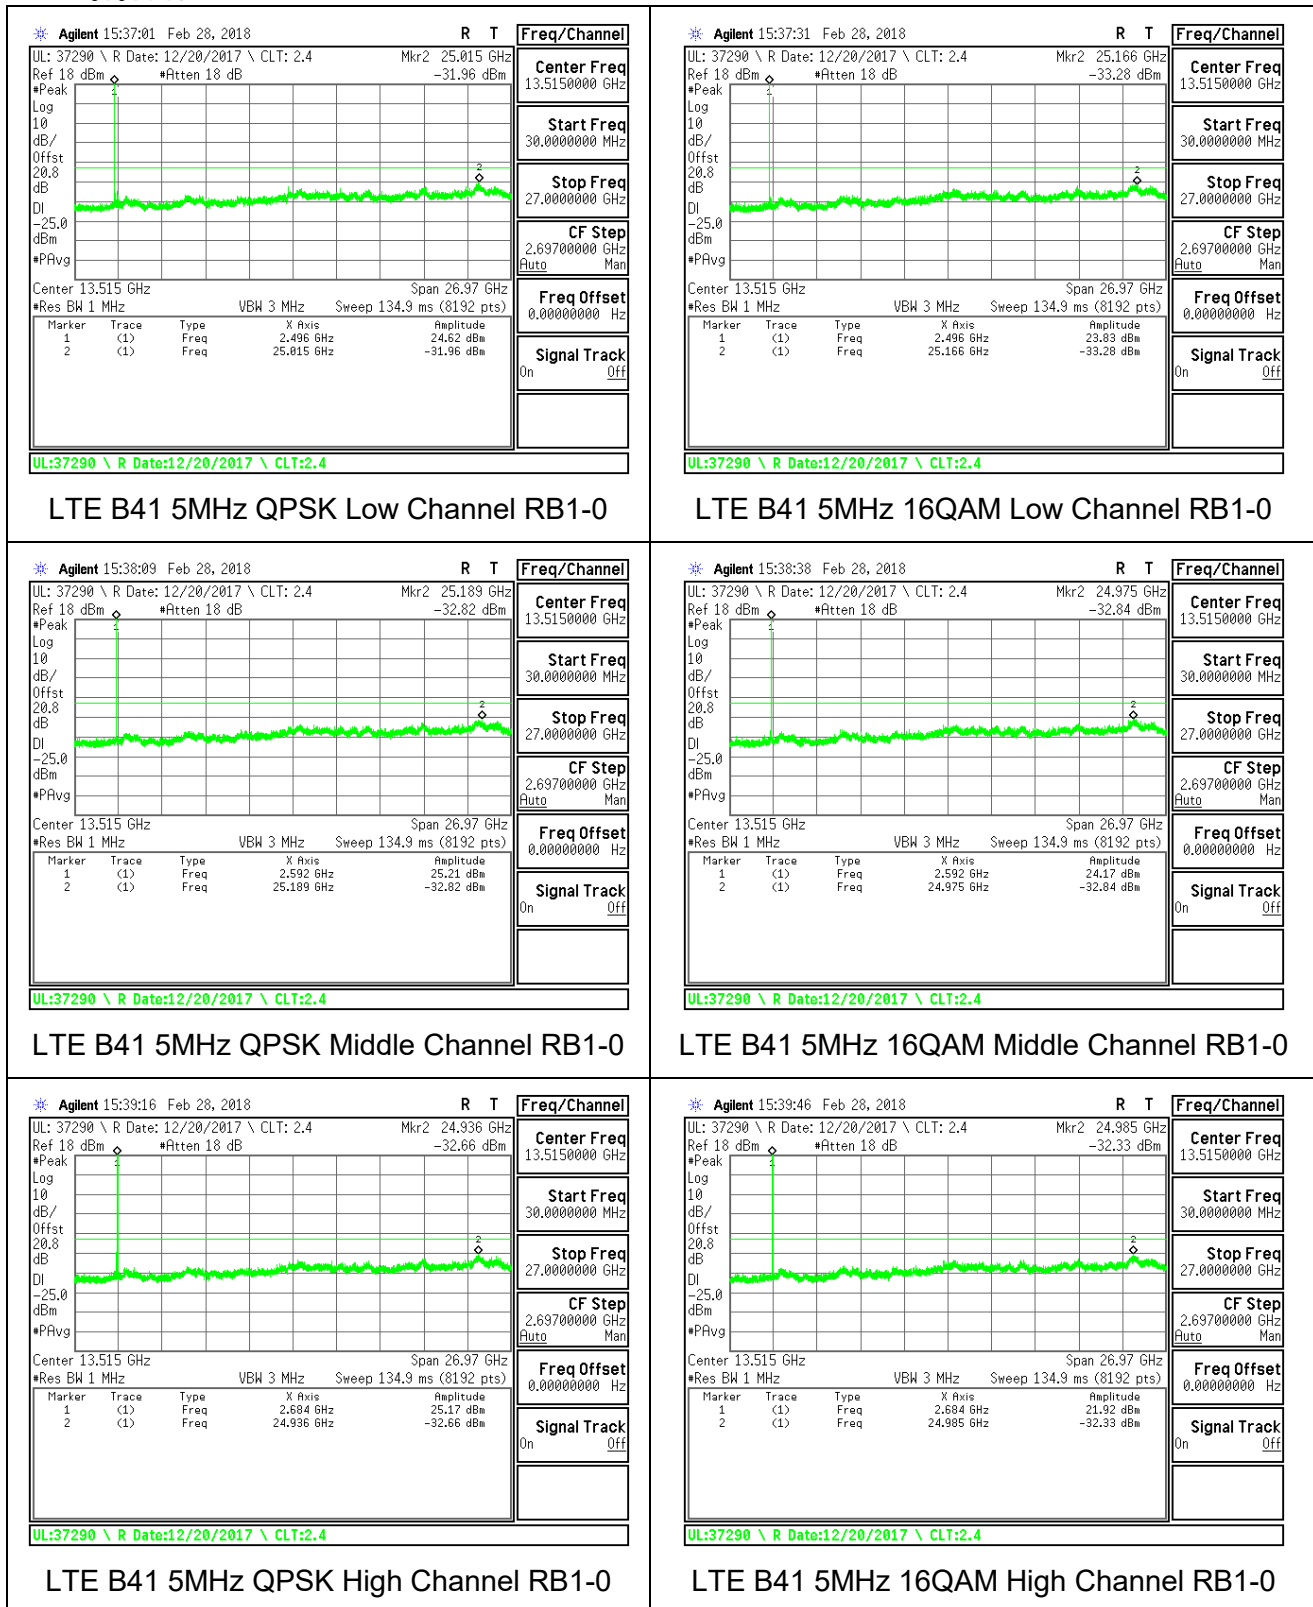


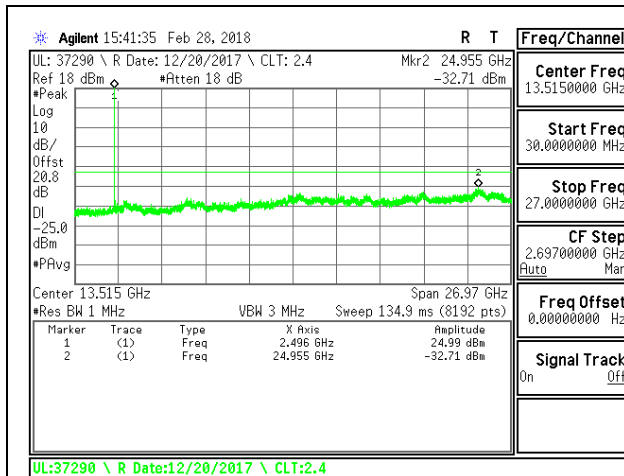


LTE B41 10MHz QPSK Low Channel RB1-0

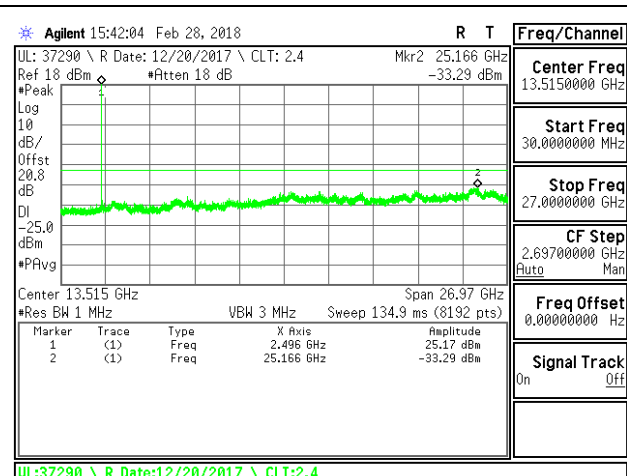


LTE B41 10MHz 16QAM Low Channel RB1-0

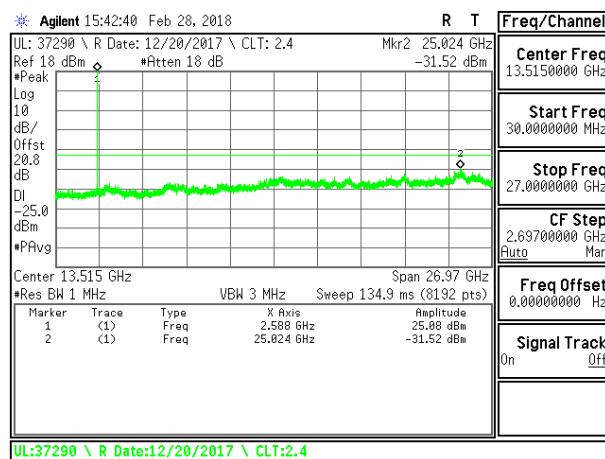


LTE B41 10MHz QPSK Middle Channel RB1-0

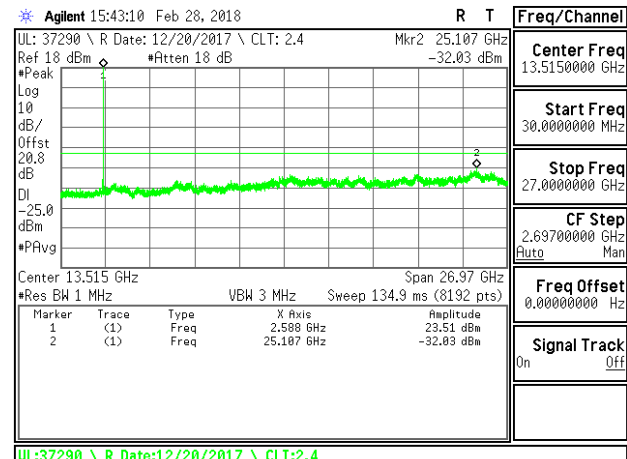


LTE B41 10MHz 16QAM Middle Channel RB1-0

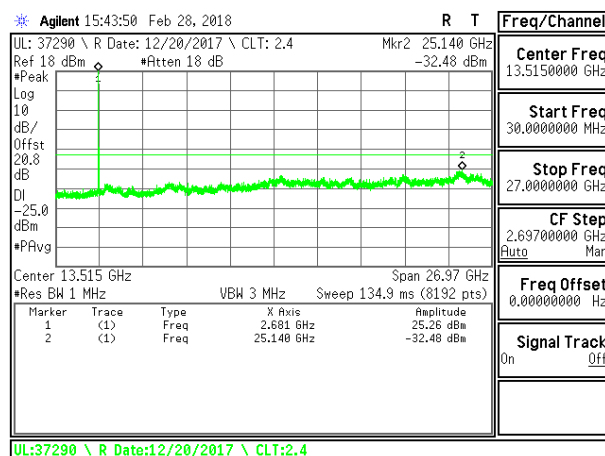


LTE B41 10MHz QPSK High Channel RB1-0

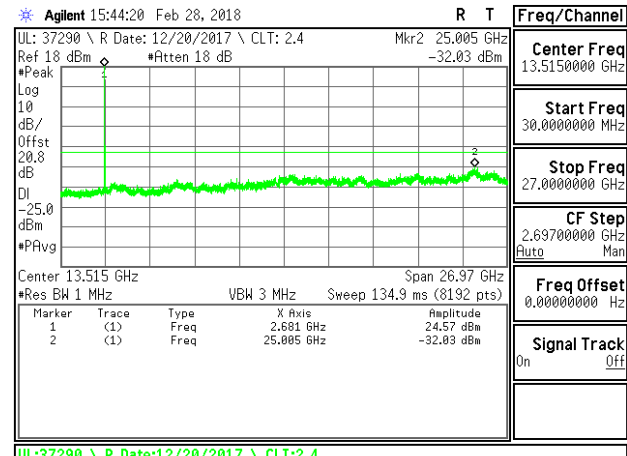


LTE B41 10MHz 16QAM High Channel RB1-0

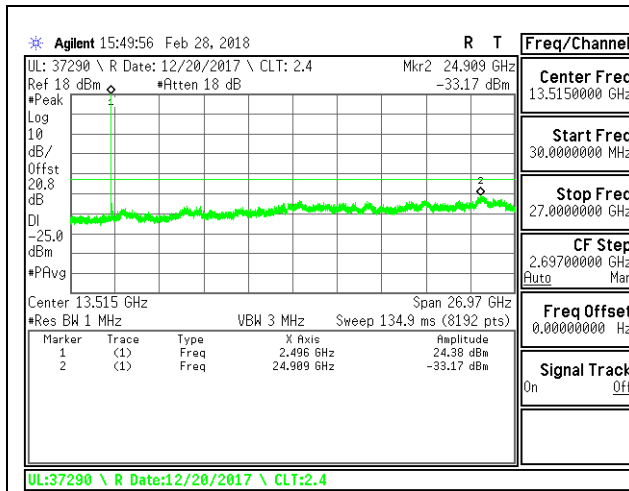


LTE B41 15MHz QPSK Low Channel RB1-0

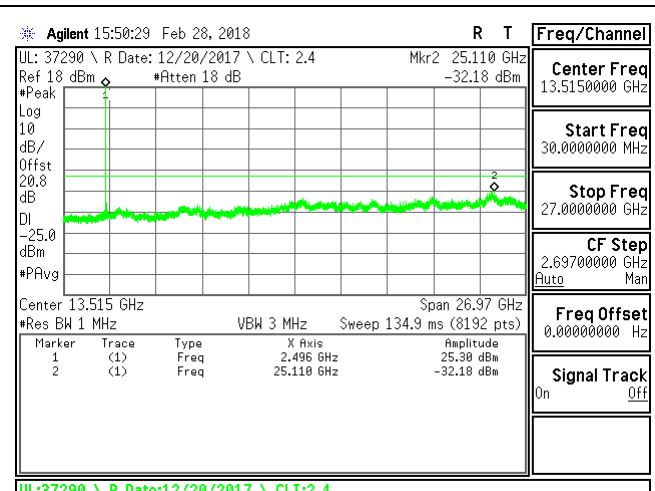


LTE B41 15MHz 16QAM Low Channel RB1-0

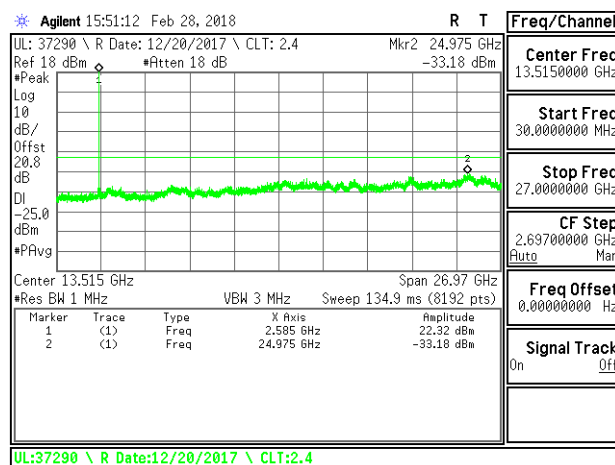


LTE B41 15MHz QPSK Middle Channel RB1-0

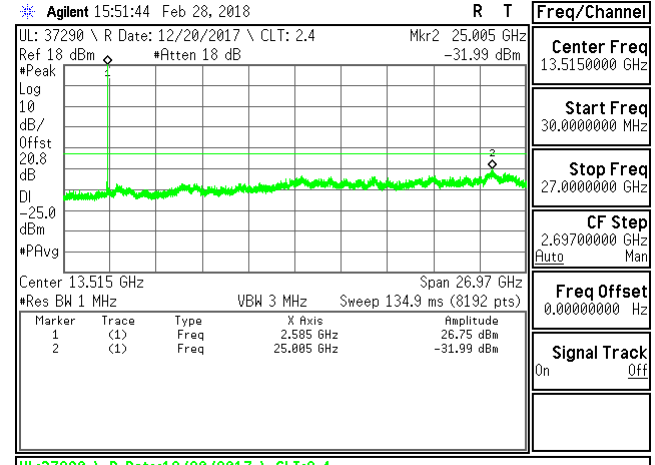


LTE B41 15MHz 16QAM Middle Channel RB1-0

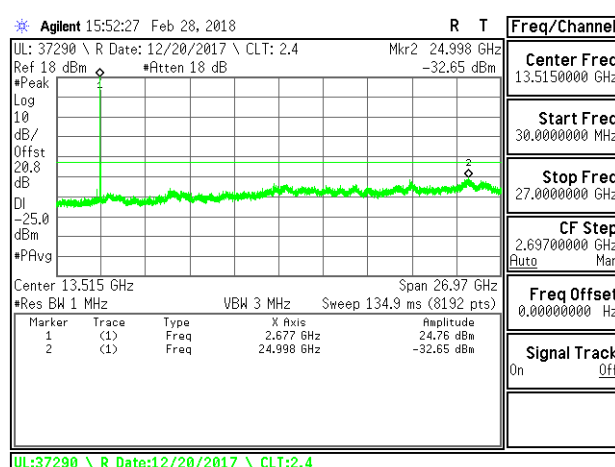


LTE B41 15MHz QPSK High Channel RB1-0

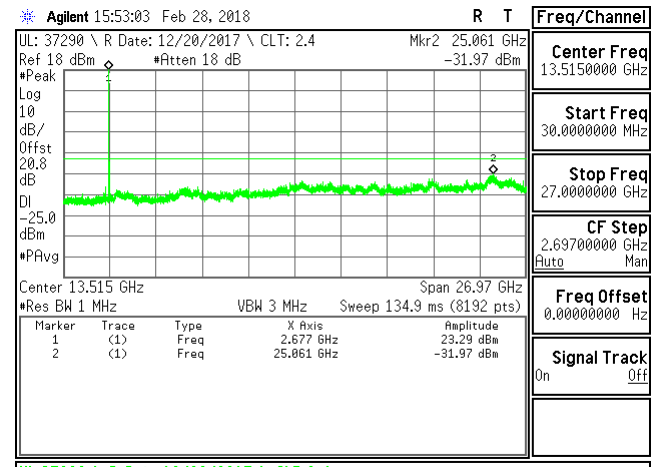


LTE B41 15MHz 16QAM High Channel RB1-0

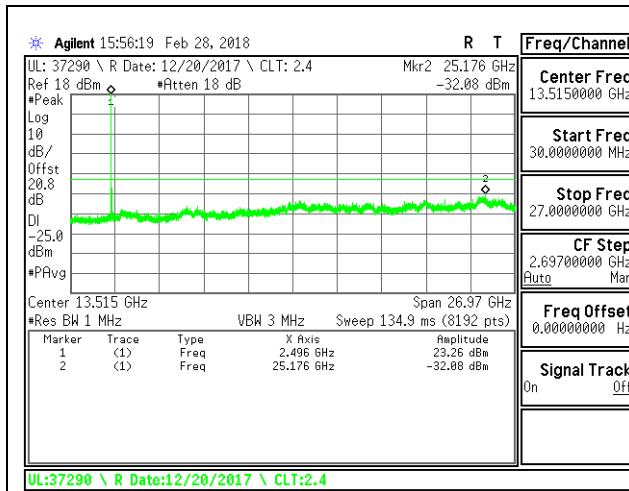


LTE B41 20MHz QPSK Low Channel RB1-0

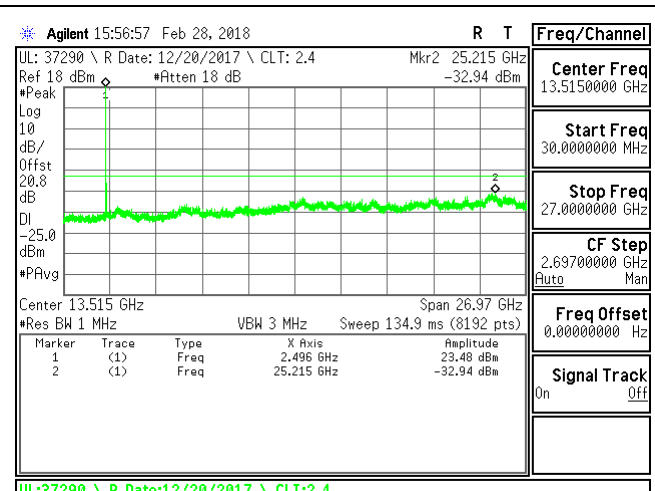


LTE B41 20MHz 16QAM Low Channel RB1-0

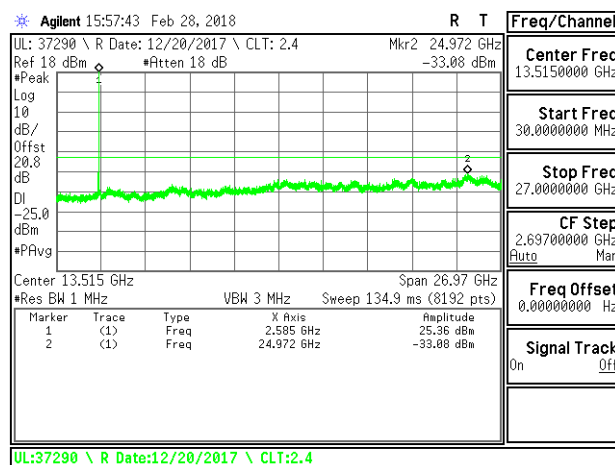


LTE B41 20MHz QPSK Middle Channel RB1-0

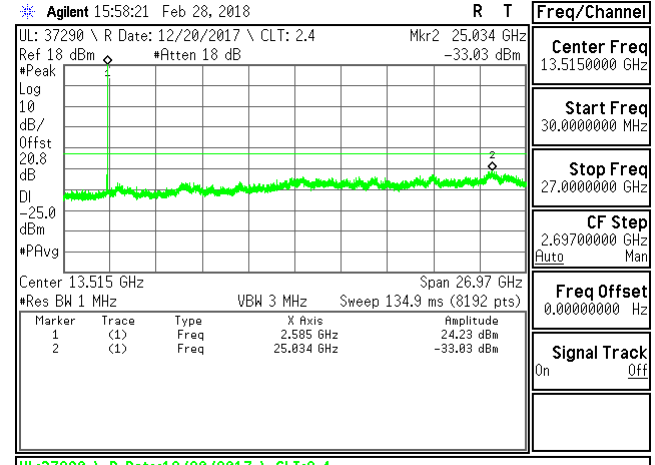

LTE B41 20MHz 16QAM Middle Channel RB1-0

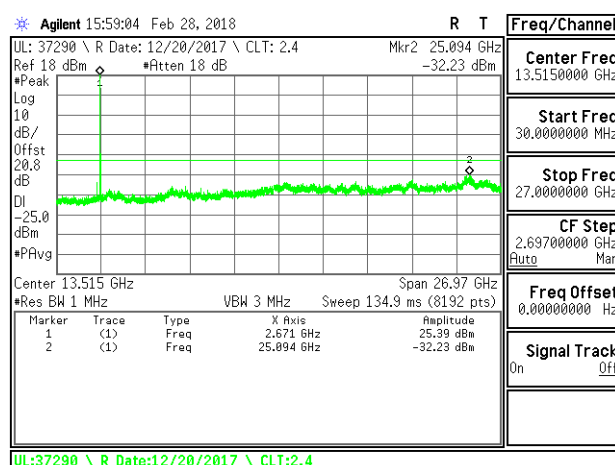

LTE B41 20MHz QPSK High Channel RB1-0

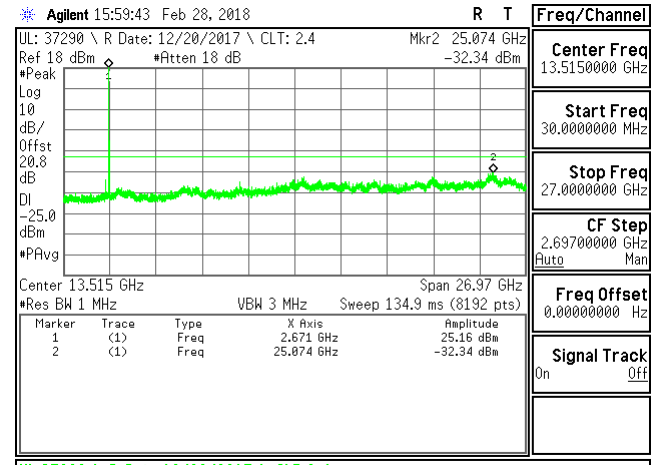

LTE B41 20MHz 16QAM High Channel RB1-0

8.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

FCC §22.355

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

FCC §24.235 & §27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30°C to $+50^{\circ}\text{C}$
- Voltage = (85% - 115%)
- Low voltage, 3.23VDC, Normal, 3.8VDC and High voltage, 4.37VDC. End Voltage, 3.2VDC.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- GSM1900
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 13
- LTE Band 17
- LTE Band 41

RESULTS

See the following pages.

Note(s):

GSM 850 Band Measured Results

GSM 850 (Frequency range: 824-849 MHz) is covered by LTE Band 5 (Frequency range: 824-849 MHz) no testing is necessary due to overlapping frequency range.

WCDMA Band 5 Measured Results

WCDMA Band 5 (Frequency range: 824-84 MHz) is covered by LTE Band 5 (Frequency range: 824-849 MHz) no testing is necessary due to overlapping frequency range.

WCDMA Band 2 Measured Results

WCDMA Band 2 (Frequency range: 1850-1910 MHz) is covered by LTE Band 2 (Frequency range: 1850-1910 MHz) no testing is necessary due to overlapping frequency range.

WCDMA Band 4 Measured Results

WCDMA Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 4 (Frequency range: 1710-1755 MHz) no testing is necessary due to overlapping frequency range.

8.4.1. GSM 1900

Reference Frequency: GSM1900 Mid Channel			1880	MHz @ 20°C
Limit: to stay +/- 2.5 ppm =			4700.000	Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	1880.000017	-0.002	2.5
3.85	40	1880.000017	-0.002	2.5
3.85	30	1880.000015	-0.001	2.5
3.85	20	1880.000013	0	2.5
3.85	10	1880.000013	0.000	2.5
3.85	0	1880.000012	0.001	2.5
3.85	-10	1880.000013	0.000	2.5
3.85	-20	1880.000013	0.000	2.5
3.85	-30	1880.000014	-0.001	2.5

Reference Frequency: GSM1900 Mid Channel			1880	MHz @ 20°C
Limit: to stay +/- 2.5 ppm =			4700.000	Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	1880.000013	0	2.5
4.25	25	1880.000015	-0.001	2.5
3.65	25	1880.000016	-0.002	2.5

8.4.2. LTE BAND 4

Reference Frequency: LTE Band 4 Mid Channel		1732.5	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		4331.250	Hz	
Power Supply (Vdc)	Environment	Frequency Deviation Measured with Time Elapse		
	Temperature (°C)	(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	1732.500014	-0.001	2.5
3.85	40	1732.500013	-0.001	2.5
3.85	30	1732.500013	-0.001	2.5
3.85	20	1732.500012	0	2.5
3.85	10	1732.500011	0.000	2.5
3.85	0	1732.500010	0.001	2.5
3.85	-10	1732.500011	0.000	2.5
3.85	-20	1732.500010	0.001	2.5
3.85	-30	1732.500010	0.001	2.5

Reference Frequency: LTE Band 4 Mid Channel		1732.5	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		4331.250	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	1732.500012	0	2.5
4.25	25	1732.500010	0.001	2.5
3.65	25	1732.500010	0.001	2.5

8.4.3. LTE BAND 5

Reference Frequency: LTE Band 5 Mid Channel			836.5	MHz @ 20°C
Limit: to stay +/- 2.5 ppm =			2091.250	Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	836.499993	0.001	2.5
3.85	40	836.499993	0.001	2.5
3.85	30	836.499993	0.001	2.5
3.85	20	836.499994	0	2.5
3.85	10	836.499993	0.001	2.5
3.85	0	836.499995	-0.001	2.5
3.85	-10	836.499995	-0.001	2.5
3.85	-20	836.499994	-0.001	2.5
3.85	-30	836.499995	-0.002	2.5

Reference Frequency: LTE Band 5 Mid Channel		836.5	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		2091.250	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	836.499994	0	2.5
4.25	25	836.499994	0.000	2.5
3.65	25	836.499993	0.001	2.5

8.4.4. LTE BAND 7

Reference Frequency: LTE Band 7 Mid Channel			2535	MHz @ 20°C
Limit: to stay +/- 2.5 ppm =			6337.500	Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	2535.000016	-0.002	2.5
3.85	40	2535.000014	-0.001	2.5
3.85	30	2535.000012	0.000	2.5
3.85	20	2535.000012	0	2.5
3.85	10	2535.000012	0.000	2.5
3.85	0	2535.000012	0.000	2.5
3.85	-10	2535.000014	-0.001	2.5
3.85	-20	2535.000014	-0.001	2.5
3.85	-30	2535.000014	-0.001	2.5

Reference Frequency: LTE Band 7 Mid Channel			2535	MHz @ 20°C
Limit: to stay +/- 2.5 ppm =			6337.500	Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	2535.000012	0	2.5
4.25	25	2535.000013	0.000	2.5
3.65	25	2535.000013	-0.001	2.5

8.4.5. LTE BAND 13

Reference Frequency: LTE Band 13 Mid Channel 782 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 1955.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	781.999994	-0.001	2.5
3.85	40	781.999993	0.000	2.5
3.85	30	781.999993	0.000	2.5
3.85	20	781.999993	0	2.5
3.85	10	781.999992	0.001	2.5
3.85	0	781.999992	0.002	2.5
3.85	-10	781.999992	0.002	2.5
3.85	-20	781.999995	-0.002	2.5
3.85	-30	781.999995	-0.002	2.5

Reference Frequency: LTE Band 13 Mid Channel 782 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 1955.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	781.999993	0	2.5
4.25	25	781.999993	0.000	2.5
3.65	25	781.999992	0.001	2.5

8.4.6. LTE BAND 17

Reference Frequency: LTE Band 17 Mid Channel 710 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 1775.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	710.000011	-0.003	2.5
3.85	40	710.000010	-0.001	2.5
3.85	30	710.000008	0.001	2.5
3.85	20	710.000009	0	2.5
3.85	10	710.000010	-0.001	2.5
3.85	0	710.000010	0.000	2.5
3.85	-10	710.000009	0.000	2.5
3.85	-20	710.000007	0.003	2.5
3.85	-30	710.000007	0.004	2.5

Reference Frequency: LTE Band 17 Mid Channel 710 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 1775.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	710.000009	0	2.5
4.25	25	710.000007	0.002	2.5
3.65	25	710.000008	0.001	2.5

8.4.7. LTE BAND 41

Reference Frequency: LTE Band 41 Mid Channel			2593	MHz @ 20°C
Limit: to stay +/- 2.5 ppm =			6482.500	Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	2593.000016	0.000	2.5
3.85	40	2592.999984	0.012	2.5
3.85	30	2593.000014	0.001	2.5
3.85	20	2593.000016	0	2.5
3.85	10	2593.000016	0.000	2.5
3.85	0	2593.000021	-0.002	2.5
3.85	-10	2593.000019	-0.001	2.5
3.85	-20	2593.000015	0.000	2.5
3.85	-30	2593.000014	0.001	2.5

Reference Frequency: LTE Band 41 Mid Channel		2593	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		6482.500	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	2593.000016	0	2.5
4.25	25	2593.000019	-0.001	2.5
3.65	25	2593.000020	-0.002	2.5

8.5. PEAK TO AVERAGE RATIO


LIMITS

In addition, the peak to average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.


RESULT

Full resource block (FRB) for each bandwidth was used to measure as the worst case. The results from all CCDF measurements are passed with 13dB peak-to-average power ratio criteria..


8.5.1. GSM

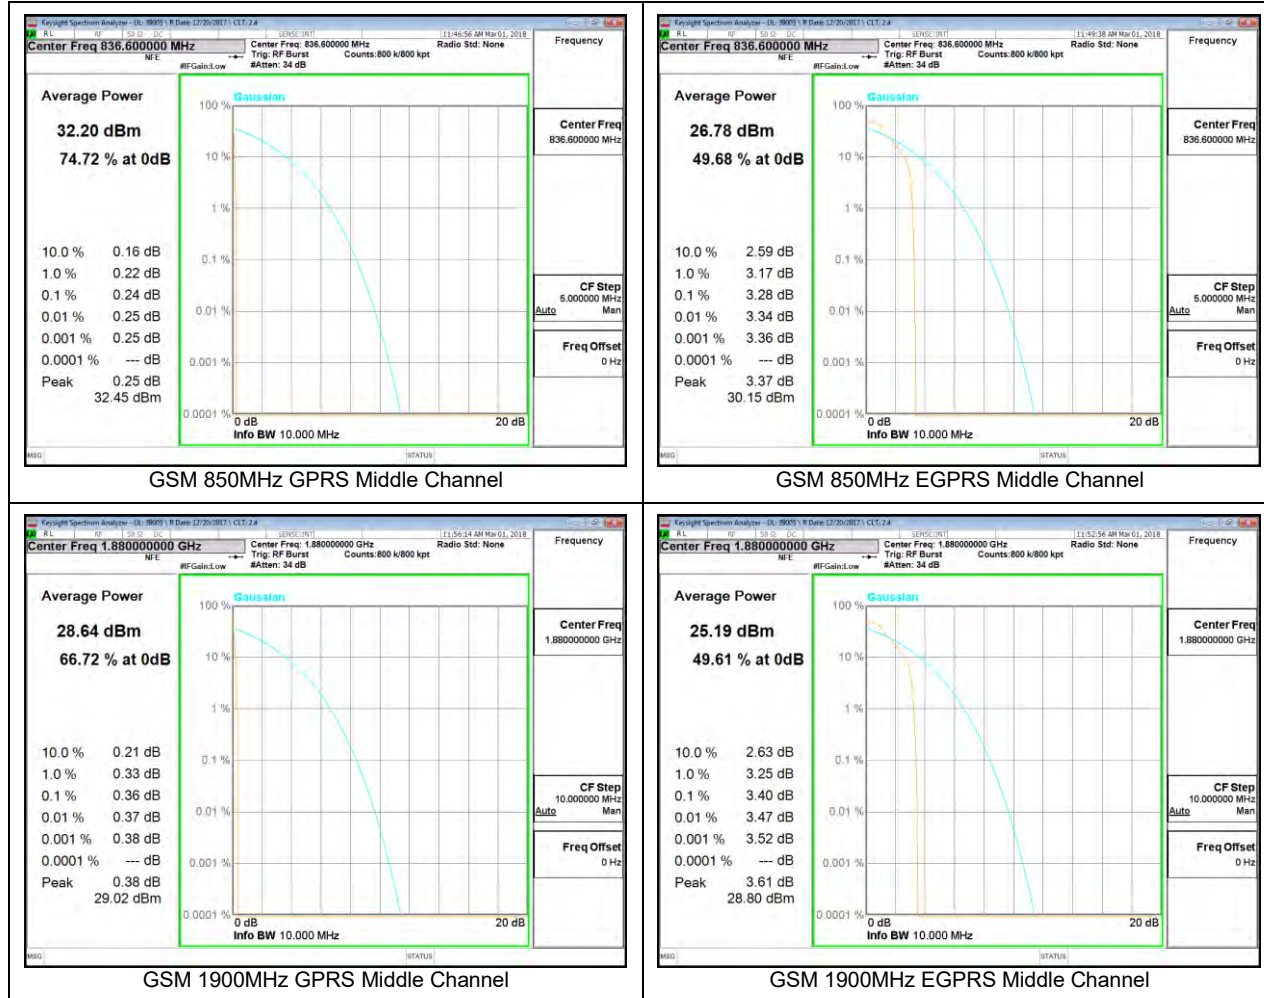


8.5.2. WCDMA

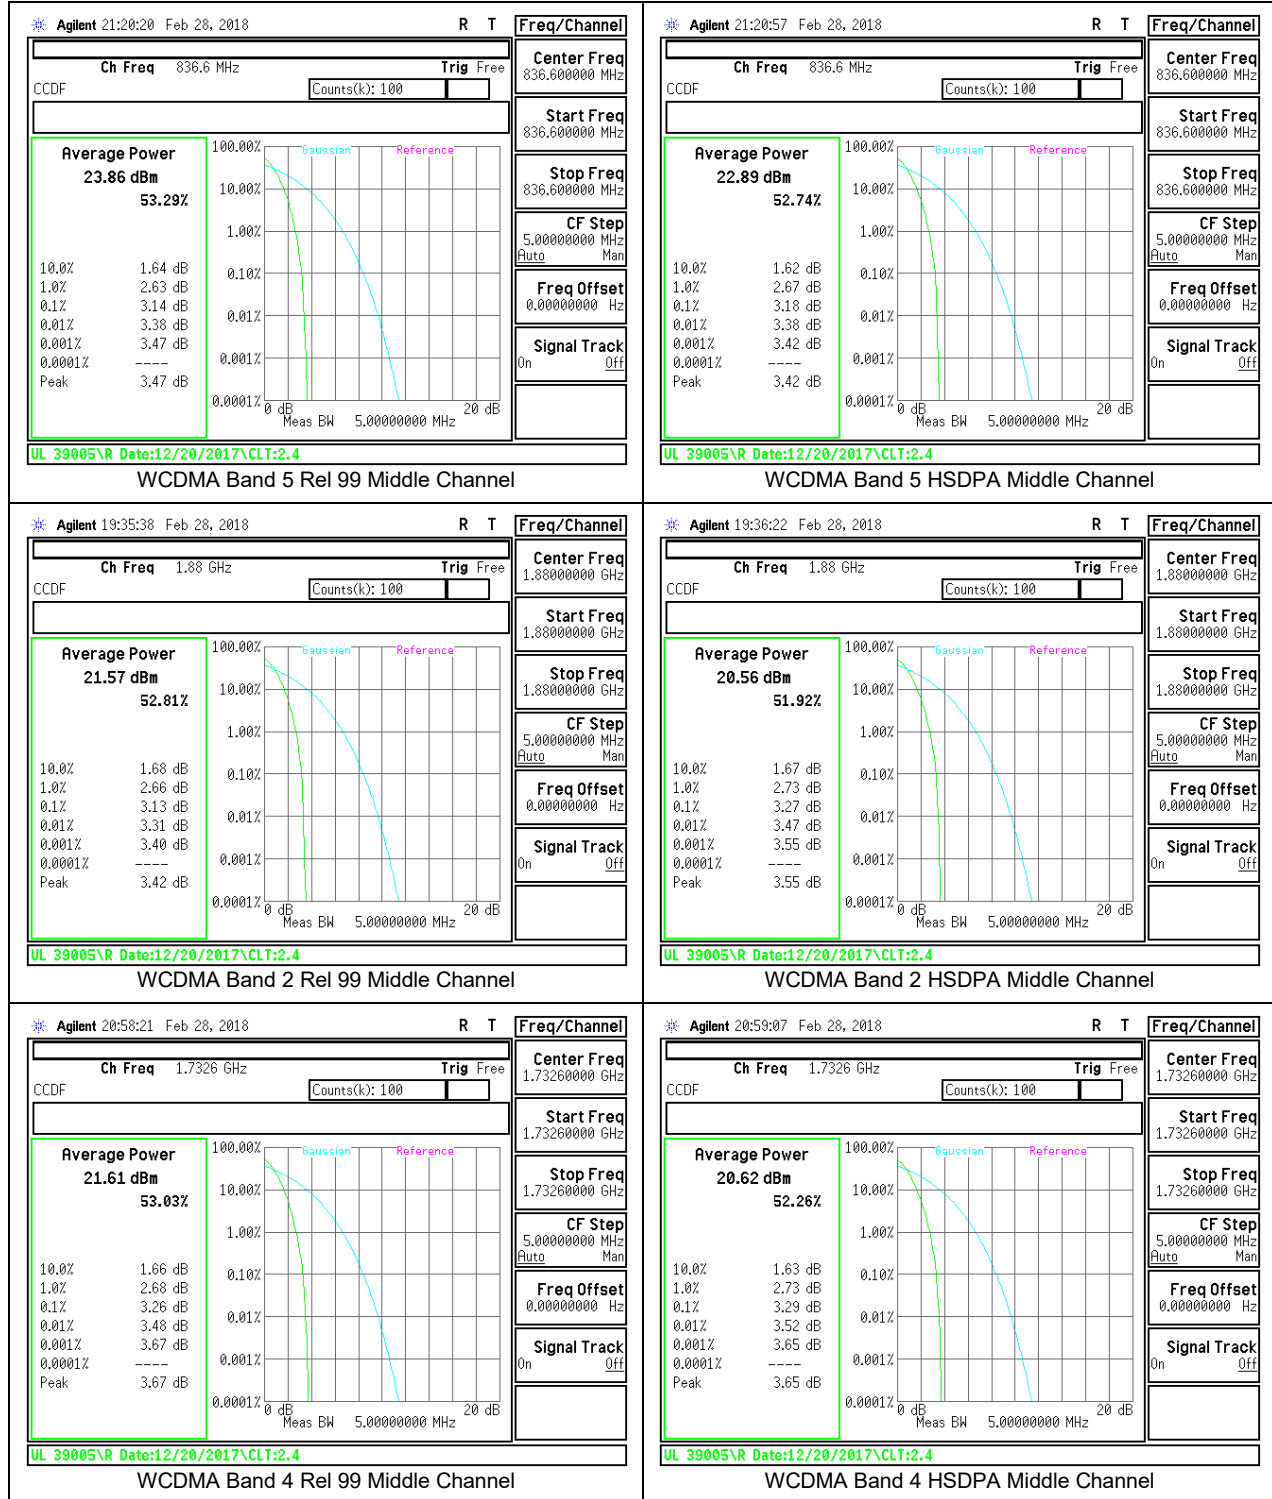



8.5.3. LTE BAND 4

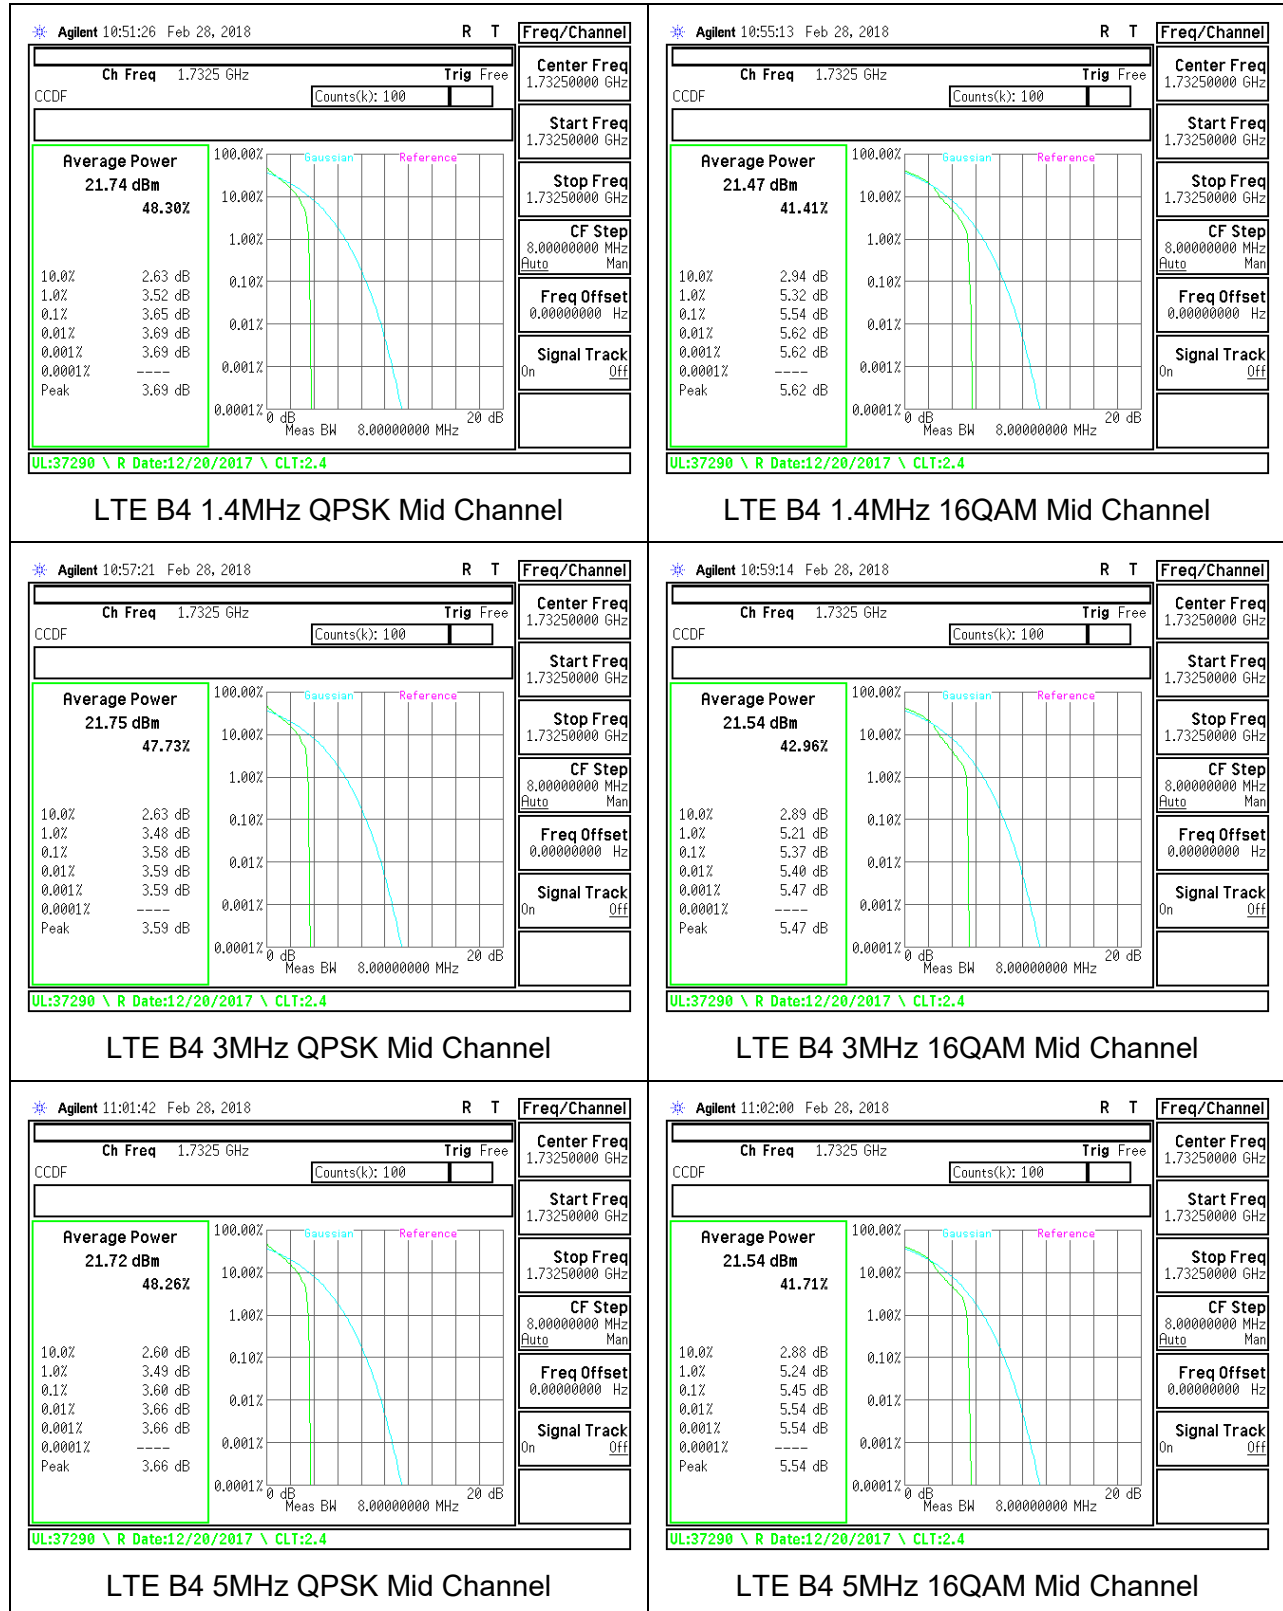

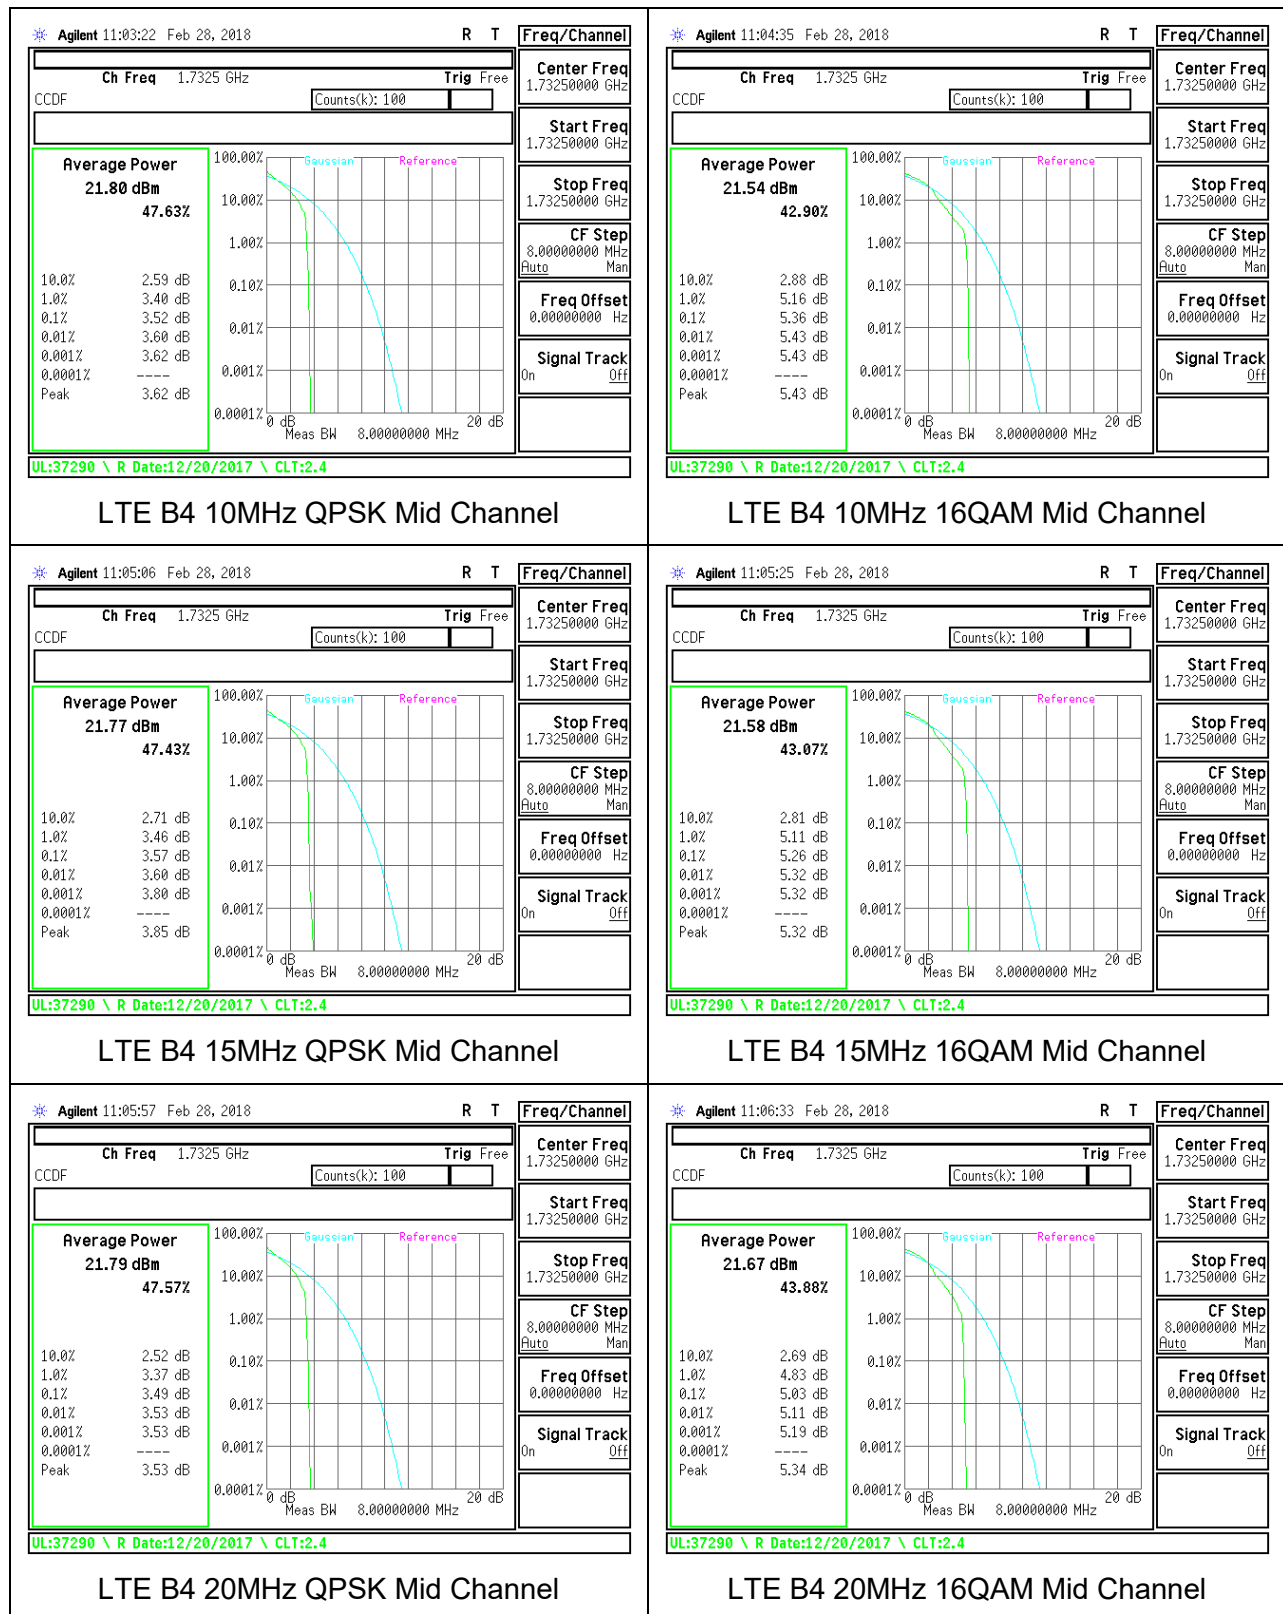



8.5.4. LTE BAND 5

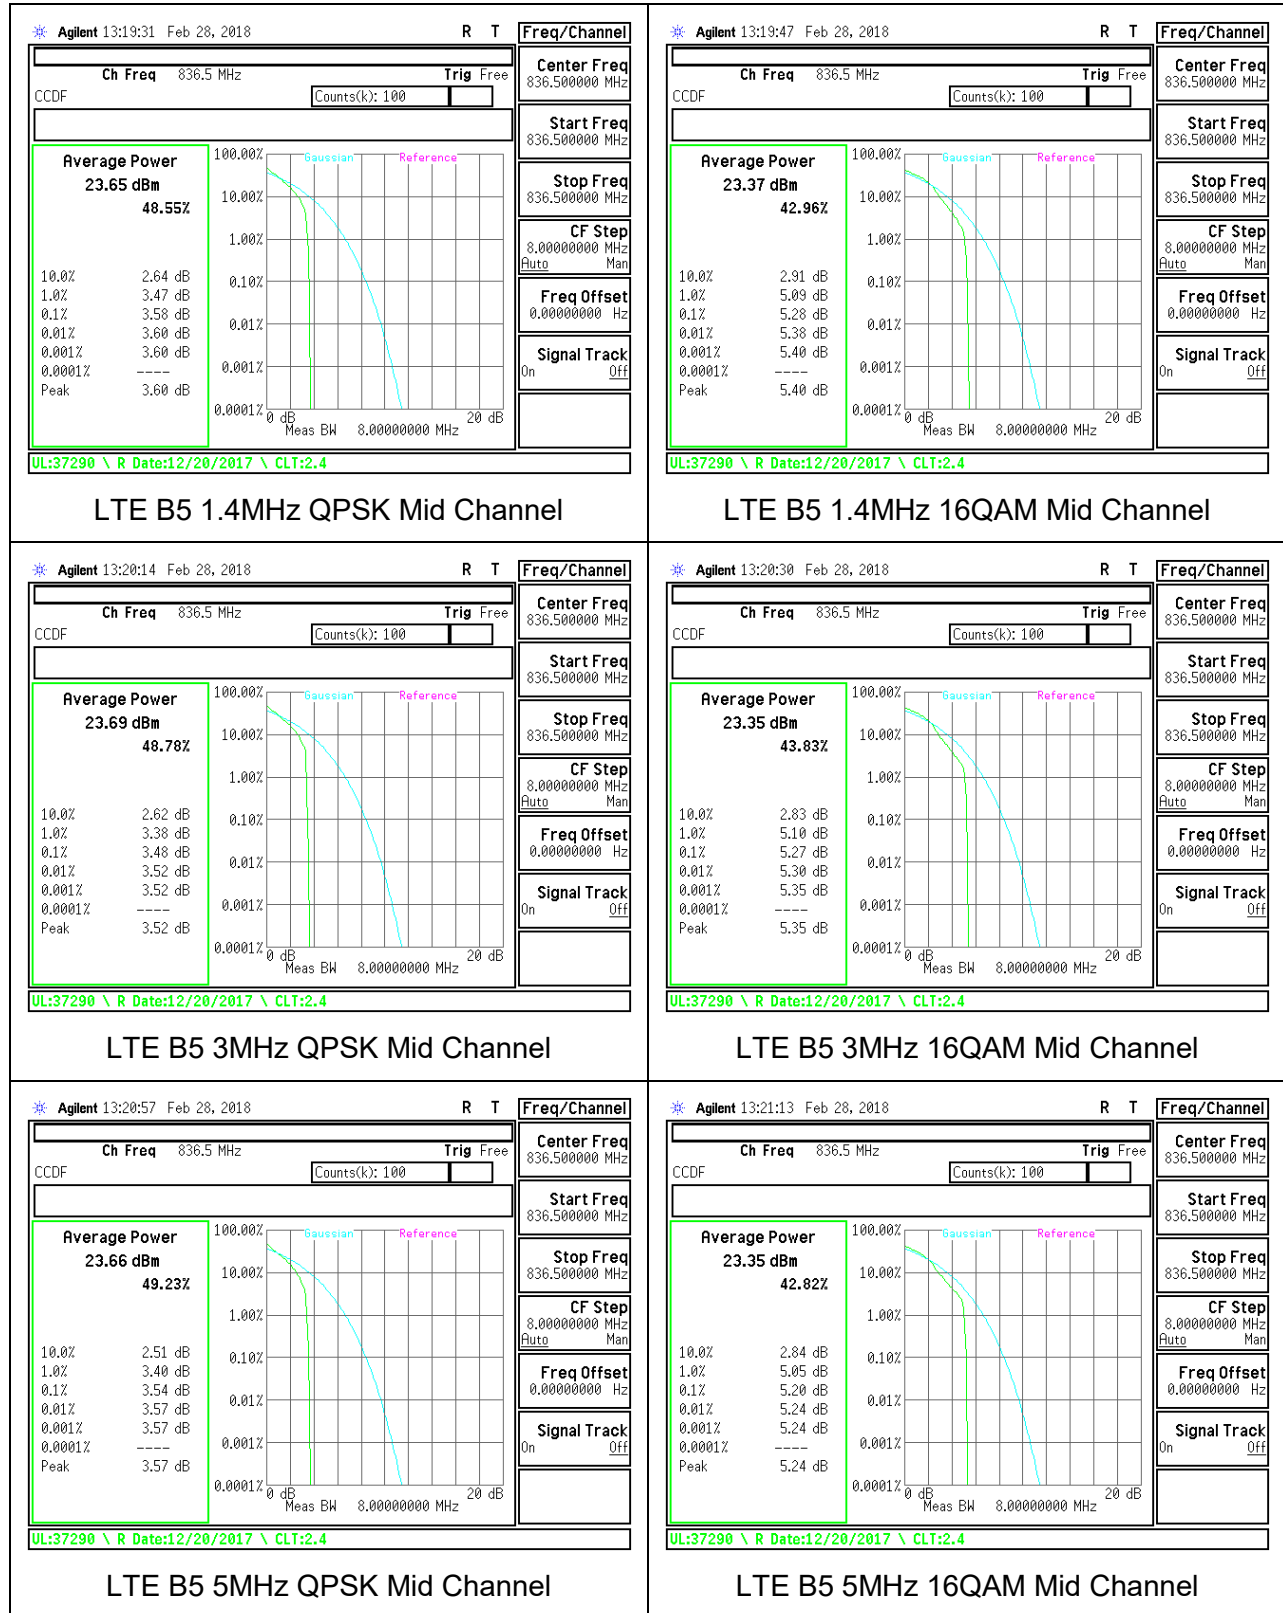

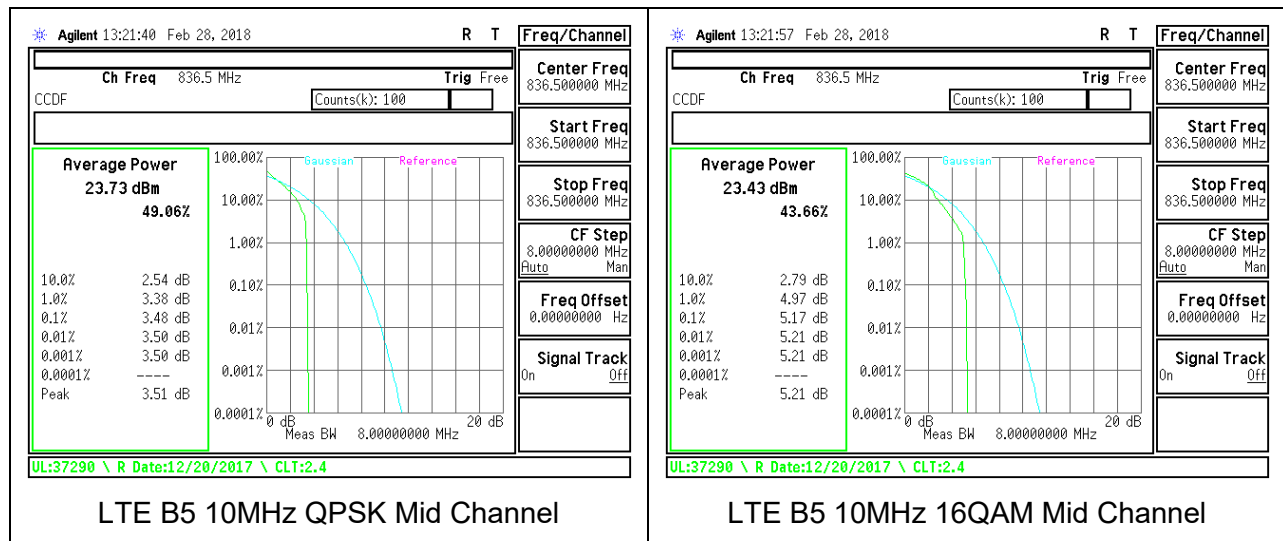


8.5.5. LTE BAND 7

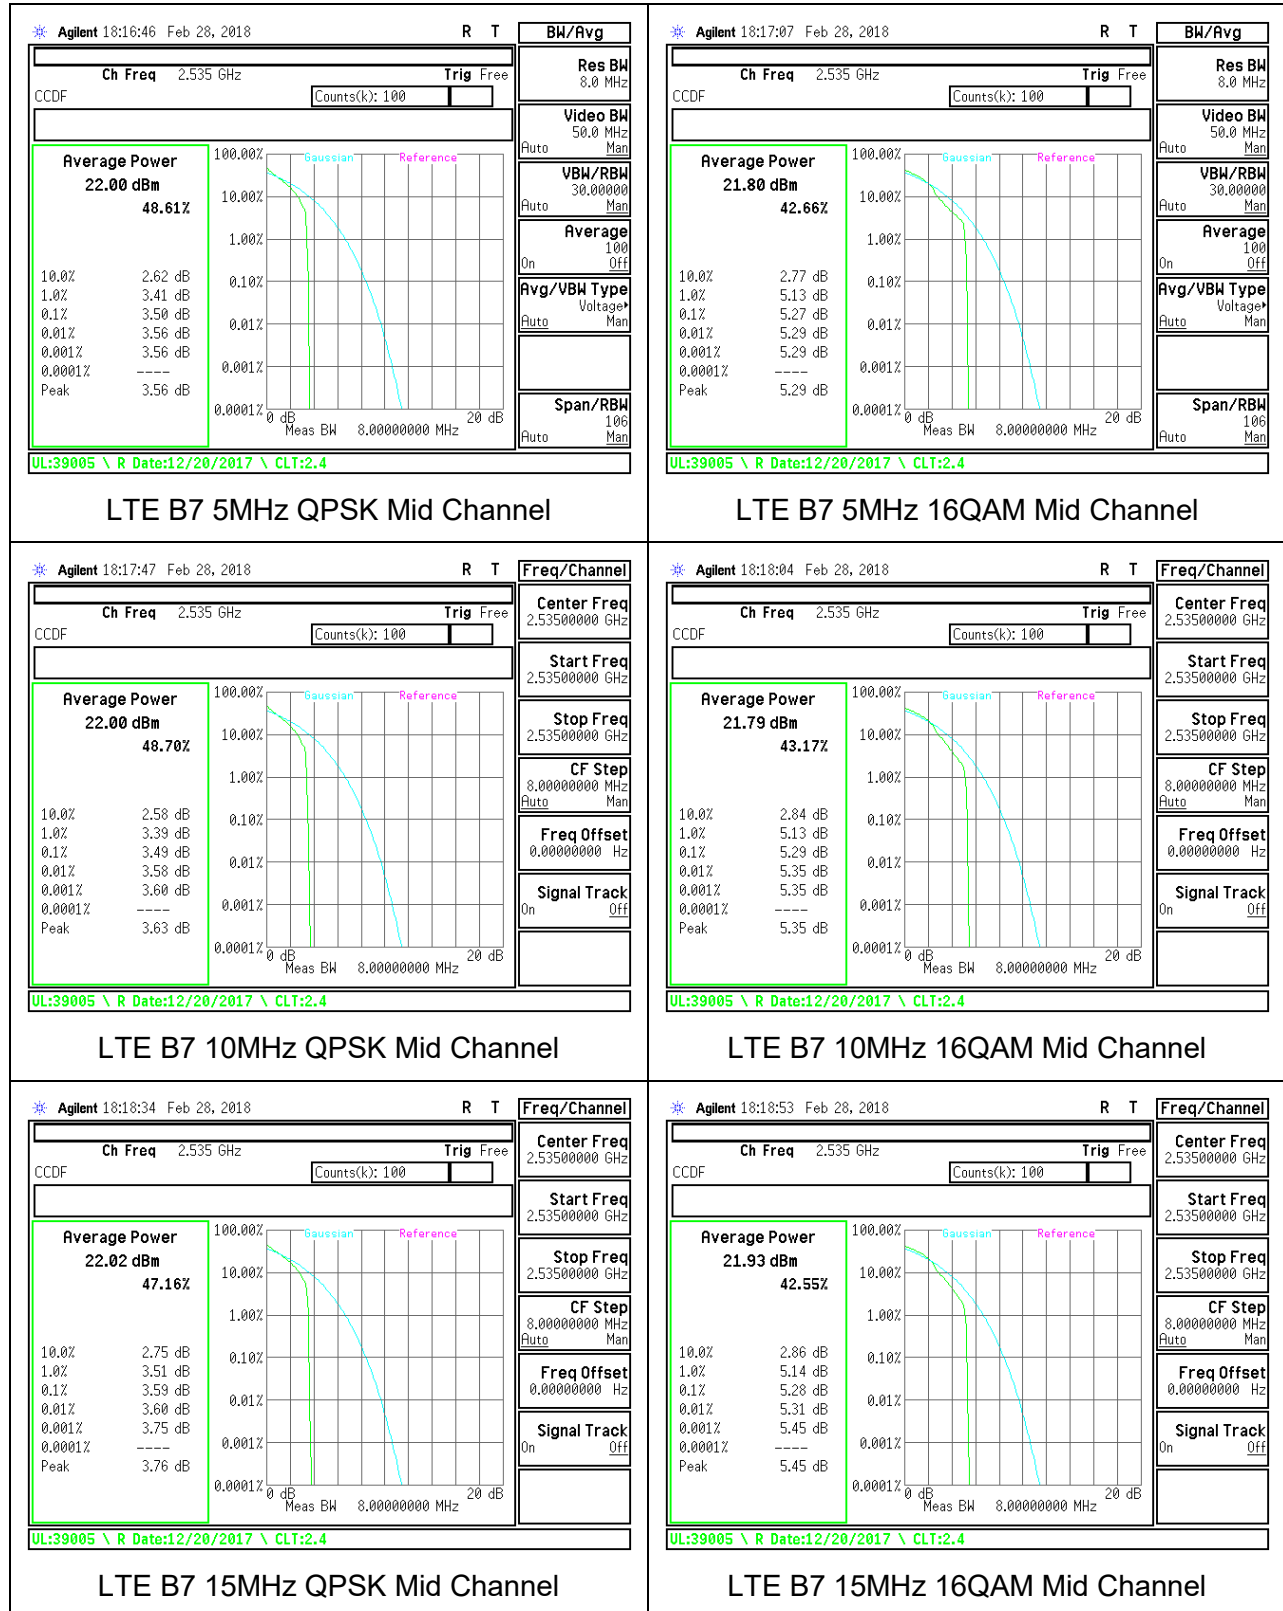


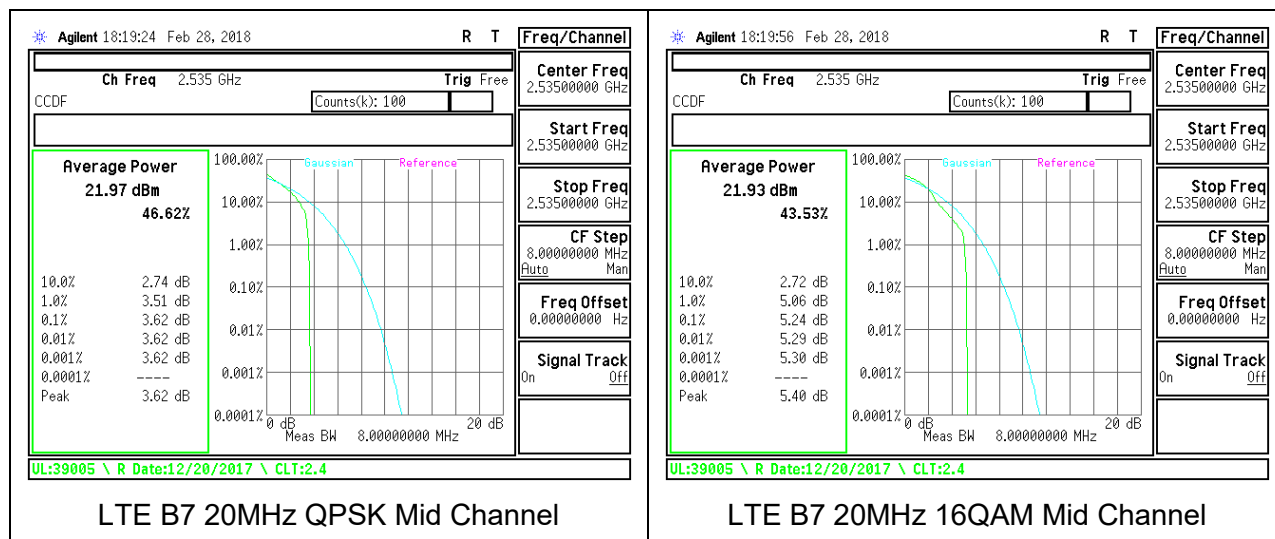


8.5.6. LTE BAND 13

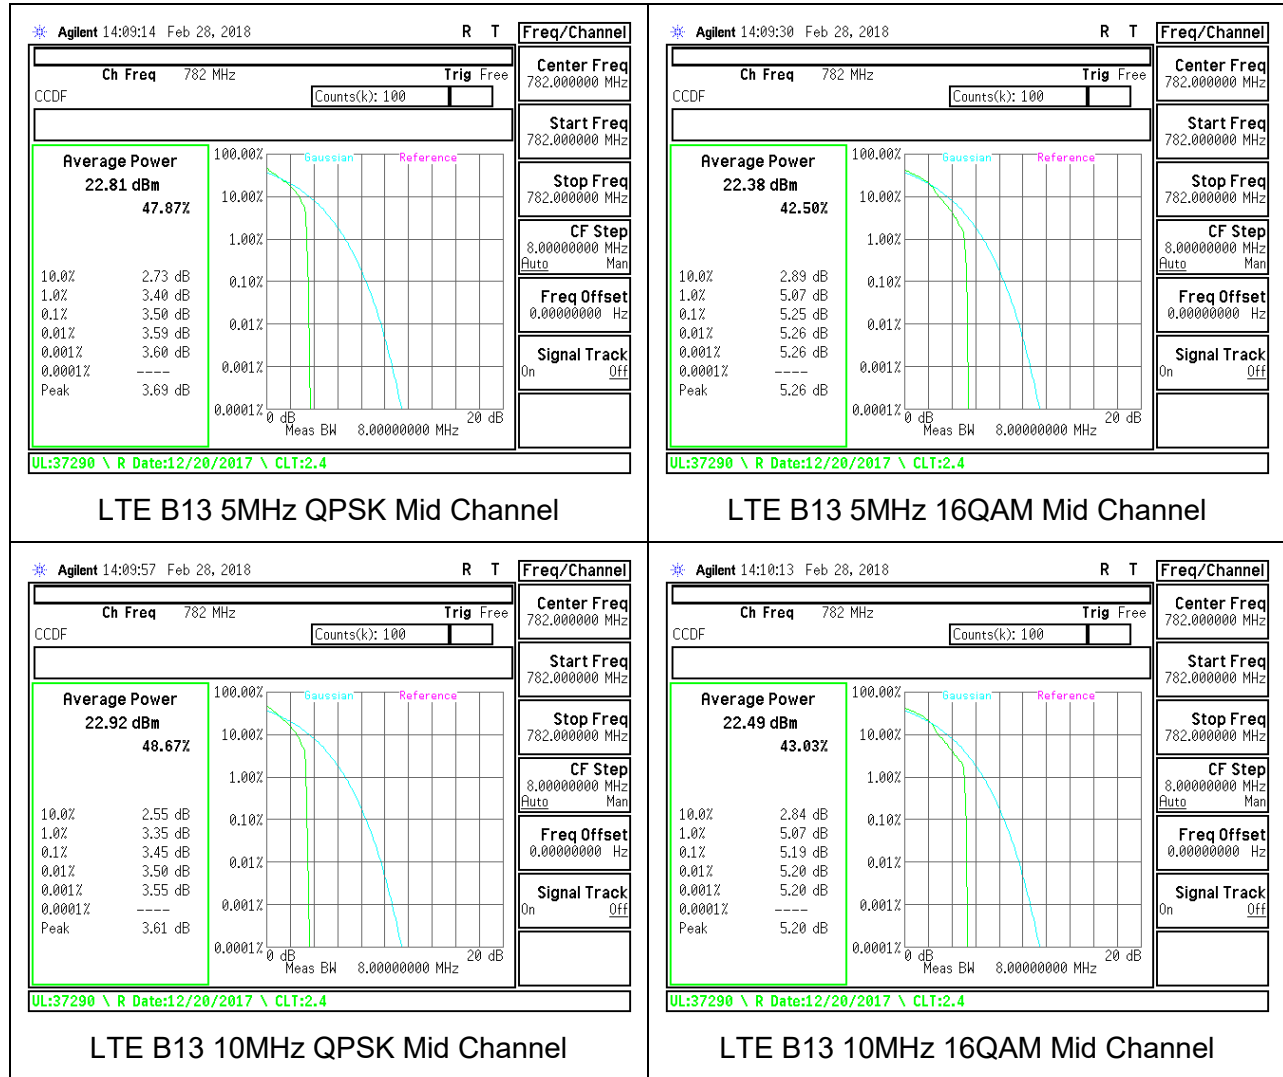


8.5.7. LTE BAND 17

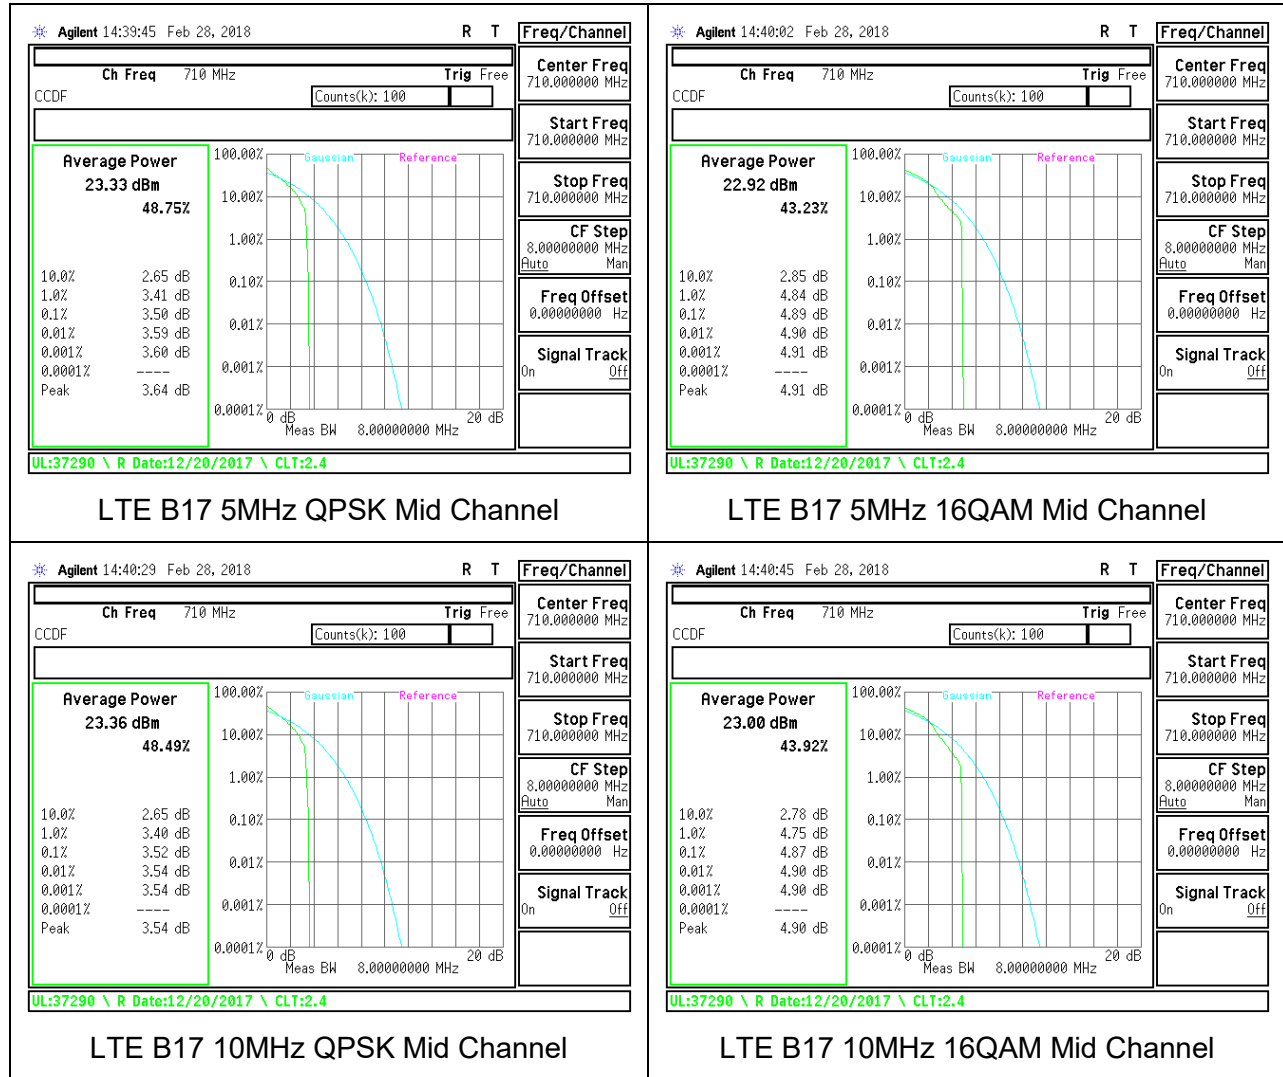

8.5.8. LTE BAND 41

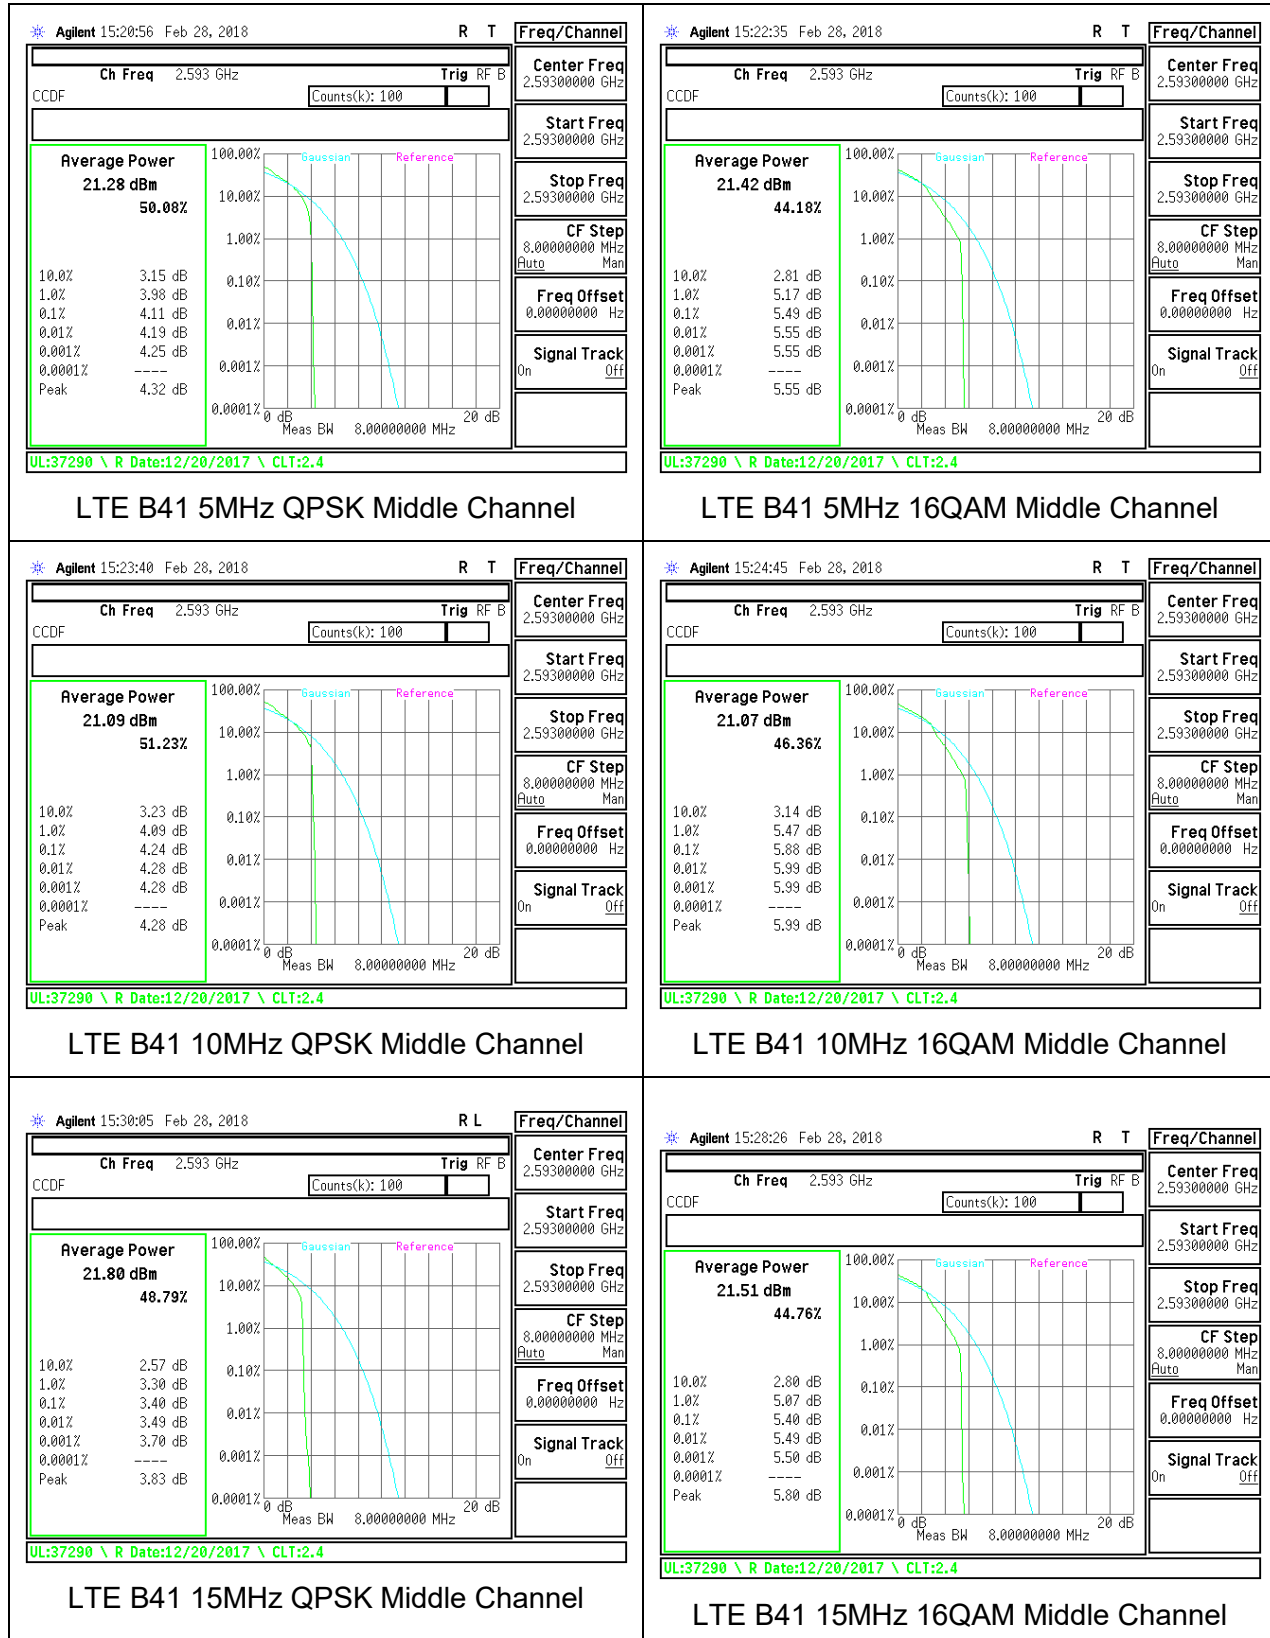

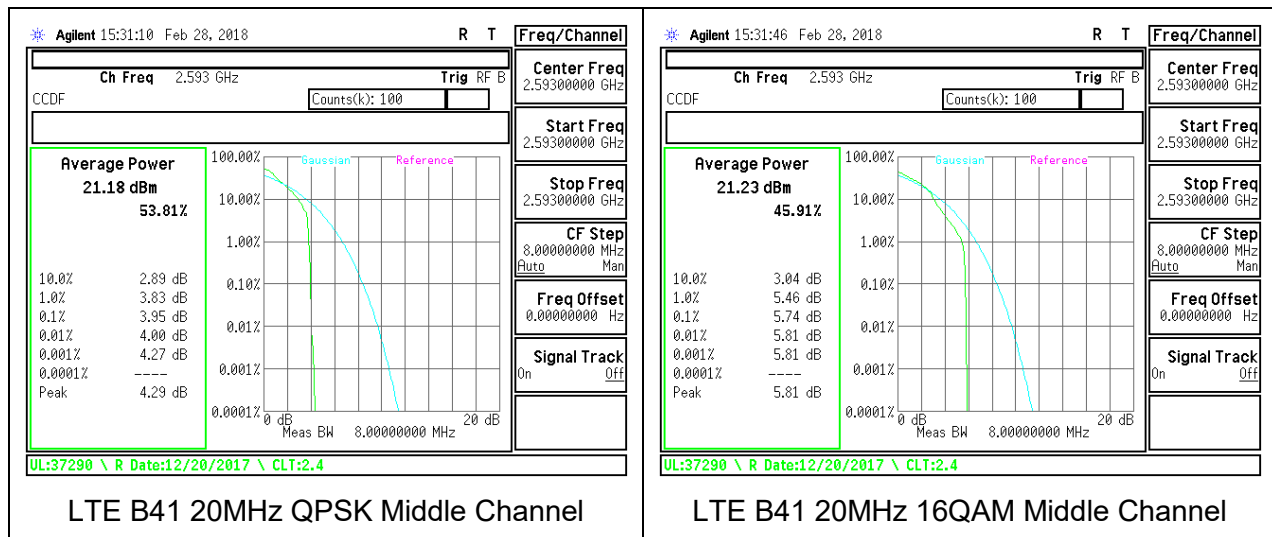

9. RADIATED TEST RESULTS

9.1. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, and §27.53

LIMITS

FCC: §22.917(a), §24.238(a), §27.53 (g), (h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §27.53 (Band 13)

(c) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40dBm/MHz).

FCC: §27.53 (m) (Band 7, 41)

At least $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

TEST PROCEDURE

KDB 971168 D01 v02r02/D02 v01

MODES TESTED

- GSM
- WCDMA
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 13
- LTE Band 17
- LTE Band 41

RESULTS

9.1.1. GSM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132730										
Date: 3/3/2018										
Test Engineer: 43575 OS										
Configuration: EUT + Support Equipment										
Location: Chamber A										
Mode: GPRS 850 MHz Harmonics										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch. 824.2MHz										
1648.40	-29.8	V	3.0	37.0	1.0	65.8	-13.0	-52.8		
2472.60	-23.8	V	3.0	36.4	1.0	59.2	-13.0	-46.2		
3296.80	-24.6	V	3.0	36.2	1.0	59.7	-13.0	-46.7		
1648.40	-29.3	H	3.0	37.0	1.0	65.3	-13.0	-52.3		
2472.60	-25.3	H	3.0	36.4	1.0	60.7	-13.0	-47.7		
3296.80	-24.1	H	3.0	36.2	1.0	59.2	-13.0	-46.2		
Mid Ch. 836.6MHz										
1673.20	-29.0	V	3.0	37.0	1.0	65.0	-13.0	-52.0		
2509.80	-22.8	V	3.0	36.4	1.0	58.2	-13.0	-45.2		
3346.40	-24.0	V	3.0	36.1	1.0	59.1	-13.0	-46.1		
1673.20	-29.1	H	3.0	37.0	1.0	65.1	-13.0	-52.1		
2509.80	-25.5	H	3.0	36.4	1.0	60.9	-13.0	-47.9		
3346.40	-23.6	H	3.0	36.1	1.0	58.7	-13.0	-45.7		
High Ch. 848.8MHz										
1697.60	-27.7	V	3.0	37.0	1.0	63.6	-13.0	-50.6		
2546.40	-24.9	V	3.0	36.4	1.0	60.3	-13.0	-47.3		
3395.20	-23.9	V	3.0	36.1	1.0	58.9	-13.0	-45.9		
1697.60	-28.5	H	3.0	37.0	1.0	64.5	-13.0	-51.5		
2546.40	-20.4	H	3.0	36.4	1.0	55.8	-13.0	-42.8		
3395.20	-23.9	H	3.0	36.1	1.0	59.0	-13.0	-46.0		

GSM 850MHz GPRS

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132730										
Date: 3/2/2018										
Test Engineer: 39005 RA										
Configuration: EUT + Support Equipment										
Location: Chamber A										
Mode: GPRS 1900 MHz Harmonics										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch. 1850.2MHz										
3700.40	-21.9	V	3.0	35.9	1.0	-56.7	-13.0	-43.7		
5550.60	-19.4	V	3.0	35.5	1.0	-53.8	-13.0	-40.8		
7400.80	-18.1	V	3.0	35.7	1.0	-52.8	-13.0	-39.8		
3700.40	-20.7	H	3.0	35.9	1.0	-55.6	-13.0	-42.6		
5550.60	-19.1	H	3.0	35.5	1.0	-53.5	-13.0	-40.5		
7400.80	-17.3	H	3.0	35.7	1.0	-52.1	-13.0	-39.1		
Mid Ch. 1880MHz										
3760.00	-20.7	V	3.0	35.8	1.0	-55.5	-13.0	-42.5		
5640.00	-19.7	V	3.0	35.5	1.0	-54.1	-13.0	-41.1		
7520.00	-17.5	V	3.0	35.7	1.0	-51.9	-13.0	-38.9		
3760.00	-20.6	H	3.0	35.8	1.0	-55.4	-13.0	-42.4		
5640.00	-19.9	H	3.0	35.5	1.0	-54.4	-13.0	-41.4		
7520.00	-18.4	H	3.0	35.7	1.0	-53.2	-13.0	-40.2		
High Ch. 1909.8MHz										
3819.60	-21.6	V	3.0	35.8	1.0	-56.4	-13.0	-43.4		
5729.40	-18.8	V	3.0	35.5	1.0	-53.3	-13.0	-40.3		
7639.20	-15.6	V	3.0	35.8	1.0	-50.4	-13.0	-37.4		
3819.60	-20.7	H	3.0	35.8	1.0	-55.4	-13.0	-42.4		
5729.40	-20.1	H	3.0	35.5	1.0	-54.6	-13.0	-41.6		
7639.20	-17.1	H	3.0	35.8	1.0	-51.8	-13.0	-38.8		

GSM 1900MHz GPRS

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132730										
Date: 3/3/2018										
Test Engineer: 43575 OS										
Configuration: EUT + Support Equipment										
Location: Chamber A										
Mode: EGPRS 850 MHz Harmonics										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch. 824.2MHz										
1648.40	-28.8	V	3.0	37.0	1.0	64.9	-13.0	-51.9		
2472.60	-25.5	V	3.0	36.4	1.0	60.9	-13.0	-47.9		
3296.80	-24.3	V	3.0	36.2	1.0	59.4	-13.0	-46.4		
1648.40	-28.9	H	3.0	37.0	1.0	65.0	-13.0	-52.0		
2472.60	-25.2	H	3.0	36.4	1.0	60.6	-13.0	-47.6		
3296.80	-24.1	H	3.0	36.2	1.0	59.7	-13.0	-46.2		
Mid Ch. 836.6MHz										
1673.20	-29.9	V	3.0	37.0	1.0	65.9	-13.0	-52.9		
2509.80	-25.2	V	3.0	36.4	1.0	60.6	-13.0	-47.6		
3346.40	-24.0	V	3.0	36.1	1.0	59.1	-13.0	-46.1		
1673.20	-29.0	H	3.0	37.0	1.0	65.0	-13.0	-52.0		
2509.80	-25.6	H	3.0	36.4	1.0	61.0	-13.0	-48.0		
3346.40	-23.8	H	3.0	36.1	1.0	58.9	-13.0	-45.9		
High Ch. 848.8MHz										
1697.60	-25.2	V	3.0	37.0	1.0	65.2	-13.0	-52.2		
2546.40	-25.1	V	3.0	36.4	1.0	60.5	-13.0	-47.5		
3395.20	-23.6	V	3.0	36.1	1.0	58.7	-13.0	-45.7		
1697.60	-29.1	H	3.0	37.0	1.0	65.1	-13.0	-52.1		
2546.40	-24.6	H	3.0	36.4	1.0	60.0	-13.0	-47.0		
3395.20	-23.4	H	3.0	36.1	1.0	58.5	-13.0	-45.5		

GSM 850MHz EGPRS

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132730										
Date: 3/2/2018										
Test Engineer: 39005 RA										
Configuration: EUT + Support Equipment										
Location: Chamber A										
Mode: EGPRS 1900 MHz Harmonics										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch. 1850.2MHz										
3700.40	-21.6	V	3.0	35.9	1.0	-56.5	-13.0	-43.5		
5550.60	-19.0	V	3.0	35.5	1.0	-53.5	-13.0	-40.5		
7400.80	-17.1	V	3.0	35.7	1.0	-51.9	-13.0	-38.9		
3700.40	-22.7	H	3.0	35.9	1.0	-57.6	-13.0	-44.6		
5550.60	-19.3	H	3.0	35.5	1.0	-53.8	-13.0	-40.8		
7400.80	-17.0	H	3.0	35.7	1.0	-51.8	-13.0	-38.8		
Mid Ch. 1880MHz										
3760.00	-21.6	V	3.0	35.8	1.0	-56.4	-13.0	-43.4		
5640.00	-19.3	V	3.0	35.5	1.0	-53.8	-13.0	-40.8		
7520.00	-17.6	V	3.0	35.7	1.0	-52.3	-13.0	-39.3		
3760.00	-20.5	H	3.0	35.8	1.0	-55.3	-13.0	-42.3		
5640.00	-19.1	H	3.0	35.5	1.0	-53.6	-13.0	-40.6		
7520.00	-18.0	H	3.0	35.7	1.0	-52.7	-13.0	-39.7		
High Ch. 1909.8MHz										
3819.60	-20.9	V	3.0	35.8	1.0	-55.7	-13.0	-42.7		
5729.40	-19.4	V	3.0	35.5	1.0	-53.9	-13.0	-40.9		
7639.20	-16.9	V	3.0	35.8	1.0	-51.6	-13.0	-38.6		
3819.60	-21.9	H	3.0	35.8	1.0	-56.6	-13.0	-43.6		
5729.40	-19.5	H	3.0	35.5	1.0	-54.0	-13.0	-41.0		
7639.20	-17.0	H	3.0	35.8	1.0	-51.8	-13.0	-38.		

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:	SOMC								
Project #:	12132730								
Date:	3/5/2018								
Test Engineer:	37290 RZ								
Configuration:	EUT + Support Equipment								
Location:	Chamber B								
Mode:	LTE_OPSK Band 4 Harmonics, 10MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch. 1715MHz									
9435.00	-14.2	V	3.0	36.1	1.0	-49.3	-13.0	-36.3	
9435.00	-14.3	V	3.0	35.4	1.0	-44.4	-13.0	-31.4	
9435.00	-10.7	V	3.0	35.7	1.0	-45.4	-13.0	-32.4	
9435.00	-14.1	H	3.0	36.1	1.0	-49.1	-13.0	-36.1	
9435.00	-11.0	H	3.0	35.4	1.0	-45.4	-13.0	-32.4	
9435.00	-8.0	H	3.0	35.7	1.0	-42.6	-13.0	-29.6	
Mid Ch. 1732.5MHz									
9465.00	-12.7	V	3.0	36.0	1.0	-47.7	-13.0	-34.7	
9465.00	-12.7	V	3.0	35.4	1.0	-41.9	-13.0	-28.9	
9465.00	-6.6	V	3.0	35.7	1.0	-40.3	-13.0	-27.3	
9465.00	-11.7	H	3.0	36.0	1.0	-46.6	-13.0	-33.6	
9465.00	-8.2	H	3.0	35.4	1.0	-42.6	-13.0	-29.6	
9465.00	-4.8	H	3.0	35.7	1.0	-39.4	-13.0	-26.4	
High Ch. 1750MHz									
9500.00	-15.6	V	3.0	36.0	1.0	-50.6	-13.0	-37.6	
9500.00	-10.8	V	3.0	35.4	1.0	-45.2	-13.0	-32.2	
9500.00	-8.7	V	3.0	35.7	1.0	-43.4	-13.0	-30.4	
9500.00	-13.8	H	3.0	36.0	1.0	-48.6	-13.0	-35.6	
9500.00	-11.3	H	3.0	35.4	1.0	-45.7	-13.0	-32.7	
9500.00	-8.3	H	3.0	35.7	1.0	-42.9	-13.0	-29.9	

LTE B4 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:	SOMC								
Project #:	12132730								
Date:	3/6/2018								
Test Engineer:	37290								
Configuration:	EUT + Support Equipment								
Location:	Chamber B								
Mode:	LTE_16QAM Band 4 Harmonics, 15MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch. 1717.5MHz									
9435.00	-15.3	V	3.0	36.1	1.0	-50.3	-13.0	-37.3	
9435.00	-10.1	V	3.0	35.4	1.0	-44.5	-13.0	-31.5	
9435.00	-10.6	V	3.0	35.7	1.0	-45.2	-13.0	-32.2	
9435.00	-15.0	H	3.0	36.1	1.0	-50.1	-13.0	-37.1	
9435.00	-11.1	H	3.0	35.4	1.0	-45.5	-13.0	-32.5	
9435.00	-8.7	H	3.0	35.7	1.0	-43.4	-13.0	-30.4	
Mid Ch. 1732.5MHz									
9465.00	-12.8	V	3.0	36.0	1.0	-47.8	-13.0	-34.8	
9465.00	-8.5	V	3.0	35.4	1.0	-43.0	-13.0	-30.0	
9465.00	-7.9	V	3.0	35.7	1.0	-42.6	-13.0	-29.6	
9465.00	-13.3	H	3.0	36.0	1.0	-48.4	-13.0	-35.4	
9465.00	-8.1	H	3.0	35.4	1.0	-43.5	-13.0	-30.5	
9465.00	-7.1	H	3.0	35.7	1.0	-41.7	-13.0	-28.7	
High Ch. 1747.5MHz									
9495.00	-15.8	V	3.0	36.0	1.0	-50.8	-13.0	-37.8	
9495.00	-11.1	V	3.0	35.4	1.0	-45.5	-13.0	-32.5	
9495.00	-8.8	V	3.0	35.7	1.0	-43.5	-13.0	-30.5	
9495.00	-14.0	H	3.0	36.0	1.0	-49.1	-13.0	-36.1	
9495.00	-11.3	H	3.0	35.4	1.0	-45.7	-13.0	-32.7	
9495.00	-8.3	H	3.0	35.7	1.0	-42.9	-13.0	-29.9	

LTE B4 15MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:	SOMC								
Project #:	12132730								
Date:	3/5/2018								
Test Engineer:	39005 RA								
Configuration:	EUT + Support Equipment								
Location:	Chamber B								
Mode:	LTE_OPSK Band 4 Harmonics, 20MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch. 1720MHz									
9440.00	-20.7	V	3.0	36.0	1.0	-55.8	-13.0	-42.8	
9440.00	-17.3	V	3.0	35.4	1.0	-51.7	-13.0	-38.7	
9440.00	-16.1	V	3.0	35.7	1.0	-50.8	-13.0	-37.8	
9440.00	-20.9	H	3.0	36.0	1.0	-56.0	-13.0	-43.0	
9440.00	-16.7	H	3.0	35.4	1.0	-51.1	-13.0	-38.1	
9440.00	-14.6	H	3.0	35.7	1.0	-49.2	-13.0	-36.2	
Mid Ch. 1732.5MHz									
9465.00	-21.4	V	3.0	36.0	1.0	-56.4	-13.0	-43.4	
9465.00	-16.9	V	3.0	35.4	1.0	-51.3	-13.0	-38.3	
9465.00	-15.6	V	3.0	35.7	1.0	-50.3	-13.0	-37.3	
9465.00	-20.0	H	3.0	36.0	1.0	-55.0	-13.0	-42.0	
9465.00	-15.9	H	3.0	35.4	1.0	-50.3	-13.0	-37.3	
9465.00	-13.4	H	3.0	35.7	1.0	-48.1	-13.0	-35.1	
High Ch. 1745MHz									
9490.00	-20.3	V	3.0	36.0	1.0	-55.3	-13.0	-42.3	
9490.00	-17.1	V	3.0	35.4	1.0	-51.5	-13.0	-38.5	
9490.00	-15.6	V	3.0	35.7	1.0	-50.3	-13.0	-37.3	
9490.00	-19.9	H	3.0	36.0	1.0	-55.0	-13.0	-42.0	
9490.00	-16.2	H	3.0	35.4	1.0	-50.6	-13.0	-37.6	
9490.00	-14.8	H	3.0	35.7	1.0	-49.5	-13.0	-36.5	

LTE B4 20MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:	SOMC								
Project #:	12132730								
Date:	3/5/2018								
Test Engineer:	39005 RA								
Configuration:	EUT + Support Equipment								
Location:	Chamber B								
Mode:	LTE_16QAM Band 4 Harmonics, 20MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch. 1720MHz									
9440.00	-18.7	V	3.0	36.0	1.0	-54.8	-13.0	-41.8	
9440.00	-16.2	V	3.0	35.4	1.0	-50.6	-13.0	-37.6	
9440.00	-14.7	V	3.0	35.7	1.0	-49.4	-13.0	-36.4	
9440.00	-19.8	H	3.0	36.0	1.0	-54.9	-13.0	-41.9	
9440.00	-15.9	H	3.0	35.4	1.0	-50.3	-13.0	-37.3	
9440.00	-13.6	H	3.0	35.7	1.0	-48.2	-13.0	-35.2	
Mid Ch. 1732.5MHz									
9465.00	-20.4	V	3.0	36.0	1.0	-55.4	-13.0	-42.4	
9465.00	-16.9	V	3.0	35.4	1.0	-51.3	-13.0	-38.3	
9465.00	-15.1	V	3.0	35.7	1.0	-49.8	-13.0	-36.8	
9465.00	-20.0	H	3.0	36.0	1.0	-55.0	-13.0	-42.0	
9465.00	-16.0	H	3.0	35.4	1.0	-50.5	-13.0	-37.5	
9465.00	-14.7	H	3.0	35.7	1.0	-49.4	-13.0	-36.4	
High Ch. 1745MHz									
9490.00	-18.8	V	3.0	36.0	1.0	-54.8	-13.0	-41.8	
9490.00	-16.8	V	3.0	35.4	1.0	-51.2	-13.0	-38.2	
9490.00	-15.6	V	3.0	35.7	1.0	-50.3	-13.0	-37.3	
9490.00	-19.4	H	3.0	36.0	1.0	-54.4	-13.0	-41.4	
9490.00	-15.3	H	3.0	35.4	1.0	-50.7	-13.0	-37.7	
9490.00	-13.5	H	3.0	35.7	1.0	-48.2	-13.0	-35.2	

LTE B4 20MHz 16QAM

9.1.4. LTE BAND 5

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132730										
Date: 3/3/2018										
Test Engineer: 43575 OS										
Configuration: EUT + Support Equipment										
Location: Chamber A										
Mode: LTE_QPSK Band 5 Harmonics, 3MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 825.5MHz										
1651.00	-29.5	V	3.0	37.0	1.0	-65.5	-13.0	-52.5		
2476.50	-26.0	V	3.0	36.4	1.0	-61.4	-13.0	-48.4		
3302.00	-24.1	V	3.0	36.2	1.0	-59.2	-13.0	-46.2		
1651.00	-29.0	H	3.0	37.0	1.0	-65.1	-13.0	-52.1		
2476.50	-23.9	H	3.0	36.4	1.0	-59.3	-13.0	-46.3		
3302.00	-23.9	H	3.0	36.2	1.0	-59.1	-13.0	-46.1		
Mid Ch, 836.5MHz										
1673.00	-29.1	V	3.0	37.0	1.0	-65.1	-13.0	-52.1		
2509.50	-25.9	V	3.0	36.4	1.0	-61.3	-13.0	-48.3		
3346.00	-23.4	V	3.0	36.1	1.0	-58.5	-13.0	-45.5		
1673.00	-29.5	H	3.0	37.0	1.0	-65.5	-13.0	-52.5		
2509.50	-26.0	H	3.0	36.4	1.0	-61.4	-13.0	-48.4		
3346.00	-23.8	H	3.0	36.1	1.0	-58.9	-13.0	-45.9		
High Ch, 847.5MHz										
1695.00	-29.1	V	3.0	37.0	1.0	-65.1	-13.0	-52.1		
2542.50	-25.4	V	3.0	36.4	1.0	-60.8	-13.0	-47.8		
3390.00	-23.4	V	3.0	36.1	1.0	-58.4	-13.0	-45.4		
1695.00	-28.9	H	3.0	37.0	1.0	-64.8	-13.0	-51.8		
2542.50	-25.2	H	3.0	36.4	1.0	-60.6	-13.0	-47.6		
3390.00	-23.5	H	3.0	36.1	1.0	-58.6	-13.0	-45.6		

LTE B5 3MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132730										
Date: 3/3/2018										
Test Engineer: 43575 OS										
Configuration: EUT + Support Equipment										
Location: Chamber A										
Mode: LTE_QPSK Band 5 Harmonics, 5MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 826.5MHz										
1653.00	-29.6	V	3.0	37.0	1.0	-65.6	-13.0	-52.6		
2479.50	-26.0	V	3.0	36.4	1.0	-61.4	-13.0	-48.4		
3306.00	-24.3	V	3.0	36.1	1.0	-59.4	-13.0	-46.4		
1653.00	-29.8	H	3.0	37.0	1.0	-65.9	-13.0	-52.9		
2479.50	-25.6	H	3.0	36.4	1.0	-61.0	-13.0	-48.0		
3306.00	-23.8	H	3.0	36.1	1.0	-59.0	-13.0	-46.0		
Mid Ch, 836.5MHz										
1673.00	-29.2	V	3.0	37.0	1.0	-65.2	-13.0	-52.2		
2509.50	-25.7	V	3.0	36.4	1.0	-61.1	-13.0	-48.1		
3346.00	-24.1	V	3.0	36.1	1.0	-59.2	-13.0	-46.2		
1673.00	-29.3	H	3.0	37.0	1.0	-65.3	-13.0	-52.3		
2509.50	-25.4	H	3.0	36.4	1.0	-60.8	-13.0	-47.8		
3346.00	-23.9	H	3.0	36.1	1.0	-59.1	-13.0	-46.1		
High Ch, 846.5MHz										
1693.00	-28.5	V	3.0	37.0	1.0	-64.4	-13.0	-51.4		
2539.50	-25.4	V	3.0	36.4	1.0	-60.8	-13.0	-47.8		
3386.00	-23.9	V	3.0	36.1	1.0	-59.0	-13.0	-46.0		
1693.00	-29.1	H	3.0	37.0	1.0	-65.1	-13.0	-52.1		
2539.50	-24.9	H	3.0	36.4	1.0	-60.3	-13.0	-47.3		
3386.00	-24.2	H	3.0	36.1	1.0	-59.3	-13.0	-46.3		

LTE B5 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132730										
Date: 3/3/2018										
Test Engineer: 43575 OS										
Configuration: EUT + Support Equipment										
Location: Chamber A										
Mode: LTE_QPSK Band 5 Harmonics, 10MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 829MHz										
1658.00	-29.8	V	3.0	37.0	1.0	-65.8	-13.0	-52.8		
2487.00	-25.8	V	3.0	36.4	1.0	-61.2	-13.0	-48.2		
3316.00	-23.9	V	3.0	36.1	1.0	-59.1	-13.0	-46.1		
1658.00	-29.6	H	3.0	37.0	1.0	-65.6	-13.0	-52.6		
2487.00	-26.0	H	3.0	36.4	1.0	-61.4	-13.0	-48.4		
3316.00	-24.2	H	3.0	36.1	1.0	-59.3	-13.0	-46.3		
Mid Ch, 836.5MHz										
1673.00	-29.0	V	3.0	37.0	1.0	-65.0	-13.0	-52.0		
2509.50	-25.2	V	3.0	36.4	1.0	-60.8	-13.0	-47.8		
3346.00	-24.3	V	3.0	36.1	1.0	-59.4	-13.0	-46.4		
1673.00	-29.1	H	3.0	37.0	1.0	-65.1	-13.0	-52.1		
2509.50	-25.6	H	3.0	36.4	1.0	-61.0	-13.0	-48.0		
3346.00	-23.8	H	3.0	36.1	1.0	-58.9	-13.0	-45.9		
High Ch, 844MHz										
1688.00	-29.1	V	3.0	37.0	1.0	-65.1	-13.0	-52.1		
2532.00	-25.8	V	3.0	36.4	1.0	-61.2	-13.0	-48.2		
3376.00	-23.7	V	3.0	36.1	1.0	-58.7	-13.0	-45.7		
1688.00	-29.0	H	3.0	37.0	1.0	-64.9	-13.0	-51.9		
2532.00	-25.4	H	3.0	36.4	1.0	-60.8	-13.0	-47.8		
3376.00	-23.8	H	3.0	36.1	1.0	-58.9	-13.0	-45.9		

LTE B5 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132730										
Date: 3/3/2018										
Test Engineer: 43575 OS										
Configuration: EUT + Support Equipment										
Location: Chamber A										
Mode: LTE_16QAM Band 5 Harmonics, 10MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 829MHz										
1658.00	-29.2	V	3.0	37.0	1.0	-65.2	-13.0	-52.2		
2487.00	-25.2	V	3.0	36.4	1.0	-60.6	-13.0	-47.6		
3316.00	-23.9	V	3.0	36.1	1.0	-59.0	-13.0	-46.0		
1658.00	-29.6	H	3.0	37.0	1.0	-65.6	-13.0	-52.6		
2487.00	-25.4	H	3.0	36.4	1.0	-60.8	-13.0	-47.8		
3316.00	-23.6	H	3.0	36.1	1.0	-58.8	-13.0	-45.8		
Mid Ch, 836.5MHz										
1673.00	-28.7	V	3.0	37.0	1.0	-64.7	-13.0	-51.7		
2509.50	-25.4	V	3.0	36.4	1.0	-60.9	-13.0	-47.9		
3346.00	-24.0	V	3.0	36.1	1.0	-59.1	-13.0	-46.1		
1673.00	-29.0	H	3.0	37.0	1.0	-65.0	-13.0	-52.0		
2509.50	-24.5	H	3.0	36.4	1.0	-59.9	-13.0	-46.9		
3346.00	-23.8	H	3.0	36.1	1.0	-58.9	-13.0	-45.9		
High Ch, 844MHz										
1688.00	-28.6	V	3.0	37.0	1.0	-64.6	-13.0	-51.6		
2532.00	-25.2	V	3.0	36.4	1.0	-60.6	-13.0	-47.6		
3376.00	-23.7	V	3.0	36.1	1.0	-58.8	-13.0	-45.8		
1688.00	-29.4	H	3.0	37.0	1.0	-65.4	-13.0	-52.4		
2532.00	-25.6	H	3.0	36.4	1.0	-61.1	-13.0	-48.1		
3376.00	-23.2	H	3.0	36.1	1.0	-58.3	-13.0	-45.3		

LTE B5 10MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12132730									
Date: 3/3/2018									
Test Engineer: 43375 OS									
Configuration: EUT + Support Equipment									
Location: Chamber A									
Mode: LTE_QPSK Band 5 Harmonics, 1.4MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.7MHz									
1648.40	-29.5	V	3.0	37.0	1.0	-65.5	-13.0	-52.5	
2474.10	-25.6	V	3.0	36.4	1.0	-61.1	-13.0	-48.1	
3298.80	-24.1	V	3.0	36.2	1.0	-59.3	-11.0	-46.3	
1648.40	-29.1	H	3.0	37.0	1.0	-65.1	-13.0	-52.1	
2474.10	-25.8	H	3.0	36.4	1.0	-61.3	-13.0	-48.3	
3298.80	-22.6	H	3.0	36.2	1.0	-57.8	-13.0	-44.8	
Mid Ch, 836.5MHz									
1673.00	-29.8	V	3.0	37.0	1.0	-65.8	-13.0	-52.8	
2509.50	-25.2	V	3.0	36.4	1.0	-60.6	-13.0	-47.6	
3346.00	-24.0	V	3.0	36.1	1.0	-59.1	-11.0	-46.1	
1673.00	-29.1	H	3.0	37.0	1.0	-65.1	-13.0	-52.1	
2509.50	-25.8	H	3.0	36.4	1.0	-61.2	-13.0	-48.2	
3346.00	-23.9	H	3.0	36.1	1.0	-59.0	-13.0	-46.0	
High Ch, 848.3MHz									
1696.60	-28.3	V	3.0	37.0	1.0	-65.2	-13.0	-52.2	
2544.90	-25.3	V	3.0	36.4	1.0	-60.7	-13.0	-47.7	
3393.20	-23.4	V	3.0	36.1	1.0	-58.5	-11.0	-45.5	
1696.60	-28.5	H	3.0	37.0	1.0	-64.5	-13.0	-51.5	
2544.90	-24.9	H	3.0	36.4	1.0	-60.3	-13.0	-47.3	
3393.20	-23.6	H	3.0	36.1	1.0	-58.7	-13.0	-45.7	
LTE B5 1.4MHz QPSK									

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12132730									
Date: 3/3/2018									
Test Engineer: 43375 OS									
Configuration: EUT + Support Equipment									
Location: Chamber A									
Mode: LTE_16QAM Band 5 Harmonics, 1.4MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.7MHz									
1648.40	-29.0	V	3.0	37.0	1.0	-65.1	-13.0	-52.1	
2474.10	-26.1	V	3.0	36.4	1.0	-61.6	-13.0	-48.6	
3298.80	-23.8	V	3.0	36.2	1.0	-58.0	-13.0	-46.0	
1648.40	-28.7	H	3.0	37.0	1.0	-64.7	-13.0	-51.7	
2474.10	-26.0	H	3.0	36.4	1.0	-61.4	-13.0	-48.4	
3298.80	-23.6	H	3.0	36.2	1.0	-58.8	-13.0	-45.8	
Mid Ch, 836.5MHz									
1673.00	-29.1	V	3.0	37.0	1.0	-65.1	-13.0	-52.1	
2509.50	-26.1	V	3.0	36.4	1.0	-61.5	-13.0	-48.5	
3346.00	-23.8	V	3.0	36.1	1.0	-58.9	-13.0	-45.9	
1673.00	-29.6	H	3.0	37.0	1.0	-65.5	-13.0	-52.5	
2509.50	-25.9	H	3.0	36.4	1.0	-61.3	-13.0	-48.3	
3346.00	-23.5	H	3.0	36.1	1.0	-58.7	-13.0	-45.7	
High Ch, 848.3MHz									
1696.60	-28.8	V	3.0	37.0	1.0	-64.8	-13.0	-51.8	
2544.90	-25.3	V	3.0	36.4	1.0	-60.7	-13.0	-47.7	
3393.20	-23.5	V	3.0	36.1	1.0	-58.6	-13.0	-45.6	
1696.60	-29.3	H	3.0	37.0	1.0	-65.2	-13.0	-52.2	
2544.90	-25.7	H	3.0	36.4	1.0	-61.1	-13.0	-48.1	
3393.20	-23.2	H	3.0	36.1	1.0	-58.2	-13.0	-45.2	
LTE B5 1.4MHz 16QAM									

9.1.5. LTE BAND 7

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12132730									
Date:	3/5/2018									
Test Engineer:	39005 RA									
Configuration:	EUT + Support Equipment									
Location:	Chamber B									
Mode:	LTE_QPSK Band 7 Harmonics, 5MHz Bandwidth									

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2502.5MHz									
5005.00	-16.7	V	3.0	35.5	1.0	-51.2	-25.0	-26.2	
7507.50	-14.7	V	3.0	35.7	1.0	-49.4	-25.0	-24.4	
10010.00	-12.6	V	3.0	36.0	1.0	-47.7	-25.0	-22.7	
5005.00	-15.8	H	3.0	35.5	1.0	-50.1	-25.0	-25.1	
7507.50	-13.8	H	3.0	35.7	1.0	-48.3	-25.0	-23.3	
10010.00	-11.8	H	3.0	36.0	1.0	-46.8	-25.0	-21.8	
Mid Ch, 2535MHz									
5070.00	-16.4	V	3.0	35.4	1.0	-50.9	-25.0	-25.9	
7605.00	-14.6	V	3.0	35.8	1.0	-49.3	-25.0	-24.3	
10140.00	-11.8	V	3.0	36.0	1.0	-46.8	-25.0	-21.8	
5070.00	-16.0	H	3.0	35.4	1.0	-50.4	-25.0	-25.4	
7605.00	-12.8	H	3.0	35.8	1.0	-47.6	-25.0	-22.6	
10140.00	-11.3	H	3.0	36.0	1.0	-46.2	-25.0	-21.2	
High Ch, 2567.5MHz									
5135.00	-16.1	V	3.0	35.4	1.0	-50.5	-25.0	-25.5	
7702.50	-14.2	V	3.0	35.8	1.0	-48.9	-25.0	-23.9	
10270.00	-12.3	V	3.0	35.9	1.0	-47.2	-25.0	-22.2	
5135.00	-15.3	H	3.0	35.4	1.0	-49.8	-25.0	-24.8	
7702.50	-13.0	H	3.0	35.8	1.0	-47.7	-25.0	-22.7	
10270.00	-11.4	H	3.0	35.9	1.0	-46.3	-25.0	-21.3	

LTE B7 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12132730									
Date:	3/5/2018									
Test Engineer:	39005 RA									
Configuration:	EUT + Support Equipment									
Location:	Chamber B									
Mode:	LTE_QPSK Band 7 Harmonics, 10MHz Bandwidth									

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2505MHz									
5010.00	-16.9	V	3.0	35.5	1.0	-51.4	-25.0	-26.4	
7515.00	-14.8	V	3.0	35.7	1.0	-49.4	-25.0	-24.4	
10020.00	-12.7	V	3.0	36.0	1.0	-47.7	-25.0	-22.7	
5010.00	-15.8	H	3.0	35.5	1.0	-50.0	-25.0	-25.0	
7515.00	-13.5	H	3.0	35.7	1.0	-48.3	-25.0	-23.3	
10020.00	-11.7	H	3.0	36.0	1.0	-46.7	-25.0	-21.7	
Mid Ch, 2535MHz									
5070.00	-16.4	V	3.0	35.4	1.0	-50.9	-25.0	-25.8	
7605.00	-14.7	V	3.0	35.8	1.0	-49.4	-25.0	-24.4	
10140.00	-11.5	V	3.0	36.0	1.0	-46.5	-25.0	-21.5	
5070.00	-16.1	H	3.0	35.4	1.0	-50.5	-25.0	-25.5	
7605.00	-13.0	H	3.0	35.8	1.0	-47.8	-25.0	-22.8	
10140.00	-11.1	H	3.0	36.0	1.0	-46.0	-25.0	-21.0	
High Ch, 2565MHz									
5130.00	-16.2	V	3.0	35.4	1.0	-50.7	-25.0	-25.7	
7695.00	-14.2	V	3.0	35.8	1.0	-49.0	-25.0	-24.0	
10260.00	-12.4	V	3.0	35.9	1.0	-47.3	-25.0	-22.3	
5130.00	-15.2	H	3.0	35.4	1.0	-49.7	-25.0	-24.7	
7695.00	-12.9	H	3.0	35.8	1.0	-47.6	-25.0	-22.6	
10260.00	-11.4	H	3.0	35.9	1.0	-46.3	-25.0	-21.3	

LTE B7 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12132730									
Date:	3/5/2018									
Test Engineer:	39005 RA									
Configuration:	EUT + Support Equipment									
Location:	Chamber B									
Mode:	LTE_QPSK Band 7 Harmonics, 15MHz Bandwidth									

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2507.5MHz									
5015.00	-17.9	V	3.0	35.5	1.0	-52.3	-25.0	-27.3	
7522.50	-15.7	V	3.0	35.7	1.0	-50.5	-25.0	-25.5	
10030.00	-12.7	V	3.0	36.0	1.0	-47.7	-25.0	-22.7	
5015.00	-15.4	H	3.0	35.5	1.0	-49.9	-25.0	-24.9	
7522.50	-13.9	H	3.0	35.7	1.0	-48.6	-25.0	-23.6	
10030.00	-11.1	H	3.0	36.0	1.0	-46.1	-25.0	-21.1	
Mid Ch, 2535MHz									
5070.00	-16.7	V	3.0	35.4	1.0	-51.2	-25.0	-26.2	
7605.00	-14.7	V	3.0	35.8	1.0	-49.5	-25.0	-24.5	
10140.00	-13.3	V	3.0	36.0	1.0	-48.3	-25.0	-23.3	
5070.00	-17.6	H	3.0	35.4	1.0	-52.0	-25.0	-27.0	
7605.00	-14.0	H	3.0	35.8	1.0	-48.7	-25.0	-23.7	
10140.00	-11.8	H	3.0	36.0	1.0	-46.7	-25.0	-21.7	
High Ch, 2562.5MHz									
5125.00	-15.0	V	3.0	35.4	1.0	-49.4	-25.0	-24.4	
7687.50	-15.4	V	3.0	35.8	1.0	-50.1	-25.0	-25.1	
10250.00	-13.8	V	3.0	35.9	1.0	-48.7	-25.0	-23.7	
5125.00	-16.6	H	3.0	35.4	1.0	-51.0	-25.0	-26.0	
7687.50	-12.1	H	3.0	35.8	1.0	-48.8	-25.0	-23.8	
10250.00	-10.0	H	3.0	35.9	1.0	-44.9	-25.0	-19.9	

LTE B7 15MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12132730									
Date:	3/5/2018									
Test Engineer:	39005 RA									
Configuration:	EUT + Support Equipment									
Location:	Chamber B									
Mode:	LTE_16QAM Band 7 Harmonics, 5MHz Bandwidth									

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2502.5MHz									
5005.00	-17.6	V	3.0	35.5	1.0	-52.1	-25.0	-27.1	
7507.50	-15.5	V	3.0	35.7	1.0	-50.2	-25.0	-25.2	
10010.00	-13.3	V	3.0	36.0	1.0	-48.3	-25.0	-23.3	
5005.00	-15.3	H	3.0	35.5	1.0	-49.8	-25.0	-24.8	
7507.50	-13.2	H	3.0	35.7	1.0	-47.9	-25.0	-22.9	
10010.00	-11.4	H	3.0	36.0	1.0	-46.4	-25.0	-21.4	
Mid Ch, 2535MHz									
5070.00	-16.1	V	3.0	35.4	1.0	-50.5	-25.0	-25.5	
7605.00	-15.2	V	3.0	35.8	1.0	-49.9	-25.0	-24.9	
10140.00	-12.1	V	3.0	36.0	1.0	-47.0	-25.0	-22.0	
5070.00	-15.9	H	3.0	35.4	1.0	-50.4	-25.0	-25.4	
7605.00	-13.8	H	3.0	35.8	1.0	-48.5	-25.0	-23.5	
10140.00	-11.8	H	3.0	36.0	1.0	-46.8	-25.0	-21.8	
High Ch, 2567.5MHz									
5135.00	-16.2	V	3.0	35.4	1.0	-50.6	-25.0	-25.6	
7702.50	-14.1	V	3.0	35.8	1.0	-48.9	-25.0	-23.9	
10270.00	-12.0	V	3.0	35.9	1.0	-46.9	-25.0	-21.9	
5135.00	-15.7	H	3.0	35.4	1.0	-50.1	-25.0	-25.1	
7702.50	-12.7	H	3.0	35.8	1.0	-47.4	-25.0	-22.4	
10270.00	-11.7	H	3.0	35.9	1.0	-46.6	-25.0	-21.6	

LTE B7 5MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12132730									
Date:	3/5/2018									
Test Engineer:	39005 RA									
Configuration:	EUT + Support Equipment									
Location:	Chamber B									
Mode:	LTE_16QAM Band 7 Harmonics, 10MHz Bandwidth									

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2505MHz									
5010.00	-17.6	V	3.0	35.5	1.0	-52.1	-25.0	-27.1	
7515.00	-15.5	V	3.0	35.7	1.0	-50.2	-25.0	-25.2	
10020.00	-13.3	V	3.0	36.0	1.0	-48.3	-25.0	-23.3	
5010.00	-15.2	H	3.0	35.5	1.0	-49.7	-25.0	-24.7	
7515.00	-13.2	H	3.0	35.8	1.0	-47.9	-25.0	-22.9	
10020.00	-11.4	H	3.0	36.0	1.0	-46.4	-25.0	-21.4	
Mid Ch, 2535MHz									
5070.00	-16.2	V	3.0	35.4	1.0	-50.6	-25.0	-25.6	
7605.00	-15.2	V	3.0	35.8	1.0	-49.9	-25.0	-24.9	
10140.00	-12.1	V	3.0	36.0	1.0	-47.1	-25.0	-22.1	
5070.00	-16.2	H	3.0	35.4	1.0	-50.6	-25.0	-25.6	
7605.00	-13.8	H	3.0	35.8	1.0	-48.6	-25.0	-23.6	
10140.00	-11.9	H	3.0	36.0	1.0	-46.8	-25.0	-21.8	
High Ch, 2565MHz									
5130.00	-16.2	V	3.0	35.4	1.0	-50.7	-25.0	-25.7	
7695.00	-14.1	V	3.0	35.8	1.0	-48.9	-25.0	-23.9	
10260.00	-12.0	V	3.0	35.9	1.0	-46.9	-25.0	-21.9	
5130.00	-15.6	H	3.0	35.4	1.0	-50.1	-25.0	-25.1	
7695.00	-12.8	H	3.0	35.8	1.0	-47.4	-25.0	-22.4	
10260.00	-11.6	H	3.0	35.9	1.0	-46.5	-25.0	-21.5	

LTE B7 10MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12132730									
Date:	3/5/2018									
Test Engineer:	39005 RA									
Configuration:	EUT + Support Equipment									
Location:	Chamber B									
Mode:	LTE_16QAM Band 7 Harmonics, 15MHz Bandwidth									

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2507.5MHz									
5015.00	-16.9	V	3.0	35.5	1.0	-51.5	-25.0	-26.3	
7522.50	-14.9	V	3.0	35.7	1.0	-49.7	-25.0	-24.7	
10030.00	-12.5	V	3.0	36.0	1.0	-47.5	-25.0	-22.5	
5015.00	-16.9	H	3.0	35.5	1.0	-51.3	-25.0	-26.3	
7522.50	-14.2	H	3.0	35.7	1.0	-48.9	-25.0	-23.9	
10030.00	-12.0	H	3.0	36.0	1.0	-47.1	-25.0	-22.1	
Mid Ch, 2535MHz									
5070.00	-16.7	V	3.0	35.4	1.0	-51.1	-25.0	-26.1	
7605.00	-15.7	V	3.0	35.8	1.0	-50.5	-25.0	-25.5	
10140.00	-13.8	V	3.0	36.0	1.0	-48.8	-25.0	-23.8	
5070.00	-17.2	H	3.0	35.4	1.0	-51.7	-25.0	-26.7	
7605.00	-13.3	H	3.0	35.8	1.0	-48.0	-25.0	-23.0	
10140.00	-11.6	H	3.0	36.0	1.0	-46.5	-25.0	-21.5	
High Ch, 2562.5MHz									
5125.00	-16.0	V	3.0	35.4	1.0	-50.5	-25.0	-25.5	
7687.50	-15.6	V	3.0	35.8	1.0	-50.4	-25.0	-25.4	
10250.00	-11.5	V	3.0	35.9	1.0	-46.4	-25.0	-21.4	
5125.00	-15.5	H	3.0	35.4	1.0	-49.9	-25.0	-24.9	
7687.50	-13.7	H	3.0	35.8	1.0	-48.4	-25.0	-23.4	
10250.00	-11.8	H	3.0	35.9	1.0	-46.7	-25.0	-21.7	

LTE B7 15MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12132730									
Date: 3/5/2018									
Test Engineer: 39005 RA									
Configuration: EUT + Support Equipment									
Location: Chamber B									
Mode: LTE_QPSK Band 7 Harmonics, 20MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2510MHz									
5020.00	-16.8	V	3.0	35.5	1.0	-51.2	-25.0	-26.2	
7530.00	-15.7	V	3.0	35.7	1.0	-50.5	-25.0	-25.5	
10040.00	-13.4	V	3.0	36.0	1.0	-48.4	-25.0	-23.4	
5020.00	-16.2	H	3.0	35.5	1.0	-50.6	-25.0	-25.6	
7530.00	-14.2	H	3.0	35.7	1.0	-48.9	-25.0	-23.9	
10040.00	-11.8	H	3.0	36.0	1.0	-46.8	-25.0	-21.8	
Mid Ch, 2535MHz									
5070.00	-16.3	V	3.0	35.4	1.0	-50.8	-25.0	-25.8	
7605.00	-16.3	V	3.0	35.8	1.0	-51.0	-25.0	-26.0	
10140.00	-13.3	V	3.0	36.0	1.0	-48.3	-25.0	-23.3	
5070.00	-17.0	H	3.0	35.4	1.0	-51.4	-25.0	-26.4	
7605.00	-14.1	H	3.0	35.8	1.0	-48.8	-25.0	-23.8	
10140.00	-12.6	H	3.0	36.0	1.0	-47.6	-25.0	-22.6	
High Ch, 2560MHz									
5120.00	-16.4	V	3.0	35.4	1.0	-50.8	-25.0	-25.8	
7680.00	-15.5	V	3.0	35.8	1.0	-50.3	-25.0	-25.3	
10240.00	-12.9	V	3.0	35.9	1.0	-47.8	-25.0	-22.8	
5120.00	-15.8	H	3.0	35.4	1.0	-50.2	-25.0	-25.2	
7680.00	-14.3	H	3.0	35.8	1.0	-49.1	-25.0	-24.1	
10240.00	-10.0	H	3.0	35.9	1.0	-44.9	-25.0	-19.9	
LTE B7 20MHz QPSK									

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12132730									
Date: 3/5/2018									
Test Engineer: 39005 RA									
Configuration: EUT + Support Equipment									
Location: Chamber B									
Mode: LTE_16QAM Band 7 Harmonics, 20MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2510MHz									
5020.00	-17.1	V	3.0	35.5	1.0	-51.6	-25.0	-26.6	
7530.00	-14.8	V	3.0	35.7	1.0	-49.6	-25.0	-24.6	
10040.00	-13.3	V	3.0	36.0	1.0	-48.3	-25.0	-23.3	
5020.00	-16.2	H	3.0	35.5	1.0	-50.6	-25.0	-25.6	
7530.00	-14.3	H	3.0	35.7	1.0	-49.1	-25.0	-24.1	
10040.00	-13.1	H	3.0	36.0	1.0	-48.1	-25.0	-23.1	
Mid Ch, 2535MHz									
5070.00	-17.2	V	3.0	35.4	1.0	-51.7	-25.0	-26.7	
7605.00	-15.1	V	3.0	35.8	1.0	-49.9	-25.0	-24.9	
10140.00	-13.8	V	3.0	36.0	1.0	-48.8	-25.0	-23.8	
5070.00	-16.7	H	3.0	35.4	1.0	-51.1	-25.0	-26.1	
7605.00	-14.4	H	3.0	35.8	1.0	-49.2	-25.0	-24.2	
10140.00	-11.4	H	3.0	36.0	1.0	-46.4	-25.0	-21.4	
High Ch, 2560MHz									
5120.00	-16.1	V	3.0	35.4	1.0	-50.5	-25.0	-25.5	
7680.00	-15.4	V	3.0	35.8	1.0	-50.1	-25.0	-25.1	
10240.00	-12.9	V	3.0	35.9	1.0	-47.8	-25.0	-22.8	
5120.00	-16.0	H	3.0	35.4	1.0	-50.4	-25.0	-25.4	
7680.00	-14.2	H	3.0	35.8	1.0	-48.9	-25.0	-23.9	
10240.00	-13.1	H	3.0	35.9	1.0	-48.0	-25.0	-23.0	
LTE B7 20MHz 16QAM									

9.1.6. LTE BAND 13

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12132730									
Date: 3/3/2018									
Test Engineer: 43575 OS									
Configuration: EUT + Support Equipment									
Location: Chamber A									
Mode: LTE_QPSK Band 13 Harmonics, 5MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 779.5MHz									
1559.00	-30.1	V	3.0	37.1	1.0	-66.2	-40.0	-26.2	
2338.50	-25.2	V	3.0	36.5	1.0	-61.7	-13.0	-48.7	
3118.00	-24.4	V	3.0	36.3	1.0	-59.7	-13.0	-46.7	
1559.00	-30.0	H	3.0	37.1	1.0	-66.2	-40.0	-26.2	
2338.50	-25.5	H	3.0	36.5	1.0	-61.0	-13.0	-48.0	
3118.00	-24.6	H	3.0	36.3	1.0	-59.8	-13.0	-46.8	
Mid Ch, 782MHz									
1564.00	-30.4	V	3.0	37.1	1.0	-66.5	-40.0	-26.5	
2346.00	-25.9	V	3.0	36.5	1.0	-61.4	-13.0	-48.4	
3128.00	-24.7	V	3.0	36.3	1.0	-60.0	-13.0	-47.0	
1564.00	-30.5	H	3.0	37.1	1.0	-66.7	-40.0	-26.7	
2346.00	-25.9	H	3.0	36.5	1.0	-61.4	-13.0	-48.4	
3128.00	-24.4	H	3.0	36.3	1.0	-59.7	-13.0	-46.7	
High Ch, 784.5MHz									
1569.00	-30.8	V	3.0	37.1	1.0	-66.7	-40.0	-26.7	
2353.50	-25.7	V	3.0	36.5	1.0	-61.2	-13.0	-48.2	
3138.00	-24.1	V	3.0	36.3	1.0	-59.4	-13.0	-46.4	
1569.00	-30.9	H	3.0	37.1	1.0	-67.0	-40.0	-27.0	
2353.50	-26.2	H	3.0	36.5	1.0	-61.7	-13.0	-48.7	
3138.00	-24.1	H	3.0	36.3	1.0	-59.4	-13.0	-46.4	

LTE B13 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12132730									
Date: 3/3/2018									
Test Engineer: 43575 OS									
Configuration: EUT + Support Equipment									
Location: Chamber A									
Mode: LTE_16QAM Band 13 Harmonics, 5MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 779.5MHz									
1559.00	-30.5	V	3.0	37.1	1.0	-66.6	-40.0	-26.6	
2338.50	-25.9	V	3.0	36.5	1.0	-61.9	-13.0	-48.9	
3118.00	-24.6	V	3.0	36.3	1.0	-59.9	-13.0	-46.9	
1559.00	-30.7	H	3.0	37.1	1.0	-66.9	-40.0	-26.9	
2338.50	-25.6	H	3.0	36.5	1.0	-61.1	-13.0	-48.1	
3118.00	-23.9	H	3.0	36.3	1.0	-59.2	-13.0	-46.2	
Mid Ch, 782MHz									
1564.00	-30.4	V	3.0	37.1	1.0	-66.6	-40.0	-26.6	
2346.00	-25.9	V	3.0	36.5	1.0	-61.4	-13.0	-48.4	
3128.00	-24.3	V	3.0	36.3	1.0	-59.6	-13.0	-46.6	
1564.00	-30.7	H	3.0	37.1	1.0	-66.8	-40.0	-26.8	
2346.00	-26.4	H	3.0	36.5	1.0	-61.9	-13.0	-48.9	
3128.00	-24.9	H	3.0	36.3	1.0	-60.2	-13.0	-47.2	
High Ch, 784.5MHz									
1569.00	-30.2	V	3.0	37.1	1.0	-66.4	-40.0	-26.4	
2353.50	-26.1	V	3.0	36.5	1.0	-61.6	-13.0	-48.6	
3138.00	-24.1	V	3.0	36.3	1.0	-59.4	-13.0	-46.4	
1569.00	-30.4	H	3.0	37.1	1.0	-66.5	-40.0	-26.5	
2353.50	-25.6	H	3.0	36.5	1.0	-61.0	-13.0	-48.0	
3138.00	-24.7	H	3.0	36.3	1.0	-60.0	-13.0	-47.0	

LTE B13 5MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12132730									
Date: 3/3/2018									
Test Engineer: 43575 OS									
Configuration: EUT + Support Equipment									
Location: Chamber A									
Mode: LTE_QPSK Band 13 Harmonics, 10MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Mid Ch, 782MHz									
1564.00	-30.4	V	3.0	37.1	1.0	-66.5	-40.0	-26.5	
2346.00	-25.9	V	3.0	36.5	1.0	-61.4	-13.0	-48.4	
3128.00	-25.0	V	3.0	36.3	1.0	-60.3	-13.0	-47.3	
1564.00	-30.5	H	3.0	37.1	1.0	-66.6	-40.0	-26.6	
2346.00	-26.4	H	3.0	36.5	1.0	-61.8	-13.0	-48.8	
3128.00	-24.7	H	3.0	36.3	1.0	-60.0	-13.0	-47.0	

LTE B13 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12132730									
Date: 3/3/2018									
Test Engineer: 43575 OS									
Configuration: EUT + Support Equipment									
Location: Chamber A									
Mode: LTE_16QAM Band 13 Harmonics, 10MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Mid Ch, 782MHz									
1564.00	-29.9	V	3.0	37.1	1.0	-66.0	-40.0	-26.0	
2346.00	-26.1	V	3.0	36.5	1.0	-61.6	-13.0	-48.6	
3128.00	-24.0	V	3.0	36.3	1.0	-59.3	-13.0	-46.3	
1564.00	-31.1	H	3.0	37.1	1.0	-67.2	-40.0	-27.2	
2346.00	-25.3	H	3.0	36.5	1.0	-60.8	-13.0	-47.8	
3128.00	-24.2	H	3.0	36.3	1.0	-59.5	-13.0	-46.5	

LTE B13 10MHz 16QAM

9.1.7. LTE BAND 17

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:	SOMC								
Project #:	12132730								
Date:	3/3/2018								
Test Engineer:	43575 OS								
Configuration:	EUT + Support Equipment								
Location:	Chamber A								
Mode:	LTE_OPK Band 17 Harmonics, 5MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 706.5MHz									
1413.00	-12.9	V	3.0	37.4	1.0	-49.3	-13.0	-36.3	
2119.50	-25.1	V	3.0	36.6	1.0	-40.6	-13.0	-47.6	
2826.00	-23.8	V	3.0	36.4	1.0	-59.2	-13.0	-46.2	
1413.00	-25.4	H	3.0	37.4	1.0	-61.7	-13.0	-48.7	
2119.50	-25.4	H	3.0	36.6	1.0	-61.0	-13.0	-48.0	
2826.00	-24.0	H	3.0	36.4	1.0	-59.4	-13.0	-46.4	
Mid Ch, 710MHz									
1420.00	-9.3	V	3.0	37.3	1.0	-45.6	-13.0	-32.6	
2130.00	-25.1	V	3.0	36.6	1.0	-40.6	-13.0	-47.6	
2840.00	-23.7	V	3.0	36.4	1.0	-59.1	-13.0	-46.1	
1420.00	-24.6	H	3.0	37.3	1.0	-61.0	-13.0	-48.0	
2130.00	-25.3	H	3.0	36.6	1.0	-60.9	-13.0	-47.9	
2840.00	-24.1	H	3.0	36.4	1.0	-59.4	-13.0	-46.4	
High Ch, 713.5MHz									
1427.00	-7.4	V	3.0	37.3	1.0	-43.7	-13.0	-30.7	
2140.50	-25.1	V	3.0	36.6	1.0	-40.6	-13.0	-47.6	
2854.00	-24.0	V	3.0	36.4	1.0	-59.4	-13.0	-46.4	
1427.00	-24.6	H	3.0	37.3	1.0	-61.0	-13.0	-48.0	
2140.50	-25.3	H	3.0	36.6	1.0	-60.9	-13.0	-47.9	
2854.00	-23.1	H	3.0	36.4	1.0	-58.5	-13.0	-45.5	

LTE B17 5MHz QPSK

 | UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement | | | | | | | | | | |--|---|-----------------|--------------|-------------|-------------|-----------|-------------|------------|-------| | Company: | SOMC | | | | | | | | | | Project #: | 12132730 | | | | | | | | | | Date: | 3/3/2018 | | | | | | | | | | Test Engineer: | 43575 OS | | | | | | | | | | Configuration: | EUT + Support Equipment | | | | | | | | | | Location: | Chamber A | | | | | | | | | | Mode: | LTE_16QAM Band 17 Harmonics, 5MHz Bandwidth | | | | | | | | | | f MHz | SG reading (dBm) | Ant. Pol. (H/V) | Distance (m) | Preamp (dB) | Filter (dB) | ERP (dBm) | Limit (dBm) | Delta (dB) | Notes | | Low Ch, 706.5MHz | | | | | | | | | | | 1413.00 | -11.2 | V | 3.0 | 37.4 | 1.0 | -47.6 | -13.0 | -34.6 | | | 2119.50 | -25.3 | V | 3.0 | 36.6 | 1.0 | -40.6 | -13.0 | -47.6 | | | 2826.00 | -24.3 | V | 3.0 | 36.4 | 1.0 | -59.7 | -13.0 | -46.7 | | | 1413.00 | -24.4 | H | 3.0 | 37.4 | 1.0 | -60.8 | -13.0 | -47.8 | | | 2119.50 | -25.5 | H | 3.0 | 36.6 | 1.0 | -61.0 | -13.0 | -48.0 | | | 2826.00 | -23.9 | H | 3.0 | 36.4 | 1.0 | -59.3 | -13.0 | -46.3 | | | Mid Ch, 710MHz | | | | | | | | | | | 1420.00 | -7.9 | V | 3.0 | 37.3 | 1.0 | -44.2 | -13.0 | -31.2 | | | 2130.00 | -24.7 | V | 3.0 | 36.6 | 1.0 | -60.3 | -13.0 | -47.3 | | | 2840.00 | -23.4 | V | 3.0 | 36.4 | 1.0 | -58.8 | -13.0 | -45.8 | | | 1420.00 | -23.7 | H | 3.0 | 37.3 | 1.0 | -60.1 | -13.0 | -47.1 | | | 2130.00 | -24.8 | H | 3.0 | 36.6 | 1.0 | -60.4 | -13.0 | -47.4 | | | 2840.00 | -23.9 | H | 3.0 | 36.4 | 1.0 | -59.3 | -13.0 | -46.3 | | | High Ch, 713.5MHz | | | | | | | | | | | 1427.00 | -6.4 | V | 3.0 | 37.3 | 1.0 | -42.7 | -13.0 | -29.7 | | | 2140.50 | -23.0 | V | 3.0 | 36.6 | 1.0 | -48.6 | -13.0 | -45.6 | | | 2854.00 | -23.7 | V | 3.0 | 36.4 | 1.0 | -59.1 | -13.0 | -46.1 | | | 1427.00 | -23.6 | H | 3.0 | 37.3 | 1.0 | -59.9 | -13.0 | -46.9 | | | 2140.50 | -24.8 | H | 3.0 | 36.6 | 1.0 | -60.3 | -13.0 | -47.3 | | | 2854.00 | -24.1 | H | 3.0 | 36.4 | 1.0 | -59.4 | -13.0 | -46.4 | | LTE B17 5MHz 16QAM | | UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement | | | | | | | | | | |--|--|-----------------|--------------|-------------|-------------|-----------|-------------|------------|-------| | Company: | SOMC | | | | | | | | | | Project #: | 12132730 | | | | | | | | | | Date: | 3/3/2018 | | | | | | | | | | Test Engineer: | 43575 OS | | | | | | | | | | Configuration: | EUT + Support Equipment | | | | | | | | | | Location: | Chamber A | | | | | | | | | | Mode: | LTE_OPK Band 17 Harmonics, 10MHz Bandwidth | | | | | | | | | | f MHz | SG reading (dBm) | Ant. Pol. (H/V) | Distance (m) | Preamp (dB) | Filter (dB) | ERP (dBm) | Limit (dBm) | Delta (dB) | Notes | | Low Ch, 709MHz | | | | | | | | | | | 1418.00 | -7.9 | V | 3.0 | 37.4 | 1.0 | -44.3 | -13.0 | -31.3 | | | 2127.00 | -24.2 | V | 3.0 | 36.6 | 1.0 | -59.7 | -13.0 | -46.7 | | | 2836.00 | -23.8 | V | 3.0 | 36.4 | 1.0 | -59.2 | -13.0 | -46.2 | | | 1418.00 | -28.4 | H | 3.0 | 37.4 | 1.0 | -64.7 | -13.0 | -51.7 | | | 2127.00 | -25.1 | H | 3.0 | 36.6 | 1.0 | -60.6 | -13.0 | -47.6 | | | 2836.00 | -23.8 | H | 3.0 | 36.4 | 1.0 | -59.1 | -13.0 | -46.1 | | | Mid Ch, 710MHz | | | | | | | | | | | 1420.00 | -7.7 | V | 3.0 | 37.3 | 1.0 | -44.0 | -13.0 | -31.0 | | | 2130.00 | -23.2 | V | 3.0 | 36.6 | 1.0 | -58.7 | -13.0 | -45.7 | | | 2840.00 | -24.1 | V | 3.0 | 36.4 | 1.0 | -59.5 | -13.0 | -46.5 | | | 1420.00 | -27.4 | H | 3.0 | 37.3 | 1.0 | -63.8 | -13.0 | -50.8 | | | 2130.00 | -25.5 | H | 3.0 | 36.6 | 1.0 | -61.1 | -13.0 | -48.1 | | | 2840.00 | -23.7 | H | 3.0 | 36.4 | 1.0 | -59.1 | -13.0 | -46.1 | | | High Ch, 711MHz | | | | | | | | | | | 1422.00 | -25.0 | V | 3.0 | 37.3 | 1.0 | -61.4 | -13.0 | -48.4 | | | 2133.00 | -25.3 | V | 3.0 | 36.6 | 1.0 | -60.8 | -13.0 | -47.8 | | | 2844.00 | -23.9 | V | 3.0 | 36.4 | 1.0 | -59.3 | -13.0 | -46.3 | | | 1422.00 | -27.1 | H | 3.0 | 37.3 | 1.0 | -63.5 | -13.0 | -50.5 | | | 2133.00 | -25.8 | H | 3.0 | 36.6 | 1.0 | -61.3 | -13.0 | -48.3 | | | 2844.00 | -23.9 | H | 3.0 | 36.4 | 1.0 | -59.3 | -13.0 | -46.3 | | LTE B17 10MHz QPSK | | UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement | | | | | | | | | | |--|--|-----------------|--------------|-------------|-------------|-----------|-------------|------------|-------| | Company: | SOMC | | | | | | | | | | Project #: | 12132730 | | | | | | | | | | Date: | 3/3/2018 | | | | | | | | | | Test Engineer: | 43575 OS | | | | | | | | | | Configuration: | EUT + Support Equipment | | | | | | | | | | Location: | Chamber A | | | | | | | | | | Mode: | LTE_16QAM Band 17 Harmonics, 10MHz Bandwidth | | | | | | | | | | f MHz | SG reading (dBm) | Ant. Pol. (H/V) | Distance (m) | Preamp (dB) | Filter (dB) | ERP (dBm) | Limit (dBm) | Delta (dB) | Notes | | Low Ch, 709MHz | | | | | | | | | | | 1418.00 | -6.1 | V | 3.0 | 37.4 | 1.0 | -42.4 | -13.0 | -29.4 | | | 2127.00 | -23.4 | V | 3.0 | 36.6 | 1.0 | -58.9 | -13.0 | -45.9 | | | 2836.00 | -24.0 | V | 3.0 | 36.4 | 1.0 | -59.4 | -13.0 | -46.4 | | | 1418.00 | -27.0 | H | 3.0 | 37.4 | 1.0 | -63.3 | -13.0 | -50.3 | | | 2127.00 | -24.6 | H | 3.0 | 36.6 | 1.0 | -60.1 | -13.0 | -47.1 | | | 2836.00 | -23.9 | H | 3.0 | 36.4 | 1.0 | -59.3 | -13.0 | -46.3 | | | Mid Ch, 710MHz | | | | | | | | | | | 1420.00 | -6.0 | V | 3.0 | 37.3 | 1.0 | -42.4 | -13.0 | -29.4 | | | 2130.00 | -23.3 | V | 3.0 | 36.6 | 1.0 | -58.9 | -13.0 | -45.9 | | | 2840.00 | -24.3 | V | 3.0 | 36.4 | 1.0 | -59.7 | -13.0 | -46.7 | | | 1420.00 | -27.2 | H | 3.0 | 37.3 | 1.0 | -63.6 | -13.0 | -50.6 | | | 2130.00 | -25.6 | H | 3.0 | 36.6 | 1.0 | -61.1 | -13.0 | -48.1 | | | 2840.00 | -24.0 | H | 3.0 | 36.4 | 1.0 | -59.4 | -13.0 | -46.4 | | | High Ch, 711MHz | | | | | | | | | | | 1422.00 | -25.3 | V | 3.0 | 37.3 | 1.0 | -61.6 | -13.0 | -48.6 | | | 2133.00 | -25.4 | V | 3.0 | 36.6 | 1.0 | -61.0 | -13.0 | -48.0 | | | 2844.00 | -23.7 | V | 3.0 | 36.4 | 1.0 | -59.0 | -13.0 | -46.0 | | | 1422.00 | -27.6 | H | 3.0 | 37.3 | 1.0 | -64.0 | -13.0 | -51.0 | | | 2133.00 | -25.2 | H | 3.0 | 36.6 | 1.0 | -60.7 | -13.0 | -47.7 | | | 2844.00 | -23.9 | H | 3.0 | 36.4 | 1.0 | -59.3 | -13.0 | -46.3 | | LTE B17 10MHz 16QAM |

9.1.8. LTE BAND 41

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12132730									
Date:	3/7/2018									
Test Engineer:	18069 OG									
Configuration:	EUT + SUPPORT EQUIPMENT									
Location:	Chamber A									
Mode:	LTE_QPSK Band 41 Harmonics, 5MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 2498.5MHz										
4997.00	-17.6	V	3.0	35.5	1.0	-52.0	-25.0	-27.0		
7495.50	-15.8	V	3.0	35.7	1.0	-50.8	-25.0	-25.8		
9994.00	-12.9	V	3.0	36.0	1.0	-47.9	-25.0	-22.9		
4997.00	-16.5	H	3.0	35.5	1.0	-51.0	-25.0	-26.0		
7495.50	-16.4	H	3.0	35.7	1.0	-51.2	-25.0	-26.2		
9994.00	-12.8	H	3.0	36.0	1.0	-47.8	-25.0	-22.8		
Mid Ch, 2503MHz										
5186.00	-16.3	V	3.0	35.4	1.0	-52.7	-25.0	-27.7		
7779.00	-15.1	V	3.0	35.8	1.0	-49.8	-25.0	-24.8		
10372.00	-11.8	V	3.0	35.8	1.0	-46.7	-25.0	-21.7		
5186.00	-16.9	H	3.0	35.4	1.0	-51.3	-25.0	-26.3		
7779.00	-15.6	H	3.0	35.8	1.0	-50.3	-25.0	-25.3		
10372.00	-12.6	H	3.0	35.8	1.0	-47.6	-25.0	-22.6		
High Ch, 2687.5MHz										
5375.00	-18.1	V	3.0	35.4	1.0	-52.5	-25.0	-27.5		
8062.50	-15.0	V	3.0	35.8	1.0	-49.8	-25.0	-24.8		
10750.00	-10.9	V	3.0	35.7	1.0	-45.8	-25.0	-20.8		
5375.00	-17.5	H	3.0	35.4	1.0	-52.0	-25.0	-27.0		
8062.50	-14.3	H	3.0	35.8	1.0	-49.1	-25.0	-24.1		
10750.00	-10.2	H	3.0	35.7	1.0	-44.8	-25.0	-19.8		

LTE B41 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12132730									
Date:	3/7/2018									
Test Engineer:	18069 OG									
Configuration:	EUT + SUPPORT EQUIPMENT									
Location:	Chamber A									
Mode:	LTE_QPSK Band 41 Harmonics, 10MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 2501MHz										
5002.00	-17.3	V	3.0	35.5	1.0	-51.8	-25.0	-26.8		
7503.00	-16.1	V	3.0	35.7	1.0	-50.8	-25.0	-25.8		
10004.00	-13.1	V	3.0	36.0	1.0	-48.1	-25.0	-23.1		
5002.00	-17.5	H	3.0	35.5	1.0	-52.0	-25.0	-27.0		
7503.00	-16.5	H	3.0	35.7	1.0	-51.2	-25.0	-26.2		
10004.00	-11.7	H	3.0	36.0	1.0	-46.7	-25.0	-21.7		
Mid Ch, 2503MHz										
5186.00	-17.2	V	3.0	35.4	1.0	-51.8	-25.0	-26.8		
7779.00	-16.2	V	3.0	35.8	1.0	-51.0	-25.0	-26.0		
10372.00	-13.2	V	3.0	35.8	1.0	-48.1	-25.0	-23.1		
5186.00	-17.6	H	3.0	35.4	1.0	-52.0	-25.0	-27.0		
7779.00	-15.9	H	3.0	35.8	1.0	-50.6	-25.0	-25.6		
10372.00	-11.4	H	3.0	35.8	1.0	-46.3	-25.0	-21.3		
High Ch, 2685MHz										
5370.00	-18.8	V	3.0	35.4	1.0	-53.2	-25.0	-28.2		
8055.00	-14.4	V	3.0	35.8	1.0	-49.2	-25.0	-24.2		
10740.00	-10.6	V	3.0	35.7	1.0	-45.3	-25.0	-20.3		
5370.00	-18.0	H	3.0	35.4	1.0	-52.5	-25.0	-27.5		
8055.00	-14.7	H	3.0	35.8	1.0	-49.5	-25.0	-24.5		
10740.00	-11.3	H	3.0	35.7	1.0	-46.0	-25.0	-21.0		

LTE B41 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12132730									
Date:	3/7/2018									
Test Engineer:	18069 OG									
Configuration:	EUT + SUPPORT EQUIPMENT									
Location:	Chamber A									
Mode:	LTE_QPSK Band 41 Harmonics, 15MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 2503.5MHz										
5007.00	-17.4	V	3.0	35.5	1.0	-51.8	-25.0	-26.8		
7510.50	-16.8	V	3.0	35.7	1.0	-51.5	-25.0	-26.5		
10014.00	-12.0	V	3.0	36.0	1.0	-47.0	-25.0	-22.0		
5007.00	-17.5	H	3.0	35.5	1.0	-52.0	-25.0	-27.0		
7510.50	-16.9	H	3.0	35.7	1.0	-51.6	-25.0	-26.6		
10014.00	-12.4	H	3.0	36.0	1.0	-47.4	-25.0	-22.4		
Mid Ch, 2503MHz										
5186.00	-16.4	V	3.0	35.4	1.0	-50.8	-25.0	-25.8		
7779.00	-15.5	V	3.0	35.8	1.0	-50.3	-25.0	-25.3		
10372.00	-11.8	V	3.0	35.8	1.0	-46.7	-25.0	-21.7		
5186.00	-17.7	H	3.0	35.4	1.0	-52.1	-25.0	-27.1		
7779.00	-15.1	H	3.0	35.8	1.0	-49.8	-25.0	-24.8		
10372.00	-12.4	H	3.0	35.8	1.0	-47.2	-25.0	-22.2		
High Ch, 2682.5MHz										
5365.00	-18.2	V	3.0	35.4	1.0	-52.7	-25.0	-27.7		
8047.50	-14.2	V	3.0	35.8	1.0	-49.0	-25.0	-24.0		
10730.00	-11.8	V	3.0	35.7	1.0	-46.5	-25.0	-21.5		
5365.00	-18.0	H	3.0	35.4	1.0	-52.5	-25.0	-27.5		
8047.50	-13.9	H	3.0	35.8	1.0	-48.7	-25.0	-23.7		
10730.00	-10.5	H	3.0	35.7	1.0	-45.2	-25.0	-20.2		

LTE B41 15MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12132730									
Date:	3/7/2018									
Test Engineer:	18069 OG									
Configuration:	EUT + SUPPORT EQUIPMENT									
Location:	Chamber A									
Mode:	LTE_QPSK Band 41 Harmonics, 15MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 2503.5MHz										
5007.00	-17.4	V	3.0	35.5	1.0	-51.8	-25.0	-26.8		
7510.50	-16.3	V	3.0	35.7	1.0	-51.0	-25.0	-26.0		
10014.00	-12.2	V	3.0	36.0	1.0	-47.2	-25.0	-22.2		
5007.00	-17.0	H	3.0	35.5	1.0	-51.5	-25.0	-26.5		
7510.50	-16.2	H	3.0	35.7	1.0	-51.0	-25.0	-26.0		
10014.00	-13.4	H	3.0	36.0	1.0	-48.4	-25.0	-23.4		
Mid Ch, 2503MHz										
5186.00	-18.0	V	3.0	35.4	1.0	-52.4	-25.0	-27.4		
7779.00	-16.2	V	3.0	35.8	1.0	-50.9	-25.0	-25.9		
10372.00	-12.9	V	3.0	35.8	1.0	-47.8	-25.0	-22.8		
5186.00	-17.6	H	3.0	35.4	1.0	-52.0	-25.0	-27.0		
7779.00	-16.0	H	3.0	35.8	1.0	-50.7	-25.0	-25.7		
10372.00	-12.8	H	3.0	35.8	1.0	-47.7	-25.0	-22.7		
High Ch, 2682.5MHz										
5365.00	-18.3	V	3.0	35.4	1.0	-52.7	-25.0	-27.7		
8047.50	-15.6	V	3.0	35.8	1.0	-50.4	-25.0	-25.4		
10730.00	-10.6	V	3.0	35.7	1.0	-45.3	-25.0	-20.3		
5365.00	-17.7	H	3.0	35.4	1.0	-52.2	-25.0	-27.2		
8047.50	-14.1	H	3.0	35.8	1.0	-48.9	-25.0	-23.9		
10730.00	-11.8	H	3.0	35.7	1.0	-46.5	-25.0	-21.5		

LTE B41 15MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12132730									
Date: 3/7/2018									
Test Engineer: 16069 OG									
Configuration: EUT + SUPPORT EQUIPMENT									
Location: Chamber A									
Mode: LTE_QPSK Band 41 Harmonics, 20MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2506MHz									
5012.00	-17.0	V	3.0	35.5	1.0	-51.5	-25.0	-26.5	
7518.00	-15.8	V	3.0	35.7	1.0	-50.6	-25.0	-25.6	
10024.00	-12.8	V	3.0	36.0	1.0	-47.8	-25.0	-22.8	
5012.00	-16.8	H	3.0	35.5	1.0	-51.0	-25.0	-26.0	
7518.00	-16.8	H	3.0	35.7	1.0	-51.5	-25.0	-26.5	
10024.00	-13.0	H	3.0	36.0	1.0	-48.1	-25.0	-23.1	
Mid Ch, 2593MHz									
5186.00	-17.4	V	3.0	35.4	1.0	-51.8	-25.0	-26.8	
7779.00	-15.7	V	3.0	35.8	1.0	-50.4	-25.0	-25.4	
10372.00	-12.2	V	3.0	35.8	1.0	-47.1	-25.0	-22.1	
5186.00	-18.0	H	3.0	35.4	1.0	-52.4	-25.0	-27.4	
7779.00	-15.7	H	3.0	35.8	1.0	-50.5	-25.0	-25.5	
10372.00	-13.0	H	3.0	35.8	1.0	-47.9	-25.0	-22.9	
High Ch, 2680MHz									
5360.00	-17.7	V	3.0	35.4	1.0	-52.1	-25.0	-27.1	
8040.00	-14.8	V	3.0	35.8	1.0	-49.6	-25.0	-24.6	
10720.00	-10.5	V	3.0	35.7	1.0	-45.2	-25.0	-20.2	
5360.00	-17.2	H	3.0	35.4	1.0	-51.7	-25.0	-26.7	
8040.00	-14.5	H	3.0	35.8	1.0	-49.3	-25.0	-24.3	
10720.00	-9.8	H	3.0	35.7	1.0	-44.4	-25.0	-19.4	
LTE B41 20MHz QPSK									

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12132730									
Date: 3/7/2018									
Test Engineer: 16069 OG									
Configuration: EUT + SUPPORT EQUIPMENT									
Location: Chamber A									
Mode: LTE_16QAM Band 41 Harmonics, 20MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2506MHz									
5012.00	-16.6	V	3.0	35.5	1.0	-51.1	-25.0	-26.1	
7518.00	-15.7	V	3.0	35.7	1.0	-50.4	-25.0	-25.4	
10024.00	-13.4	V	3.0	36.0	1.0	-48.4	-25.0	-23.4	
5012.00	-16.4	H	3.0	35.5	1.0	-50.8	-25.0	-25.8	
7518.00	-15.9	H	3.0	35.7	1.0	-50.7	-25.0	-25.7	
10024.00	-13.9	H	3.0	36.0	1.0	-48.9	-25.0	-23.9	
Mid Ch, 2593MHz									
5186.00	-18.5	V	3.0	35.4	1.0	-52.9	-25.0	-27.9	
7779.00	-15.0	V	3.0	35.8	1.0	-49.8	-25.0	-24.8	
10372.00	-12.6	V	3.0	35.8	1.0	-47.5	-25.0	-22.5	
5186.00	-18.2	H	3.0	35.4	1.0	-52.7	-25.0	-27.7	
7779.00	-14.8	H	3.0	35.8	1.0	-49.5	-25.0	-24.5	
10372.00	-11.9	H	3.0	35.8	1.0	-46.8	-25.0	-21.8	
High Ch, 2680MHz									
5360.00	-17.5	V	3.0	35.4	1.0	-52.0	-25.0	-27.0	
8040.00	-14.1	V	3.0	35.8	1.0	-48.9	-25.0	-23.9	
10720.00	-12.0	V	3.0	35.7	1.0	-46.7	-25.0	-21.7	
5360.00	-18.6	H	3.0	35.4	1.0	-53.1	-25.0	-28.1	
8040.00	-14.9	H	3.0	35.8	1.0	-49.7	-25.0	-24.7	
10720.00	-10.8	H	3.0	35.7	1.0	-45.5	-25.0	-20.5	
LTE B41 20MHz 16QAM									