



Mode	65																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																																																	
ANT	6+7																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	Level (dBuV/m) Date: 2026-05-03 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 HORIZONTAL <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 11570.00</td><td>48.13</td><td>74.00</td><td>-25.87</td><td>46.51</td><td>38.92</td><td>16.87</td><td>54.77</td><td>0.60</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 17355.00</td><td>47.37</td><td>68.20</td><td>-20.83</td><td>44.76</td><td>38.51</td><td>20.60</td><td>56.87</td><td>0.37</td><td>--</td><td>--</td><td>Peak</td></tr></table>	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 11570.00	48.13	74.00	-25.87	46.51	38.92	16.87	54.77	0.60	--	--	Peak	2 17355.00	47.37	68.20	-20.83	44.76	38.51	20.60	56.87	0.37	--	--	Peak	Level (dBuV/m) Date: 2026-05-03 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 VERTICAL <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 11570.00</td><td>47.98</td><td>74.00</td><td>-26.02</td><td>46.36</td><td>38.92</td><td>16.87</td><td>54.77</td><td>0.60</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 17355.00</td><td>48.60</td><td>68.20</td><td>-19.60</td><td>45.99</td><td>38.51</td><td>20.60</td><td>56.87</td><td>0.37</td><td>--</td><td>--</td><td>Peak</td></tr></table>	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 11570.00	47.98	74.00	-26.02	46.36	38.92	16.87	54.77	0.60	--	--	Peak	2 17355.00	48.60	68.20	-19.60	45.99	38.51	20.60	56.87	0.37	--	--	Peak
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1 11570.00	48.13	74.00	-25.87	46.51	38.92	16.87	54.77	0.60	--	--	Peak																																																																																							
2 17355.00	47.37	68.20	-20.83	44.76	38.51	20.60	56.87	0.37	--	--	Peak																																																																																							
Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1 11570.00	47.98	74.00	-26.02	46.36	38.92	16.87	54.77	0.60	--	--	Peak																																																																																							
2 17355.00	48.60	68.20	-19.60	45.99	38.51	20.60	56.87	0.37	--	--	Peak																																																																																							



Mode	65	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-05-03 Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 HORIZONTAL	Level (dBuV/m) Date: 2026-05-03 Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 VERTICAL
	Level (dBuV/m) Date: 2026-05-03 Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 HORIZONTAL	Level (dBuV/m) Date: 2026-05-03 Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 VERTICAL



Mode	66																																																																																																																																										
	Band Edge																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																																																										
ANT	6+7																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	Level (dBuV/m) Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.88</td><td>53.03</td><td>111.08</td><td>-58.05</td><td>41.41</td><td>34.40</td><td>10.84</td><td>33.62</td><td>0.00</td><td>245</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>5869.63</td><td>54.45</td><td>106.70</td><td>-52.25</td><td>42.82</td><td>34.40</td><td>10.85</td><td>33.62</td><td>0.00</td><td>245</td><td>360</td><td>Peak</td></tr><tr><td>3</td><td>5924.75</td><td>52.25</td><td>68.38</td><td>-16.13</td><td>40.61</td><td>34.35</td><td>10.92</td><td>33.63</td><td>0.00</td><td>245</td><td>360</td><td>Peak</td></tr><tr><td>4</td><td>5938.13</td><td>53.60</td><td>68.20</td><td>-14.60</td><td>41.97</td><td>34.32</td><td>10.94</td><td>33.63</td><td>0.00</td><td>245</td><td>360</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.88	53.03	111.08	-58.05	41.41	34.40	10.84	33.62	0.00	245	360	Peak	2	5869.63	54.45	106.70	-52.25	42.82	34.40	10.85	33.62	0.00	245	360	Peak	3	5924.75	52.25	68.38	-16.13	40.61	34.35	10.92	33.63	0.00	245	360	Peak	4	5938.13	53.60	68.20	-14.60	41.97	34.32	10.94	33.63	0.00	245	360	Peak	Level (dBuV/m) Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>107.52</td><td>-----</td><td>-----</td><td>96.03</td><td>34.30</td><td>10.80</td><td>33.61</td><td>0.00</td><td>245</td><td>360</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	107.52	-----	-----	96.03	34.30	10.80	33.61	0.00	245	360	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5854.88	53.03	111.08	-58.05	41.41	34.40	10.84	33.62	0.00	245	360	Peak																																																																																																																															
2	5869.63	54.45	106.70	-52.25	42.82	34.40	10.85	33.62	0.00	245	360	Peak																																																																																																																															
3	5924.75	52.25	68.38	-16.13	40.61	34.35	10.92	33.63	0.00	245	360	Peak																																																																																																																															
4	5938.13	53.60	68.20	-14.60	41.97	34.32	10.94	33.63	0.00	245	360	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5825.00	107.52	-----	-----	96.03	34.30	10.80	33.61	0.00	245	360	Peak																																																																																																																															
Avg	Blank						Level (dBuV/m) Date: 2026-04-27 Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>96.90</td><td>-----</td><td>-----</td><td>85.41</td><td>34.30</td><td>10.80</td><td>33.61</td><td>0.00</td><td>245</td><td>360</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	96.90	-----	-----	85.41	34.30	10.80	33.61	0.00	245	360	Average																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5825.00	96.90	-----	-----	85.41	34.30	10.80	33.61	0.00	245	360	Average																																																																																																																															



Mode	66																																																																																																																																				
	Band Edge																																																																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																																																				
ANT	6+7																																																																																																																																				
Pol.	Vertical						Fundamental																																																																																																																														
Peak	Level (dBuV/m) Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>51.20</td><td>110.80</td><td>-59.60</td><td>39.58</td><td>34.40</td><td>10.84</td><td>33.62</td><td>0.00</td><td>390</td><td>69 Peak</td></tr><tr><td>2</td><td>5874.50</td><td>53.02</td><td>105.34</td><td>-52.32</td><td>41.38</td><td>34.40</td><td>10.86</td><td>33.62</td><td>0.00</td><td>390</td><td>69 Peak</td></tr><tr><td>3</td><td>5922.50</td><td>53.84</td><td>70.04</td><td>-16.20</td><td>42.20</td><td>34.35</td><td>10.92</td><td>33.63</td><td>0.00</td><td>390</td><td>69 Peak</td></tr><tr><td>4</td><td>5939.13</td><td>54.25</td><td>68.20</td><td>-13.95</td><td>42.62</td><td>34.32</td><td>10.94</td><td>33.63</td><td>0.00</td><td>390</td><td>69 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	51.20	110.80	-59.60	39.58	34.40	10.84	33.62	0.00	390	69 Peak	2	5874.50	53.02	105.34	-52.32	41.38	34.40	10.86	33.62	0.00	390	69 Peak	3	5922.50	53.84	70.04	-16.20	42.20	34.35	10.92	33.63	0.00	390	69 Peak	4	5939.13	54.25	68.20	-13.95	42.62	34.32	10.94	33.63	0.00	390	69 Peak	Level (dBuV/m) Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>99.61</td><td>-----</td><td>-----</td><td>88.12</td><td>34.30</td><td>10.80</td><td>33.61</td><td>0.00</td><td>390</td><td>69 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	99.61	-----	-----	88.12	34.30	10.80	33.61	0.00	390	69 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5855.00	51.20	110.80	-59.60	39.58	34.40	10.84	33.62	0.00	390	69 Peak																																																																																																																										
2	5874.50	53.02	105.34	-52.32	41.38	34.40	10.86	33.62	0.00	390	69 Peak																																																																																																																										
3	5922.50	53.84	70.04	-16.20	42.20	34.35	10.92	33.63	0.00	390	69 Peak																																																																																																																										
4	5939.13	54.25	68.20	-13.95	42.62	34.32	10.94	33.63	0.00	390	69 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5825.00	99.61	-----	-----	88.12	34.30	10.80	33.61	0.00	390	69 Peak																																																																																																																										
Avg	Blank						Level (dBuV/m) Date: 2026-04-27 Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>91.73</td><td>-----</td><td>-----</td><td>80.24</td><td>34.30</td><td>10.80</td><td>33.61</td><td>0.00</td><td>390</td><td>69 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	91.73	-----	-----	80.24	34.30	10.80	33.61	0.00	390	69 Average																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5825.00	91.73	-----	-----	80.24	34.30	10.80	33.61	0.00	390	69 Average																																																																																																																										



Mode	66																																																																																																			
	Harmonic																																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																			
ANT	6+7																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2026-05-03 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 HORIZONTAL <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>11650.00</td><td>47.78</td><td>74.00</td><td>-26.22</td><td>46.37</td><td>38.60</td><td>16.93</td><td>54.72</td><td>0.60 -- -- Peak</td></tr><tr><td>2</td><td>17475.00</td><td>48.25</td><td>68.20</td><td>-19.95</td><td>45.47</td><td>38.70</td><td>20.70</td><td>57.00</td><td>0.38 -- -- Peak</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	11650.00	47.78	74.00	-26.22	46.37	38.60	16.93	54.72	0.60 -- -- Peak	2	17475.00	48.25	68.20	-19.95	45.47	38.70	20.70	57.00	0.38 -- -- Peak	Level (dBuV/m) Date: 2026-05-03 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 VERTICAL <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>11650.00</td><td>46.96</td><td>74.00</td><td>-27.04</td><td>45.55</td><td>38.60</td><td>16.93</td><td>54.72</td><td>0.60 -- -- Peak</td></tr><tr><td>2</td><td>17475.00</td><td>48.31</td><td>68.20</td><td>-19.89</td><td>45.53</td><td>38.70</td><td>20.70</td><td>57.00</td><td>0.38 -- -- Peak</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	11650.00	46.96	74.00	-27.04	45.55	38.60	16.93	54.72	0.60 -- -- Peak	2	17475.00	48.31	68.20	-19.89	45.53	38.70	20.70	57.00	0.38 -- -- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																											
1	11650.00	47.78	74.00	-26.22	46.37	38.60	16.93	54.72	0.60 -- -- Peak																																																																																											
2	17475.00	48.25	68.20	-19.95	45.47	38.70	20.70	57.00	0.38 -- -- Peak																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																											
1	11650.00	46.96	74.00	-27.04	45.55	38.60	16.93	54.72	0.60 -- -- Peak																																																																																											
2	17475.00	48.31	68.20	-19.89	45.53	38.70	20.70	57.00	0.38 -- -- Peak																																																																																											



Mode	66	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-05-03 Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 HORIZONTAL	Level (dBuV/m) Date: 2026-05-03 Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 VERTICAL
	Level (dBuV/m) Date: 2026-05-03 Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 HORIZONTAL	Level (dBuV/m) Date: 2026-05-03 Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 VERTICAL



Mode	67																																																																																																																																			
	Band Edge - L																																																																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																																																			
ANT	6+7																																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																																													
Peak	Level (dBuV/m) Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5649.14</td><td>51.92</td><td>68.20</td><td>-16.28</td><td>41.39</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>292 0 Peak</td></tr><tr><td>2</td><td>5650.38</td><td>49.95</td><td>68.48</td><td>-18.53</td><td>39.42</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>292 0 Peak</td></tr><tr><td>3</td><td>5700.13</td><td>52.58</td><td>105.24</td><td>-52.66</td><td>41.74</td><td>33.70</td><td>10.73</td><td>33.59</td><td>0.00</td><td>292 0 Peak</td></tr><tr><td>4</td><td>5720.13</td><td>52.04</td><td>111.09</td><td>-58.25</td><td>41.92</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>292 0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5649.14	51.92	68.20	-16.28	41.39	33.40	10.71	33.58	0.00	292 0 Peak	2	5650.38	49.95	68.48	-18.53	39.42	33.40	10.71	33.58	0.00	292 0 Peak	3	5700.13	52.58	105.24	-52.66	41.74	33.70	10.73	33.59	0.00	292 0 Peak	4	5720.13	52.04	111.09	-58.25	41.92	33.78	10.74	33.60	0.00	292 0 Peak	Level (dBuV/m) Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>99.41</td><td>-----</td><td>-----</td><td>88.31</td><td>33.95</td><td>10.75</td><td>33.60</td><td>0.00</td><td>292 0 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	99.41	-----	-----	88.31	33.95	10.75	33.60	0.00	292 0 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5649.14	51.92	68.20	-16.28	41.39	33.40	10.71	33.58	0.00	292 0 Peak																																																																																																																										
2	5650.38	49.95	68.48	-18.53	39.42	33.40	10.71	33.58	0.00	292 0 Peak																																																																																																																										
3	5700.13	52.58	105.24	-52.66	41.74	33.70	10.73	33.59	0.00	292 0 Peak																																																																																																																										
4	5720.13	52.04	111.09	-58.25	41.92	33.78	10.74	33.60	0.00	292 0 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5755.00	99.41	-----	-----	88.31	33.95	10.75	33.60	0.00	292 0 Peak																																																																																																																										
Avg	Blank						Level (dBuV/m) Date: 2026-04-27 Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>91.54</td><td>-----</td><td>-----</td><td>80.48</td><td>33.91</td><td>10.75</td><td>33.60</td><td>0.00</td><td>292 0 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	91.54	-----	-----	80.48	33.91	10.75	33.60	0.00	292 0 Average																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5755.00	91.54	-----	-----	80.48	33.91	10.75	33.60	0.00	292 0 Average																																																																																																																										




Mode	67																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																															
ANT	6+7																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5854.84</td><td>52.83</td><td>111.16</td><td>-58.33</td><td>41.21</td><td>34.40</td><td>10.84</td><td>33.62</td><td>0.00</td><td>292</td><td>0</td><td>Peak</td></tr><tr><td>2</td><td>5873.56</td><td>52.90</td><td>105.60</td><td>-52.70</td><td>41.26</td><td>34.40</td><td>10.86</td><td>33.62</td><td>0.00</td><td>292</td><td>0</td><td>Peak</td></tr><tr><td>3</td><td>5924.26</td><td>53.21</td><td>68.75</td><td>-15.54</td><td>41.57</td><td>34.35</td><td>10.92</td><td>33.63</td><td>0.00</td><td>292</td><td>0</td><td>Peak</td></tr><tr><td>4</td><td>5936.74</td><td>52.83</td><td>68.20</td><td>-15.37</td><td>41.20</td><td>34.33</td><td>10.93</td><td>33.63</td><td>0.00</td><td>292</td><td>0</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5854.84	52.83	111.16	-58.33	41.21	34.40	10.84	33.62	0.00	292	0	Peak	2	5873.56	52.90	105.60	-52.70	41.26	34.40	10.86	33.62	0.00	292	0	Peak	3	5924.26	53.21	68.75	-15.54	41.57	34.35	10.92	33.63	0.00	292	0	Peak	4	5936.74	52.83	68.20	-15.37	41.20	34.33	10.93	33.63	0.00	292	0	Peak	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5854.84	52.83	111.16	-58.33	41.21	34.40	10.84	33.62	0.00	292	0	Peak																																																																				
2	5873.56	52.90	105.60	-52.70	41.26	34.40	10.86	33.62	0.00	292	0	Peak																																																																				
3	5924.26	53.21	68.75	-15.54	41.57	34.35	10.92	33.63	0.00	292	0	Peak																																																																				
4	5936.74	52.83	68.20	-15.37	41.20	34.33	10.93	33.63	0.00	292	0	Peak																																																																				



Mode	67																																																																																																																																				
	Band Edge - L																																																																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																																																				
ANT	6+7																																																																																																																																				
Pol.	Vertical						Fundamental																																																																																																																														
Peak	Level (dBuV/m) Date: 2026-04-27 PEAK_BE(B4)_16-24 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5642.16</td><td>52.89</td><td>68.20</td><td>-15.31</td><td>42.38</td><td>33.38</td><td>10.71</td><td>33.58</td><td>0.00</td><td>400</td><td>71 Peak</td></tr><tr><td>2</td><td>5651.15</td><td>51.77</td><td>69.05</td><td>-17.28</td><td>41.23</td><td>33.41</td><td>10.71</td><td>33.58</td><td>0.00</td><td>400</td><td>71 Peak</td></tr><tr><td>3</td><td>5702.61</td><td>51.68</td><td>105.93</td><td>-54.25</td><td>40.83</td><td>33.71</td><td>10.73</td><td>33.59</td><td>0.00</td><td>400</td><td>71 Peak</td></tr><tr><td>4</td><td>5720.13</td><td>49.88</td><td>111.09</td><td>-61.21</td><td>38.96</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>400</td><td>71 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5642.16	52.89	68.20	-15.31	42.38	33.38	10.71	33.58	0.00	400	71 Peak	2	5651.15	51.77	69.05	-17.28	41.23	33.41	10.71	33.58	0.00	400	71 Peak	3	5702.61	51.68	105.93	-54.25	40.83	33.71	10.73	33.59	0.00	400	71 Peak	4	5720.13	49.88	111.09	-61.21	38.96	33.78	10.74	33.60	0.00	400	71 Peak	Level (dBuV/m) Date: 2026-04-27 PEAK(UNI) Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>90.52</td><td>-----</td><td>-----</td><td>79.42</td><td>33.95</td><td>10.75</td><td>33.60</td><td>0.00</td><td>400</td><td>71 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	90.52	-----	-----	79.42	33.95	10.75	33.60	0.00	400	71 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5642.16	52.89	68.20	-15.31	42.38	33.38	10.71	33.58	0.00	400	71 Peak																																																																																																																										
2	5651.15	51.77	69.05	-17.28	41.23	33.41	10.71	33.58	0.00	400	71 Peak																																																																																																																										
3	5702.61	51.68	105.93	-54.25	40.83	33.71	10.73	33.59	0.00	400	71 Peak																																																																																																																										
4	5720.13	49.88	111.09	-61.21	38.96	33.78	10.74	33.60	0.00	400	71 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5755.00	90.52	-----	-----	79.42	33.95	10.75	33.60	0.00	400	71 Peak																																																																																																																										
Avg	Blank						Level (dBuV/m) Date: 2026-04-27 AVG_54 Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>82.86</td><td>-----</td><td>-----</td><td>71.76</td><td>33.95</td><td>10.75</td><td>33.60</td><td>0.00</td><td>400</td><td>71 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	82.86	-----	-----	71.76	33.95	10.75	33.60	0.00	400	71 Average																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5755.00	82.86	-----	-----	71.76	33.95	10.75	33.60	0.00	400	71 Average																																																																																																																										

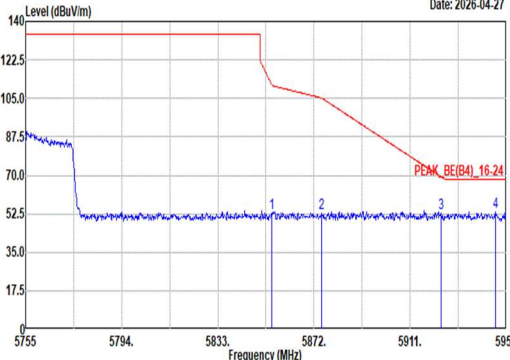

Mode	67																																																																																
	Band Edge - R																																																																																
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																
ANT	6+7																																																																																
Pol.	Vertical	Fundamental																																																																															
Peak	Date: 2026-04-27  Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.84</td><td>52.67</td><td>111.16</td><td>-58.49</td><td>41.05</td><td>34.40</td><td>10.84</td><td>33.62</td><td>0.00</td><td>400</td><td>71 Peak</td></tr><tr><td>2</td><td>5874.93</td><td>53.04</td><td>105.22</td><td>-52.18</td><td>41.40</td><td>34.40</td><td>10.86</td><td>33.62</td><td>0.00</td><td>400</td><td>71 Peak</td></tr><tr><td>3</td><td>5923.48</td><td>52.95</td><td>69.32</td><td>-16.37</td><td>41.31</td><td>34.35</td><td>10.92</td><td>33.63</td><td>0.00</td><td>400</td><td>71 Peak</td></tr><tr><td>4</td><td>5945.71</td><td>53.55</td><td>68.20</td><td>-14.65</td><td>41.93</td><td>34.31</td><td>10.94</td><td>33.63</td><td>0.00</td><td>400</td><td>71 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.84	52.67	111.16	-58.49	41.05	34.40	10.84	33.62	0.00	400	71 Peak	2	5874.93	53.04	105.22	-52.18	41.40	34.40	10.86	33.62	0.00	400	71 Peak	3	5923.48	52.95	69.32	-16.37	41.31	34.35	10.92	33.63	0.00	400	71 Peak	4	5945.71	53.55	68.20	-14.65	41.93	34.31	10.94	33.63	0.00	400	71 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5854.84	52.67	111.16	-58.49	41.05	34.40	10.84	33.62	0.00	400	71 Peak																																																																						
2	5874.93	53.04	105.22	-52.18	41.40	34.40	10.86	33.62	0.00	400	71 Peak																																																																						
3	5923.48	52.95	69.32	-16.37	41.31	34.35	10.92	33.63	0.00	400	71 Peak																																																																						
4	5945.71	53.55	68.20	-14.65	41.93	34.31	10.94	33.63	0.00	400	71 Peak																																																																						







FCC RADIO TEST REPORT

Report No. :FR620306F

Mode	67																																																																																																															
	Harmonic																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																															
ANT	6+7																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-05-04 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11510.00</td><td>47.73</td><td>74.00</td><td>-26.27</td><td>45.94</td><td>39.16</td><td>16.83</td><td>54.80</td><td>0.60</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17265.00</td><td>48.24</td><td>68.20</td><td>-19.96</td><td>45.78</td><td>38.33</td><td>20.53</td><td>56.77</td><td>0.37</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11510.00	47.73	74.00	-26.27	45.94	39.16	16.83	54.80	0.60	--	Peak	2	17265.00	48.24	68.20	-19.96	45.78	38.33	20.53	56.77	0.37	--	Peak	Level (dBuV/m) Date: 2026-05-04 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11510.00</td><td>47.46</td><td>74.00</td><td>-26.54</td><td>45.67</td><td>39.16</td><td>16.83</td><td>54.80</td><td>0.60</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17265.00</td><td>47.82</td><td>68.20</td><td>-20.38</td><td>45.36</td><td>38.33</td><td>20.53</td><td>56.77</td><td>0.37</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11510.00	47.46	74.00	-26.54	45.67	39.16	16.83	54.80	0.60	--	Peak	2	17265.00	47.82	68.20	-20.38	45.36	38.33	20.53	56.77	0.37	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	11510.00	47.73	74.00	-26.27	45.94	39.16	16.83	54.80	0.60	--	Peak																																																																																																					
2	17265.00	48.24	68.20	-19.96	45.78	38.33	20.53	56.77	0.37	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	11510.00	47.46	74.00	-26.54	45.67	39.16	16.83	54.80	0.60	--	Peak																																																																																																					
2	17265.00	47.82	68.20	-20.38	45.36	38.33	20.53	56.77	0.37	--	Peak																																																																																																					

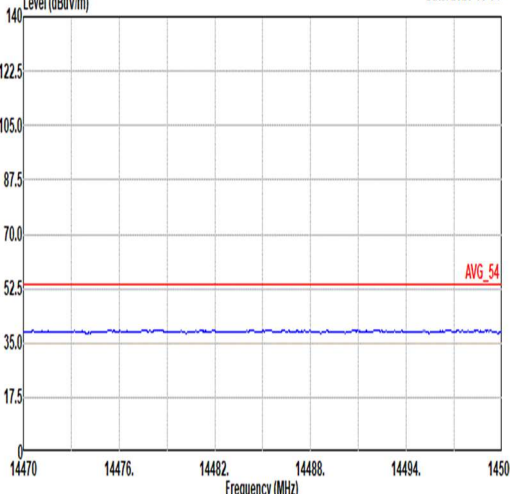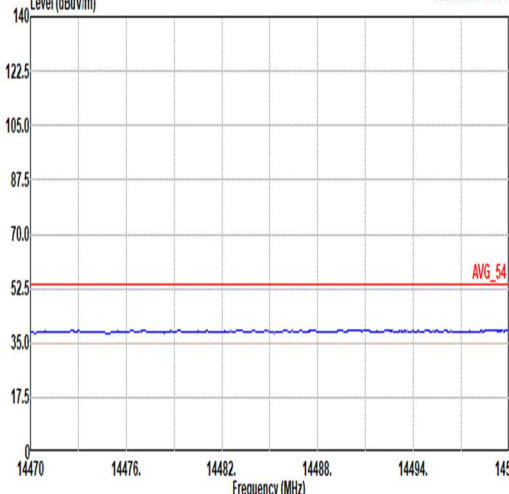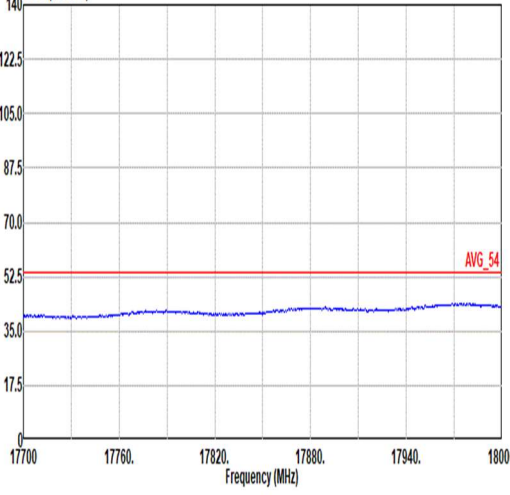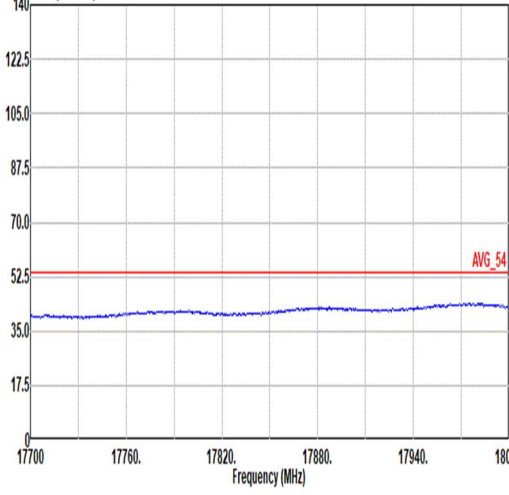

Mode	67	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-05-04  Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 HORIZONTAL	Level (dBuV/m) Date: 2026-05-04  Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 VERTICAL
	Level (dBuV/m) Date: 2026-05-04  Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 HORIZONTAL	Level (dBuV/m) Date: 2026-05-04  Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 VERTICAL



Mode	68																																																																																																																							
	Band Edge - L																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																							
ANT	6+7																																																																																																																							
Pol.	Horizontal					Fundamental																																																																																																																		
Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5603.51</td><td>52.14</td><td>68.20</td><td>-16.06</td><td>41.72</td><td>33.31</td><td>10.69</td><td>33.58</td><td>0.00</td><td>206 37 Peak</td></tr><tr><td>2 5650.31</td><td>51.46</td><td>68.43</td><td>-16.97</td><td>40.93</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>206 37 Peak</td></tr><tr><td>3 5701.40</td><td>51.82</td><td>105.59</td><td>-53.77</td><td>40.97</td><td>33.71</td><td>10.73</td><td>33.59</td><td>0.00</td><td>206 37 Peak</td></tr><tr><td>4 5720.32</td><td>51.16</td><td>111.52</td><td>-60.36</td><td>40.24</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>206 37 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5603.51	52.14	68.20	-16.06	41.72	33.31	10.69	33.58	0.00	206 37 Peak	2 5650.31	51.46	68.43	-16.97	40.93	33.40	10.71	33.58	0.00	206 37 Peak	3 5701.40	51.82	105.59	-53.77	40.97	33.71	10.73	33.59	0.00	206 37 Peak	4 5720.32	51.16	111.52	-60.36	40.24	33.78	10.74	33.60	0.00	206 37 Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5795.00</td><td>100.65</td><td>-----</td><td>-----</td><td>89.33</td><td>34.16</td><td>10.77</td><td>33.61</td><td>0.00</td><td>206 37 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5795.00	100.65	-----	-----	89.33	34.16	10.77	33.61	0.00	206 37 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1 5603.51	52.14	68.20	-16.06	41.72	33.31	10.69	33.58	0.00	206 37 Peak																																																																																																															
2 5650.31	51.46	68.43	-16.97	40.93	33.40	10.71	33.58	0.00	206 37 Peak																																																																																																															
3 5701.40	51.82	105.59	-53.77	40.97	33.71	10.73	33.59	0.00	206 37 Peak																																																																																																															
4 5720.32	51.16	111.52	-60.36	40.24	33.78	10.74	33.60	0.00	206 37 Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1 5795.00	100.65	-----	-----	89.33	34.16	10.77	33.61	0.00	206 37 Peak																																																																																																															
Avg	Blank					Date: 2026-04-27 Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5795.00</td><td>92.27</td><td>-----</td><td>-----</td><td>80.95</td><td>34.16</td><td>10.77</td><td>33.61</td><td>0.00</td><td>206 37 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5795.00	92.27	-----	-----	80.95	34.16	10.77	33.61	0.00	206 37 Average																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1 5795.00	92.27	-----	-----	80.95	34.16	10.77	33.61	0.00	206 37 Average																																																																																																															



Mode	68																																																																																
	Band Edge - R																																																																																
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																
ANT	6+7																																																																																
Pol.	Horizontal	Fundamental																																																																															
Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.68</td><td>52.03</td><td>111.54</td><td>-59.51</td><td>40.41</td><td>34.40</td><td>10.84</td><td>33.62</td><td>0.00</td><td>206</td><td>37 Peak</td></tr><tr><td>2</td><td>5873.28</td><td>54.65</td><td>105.68</td><td>-51.03</td><td>43.01</td><td>34.40</td><td>10.86</td><td>33.62</td><td>0.00</td><td>206</td><td>37 Peak</td></tr><tr><td>3</td><td>5923.50</td><td>52.77</td><td>69.31</td><td>-16.54</td><td>41.13</td><td>34.35</td><td>10.92</td><td>33.63</td><td>0.00</td><td>206</td><td>37 Peak</td></tr><tr><td>4</td><td>5930.94</td><td>53.46</td><td>68.20</td><td>-14.74</td><td>41.82</td><td>34.34</td><td>10.93</td><td>33.63</td><td>0.00</td><td>206</td><td>37 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.68	52.03	111.54	-59.51	40.41	34.40	10.84	33.62	0.00	206	37 Peak	2	5873.28	54.65	105.68	-51.03	43.01	34.40	10.86	33.62	0.00	206	37 Peak	3	5923.50	52.77	69.31	-16.54	41.13	34.35	10.92	33.63	0.00	206	37 Peak	4	5930.94	53.46	68.20	-14.74	41.82	34.34	10.93	33.63	0.00	206	37 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5854.68	52.03	111.54	-59.51	40.41	34.40	10.84	33.62	0.00	206	37 Peak																																																																						
2	5873.28	54.65	105.68	-51.03	43.01	34.40	10.86	33.62	0.00	206	37 Peak																																																																						
3	5923.50	52.77	69.31	-16.54	41.13	34.35	10.92	33.63	0.00	206	37 Peak																																																																						
4	5930.94	53.46	68.20	-14.74	41.82	34.34	10.93	33.63	0.00	206	37 Peak																																																																						



Mode	68																																																																																																																																				
	Band Edge - L																																																																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																																				
ANT	6+7																																																																																																																																				
Pol.	Vertical						Fundamental																																																																																																																														
Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5642.51</td><td>51.62</td><td>68.20</td><td>-16.58</td><td>41.10</td><td>33.39</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>2</td><td>5650.12</td><td>50.33</td><td>68.29</td><td>-17.96</td><td>39.00</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>3</td><td>5700.43</td><td>51.05</td><td>105.32</td><td>-54.27</td><td>40.21</td><td>33.70</td><td>10.73</td><td>33.59</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>4</td><td>5720.12</td><td>50.98</td><td>111.07</td><td>-60.09</td><td>40.06</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak	2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak	3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak	4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>98.70</td><td>-----</td><td>-----</td><td>87.38</td><td>34.16</td><td>10.77</td><td>33.61</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak																																																																																																																										
2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak																																																																																																																										
3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak																																																																																																																										
4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak																																																																																																																										
Avg	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5642.51</td><td>51.62</td><td>68.20</td><td>-16.58</td><td>41.10</td><td>33.39</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>2</td><td>5650.12</td><td>50.33</td><td>68.29</td><td>-17.96</td><td>39.00</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>3</td><td>5700.43</td><td>51.05</td><td>105.32</td><td>-54.27</td><td>40.21</td><td>33.70</td><td>10.73</td><td>33.59</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>4</td><td>5720.12</td><td>50.98</td><td>111.07</td><td>-60.09</td><td>40.06</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak	2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak	3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak	4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>98.70</td><td>-----</td><td>-----</td><td>87.38</td><td>34.16</td><td>10.77</td><td>33.61</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak																																																																																																																										
2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak																																																																																																																										
3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak																																																																																																																										
4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak																																																																																																																										
Blank	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5642.51</td><td>51.62</td><td>68.20</td><td>-16.58</td><td>41.10</td><td>33.39</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>2</td><td>5650.12</td><td>50.33</td><td>68.29</td><td>-17.96</td><td>39.00</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>3</td><td>5700.43</td><td>51.05</td><td>105.32</td><td>-54.27</td><td>40.21</td><td>33.70</td><td>10.73</td><td>33.59</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>4</td><td>5720.12</td><td>50.98</td><td>111.07</td><td>-60.09</td><td>40.06</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak	2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak	3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak	4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>98.70</td><td>-----</td><td>-----</td><td>87.38</td><td>34.16</td><td>10.77</td><td>33.61</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak																																																																																																																										
2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak																																																																																																																										
3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak																																																																																																																										
4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak																																																																																																																										
Avg	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5642.51</td><td>51.62</td><td>68.20</td><td>-16.58</td><td>41.10</td><td>33.39</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>2</td><td>5650.12</td><td>50.33</td><td>68.29</td><td>-17.96</td><td>39.00</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>3</td><td>5700.43</td><td>51.05</td><td>105.32</td><td>-54.27</td><td>40.21</td><td>33.70</td><td>10.73</td><td>33.59</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>4</td><td>5720.12</td><td>50.98</td><td>111.07</td><td>-60.09</td><td>40.06</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak	2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak	3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak	4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>98.70</td><td>-----</td><td>-----</td><td>87.38</td><td>34.16</td><td>10.77</td><td>33.61</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak																																																																																																																										
2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak																																																																																																																										
3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak																																																																																																																										
4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak																																																																																																																										
Blank	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5642.51</td><td>51.62</td><td>68.20</td><td>-16.58</td><td>41.10</td><td>33.39</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>2</td><td>5650.12</td><td>50.33</td><td>68.29</td><td>-17.96</td><td>39.00</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>3</td><td>5700.43</td><td>51.05</td><td>105.32</td><td>-54.27</td><td>40.21</td><td>33.70</td><td>10.73</td><td>33.59</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>4</td><td>5720.12</td><td>50.98</td><td>111.07</td><td>-60.09</td><td>40.06</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak	2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak	3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak	4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>98.70</td><td>-----</td><td>-----</td><td>87.38</td><td>34.16</td><td>10.77</td><td>33.61</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak																																																																																																																										
2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak																																																																																																																										
3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak																																																																																																																										
4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak																																																																																																																										
Avg	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5642.51</td><td>51.62</td><td>68.20</td><td>-16.58</td><td>41.10</td><td>33.39</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>2</td><td>5650.12</td><td>50.33</td><td>68.29</td><td>-17.96</td><td>39.00</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>3</td><td>5700.43</td><td>51.05</td><td>105.32</td><td>-54.27</td><td>40.21</td><td>33.70</td><td>10.73</td><td>33.59</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>4</td><td>5720.12</td><td>50.98</td><td>111.07</td><td>-60.09</td><td>40.06</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak	2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak	3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak	4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>98.70</td><td>-----</td><td>-----</td><td>87.38</td><td>34.16</td><td>10.77</td><td>33.61</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak																																																																																																																										
2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak																																																																																																																										
3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak																																																																																																																										
4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak																																																																																																																										
Blank	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5642.51</td><td>51.62</td><td>68.20</td><td>-16.58</td><td>41.10</td><td>33.39</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>2</td><td>5650.12</td><td>50.33</td><td>68.29</td><td>-17.96</td><td>39.00</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>3</td><td>5700.43</td><td>51.05</td><td>105.32</td><td>-54.27</td><td>40.21</td><td>33.70</td><td>10.73</td><td>33.59</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>4</td><td>5720.12</td><td>50.98</td><td>111.07</td><td>-60.09</td><td>40.06</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak	2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak	3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak	4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>98.70</td><td>-----</td><td>-----</td><td>87.38</td><td>34.16</td><td>10.77</td><td>33.61</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak																																																																																																																										
2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak																																																																																																																										
3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak																																																																																																																										
4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak																																																																																																																										
Avg	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5642.51</td><td>51.62</td><td>68.20</td><td>-16.58</td><td>41.10</td><td>33.39</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>2</td><td>5650.12</td><td>50.33</td><td>68.29</td><td>-17.96</td><td>39.00</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>3</td><td>5700.43</td><td>51.05</td><td>105.32</td><td>-54.27</td><td>40.21</td><td>33.70</td><td>10.73</td><td>33.59</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>4</td><td>5720.12</td><td>50.98</td><td>111.07</td><td>-60.09</td><td>40.06</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak	2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak	3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak	4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>98.70</td><td>-----</td><td>-----</td><td>87.38</td><td>34.16</td><td>10.77</td><td>33.61</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak																																																																																																																										
2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak																																																																																																																										
3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak																																																																																																																										
4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	98.70	-----	-----	87.38	34.16	10.77	33.61	0.00	300	247 Peak																																																																																																																										
Blank	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5642.51</td><td>51.62</td><td>68.20</td><td>-16.58</td><td>41.10</td><td>33.39</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>2</td><td>5650.12</td><td>50.33</td><td>68.29</td><td>-17.96</td><td>39.00</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>3</td><td>5700.43</td><td>51.05</td><td>105.32</td><td>-54.27</td><td>40.21</td><td>33.70</td><td>10.73</td><td>33.59</td><td>0.00</td><td>300</td><td>247 Peak</td></tr><tr><td>4</td><td>5720.12</td><td>50.98</td><td>111.07</td><td>-60.09</td><td>40.06</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>300</td><td>247 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak	2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak	3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak	4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>98.70</td><td>-----</</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	98.70	-----</								
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5642.51	51.62	68.20	-16.58	41.10	33.39	10.71	33.58	0.00	300	247 Peak																																																																																																																										
2	5650.12	50.33	68.29	-17.96	39.00	33.40	10.71	33.58	0.00	300	247 Peak																																																																																																																										
3	5700.43	51.05	105.32	-54.27	40.21	33.70	10.73	33.59	0.00	300	247 Peak																																																																																																																										
4	5720.12	50.98	111.07	-60.09	40.06	33.78	10.74	33.60	0.00	300	247 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	98.70	-----</																																																																																																																																		





	68																																																																																													
Mode	Band Edge - R																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																													
ANT	6+7																																																																																													
Pol.	Vertical						Fundamental																																																																																							
Peak	Date: 2026-04-27 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.06</td><td>53.12</td><td>112.95</td><td>-59.83</td><td>41.51</td><td>34.40</td><td>10.83</td><td>33.62</td><td>0.00</td><td>300</td><td>247</td><td>Peak</td></tr><tr><td>2</td><td>5872.97</td><td>53.33</td><td>105.77</td><td>-52.44</td><td>41.69</td><td>34.40</td><td>10.86</td><td>33.62</td><td>0.00</td><td>300</td><td>247</td><td>Peak</td></tr><tr><td>3</td><td>5924.27</td><td>53.16</td><td>68.74</td><td>-15.58</td><td>41.52</td><td>34.35</td><td>10.92</td><td>33.63</td><td>0.00</td><td>300</td><td>247</td><td>Peak</td></tr><tr><td>4</td><td>5931.07</td><td>53.96</td><td>68.20</td><td>-14.24</td><td>42.32</td><td>34.34</td><td>10.93</td><td>33.63</td><td>0.00</td><td>300</td><td>247</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.06	53.12	112.95	-59.83	41.51	34.40	10.83	33.62	0.00	300	247	Peak	2	5872.97	53.33	105.77	-52.44	41.69	34.40	10.86	33.62	0.00	300	247	Peak	3	5924.27	53.16	68.74	-15.58	41.52	34.35	10.92	33.63	0.00	300	247	Peak	4	5931.07	53.96	68.20	-14.24	42.32	34.34	10.93	33.63	0.00	300	247	Peak	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5854.06	53.12	112.95	-59.83	41.51	34.40	10.83	33.62	0.00	300	247	Peak																																																																																		
2	5872.97	53.33	105.77	-52.44	41.69	34.40	10.86	33.62	0.00	300	247	Peak																																																																																		
3	5924.27	53.16	68.74	-15.58	41.52	34.35	10.92	33.63	0.00	300	247	Peak																																																																																		
4	5931.07	53.96	68.20	-14.24	42.32	34.34	10.93	33.63	0.00	300	247	Peak																																																																																		



FCC RADIO TEST REPORT




Report No. :FR620306F

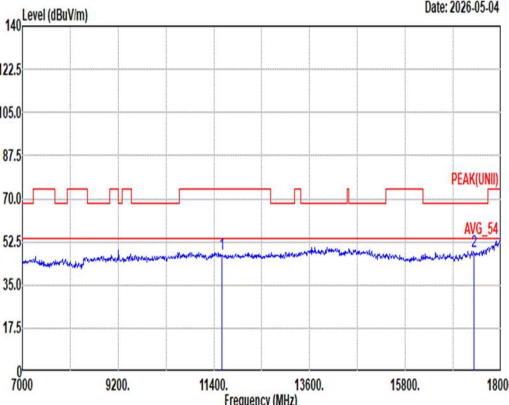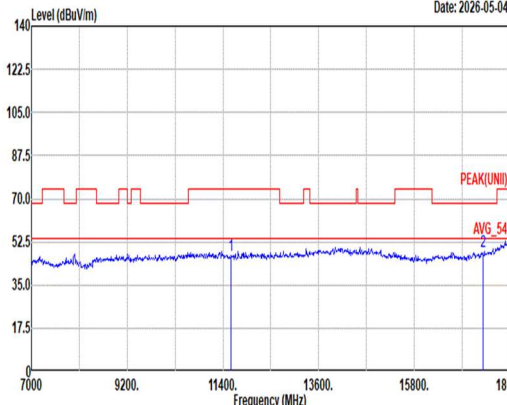Mode	68																																																																																																																							
	Harmonic																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																							
ANT	6+7																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	 Level (dBuV/m) Date: 2026-05-04 PEAK(UNII) AVG_54 Frequency (MHz)						 Level (dBuV/m) Date: 2026-05-04 PEAK(UNII) AVG_54 Frequency (MHz)																																																																																																																	
	Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 HORIZONTAL						Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 VERTICAL																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11590.00</td><td>47.75</td><td>74.00</td><td>-26.25</td><td>46.18</td><td>38.84</td><td>16.89</td><td>54.76</td><td>0.60</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>17385.00</td><td>48.45</td><td>68.20</td><td>-19.75</td><td>45.78</td><td>38.57</td><td>20.63</td><td>56.90</td><td>0.37</td><td>--</td><td>-- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11590.00	47.75	74.00	-26.25	46.18	38.84	16.89	54.76	0.60	--	-- Peak	2	17385.00	48.45	68.20	-19.75	45.78	38.57	20.63	56.90	0.37	--	-- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11590.00</td><td>46.86</td><td>74.00</td><td>-27.14</td><td>45.29</td><td>38.84</td><td>16.89</td><td>54.76</td><td>0.60</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>17385.00</td><td>48.62</td><td>68.20</td><td>-19.58</td><td>45.95</td><td>38.57</td><td>20.63</td><td>56.90</td><td>0.37</td><td>--</td><td>-- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11590.00	46.86	74.00	-27.14	45.29	38.84	16.89	54.76	0.60	--	-- Peak	2	17385.00	48.62	68.20	-19.58	45.95	38.57	20.63	56.90	0.37	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11590.00	47.75	74.00	-26.25	46.18	38.84	16.89	54.76	0.60	--	-- Peak																																																																																																													
2	17385.00	48.45	68.20	-19.75	45.78	38.57	20.63	56.90	0.37	--	-- Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11590.00	46.86	74.00	-27.14	45.29	38.84	16.89	54.76	0.60	--	-- Peak																																																																																																													
2	17385.00	48.62	68.20	-19.58	45.95	38.57	20.63	56.90	0.37	--	-- Peak																																																																																																													




Mode	68	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-05-04 Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 HORIZONTAL	Level (dBuV/m) Date: 2026-05-04 Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 VERTICAL
	Level (dBuV/m) Date: 2026-05-04 Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 HORIZONTAL	Level (dBuV/m) Date: 2026-05-04 Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 VERTICAL

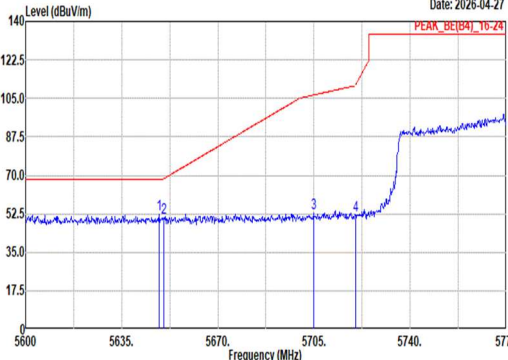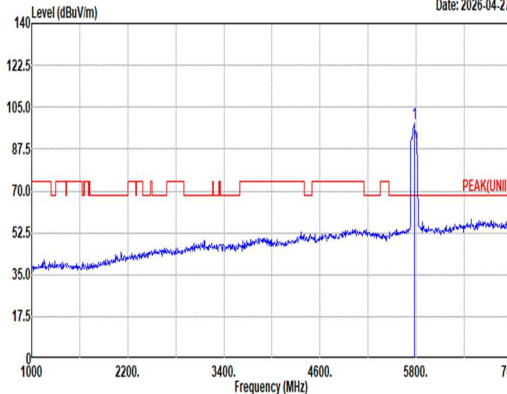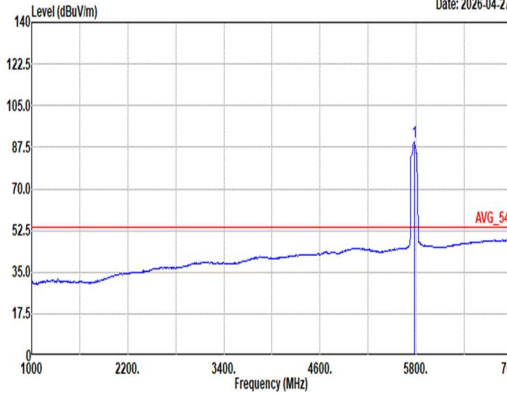

Mode	69																																																																																																																																				
	Band Edge - L																																																																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																																				
ANT	6+7																																																																																																																																				
Pol.	Horizontal						Fundamental																																																																																																																														
Peak	Level (dBuV/m) Date: 2026-04-27 PEAK_BE(B4)_16-24  Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5648.65</td><td>52.16</td><td>68.20</td><td>-16.04</td><td>41.63</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>313</td><td>9 Peak</td></tr><tr><td>2</td><td>5650.40</td><td>50.76</td><td>68.50</td><td>-17.74</td><td>40.23</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>313</td><td>9 Peak</td></tr><tr><td>3</td><td>5704.83</td><td>52.93</td><td>106.55</td><td>-53.62</td><td>42.07</td><td>33.72</td><td>10.73</td><td>33.59</td><td>0.00</td><td>313</td><td>9 Peak</td></tr><tr><td>4</td><td>5720.05</td><td>52.01</td><td>110.91</td><td>-58.90</td><td>41.09</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>313</td><td>9 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5648.65	52.16	68.20	-16.04	41.63	33.40	10.71	33.58	0.00	313	9 Peak	2	5650.40	50.76	68.50	-17.74	40.23	33.40	10.71	33.58	0.00	313	9 Peak	3	5704.83	52.93	106.55	-53.62	42.07	33.72	10.73	33.59	0.00	313	9 Peak	4	5720.05	52.01	110.91	-58.90	41.09	33.78	10.74	33.60	0.00	313	9 Peak	Level (dBuV/m) Date: 2026-04-27 PEAK(UNI)  Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5775.00</td><td>98.26</td><td>-----</td><td>-----</td><td>87.04</td><td>34.06</td><td>10.76</td><td>33.60</td><td>0.00</td><td>313</td><td>9 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	98.26	-----	-----	87.04	34.06	10.76	33.60	0.00	313	9 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5648.65	52.16	68.20	-16.04	41.63	33.40	10.71	33.58	0.00	313	9 Peak																																																																																																																										
2	5650.40	50.76	68.50	-17.74	40.23	33.40	10.71	33.58	0.00	313	9 Peak																																																																																																																										
3	5704.83	52.93	106.55	-53.62	42.07	33.72	10.73	33.59	0.00	313	9 Peak																																																																																																																										
4	5720.05	52.01	110.91	-58.90	41.09	33.78	10.74	33.60	0.00	313	9 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5775.00	98.26	-----	-----	87.04	34.06	10.76	33.60	0.00	313	9 Peak																																																																																																																										
Avg	Blank						Level (dBuV/m) Date: 2026-04-27 AVG_54  Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5775.00</td><td>89.80</td><td>-----</td><td>-----</td><td>78.58</td><td>34.06</td><td>10.76</td><td>33.60</td><td>0.00</td><td>313</td><td>9 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	89.80	-----	-----	78.58	34.06	10.76	33.60	0.00	313	9 Average																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5775.00	89.80	-----	-----	78.58	34.06	10.76	33.60	0.00	313	9 Average																																																																																																																										

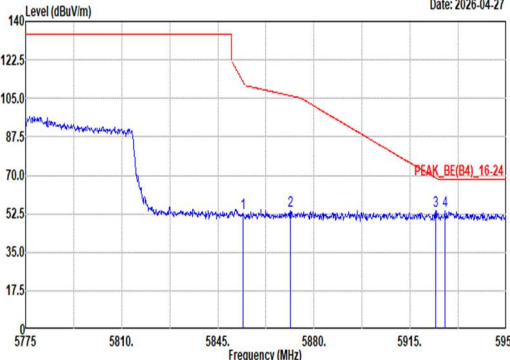

Mode	69																																																																																
	Band Edge - R																																																																																
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																
ANT	6+7																																																																																
Pol.	Horizontal	Fundamental																																																																															
Peak	Date: 2026-04-27  Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.10</td><td>52.94</td><td>112.85</td><td>-59.91</td><td>41.33</td><td>34.40</td><td>10.83</td><td>33.62</td><td>0.00</td><td>313</td><td>9 Peak</td></tr><tr><td>2</td><td>5871.43</td><td>53.66</td><td>106.20</td><td>-52.54</td><td>42.02</td><td>34.40</td><td>10.86</td><td>33.62</td><td>0.00</td><td>313</td><td>9 Peak</td></tr><tr><td>3</td><td>5924.28</td><td>53.81</td><td>68.73</td><td>-14.92</td><td>42.17</td><td>34.35</td><td>10.92</td><td>33.63</td><td>0.00</td><td>313</td><td>9 Peak</td></tr><tr><td>4</td><td>5927.60</td><td>53.72</td><td>68.20</td><td>-14.48</td><td>42.09</td><td>34.34</td><td>10.92</td><td>33.63</td><td>0.00</td><td>313</td><td>9 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.10	52.94	112.85	-59.91	41.33	34.40	10.83	33.62	0.00	313	9 Peak	2	5871.43	53.66	106.20	-52.54	42.02	34.40	10.86	33.62	0.00	313	9 Peak	3	5924.28	53.81	68.73	-14.92	42.17	34.35	10.92	33.63	0.00	313	9 Peak	4	5927.60	53.72	68.20	-14.48	42.09	34.34	10.92	33.63	0.00	313	9 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5854.10	52.94	112.85	-59.91	41.33	34.40	10.83	33.62	0.00	313	9 Peak																																																																						
2	5871.43	53.66	106.20	-52.54	42.02	34.40	10.86	33.62	0.00	313	9 Peak																																																																						
3	5924.28	53.81	68.73	-14.92	42.17	34.35	10.92	33.63	0.00	313	9 Peak																																																																						
4	5927.60	53.72	68.20	-14.48	42.09	34.34	10.92	33.63	0.00	313	9 Peak																																																																						



Mode	69											
	Band Edge - L											
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz											
ANT	6+7											
Pol.	Vertical						Fundamental					
Peak	</											

Mode

69

Band Edge - R

U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz

ANT

6+7


Pol.

Vertical

Fundamental

Peak

Date: 2026-04-27

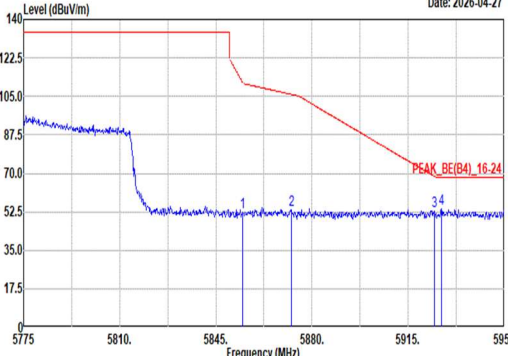

Site : 03CH12-HY
Condition: PEAK_BE(B4)_16-24 3m 91200-92114-250702 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto





	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg
1	5854.80	52.44	111.26	-58.82	40.82	34.40	10.84	33.62	0.00	300	248	Peak	
2	5872.48	53.57	105.91	-52.34	41.93	34.40	10.86	33.62	0.00	300	248	Peak	
3	5924.63	52.65	68.48	-15.83	41.01	34.35	10.92	33.63	0.00	300	248	Peak	
4	5927.08	53.68	68.20	-14.52	42.04	34.35	10.92	33.63	0.00	300	248	Peak	

Blank



Mode	69																																																																																																					
	Harmonic																																																																																																					
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																					
ANT	6+7																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	Level (dBuV/m) Date: 2026-05-04 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11550.00</td><td>47.46</td><td>74.00</td><td>-26.54</td><td>45.78</td><td>39.00</td><td>16.86</td><td>54.78</td><td>0.60</td><td>-- -- Peak</td></tr><tr><td>2 17325.00</td><td>48.62</td><td>68.20</td><td>-19.58</td><td>46.06</td><td>38.45</td><td>20.58</td><td>56.84</td><td>0.37</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11550.00	47.46	74.00	-26.54	45.78	39.00	16.86	54.78	0.60	-- -- Peak	2 17325.00	48.62	68.20	-19.58	46.06	38.45	20.58	56.84	0.37	-- -- Peak	Level (dBuV/m) Date: 2026-05-04 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11550.00</td><td>47.69</td><td>74.00</td><td>-26.31</td><td>46.01</td><td>39.00</td><td>16.86</td><td>54.78</td><td>0.60</td><td>-- -- Peak</td></tr><tr><td>2 17325.00</td><td>48.34</td><td>68.20</td><td>-19.86</td><td>45.78</td><td>38.45</td><td>20.58</td><td>56.84</td><td>0.37</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11550.00	47.69	74.00	-26.31	46.01	39.00	16.86	54.78	0.60	-- -- Peak	2 17325.00	48.34	68.20	-19.86	45.78	38.45	20.58	56.84	0.37	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																													
1 11550.00	47.46	74.00	-26.54	45.78	39.00	16.86	54.78	0.60	-- -- Peak																																																																																													
2 17325.00	48.62	68.20	-19.58	46.06	38.45	20.58	56.84	0.37	-- -- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																													
1 11550.00	47.69	74.00	-26.31	46.01	39.00	16.86	54.78	0.60	-- -- Peak																																																																																													
2 17325.00	48.34	68.20	-19.86	45.78	38.45	20.58	56.84	0.37	-- -- Peak																																																																																													

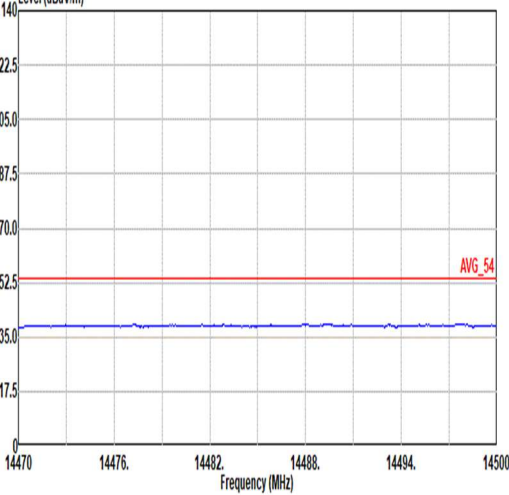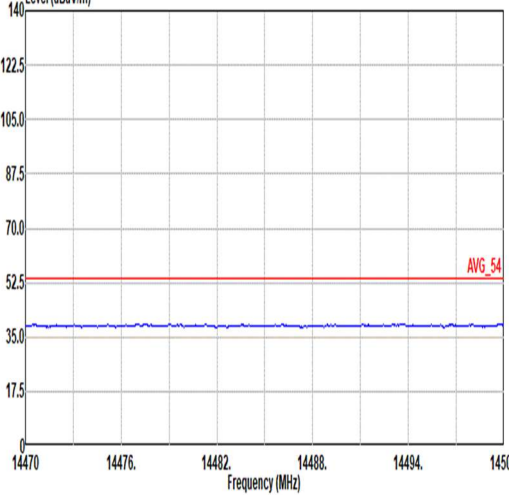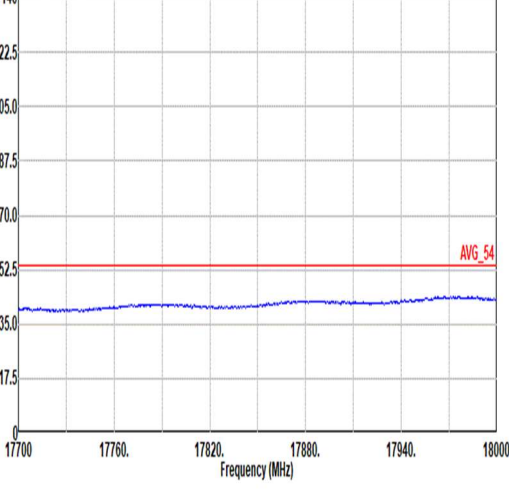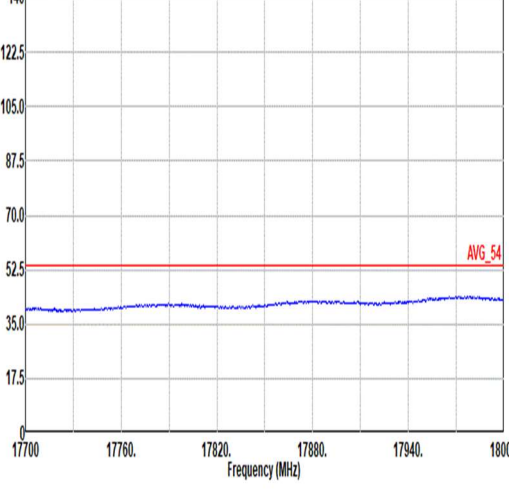

Mode	69	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-05-04  Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 HORIZONTAL	Level (dBuV/m) Date: 2026-05-04  Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 VERTICAL
	Level (dBuV/m) Date: 2026-05-04  Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 HORIZONTAL	Level (dBuV/m) Date: 2026-05-04  Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 VERTICAL



Mode	70																																																																																																																																					
	Band Edge																																																																																																																																					
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz																																																																																																																																					
ANT	6+7																																																																																																																																					
Pol.	Horizontal						Fundamental																																																																																																																															
Peak	Level (dBuV/m) Date: 2026-05-01 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>52.95</td><td>110.80</td><td>-57.85</td><td>41.33</td><td>34.40</td><td>10.84</td><td>33.62</td><td>0.00</td><td>222</td><td>3 Peak</td></tr><tr><td>2</td><td>5871.88</td><td>52.58</td><td>106.07</td><td>-53.49</td><td>40.94</td><td>34.40</td><td>10.86</td><td>33.62</td><td>0.00</td><td>222</td><td>3 Peak</td></tr><tr><td>3</td><td>5922.13</td><td>53.84</td><td>70.32</td><td>-16.48</td><td>42.19</td><td>34.36</td><td>10.92</td><td>33.63</td><td>0.00</td><td>222</td><td>3 Peak</td></tr><tr><td>4</td><td>5932.25</td><td>52.83</td><td>68.20</td><td>-15.37</td><td>41.19</td><td>34.34</td><td>10.93</td><td>33.63</td><td>0.00</td><td>222</td><td>3 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	52.95	110.80	-57.85	41.33	34.40	10.84	33.62	0.00	222	3 Peak	2	5871.88	52.58	106.07	-53.49	40.94	34.40	10.86	33.62	0.00	222	3 Peak	3	5922.13	53.84	70.32	-16.48	42.19	34.36	10.92	33.63	0.00	222	3 Peak	4	5932.25	52.83	68.20	-15.37	41.19	34.34	10.93	33.63	0.00	222	3 Peak	Level (dBuV/m) Date: 2026-05-01 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>106.64</td><td>-----</td><td>-----</td><td>95.12</td><td>34.32</td><td>10.81</td><td>33.61</td><td>0.00</td><td>222</td><td>3 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	106.64	-----	-----	95.12	34.32	10.81	33.61	0.00	222	3 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	5855.00	52.95	110.80	-57.85	41.33	34.40	10.84	33.62	0.00	222	3 Peak																																																																																																																											
2	5871.88	52.58	106.07	-53.49	40.94	34.40	10.86	33.62	0.00	222	3 Peak																																																																																																																											
3	5922.13	53.84	70.32	-16.48	42.19	34.36	10.92	33.63	0.00	222	3 Peak																																																																																																																											
4	5932.25	52.83	68.20	-15.37	41.19	34.34	10.93	33.63	0.00	222	3 Peak																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	5825.00	106.64	-----	-----	95.12	34.32	10.81	33.61	0.00	222	3 Peak																																																																																																																											
Avg	Blank						Level (dBuV/m) Date: 2026-05-01 Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>99.98</td><td>-----</td><td>-----</td><td>88.46</td><td>34.32</td><td>10.81</td><td>33.61</td><td>0.00</td><td>222</td><td>3 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	99.98	-----	-----	88.46	34.32	10.81	33.61	0.00	222	3 Average																																																																															
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	5825.00	99.98	-----	-----	88.46	34.32	10.81	33.61	0.00	222	3 Average																																																																																																																											







Mode	70																																																																																																																																										
	Band Edge																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz																																																																																																																																										
ANT	6+7																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	Level (dBuV/m) Date: 2026-05-01 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>50.67</td><td>110.80</td><td>-60.13</td><td>39.05</td><td>34.40</td><td>10.84</td><td>33.62</td><td>0.00</td><td>103</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>5873.75</td><td>52.14</td><td>105.55</td><td>-53.41</td><td>40.50</td><td>34.40</td><td>10.86</td><td>33.62</td><td>0.00</td><td>103</td><td>360</td><td>Peak</td></tr><tr><td>3</td><td>5924.75</td><td>51.82</td><td>68.38</td><td>-16.56</td><td>40.18</td><td>34.35</td><td>10.92</td><td>33.63</td><td>0.00</td><td>103</td><td>360</td><td>Peak</td></tr><tr><td>4</td><td>5942.50</td><td>54.21</td><td>68.20</td><td>-13.99</td><td>42.59</td><td>34.31</td><td>10.94</td><td>33.63</td><td>0.00</td><td>103</td><td>360</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	50.67	110.80	-60.13	39.05	34.40	10.84	33.62	0.00	103	360	Peak	2	5873.75	52.14	105.55	-53.41	40.50	34.40	10.86	33.62	0.00	103	360	Peak	3	5924.75	51.82	68.38	-16.56	40.18	34.35	10.92	33.63	0.00	103	360	Peak	4	5942.50	54.21	68.20	-13.99	42.59	34.31	10.94	33.63	0.00	103	360	Peak	Level (dBuV/m) Date: 2026-05-01 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>101.13</td><td>-----</td><td>-----</td><td>89.61</td><td>34.32</td><td>10.81</td><td>33.61</td><td>0.00</td><td>103</td><td>360</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	101.13	-----	-----	89.61	34.32	10.81	33.61	0.00	103	360	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5855.00	50.67	110.80	-60.13	39.05	34.40	10.84	33.62	0.00	103	360	Peak																																																																																																																															
2	5873.75	52.14	105.55	-53.41	40.50	34.40	10.86	33.62	0.00	103	360	Peak																																																																																																																															
3	5924.75	51.82	68.38	-16.56	40.18	34.35	10.92	33.63	0.00	103	360	Peak																																																																																																																															
4	5942.50	54.21	68.20	-13.99	42.59	34.31	10.94	33.63	0.00	103	360	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5825.00	101.13	-----	-----	89.61	34.32	10.81	33.61	0.00	103	360	Peak																																																																																																																															
Avg	Blank						Level (dBuV/m) Date: 2026-05-01 Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>94.65</td><td>-----</td><td>-----</td><td>83.13</td><td>34.32</td><td>10.81</td><td>33.61</td><td>0.00</td><td>103</td><td>360</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	94.65	-----	-----	83.13	34.32	10.81	33.61	0.00	103	360	Average																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5825.00	94.65	-----	-----	83.13	34.32	10.81	33.61	0.00	103	360	Average																																																																																																																															



Mode	70																																																																																											
	Harmonic																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz																																																																																											
ANT	6+7																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	Level (dBuV/m) Date: 2026-05-08 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91280-02114-250702 HORIZONTAL <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>11650.00</td><td>46.96</td><td>74.00</td><td>-27.04</td><td>45.55</td><td>38.60</td><td>16.93</td><td>54.72 0.60 -- -- Peak</td></tr><tr><td>2</td><td>17475.00</td><td>48.80</td><td>68.20</td><td>-19.40</td><td>46.02</td><td>38.70</td><td>20.70</td><td>57.00 0.38 -- -- Peak</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	11650.00	46.96	74.00	-27.04	45.55	38.60	16.93	54.72 0.60 -- -- Peak	2	17475.00	48.80	68.20	-19.40	46.02	38.70	20.70	57.00 0.38 -- -- Peak	Level (dBuV/m) Date: 2026-05-08 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91280-02114-250702 VERTICAL <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>11650.00</td><td>47.36</td><td>74.00</td><td>-26.64</td><td>45.95</td><td>38.60</td><td>16.93</td><td>54.72 0.60 -- -- Peak</td></tr><tr><td>2</td><td>17475.00</td><td>48.33</td><td>68.20</td><td>-19.87</td><td>45.55</td><td>38.70</td><td>20.70</td><td>57.00 0.38 -- -- Peak</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	11650.00	47.36	74.00	-26.64	45.95	38.60	16.93	54.72 0.60 -- -- Peak	2	17475.00	48.33	68.20	-19.87	45.55	38.70	20.70	57.00 0.38 -- -- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																				
1	11650.00	46.96	74.00	-27.04	45.55	38.60	16.93	54.72 0.60 -- -- Peak																																																																																				
2	17475.00	48.80	68.20	-19.40	46.02	38.70	20.70	57.00 0.38 -- -- Peak																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																				
1	11650.00	47.36	74.00	-26.64	45.95	38.60	16.93	54.72 0.60 -- -- Peak																																																																																				
2	17475.00	48.33	68.20	-19.87	45.55	38.70	20.70	57.00 0.38 -- -- Peak																																																																																				

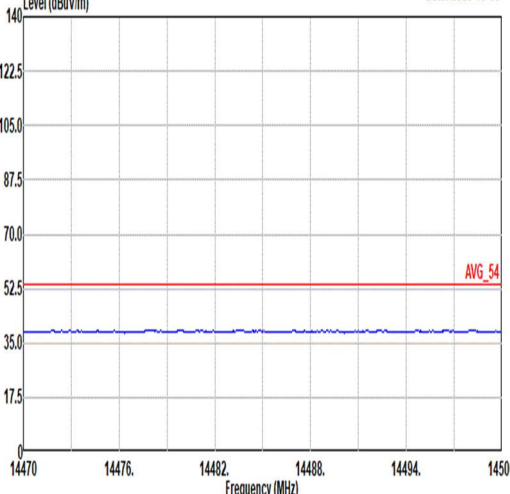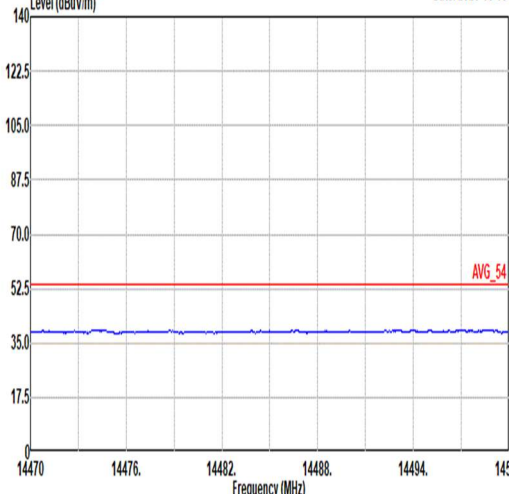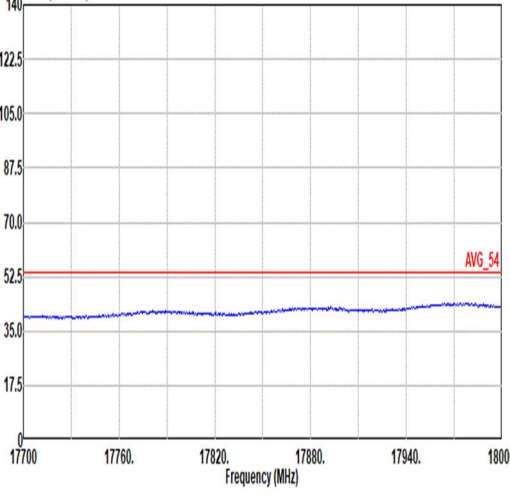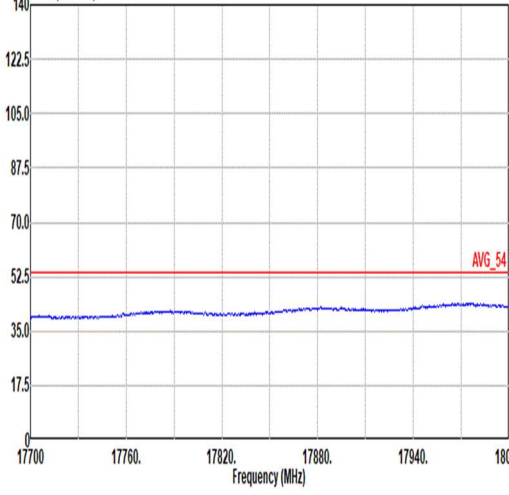

Mode	70	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-05-08  Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 HORIZONTAL	Level (dBuV/m) Date: 2026-05-08  Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 VERTICAL
	Level (dBuV/m) Date: 2026-05-08  Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 HORIZONTAL	Level (dBuV/m) Date: 2026-05-08  Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-250702 VERTICAL



Mode	71																																																																																																																																				
	Band Edge - L																																																																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz																																																																																																																																				
ANT	6+7																																																																																																																																				
Pol.	Horizontal						Fundamental																																																																																																																														
Peak	Level (dBuV/m) Date: 2026-05-04 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5619.78</td><td>51.68</td><td>68.20</td><td>-16.52</td><td>41.22</td><td>33.34</td><td>10.70</td><td>33.58</td><td>0.00</td><td>382</td><td>0 Peak</td></tr><tr><td>2</td><td>5651.10</td><td>52.30</td><td>69.02</td><td>-16.72</td><td>41.76</td><td>33.41</td><td>10.71</td><td>33.58</td><td>0.00</td><td>382</td><td>0 Peak</td></tr><tr><td>3</td><td>5702.38</td><td>51.90</td><td>105.87</td><td>-53.97</td><td>41.05</td><td>33.71</td><td>10.73</td><td>33.59</td><td>0.00</td><td>382</td><td>0 Peak</td></tr><tr><td>4</td><td>5720.05</td><td>50.70</td><td>110.91</td><td>-60.21</td><td>39.78</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>382</td><td>0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5619.78	51.68	68.20	-16.52	41.22	33.34	10.70	33.58	0.00	382	0 Peak	2	5651.10	52.30	69.02	-16.72	41.76	33.41	10.71	33.58	0.00	382	0 Peak	3	5702.38	51.90	105.87	-53.97	41.05	33.71	10.73	33.59	0.00	382	0 Peak	4	5720.05	50.70	110.91	-60.21	39.78	33.78	10.74	33.60	0.00	382	0 Peak	Level (dBuV/m) Date: 2026-05-04 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>102.79</td><td>-----</td><td>-----</td><td>91.46</td><td>34.17</td><td>10.77</td><td>33.61</td><td>0.00</td><td>382</td><td>0 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	102.79	-----	-----	91.46	34.17	10.77	33.61	0.00	382	0 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5619.78	51.68	68.20	-16.52	41.22	33.34	10.70	33.58	0.00	382	0 Peak																																																																																																																										
2	5651.10	52.30	69.02	-16.72	41.76	33.41	10.71	33.58	0.00	382	0 Peak																																																																																																																										
3	5702.38	51.90	105.87	-53.97	41.05	33.71	10.73	33.59	0.00	382	0 Peak																																																																																																																										
4	5720.05	50.70	110.91	-60.21	39.78	33.78	10.74	33.60	0.00	382	0 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	102.79	-----	-----	91.46	34.17	10.77	33.61	0.00	382	0 Peak																																																																																																																										
Avg	Blank						Level (dBuV/m) Date: 2026-05-04 Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>95.88</td><td>-----</td><td>-----</td><td>84.55</td><td>34.17</td><td>10.77</td><td>33.61</td><td>0.00</td><td>382</td><td>0 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	95.88	-----	-----	84.55	34.17	10.77	33.61	0.00	382	0 Average																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	95.88	-----	-----	84.55	34.17	10.77	33.61	0.00	382	0 Average																																																																																																																										

71

Mode

Band Edge - R

U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz

ANT

6+7

Pol.


Horizontal

Fundamental

Peak

Level (dBuV/m)

Date: 2026-05-04

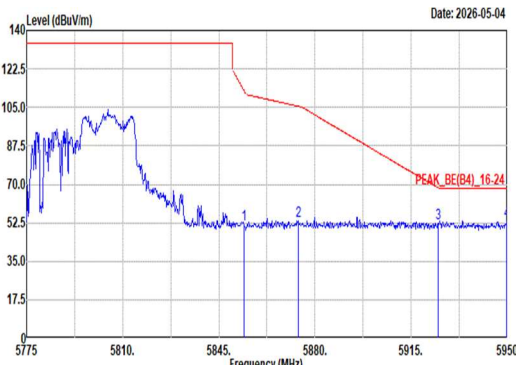

Frequency (MHz)

PEAK_BE(B4)_16-24

Site : 03CH12-HY
Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto


	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	5854.28	51.76	112.45	-60.69	40.14	34.40	10.84	33.62	0.00	382	0 Peak
2	5873.88	53.38	105.51	-52.13	41.74	34.40	10.86	33.62	0.00	382	0 Peak
3	5924.00	52.06	68.35	-16.29	40.42	34.35	10.92	33.63	0.00	382	0 Peak
4	5949.83	53.43	68.20	-14.77	41.81	34.30	10.95	33.63	0.00	382	0 Peak

Blank



Mode	71																																																																																																																																				
	Band Edge - L																																																																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz																																																																																																																																				
ANT	6+7																																																																																																																																				
Pol.	Vertical						Fundamental																																																																																																																														
Peak	Level (dBuV/m) Date: 2026-05-04 Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5633.95</td><td>51.86</td><td>68.20</td><td>-16.34</td><td>41.37</td><td>33.37</td><td>10.70</td><td>33.58</td><td>0.00</td><td>291</td><td>0 Peak</td></tr><tr><td>2</td><td>5650.75</td><td>50.78</td><td>68.76</td><td>-17.98</td><td>40.25</td><td>33.40</td><td>10.71</td><td>33.58</td><td>0.00</td><td>291</td><td>0 Peak</td></tr><tr><td>3</td><td>5701.15</td><td>50.50</td><td>105.52</td><td>-55.02</td><td>39.66</td><td>33.70</td><td>10.73</td><td>33.59</td><td>0.00</td><td>291</td><td>0 Peak</td></tr><tr><td>4</td><td>5720.05</td><td>49.87</td><td>110.91</td><td>-61.04</td><td>38.95</td><td>33.78</td><td>10.74</td><td>33.60</td><td>0.00</td><td>291</td><td>0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5633.95	51.86	68.20	-16.34	41.37	33.37	10.70	33.58	0.00	291	0 Peak	2	5650.75	50.78	68.76	-17.98	40.25	33.40	10.71	33.58	0.00	291	0 Peak	3	5701.15	50.50	105.52	-55.02	39.66	33.70	10.73	33.59	0.00	291	0 Peak	4	5720.05	49.87	110.91	-61.04	38.95	33.78	10.74	33.60	0.00	291	0 Peak	Level (dBuV/m) Date: 2026-05-04 Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>89.65</td><td>-----</td><td>-----</td><td>78.32</td><td>34.17</td><td>10.77</td><td>33.61</td><td>0.00</td><td>291</td><td>0 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	89.65	-----	-----	78.32	34.17	10.77	33.61	0.00	291	0 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5633.95	51.86	68.20	-16.34	41.37	33.37	10.70	33.58	0.00	291	0 Peak																																																																																																																										
2	5650.75	50.78	68.76	-17.98	40.25	33.40	10.71	33.58	0.00	291	0 Peak																																																																																																																										
3	5701.15	50.50	105.52	-55.02	39.66	33.70	10.73	33.59	0.00	291	0 Peak																																																																																																																										
4	5720.05	49.87	110.91	-61.04	38.95	33.78	10.74	33.60	0.00	291	0 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	89.65	-----	-----	78.32	34.17	10.77	33.61	0.00	291	0 Peak																																																																																																																										
Avg	Blank						Level (dBuV/m) Date: 2026-05-04 Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>81.16</td><td>-----</td><td>-----</td><td>69.83</td><td>34.17</td><td>10.77</td><td>33.61</td><td>0.00</td><td>291</td><td>0 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	81.16	-----	-----	69.83	34.17	10.77	33.61	0.00	291	0 Average																																																																															
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	81.16	-----	-----	69.83	34.17	10.77	33.61	0.00	291	0 Average																																																																																																																										

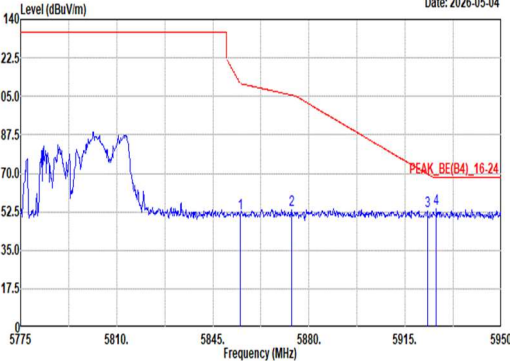

	71																																																																																									
Mode	Band Edge - R																																																																																									
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz																																																																																									
ANT	6+7																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Date: 2026-05-04  Site : 03CH12-HY Condition: PEAK_BE(B4)_16-24 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.98</td><td>51.92</td><td>110.86</td><td>-58.94</td><td>40.30</td><td>34.40</td><td>10.84</td><td>33.62</td><td>0.00</td><td>291</td><td>0 Peak</td></tr><tr><td>2</td><td>5873.70</td><td>53.37</td><td>105.56</td><td>-52.19</td><td>41.73</td><td>34.40</td><td>10.86</td><td>33.62</td><td>0.00</td><td>291</td><td>0 Peak</td></tr><tr><td>3</td><td>5923.05</td><td>53.04</td><td>69.64</td><td>-16.60</td><td>41.40</td><td>34.35</td><td>10.92</td><td>33.63</td><td>0.00</td><td>291</td><td>0 Peak</td></tr><tr><td>4</td><td>5926.38</td><td>53.64</td><td>68.20</td><td>-14.56</td><td>42.00</td><td>34.35</td><td>10.92</td><td>33.63</td><td>0.00</td><td>291</td><td>0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.98	51.92	110.86	-58.94	40.30	34.40	10.84	33.62	0.00	291	0 Peak	2	5873.70	53.37	105.56	-52.19	41.73	34.40	10.86	33.62	0.00	291	0 Peak	3	5923.05	53.04	69.64	-16.60	41.40	34.35	10.92	33.63	0.00	291	0 Peak	4	5926.38	53.64	68.20	-14.56	42.00	34.35	10.92	33.63	0.00	291	0 Peak	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5854.98	51.92	110.86	-58.94	40.30	34.40	10.84	33.62	0.00	291	0 Peak																																																																															
2	5873.70	53.37	105.56	-52.19	41.73	34.40	10.86	33.62	0.00	291	0 Peak																																																																															
3	5923.05	53.04	69.64	-16.60	41.40	34.35	10.92	33.63	0.00	291	0 Peak																																																																															
4	5926.38	53.64	68.20	-14.56	42.00	34.35	10.92	33.63	0.00	291	0 Peak																																																																															