






5GHz 802.11ax HE20 26 RU

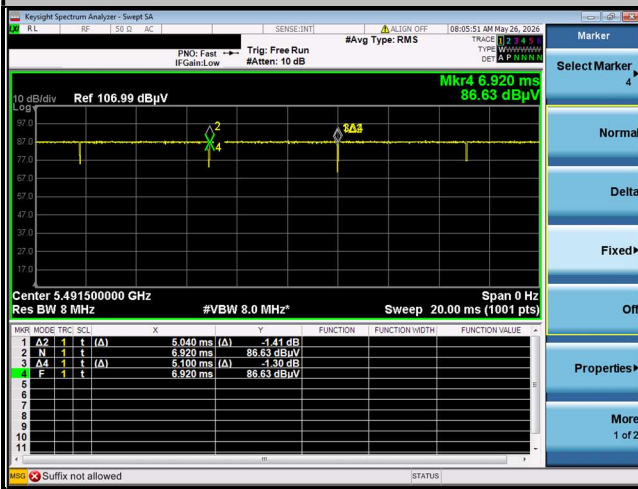


5GHz 802.11ax HE20 52 RU

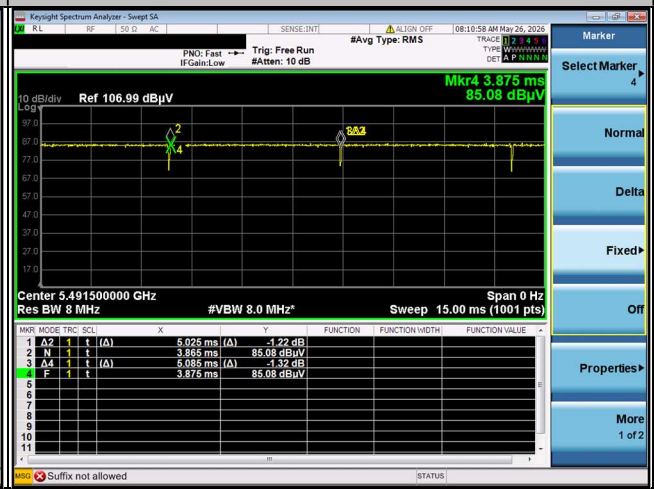


5GHz 802.11ax HE20 106 RU

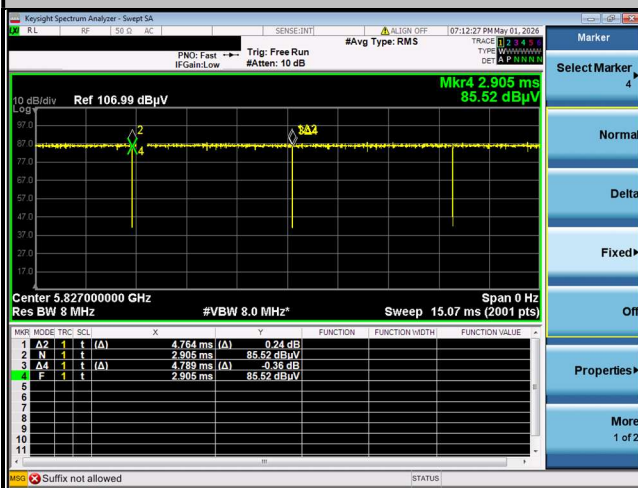


5GHz 802.11ax HE40 Full RU

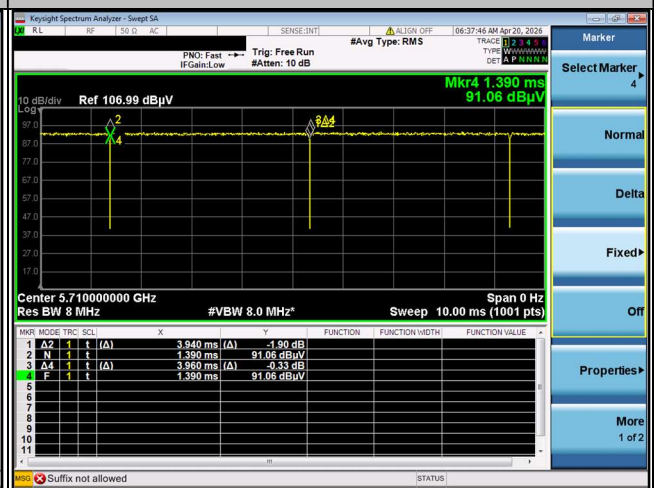

5GHz 802.11ax HE40 242 RU

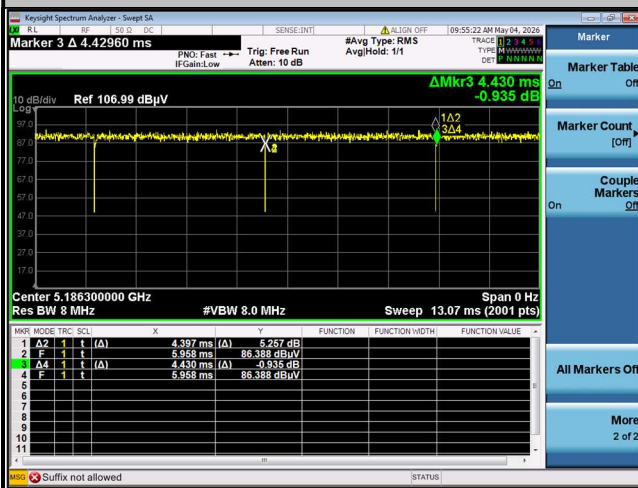


5GHz 802.11ax HE80 Full RU

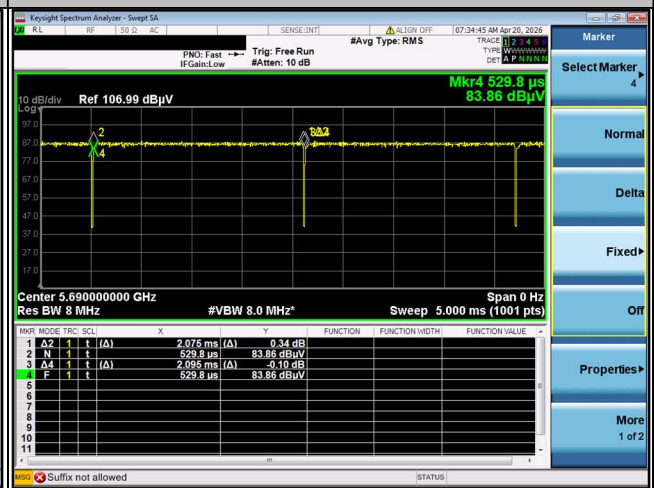





5GHz 802.11ax HE80 484 RU

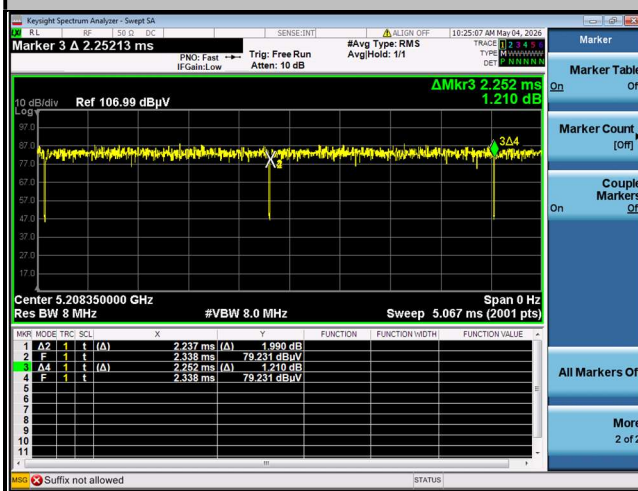

5GHz 802.11ax HE160 Full RU

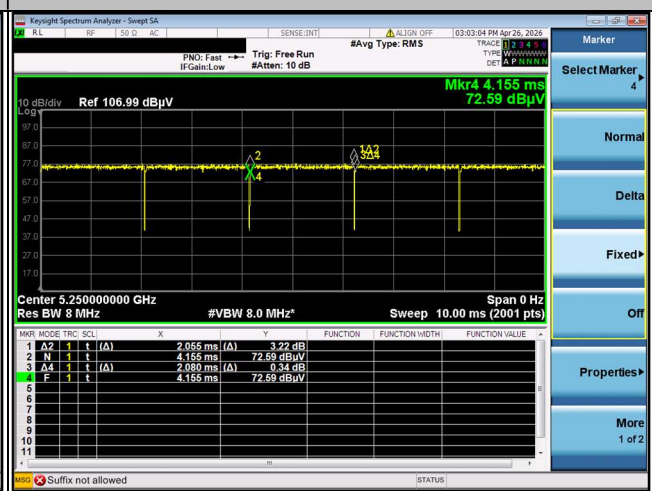

5GHz 802.11ax HE160 996 RU

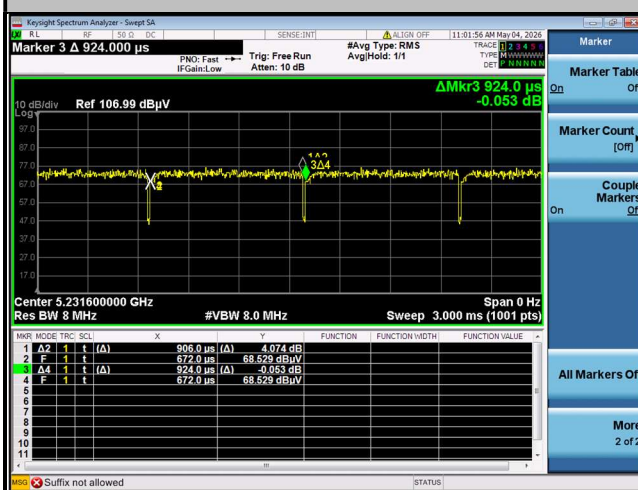



Appendix E. Spot Check Evaluation on PY7-52715J

Conducted power test configurations were selected from the worst cases identified in the reference model and tested to demonstrate the test data from reference model remains representative for the variant model.

The deviation between the spot check and the referenced values is within 1dB, therefore data referencing is justified according to the guidance in the TCB inquiry

Mode	Test Item	PY7-75158T Reference Worst mode Test Result	PY7-52715J Variant Check Test Result	Deviation	Limit (dB)
WLAN 5G B4	Average Output Power	11.91 dBm	11.99dBm	0.08	Deviation (ddB) < 1 dB