

Measurement Report for GSM 850, CHEEK, Normal, CELL Main1

Exposure Conditions

|                                  |                                   |                        |                |
|----------------------------------|-----------------------------------|------------------------|----------------|
| Band                             | GSM 850                           | TSL Permittivity       | 41.6           |
| Frequency [MHz]   Channel Number | 836.600   190                     | TSL Conductivity [S/m] | 0.906          |
| Group   UID                      | GSM   10028-DAC                   | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 9.15                              | Test Distance [mm]     | 0.00           |
| Communication Configuration      | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) |                        |                |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-19              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 94.7               |
| Dist 3dB Peak [mm]  |               | > 15.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.104     | 0.112     |
| psSAR10g [W/Kg]  | 0.073     | 0.090     |
| Power Drift [dB] | N/A       | 0.00      |

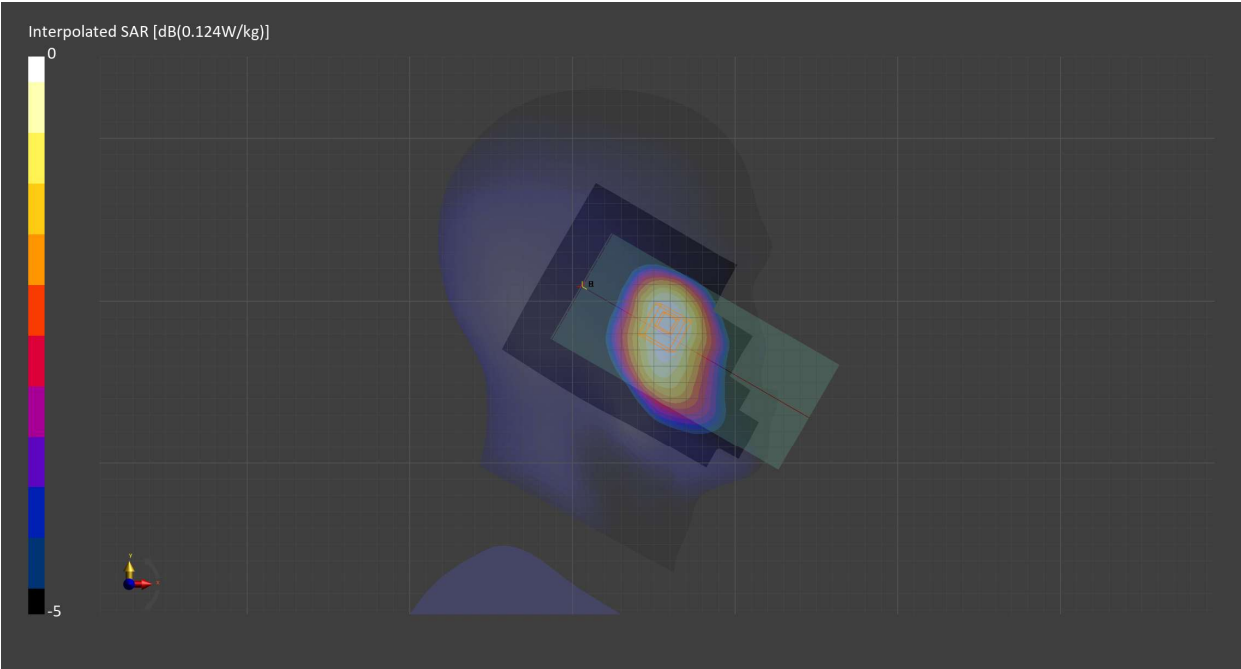

Measurement Report for GSM 850, BACK, Normal, CELL Main1

Exposure Conditions

|                                  |                                   |                        |            |
|----------------------------------|-----------------------------------|------------------------|------------|
| Band                             | GSM 850                           | TSL Permittivity       | 41.6       |
| Frequency [MHz]   Channel Number | 836.600   190                     | TSL Conductivity [S/m] | 0.906      |
| Group   UID                      | GSM   10028-DAC                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 9.15                              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-19              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 88.5               |
| Dist 3dB Peak [mm]  |               | 15.6               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.263     | 0.249     |
| psSAR10g [W/Kg]  | 0.170     | 0.155     |
| Power Drift [dB] | N/A       | -0.12     |

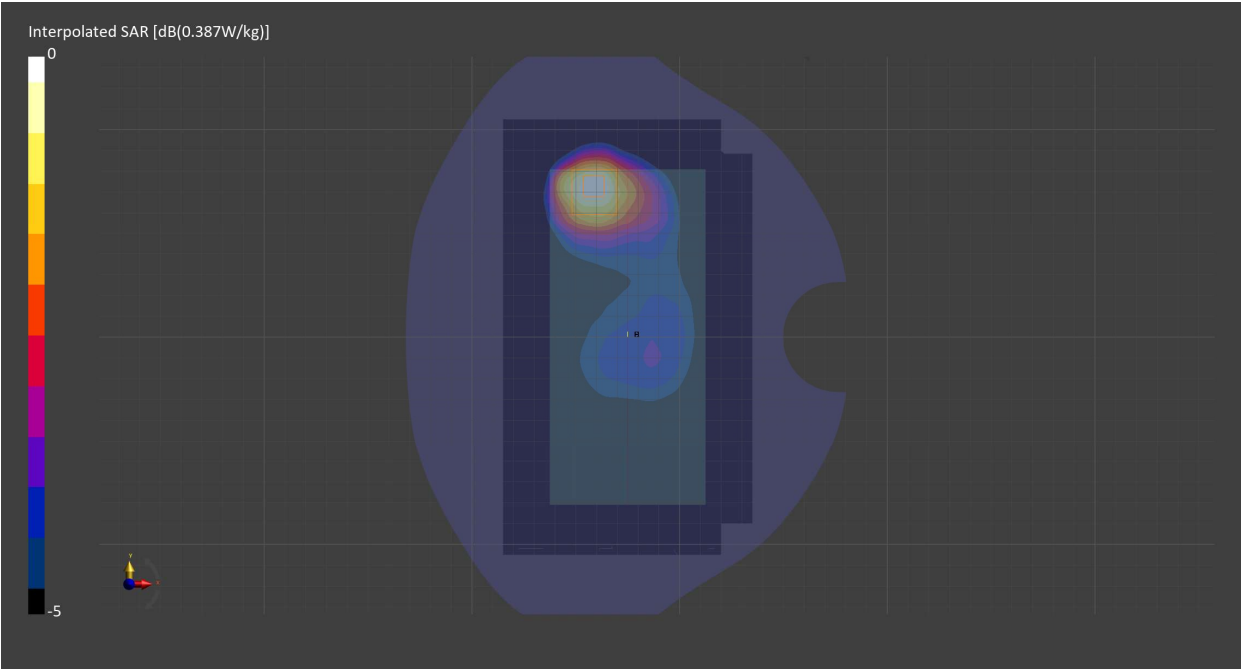

Measurement Report for GSM 850, BACK, Normal, CELL Main1

Exposure Conditions

|                                  |                               |                        |            |
|----------------------------------|-------------------------------|------------------------|------------|
| Band                             | GSM 850                       | TSL Permittivity       | 41.6       |
| Frequency [MHz]   Channel Number | 836.600   190                 | TSL Conductivity [S/m] | 0.906      |
| Group   UID                      | GSM   10024-DAC               | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 9.15                          | Test Distance [mm]     | 10.00      |
| Communication Configuration      | GPRS-FDD (TDMA, GMSK, TN 0-1) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-19              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 88.1               |
| Dist 3dB Peak [mm]  |               | 14.4               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.258     | 0.249     |
| psSAR10g [W/Kg]  | 0.168     | 0.154     |
| Power Drift [dB] | N/A       | -0.02     |

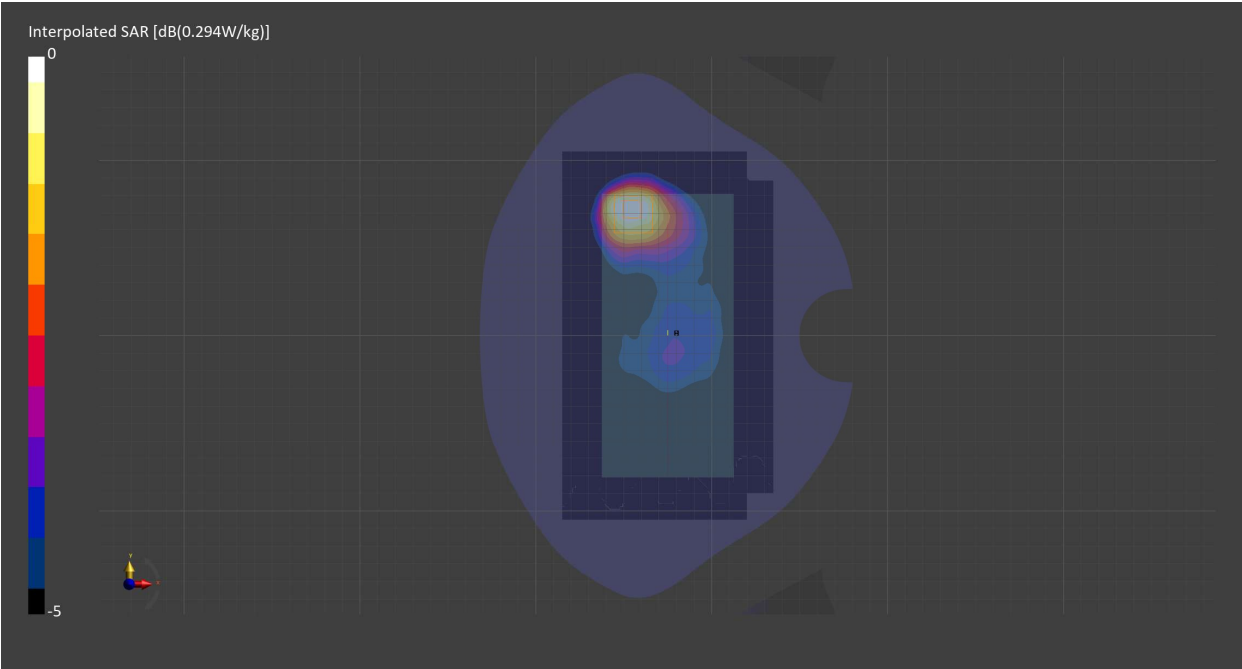

Measurement Report for PCS 1900, CHEEK, Normal, CELL Main2

Exposure Conditions

|                                  |                                   |                        |                 |
|----------------------------------|-----------------------------------|------------------------|-----------------|
| Band                             | PCS 1900                          | TSL Permittivity       | 39.6            |
| Frequency [MHz]   Channel Number | 1880.000   661                    | TSL Conductivity [S/m] | 1.43            |
| Group   UID                      | GSM   10028-DAC                   | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 8.08                              | Test Distance [mm]     | 0.00            |
| Communication Configuration      | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-19              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 96.6               |
| Dist 3dB Peak [mm]  |               | 12.0               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.016     | 0.016     |
| psSAR10g [W/Kg]  | 0.009     | 0.009     |
| Power Drift [dB] | N/A       | -0.11     |

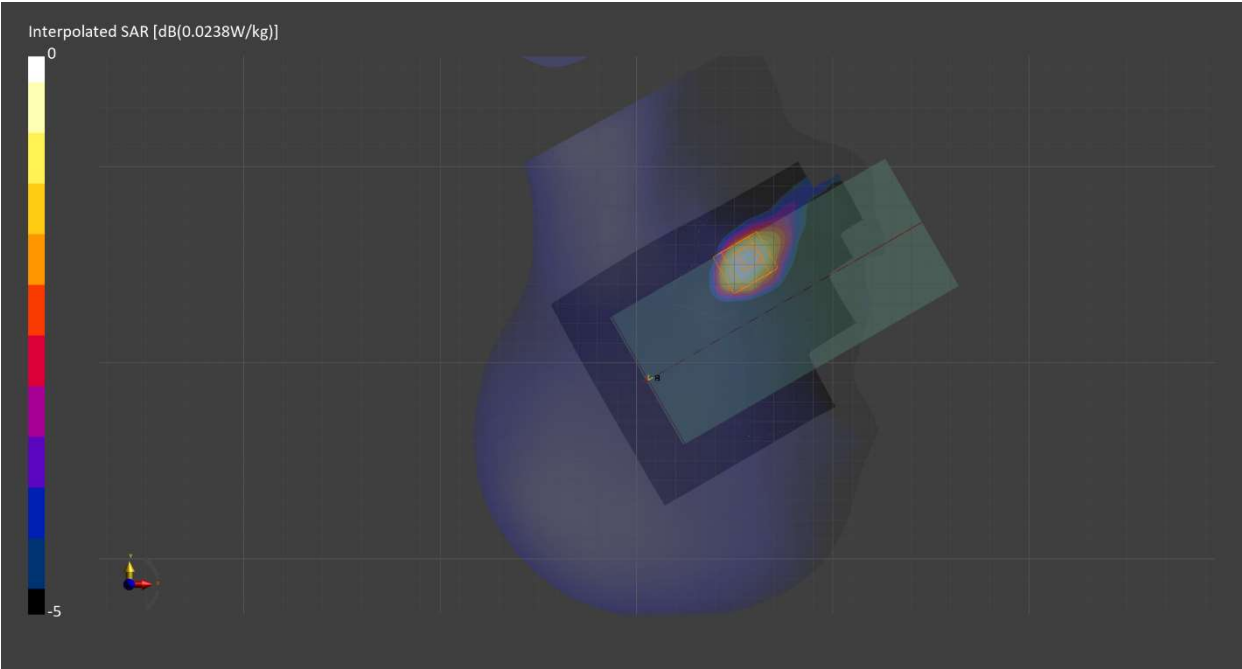

Measurement Report for PCS 1900, BACK, Normal, CELL Main2

Exposure Conditions

|                                  |                                   |                        |            |
|----------------------------------|-----------------------------------|------------------------|------------|
| Band                             | PCS 1900                          | TSL Permittivity       | 39.6       |
| Frequency [MHz]   Channel Number | 1880.000   661                    | TSL Conductivity [S/m] | 1.43       |
| Group   UID                      | GSM   10028-DAC                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.08                              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-19              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 83.3               |
| Dist 3dB Peak [mm]  |               | 9.6                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.141     | 0.161     |
| psSAR10g [W/Kg]  | 0.080     | 0.087     |
| Power Drift [dB] | N/A       | -0.05     |

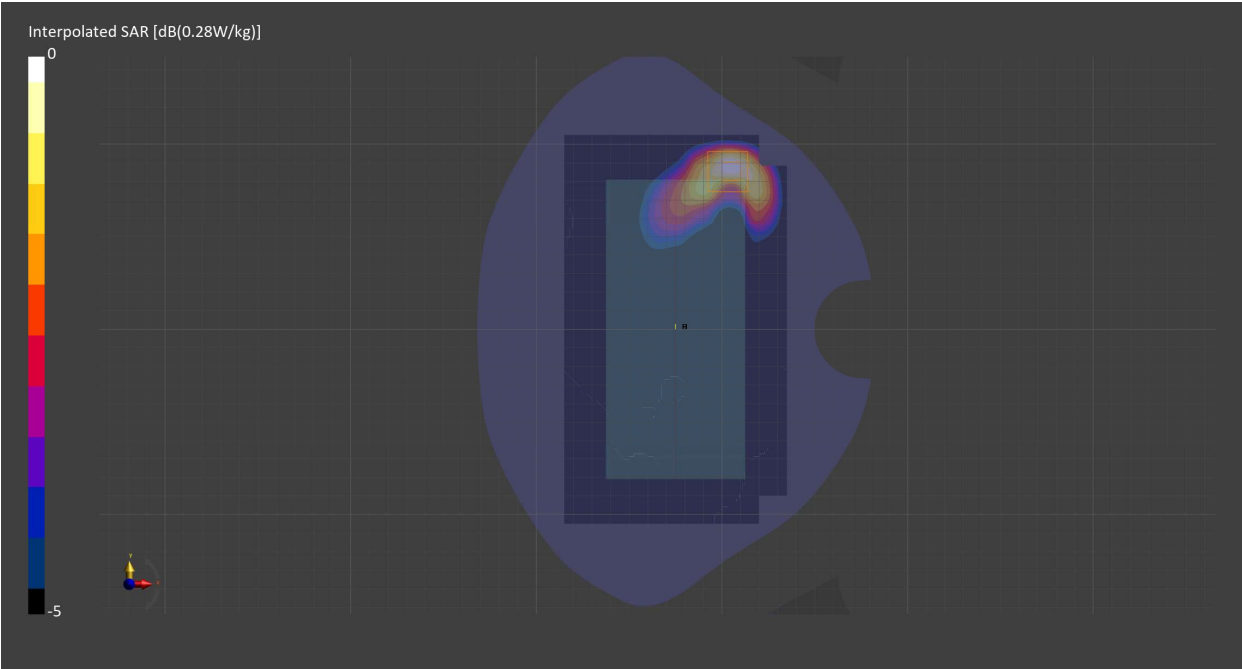

Measurement Report for PCS 1900, EDGE BOTTOM, Normal, CELL Main2

Exposure Conditions

|                                  |                                   |                        |            |
|----------------------------------|-----------------------------------|------------------------|------------|
| Band                             | PCS 1900                          | TSL Permittivity       | 39.6       |
| Frequency [MHz]   Channel Number | 1880.000   661                    | TSL Conductivity [S/m] | 1.43       |
| Group   UID                      | GSM   10028-DAC                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.08                              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-19              |

Scans Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 51.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.5 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | N/A          | Yes                |
| M2/M1 [%]           |              | 81.8               |
| Dist 3dB Peak [mm]  |              | 9.7                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.214     | 0.212     |
| psSAR10g [W/Kg]  | 0.115     | 0.116     |
| Power Drift [dB] | N/A       | -0.09     |

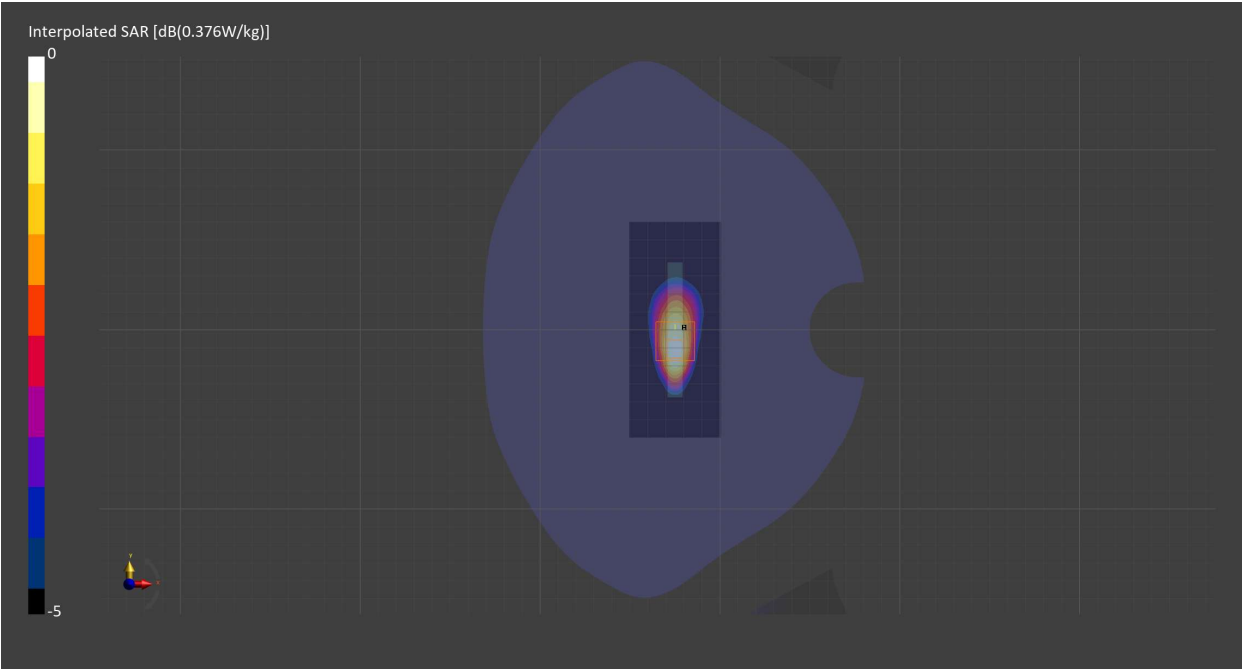

Measurement Report for PCS 1900, EDGE BOTTOM, Normal, CELL Main2

Exposure Conditions

|                                  |                               |                        |            |
|----------------------------------|-------------------------------|------------------------|------------|
| Band                             | PCS 1900                      | TSL Permittivity       | 39.6       |
| Frequency [MHz]   Channel Number | 1880.000   661                | TSL Conductivity [S/m] | 1.43       |
| Group   UID                      | GSM   10024-DAC               | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.08                          | Test Distance [mm]     | 10.00      |
| Communication Configuration      | GPRS-FDD (TDMA, GMSK, TN 0-1) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-19              |

Scans Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 51.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.5 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | N/A          | Yes                |
| M2/M1 [%]           |              | 85.3               |
| Dist 3dB Peak [mm]  |              | 9.6                |

Measurement Results

|                  | Area Scan | Zoom Scan    |
|------------------|-----------|--------------|
| psSAR1g [W/Kg]   | 0.188     | <b>0.195</b> |
| psSAR10g [W/Kg]  | 0.102     | <b>0.105</b> |
| Power Drift [dB] | N/A       | 0.02         |

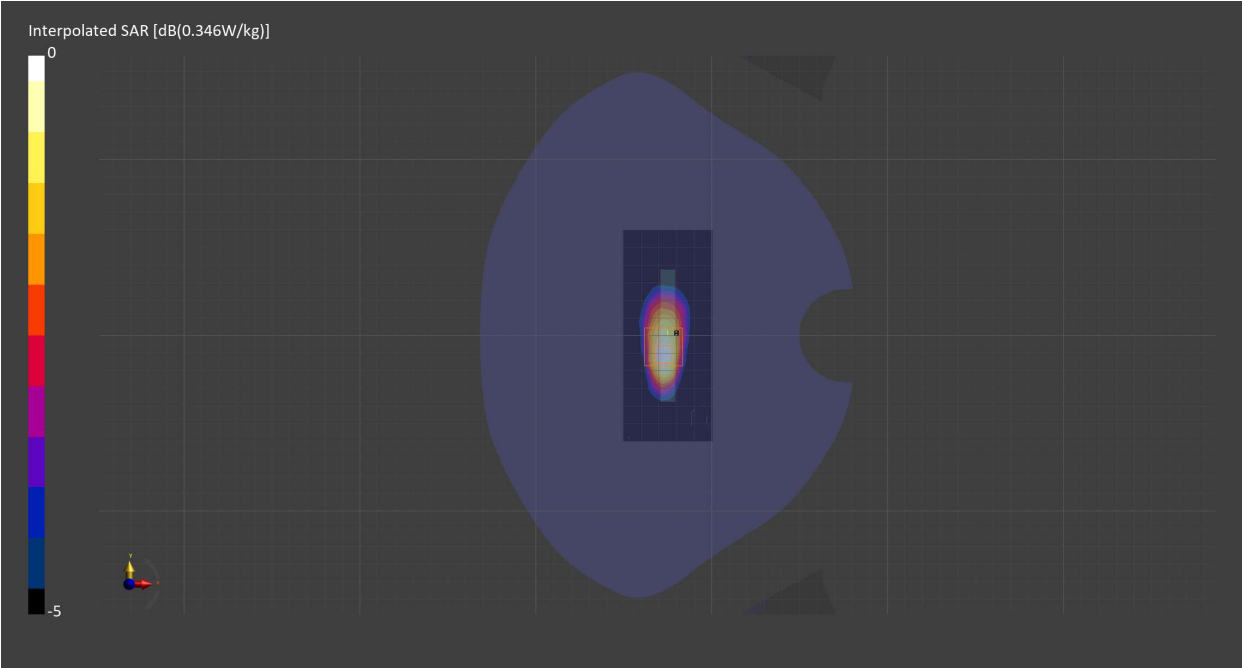

Measurement Report for Band 2, CHEEK, Normal, CELL Main2

Exposure Conditions

|                                  |                   |                        |                 |
|----------------------------------|-------------------|------------------------|-----------------|
| Band                             | Band 2            | TSL Permittivity       | 41.1            |
| Frequency [MHz]   Channel Number | 1852.400   9262   | TSL Conductivity [S/m] | 1.41            |
| Group   UID                      | WCDMA   10011-CAC | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 8.08              | Test Distance [mm]     | 0.00            |
| Communication Configuration      | UMTS-FDD (WCDMA)  |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HSL900   2024-Mar-26                      |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 90.8               |
| Dist 3dB Peak [mm]  |               | 13.4               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.049     | 0.052     |
| psSAR10g [W/Kg]  | 0.028     | 0.032     |
| Power Drift [dB] | -0.05     | 0.03      |

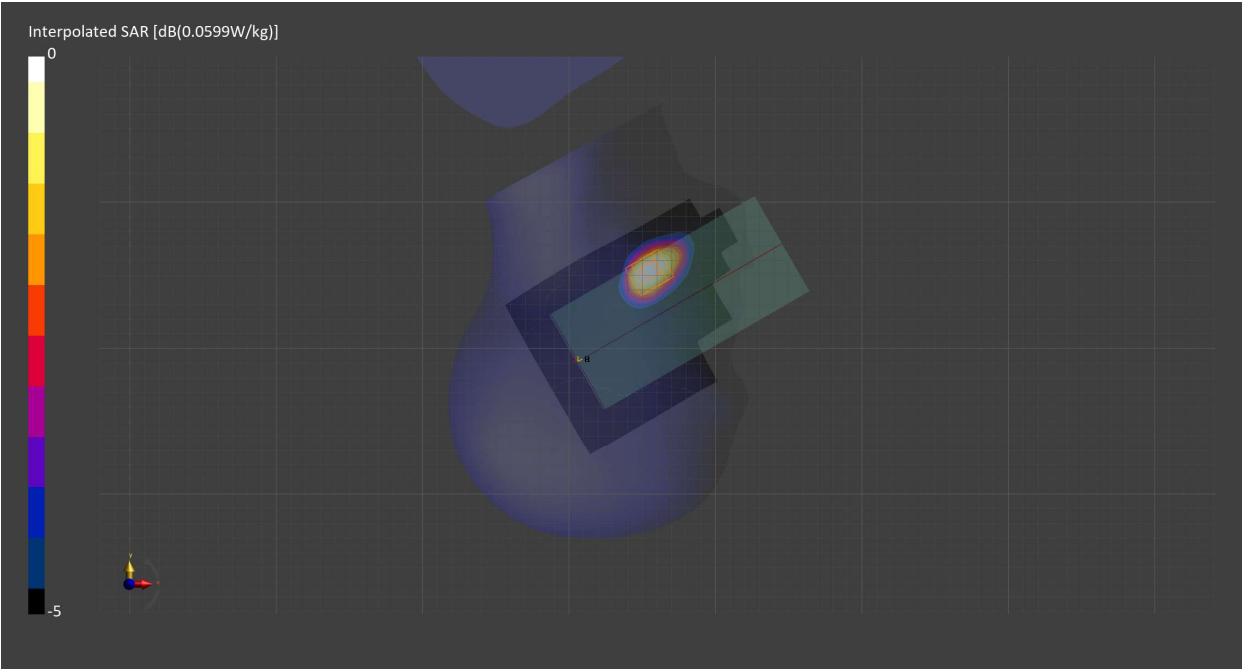

Measurement Report for Band 2, BACK, Normal, CELL Main2

Exposure Conditions

|                                  |                   |                        |            |
|----------------------------------|-------------------|------------------------|------------|
| Band                             | Band 2            | TSL Permittivity       | 41.1       |
| Frequency [MHz]   Channel Number | 1852.400   9262   | TSL Conductivity [S/m] | 1.41       |
| Group   UID                      | WCDMA   10011-CAC | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.08              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | UMTS-FDD (WCDMA)  |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HSL900   2024-Mar-26                      |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 84.1               |
| Dist 3dB Peak [mm]  |               | 10.9               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.190     | 0.215     |
| psSAR10g [W/Kg]  | 0.109     | 0.118     |
| Power Drift [dB] | -0.00     | 0.00      |

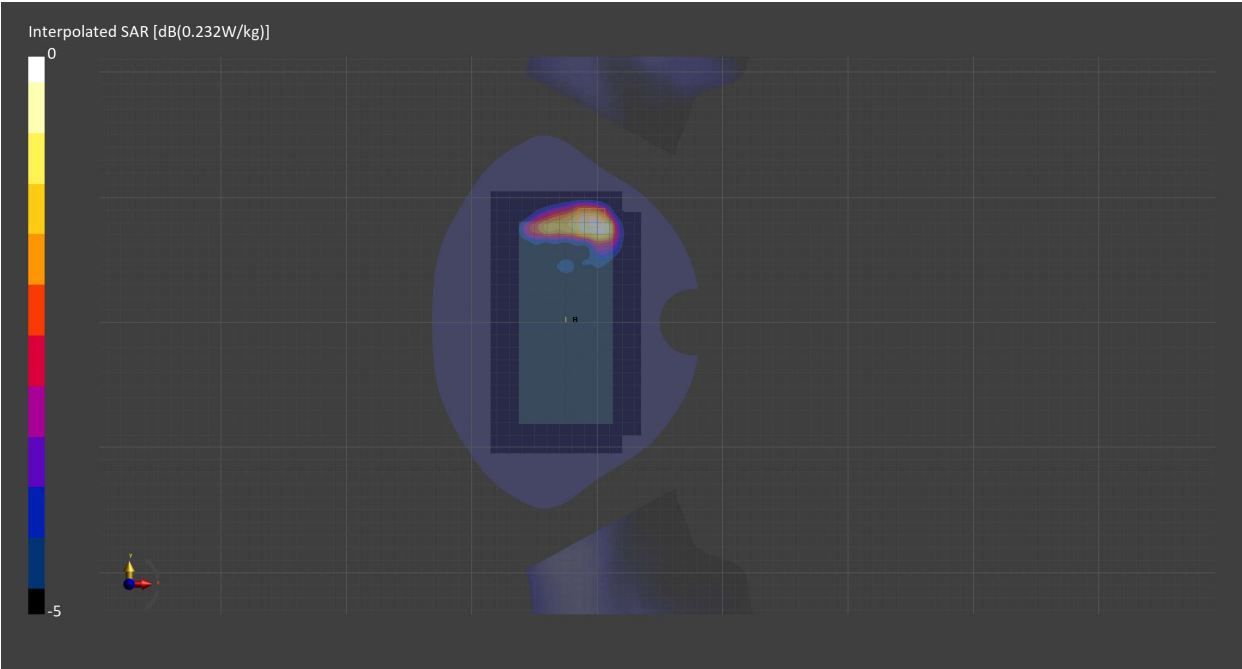

Measurement Report for Band 2, EDGE BOTTOM, Normal, CELL Main2

Exposure Conditions

|                                  |                   |                        |            |
|----------------------------------|-------------------|------------------------|------------|
| Band                             | Band 2            | TSL Permittivity       | 41.1       |
| Frequency [MHz]   Channel Number | 1852.400   9262   | TSL Conductivity [S/m] | 1.41       |
| Group   UID                      | WCDMA   10011-CAC | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.08              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | UMTS-FDD (WCDMA)  |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HSL900   2024-Mar-26                      |

Scans Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 51.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.5 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | N/A          | Yes                |
| M2/M1 [%]           |              | 83.5               |
| Dist 3dB Peak [mm]  |              | 10.8               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.213     | 0.222     |
| psSAR10g [W/Kg]  | 0.115     | 0.121     |
| Power Drift [dB] | 0.01      | 0.00      |

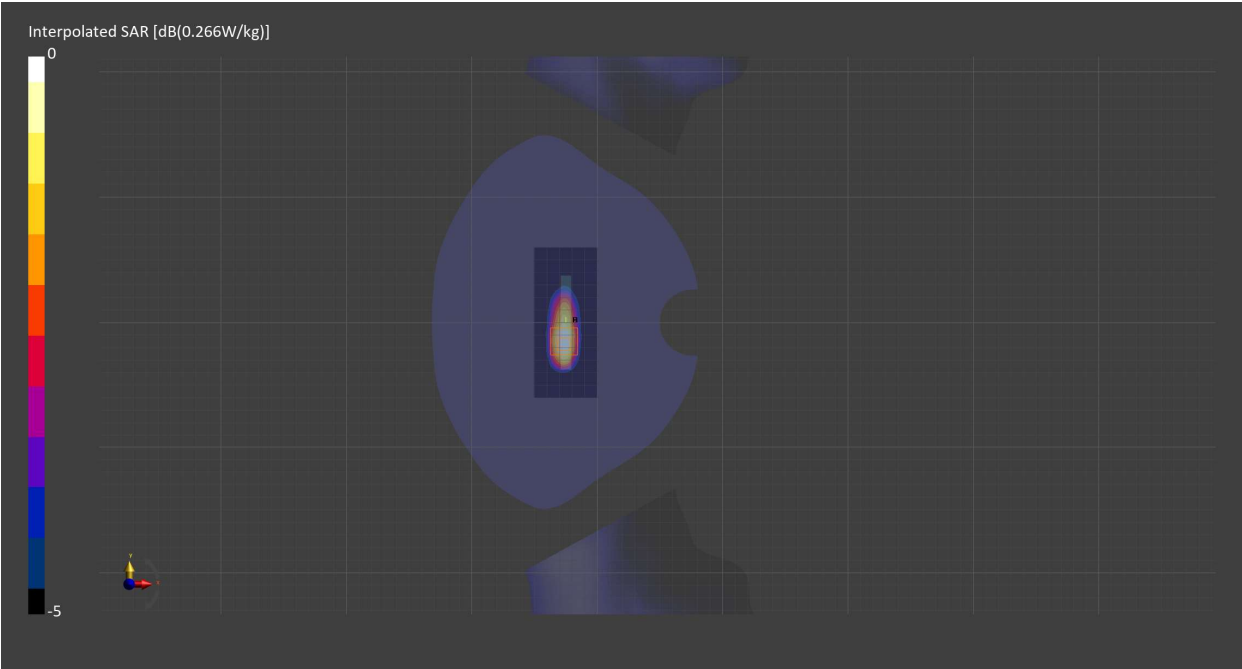

Measurement Report for Band 4, CHEEK, Normal, CELL Main2

Exposure Conditions

|                                  |                   |                        |                 |
|----------------------------------|-------------------|------------------------|-----------------|
| Band                             | Band 4            | TSL Permittivity       | 41.1            |
| Frequency [MHz]   Channel Number | 1732.500   1762   | TSL Conductivity [S/m] | 1.38            |
| Group   UID                      | WCDMA   10011-CAC | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 8.95              | Test Distance [mm]     | 0.00            |
| Communication Configuration      | UMTS-FDD (WCDMA)  |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7710   2024-01-16 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1715   2024-02-12     | TSL   Meas. Date | HBBL600-10000V6   2024-Mar-25             |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 91.9               |
| Dist 3dB Peak [mm]  |               | 11.1               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.113     | 0.116     |
| psSAR10g [W/Kg]  | 0.065     | 0.075     |
| Power Drift [dB] | 0.02      | 0.02      |

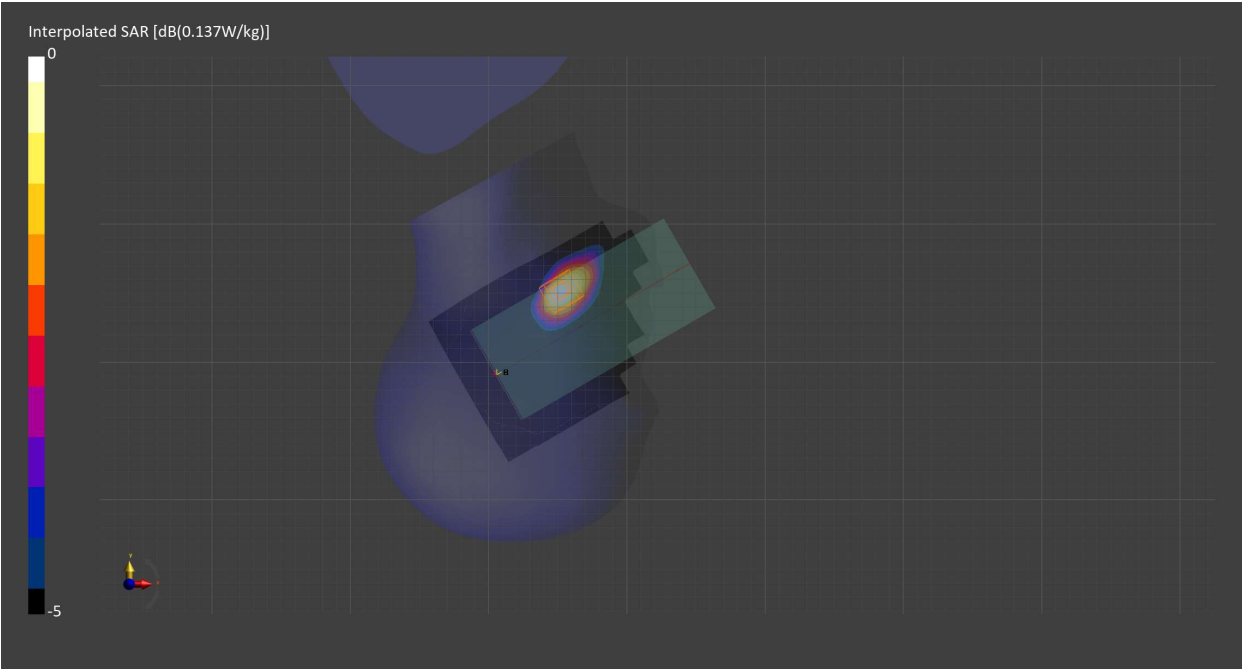

Measurement Report for Band 4, BACK, Normal, CELL Main2

Exposure Conditions

|                                  |                   |                        |            |
|----------------------------------|-------------------|------------------------|------------|
| Band                             | Band 4            | TSL Permittivity       | 41.1       |
| Frequency [MHz]   Channel Number | 1732.500   1762   | TSL Conductivity [S/m] | 1.38       |
| Group   UID                      | WCDMA   10011-CAC | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.95              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | UMTS-FDD (WCDMA)  |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7710   2024-01-16 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1715   2024-02-12     | TSL   Meas. Date | HBBL600-10000V6   2024-Mar-25             |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 83.1               |
| Dist 3dB Peak [mm]  |               | 10.8               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.361     | 0.362     |
| psSAR10g [W/Kg]  | 0.198     | 0.199     |
| Power Drift [dB] | 0.01      | -0.03     |

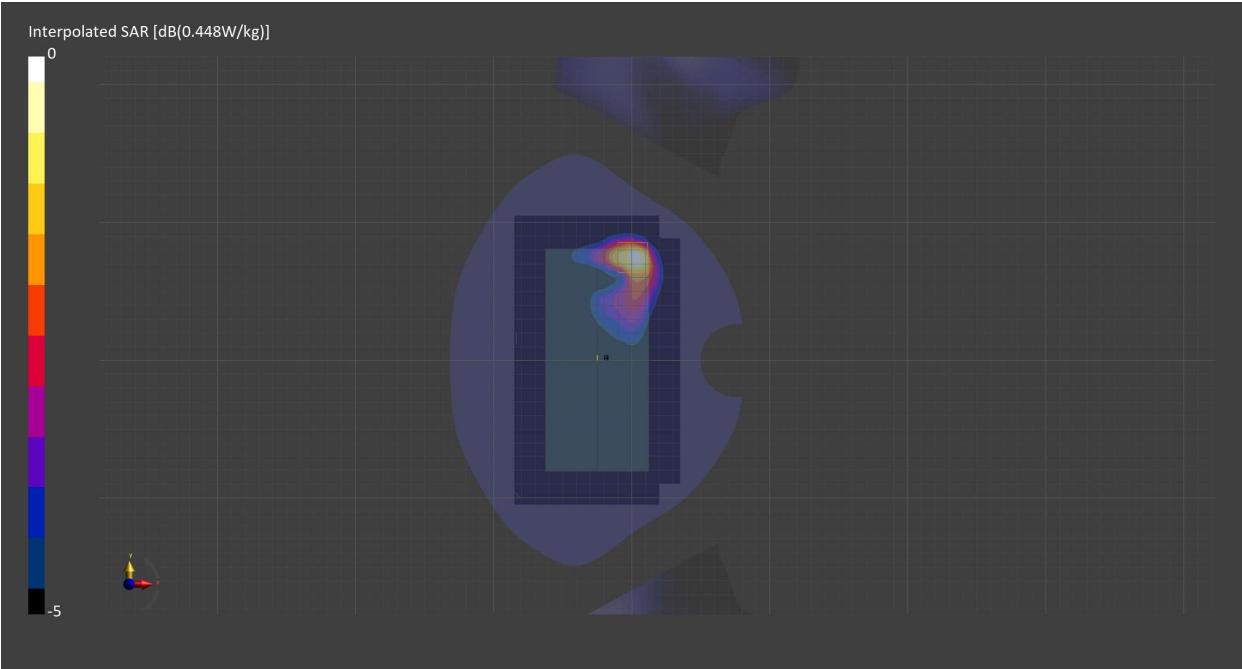

Measurement Report for Band 5, CHEEK, Normal, CELL Main1

Exposure Conditions

|                                  |                   |                        |                |
|----------------------------------|-------------------|------------------------|----------------|
| Band                             | Band 5            | TSL Permittivity       | 41.6           |
| Frequency [MHz]   Channel Number | 836.600   4183    | TSL Conductivity [S/m] | 0.906          |
| Group   UID                      | WCDMA   10011-CAC | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 9.15              | Test Distance [mm]     | 0.00           |
| Communication Configuration      | UMTS-FDD (WCDMA)  |                        |                |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-19              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 99.5               |
| Dist 3dB Peak [mm]  |               | > 15.0             |

Measurement Results

|                  | Area Scan | Zoom Scan    |
|------------------|-----------|--------------|
| psSAR1g [W/Kg]   | 0.111     | <b>0.121</b> |
| psSAR10g [W/Kg]  | 0.078     | <b>0.097</b> |
| Power Drift [dB] | N/A       | -0.03        |

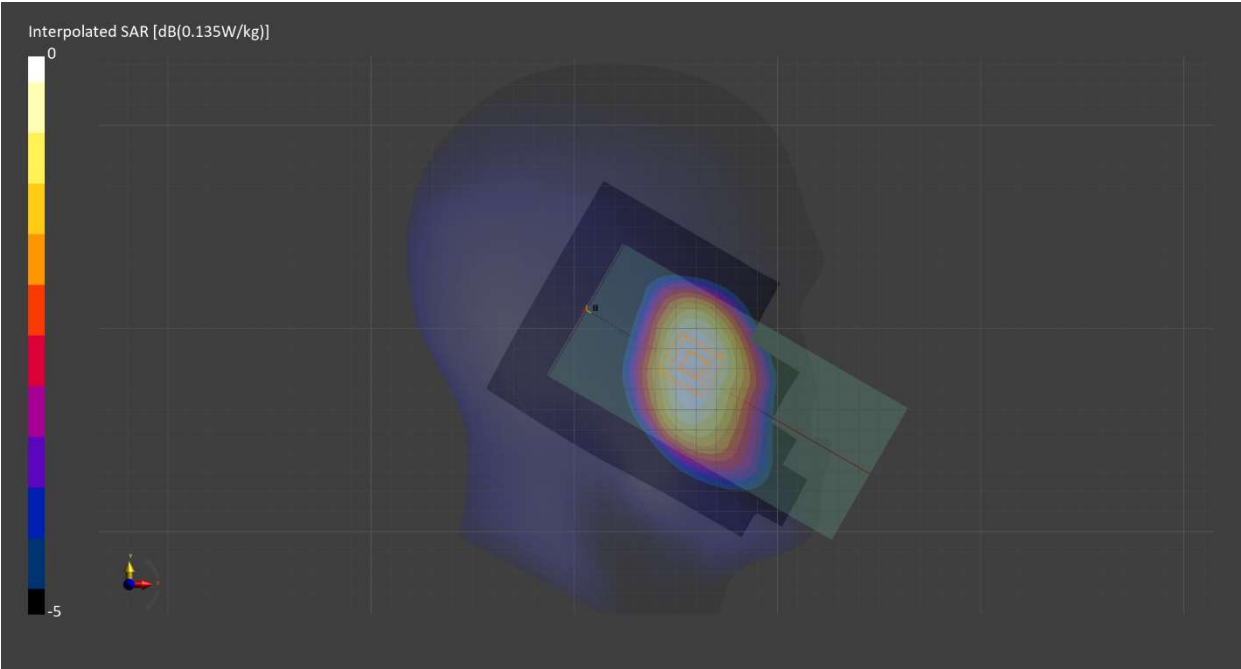

Measurement Report for Band 5, BACK, Normal, CELL Main1

Exposure Conditions

|                                  |                   |                        |            |
|----------------------------------|-------------------|------------------------|------------|
| Band                             | Band 5            | TSL Permittivity       | 41.6       |
| Frequency [MHz]   Channel Number | 836.600   4183    | TSL Conductivity [S/m] | 0.906      |
| Group   UID                      | WCDMA   10011-CAC | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 9.15              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | UMTS-FDD (WCDMA)  |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-19              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 88.6               |
| Dist 3dB Peak [mm]  |               | 15.6               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.258     | 0.255     |
| psSAR10g [W/Kg]  | 0.169     | 0.158     |
| Power Drift [dB] | N/A       | -0.03     |

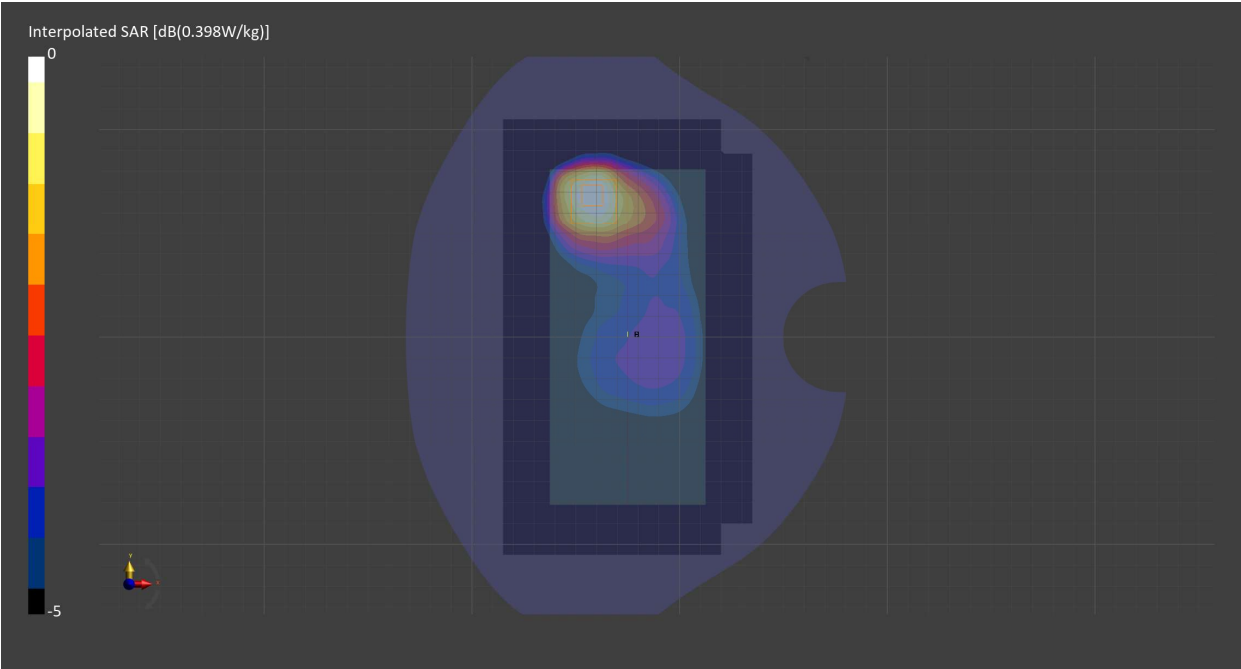

Measurement Report for Band 2, TILT, Normal, CELL Main2

Exposure Conditions

|                                  |                                                                         |                        |                |
|----------------------------------|-------------------------------------------------------------------------|------------------------|----------------|
| Band                             | Band 2                                                                  | TSL Permittivity       | 41.1           |
| Frequency [MHz]   Channel Number | 1880.000   18900                                                        | TSL Conductivity [S/m] | 1.43           |
| Group   UID                      | LTE-FDD   10297-AAE                                                     | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 8.08                                                                    | Test Distance [mm]     | 0.00           |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:High AntennaCfg:SISO |                        |                |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HSL900   2024-Mar-26                      |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 90.2               |
| Dist 3dB Peak [mm]  |               | 7.7                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.020     | 0.023     |
| psSAR10g [W/Kg]  | 0.012     | 0.013     |
| Power Drift [dB] | 0.08      | -0.06     |

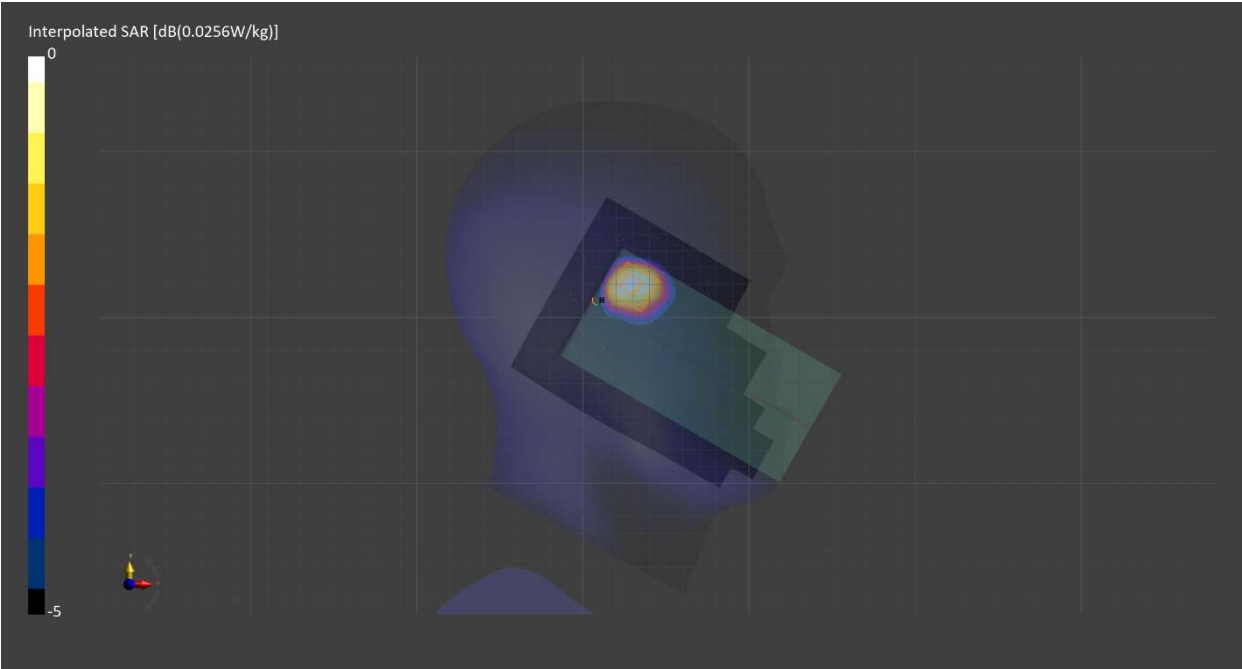

Measurement Report for Band 2, FRONT, Normal, CELL Main2

Exposure Conditions

|                                  |                                                                         |                        |            |
|----------------------------------|-------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 2                                                                  | TSL Permittivity       | 41.1       |
| Frequency [MHz]   Channel Number | 1880.000   18900                                                        | TSL Conductivity [S/m] | 1.43       |
| Group   UID                      | LTE-FDD   10297-AAE                                                     | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.08                                                                    | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:High AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HSL900   2024-Mar-26                      |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 84.7               |
| Dist 3dB Peak [mm]  |               | 8.7                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.148     | 0.179     |
| psSAR10g [W/Kg]  | 0.083     | 0.095     |
| Power Drift [dB] | 0.01      | -0.01     |

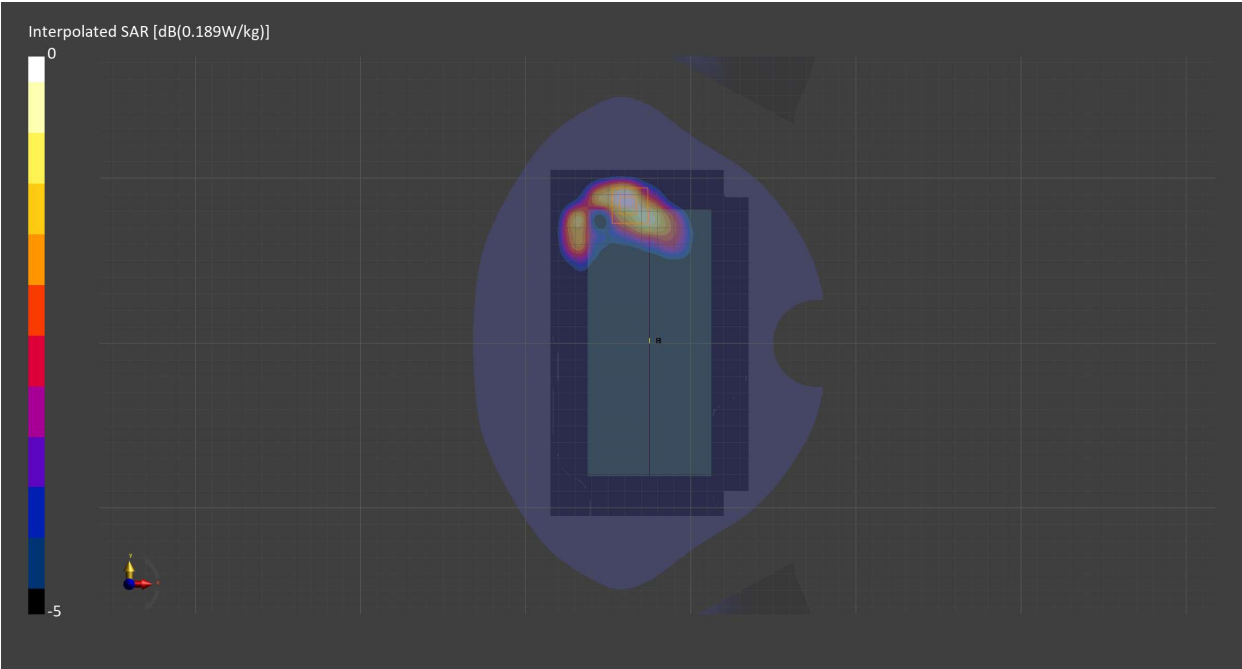

Measurement Report for Band 2, EDGE BOTTOM, Normal, CELL Main2

Exposure Conditions

|                                  |                                                                         |                        |            |
|----------------------------------|-------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 2                                                                  | TSL Permittivity       | 41.1       |
| Frequency [MHz]   Channel Number | 1880.000   18900                                                        | TSL Conductivity [S/m] | 1.43       |
| Group   UID                      | LTE-FDD   10297-AAE                                                     | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.08                                                                    | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:High AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HSL900   2024-Mar-26                      |

Scans Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 51.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.5 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | N/A          | Yes                |
| M2/M1 [%]           |              | 84.4               |
| Dist 3dB Peak [mm]  |              | 9.9                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.225     | 0.232     |
| psSAR10g [W/Kg]  | 0.124     | 0.133     |
| Power Drift [dB] | -0.02     | -0.01     |

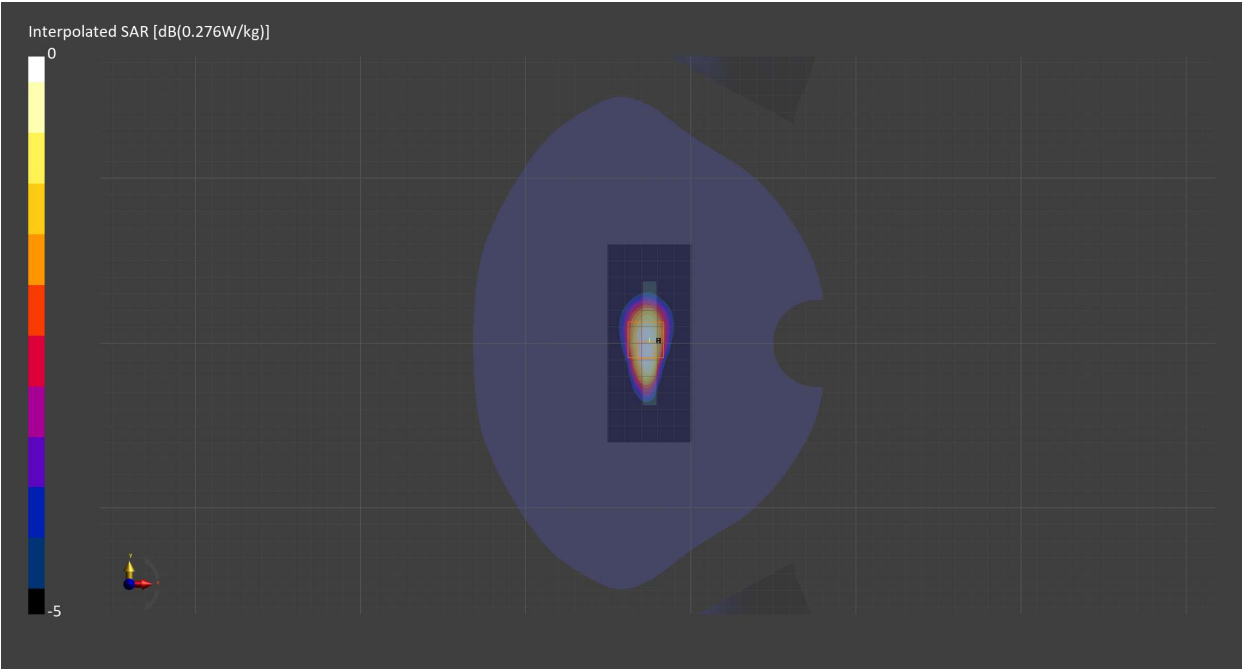

Measurement Report for Band 2, TILT, Normal, CELL Sub

Exposure Conditions

|                                  |                                                                         |                        |                |
|----------------------------------|-------------------------------------------------------------------------|------------------------|----------------|
| Band                             | Band 2                                                                  | TSL Permittivity       | 40.6           |
| Frequency [MHz]   Channel Number | 1880.000   18900                                                        | TSL Conductivity [S/m] | 1.39           |
| Group   UID                      | LTE-FDD   10297-AAE                                                     | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 8.18                                                                    | Test Distance [mm]     | 0.00           |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:High AntennaCfg:SISO |                        |                |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2023-03-29 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1716   2023-03-16     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-08              |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 4.7 x 4.7 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 82.1               |
| Dist 3dB Peak [mm]  |               | 6.9                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.283     | 0.323     |
| psSAR10g [W/Kg]  | 0.128     | 0.145     |
| Power Drift [dB] | N/A       | 0.02      |

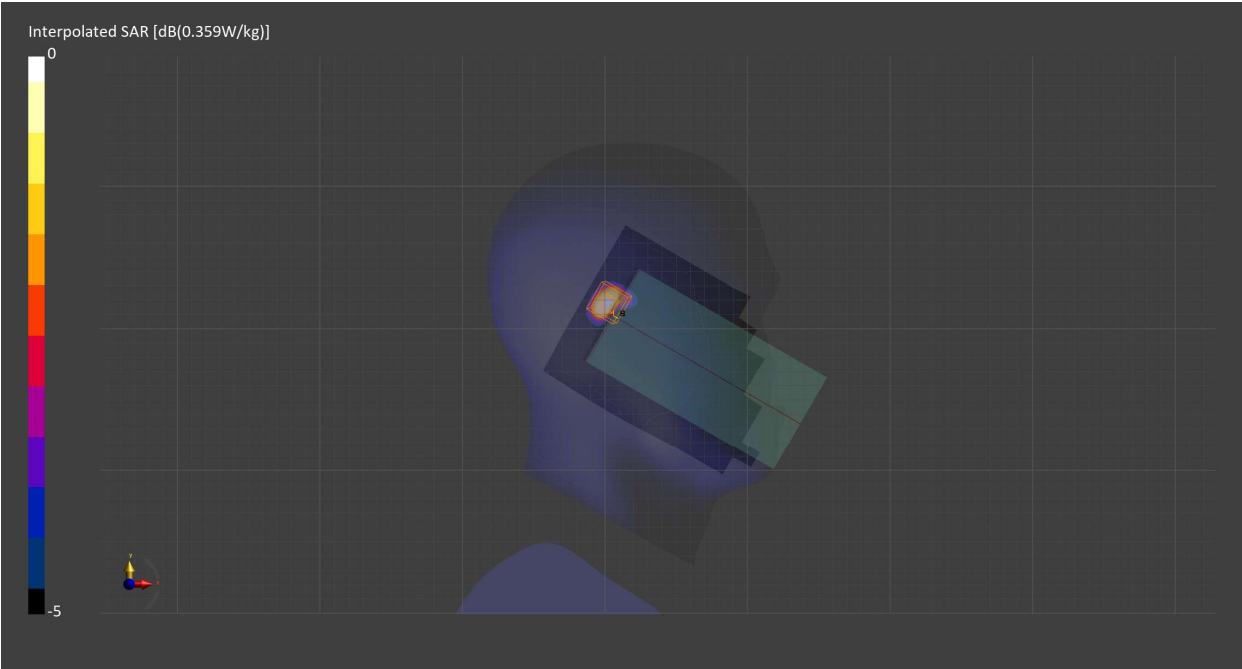

Measurement Report for Band 2, BACK, Normal, CELL Sub

Exposure Conditions

|                                  |                                                                         |                        |            |
|----------------------------------|-------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 2                                                                  | TSL Permittivity       | 38.3       |
| Frequency [MHz]   Channel Number | 1880.000   18900                                                        | TSL Conductivity [S/m] | 1.40       |
| Group   UID                      | LTE-FDD   10297-AAE                                                     | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.08                                                                    | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:High AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-05              |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 85.6               |
| Dist 3dB Peak [mm]  |               | 9.7                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.080     | 0.093     |
| psSAR10g [W/Kg]  | 0.046     | 0.049     |
| Power Drift [dB] | N/A       | -0.01     |

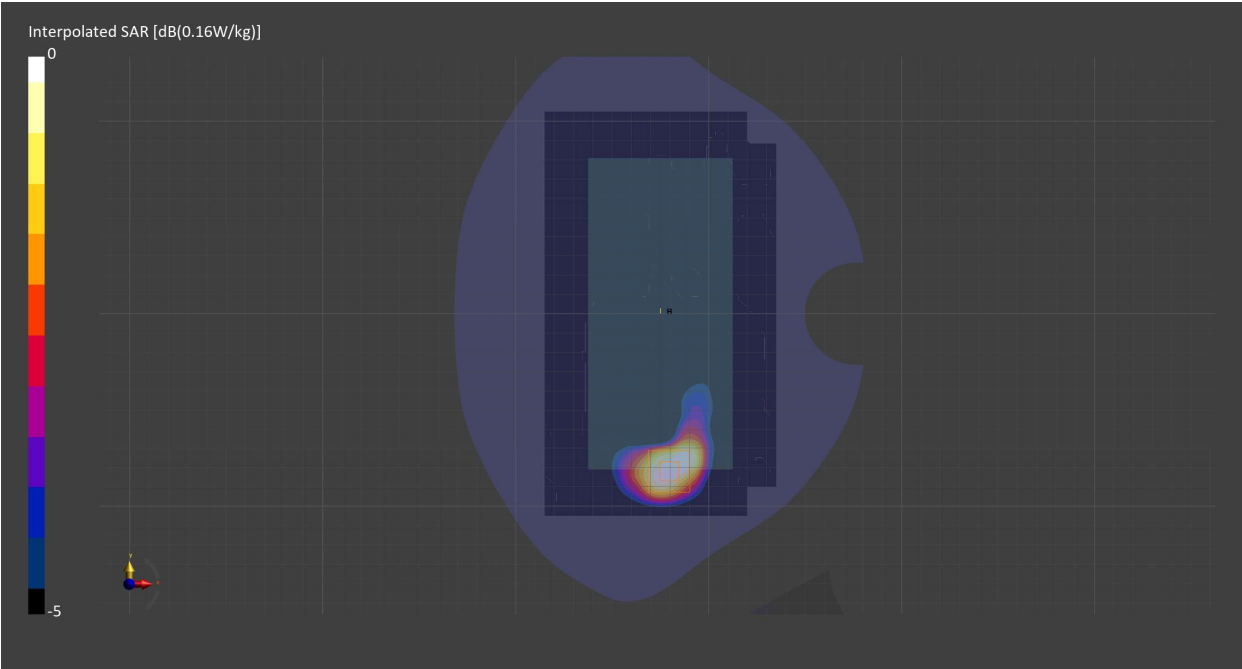

Measurement Report for Band 2, EDGE TOP, Normal, CELL Sub

Exposure Conditions

|                                  |                                                                         |                        |            |
|----------------------------------|-------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 2                                                                  | TSL Permittivity       | 38.3       |
| Frequency [MHz]   Channel Number | 1880.000   18900                                                        | TSL Conductivity [S/m] | 1.40       |
| Group   UID                      | LTE-FDD   10297-AAE                                                     | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.08                                                                    | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:High AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-05              |

Scans Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 51.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.5 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | N/A          | Yes                |
| M2/M1 [%]           |              | 84.5               |
| Dist 3dB Peak [mm]  |              | 9.6                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.150     | 0.157     |
| psSAR10g [W/Kg]  | 0.078     | 0.080     |
| Power Drift [dB] | N/A       | -0.00     |

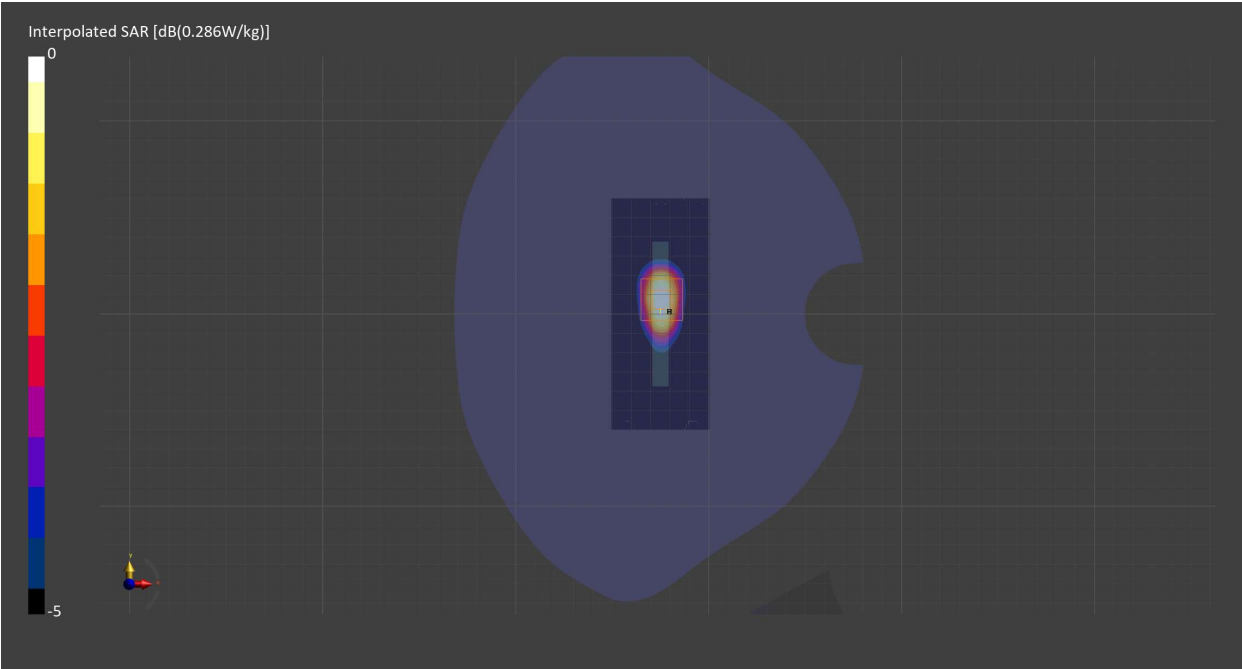

Measurement Report for Band 4, CHEEK, Normal, CELL Main2

Exposure Conditions

|                                  |                                                                      |                        |                 |
|----------------------------------|----------------------------------------------------------------------|------------------------|-----------------|
| Band                             | Band 4                                                               | TSL Permittivity       | 41.1            |
| Frequency [MHz]   Channel Number | 1732.500   20175                                                     | TSL Conductivity [S/m] | 1.38            |
| Group   UID                      | LTE-FDD   10169-CAF                                                  | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 8.95                                                                 | Test Distance [mm]     | 0.00            |
| Communication Configuration      | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Low AntennaCfg:SISO |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7710   2024-01-16 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1715   2024-02-12     | TSL   Meas. Date | HBBL600-10000V6   2024-Mar-25             |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 88.3               |
| Dist 3dB Peak [mm]  |               | 9.9                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.087     | 0.090     |
| psSAR10g [W/Kg]  | 0.050     | 0.057     |
| Power Drift [dB] | -0.01     | 0.02      |

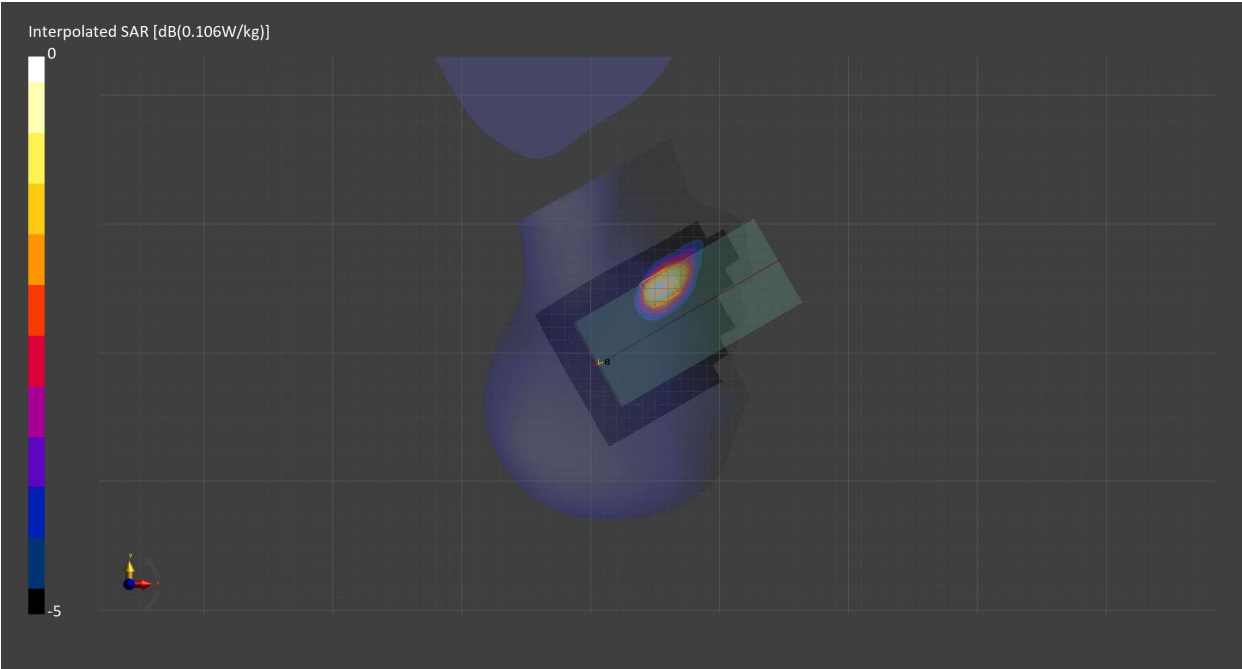

Measurement Report for Band 4, BACK, Normal, CELL Main2

Exposure Conditions

|                                  |                                                                        |                        |            |
|----------------------------------|------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 4                                                                 | TSL Permittivity       | 41.1       |
| Frequency [MHz]   Channel Number | 1732.500   20175                                                       | TSL Conductivity [S/m] | 1.38       |
| Group   UID                      | LTE-FDD   10297-AAE                                                    | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.95                                                                   | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7710   2024-01-16 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1715   2024-02-12     | TSL   Meas. Date | HBBL600-10000V6   2024-Mar-25             |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 82.8               |
| Dist 3dB Peak [mm]  |               | 11.4               |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.194     | 0.199     |
| psSAR10g [W/Kg]  | 0.111     | 0.113     |
| Power Drift [dB] | -0.00     | -0.00     |

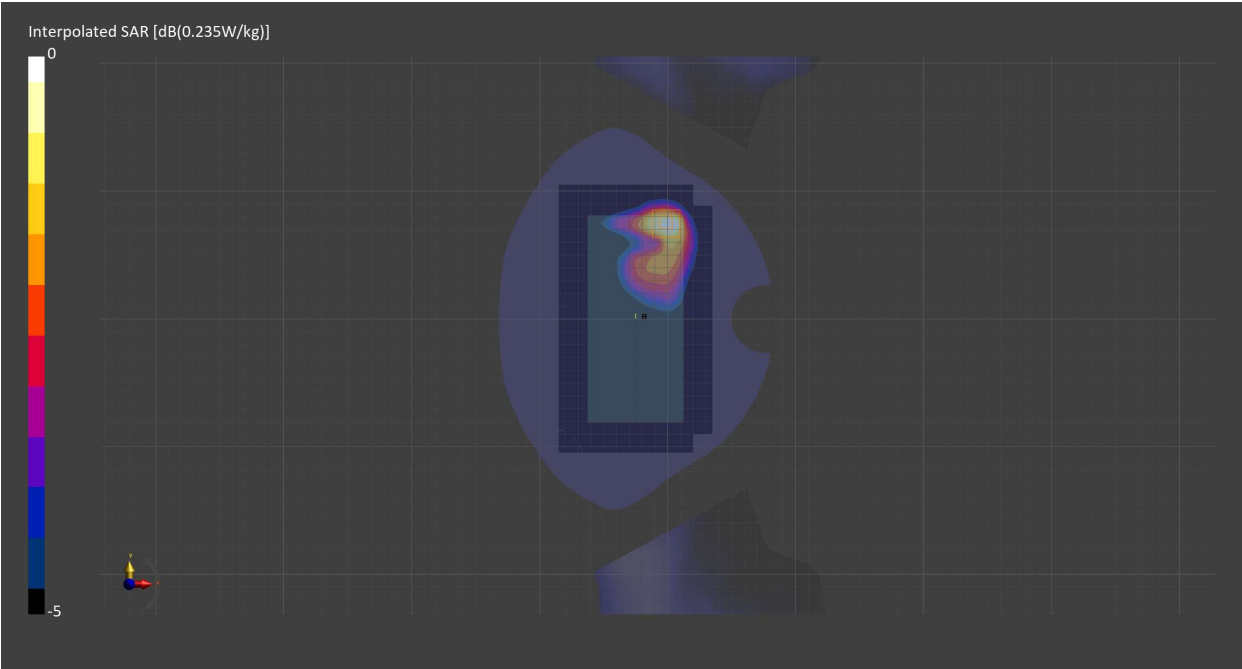

Measurement Report for Band 4, EDGE BOTTOM, Normal, CELL Main2

Exposure Conditions

|                                  |                                                                        |                        |            |
|----------------------------------|------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 4                                                                 | TSL Permittivity       | 41.1       |
| Frequency [MHz]   Channel Number | 1732.500   20175                                                       | TSL Conductivity [S/m] | 1.38       |
| Group   UID                      | LTE-FDD   10297-AAE                                                    | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.95                                                                   | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7710   2024-01-16 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1715   2024-02-12     | TSL   Meas. Date | HBBL600-10000V6   2024-Mar-25             |

Scans Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 51.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.5 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | N/A          | Yes                |
| M2/M1 [%]           |              | 81.1               |
| Dist 3dB Peak [mm]  |              | 10.8               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.271     | 0.285     |
| psSAR10g [W/Kg]  | 0.148     | 0.151     |
| Power Drift [dB] | 0.00      | 0.01      |

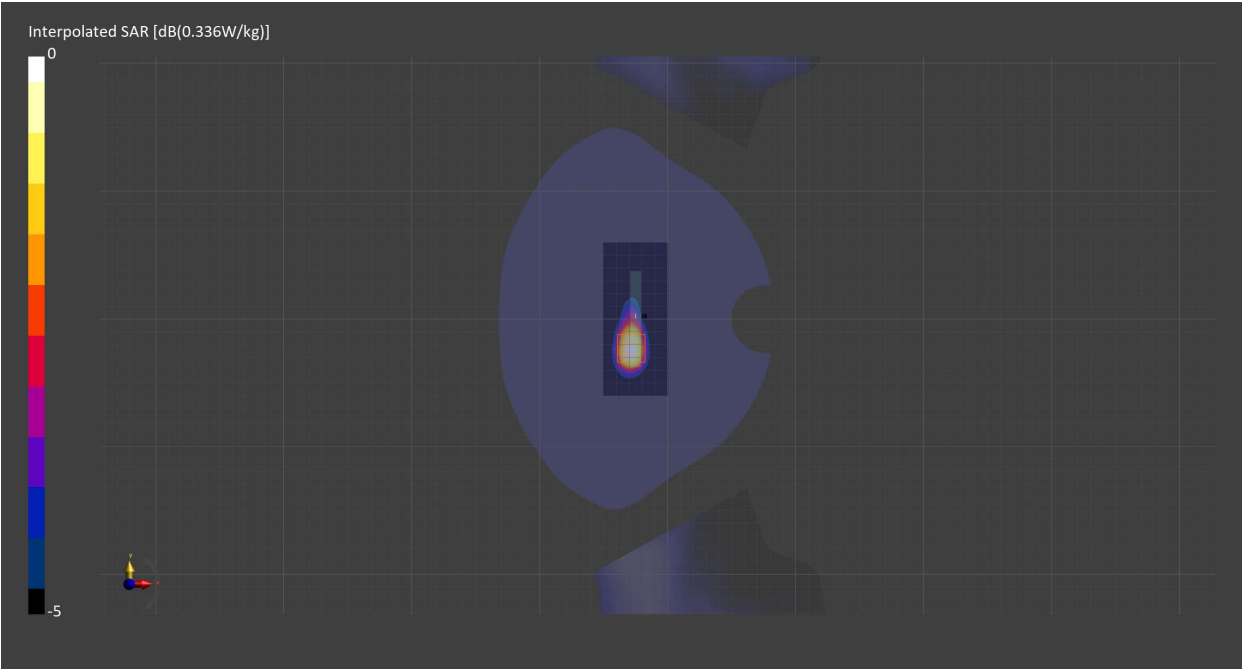

Measurement Report for Band 5, CHEEK, Normal, CELL Main1

Exposure Conditions

|                                  |                                                                        |                        |                 |
|----------------------------------|------------------------------------------------------------------------|------------------------|-----------------|
| Band                             | Band 5                                                                 | TSL Permittivity       | 41.6            |
| Frequency [MHz]   Channel Number | 836.500   20525                                                        | TSL Conductivity [S/m] | 0.910           |
| Group   UID                      | LTE-FDD   10154-CAH                                                    | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 9.15                                                                   | Test Distance [mm]     | 0.00            |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) RBPosition:Low AntennaCfg:SISO |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-12              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 98.3               |
| Dist 3dB Peak [mm]  |               | 24.2               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.074     | 0.077     |
| psSAR10g [W/Kg]  | 0.051     | 0.060     |
| Power Drift [dB] | N/A       | 0.03      |

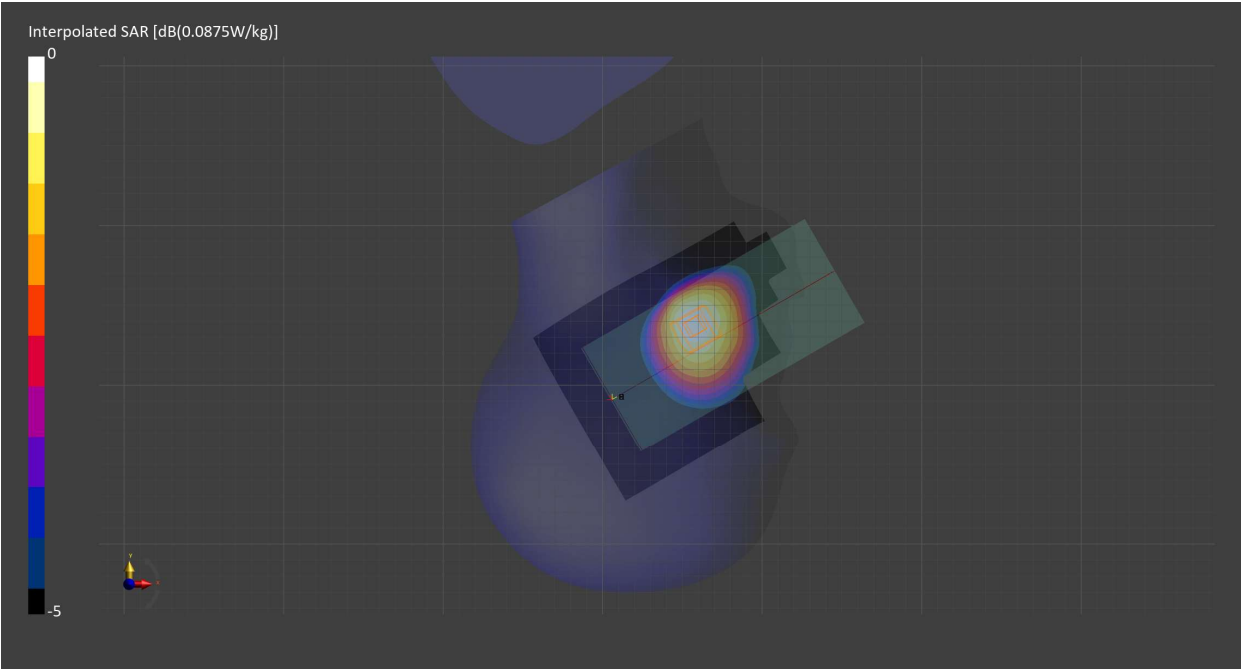

Measurement Report for Band 5, BACK, Normal, CELL Main1

Exposure Conditions

|                                  |                                                                        |                        |            |
|----------------------------------|------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 5                                                                 | TSL Permittivity       | 41.6       |
| Frequency [MHz]   Channel Number | 836.500   20525                                                        | TSL Conductivity [S/m] | 0.910      |
| Group   UID                      | LTE-FDD   10154-CAH                                                    | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 9.15                                                                   | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) RBPosition:Low AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-12              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 87.2               |
| Dist 3dB Peak [mm]  |               | 13.5               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.210     | 0.208     |
| psSAR10g [W/Kg]  | 0.137     | 0.127     |
| Power Drift [dB] | N/A       | -0.02     |

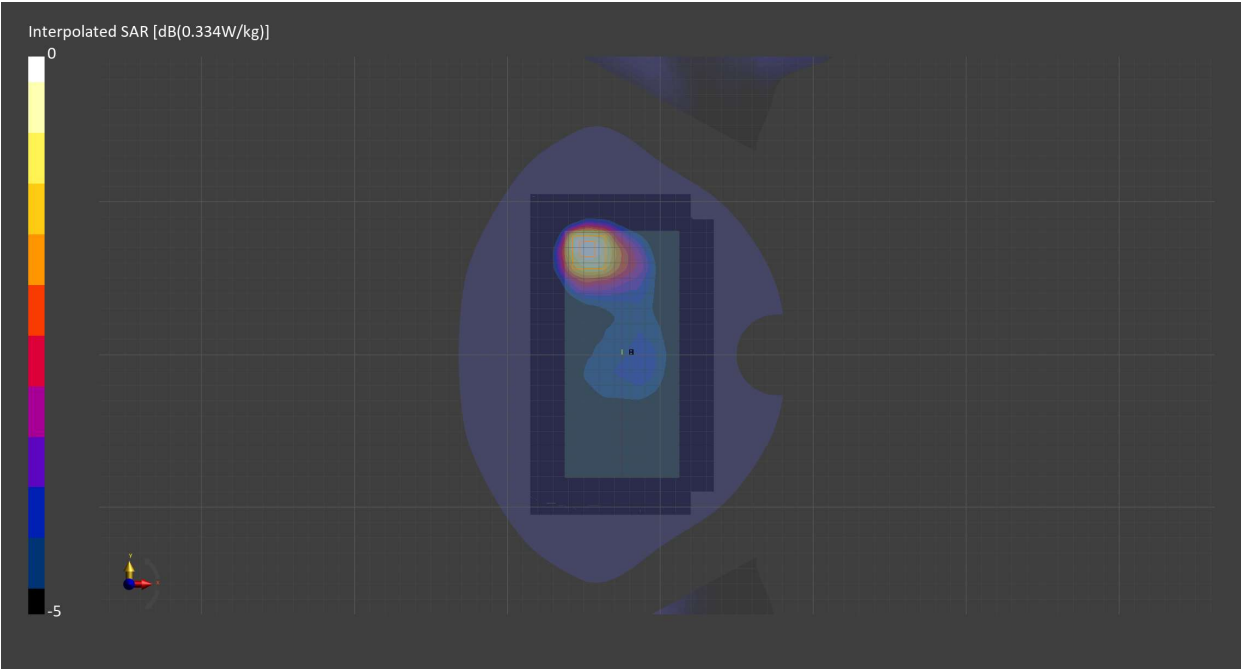

Measurement Report for Band 12, CHEEK, Normal, CELL Main1

Exposure Conditions

|                                  |                                                                          |                        |                |
|----------------------------------|--------------------------------------------------------------------------|------------------------|----------------|
| Band                             | Band 12                                                                  | TSL Permittivity       | 42.1           |
| Frequency [MHz]   Channel Number | 707.500   23095                                                          | TSL Conductivity [S/m] | 0.866          |
| Group   UID                      | LTE-FDD   10155-CAH                                                      | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 9.5                                                                      | Test Distance [mm]     | 0.00           |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) RBPosition:Mid AntennaCfg:SISO |                        |                |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-12              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 99.5               |
| Dist 3dB Peak [mm]  |               | 22.5               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.076     | 0.079     |
| psSAR10g [W/Kg]  | 0.053     | 0.064     |
| Power Drift [dB] | N/A       | -0.02     |

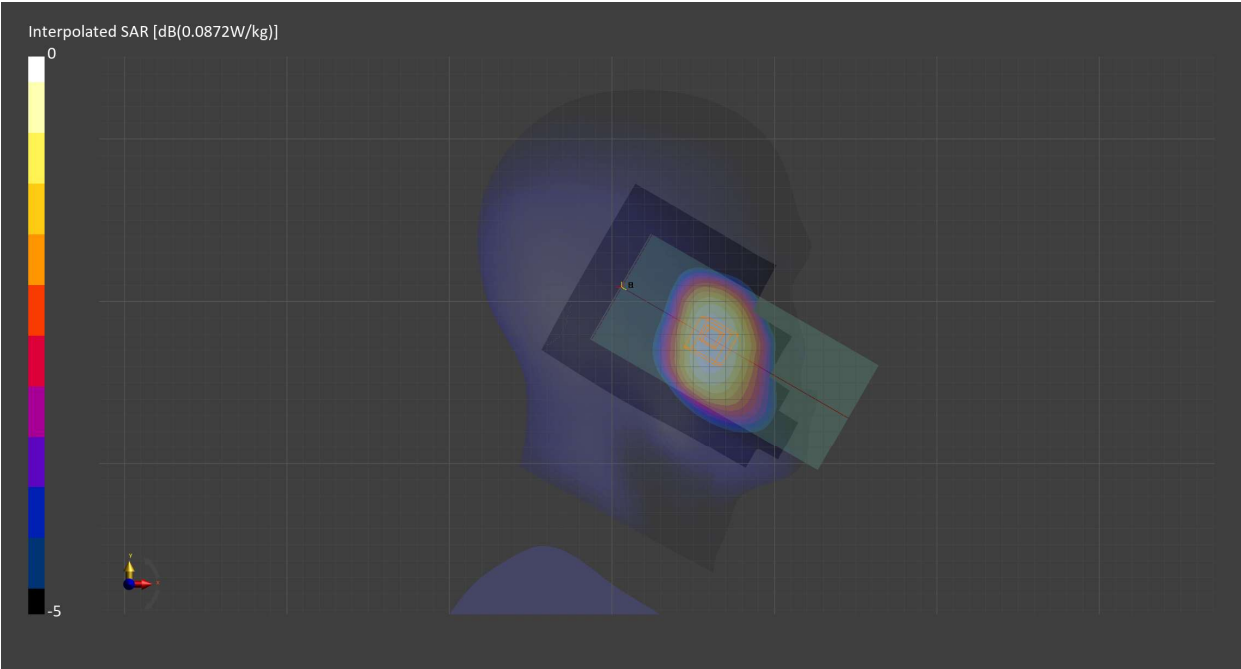

Measurement Report for Band 12, BACK, Normal, CELL Main1

Exposure Conditions

|                                  |                                                                          |                        |            |
|----------------------------------|--------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 12                                                                  | TSL Permittivity       | 42.1       |
| Frequency [MHz]   Channel Number | 707.500   23095                                                          | TSL Conductivity [S/m] | 0.866      |
| Group   UID                      | LTE-FDD   10155-CAH                                                      | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 9.5                                                                      | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) RBPosition:Mid AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-12              |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 82.1               |
| Dist 3dB Peak [mm]  |               | 12.8               |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.157     | 0.154     |
| psSAR10g [W/Kg]  | 0.105     | 0.097     |
| Power Drift [dB] | N/A       | 0.01      |

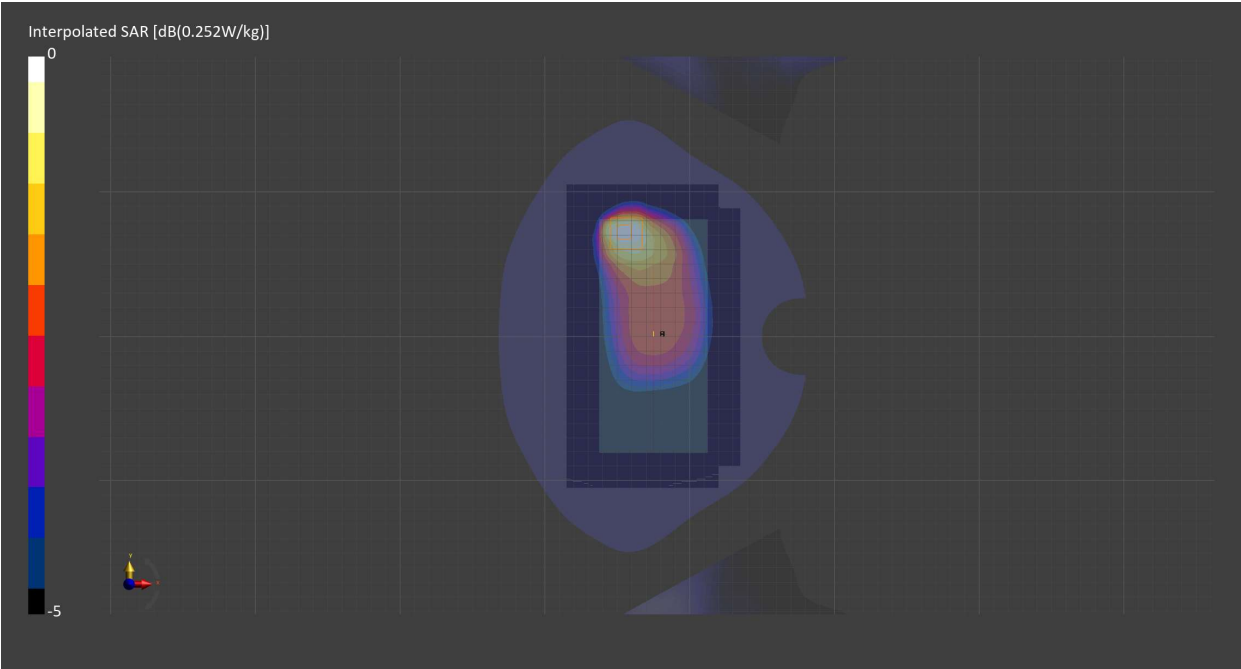

Measurement Report for Band 12, EDGE LEFT, Normal, CELL Main1

Exposure Conditions

|                                  |                                                                      |                        |            |
|----------------------------------|----------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 12                                                              | TSL Permittivity       | 42.1       |
| Frequency [MHz]   Channel Number | 707.500   23095                                                      | TSL Conductivity [S/m] | 0.866      |
| Group   UID                      | LTE-FDD   10175-CAH                                                  | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 9.5                                                                  | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Low AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-12              |

Scans Setup

|                     |              |                    |
|---------------------|--------------|--------------------|
|                     | Area Scan    | Zoom Scan          |
| Grid Extents [mm]   | 51.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.5 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | N/A          | Yes                |
| M2/M1 [%]           |              | 89.6               |
| Dist 3dB Peak [mm]  |              | > 15.0             |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.151     | 0.154     |
| psSAR10g [W/Kg]  | 0.104     | 0.107     |
| Power Drift [dB] | N/A       | 0.02      |

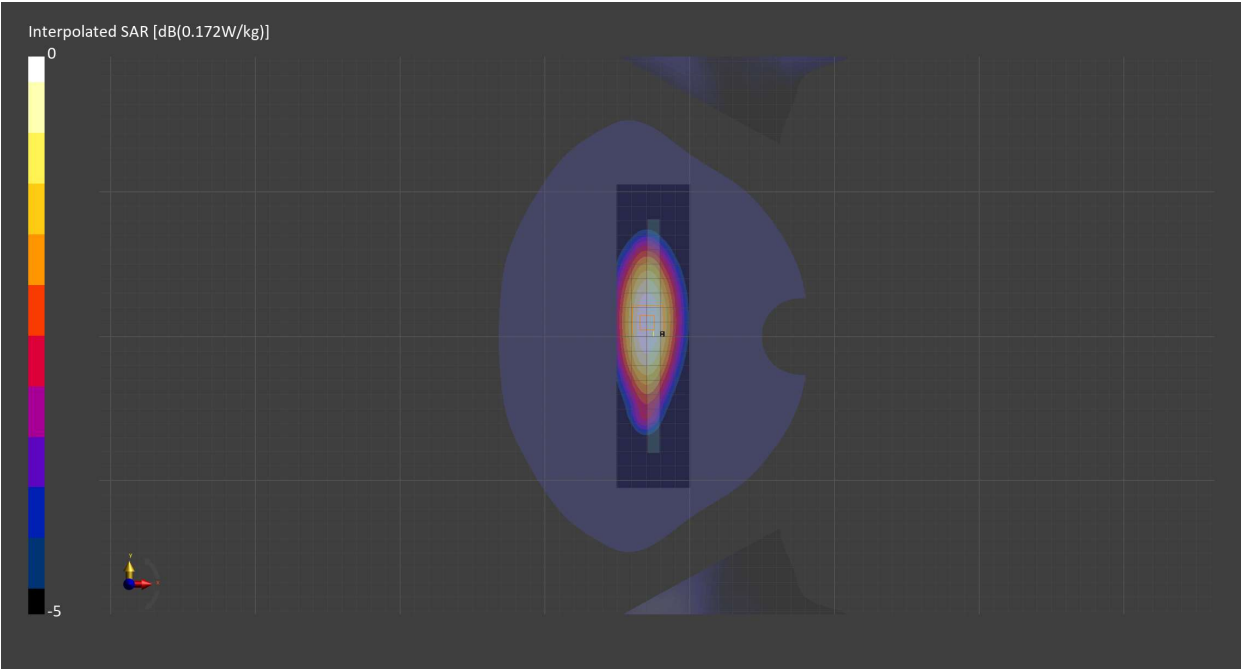

Measurement Report for Band 13, CHEEK, Normal, CELL Main1

Exposure Conditions

|                                  |                                                                        |                        |                |
|----------------------------------|------------------------------------------------------------------------|------------------------|----------------|
| Band                             | Band 13                                                                | TSL Permittivity       | 40.9           |
| Frequency [MHz]   Channel Number | 782.000   23230                                                        | TSL Conductivity [S/m] | 0.906          |
| Group   UID                      | LTE-FDD   10154-CAH                                                    | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 10.56                                                                  | Test Distance [mm]     | 0.00           |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO |                        |                |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-12-12 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-11-23     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-01              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 95.9               |
| Dist 3dB Peak [mm]  |               | > 15.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.053     | 0.057     |
| psSAR10g [W/Kg]  | 0.037     | 0.045     |
| Power Drift [dB] | N/A       | -0.01     |

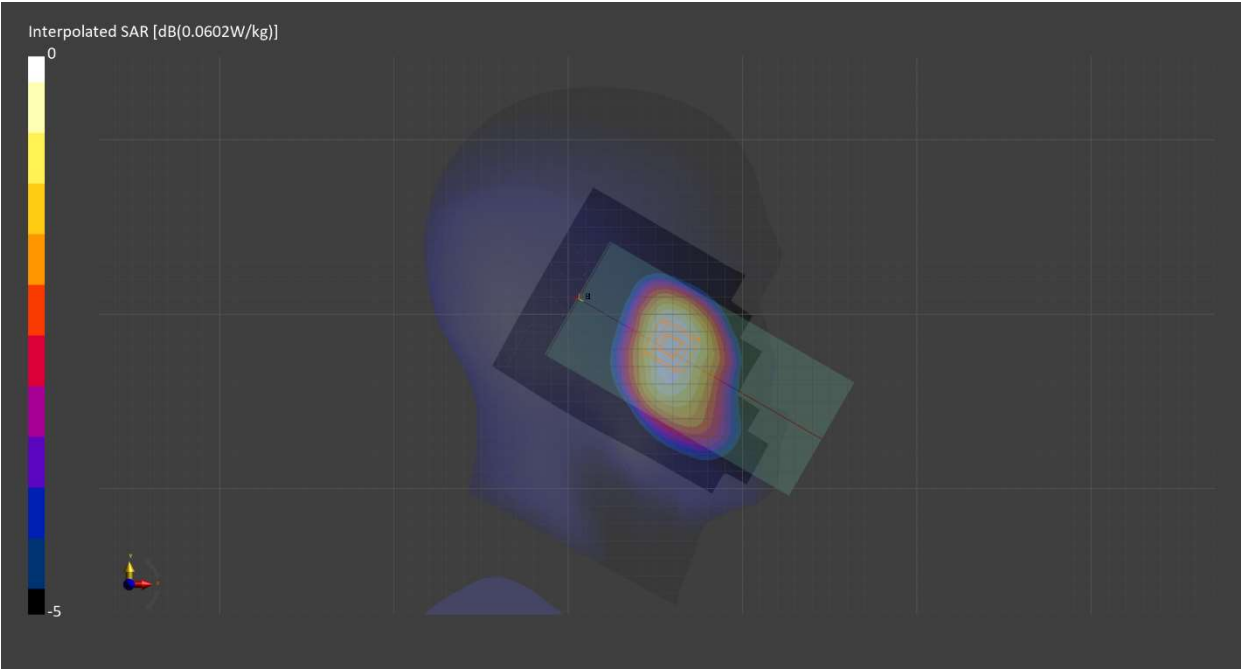

Measurement Report for Band 13, BACK, Normal, CELL Main1

Exposure Conditions

|                                  |                                                                        |                        |            |
|----------------------------------|------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 13                                                                | TSL Permittivity       | 40.9       |
| Frequency [MHz]   Channel Number | 782.000   23230                                                        | TSL Conductivity [S/m] | 0.906      |
| Group   UID                      | LTE-FDD   10154-CAH                                                    | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 10.56                                                                  | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-12-12 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-11-23     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-01              |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 83.7               |
| Dist 3dB Peak [mm]  |               | 12.6               |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.126     | 0.121     |
| psSAR10g [W/Kg]  | 0.081     | 0.073     |
| Power Drift [dB] | N/A       | -0.01     |

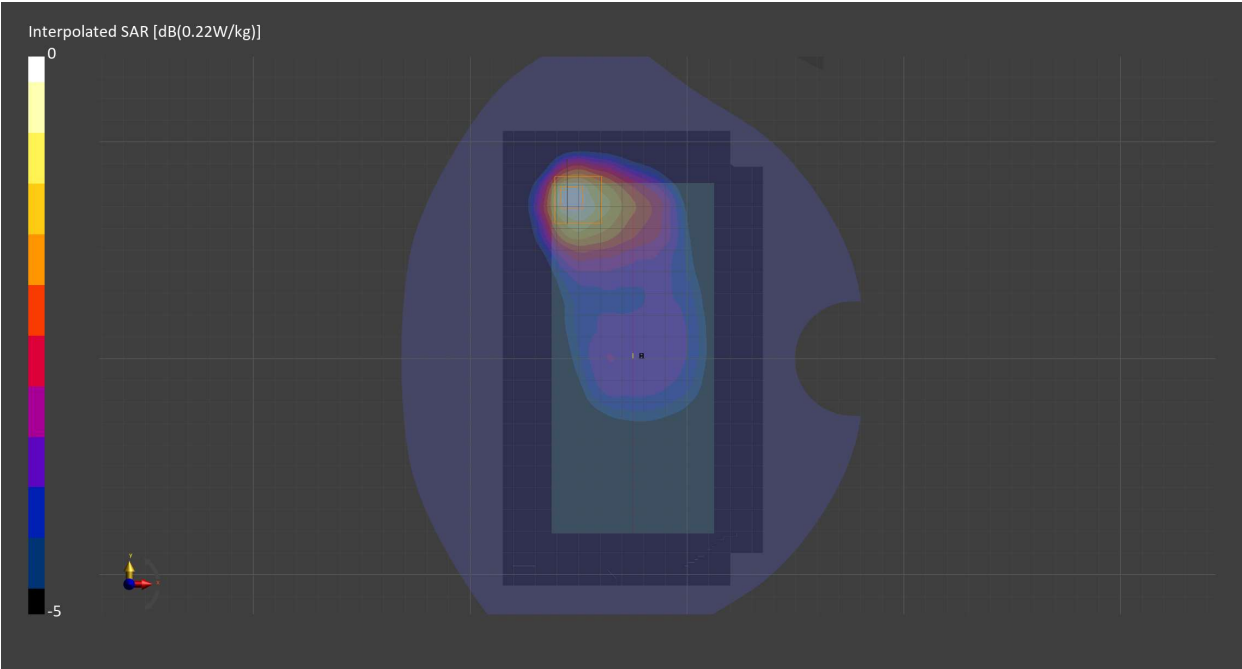

Measurement Report for Band 41, CHEEK, Normal, CELL Main2

Exposure Conditions

|                                  |                                                                                               |                        |                 |
|----------------------------------|-----------------------------------------------------------------------------------------------|------------------------|-----------------|
| Band                             | Band 41                                                                                       | TSL Permittivity       | 40.2            |
| Frequency [MHz]   Channel Number | 2593.000   40620                                                                              | TSL Conductivity [S/m] | 1.88            |
| Group   UID                      | LTE-TDD   10435-AAG                                                                           | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 7.67                                                                                          | Test Distance [mm]     | 0.00            |
| Communication Configuration      | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) RBPosition:Mid AntennaCfg:SISO |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2023-03-29 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1716   2023-03-16     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-12              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 200.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 90.1               |
| Dist 3dB Peak [mm]  |               | 7.6                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.022     | 0.019     |
| psSAR10g [W/Kg]  | 0.011     | 0.010     |
| Power Drift [dB] | N/A       | -2.33     |

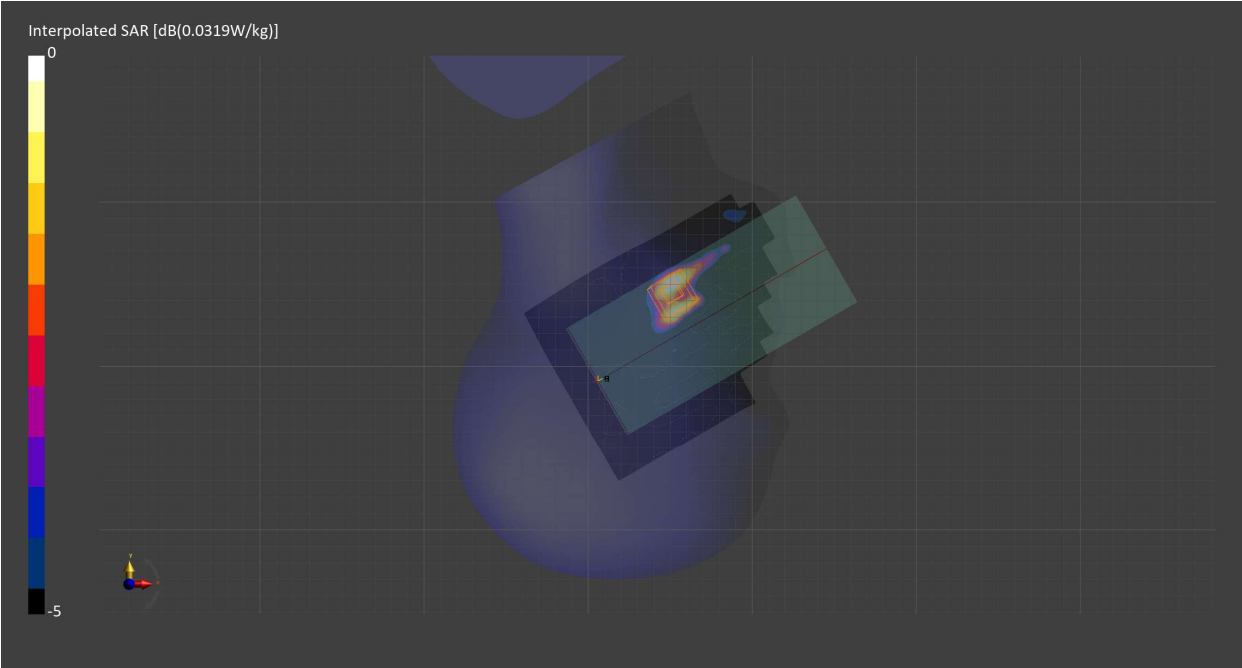

Measurement Report for Band 41, BACK, Normal, CELL Main2

Exposure Conditions

|                                  |                                                                                               |                        |            |
|----------------------------------|-----------------------------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 41                                                                                       | TSL Permittivity       | 39.3       |
| Frequency [MHz]   Channel Number | 2593.000   40620                                                                              | TSL Conductivity [S/m] | 1.88       |
| Group   UID                      | LTE-TDD   10435-AAG                                                                           | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 7.67                                                                                          | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) RBPosition:Mid AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2023-03-29 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1716   2023-03-16     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-20              |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 120.0 x 200.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 83.8               |
| Dist 3dB Peak [mm]  |               | 10.0               |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.085     | 0.083     |
| psSAR10g [W/Kg]  | 0.042     | 0.041     |
| Power Drift [dB] | N/A       | -0.17     |

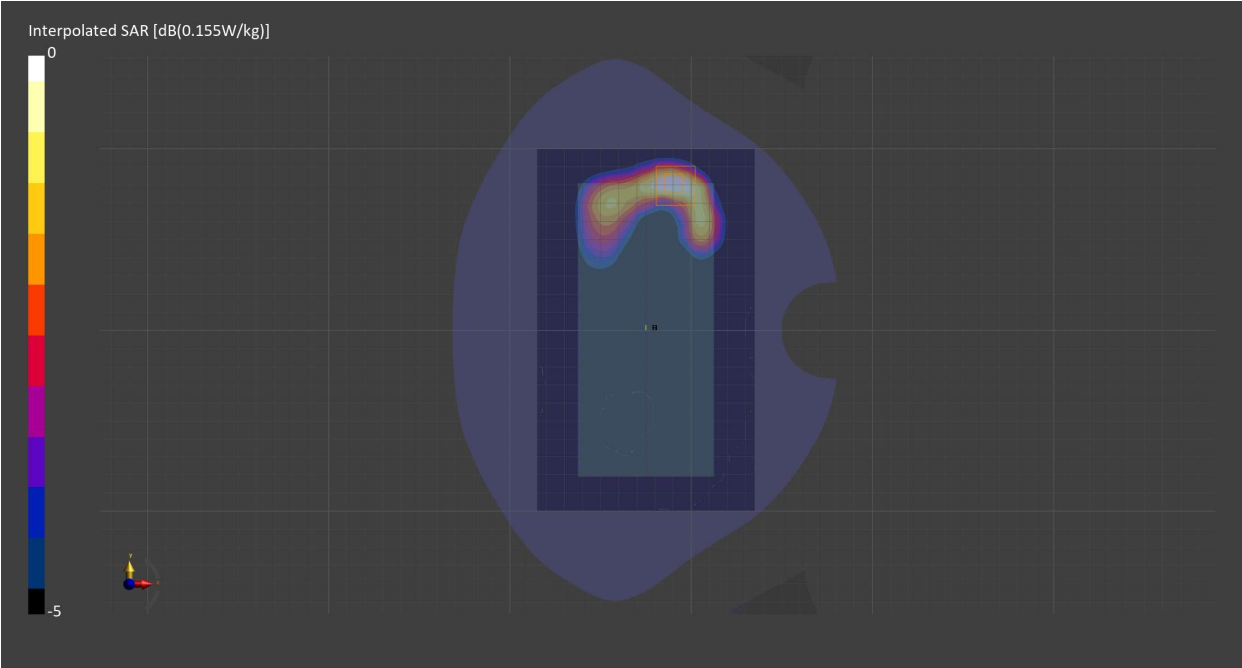

Measurement Report for Band 41, EDGE BOTTOM, Normal, CELL Main2

Exposure Conditions

|                                  |                                                                                                 |                        |            |
|----------------------------------|-------------------------------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 41                                                                                         | TSL Permittivity       | 39.3       |
| Frequency [MHz]   Channel Number | 2593.000   40620                                                                                | TSL Conductivity [S/m] | 1.88       |
| Group   UID                      | LTE-TDD   10494-AAG                                                                             | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 7.67                                                                                            | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) RBPosition:Mid AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2023-03-29 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1716   2023-03-16     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-20              |

Scans Setup

|                     |              |                    |
|---------------------|--------------|--------------------|
|                     | Area Scan    | Zoom Scan          |
| Grid Extents [mm]   | 51.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.5 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | N/A          | Yes                |
| M2/M1 [%]           |              | 81.2               |
| Dist 3dB Peak [mm]  |              | 10.0               |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.145     | 0.152     |
| psSAR10g [W/Kg]  | 0.071     | 0.073     |
| Power Drift [dB] | N/A       | 0.00      |

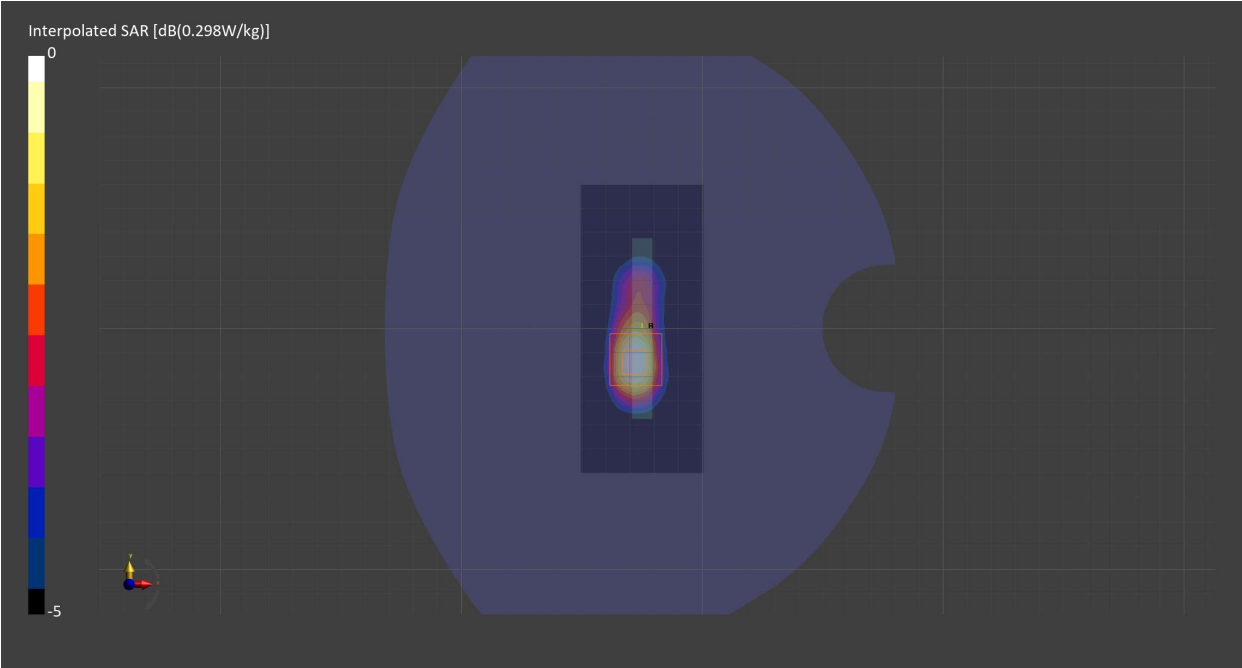

Measurement Report for Band n66, CHEEK, Normal, CELL Main2

Exposure Conditions

|                                  |                                                                               |                        |                 |
|----------------------------------|-------------------------------------------------------------------------------|------------------------|-----------------|
| Band                             | Band n66                                                                      | TSL Permittivity       | 39.0            |
| Frequency [MHz]   Channel Number | 1745.000   349000                                                             | TSL Conductivity [S/m] | 1.34            |
| Group   UID                      | 5G NR FR1 FDD   10931-AAC                                                     | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 9.05                                                                          | Test Distance [mm]     | 0.00            |
| Communication Configuration      | 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Low AntennaCfg:SISO |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-12-12 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-11-23     | TSL   Meas. Date | HBBL-600-10000   2024-Jan-16              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 91.0               |
| Dist 3dB Peak [mm]  |               | 14.2               |

Measurement Results

|                  | Area Scan | Zoom Scan    |
|------------------|-----------|--------------|
| psSAR1g [W/Kg]   | 0.133     | <b>0.137</b> |
| psSAR10g [W/Kg]  | 0.079     | <b>0.088</b> |
| Power Drift [dB] | N/A       | -0.02        |

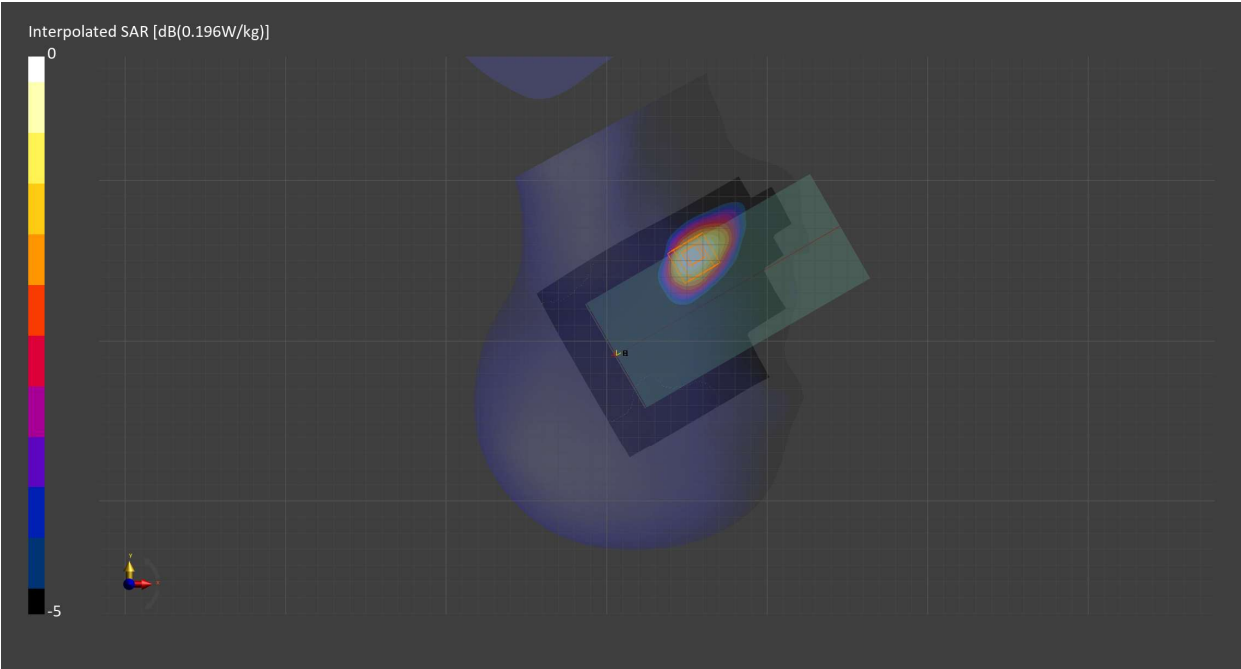

Measurement Report for Band n66, BACK, Normal, CELL Main2

Exposure Conditions

|                                                                                                             |                           |                        |            |
|-------------------------------------------------------------------------------------------------------------|---------------------------|------------------------|------------|
| Band                                                                                                        | Band n66                  | TSL Permittivity       | 39.0       |
| Frequency [MHz]   Channel Number                                                                            | 1745.000   349000         | TSL Conductivity [S/m] | 1.34       |
| Group   UID                                                                                                 | 5G NR FR1 FDD   10939-AAC | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                                                                                           | 9.05                      | Test Distance [mm]     | 10.00      |
| Communication Configuration 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid AntennaCfg:SISO |                           |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-12-12 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-11-23     | TSL   Meas. Date | HBBL-600-10000   2024-Jan-16              |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 84.3               |
| Dist 3dB Peak [mm]  |               | 11.9               |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.356     | 0.393     |
| psSAR10g [W/Kg]  | 0.209     | 0.221     |
| Power Drift [dB] | N/A       | -0.01     |

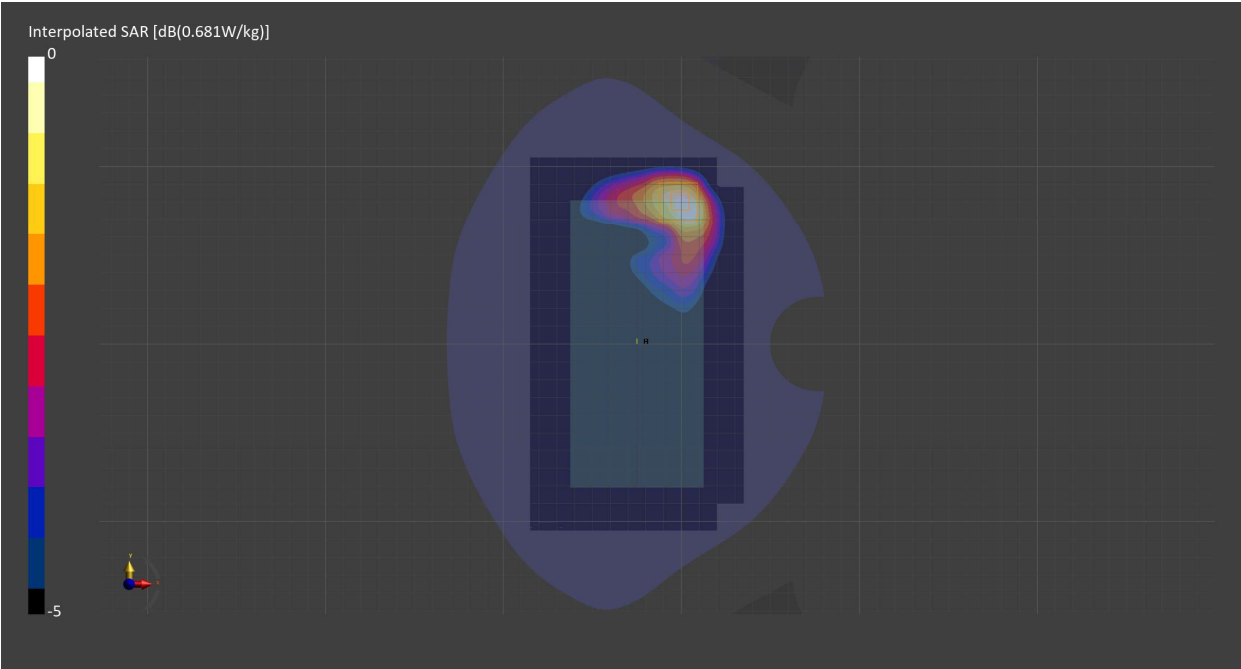

Measurement Report for Band n66, EDGE BOTTOM, Normal, CELL Main2

Exposure Conditions

|                                                                                                             |                           |                        |            |
|-------------------------------------------------------------------------------------------------------------|---------------------------|------------------------|------------|
| Band                                                                                                        | Band n66                  | TSL Permittivity       | 39.0       |
| Frequency [MHz]   Channel Number                                                                            | 1745.000   349000         | TSL Conductivity [S/m] | 1.34       |
| Group   UID                                                                                                 | 5G NR FR1 FDD   10939-AAC | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                                                                                           | 9.05                      | Test Distance [mm]     | 10.00      |
| Communication Configuration 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid AntennaCfg:SISO |                           |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-12-12 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-11-23     | TSL   Meas. Date | HBBL-600-10000   2024-Jan-16              |

Scans Setup

|                     |              |                    |
|---------------------|--------------|--------------------|
|                     | Area Scan    | Zoom Scan          |
| Grid Extents [mm]   | 51.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.5 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | N/A          | Yes                |
| M2/M1 [%]           |              | 85.4               |
| Dist 3dB Peak [mm]  |              | 10.8               |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.395     | 0.409     |
| psSAR10g [W/Kg]  | 0.218     | 0.221     |
| Power Drift [dB] | N/A       | -0.09     |

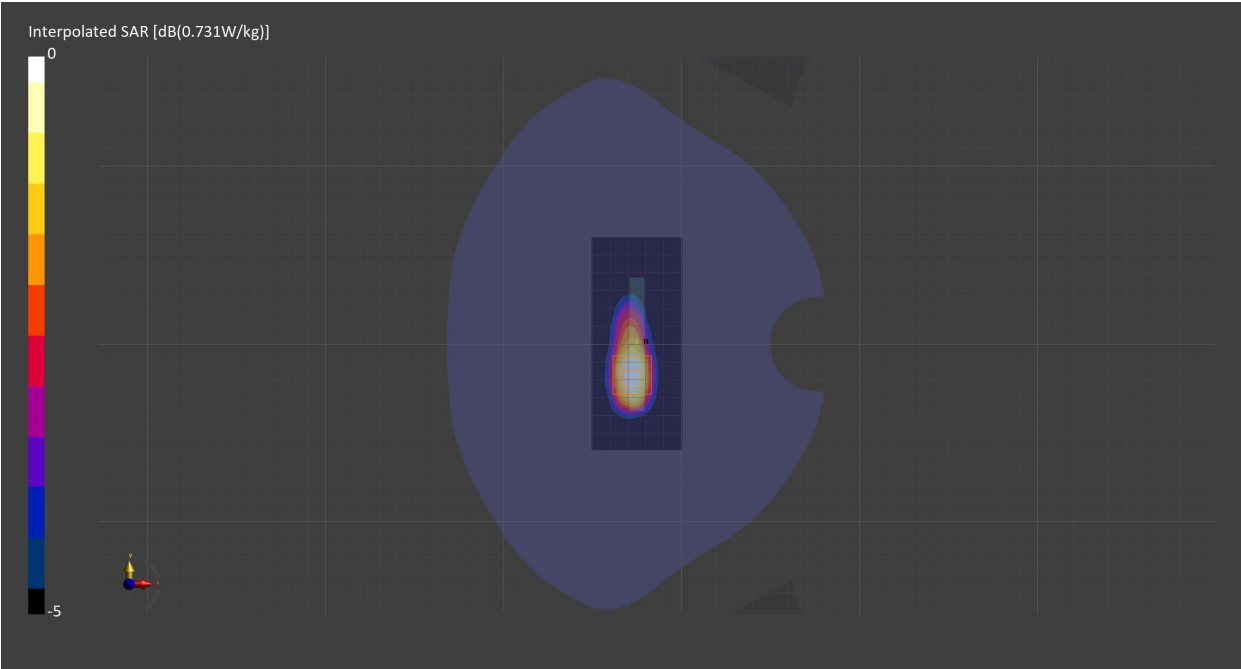

Measurement Report for WLAN 2.4GHz, CHEEK, Normal, WiFi Chain 0

Exposure Conditions

|                                  |                                                           |                        |                 |
|----------------------------------|-----------------------------------------------------------|------------------------|-----------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 38.8            |
| Frequency [MHz]   Channel Number | 2437.000   6                                              | TSL Conductivity [S/m] | 1.82            |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 7.66                                                      | Test Distance [mm]     | 0.00            |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-19              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 200.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 3.8 x 3.8 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 74.1               |
| Dist 3dB Peak [mm]  |               | 3.9                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.458     | 0.487     |
| psSAR10g [W/Kg]  | 0.174     | 0.177     |
| Power Drift [dB] | N/A       | 0.02      |

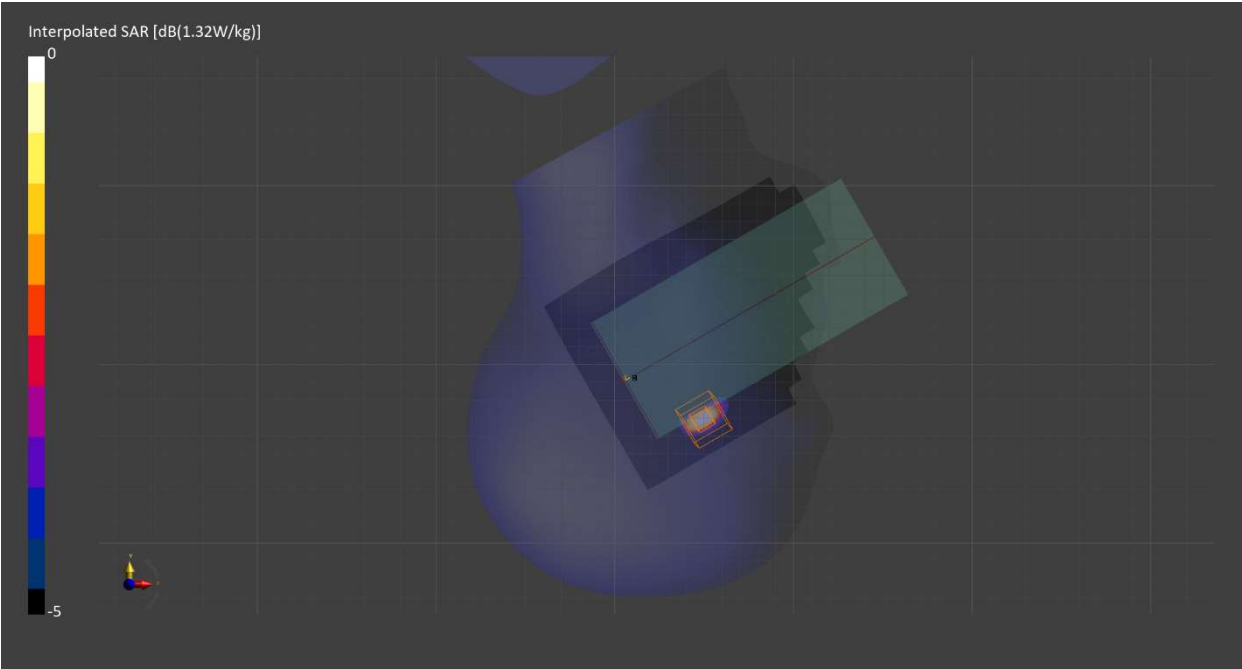

Measurement Report for WLAN 2.4GHz, BACK, Normal, WiFi Chain 0

Exposure Conditions

|                                  |                                                           |                        |            |
|----------------------------------|-----------------------------------------------------------|------------------------|------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 38.8       |
| Frequency [MHz]   Channel Number | 2437.000   6                                              | TSL Conductivity [S/m] | 1.82       |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 7.66                                                      | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-19              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 200.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 81.5               |
| Dist 3dB Peak [mm]  |               | 9.0                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.092     | 0.096     |
| psSAR10g [W/Kg]  | 0.044     | 0.044     |
| Power Drift [dB] | N/A       | -0.05     |

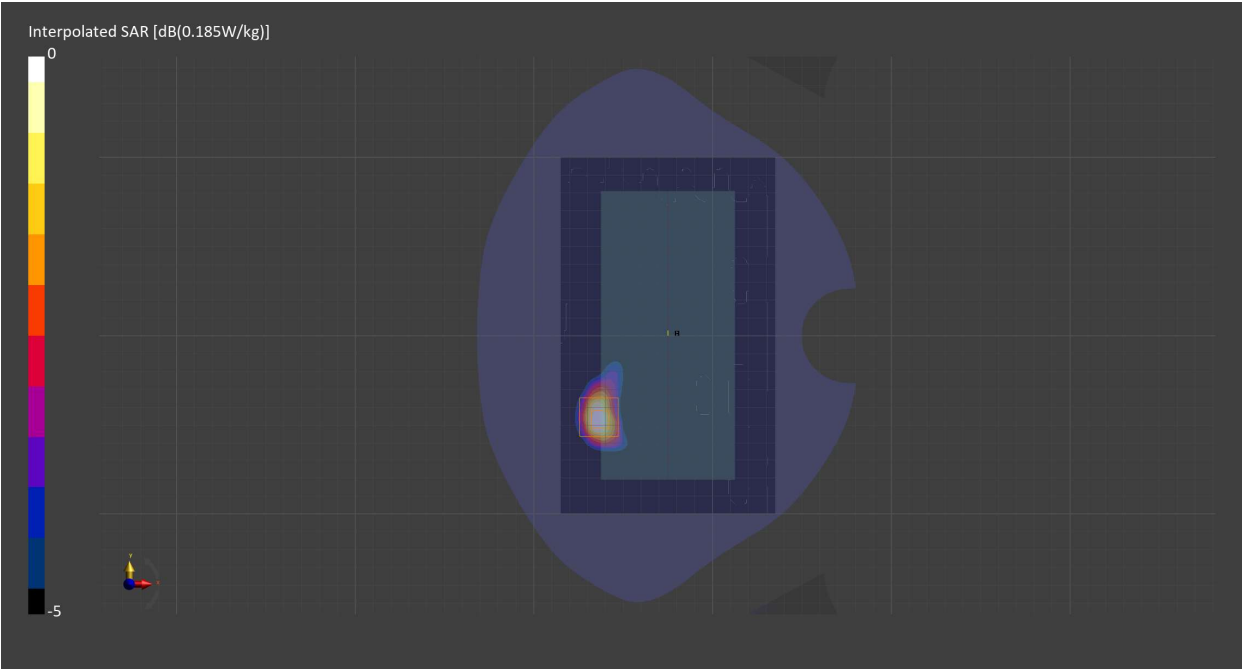

Measurement Report for WLAN 2.4GHz, EDGE LEFT, Normal, WiFi Chain 0

Exposure Conditions

|                                  |                                                           |                        |            |
|----------------------------------|-----------------------------------------------------------|------------------------|------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 38.8       |
| Frequency [MHz]   Channel Number | 2437.000   6                                              | TSL Conductivity [S/m] | 1.82       |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 7.66                                                      | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-19              |

Scans Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 51.0 x 200.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.5 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | N/A          | Yes                |
| M2/M1 [%]           |              | 81.0               |
| Dist 3dB Peak [mm]  |              | 8.1                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.155     | 0.156     |
| psSAR10g [W/Kg]  | 0.069     | 0.070     |
| Power Drift [dB] | N/A       | -0.01     |

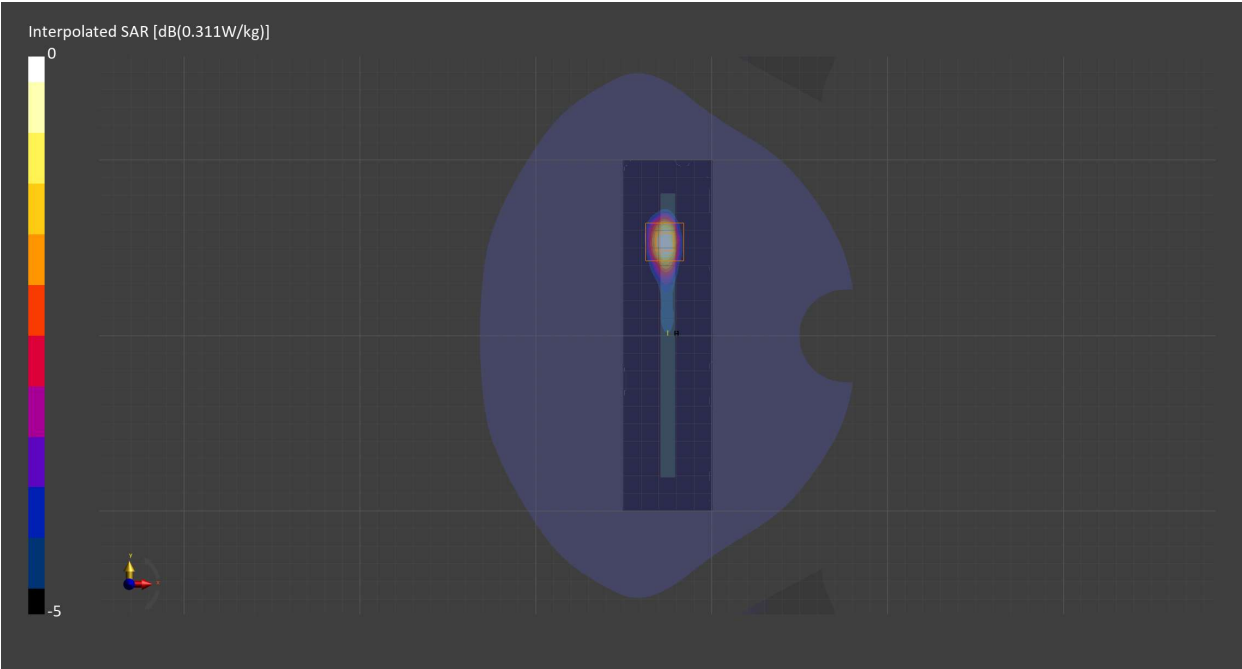

Measurement Report for WLAN 2.4GHz, CHEEK, Simul, WiFi Chain 0

Exposure Conditions

|                                  |                                                           |                        |                 |
|----------------------------------|-----------------------------------------------------------|------------------------|-----------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 38.8            |
| Frequency [MHz]   Channel Number | 2437.000   6                                              | TSL Conductivity [S/m] | 1.82            |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 7.66                                                      | Test Distance [mm]     | 0.00            |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-19              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 200.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.7 x 4.7 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 78.4               |
| Dist 3dB Peak [mm]  |               | 5.8                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.224     | 0.240     |
| psSAR10g [W/Kg]  | 0.089     | 0.089     |
| Power Drift [dB] | N/A       | 0.00      |

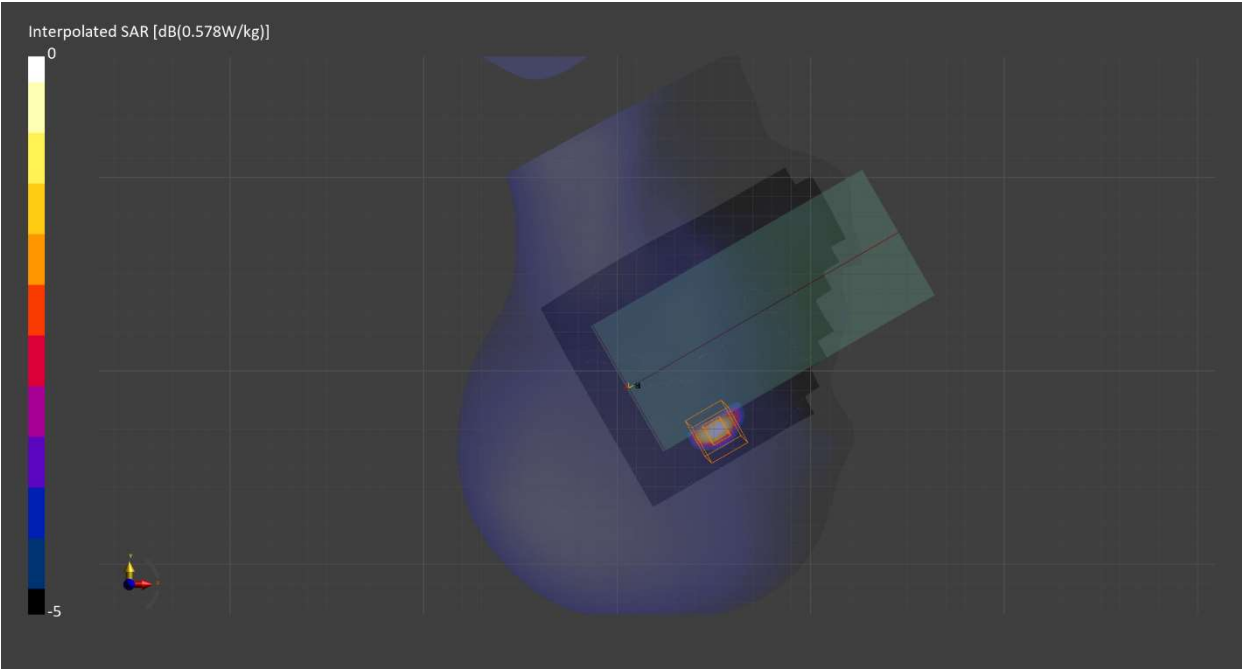

Measurement Report for WLAN 2.4GHz, BACK, Simul, WiFi Chain 0

Exposure Conditions

|                                  |                                                           |                        |            |
|----------------------------------|-----------------------------------------------------------|------------------------|------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 38.8       |
| Frequency [MHz]   Channel Number | 2437.000   6                                              | TSL Conductivity [S/m] | 1.82       |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 7.66                                                      | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |            |

Hardware Setup

|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2023-11-30 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1714   2023-11-22     | TSL   Meas. Date | HBBL-600-10000   2024-Feb-19              |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 120.0 x 200.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | N/A           | Yes                |
| M2/M1 [%]           |               | 78.5               |
| Dist 3dB Peak [mm]  |               | 8.0                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.051     | 0.051     |
| psSAR10g [W/Kg]  | 0.024     | 0.024     |
| Power Drift [dB] | N/A       | 0.15      |

