




FCC RADIO TEST REPORT

FCC ID : PY7-84526Y
Equipment : GSM/WCDMA/LTE Phone with BT, DTS/UNII
a/b/g/n/ac/ax, NFC and GNSS
Brand Name : Sony
Applicant : Sony Corporation
1-7-1 Konan, Minato-ku , Tokyo, Japan 108-0075
Manufacturer : Sony Corporation
1-7-1 Konan, Minato-ku , Tokyo, Japan 108-0075
Standard : FCC Part 15 Subpart C §15.247

The product was received on Feb. 03, 20026 and testing was performed from Mar. 05, 2026 to May 13, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 List of Measuring Equipment	22
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Result	
Appendix D. Duty Cycle Plots	
Appendix E. Spot Check Evaluation on PY7-84526Y	



History of this test report

Report No.	Version	Description	Issue Date
FR620305B	01	Initial issue of report	Jun. 29, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	Note
3.1	2.1049	99% Occupied Bandwidth	Pass	Note
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	Note
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	Note
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	6.83 dB under the limit at 41.64 MHz
3.6	15.207	AC Conducted Emission	Pass	5.90 dB under the limit at 1.05 MHz
3.7	15.203	Antenna Requirement	Pass	-

Note:

- ECR inquiry for data referencing from FCC ID: PY7-75158T has been approved by TCB. The ECR inquiry and the associated document are submitted in the confidential exhibit.
- The only difference between FCC ID: PY7-75158T and FCC ID: PY7-84526Y are Cellular Support Band & RF Circuit.
- For Radiated is Full test ,All the conducted test results are referenced from FCC ID: PY7-75158T (Sporton Test Report FR620304B), and spot check conducted power results to justify data referencing is presented in the Appendix E.

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng
Report Producer: Lili Lu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC and BDS/Galileo/GLONASS/GPS.
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS / Glonass / BDS / Galileo: PIFA Antenna NFC: LOOP Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	<Ant. 6>: -1.9 <Ant. 7>: -1.3

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	0.27	DCMBBAG0AWB00001	RF conducted measurement
	0.27	DCMBBAG0AWA00044	Radiated Spurious Emission
	0.27	DCMBBAG0AWA00074	AC Conducted Emission

Specification of Accessory		
AC Adapter	Brand Name	Sony
	Model Name	XQZ-UC1
Earphone	Brand Name	Sony
	Model Name	MDR-EX15AP
USB Cable 1	Brand Name	Sony
	Model Name	XQZ-UB1
USB Cable 2	Brand Name	Sony
	Model Name	UCB20

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_125Kbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_125Kbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_125Kbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_500Kbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_500Kbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_500Kbps
	Mode 7: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 8: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 9: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 10: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 11: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 12: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: BT Link + WLAN 2.4G Link + MPEG4 + USB Cable + Adapter + Earphone
Remark:	
1. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	
2. The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

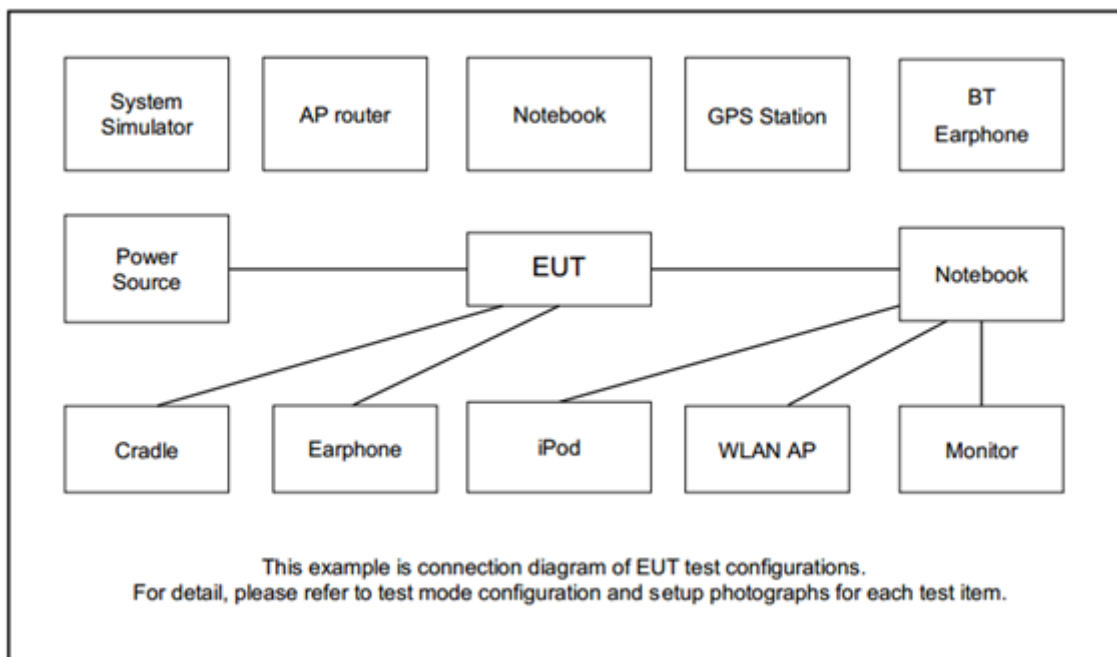

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	SonyEricsson	MW600	PY700A2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
3.	Earphone	Sony	MDR-EX15AP	N/A	UnShielded, 1.2m	N/A
4.	Notebook	Dell	Latitude 3420	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m

Remark: Applicant has ensured support unit would not be attached with the product on the market, support unit is provided by lab or applicant for testing.



2.5 EUT Operation Test Setup

The RF test items, utility "QRCT Version 4.0.181.1" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth VBW $\geq 3 * RBW$. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth, and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to FCC ID: PY7-75158T (Sporton Test Report FR620304B).

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to FCC ID: PY7-75158T (Sporton Test Report FR620304B).

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.2 PKPM1.
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator.
4. The path loss is compensated to the results for each measurement.
5. Set the maximum power setting and enable the EUT to transmit continuously.
6. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

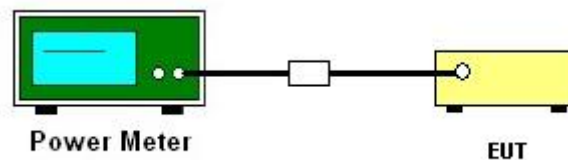

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = No faster than coupled (auto) time, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

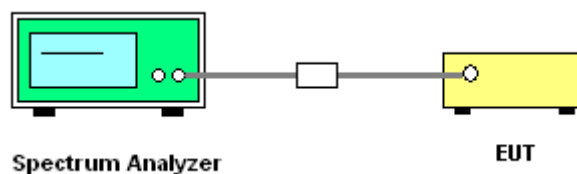

3.3.5 Test Result of Power Spectral Density

Please refer to FCC ID: PY7-75158T (Sporton Test Report FR620304B).

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

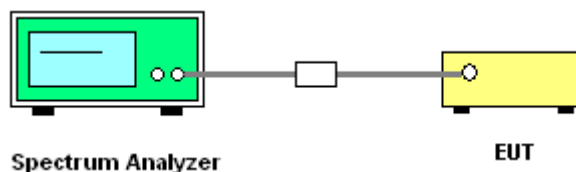

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to FCC ID: PY7-75158T (Sporton Test Report FR620304B)..

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to FCC ID: PY7-75158T (Sporton Test Report FR620304B).



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

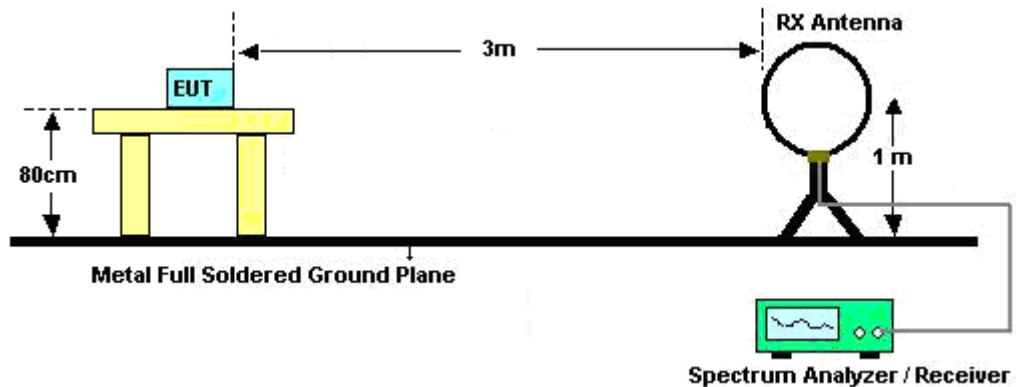


For radiated test from 30MHz to 1GHz

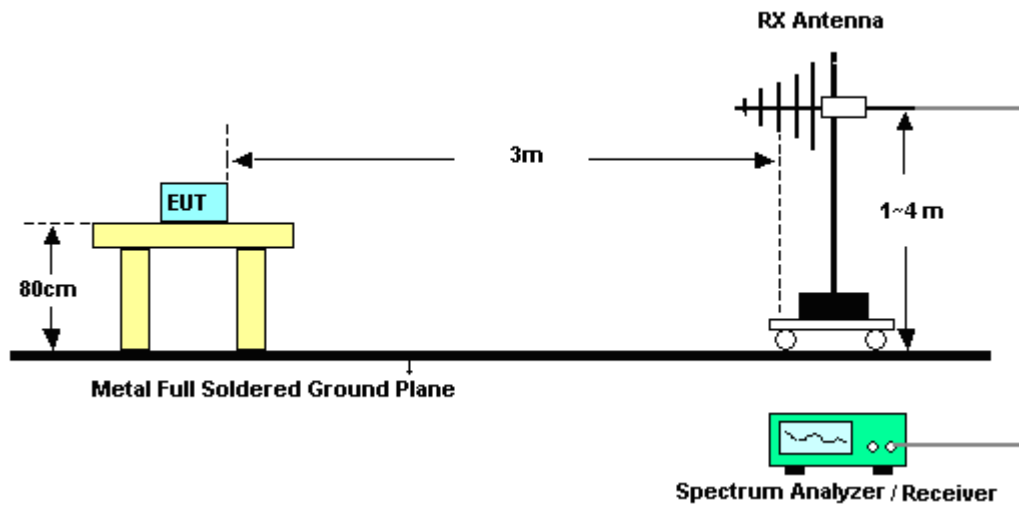

For radiated test from 1GHz to 18GHz

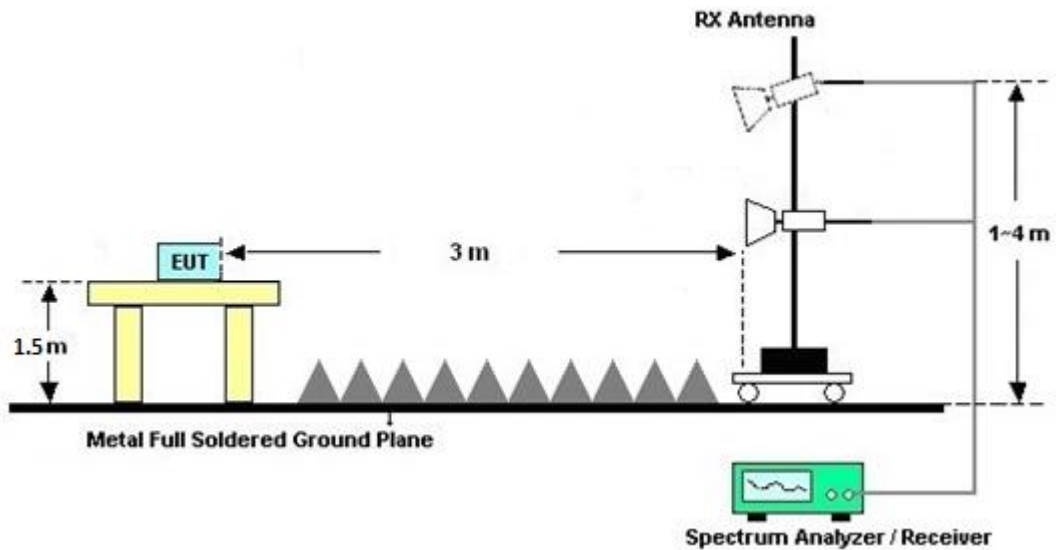

For radiated test above 18GHz

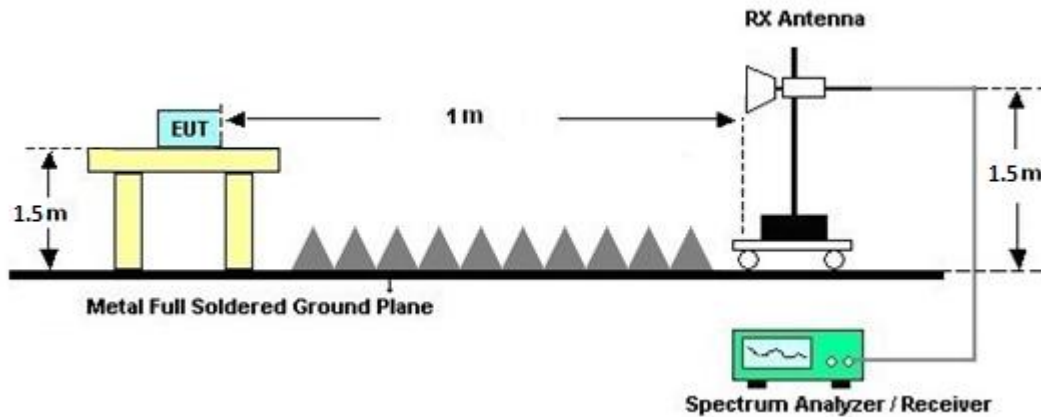

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
6. The frequency range from 150 kHz to 30 MHz is scanned.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

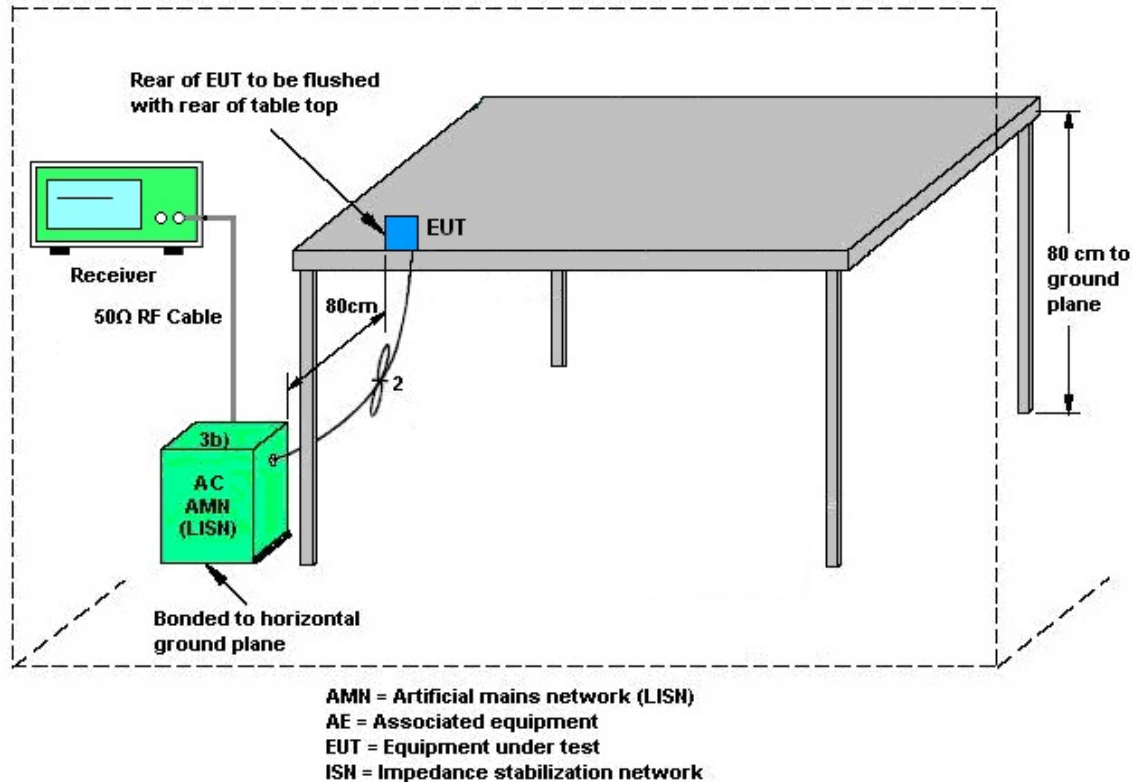

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Mar. 26, 2026	Nov. 03, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Nov. 12, 2025	Mar. 26, 2026	Nov. 11, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900067 (BOX7)	N/A	Jul. 02, 2025	Mar. 26, 2026	Jul. 01, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Mar. 26, 2026	N/A	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 37 (NO:167)	10MHz~6GHz	Nov. 14, 2025	Mar. 26, 2026	Nov. 13, 2026	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 05, 2026	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 05, 2026	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2025	Mar. 05, 2026	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 2, 2026	Mar. 05, 2026	Mar. 1, 2027	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Mar. 05, 2026	Mar. 23, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 21, 2025	Mar. 05, 2026	Oct. 20, 2026	Conduction (CO07-HY)

**FCC RADIO TEST REPORT****Report No. : FR620305B**

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna with 6dB pad	TESEQ & VGT	CBL 6111D & VFA_Z-04002-N-06	66925 & 24006	30MHz~1GHz	Apr. 12, 2026	May 10, 2026~ May 13, 2026	Apr. 11, 2027	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	May 10, 2026~ May 13, 2026	Dec. 10, 2026	Radiation (03CH11-HY)
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Sep. 15, 2025	May 10, 2026~ May 13, 2026	Sep. 14, 2026	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1225	18GHz~40GHz	Jul. 02, 2025	May 10, 2026~ May 13, 2026	Jul. 01, 2026	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 06, 2025	May 10, 2026~ May 13, 2026	Dec. 05, 2026	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 23, 2026	May 10, 2026~ May 13, 2026	Mar. 22, 2027	Radiation (03CH11-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18 G-56-01-A70	EC1900249	1GHz~18GHz	Jan. 20, 2026	May 10, 2026~ May 13, 2026	Jan. 19, 2027	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 26, 2025	May 10, 2026~ May 13, 2026	May 25, 2026	Radiation (03CH11-HY)
Signal Analyzer	Keysight	N9010A	MY54200485	10Hz~44GHz	Aug. 27, 2025	May 10, 2026~ May 13, 2026	Aug. 26, 2026	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Jul. 22, 2025	May 10, 2026~ May 13, 2026	Jul. 21, 2026	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	May 10, 2026~ May 13, 2026	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	May 10, 2026~ May 13, 2026	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	May 10, 2026~ May 13, 2026	N/A	Radiation (03CH11-HY)
Software	Audix	E3	RK-002391	N/A	N/A	May 10, 2026~ May 13, 2026	N/A	Radiation (03CH11-HY)
USB Data Logger	TECPEL	TR-32	HE17XM6804	N/A	Dec. 15, 2025	May 10, 2026~ May 13, 2026	Dec. 14, 2026	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	N/A	Aug. 26, 2025	May 10, 2026~ May 13, 2026	Aug. 25, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	Mar. 04, 2026	May 10, 2026~ May 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 04, 2026	May 10, 2026~ May 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 04, 2026	May 10, 2026~ May 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	805139 2	9K~30M	Mar. 04, 2026	May 10, 2026~ May 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	805139 2	30M~40G	Mar. 04, 2026	May 10, 2026~ May 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Sep. 09, 2025	May 10, 2026~ May 13, 2026	Sep. 08, 2026	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 09, 2025	May 10, 2026~ May 13, 2026	Sep. 08, 2026	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 09, 2025	May 10, 2026~ May 13, 2026	Sep. 08, 2026	Radiation (03CH11-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hank Hsu	Temperature:	21~25	°C
Test Date:	2026/3/26	Relative Humidity:	51~54	%

<Ant.6>

TEST RESULTS DATA

Peak Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	125Kbps	1	0	2402	8.80	30.00
BLE	125Kbps	1	19	2440	9.50	30.00
BLE	125Kbps	1	39	2480	9.20	30.00

TEST RESULTS DATA

Average Power Table

(Reporting Only)

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	125Kbps	1	0	2402	7.60
BLE	125Kbps	1	19	2440	8.20
BLE	125Kbps	1	39	2480	8.10

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	500Kbps	1	0	2402	8.90	30.00
BLE	500Kbps	1	19	2440	9.60	30.00
BLE	500Kbps	1	39	2480	9.20	30.00

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	500Kbps	1	0	2402	7.80
BLE	500Kbps	1	19	2440	8.40
BLE	500Kbps	1	39	2480	8.20

<Ant.6>

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	1Mbps	1	0	2402	8.90	30.00
BLE	1Mbps	1	19	2440	9.60	30.00
BLE	1Mbps	1	39	2480	9.20	30.00

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	7.70
BLE	1Mbps	1	19	2440	8.40
BLE	1Mbps	1	39	2480	8.10

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	2Mbps	1	0	2402	8.90	30.00
BLE	2Mbps	1	19	2440	9.70	30.00
BLE	2Mbps	1	39	2480	9.40	30.00

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	7.80
BLE	2Mbps	1	19	2440	8.50
BLE	2Mbps	1	39	2480	8.30

<Ant.7>

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	125Kbps	1	0	2402	10.00	30.00
BLE	125Kbps	1	19	2440	9.10	30.00
BLE	125Kbps	1	39	2480	9.60	30.00

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	125Kbps	1	0	2402	8.70
BLE	125Kbps	1	19	2440	7.80
BLE	125Kbps	1	39	2480	8.40

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	500Kbps	1	0	2402	10.00	30.00
BLE	500Kbps	1	19	2440	9.10	30.00
BLE	500Kbps	1	39	2480	9.50	30.00

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	500Kbps	1	0	2402	8.70
BLE	500Kbps	1	19	2440	7.90
BLE	500Kbps	1	39	2480	8.40

<Ant.7>

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	1Mbps	1	0	2402	10.10	30.00
BLE	1Mbps	1	19	2440	9.10	30.00
BLE	1Mbps	1	39	2480	9.60	30.00

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	8.80
BLE	1Mbps	1	19	2440	8.00
BLE	1Mbps	1	39	2480	8.50

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	2Mbps	1	0	2402	10.10	30.00
BLE	2Mbps	1	19	2440	9.20	30.00
BLE	2Mbps	1	39	2480	9.60	30.00

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	8.80
BLE	2Mbps	1	19	2440	8.00
BLE	2Mbps	1	39	2480	8.50




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Brian Chen	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 620305
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

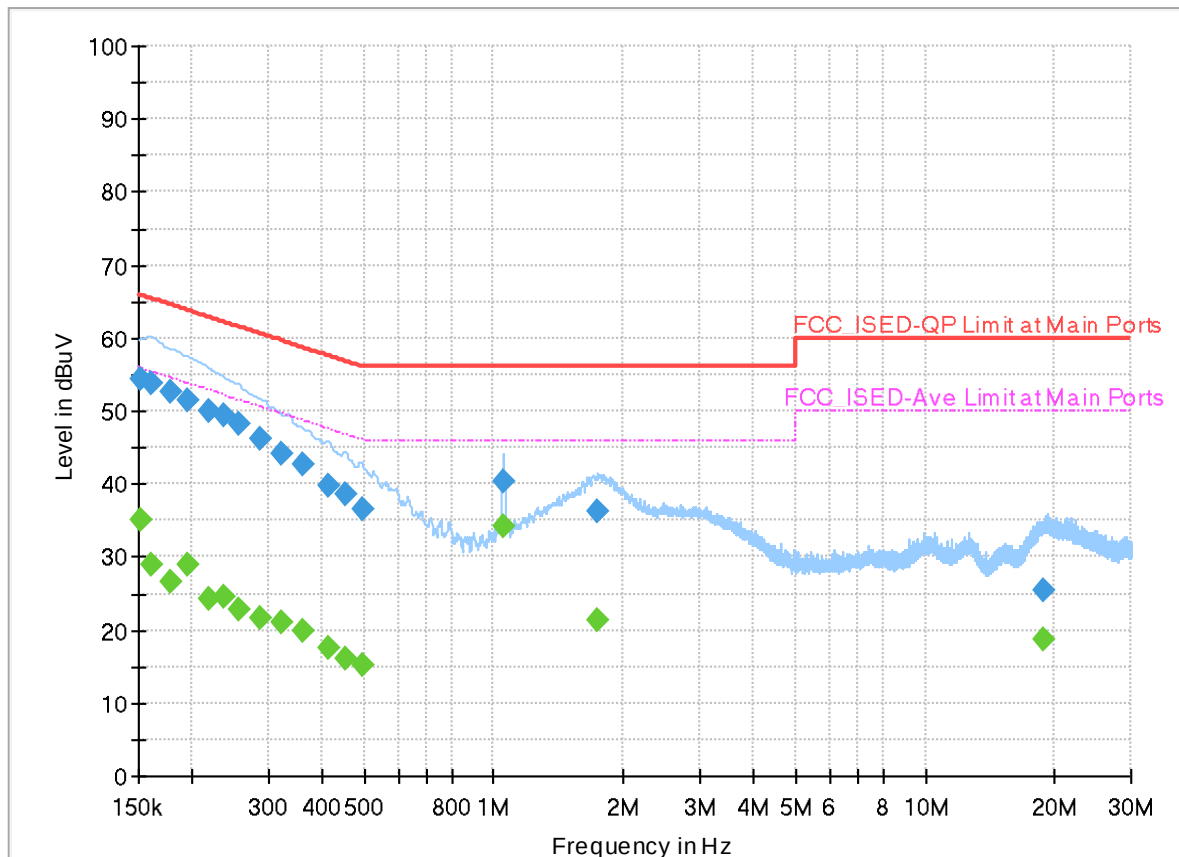

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	35.02	55.88	20.86	L1	ON	20.1
0.152250	54.39	---	65.88	11.49	L1	ON	20.1
0.161250	---	29.09	55.40	26.31	L1	ON	20.1
0.161250	53.79	---	65.40	11.61	L1	ON	20.1
0.177000	---	26.57	54.63	28.06	L1	ON	20.1
0.177000	52.51	---	64.63	12.12	L1	ON	20.1
0.195000	---	29.09	53.82	24.73	L1	ON	20.1
0.195000	51.44	---	63.82	12.38	L1	ON	20.1
0.217500	---	24.34	52.91	28.57	L1	ON	20.1
0.217500	50.01	---	62.91	12.90	L1	ON	20.1
0.235500	---	24.53	52.25	27.72	L1	ON	20.1
0.235500	49.29	---	62.25	12.96	L1	ON	20.1
0.255750	---	22.68	51.57	28.89	L1	ON	20.1
0.255750	48.27	---	61.57	13.30	L1	ON	20.1
0.287250	---	21.61	50.60	28.99	L1	ON	20.0
0.287250	46.07	---	60.60	14.53	L1	ON	20.0
0.323250	---	20.97	49.62	28.65	L1	ON	20.0
0.323250	44.06	---	59.62	15.56	L1	ON	20.0
0.359250	---	20.01	48.75	28.74	L1	ON	20.0

0.359250	42.80	---	58.75	15.95	L1	ON	20.0
0.415500	---	17.45	47.54	30.09	L1	ON	20.0
0.415500	39.76	---	57.54	17.78	L1	ON	20.0
0.453750	---	16.18	46.81	30.63	L1	ON	20.0
0.453750	38.65	---	56.81	18.16	L1	ON	20.0
0.498750	---	15.34	46.02	30.68	L1	ON	20.0
0.498750	36.63	---	56.02	19.39	L1	ON	20.0
1.050000	---	34.19	46.00	11.81	L1	ON	20.0
1.050000	40.43	---	56.00	15.57	L1	ON	20.0
1.747500	---	21.45	46.00	24.55	L1	ON	20.0
1.747500	36.14	---	56.00	19.86	L1	ON	20.0
18.714750	---	18.58	50.00	31.42	L1	ON	20.8
18.714750	25.32	---	60.00	34.68	L1	ON	20.8

EUT Information

Report NO : 620305
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

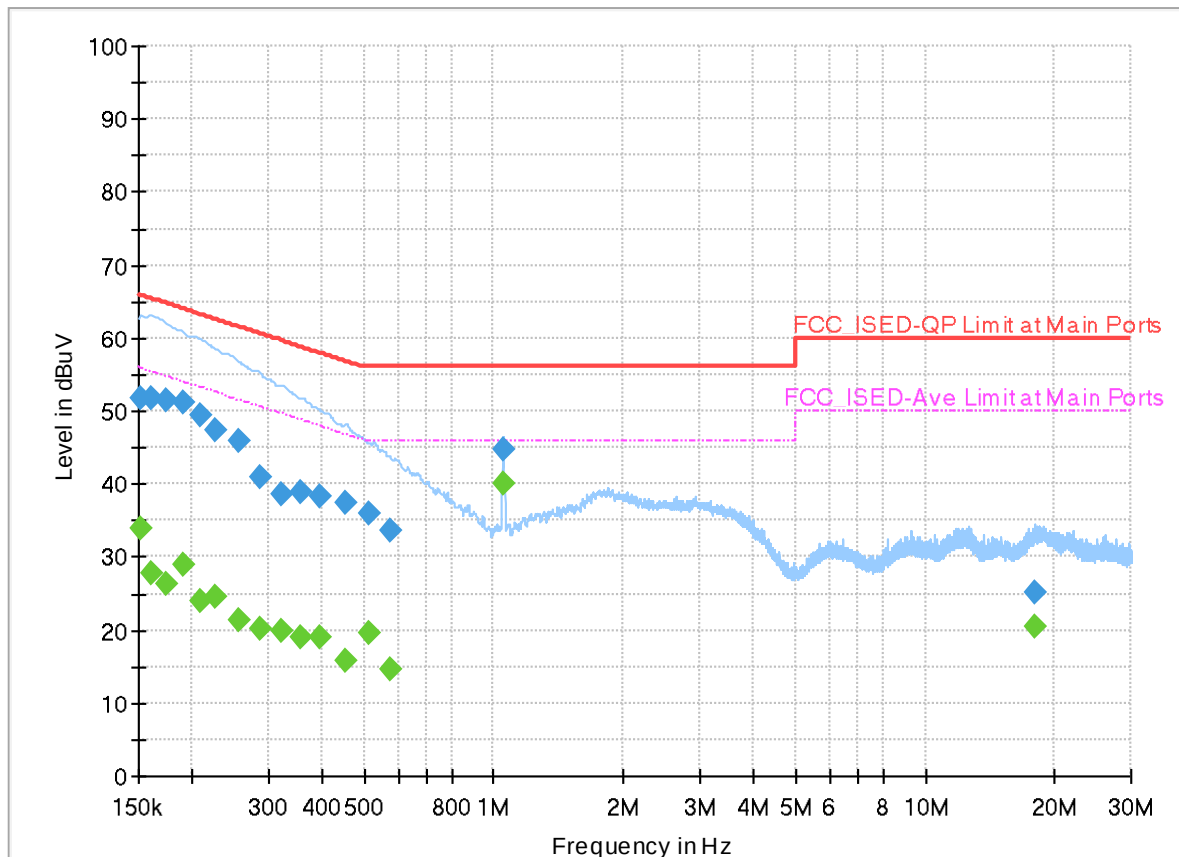

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	33.84	55.88	22.04	N	ON	20.1
0.152250	51.89	---	65.88	13.99	N	ON	20.1
0.161250	---	27.82	55.40	27.58	N	ON	20.1
0.161250	51.71	---	65.40	13.69	N	ON	20.1
0.174750	---	26.17	54.73	28.56	N	ON	20.1
0.174750	51.43	---	64.73	13.30	N	ON	20.1
0.190500	---	29.01	54.02	25.01	N	ON	20.1
0.190500	51.12	---	64.02	12.90	N	ON	20.1
0.208500	---	23.87	53.27	29.40	N	ON	20.1
0.208500	49.48	---	63.27	13.79	N	ON	20.1
0.226500	---	24.64	52.58	27.94	N	ON	20.1
0.226500	47.46	---	62.58	15.12	N	ON	20.1
0.255750	---	21.47	51.57	30.10	N	ON	20.1
0.255750	45.92	---	61.57	15.65	N	ON	20.1
0.287250	---	20.21	50.60	30.39	N	ON	20.0
0.287250	41.08	---	60.60	19.52	N	ON	20.0
0.321000	---	19.87	49.68	29.81	N	ON	20.0
0.321000	38.73	---	59.68	20.95	N	ON	20.0
0.357000	---	19.14	48.80	29.66	N	ON	20.0

0.357000	39.00	---	58.80	19.80	N	ON	20.0
0.395250	---	19.07	47.95	28.88	N	ON	20.0
0.395250	38.31	---	57.95	19.64	N	ON	20.0
0.453750	---	15.73	46.81	31.08	N	ON	20.0
0.453750	37.40	---	56.81	19.41	N	ON	20.0
0.512250	---	19.48	46.00	26.52	N	ON	20.0
0.512250	35.99	---	56.00	20.01	N	ON	20.0
0.575250	---	14.63	46.00	31.37	N	ON	20.0
0.575250	33.50	---	56.00	22.50	N	ON	20.0
1.052250	---	40.10	46.00	5.90	N	ON	20.0
1.052250	44.67	---	56.00	11.33	N	ON	20.0
17.981250	---	20.38	50.00	29.62	N	ON	20.8
17.981250	25.14	---	60.00	34.86	N	ON	20.8



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Daniel Lee, Bill Chang, Fu Chen, and Troye Hsieh	Temperature :	20.1~21.9°C
		Relative Humidity :	50.1~66.9%

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 23	2400-2483.5	6	Bluetooth-LE	00	2402	125kbps	-	-
Mode 24	2400-2483.5	6	Bluetooth-LE	19	2440	125kbps	-	-
Mode 25	2400-2483.5	6	Bluetooth-LE	39	2480	125kbps	-	-
Mode 26	2400-2483.5	6	Bluetooth-LE	00	2402	500kbps	-	-
Mode 27	2400-2483.5	6	Bluetooth-LE	19	2440	500kbps	-	-
Mode 28	2400-2483.5	6	Bluetooth-LE	39	2480	500kbps	-	-
Mode 29	2400-2483.5	6	Bluetooth-LE	00	2402	1Mbps	-	-
Mode 30	2400-2483.5	6	Bluetooth-LE	19	2440	1Mbps	-	-
Mode 31	2400-2483.5	6	Bluetooth-LE	39	2480	1Mbps	-	-
Mode 32	2400-2483.5	6	Bluetooth-LE	00	2402	2Mbps	-	-
Mode 33	2400-2483.5	6	Bluetooth-LE	19	2440	2Mbps	-	-



Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 34	2400-2483.5	6	Bluetooth-LE	39	2480	2Mbps	-	-
Mode 35	2400-2483.5	6	Bluetooth-LE	39	2480	2Mbps	-	LF
Mode 36	2400-2483.5	6	Bluetooth-LE	39	2480	2Mbps	-	SHF

**FCC RADIO TEST REPORT**

Report No. :FR620305B

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 37	2400-2483.5	7	Bluetooth-LE	00	2402	125kbps	-	-
Mode 38	2400-2483.5	7	Bluetooth-LE	19	2440	125kbps	-	-
Mode 39	2400-2483.5	7	Bluetooth-LE	39	2480	125kbps	-	-
Mode 40	2400-2483.5	7	Bluetooth-LE	00	2402	500kbps	-	-
Mode 41	2400-2483.5	7	Bluetooth-LE	19	2440	500kbps	-	-
Mode 42	2400-2483.5	7	Bluetooth-LE	39	2480	500kbps	-	-
Mode 43	2400-2483.5	7	Bluetooth-LE	00	2402	1Mbps	-	-
Mode 44	2400-2483.5	7	Bluetooth-LE	19	2440	1Mbps	-	-
Mode 45	2400-2483.5	7	Bluetooth-LE	39	2480	1Mbps	-	-
Mode 46	2400-2483.5	7	Bluetooth-LE	00	2402	2Mbps	-	-
Mode 47	2400-2483.5	7	Bluetooth-LE	19	2440	2Mbps	-	-



FCC RADIO TEST REPORT

Report No. :FR620305B

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 48	2400-2483.5	7	Bluetooth-LE	39	2480	2Mbps	-	-
Mode 49	2400-2483.5	7	Bluetooth-LE	19	2440	2Mbps	-	LF
Mode 50	2400-2483.5	7	Bluetooth-LE	19	2440	2Mbps	-	SHF

C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
23	Bluetooth-LE	00	2337.32	43.03	54.00	-10.97	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	00	4804.00	35.27	54.00	-18.73	V	Avg.	Pass	-	Harmonic
24	Bluetooth-LE	19	2492.20	43.04	54.00	-10.96	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE	19	7320.00	44.28	74.00	-29.72	V	Peak	Pass	-	Harmonic
25	Bluetooth-LE	39	2496.22	43.26	54.00	-10.74	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	39	7440.00	43.67	74.00	-30.33	V	Peak	Pass	-	Harmonic
26	Bluetooth-LE	00	2386.18	42.80	54.00	-11.20	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE	00	4804.00	43.99	74.00	-30.01	V	Peak	Pass	-	Harmonic
27	Bluetooth-LE	19	2496.46	43.59	54.00	-10.41	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	19	7320.00	44.37	74.00	-29.63	V	Peak	Pass	-	Harmonic
28	Bluetooth-LE	39	2498.46	43.70	54.00	-10.30	V	Avg.	Pass	-	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
28	Bluetooth-LE	39	7440.00	43.60	74.00	-30.40	H	Peak	Pass	-	Harmonic
29	Bluetooth-LE	00	2385.07	43.69	54.00	-10.31	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE	00	4804.00	42.68	74.00	-31.32	V	Peak	Pass	-	Harmonic
30	Bluetooth-LE	19	2494.96	44.74	54.00	-9.26	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	19	7320.00	43.52	74.00	-30.48	V	Peak	Pass	-	Harmonic
31	Bluetooth-LE	39	2495.68	44.64	54.00	-9.36	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	39	7440.00	44.12	74.00	-29.88	V	Peak	Pass	-	Harmonic
32	Bluetooth-LE	00	2358.39	44.39	54.00	-9.61	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	00	4804.00	34.27	54.00	-19.73	V	Avg.	Pass	-	Harmonic
33	Bluetooth-LE	19	2490.52	45.22	54.00	-8.78	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	19	7320.00	44.13	74.00	-29.87	H	Peak	Pass	-	Harmonic

**FCC RADIO TEST REPORT**

Report No. :FR620305B

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
34	Bluetooth-LE	39	2485.40	45.34	54.00	-8.66	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE	39	7440.00	44.73	74.00	-29.27	H	Peak	Pass	-	Harmonic
35	LF	39	41.64	33.17	40.00	-6.83	V	Peak	Pass	-	LF
36	SHF	39	26027.57	43.57	74.00	-30.43	V	Peak	Pass	-	SHF

**FCC RADIO TEST REPORT**

Report No. :FR620305B

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
37	Bluetooth-LE	00	2389.30	42.43	54.00	-11.57	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	00	4804.00	43.19	74.00	-30.81	V	Peak	Pass	-	Harmonic
38	Bluetooth-LE	19	2495.92	43.16	54.00	-10.84	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE	19	7320.00	44.46	74.00	-29.54	H	Peak	Pass	-	Harmonic
39	Bluetooth-LE	39	2496.22	43.09	54.00	-10.91	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	39	7440.00	43.64	74.00	-30.36	H	Peak	Pass	-	Harmonic
40	Bluetooth-LE	00	2384.80	42.87	54.00	-11.13	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	00	4804.00	43.61	74.00	-30.39	V	Peak	Pass	-	Harmonic
41	Bluetooth-LE	19	2493.04	43.69	54.00	-10.31	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE	19	7320.00	44.10	74.00	-29.90	V	Peak	Pass	-	Harmonic
42	Bluetooth-LE	39	2499.80	43.77	54.00	-10.23	H	Avg.	Pass	-	Band Edge

**FCC RADIO TEST REPORT**

Report No. :FR620305B

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
42	Bluetooth-LE	39	7440.00	43.29	74.00	-30.71	H	Peak	Pass	-	Harmonic
43	Bluetooth-LE	00	2349.56	43.74	54.00	-10.26	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	00	4804.00	43.56	74.00	-30.44	V	Peak	Pass	-	Harmonic
44	Bluetooth-LE	19	2497.42	44.59	54.00	-9.41	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	19	7320.00	43.87	74.00	-30.13	H	Peak	Pass	-	Harmonic
45	Bluetooth-LE	39	2494.54	44.71	54.00	-9.29	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	39	7440.00	43.82	74.00	-30.18	H	Peak	Pass	-	Harmonic
46	Bluetooth-LE	00	2373.57	43.75	54.00	-10.25	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	00	4804.00	44.39	74.00	-29.61	V	Peak	Pass	-	Harmonic
47	Bluetooth-LE	19	2490.94	44.77	54.00	-9.23	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE	19	7320.00	44.67	74.00	-29.33	H	Peak	Pass	-	Harmonic

**FCC RADIO TEST REPORT**

Report No. :FR620305B

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
48	Bluetooth-LE	39	2498.72	44.73	54.00	-9.27	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE	39	7440.00	44.77	74.00	-29.23	H	Peak	Pass	-	Harmonic
49	LF	19	41.64	33.15	40.00	-6.85	V	Peak	Pass	-	LF
50	SHF	19	26249.82	44.24	74.00	-29.76	V	Peak	Pass	-	SHF



Mode	23																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2026-05-11 Frequency (MHz) Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2365.38</td><td>53.47</td><td>74.00</td><td>-20.53</td><td>42.63</td><td>27.20</td><td>6.61</td><td>33.09</td><td>10.12</td><td>200</td><td>147 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2365.38	53.47	74.00	-20.53	42.63	27.20	6.61	33.09	10.12	200	147 Peak	Level (dBuV/m) Date: 2026-05-11 Frequency (MHz) Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>99.18</td><td>-----</td><td>-----</td><td>88.14</td><td>27.32</td><td>6.66</td><td>33.06</td><td>10.12</td><td>200</td><td>147 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	99.18	-----	-----	88.14	27.32	6.66	33.06	10.12	200	147 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2365.38	53.47	74.00	-20.53	42.63	27.20	6.61	33.09	10.12	200	147 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2402.00	99.18	-----	-----	88.14	27.32	6.66	33.06	10.12	200	147 Peak																																																																																							
Avg	Level (dBuV/m) Date: 2026-05-11 Frequency (MHz) Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.330kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2365.94</td><td>42.41</td><td>54.00</td><td>-11.59</td><td>31.57</td><td>27.20</td><td>6.61</td><td>33.09</td><td>10.12</td><td>200</td><td>147 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2365.94	42.41	54.00	-11.59	31.57	27.20	6.61	33.09	10.12	200	147 Average	Level (dBuV/m) Date: 2026-05-11 Frequency (MHz) Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.330kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>98.29</td><td>-----</td><td>-----</td><td>87.25</td><td>27.32</td><td>6.66</td><td>33.06</td><td>10.12</td><td>200</td><td>147 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	98.29	-----	-----	87.25	27.32	6.66	33.06	10.12	200	147 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2365.94	42.41	54.00	-11.59	31.57	27.20	6.61	33.09	10.12	200	147 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2402.00	98.29	-----	-----	87.25	27.32	6.66	33.06	10.12	200	147 Average																																																																																							







Mode	23																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																									
ANT	6																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2331.16	53.88	74.00	-20.12	43.12	27.20	6.56	33.12	10.12	300	194 Peak		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.36	-----	-----	82.32	27.32	6.66	33.06	10.12	300	194 Peak				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2331.16	53.88	74.00	-20.12	43.12	27.20	6.56	33.12	10.12	300	194 Peak																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	93.36	-----	-----	82.32	27.32	6.66	33.06	10.12	300	194 Peak																																																																															
Avg	Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.330kHz SMT:Auto						Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.330kHz SMT:Auto																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2337.32	43.03	54.00	-10.97	32.25	27.20	6.57	33.11	10.12	300	194 Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.61	-----	-----	81.57	27.32	6.66	33.06	10.12	300	194 Average				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2337.32	43.03	54.00	-10.97	32.25	27.20	6.57	33.11	10.12	300	194 Average																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	92.61	-----	-----	81.57	27.32	6.66	33.06	10.12	300	194 Average																																																																															



Mode	23																																																																																																			
	Harmonic																																																																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																			
ANT	6																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2026-05-12 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.69</td><td>74.00</td><td>-33.31</td><td>64.30</td><td>32.32</td><td>10.29</td><td>67.17</td><td>0.95</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.69	74.00	-33.31	64.30	32.32	10.29	67.17	0.95	--	Peak	Level (dBuV/m) Date: 2026-05-12 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>45.26</td><td>74.00</td><td>-28.74</td><td>68.87</td><td>32.32</td><td>10.29</td><td>67.17</td><td>0.95</td><td>200</td><td>2 Peak</td></tr><tr><td>2</td><td>4804.00</td><td>35.27</td><td>54.00</td><td>-18.73</td><td>58.88</td><td>32.32</td><td>10.29</td><td>67.17</td><td>0.95</td><td>200</td><td>2 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	45.26	74.00	-28.74	68.87	32.32	10.29	67.17	0.95	200	2 Peak	2	4804.00	35.27	54.00	-18.73	58.88	32.32	10.29	67.17	0.95	200	2 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4804.00	40.69	74.00	-33.31	64.30	32.32	10.29	67.17	0.95	--	Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4804.00	45.26	74.00	-28.74	68.87	32.32	10.29	67.17	0.95	200	2 Peak																																																																																									
2	4804.00	35.27	54.00	-18.73	58.88	32.32	10.29	67.17	0.95	200	2 Average																																																																																									

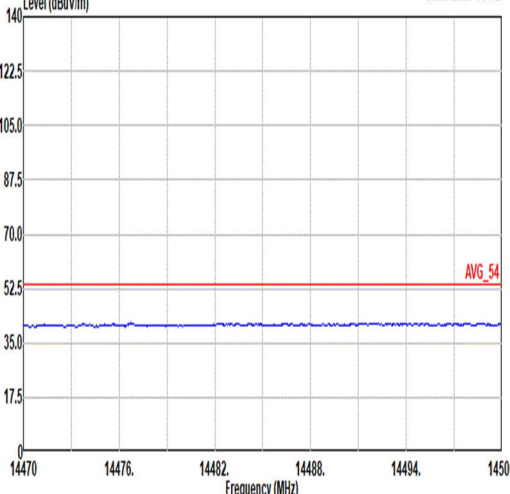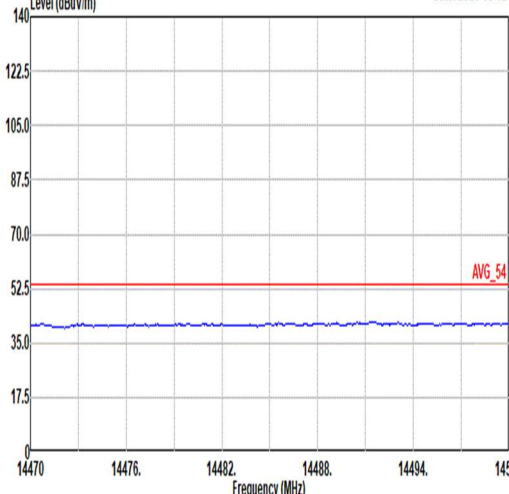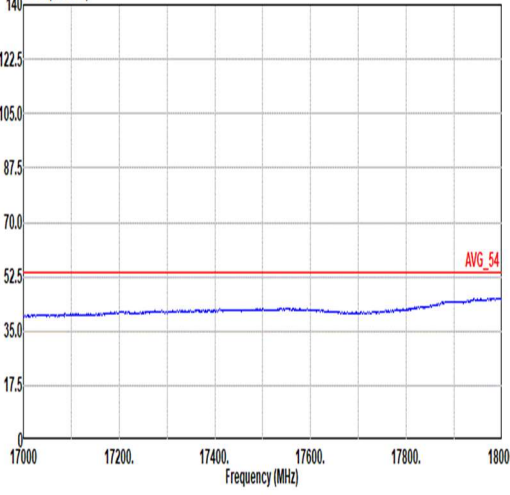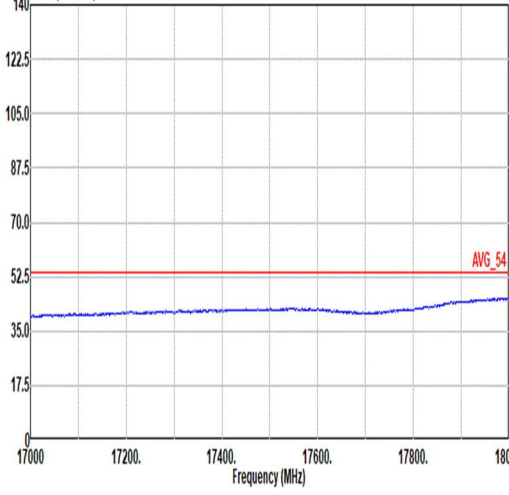

Mode	23	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz	
ANT	6	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL
	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL



Mode	24																																																																																																	
	Band Edge - L																																																																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2377.47</td><td>53.55</td><td>74.00</td><td>-20.45</td><td>42.68</td><td>27.20</td><td>6.63</td><td>33.08</td><td>10.12</td><td>200</td><td>143 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2377.47	53.55	74.00	-20.45	42.68	27.20	6.63	33.08	10.12	200	143 Peak	Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>98.44</td><td>-----</td><td>-----</td><td>87.14</td><td>27.50</td><td>6.72</td><td>33.04</td><td>10.12</td><td>200</td><td>143 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	98.44	-----	-----	87.14	27.50	6.72	33.04	10.12	200	143 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2377.47	53.55	74.00	-20.45	42.68	27.20	6.63	33.08	10.12	200	143 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2440.00	98.44	-----	-----	87.14	27.50	6.72	33.04	10.12	200	143 Peak																																																																																							
Avg	Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.330kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2365.90</td><td>42.42</td><td>54.00</td><td>-11.58</td><td>31.58</td><td>27.20</td><td>6.61</td><td>33.09</td><td>10.12</td><td>200</td><td>143 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2365.90	42.42	54.00	-11.58	31.58	27.20	6.61	33.09	10.12	200	143 Average	Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.330kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>97.70</td><td>-----</td><td>-----</td><td>86.48</td><td>27.50</td><td>6.72</td><td>33.04</td><td>10.12</td><td>200</td><td>143 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	97.70	-----	-----	86.48	27.50	6.72	33.04	10.12	200	143 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2365.90	42.42	54.00	-11.58	31.58	27.20	6.61	33.09	10.12	200	143 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2440.00	97.70	-----	-----	86.48	27.50	6.72	33.04	10.12	200	143 Average																																																																																							







FCC RADIO TEST REPORT

Report No. :FR620305B

Mode	24	
	Band Edge - R	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz	
ANT	6	
Pol.	Horizontal	Fundamental
Peak	</	

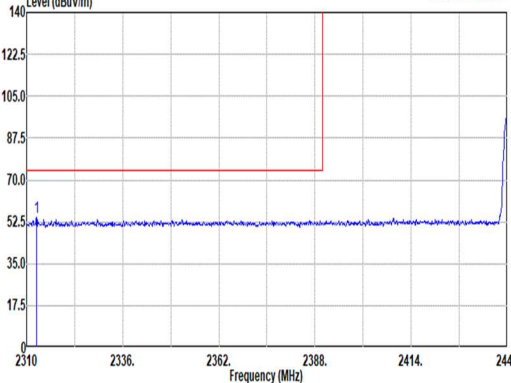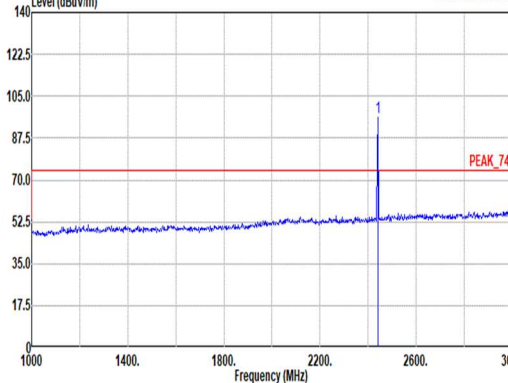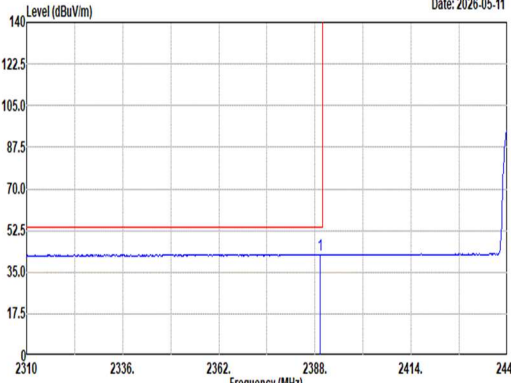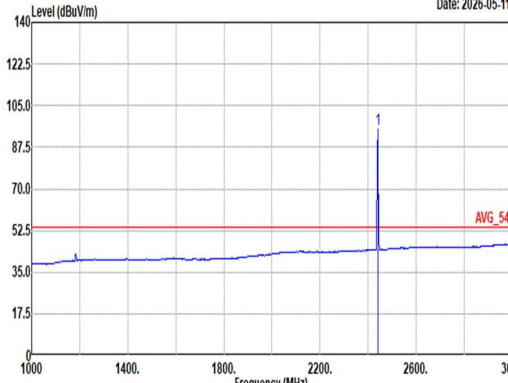

Mode	24																																																																																							
	Band Edge - L																																																																																							
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																							
ANT	6																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	Level (dBuV/m) Date: 2026-05-11  Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2312.73</td><td>54.18</td><td>74.00</td><td>-19.82</td><td>43.45</td><td>27.20</td><td>6.54</td><td>33.13</td><td>10.12</td><td>396</td><td>202 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2312.73	54.18	74.00	-19.82	43.45	27.20	6.54	33.13	10.12	396	202 Peak	Level (dBuV/m) Date: 2026-05-11  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>96.12</td><td>-----</td><td>-----</td><td>84.82</td><td>27.50</td><td>6.72</td><td>33.04</td><td>10.12</td><td>396</td><td>202 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	96.12	-----	-----	84.82	27.50	6.72	33.04	10.12	396	202 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2312.73	54.18	74.00	-19.82	43.45	27.20	6.54	33.13	10.12	396	202 Peak																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2440.00	96.12	-----	-----	84.82	27.50	6.72	33.04	10.12	396	202 Peak																																																																													
Avg	Level (dBuV/m) Date: 2026-05-11  Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.330kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.43</td><td>42.34</td><td>54.00</td><td>-11.66</td><td>31.35</td><td>27.29</td><td>6.65</td><td>33.07</td><td>10.12</td><td>396</td><td>202 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	42.34	54.00	-11.66	31.35	27.29	6.65	33.07	10.12	396	202 Average	Level (dBuV/m) Date: 2026-05-11  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.330kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>95.16</td><td>-----</td><td>-----</td><td>83.86</td><td>27.50</td><td>6.72</td><td>33.04</td><td>10.12</td><td>396</td><td>202 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	95.16	-----	-----	83.86	27.50	6.72	33.04	10.12	396	202 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2389.43	42.34	54.00	-11.66	31.35	27.29	6.65	33.07	10.12	396	202 Average																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2440.00	95.16	-----	-----	83.86	27.50	6.72	33.04	10.12	396	202 Average																																																																													







Mode	24																																							
	Band Edge - R																																							
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																							
ANT	6																																							
Pol.	Vertical	Fundamental																																						
Peak	Level (dBuV/m) Date: 2026-05-11 PEAK_BE_74 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2495.44</td><td>54.17</td><td>74.00</td><td>-19.83</td><td>42.44</td><td>27.80</td><td>6.80</td><td>32.99</td><td>10.12</td><td>396</td><td>202</td><td>Peak</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2495.44	54.17	74.00	-19.83	42.44	27.80	6.80	32.99	10.12	396	202	Peak	Blank
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																												
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																													
1 2495.44	54.17	74.00	-19.83	42.44	27.80	6.80	32.99	10.12	396	202	Peak																													
Avg	Level (dBuV/m) Date: 2026-05-11 AVG_BE_54 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.330kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2489.80</td><td>43.03</td><td>54.00</td><td>-10.97</td><td>31.32</td><td>27.80</td><td>6.79</td><td>33.00</td><td>10.12</td><td>396</td><td>202</td><td>Average</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2489.80	43.03	54.00	-10.97	31.32	27.80	6.79	33.00	10.12	396	202	Average	Blank
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																												
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																													
1 2489.80	43.03	54.00	-10.97	31.32	27.80	6.79	33.00	10.12	396	202	Average																													



Mode	24																																																																																																										
	Harmonic																																																																																																										
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																										
ANT	6																																																																																																										
Pol.	Horizontal						Vertical																																																																																																				
Peak Avg	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>41.01</td><td>74.00</td><td>-32.99</td><td>63.88</td><td>32.62</td><td>10.67</td><td>67.11</td><td>0.95</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>7320.00</td><td>43.83</td><td>74.00</td><td>-30.17</td><td>59.14</td><td>36.82</td><td>13.78</td><td>66.10</td><td>0.19</td><td>--</td><td>-- Peak</td></tr></tbody></table>							Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4880.00	41.01	74.00	-32.99	63.88	32.62	10.67	67.11	0.95	--	-- Peak	2	7320.00	43.83	74.00	-30.17	59.14	36.82	13.78	66.10	0.19	--	-- Peak	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 VERTICAL <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>41.35</td><td>74.00</td><td>-32.65</td><td>64.22</td><td>32.62</td><td>10.67</td><td>67.11</td><td>0.95</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>7320.00</td><td>44.28</td><td>74.00</td><td>-29.72</td><td>59.59</td><td>36.82</td><td>13.78</td><td>66.10</td><td>0.19</td><td>--</td><td>-- Peak</td></tr></tbody></table>						Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4880.00	41.35	74.00	-32.65	64.22	32.62	10.67	67.11	0.95	--	-- Peak	2	7320.00	44.28	74.00	-29.72	59.59	36.82	13.78	66.10	0.19	--	-- Peak
		Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																
1	4880.00	41.01	74.00	-32.99	63.88	32.62	10.67	67.11	0.95	--	-- Peak																																																																																																
2	7320.00	43.83	74.00	-30.17	59.14	36.82	13.78	66.10	0.19	--	-- Peak																																																																																																
	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																
1	4880.00	41.35	74.00	-32.65	64.22	32.62	10.67	67.11	0.95	--	-- Peak																																																																																																
2	7320.00	44.28	74.00	-29.72	59.59	36.82	13.78	66.10	0.19	--	-- Peak																																																																																																

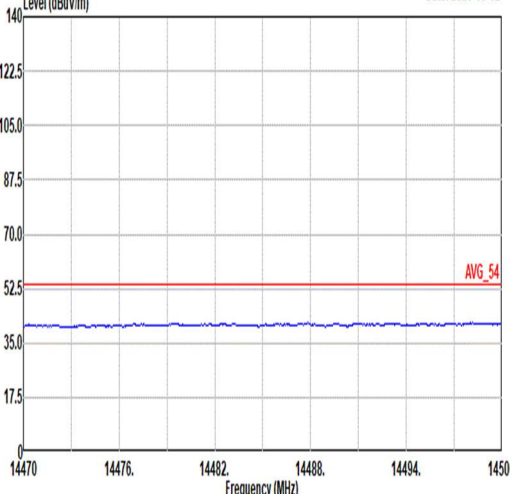
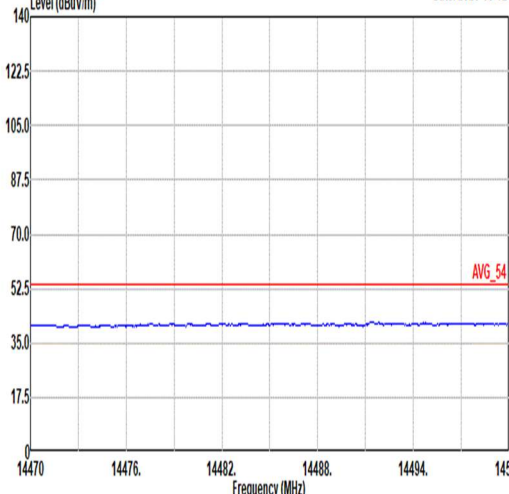
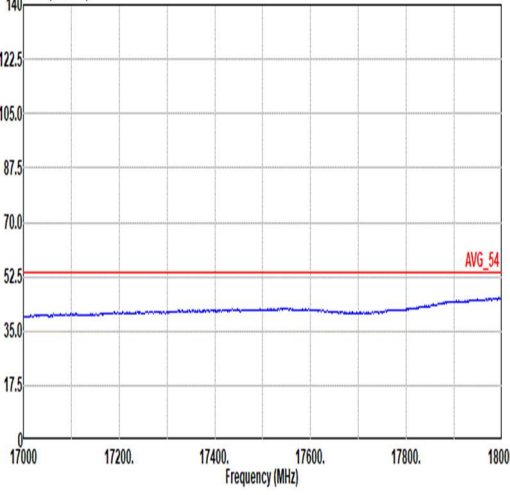
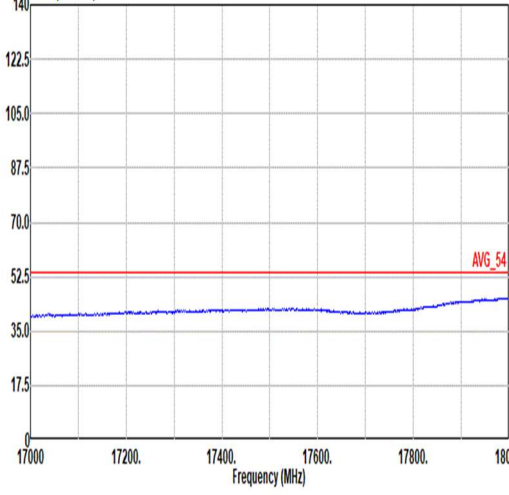


Mode	24	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz	
ANT	6	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL
	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL





Mode	25																																																																																																
	Band Edge																																																																																																
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																
ANT	6																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>54.75</td><td>74.00</td><td>-19.25</td><td>43.18</td><td>27.67</td><td>6.78</td><td>33.00</td><td>10.12</td><td>169</td><td>82 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	54.75	74.00	-19.25	43.18	27.67	6.78	33.00	10.12	169	82 Peak	Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>100.69</td><td>-----</td><td>-----</td><td>89.20</td><td>27.60</td><td>6.78</td><td>33.01</td><td>10.12</td><td>169</td><td>82 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	100.69	-----	-----	89.20	27.60	6.78	33.01	10.12	169	82 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.58	54.75	74.00	-19.25	43.18	27.67	6.78	33.00	10.12	169	82 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2480.00	100.69	-----	-----	89.20	27.60	6.78	33.01	10.12	169	82 Peak																																																																																						
Avg	Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.330kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.28</td><td>43.13</td><td>54.00</td><td>-10.87</td><td>31.42</td><td>27.80</td><td>6.79</td><td>33.00</td><td>10.12</td><td>169</td><td>82 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.28	43.13	54.00	-10.87	31.42	27.80	6.79	33.00	10.12	169	82 Average	Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.330kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>99.90</td><td>-----</td><td>-----</td><td>88.41</td><td>27.60</td><td>6.78</td><td>33.01</td><td>10.12</td><td>169</td><td>82 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.90	-----	-----	88.41	27.60	6.78	33.01	10.12	169	82 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2490.28	43.13	54.00	-10.87	31.42	27.80	6.79	33.00	10.12	169	82 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2480.00	99.90	-----	-----	88.41	27.60	6.78	33.01	10.12	169	82 Average																																																																																						

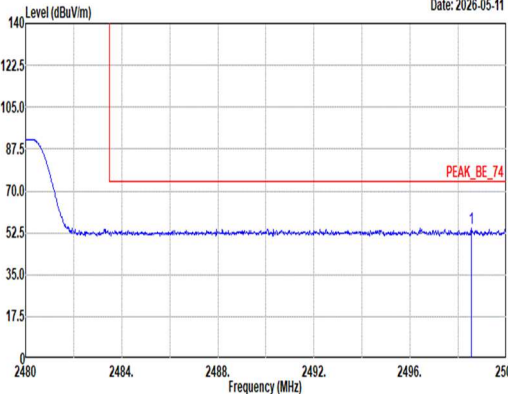
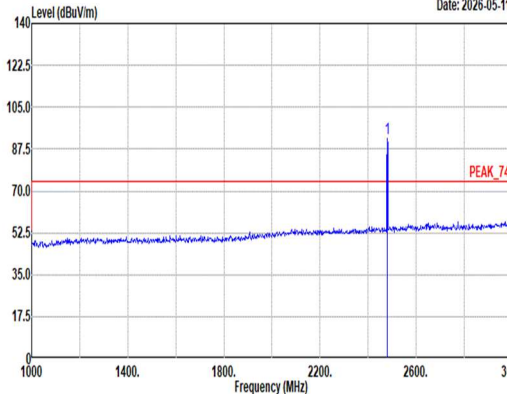
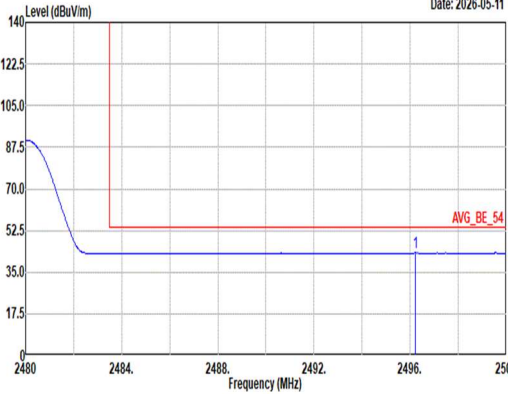
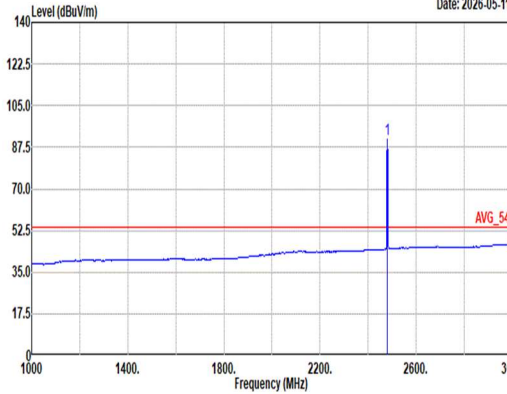


Mode	25																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																		
ANT	6																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2026-05-11  Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.56</td><td>54.35</td><td>74.00</td><td>-19.65</td><td>42.62</td><td>27.80</td><td>6.80</td><td>32.99</td><td>10.12</td><td>200 340 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.56	54.35	74.00	-19.65	42.62	27.80	6.80	32.99	10.12	200 340 Peak	Level (dBuV/m) Date: 2026-05-11  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>91.81</td><td>-----</td><td>-----</td><td>80.32</td><td>27.60</td><td>6.78</td><td>33.01</td><td>10.12</td><td>200 340 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	91.81	-----	-----	80.32	27.60	6.78	33.01	10.12	200 340 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2496.56	54.35	74.00	-19.65	42.62	27.80	6.80	32.99	10.12	200 340 Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	91.81	-----	-----	80.32	27.60	6.78	33.01	10.12	200 340 Peak																																																																																									
Avg	Level (dBuV/m) Date: 2026-05-11  Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.330kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.22</td><td>43.26</td><td>54.00</td><td>-10.74</td><td>31.53</td><td>27.80</td><td>6.80</td><td>32.99</td><td>10.12</td><td>200 340 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.22	43.26	54.00	-10.74	31.53	27.80	6.80	32.99	10.12	200 340 Average	Level (dBuV/m) Date: 2026-05-11  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.330kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>90.90</td><td>-----</td><td>-----</td><td>79.41</td><td>27.60</td><td>6.78</td><td>33.01</td><td>10.12</td><td>200 340 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	90.90	-----	-----	79.41	27.60	6.78	33.01	10.12	200 340 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2496.22	43.26	54.00	-10.74	31.53	27.80	6.80	32.99	10.12	200 340 Average																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	90.90	-----	-----	79.41	27.60	6.78	33.01	10.12	200 340 Average																																																																																									





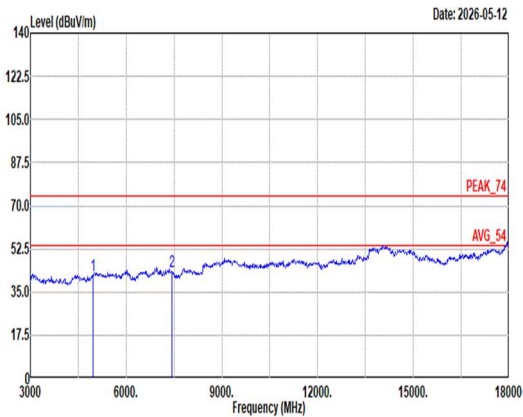
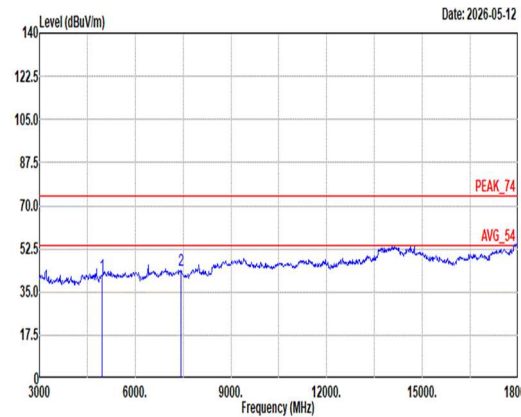


Mode	25																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																			
ANT	6																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL						Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 VERTICAL																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4968.00</td><td>41.61</td><td>74.00</td><td>-32.39</td><td>63.70</td><td>32.94</td><td>11.06</td><td>67.05</td><td>0.96</td><td>-- -- Peak</td></tr><tr><td>2</td><td>7440.00</td><td>43.28</td><td>74.00</td><td>-30.72</td><td>59.12</td><td>36.30</td><td>13.87</td><td>66.19</td><td>0.18</td><td>-- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4968.00	41.61	74.00	-32.39	63.70	32.94	11.06	67.05	0.96	-- -- Peak	2	7440.00	43.28	74.00	-30.72	59.12	36.30	13.87	66.19	0.18	-- -- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4968.00</td><td>41.94</td><td>74.00</td><td>-32.06</td><td>64.03</td><td>32.94</td><td>11.06</td><td>67.05</td><td>0.96</td><td>-- -- Peak</td></tr><tr><td>2</td><td>7440.00</td><td>43.67</td><td>74.00</td><td>-30.33</td><td>59.51</td><td>36.30</td><td>13.87</td><td>66.19</td><td>0.18</td><td>-- -- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4968.00	41.94	74.00	-32.06	64.03	32.94	11.06	67.05	0.96	-- -- Peak	2	7440.00	43.67	74.00	-30.33	59.51	36.30	13.87	66.19	0.18
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	4968.00	41.61	74.00	-32.39	63.70	32.94	11.06	67.05	0.96	-- -- Peak																																																																																																										
2	7440.00	43.28	74.00	-30.72	59.12	36.30	13.87	66.19	0.18	-- -- Peak																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	4968.00	41.94	74.00	-32.06	64.03	32.94	11.06	67.05	0.96	-- -- Peak																																																																																																										
2	7440.00	43.67	74.00	-30.33	59.51	36.30	13.87	66.19	0.18	-- -- Peak																																																																																																										

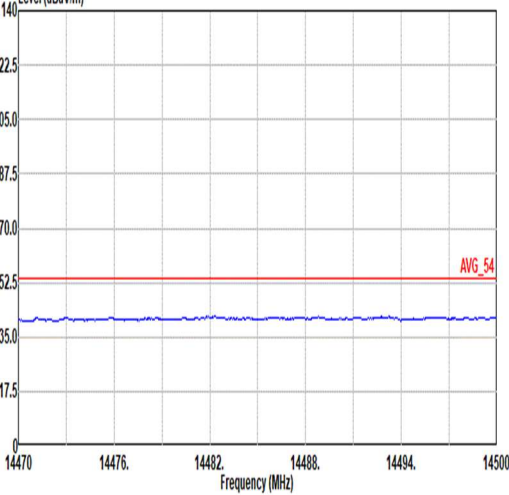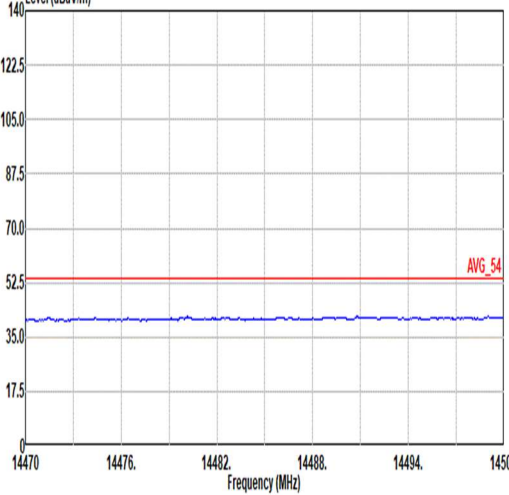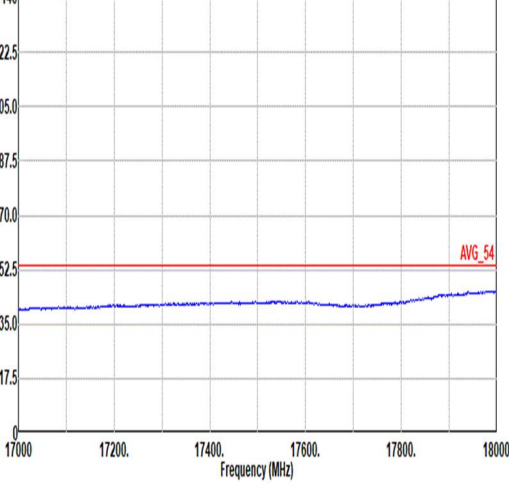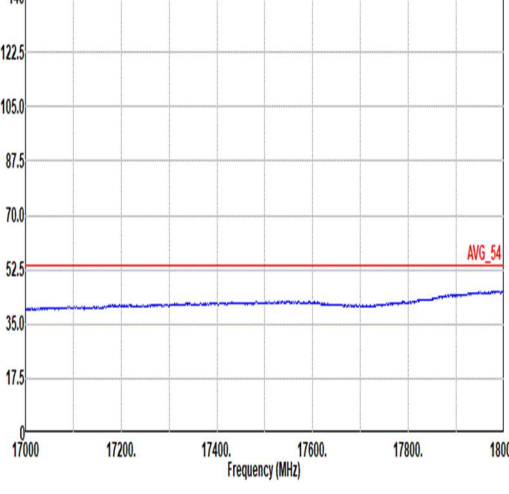

Mode	25	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz	
ANT	6	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL
	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL

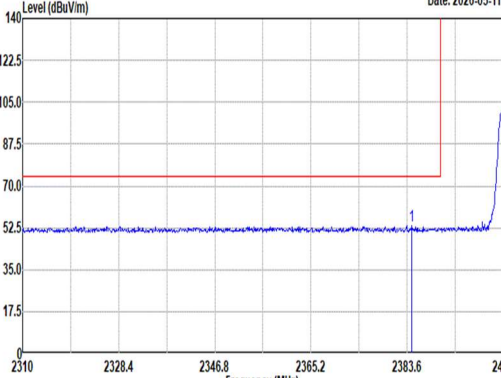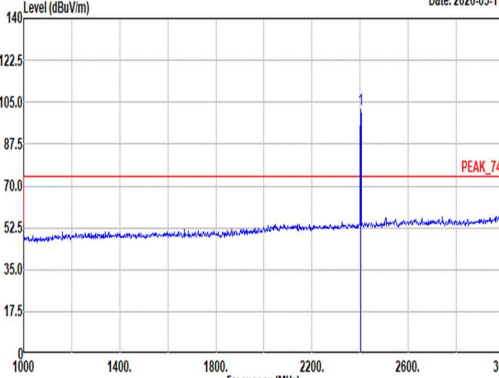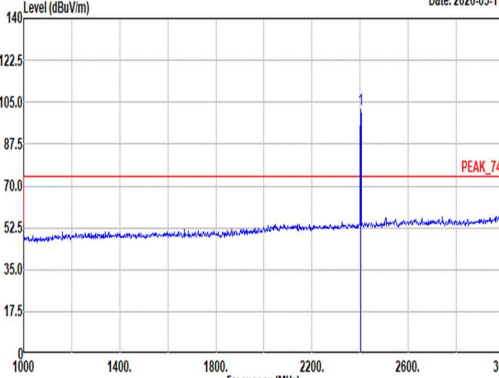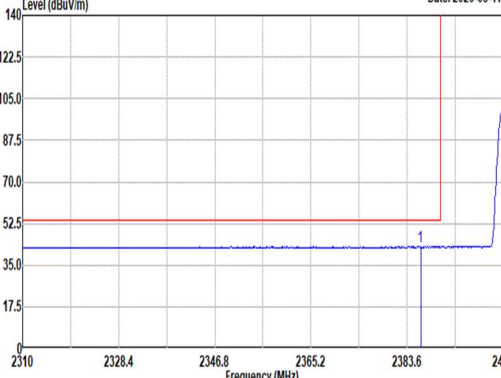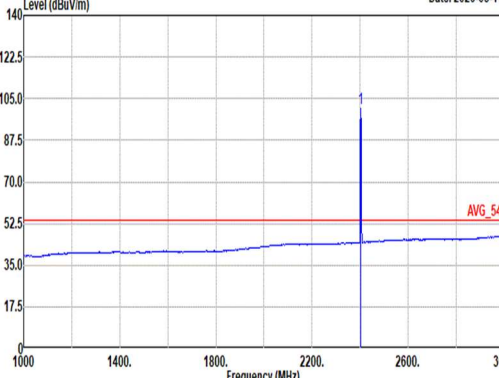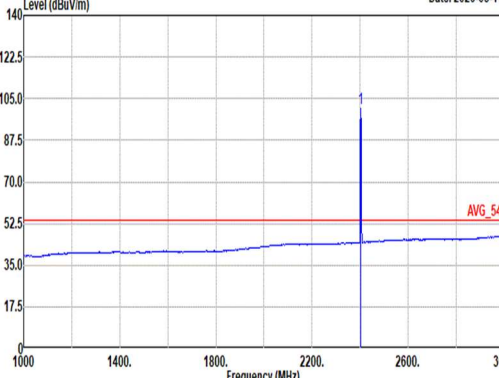

Mode	26																																																																																																
	Band Edge																																																																																																
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																
ANT	6																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2026-05-11  Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2384.52</td><td>53.46</td><td>74.00</td><td>-20.54</td><td>42.53</td><td>27.25</td><td>6.64</td><td>33.08</td><td>10.12</td><td>208</td><td>156 Peak</td></tr></table> <td colspan="5"> Level (dBuV/m) Date: 2026-05-11  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>101.71</td><td>-----</td><td>-----</td><td>90.67</td><td>27.32</td><td>6.66</td><td>33.06</td><td>10.12</td><td>208</td><td>156 Peak</td></tr></table> </td>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.52	53.46	74.00	-20.54	42.53	27.25	6.64	33.08	10.12	208	156 Peak	Level (dBuV/m) Date: 2026-05-11  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>101.71</td><td>-----</td><td>-----</td><td>90.67</td><td>27.32</td><td>6.66</td><td>33.06</td><td>10.12</td><td>208</td><td>156 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.71	-----	-----	90.67	27.32	6.66	33.06	10.12	208	156 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2384.52	53.46	74.00	-20.54	42.53	27.25	6.64	33.08	10.12	208	156 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2402.00	101.71	-----	-----	90.67	27.32	6.66	33.06	10.12	208	156 Peak																																																																																						
Avg	Level (dBuV/m) Date: 2026-05-11  Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.18</td><td>42.80</td><td>54.00</td><td>-11.20</td><td>31.86</td><td>27.26</td><td>6.64</td><td>33.08</td><td>10.12</td><td>208</td><td>156 Average</td></tr></table> <td colspan="5"> Level (dBuV/m) Date: 2026-05-11  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>101.11</td><td>-----</td><td>-----</td><td>90.07</td><td>27.32</td><td>6.66</td><td>33.06</td><td>10.12</td><td>208</td><td>156 Average</td></tr></table> </td>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.18	42.80	54.00	-11.20	31.86	27.26	6.64	33.08	10.12	208	156 Average	Level (dBuV/m) Date: 2026-05-11  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>101.11</td><td>-----</td><td>-----</td><td>90.07</td><td>27.32</td><td>6.66</td><td>33.06</td><td>10.12</td><td>208</td><td>156 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.11	-----	-----	90.07	27.32	6.66	33.06	10.12	208	156 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2386.18	42.80	54.00	-11.20	31.86	27.26	6.64	33.08	10.12	208	156 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2402.00	101.11	-----	-----	90.07	27.32	6.66	33.06	10.12	208	156 Average																																																																																						







Mode	26																																																																																																
	Band Edge																																																																																																
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																
ANT	6																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2376.42</td><td>53.23</td><td>74.00</td><td>-20.77</td><td>42.36</td><td>27.20</td><td>6.63</td><td>33.08</td><td>10.12</td><td>103</td><td>174 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2376.42	53.23	74.00	-20.77	42.36	27.20	6.63	33.08	10.12	103	174 Peak	Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>97.27</td><td>-----</td><td>-----</td><td>86.23</td><td>27.32</td><td>6.66</td><td>33.06</td><td>10.12</td><td>103</td><td>174 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	97.27	-----	-----	86.23	27.32	6.66	33.06	10.12	103	174 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2376.42	53.23	74.00	-20.77	42.36	27.20	6.63	33.08	10.12	103	174 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2402.00	97.27	-----	-----	86.23	27.32	6.66	33.06	10.12	103	174 Peak																																																																																						
Avg	Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2356.83</td><td>42.76</td><td>54.00</td><td>-11.24</td><td>31.94</td><td>27.20</td><td>6.60</td><td>33.10</td><td>10.12</td><td>103</td><td>174 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2356.83	42.76	54.00	-11.24	31.94	27.20	6.60	33.10	10.12	103	174 Average	Level (dBuV/m) Date: 2026-05-11 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>96.51</td><td>-----</td><td>-----</td><td>85.47</td><td>27.32</td><td>6.66</td><td>33.06</td><td>10.12</td><td>103</td><td>174 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	96.51	-----	-----	85.47	27.32	6.66	33.06	10.12	103	174 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2356.83	42.76	54.00	-11.24	31.94	27.20	6.60	33.10	10.12	103	174 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2402.00	96.51	-----	-----	85.47	27.32	6.66	33.06	10.12	103	174 Average																																																																																						



Mode	26																																																																																							
	Harmonic																																																																																							
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																							
ANT	6																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	Level (dBuV/m) Date: 2026-05-12 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.99</td><td>74.00</td><td>-33.01</td><td>64.60</td><td>32.32</td><td>10.29</td><td>67.17</td><td>0.95</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.99	74.00	-33.01	64.60	32.32	10.29	67.17	0.95	--	Peak	Level (dBuV/m) Date: 2026-05-12 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>43.99</td><td>74.00</td><td>-30.01</td><td>67.60</td><td>32.32</td><td>10.29</td><td>67.17</td><td>0.95</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	43.99	74.00	-30.01	67.60	32.32	10.29	67.17	0.95	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	4804.00	40.99	74.00	-33.01	64.60	32.32	10.29	67.17	0.95	--	Peak																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	4804.00	43.99	74.00	-30.01	67.60	32.32	10.29	67.17	0.95	--	Peak																																																																													

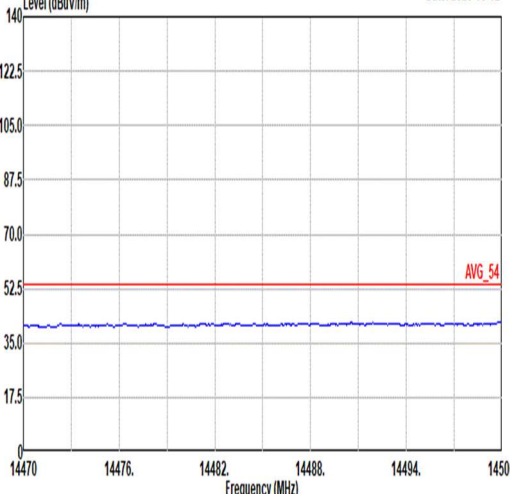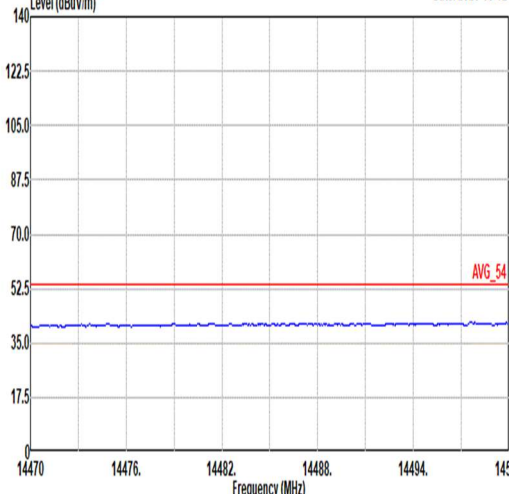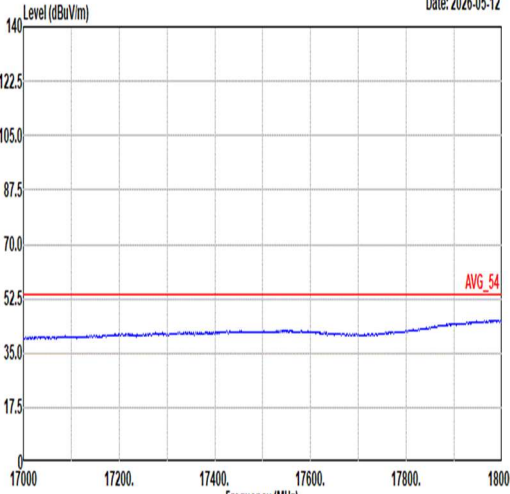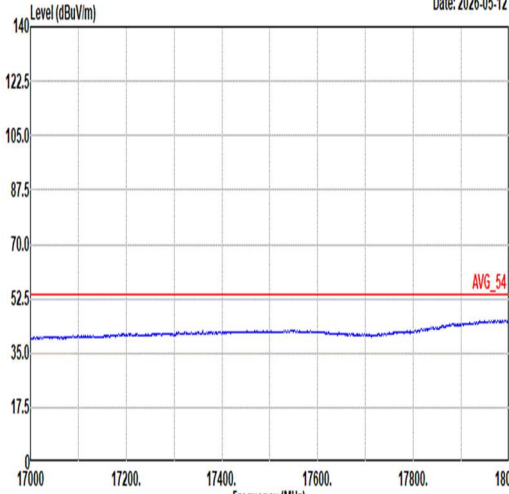

Mode	26	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz	
ANT	6	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL
	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-05-12  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL