



Mode	96	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Partial RU 106/53_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-05-07 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	Level (dBuV/m) Date: 2026-05-07 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL



	97																																																																																																																																					
Mode	Band Edge																																																																																																																																					
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 26/8_5825MHz																																																																																																																																					
ANT	6+7																																																																																																																																					
Pol.	Horizontal						Fundamental																																																																																																																															
Peak	Level (dBuV/m) Date: 2026-05-07 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>48.97</td><td>110.00</td><td>-61.03</td><td>36.36</td><td>33.61</td><td>12.61</td><td>34.74</td><td>1.13</td><td>100</td><td>16 Peak</td></tr><tr><td>2</td><td>5874.13</td><td>52.35</td><td>105.44</td><td>-53.09</td><td>39.70</td><td>33.65</td><td>12.66</td><td>34.76</td><td>1.10</td><td>100</td><td>16 Peak</td></tr><tr><td>3</td><td>5923.75</td><td>50.41</td><td>69.12</td><td>-18.71</td><td>37.74</td><td>33.65</td><td>12.78</td><td>34.80</td><td>1.04</td><td>100</td><td>16 Peak</td></tr><tr><td>4</td><td>5935.13</td><td>50.12</td><td>68.20</td><td>-18.08</td><td>37.47</td><td>33.63</td><td>12.81</td><td>34.81</td><td>1.02</td><td>100</td><td>16 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	48.97	110.00	-61.03	36.36	33.61	12.61	34.74	1.13	100	16 Peak	2	5874.13	52.35	105.44	-53.09	39.70	33.65	12.66	34.76	1.10	100	16 Peak	3	5923.75	50.41	69.12	-18.71	37.74	33.65	12.78	34.80	1.04	100	16 Peak	4	5935.13	50.12	68.20	-18.08	37.47	33.63	12.81	34.81	1.02	100	16 Peak	Level (dBuV/m) Date: 2026-05-07 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>103.68</td><td>-----</td><td>-----</td><td>91.03</td><td>33.66</td><td>12.56</td><td>34.72</td><td>1.15</td><td>100</td><td>16 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	103.68	-----	-----	91.03	33.66	12.56	34.72	1.15	100	16 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	5855.00	48.97	110.00	-61.03	36.36	33.61	12.61	34.74	1.13	100	16 Peak																																																																																																																											
2	5874.13	52.35	105.44	-53.09	39.70	33.65	12.66	34.76	1.10	100	16 Peak																																																																																																																											
3	5923.75	50.41	69.12	-18.71	37.74	33.65	12.78	34.80	1.04	100	16 Peak																																																																																																																											
4	5935.13	50.12	68.20	-18.08	37.47	33.63	12.81	34.81	1.02	100	16 Peak																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	5825.00	103.68	-----	-----	91.03	33.66	12.56	34.72	1.15	100	16 Peak																																																																																																																											
Avg	Blank						Level (dBuV/m) Date: 2026-05-07 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>97.85</td><td>-----</td><td>-----</td><td>85.20</td><td>33.66</td><td>12.56</td><td>34.72</td><td>1.15</td><td>100</td><td>16 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	97.85	-----	-----	85.20	33.66	12.56	34.72	1.15	100	16 Average																																																																															
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	5825.00	97.85	-----	-----	85.20	33.66	12.56	34.72	1.15	100	16 Average																																																																																																																											



Mode	97																																																																																																																																											
	Band Edge																																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 26/8_5825MHz																																																																																																																																											
ANT	6+7																																																																																																																																											
Pol.	Vertical						Fundamental																																																																																																																																					
Peak	Level (dBuV/m) Date: 2026-05-07 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.88</td><td>60.95</td><td>111.08</td><td>-50.13</td><td>48.34</td><td>33.61</td><td>12.61</td><td>34.74</td><td>1.13</td><td>166</td><td>23</td><td>Peak</td></tr><tr><td>2</td><td>5858.38</td><td>55.90</td><td>109.85</td><td>-53.95</td><td>43.28</td><td>33.62</td><td>12.62</td><td>34.74</td><td>1.12</td><td>166</td><td>23</td><td>Peak</td></tr><tr><td>3</td><td>5923.38</td><td>49.94</td><td>69.40</td><td>-19.46</td><td>37.27</td><td>33.65</td><td>12.78</td><td>34.80</td><td>1.04</td><td>166</td><td>23</td><td>Peak</td></tr><tr><td>4</td><td>5941.63</td><td>50.83</td><td>68.20</td><td>-17.37</td><td>38.19</td><td>33.62</td><td>12.82</td><td>34.82</td><td>1.02</td><td>166</td><td>23</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.88	60.95	111.08	-50.13	48.34	33.61	12.61	34.74	1.13	166	23	Peak	2	5858.38	55.90	109.85	-53.95	43.28	33.62	12.62	34.74	1.12	166	23	Peak	3	5923.38	49.94	69.40	-19.46	37.27	33.65	12.78	34.80	1.04	166	23	Peak	4	5941.63	50.83	68.20	-17.37	38.19	33.62	12.82	34.82	1.02	166	23	Peak	Level (dBuV/m) Date: 2026-05-07 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>112.16</td><td>-----</td><td>-----</td><td>99.51</td><td>33.66</td><td>12.56</td><td>34.72</td><td>1.15</td><td>166</td><td>deg</td><td>23</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	112.16	-----	-----	99.51	33.66	12.56	34.72	1.15	166	deg	23	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																		
1	5854.88	60.95	111.08	-50.13	48.34	33.61	12.61	34.74	1.13	166	23	Peak																																																																																																																																
2	5858.38	55.90	109.85	-53.95	43.28	33.62	12.62	34.74	1.12	166	23	Peak																																																																																																																																
3	5923.38	49.94	69.40	-19.46	37.27	33.65	12.78	34.80	1.04	166	23	Peak																																																																																																																																
4	5941.63	50.83	68.20	-17.37	38.19	33.62	12.82	34.82	1.02	166	23	Peak																																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																		
1	5825.00	112.16	-----	-----	99.51	33.66	12.56	34.72	1.15	166	deg	23	Peak																																																																																																																															
Avg	Blank						Level (dBuV/m) Date: 2026-05-07 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>105.51</td><td>-----</td><td>-----</td><td>92.86</td><td>33.66</td><td>12.56</td><td>34.72</td><td>1.15</td><td>166</td><td>23</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	105.51	-----	-----	92.86	33.66	12.56	34.72	1.15	166	23	Average																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																		
1	5825.00	105.51	-----	-----	92.86	33.66	12.56	34.72	1.15	166	23	Average																																																																																																																																



Mode	97																																																																																																																																																																		
	Harmonic																																																																																																																																																																		
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 26/8_5825MHz																																																																																																																																																																		
ANT	6+7																																																																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																																																																												
Peak Avg	Level (dBuV/m) Date: 2026-05-07 PEAK(UNII) AVG 54 Frequency (MHz)						Level (dBuV/m) Date: 2026-05-07 PEAK(UNII) AVG 54 Frequency (MHz)																																																																																																																																																												
	Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL												Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL																																																																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11650.00</td><td>51.38</td><td>74.00</td><td>-22.62</td><td>33.41</td><td>39.00</td><td>17.96</td><td>40.37</td><td>1.38</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11650.00</td><td>41.65</td><td>54.00</td><td>-12.35</td><td>23.68</td><td>39.00</td><td>17.96</td><td>40.37</td><td>1.38</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17475.00</td><td>53.63</td><td>68.20</td><td>-14.57</td><td>36.22</td><td>40.40</td><td>21.82</td><td>46.72</td><td>1.91</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	51.38	74.00	-22.62	33.41	39.00	17.96	40.37	1.38	--	--	Peak	2	11650.00	41.65	54.00	-12.35	23.68	39.00	17.96	40.37	1.38	--	--	Average	3	17475.00	53.63	68.20	-14.57	36.22	40.40	21.82	46.72	1.91	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11650.00</td><td>51.68</td><td>74.00</td><td>-22.32</td><td>33.71</td><td>39.00</td><td>17.96</td><td>40.37</td><td>1.38</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11650.00</td><td>41.76</td><td>54.00</td><td>-12.24</td><td>23.79</td><td>39.00</td><td>17.96</td><td>40.37</td><td>1.38</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17475.00</td><td>53.24</td><td>68.20</td><td>-14.96</td><td>35.83</td><td>40.40</td><td>21.82</td><td>46.72</td><td>1.91</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	51.68	74.00	-22.32	33.71	39.00	17.96	40.37	1.38	--	--	Peak	2	11650.00	41.76	54.00	-12.24	23.79	39.00	17.96	40.37	1.38	--	--	Average	3	17475.00	53.24	68.20	-14.96	35.83	40.40	21.82	46.72	1.91	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	11650.00	51.38	74.00	-22.62	33.41	39.00	17.96	40.37	1.38	--	--	Peak																																																																																																																																																							
2	11650.00	41.65	54.00	-12.35	23.68	39.00	17.96	40.37	1.38	--	--	Average																																																																																																																																																							
3	17475.00	53.63	68.20	-14.57	36.22	40.40	21.82	46.72	1.91	--	--	Peak																																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	11650.00	51.68	74.00	-22.32	33.71	39.00	17.96	40.37	1.38	--	--	Peak																																																																																																																																																							
2	11650.00	41.76	54.00	-12.24	23.79	39.00	17.96	40.37	1.38	--	--	Average																																																																																																																																																							
3	17475.00	53.24	68.20	-14.96	35.83	40.40	21.82	46.72	1.91	--	--	Peak																																																																																																																																																							



Mode	97	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 26/8_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-05-07 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	Level (dBuV/m) Date: 2026-05-07 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL



	98																																																																																																																																			
Mode	Band Edge																																																																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 52/40_5825MHz																																																																																																																																			
ANT	6+7																																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																																													
Peak	Level (dBuV/m) Date: 2026-05-07 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5852.38</td><td>58.83</td><td>116.78</td><td>-57.95</td><td>46.24</td><td>33.68</td><td>12.60</td><td>34.74</td><td>1.13</td><td>161 15 Peak</td></tr><tr><td>2</td><td>5872.38</td><td>50.53</td><td>105.93</td><td>-55.40</td><td>37.89</td><td>33.64</td><td>12.65</td><td>34.76</td><td>1.11</td><td>161 15 Peak</td></tr><tr><td>3</td><td>5925.00</td><td>48.32</td><td>68.20</td><td>-19.88</td><td>35.65</td><td>33.65</td><td>12.78</td><td>34.80</td><td>1.04</td><td>161 15 Peak</td></tr><tr><td>4</td><td>5935.63</td><td>50.70</td><td>68.20</td><td>-17.50</td><td>38.05</td><td>33.63</td><td>12.81</td><td>34.81</td><td>1.02</td><td>161 15 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5852.38	58.83	116.78	-57.95	46.24	33.68	12.60	34.74	1.13	161 15 Peak	2	5872.38	50.53	105.93	-55.40	37.89	33.64	12.65	34.76	1.11	161 15 Peak	3	5925.00	48.32	68.20	-19.88	35.65	33.65	12.78	34.80	1.04	161 15 Peak	4	5935.63	50.70	68.20	-17.50	38.05	33.63	12.81	34.81	1.02	161 15 Peak	Level (dBuV/m) Date: 2026-05-07 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>105.21</td><td>-----</td><td>-----</td><td>92.54</td><td>33.68</td><td>12.55</td><td>34.72</td><td>1.16</td><td>161 15 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	105.21	-----	-----	92.54	33.68	12.55	34.72	1.16	161 15 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5852.38	58.83	116.78	-57.95	46.24	33.68	12.60	34.74	1.13	161 15 Peak																																																																																																																										
2	5872.38	50.53	105.93	-55.40	37.89	33.64	12.65	34.76	1.11	161 15 Peak																																																																																																																										
3	5925.00	48.32	68.20	-19.88	35.65	33.65	12.78	34.80	1.04	161 15 Peak																																																																																																																										
4	5935.63	50.70	68.20	-17.50	38.05	33.63	12.81	34.81	1.02	161 15 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5825.00	105.21	-----	-----	92.54	33.68	12.55	34.72	1.16	161 15 Peak																																																																																																																										
Avg	Blank						Level (dBuV/m) Date: 2026-05-07 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>98.99</td><td>-----</td><td>-----</td><td>86.32</td><td>33.68</td><td>12.55</td><td>34.72</td><td>1.16</td><td>161 15 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	98.99	-----	-----	86.32	33.68	12.55	34.72	1.16	161 15 Average																																																																													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5825.00	98.99	-----	-----	86.32	33.68	12.55	34.72	1.16	161 15 Average																																																																																																																										



Mode	98																																																																																																																																				
	Band Edge																																																																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 52/40_5825MHz																																																																																																																																				
ANT	6+7																																																																																																																																				
Pol.	Vertical						Fundamental																																																																																																																														
Peak	Level (dBuV/m) Date: 2026-05-08 PEAK_BE(B4)_16-24 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5853.50</td><td>61.49</td><td>114.22</td><td>-52.73</td><td>48.89</td><td>33.61</td><td>12.60</td><td>34.74</td><td>1.13</td><td>200</td><td>19 Peak</td></tr><tr><td>2</td><td>5874.38</td><td>50.58</td><td>105.37</td><td>-54.79</td><td>37.93</td><td>33.65</td><td>12.66</td><td>34.76</td><td>1.10</td><td>200</td><td>19 Peak</td></tr><tr><td>3</td><td>5924.88</td><td>48.84</td><td>68.29</td><td>-19.45</td><td>36.17</td><td>33.65</td><td>12.78</td><td>34.80</td><td>1.04</td><td>200</td><td>19 Peak</td></tr><tr><td>4</td><td>5930.63</td><td>50.09</td><td>68.20</td><td>-18.11</td><td>37.43</td><td>33.64</td><td>12.80</td><td>34.81</td><td>1.03</td><td>200</td><td>19 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5853.50	61.49	114.22	-52.73	48.89	33.61	12.60	34.74	1.13	200	19 Peak	2	5874.38	50.58	105.37	-54.79	37.93	33.65	12.66	34.76	1.10	200	19 Peak	3	5924.88	48.84	68.29	-19.45	36.17	33.65	12.78	34.80	1.04	200	19 Peak	4	5930.63	50.09	68.20	-18.11	37.43	33.64	12.80	34.81	1.03	200	19 Peak	Level (dBuV/m) Date: 2026-05-08 PEAK(UNII) Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>100.60</td><td>-----</td><td>-----</td><td>95.93</td><td>33.68</td><td>12.55</td><td>34.72</td><td>1.16</td><td>200</td><td>19 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	100.60	-----	-----	95.93	33.68	12.55	34.72	1.16	200	19 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5853.50	61.49	114.22	-52.73	48.89	33.61	12.60	34.74	1.13	200	19 Peak																																																																																																																										
2	5874.38	50.58	105.37	-54.79	37.93	33.65	12.66	34.76	1.10	200	19 Peak																																																																																																																										
3	5924.88	48.84	68.29	-19.45	36.17	33.65	12.78	34.80	1.04	200	19 Peak																																																																																																																										
4	5930.63	50.09	68.20	-18.11	37.43	33.64	12.80	34.81	1.03	200	19 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5825.00	100.60	-----	-----	95.93	33.68	12.55	34.72	1.16	200	19 Peak																																																																																																																										
Avg	Blank						Level (dBuV/m) Date: 2026-05-08 AVG_54 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>101.88</td><td>-----</td><td>-----</td><td>89.21</td><td>33.68</td><td>12.55</td><td>34.72</td><td>1.16</td><td>200</td><td>19 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	101.88	-----	-----	89.21	33.68	12.55	34.72	1.16	200	19 Average																																																																															
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5825.00	101.88	-----	-----	89.21	33.68	12.55	34.72	1.16	200	19 Average																																																																																																																										



Mode	98																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 52/40_5825MHz																																																																																																																																							
ANT	6+7																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	Level (dBuV/m) Date: 2026-05-08 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11650.00</td><td>52.01</td><td>74.00</td><td>-21.99</td><td>34.04</td><td>39.00</td><td>17.96</td><td>40.37</td><td>1.38</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 11650.00</td><td>42.08</td><td>54.00</td><td>-11.92</td><td>24.11</td><td>39.00</td><td>17.96</td><td>40.37</td><td>1.38</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3 17475.00</td><td>53.74</td><td>68.20</td><td>-14.46</td><td>36.33</td><td>40.40</td><td>21.82</td><td>46.72</td><td>1.91</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11650.00	52.01	74.00	-21.99	34.04	39.00	17.96	40.37	1.38	--	--	Peak	2 11650.00	42.08	54.00	-11.92	24.11	39.00	17.96	40.37	1.38	--	--	Average	3 17475.00	53.74	68.20	-14.46	36.33	40.40	21.82	46.72	1.91	--	--	Peak	Level (dBuV/m) Date: 2026-05-08 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11650.00</td><td>51.04</td><td>74.00</td><td>-22.96</td><td>33.07</td><td>39.00</td><td>17.96</td><td>40.37</td><td>1.38</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 11650.00</td><td>41.85</td><td>54.00</td><td>-12.15</td><td>23.88</td><td>39.00</td><td>17.96</td><td>40.37</td><td>1.38</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3 17475.00</td><td>53.11</td><td>68.20</td><td>-15.09</td><td>35.70</td><td>40.40</td><td>21.82</td><td>46.72</td><td>1.91</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11650.00	51.04	74.00	-22.96	33.07	39.00	17.96	40.37	1.38	--	--	Peak	2 11650.00	41.85	54.00	-12.15	23.88	39.00	17.96	40.37	1.38	--	--	Average	3 17475.00	53.11	68.20	-15.09	35.70	40.40	21.82	46.72	1.91	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1 11650.00	52.01	74.00	-21.99	34.04	39.00	17.96	40.37	1.38	--	--	Peak																																																																																																																													
2 11650.00	42.08	54.00	-11.92	24.11	39.00	17.96	40.37	1.38	--	--	Average																																																																																																																													
3 17475.00	53.74	68.20	-14.46	36.33	40.40	21.82	46.72	1.91	--	--	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1 11650.00	51.04	74.00	-22.96	33.07	39.00	17.96	40.37	1.38	--	--	Peak																																																																																																																													
2 11650.00	41.85	54.00	-12.15	23.88	39.00	17.96	40.37	1.38	--	--	Average																																																																																																																													
3 17475.00	53.11	68.20	-15.09	35.70	40.40	21.82	46.72	1.91	--	--	Peak																																																																																																																													



Mode	98	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 52/40_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-05-08 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	Level (dBuV/m) Date: 2026-05-08 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL




Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
6+7	802.11a	98.87	-	-	10Hz
6+7	5GHz 802.11ac VHT20	100.00	-	-	10Hz
6+7	5GHz 802.11ac VHT40	100.00	-	-	10Hz
6+7	5GHz 802.11ac VHT80	100.00	-	-	10Hz
6+7	5GHz 802.11ac VHT160	99.14	-	-	10Hz
6+7	5GHz 802.11ax HE20 Full RU	100.00	-	-	10Hz
6+7	5GHz 802.11ax HE20 26 RU	100.00	-	-	10Hz
6+7	5GHz 802.11ax HE20 52 RU	100.00	-	-	10Hz
6+7	5GHz 802.11ax HE20 106 RU	100.00	-	-	10Hz
6+7	5GHz 802.11ax HE40 Full RU	100.00	-	-	10Hz
6+7	5GHz 802.11ax HE40 242 RU	100.00	-	-	10Hz
6+7	5GHz 802.11ax HE80 Full RU	98.92	-	-	10Hz
6+7	5GHz 802.11ax HE80 484 RU	98.93	-	-	10Hz
6+7	5GHz 802.11ax HE160 Full RU	99.29	-	-	10Hz
6+7	5GHz 802.11ax HE160 996 RU	98.38	-	-	10Hz




802.11a

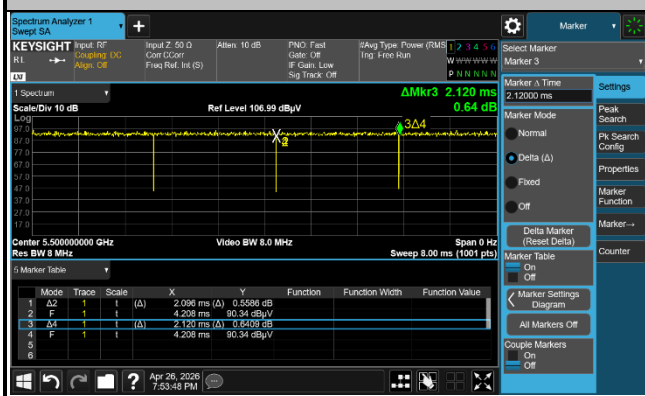


802.11ac VHT20

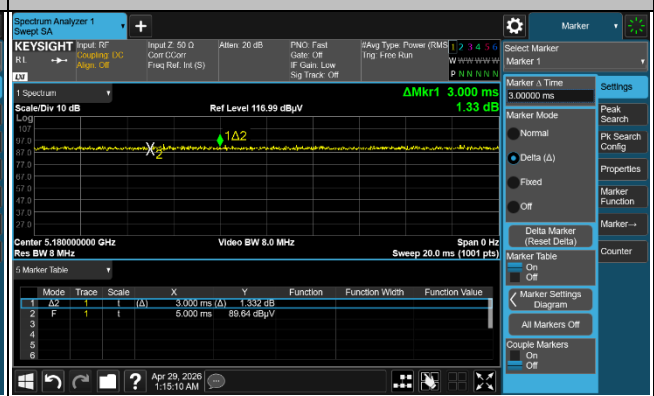


802.11ac VHT40

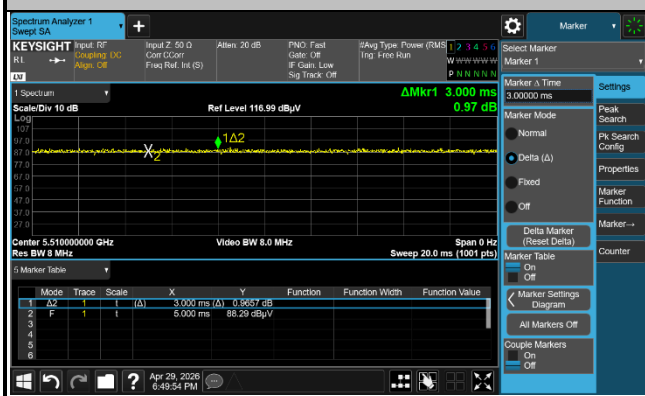


802.11ac VHT80

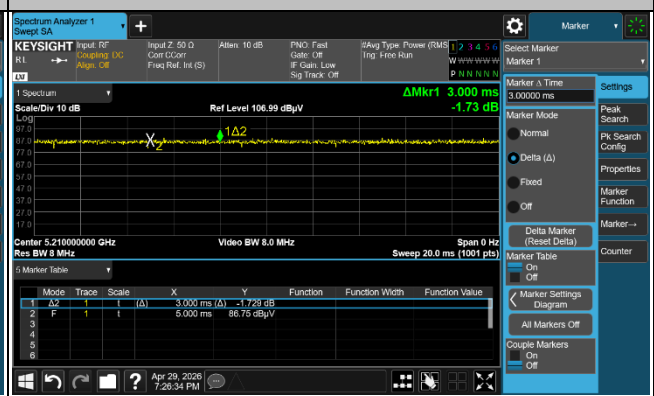

802.11ac VHT160

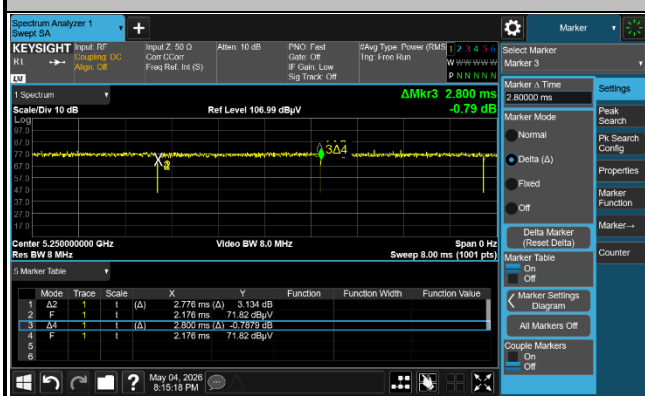


802.11ax HE20 Full RU

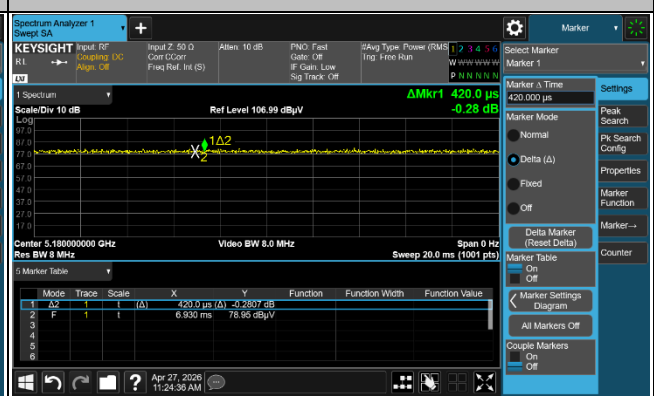





802.11ax HE20 26 RU

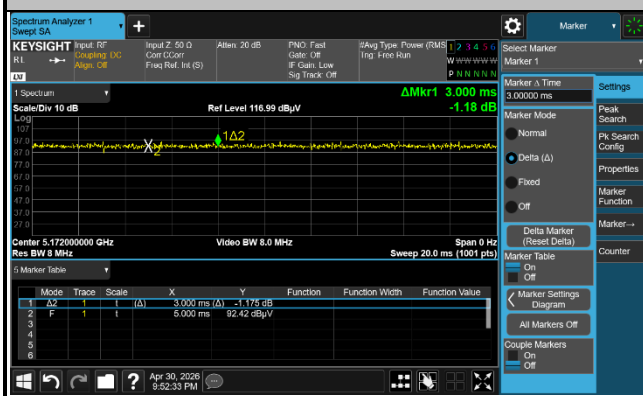


802.11ax HE20 52 RU

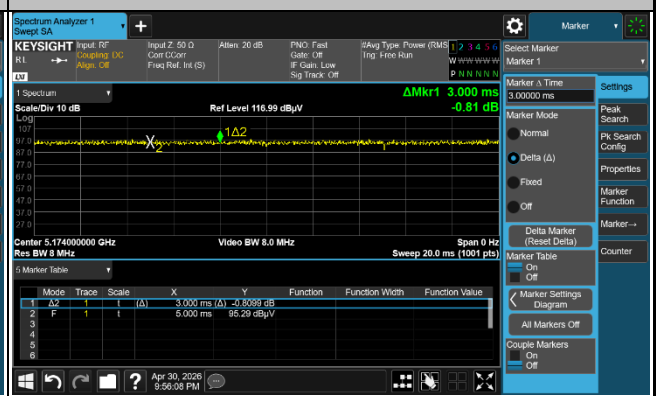


802.11ax HE20 106 RU

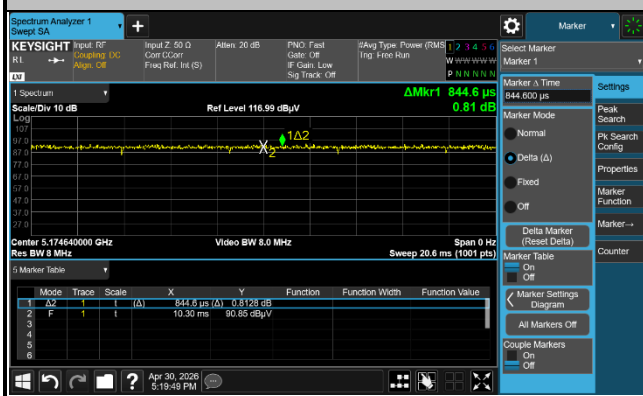


802.11ax HE40 Full RU


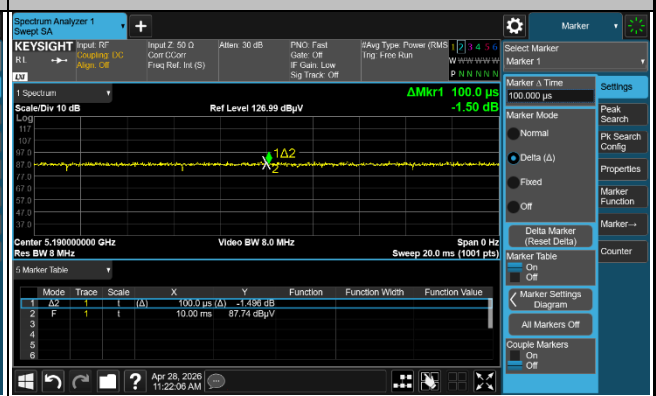


802.11ax HE40 242 RU

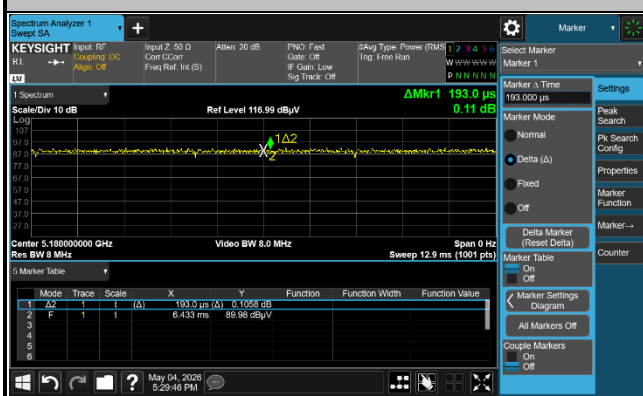

802.11ax HE80 Full RU

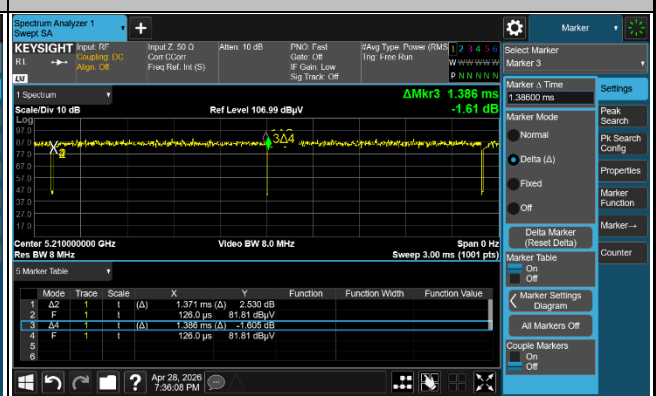

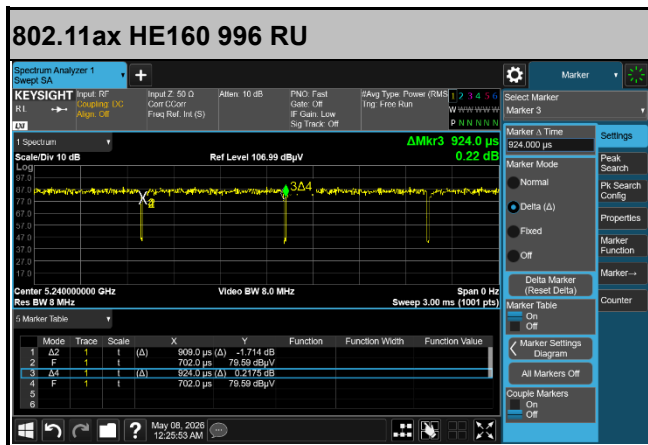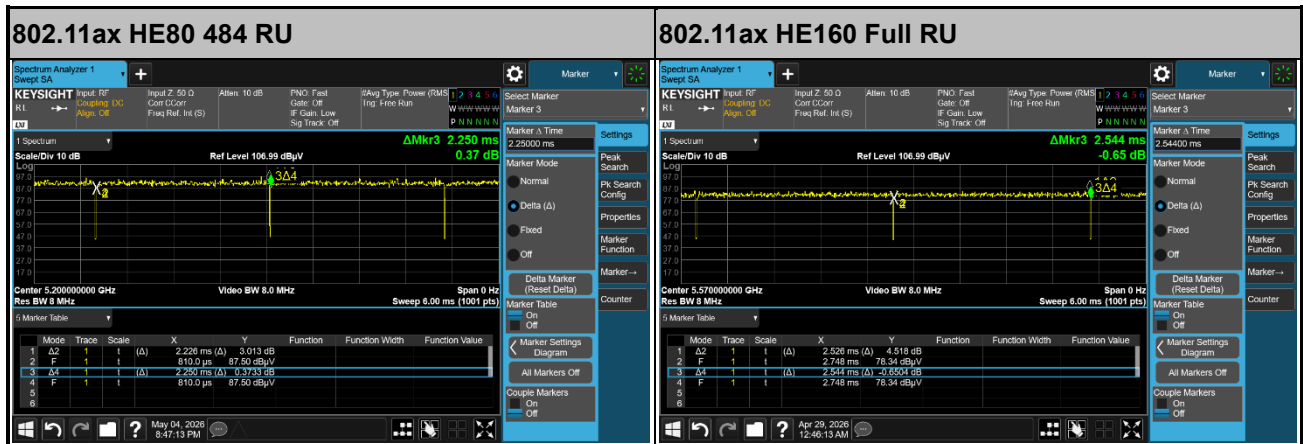



Appendix E. Spot Check Evaluation on PY7-84526Y

Conducted power test configurations were selected from the worst cases identified in the reference model and tested to demonstrate the test data from reference model remains representative for the variant model.

The deviation between the spot check and the referenced values is within 1dB, therefore data referencing is justified according to the guidance in the TCB inquiry

Mode	Test Item	PY7-75158T Reference Worst mode Test Result	PY7-84526Y Variant Check Test Result	Deviation	Limit (dB)
WLAN 5G B4	Average Output Power	11.91 dBm	11.99dBm	0.08	Deviation (ddB) < 1 dB

————THE END————